




Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	68%
Test Engineer	Stim Sung	Configurations	WLAN 2.4GHz, WLAN 5GHz, WWAN (slot 1) and WWAN (slot 2)

Horizontal

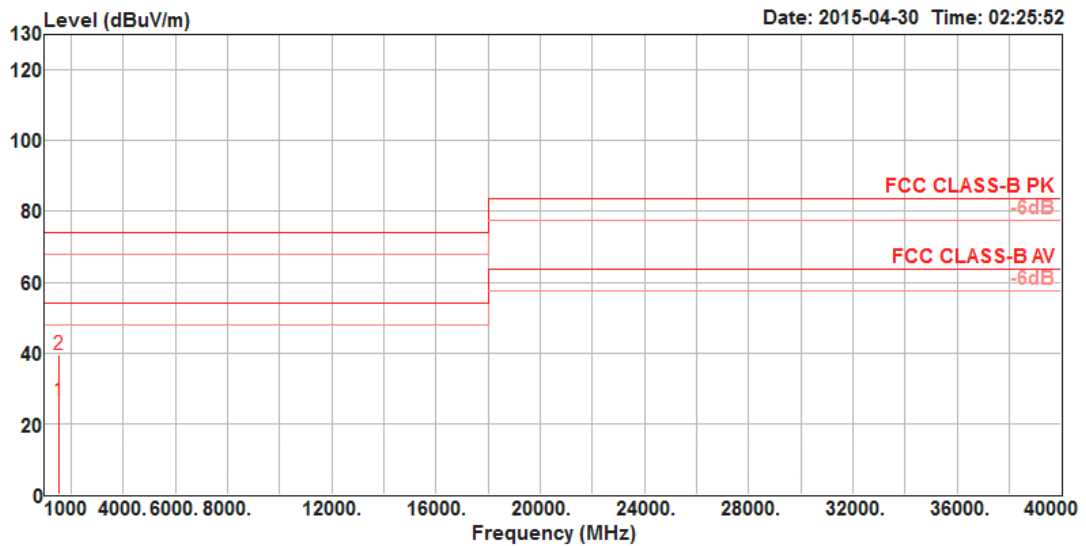

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1538.31	26.47	54.00	-27.53	33.81	3.03	25.46	35.83	100	228	Average	HORIZONTAL
2	1541.61	39.63	74.00	-34.37	46.95	3.04	25.46	35.82	100	228	Peak	HORIZONTAL

Vertical

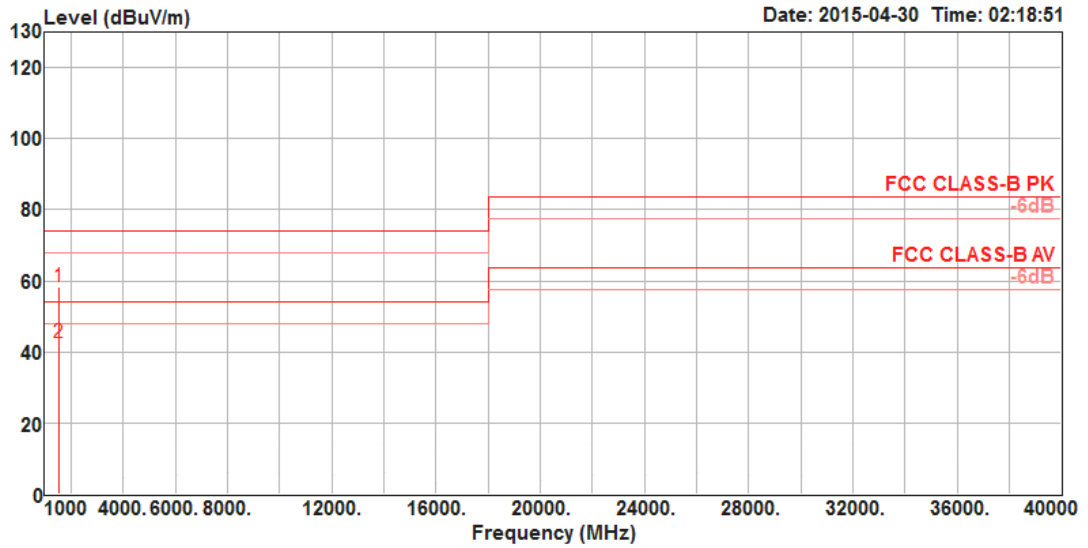

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1539.29	58.45	74.00	-15.55	65.79	3.04	25.45	35.83	100	226 Peak	VERTICAL
2	1541.35	42.68	54.00	-11.32	50.00	3.04	25.46	35.82	100	226 Average	VERTICAL