


## Appendix C. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


<b>Temperature</b>	24°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	WLAN 2.4GHz, WLAN 5GHz, WWAN (slot 1) and WWAN (slot 2)

**Horizontal**

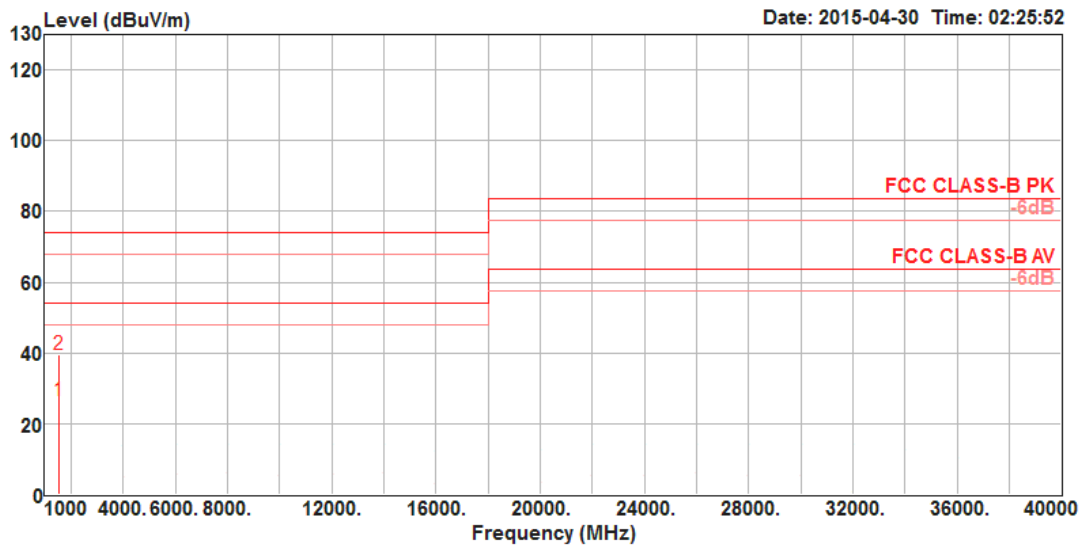

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1538.31	26.47	54.00	-27.53	33.81	3.03	25.46	35.83	100	228	Average	HORIZONTAL
2	1541.61	39.63	74.00	-34.37	46.95	3.04	25.46	35.82	100	228	Peak	HORIZONTAL

Vertical

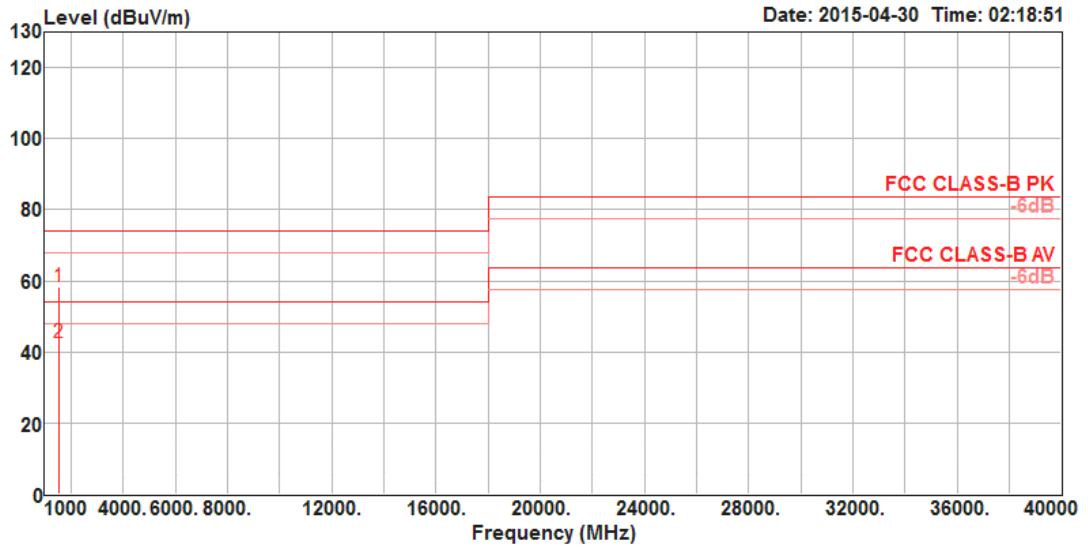

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1539.29	58.45	74.00	-15.55	65.79	3.04	25.45	35.83	100	226 Peak	VERTICAL
2	1541.35	42.68	54.00	-11.32	50.00	3.04	25.46	35.82	100	226 Average	VERTICAL