
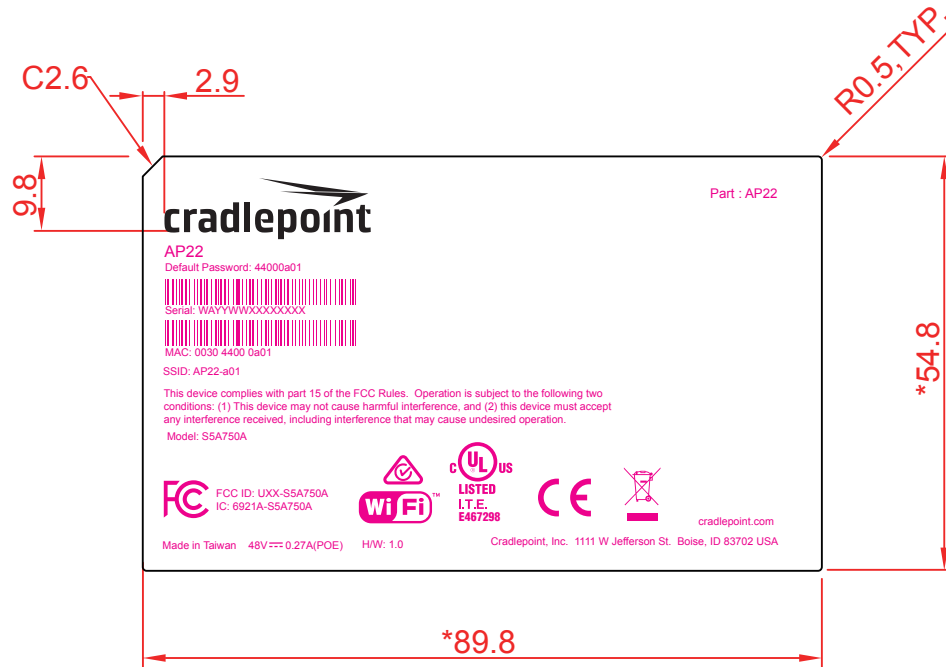


| PART NUMBER BLOCK | |
|-------------------|-----|
| PART NUMBER | REV |
| 4L-SAQ5D13-001 | D |

| REVISIONS | | | |
|-----------|-----------------|----------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| D | RELEASE TO FILE | 10/11/17 | EDWARD SU |

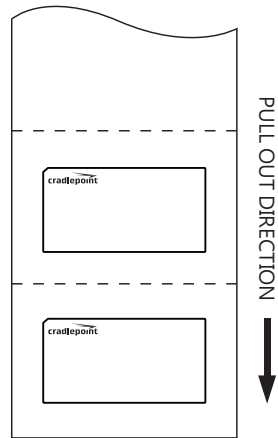

NOTE:

- MATERIAL: WHITE PET, T=0.05 mm 高冠RHTYL
- ADHESIVE: ACRYLIC, t=0.024 ± 0.003 mm
- FINISH: MATTE PP, T=0.025 mm (可打印) 金利寶PPATM(T)(36)(N)J
- COLOR :
 - BACKGROUND= PEPPER COLOR (WHITE)
 - PRINTING=BLACK
- 被貼物: 鋁鑄鐵, 噴漆.
- UL APPROVED, PGJ12, PRINTED
UL APPROVED: CM-200-WST, THERMAL TRANSFER RIBBON: Ricoh B110C, B110CR
- ROLL STOCK, 離型紙左右間距各 3 ± 0.5 mm, 齒刀上下間距各 1.5 ± 0.5 mm
- TEMPERATURE RESISTANT= 120° C.

| TEST ITEM | TEST SPEC | TEST CONDITION | CRITERIA |
|------------|-----------------------------------|------------------------------|---|
| 1 附著力測試 | ISO Class.: 1 ASTM Class.: 4 B | ASTM D3359-02/ ISO 2409:2007 | Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected. |

— INLINE PRINT

| | | | | | | | | | |
|-------------|--|---|--|--|------------|--|-------------------|---------------------------|-----------|
| | | UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: | | | | 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-6667321 | | | |
| | | INTEGRAL DIMENSIONS ± 0.5 1 PLACE DECIMAL ± 0.3 | | ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2 | | | | | DWG TITLE |
| | | MATERIAL: SEE NOTES | | | | LABEL, PRODUCT, AP22, SAQ5-D1 | | | |
| | | FINISH: SEE NOTES | | | | | | | |
| | | THIRD ANGLE PROJECTION | | DRAWN | CATHY CHEN | 10/11/17 | SIZE A4 | DWG NO. 4L-SAQ5D13-001 | REV D |
| NEXT ASSY | | USED ON | | ENGR | CATHY CHEN | 10/11/17 | | | |
| APPLICATION | | | | APVD | EDWARD SU | 10/11/17 | | | |
| | | | | SCALE | 1/1 | | SHEET | | 1 OF 1 |