



Choose Scandinavian trust

Wireless test report 380248-1TRFWL

Applicant:

TOHNICHI MFG.CO.,LTD.

Product type:

RF SETTING BOX

Model:

SB-FH2

FCC ID:

UY6-SBFH2

IC Registration number:

6561B-SBFH2

Specifications:

◆ FCC 47 CFR Part 15 Subpart C, §15.247

Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz

◆ RSS-247, Issue 2, Feb 2017, Section 5

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

5) Standard specifications for frequency hopping systems and digital transmission systems operating in the bands 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz

Date of issue: November 6, 2019

Mark Libbrecht, EMC Specialist

Tested by

David Duchesne, Senior EMC/Wireless Specialist

Reviewed by

Mark Libbrecht

Signature

Signature

www.nemko.com

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation

FCC 15.247 and RSS-247.docx; Date: Apr 2019



Test location(s)

| | |
|-----------------------|--|
| Company name | Nemko Canada Inc. |
| Site name | Cambridge |
| Address | 130 Saltsman Drive, Unit #1 |
| City | Cambridge |
| Province | Ontario |
| Postal code | N3E 0B2 |
| Country | Canada |
| Telephone | Tel: +1 519 680 4811 |
| Website | www.nemko.com |
| Site number (3 m SAC) | FCC/IC: CA0101 |

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

| | |
|---|-----------|
| Table of contents | 3 |
| Section 1. Report summary | 4 |
| 1.1 Applicant and manufacturer | 4 |
| 1.2 Test specifications | 4 |
| 1.3 Test methods | 4 |
| 1.4 Statement of compliance | 4 |
| 1.5 Exclusions | 4 |
| 1.6 Test report revision history | 4 |
| Section 2. Summary of test results..... | 5 |
| 2.1 FCC Part 15 Subpart C, general requirements test results..... | 5 |
| 2.2 FCC Part 15 Subpart C, intentional radiators test results for frequency hopping spread spectrum systems..... | 5 |
| 2.3 ISED RSS-Gen, Issue 5, test results..... | 6 |
| 2.4 ISED RSS-247, Issue 2, test results for frequency hopping spread spectrum systems (FHSS) | 6 |
| Section 3. Equipment under test (EUT) details | 7 |
| 3.1 Sample information..... | 7 |
| 3.2 EUT information | 7 |
| 3.3 Technical information | 7 |
| 3.4 Product description and theory of operation | 7 |
| 3.5 EUT exercise details..... | 7 |
| 3.6 EUT setup diagram | 8 |
| 3.7 EUT sub assemblies | 8 |
| Section 4. Engineering considerations..... | 9 |
| 4.1 Modifications incorporated in the EUT..... | 9 |
| 4.2 Technical judgment | 9 |
| 4.3 Deviations from laboratory tests procedures | 9 |
| Section 5. Test conditions..... | 10 |
| 5.1 Atmospheric conditions | 10 |
| 5.2 Power supply range | 10 |
| Section 6. Measurement uncertainty | 11 |
| 6.1 Uncertainty of measurement | 11 |
| Section 7. Test equipment | 12 |
| 7.1 Test equipment list..... | 12 |
| Section 8. Testing data | 13 |
| 8.1 FCC 15.31(e) Variation of power source | 13 |
| 8.2 FCC 15.31(m) and RSS-Gen 6.9 Number of frequencies | 14 |
| 8.3 FCC 15.203 and RSS-Gen, section 6.8 Antenna requirement | 16 |
| 8.4 FCC 15.247(a)(1) and RSS-247 5.1 Frequency Hopping Systems requirements, 2 GHz operation | 17 |
| 8.5 FCC 15.247(b) and RSS-247 5.4(b) Transmitter output power and e.i.r.p. requirements for FHSS 2 GHz | 22 |
| 8.6 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) unwanted emissions | 24 |
| Section 9. Block diagrams of test set-ups | 32 |
| 9.1 Radiated emissions set-up for frequencies below 1 GHz..... | 32 |
| 9.2 Radiated emissions set-up for frequencies above 1 GHz..... | 32 |
| 9.3 Antenna port set-up | 33 |

Section 1. Report summary

1.1 Applicant and manufacturer

| | |
|--------------|---------------------------|
| Company name | TOHNICHI MFG.CO.,LTD. |
| Address | 2-12, Omori-kita 2-Chome, |
| City | Ota-ku, Tokyo 143-0016 |
| Country | Japan |

1.2 Test specifications

| | |
|--|--|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–585 MHz |
| RSS-247, Issue 2, Feb 2017, Section 5 | Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

1.3 Test methods

| | |
|--|---|
| 558074 D01 15.247 Meas Guidance v05r02 (April 2, 2019) | Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules. |
| DA 00-705, Released March 30, 2000 | Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems |
| ANSI C63.10 v2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Exclusions

None

1.6 Test report revision history

| Revision # | Date of issue | Details of changes made to test report |
|------------|------------------|--|
| TRF | November 6, 2019 | Original report issued |

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Table 2.1-1: FCC general requirements results

| Part | Test description | Verdict |
|------------|------------------------------|------------|
| §15.207(a) | Conducted limits | Not tested |
| §15.31(e) | Variation of power source | Pass |
| §15.31(m) | Number of tested frequencies | Pass |
| §15.203 | Antenna requirement | Pass |

Notes: EUT is a battery operated device, the testing was performed using fresh batteries.

2.2 FCC Part 15 Subpart C, intentional radiators test results for frequency hopping spread spectrum systems

Table 2.2-1: FCC 15.247 results for FHSS

| Part | Test description | Verdict |
|--------------------|---|----------------|
| §15.247(a)(1)(i) | Requirements for operation in the 902–928 MHz band | Not applicable |
| §15.247(a)(1)(ii) | Requirements for operation in the 5725–5850 MHz band | Not applicable |
| §15.247(a)(1)(iii) | Requirements for operation in the 2400–2483.5 MHz band | Pass |
| §15.247(b)(1) | Maximum peak output power in the 2400–2483.5 MHz band and 5725–5850 MHz band | Pass |
| §15.247(b)(2) | Maximum peak output power in the 902–928 MHz band | Not applicable |
| §15.247(c)(1) | Fixed point-to-point operation with directional antenna gains greater than 6 dBi | Not applicable |
| §15.247(c)(2) | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams | Not applicable |
| §15.247(d) | Spurious emissions | Pass |
| §15.247(f) | Time of occupancy for hybrid systems | Not applicable |

2.3 ISED RSS-Gen, Issue 5, test results

Table 2.3-1: RSS-Gen results

| Part | Test description | Verdict |
|------|---|----------------|
| 7.3 | Receiver radiated emission limits | Not applicable |
| 7.4 | Receiver conducted emission limits | Not applicable |
| 6.9 | Operating bands and selection of test frequencies | Pass |
| 8.8 | AC power-line conducted emissions limits | Not tested |

Notes: ¹ According to sections 5.2 and 5.3 of RSS-Gen, Issue 5 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

2.4 ISED RSS-247, Issue 2, test results for frequency hopping spread spectrum systems (FHSS)

Table 2.4-1: RSS-247 results for FHSS

| Part | Test description | Verdict |
|---------|--|----------------|
| 5.1 (a) | Bandwidth of a frequency hopping channel | Pass |
| 5.1 (b) | Minimum channel spacing | Pass |
| 5.1 (c) | Systems operating in the 902–928 MHz band | Not applicable |
| 5.1 (d) | Systems operating in the 2400–2483.5 MHz band | Pass |
| 5.1 (e) | Systems operating in the 5725–5850 MHz band | Not applicable |
| 5.3 | Hybrid Systems | |
| 5.3 (a) | Digital modulation turned off | Not applicable |
| 5.3 (b) | Frequency hopping turned off | Not applicable |
| 5.4 | Transmitter output power and e.i.r.p. requirements | |
| 5.4 (a) | Systems operating in the 902–928 MHz band | Not applicable |
| 5.4 (b) | Systems operating in the 2400–2483.5 MHz band | Pass |
| 5.4 (c) | Systems operating in the 5725–5850 MHz | Not applicable |
| 5.4 (e) | Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band | Not applicable |
| 5.4 (f) | Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not applicable |
| 5.5 | Unwanted emissions | Pass |

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

| | |
|------------------------|-------------------|
| Receipt date | September 4, 2019 |
| Nemko sample ID number | 1 |

3.2 EUT information

| | |
|---------------|----------------|
| Product type | RF SETTING BOX |
| Model | SB-FH2 |
| Serial number | 801056F |

3.3 Technical information

| | |
|--|---|
| Applicant IC company number | 6561B |
| IC UPN number | 6561B-SBFH2 |
| All used IC test site(s) Reg. number | 2040A-4 |
| RSS number and Issue number | RSS-247 Issue 2, Feb 2017 |
| Frequency band | 2400–2483.5 MHz |
| Frequency Min (MHz) | 2402 |
| Frequency Max (MHz) | 2479 |
| RF power Max (W), Conducted | 0.008 (9.1 dBm) |
| Field strength, dB μ V/m @ 3 m | N/A |
| Measured BW (kHz), 99% OBW | 1471 |
| Type of modulation | GFSK |
| Emission classification (F1D, G1D, D1D) | W7D |
| Transmitter spurious, dB μ V/m @ 3 m | 49.6 |
| Power requirements | 9 V _{DC} Battery |
| Antenna information | 2dBi (AP09A-A00-0, 1/4λ dipole antenna) |

3.4 Product description and theory of operation

Setting box to set various kinds of parameter for radio equipment being compatible

3.5 EUT exercise details

The SB-FH2 controller was set to transmit a continuous modulated signal using the test mode provided for the EUT. The Tx sweep all command was used to enable hopping.

3.6 EUT setup diagram

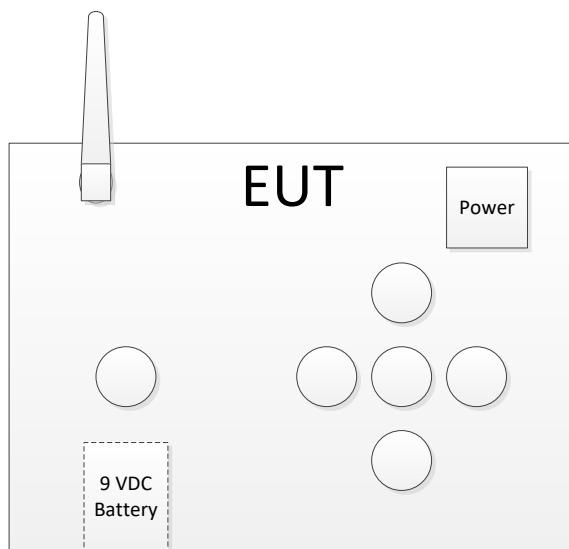


Figure 3.6-1: Setup diagram

3.7 EUT sub assemblies

Table 3.7-1: EUT sub assemblies

| Description | Brand name | Model/Part number | Serial number |
|---------------|------------|-------------------|---------------|
| 9 VDC Battery | Duracell | MN1604 | 6LP3146 |

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

| | |
|-------------------|---------------|
| Temperature | 15–30 °C |
| Relative humidity | 20–75 % |
| Air pressure | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

UKAS Lab 34 and TIA-603-B have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Table 6.1-1: Measurement uncertainty

| Test name | Measurement uncertainty, dB |
|-----------------------------------|-----------------------------|
| All antenna port measurements | 0.55 |
| Conducted spurious emissions | 1.13 |
| Radiated spurious emissions | 3.78 |
| AC power line conducted emissions | 3.55 |

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

| Equipment | Manufacturer | Model no. | Asset no. | Cal cycle | Next cal. |
|-------------------------------|--------------------|--------------|-----------|-----------|---------------|
| 3 m EMI test chamber | TDK | SAC-3 | FA003012 | 1 year | Nov. 12, 2019 |
| Flush mount turntable | SUNAR | FM2022 | FA003006 | — | NCR |
| Controller | SUNAR | SC110V | FA002976 | — | NCR |
| Antenna mast | SUNAR | TLT2 | FA003007 | — | NCR |
| AC Power source | Chroma | — | FA003020 | — | NCR |
| Receiver/spectrum analyzer | Rohde & Schwarz | ESR26 | FA002969 | 1 year | June 4, 2020 |
| Spectrum analyzer | Rohde & Schwarz | FSW43 | FA002971 | 1 year | June 21, 2020 |
| Horn antenna (1–18 GHz) | Electro-metrics | 3115 | FA000649 | 1 year | Nov. 28, 2019 |
| Preamp (1–18 GHz) | ETS Lindgren | 124334 | FA002956 | 1 year | Oct. 18, 2019 |
| Bilog antenna (20–2000 MHz) | Sun AR | JB1 | FA003009 | 1 year | Oct. 6, 2019 |
| Horn antenna (18–40 GHz) | EMCO | 3116B | FA002948 | 1 year | July 9, 2020 |
| 50 Ω coax cable | Huber + Suhner | None | FA003047 | 1 year | Nov. 12, 2019 |
| 50 Ω coax cable | Huber + Suhner | None | FA003044 | 1 year | Nov. 12, 2019 |
| 50 Ω coax cable | Huber + Suhner | None | FA003048 | 1 year | Nov. 12, 2019 |
| Pre-amplifier (18–26 GHz) | Narda | BBS-1826N612 | FA001550 | — | VOU |
| Notch filter 2.4 – 2.4835 GHz | Microwave Circuits | N0324413 | FA003027 | 1 year | Oct. 1, 2019 |

Note: NCR - no calibration required, VOU - verify on use



Section 8. Testing data

8.1 FCC 15.31(e) Variation of power source

8.1.1 Definitions and limits

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.1.2 Test date

Start date

September 4, 2019

8.1.3 Observations, settings and special notes

The testing was performed as per ANSI C63.10 Section 5.13.

- a) Where the device is intended to be powered from an external power adapter, the voltage variations shall be applied to the input of the adapter provided with the device at the time of sale. If the device is not marketed or sold with a specific adapter, then a typical power adapter shall be used.
- b) For devices where operating at a supply voltage deviating $\pm 15\%$ from the nominal rated value may cause damages or loss of intended function, test to minimum and maximum allowable voltage per manufacturer's specification and document in the report.
- c) For devices with wide range of rated supply voltage, test at 15% below the lowest and 15% above the highest declared nominal rated supply voltage.
- d) For devices obtaining power from an input/output (I/O) port (USB, firewire, etc.), a test jig is necessary to apply voltage variation to the device from a support power supply, while maintaining the functionalities of the device.

For battery-operated equipment, the equipment tests shall be performed using a variable power supply.

8.1.4 Test data

EUT Power requirements:

AC DC Battery

If EUT is an AC or a DC powered, was the noticeable output power variation observed?

YES NO N/A

If EUT is battery operated, was the testing performed using fresh batteries?

YES NO N/A

If EUT is rechargeable battery operated, was the testing performed using fully charged batteries?

YES NO N/A

8.2 FCC 15.31(m) and RSS-Gen 6.9 Number of frequencies

8.2.1 Definitions and limits

FCC:

Measurements on intentional radiators or receivers shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table.

ISED:

Except where otherwise specified, measurements shall be performed for each frequency band of operation for which the radio apparatus is to be certified, with the device operating at the frequencies in each band of operation shown in table below. The frequencies selected for measurements shall be reported in the test report.

Table 8.2-1: Frequency Range of Operation

| Frequency range over which the device operates (in each band) | Number of test frequencies required | Location of measurement frequency inside the operating frequency range |
|---|-------------------------------------|--|
| 1 MHz or less | 1 | Center (middle of the band) |
| 1–10 MHz | 2 | 1 near high end, 1 near low end |
| Greater than 10 MHz | 3 | 1 near high end, 1 near center and 1 near low end |

Note: "near" means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

8.2.2 Test date

Start date

September 4, 2019

8.2.3 Observations, settings and special notes

Per ANSI C63.10 Subclause 5.6.2.1:

The number of channels tested can be reduced by measuring the center channel bandwidth first and then applying the following relaxations as appropriate:

- For each operating mode, if the measured channel bandwidth on the middle channel is at least 150% of the minimum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.
- For multiple-input multiple-output (MIMO) systems, if the measured channel bandwidth on testing the middle channel exceeds the minimum permitted bandwidth by more than 50% on one transmit chain, then it is not necessary to repeat testing on the other chains.
- If the measured channel bandwidth on the middle channel is less than 50% of the maximum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.

Per ANSI C63.10 Subclause 5.6.2.2:

For devices with multiple operating modes, measurements on the middle channel can be used to determine the worst-case mode(s). The worst-case modes are as follows:

- Band edge requirements—Measurements on the mode with the widest bandwidth can be used to cover the same channel (center frequency) on modes with narrower bandwidth that have the same or lower output power for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- Spurious emissions—Measure the mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- In-band PSD—Measurements on the mode with the narrowest bandwidth can be used to cover all modes within the same modulation family of an equal or lower output power provided the result is less than 50% of the limit.



8.2.4 Test data

Table 8.2-2: Test channels selection

| Start of Frequency range, MHz | End of Frequency range, MHz | Frequency range bandwidth, MHz | Low channel, MHz | Mid channel, MHz | High channel, MHz |
|-------------------------------|-----------------------------|--------------------------------|------------------|------------------|-------------------|
| 2400 | 2483.5 | 83.5 | 2402 | 2440 | 2479 |



8.3 FCC 15.203 and RSS-Gen, section 6.8 Antenna requirement

8.3.1 Definitions and limits

FCC:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

ISED:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report.

8.3.2 Test date

Start date September 4, 2019

8.3.3 Observations, settings and special notes

None

8.3.4 Test data

Must the EUT be professionally installed? YES NO

Does the EUT have detachable antenna(s)? YES NO

If detachable, is the antenna connector(s) non-standard? YES NO N/A

Note: Connector is reverse SMA

8.4 FCC 15.247(a)(1) and RSS-247 5.1 Frequency Hopping Systems requirements, 2 GHz operation

8.4.1 Definitions and limits

FCC:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(iii) Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED:

a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system's radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400–2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

d) FHSs operating in the band 2400–2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

5.3 Hybrid systems

Hybrid systems employ a combination of both frequency hopping and digital transmission techniques and shall comply with the following:

- With the digital transmission operation of the hybrid system turned off, the frequency hopping operation shall have an average time of occupancy on any frequency not exceeding 0.4 seconds within a duration in seconds equal to the number of hopping frequencies multiplied by 0.4.

8.4.1 Test date

| | |
|------------|-------------------|
| Start date | September 9, 2019 |
|------------|-------------------|

8.4.2 Observations, settings and special notes

Carrier frequency separation was tested per ANSI C63.10 subclause 7.8.2. Spectrum analyser settings:

| | |
|----------------------|---|
| Resolution bandwidth | Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. |
| Video bandwidth | \geq RBW |
| Frequency span | Wide enough to capture the peaks of two adjacent channels |
| Detector mode | Peak |
| Trace mode | Max Hold |

Number of hopping frequencies was tested per ANSI C63.10 subclause 7.8.3. Spectrum analyser settings:

| | |
|----------------------|--|
| Resolution bandwidth | To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. |
| Video bandwidth | \geq RBW |
| Frequency span | The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen. |
| Detector mode | Peak |
| Trace mode | Max Hold |

Time of occupancy (dwell time) was tested per ANSI C63.10 subclause 7.8.4. Spectrum analyser settings:

| | |
|----------------------|--|
| Resolution bandwidth | shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel. |
| Video bandwidth | \geq RBW |
| Frequency span | Zero span, centered on a hopping channel. |
| Detector mode | Peak |
| Trace mode | Max Hold |

20 dB bandwidth was tested per ANSI C63.10 subclause 6.9.2. Spectrum analyser settings:

| | |
|----------------------|---|
| Resolution bandwidth | \geq 1–5% of the 20 dB bandwidth |
| Video bandwidth | \geq RBW |
| Frequency span | approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel |
| Detector mode | Peak |
| Trace mode | Max Hold |

Table 8.4-1: 20 dB bandwidth results

| Frequency, MHz | 20 dB bandwidth, kHz |
|----------------|----------------------|
| 2402 | 605 |
| 2440 | 764 |
| 2479 | 938 |

Table 8.4-2: 99% occupied bandwidth results

| Frequency, MHz | 99% occupied bandwidth, kHz |
|----------------|-----------------------------|
| 2402 | 933 |
| 2440 | 1312 |
| 2479 | 1471 |

Note: there is no 99% occupied bandwidth limit in the standard's requirements, the measurement results provided for information purposes only.

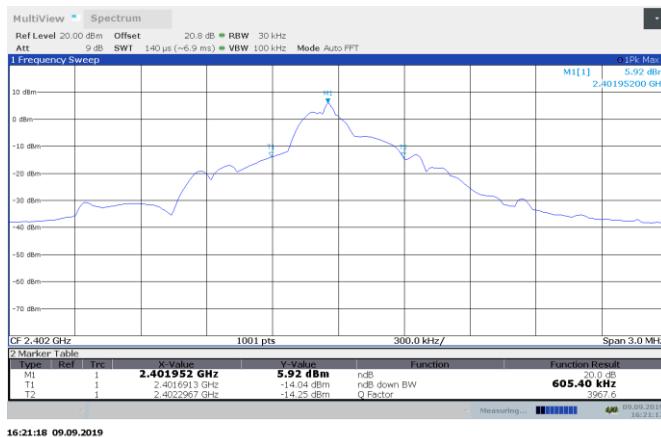


Figure 8.4-1: 20 dB bandwidth on low channel

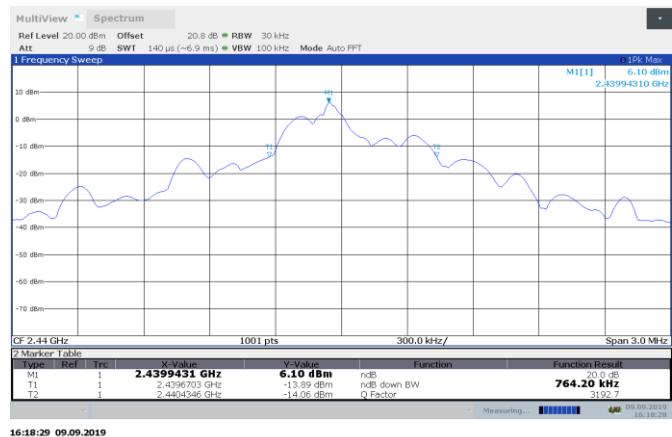


Figure 8.4-2: 20 dB bandwidth on mid channel

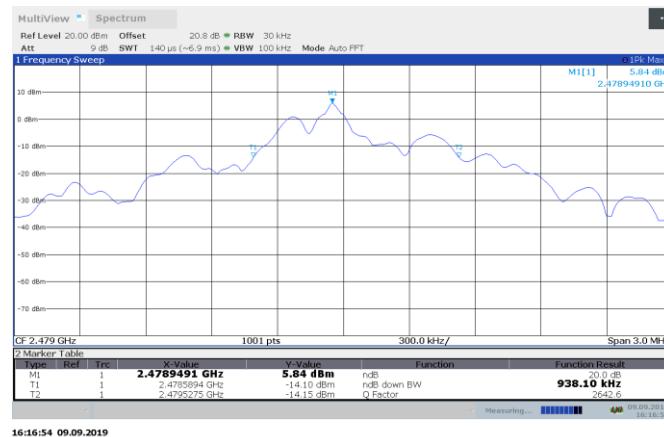


Figure 8.4-3: 20 dB bandwidth on high channel

8.4.1 Test data, continued

Table 8.4-3: Carrier frequency separation results

| Carrier frequency separation, kHz | Minimum limit, kHz | Margin, kHz |
|-----------------------------------|--------------------|-------------|
| 1001 | 938 | 63 |

Note: Minimum limit = 20 dB OBW

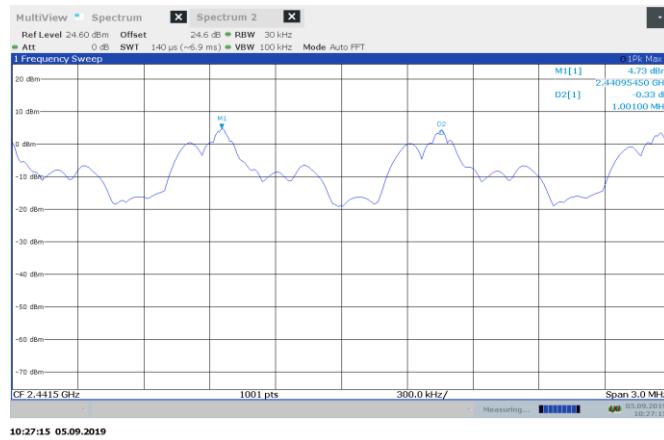


Figure 8.4-4: Carrier frequency separation

Table 8.4-4: Number of hopping frequencies results

| Number of hopping frequencies | Minimum limit | Margin |
|-------------------------------|---------------|--------|
| 78 | 15 | 63 |

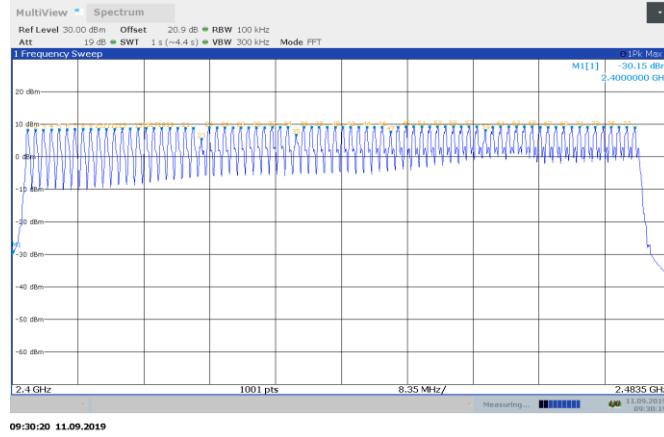


Figure 8.4-5: Number of hopping channels

8.4.1 Test data, continued

Table 8.4-5: Average time of occupancy results

| Dwell time of each pulse, ms | Number of pulses within period | Total dwell time within period, ms | Limit, ms | Margin, ms |
|------------------------------|--------------------------------|------------------------------------|-----------|------------|
| 0.218 | 160 | 34.9 | 400 | 365.1 |

Measurement Period = 0.4 x channels = 31.2 s, Number of pulses within period = Average time occupancy pulses (3.12 s) x 10

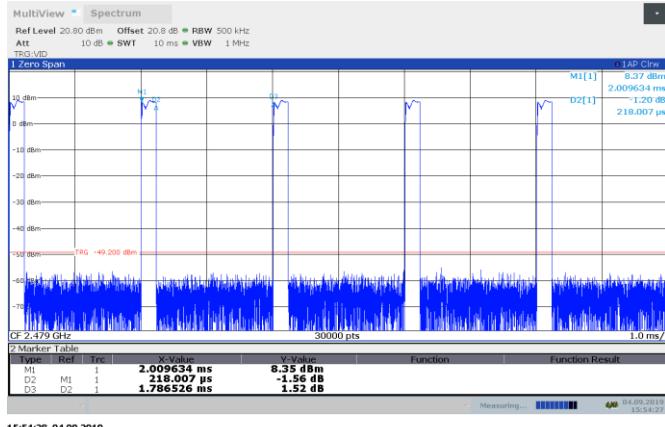


Figure 8.4-6: Dwell time

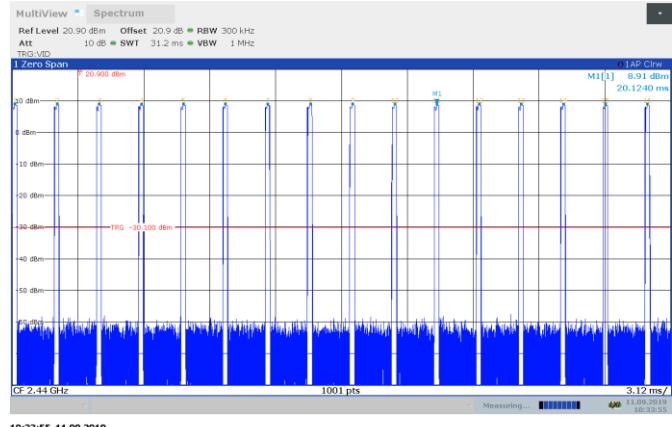


Figure 8.4-7: Average time of occupancy

8.5 FCC 15.247(b) and RSS-247 5.4(b) Transmitter output power and e.i.r.p. requirements for FHSS 2 GHz

8.5.1 Definitions and limits

FCC:

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

- (1) For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt (30 dBm). For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts (21 dBm).
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ISED:

For FHSSs operating in the band 2400–2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W (30 dBm) if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W (21 dBm) if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (36 dBm), except as provided in section 5.4(e).

Section 5.4(e)

Fixed point-to-point systems in the bands 2400–2483.5 MHz and 5725–5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding an e.i.r.p. of 4 W.

8.5.1 Test date

Start date September 11, 2019

8.5.2 Observations, settings and special notes

Conducted output power was tested per ANSI C63.10 subclause 7.8.5. The hopping shall be disabled for this test. Spectrum analyser settings:

| | |
|----------------------|--|
| Resolution bandwidth | > 20 dB bandwidth of the emission being measured |
| Video bandwidth | ≥ RBW |
| Frequency span | approximately 5 times the 20 dB bandwidth, centered on a hopping channel |
| Detector mode | Peak |
| Trace mode | Max Hold |

8.5.3 Test data

Table 8.5-1: Output power and EIRP results

| Frequency, MHz | Output power, dBm | Output power limit, dBm | Margin, dB | Antenna gain, dBi | EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|----------------|-------------------|-------------------------|------------|-------------------|-----------|-----------------|-----------------|
| 2402 | 8.1 | 30.0 | 21.9 | 2.0 | 10.1 | 36.0 | 25.9 |
| 2440 | 9.1 | 30.0 | 20.9 | 2.0 | 11.1 | 36.0 | 24.9 |
| 2479 | 9.0 | 30.0 | 21.0 | 2.0 | 11.0 | 36.0 | 25.0 |

EIRP = Output power + Antenna gain

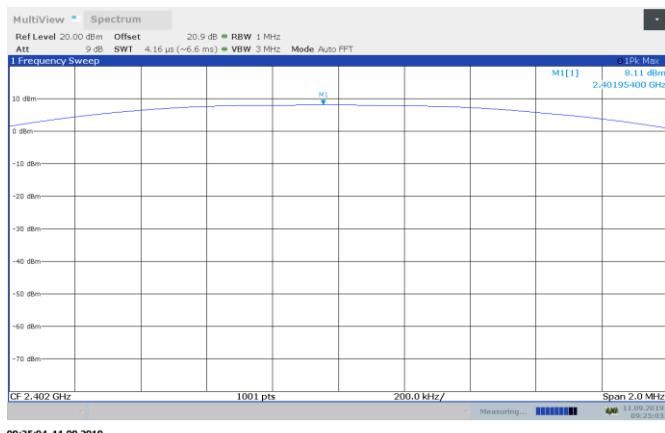


Figure 8.5-1: Output power on low channel

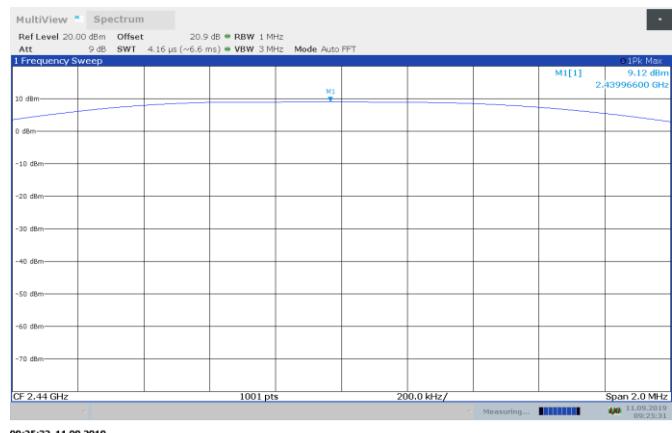


Figure 8.5-2: Output power on mid channel

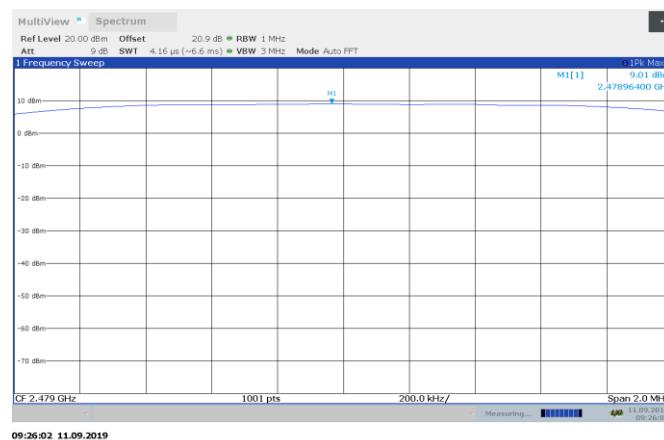


Figure 8.5-3: Output power on high channel

8.6 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) unwanted emissions

8.6.1 Definitions and limits

FCC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

ISED:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.6-1: FCC §15.209 and RSS-Gen – Radiated emission limits

| Frequency, MHz | Field strength of emissions | | Measurement distance, m |
|-------------------|-----------------------------|-----------------------------------|-------------------------|
| | μV/m | dBμV/m | |
| 0.009–0.490 | 2400/F | 67.6 – 20 × log ₁₀ (F) | 300 |
| 0.490–1.705 | 24000/F | 87.6 – 20 × log ₁₀ (F) | 30 |
| 1.705–30.0 | 30 | 29.5 | 30 |
| 30–88 | 100 | 40.0 | 3 |
| 88–216 | 150 | 43.5 | 3 |
| 216–960 | 200 | 46.0 | 3 |
| above 960 | 500 | 54.0 | 3 |

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.6-2: ISED restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 12.57675–12.57725 | 399.9–410 | 7.25–7.75 |
| 0.495–0.505 | 13.36–13.41 | 608–614 | 8.025–8.5 |
| 2.1735–2.1905 | 16.42–16.423 | 960–1427 | 9.0–9.2 |
| 3.020–3.026 | 16.69475–16.69525 | 1435–1626.5 | 9.3–9.5 |
| 4.125–4.128 | 16.80425–16.80475 | 1645.5–1646.5 | 10.6–12.7 |
| 4.17725–4.17775 | 25.5–25.67 | 1660–1710 | 13.25–13.4 |
| 4.20725–4.20775 | 37.5–38.25 | 1718.8–1722.2 | 14.47–14.5 |
| 5.677–5.683 | 73–74.6 | 2200–2300 | 15.35–16.2 |
| 6.215–6.218 | 74.8–75.2 | 2310–2390 | 17.7–21.4 |
| 6.26775–6.26825 | 108–138 | 2483.5–2500 | 22.01–23.12 |
| 6.31175–6.31225 | 149.9–150.05 | 2655–2900 | 23.6–24.0 |
| 8.291–8.294 | 156.52475–156.52525 | 3260–3267 | 31.2–31.8 |
| 8.362–8.366 | 156.7–156.9 | 3332–3339 | 36.43–36.5 |
| 8.37625–8.38675 | 162.0125–167.17 | 3345.8–3358 | |
| 8.41425–8.41475 | 167.72–173.2 | 3500–4400 | Above 38.6 |
| 12.29–12.293 | 240–285 | 4500–5150 | |
| 12.51975–12.52025 | 322–335.4 | 5350–5460 | |

Note: Certain frequency bands listed in Table 8.6-2 and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Table 8.6-3: FCC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| 0.495–0.505 | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905 | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128 | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775 | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775 | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218 | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825 | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225 | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294 | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366 | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675 | 156.7–156.9 | 2690–2900 | 22.01–23.12 |
| 8.41425–8.41475 | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293 | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025 | 240–285 | 3345.8–3358 | 36.43–36.5 |
| 12.57675–12.57725 | 322–335.4 | 3600–4400 | Above 38.6 |
| 13.36–13.41 | | | |

8.6.1 Test date

Start date September 10, 2019

8.6.2 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10th harmonic.

EUT was set to transmit with 100 % duty cycle.

Radiated measurements were performed at a distance of 3 m.

Conducted spurious emissions in non-restricted frequency bands test was performed ANSI 63.10 subclause 7.8.8.

Since fundamental power was tested using the maximum peak conducted output power procedure to demonstrate compliance, the spurious emissions limit is -20 dBc/100 kHz.

Emissions in restricted frequency bands test was performed as per ANSI C63.10 subclause 6.10.5.

Band-edge emission measurement test was performed as per ANSI C63.10 subclause 6.10

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 10 Hz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Spectrum analyser settings for conducted spurious emissions measurements:


| | |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 300 kHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

8.6.4 Test data

Table 8.6-4: Radiated field strength measurement results for 802.11b

| Channel | Frequency, MHz | Peak Field strength, dB μ V/m | | Margin, dB | Average Field strength, dB μ V/m | | Margin, dB |
|---------|----------------|-----------------------------------|-------|------------|--------------------------------------|-------|------------|
| | | Measured | Limit | | Measured | Limit | |
| Low | 2390.0 | 63.4 | 74.00 | 10.6 | 49.6 | 54.00 | 4.4 |
| High | 2483.5 | 72.7 | 74.00 | 1.3 | 40.2 | 54.00 | 13.8 |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

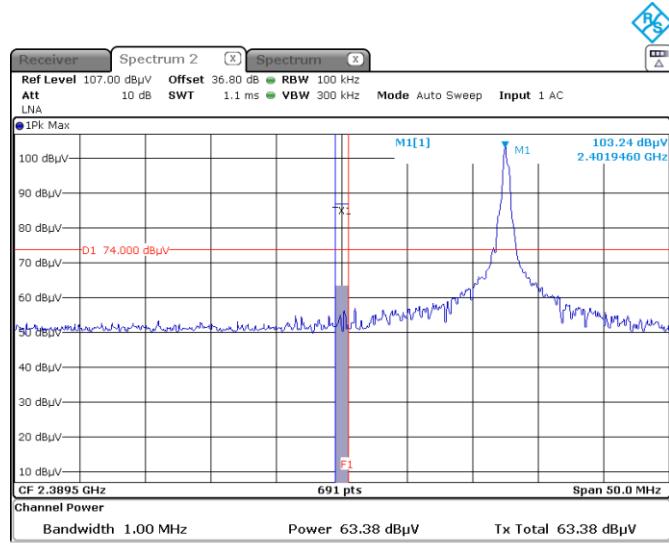


Date: 11.SEP.2019 13:28:30



Date: 11.SEP.2019 16:24:28

Figure 8.6-1: Radiated emissions in restricted Band 2390 MHz, low channel Peak

Figure 8.6-2: Radiated emissions in restricted Band 2390 MHz, low channel Average

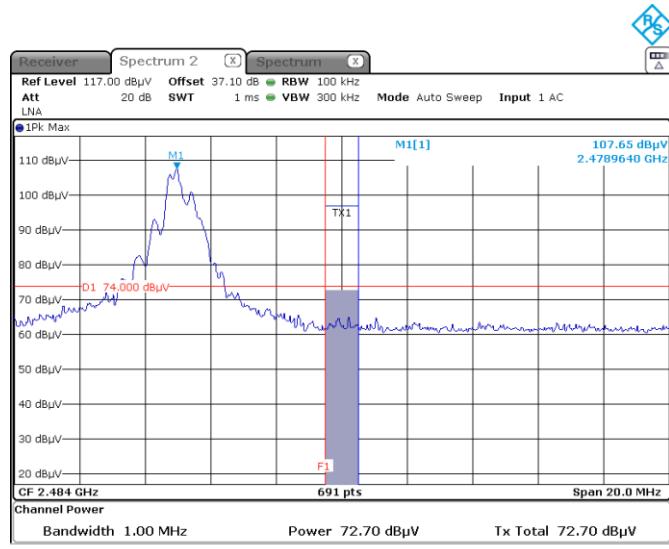

Date: 11.SEP.2019 13:20:58



Date: 11.SEP.2019 13:18:05

Figure 8.6-3: Radiated emissions in restricted Band 2483.5 MHz, high channel Peak

Figure 8.6-4: Radiated emissions in restricted Band 2483.5 MHz, high channel Average

8.6.1 Test data, continued

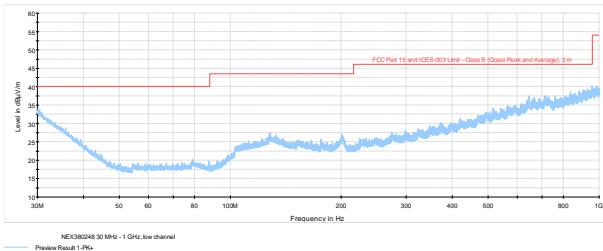


Figure 8.6-5: Radiated spurious emissions 30 MHz – 1 GHz, low channel

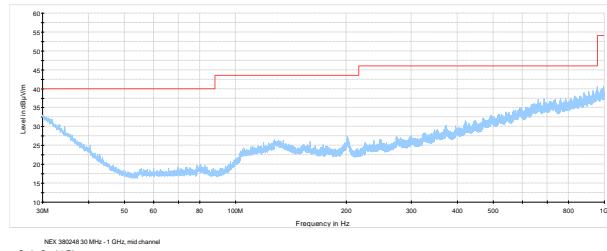


Figure 8.6-6: Radiated spurious emissions 30 MHz – 1 GHz, mid channel

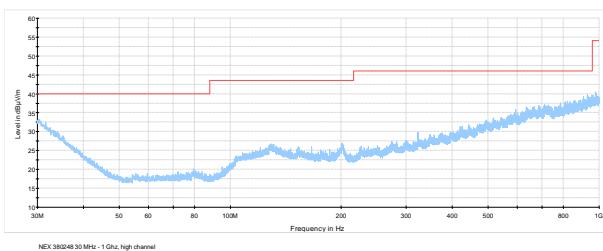


Figure 8.6-7: Radiated spurious emissions 30 MHz – 1 GHz, high channel

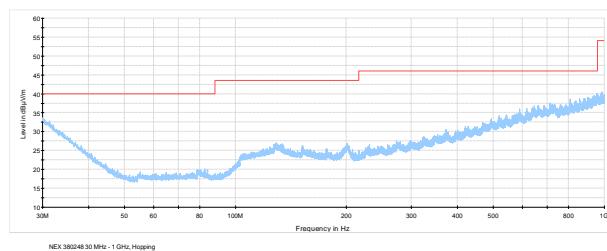


Figure 8.6-8: Radiated spurious emissions 30 MHz – 1 GHz, hopping

8.6.1 Test data, continued

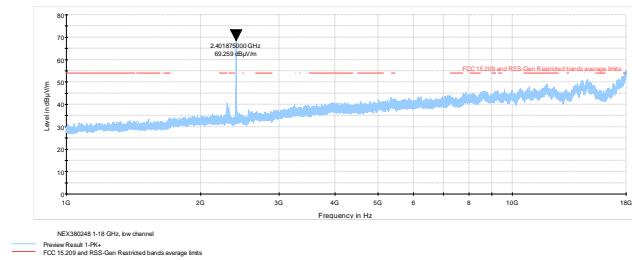


Figure 8.6-9: Radiated spurious emissions 1 - 18 GHz, low channel

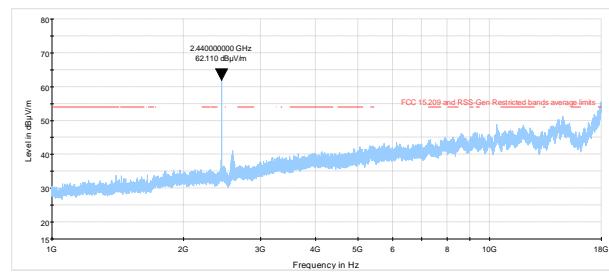


Figure 8.6-10: Radiated spurious emissions 1 - 18 GHz, mid channel

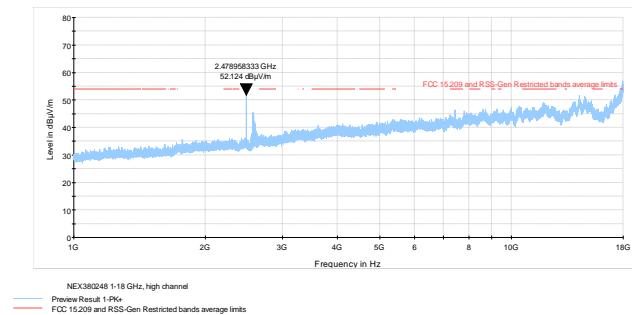


Figure 8.6-11: Radiated spurious emissions 1 - 18 GHz, high channel


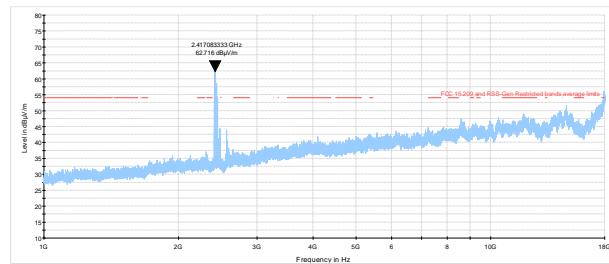



Figure 8.6-12: Radiated spurious emissions 1 - 18 GHz, hopping

8.6.1 Test data, continued

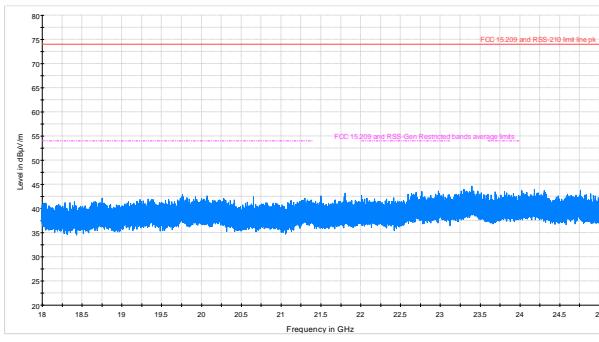


FCC NEX380248 18 - 25 GHz, 2402 MHz
 PK_u MAXH
 FCC 15.209 and RSS-210 limit line pk
 FCC 15.209 and RSS-Gen Restricted bands average limits

Figure 8.6-13: Radiated spurious emissions 18 - 25 GHz, low channel

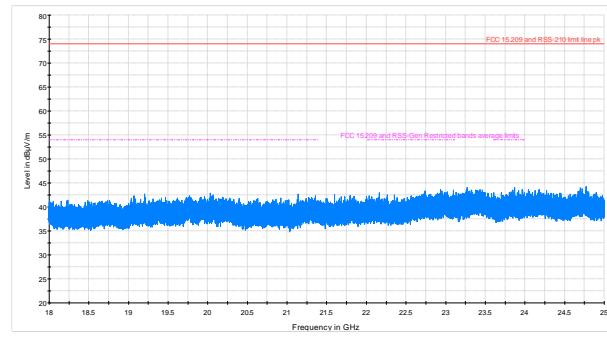


FCC NEX380248 18 - 25 GHz, 2440 MHz
 PK_u MAXH
 FCC 15.209 and RSS-210 limit line pk
 FCC 15.209 and RSS-Gen Restricted bands average limits

Figure 8.6-14: Radiated spurious emissions 18 - 25 GHz, mid channel

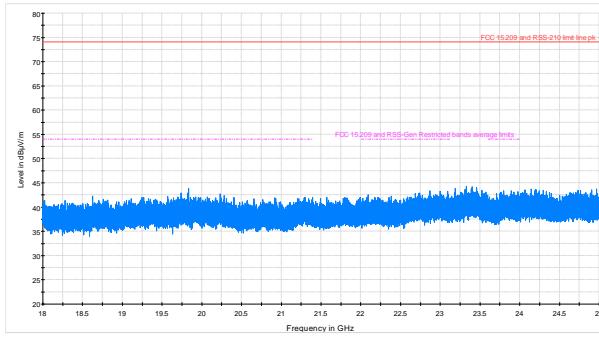

FCC NEX380248 18 - 25 GHz, 2479 MHz
 PK_u MAXH
 FCC 15.209 and RSS-210 limit line pk
 FCC 15.209 and RSS-Gen Restricted bands average limits


Figure 8.6-15: Radiated spurious emissions 18 - 25 GHz, high channel

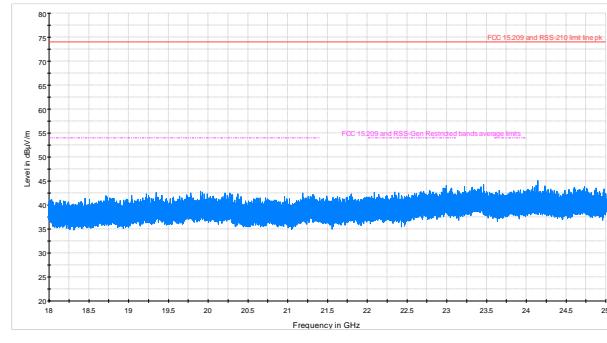

FCC NEX380248 18 - 25 GHz, hopping
 PK_u MAXH
 FCC 15.209 and RSS-210 limit line pk
 FCC 15.209 and RSS-Gen Restricted bands average limits


Figure 8.6-16: Radiated spurious emissions 18 - 25 GHz, hopping

8.6.2 Test data, continued

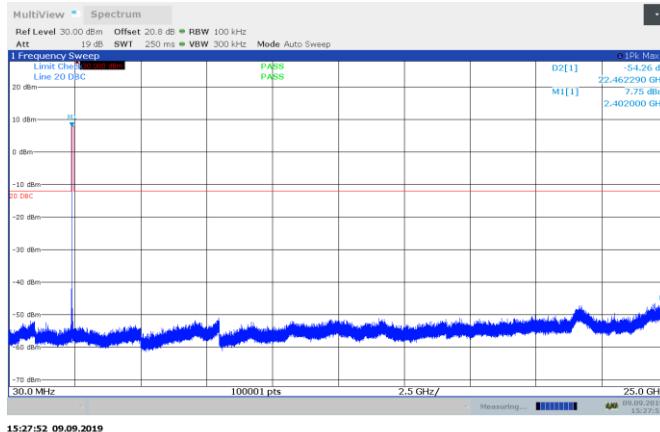


15:27:52 09.09.2019

Figure 8.6-17: Conducted spurious emissions, low channel

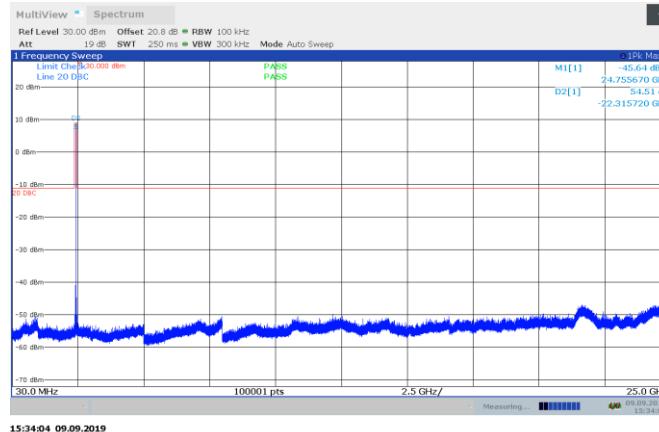


15:34:04 09.09.2019

Figure 8.6-18: Conducted spurious emissions, mid channel

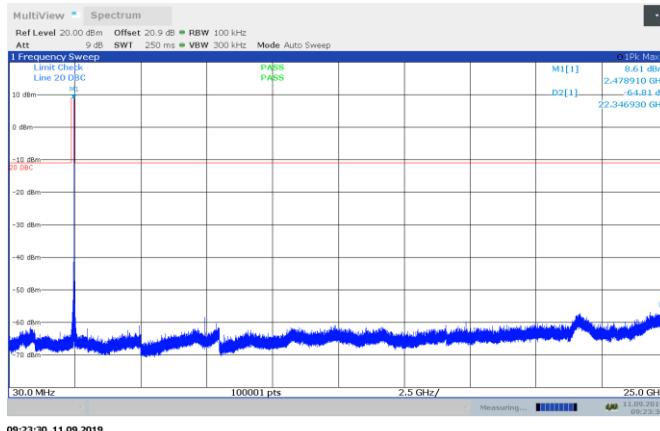

09:23:30 11.09.2019



Figure 8.6-19: Conducted spurious emissions, high channel

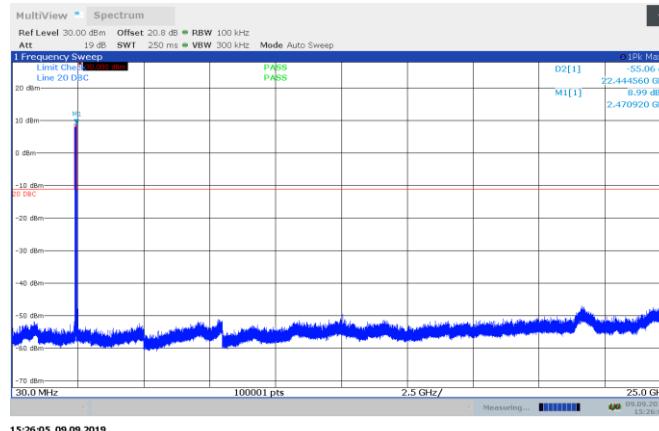

15:26:05 09.09.2019


Figure 8.6-20: Conducted spurious emissions, hopping

8.6.1 Test data, continued

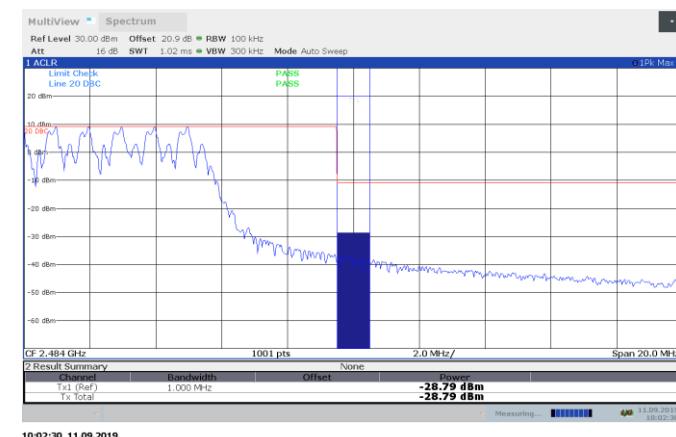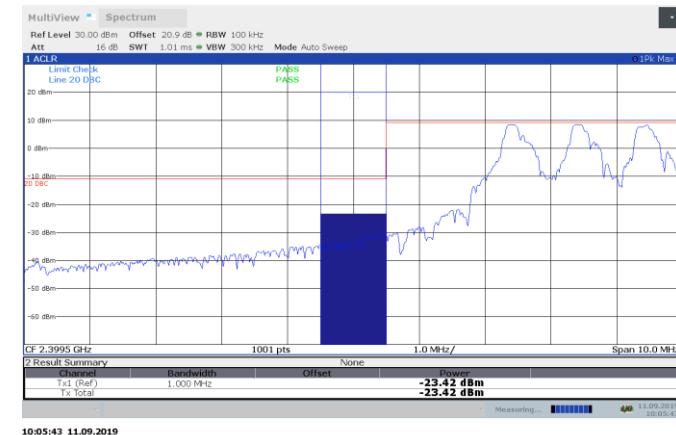


Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up for frequencies below 1 GHz

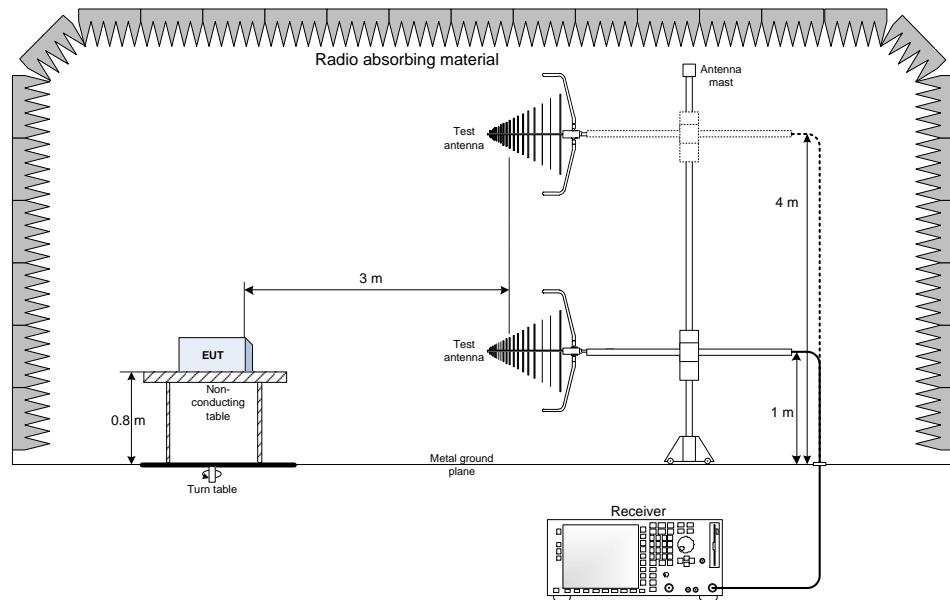

9.2 Radiated emissions set-up for frequencies above 1 GHz

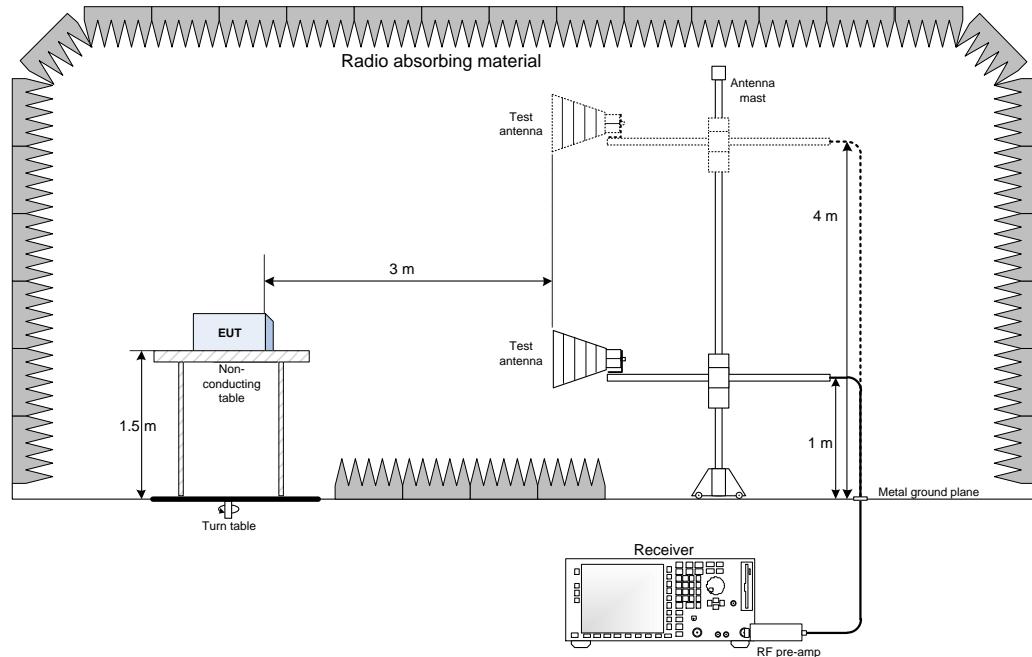

9.3 Antenna port set-up

