


**Safety Label Note:**

1. Printing color: Black
2. 製造工廠代號(MFG Factory): (UL要求標示)
  1. 吳陽 / Joytech ( 深圳 / ShenZhen)-----> AC
  2. 仁寶 / Compal ( 昆山 / KunShan)-----> CI
  3. 廣智 / SVA Accton ( 上海 / Shanghai)-----> GZ
  4. 智邦 / Accton ( 台灣 / Taiwan)-----> None

印刷廠商代號(Vender ID): (CSA要求標示)

Decide by Vendor

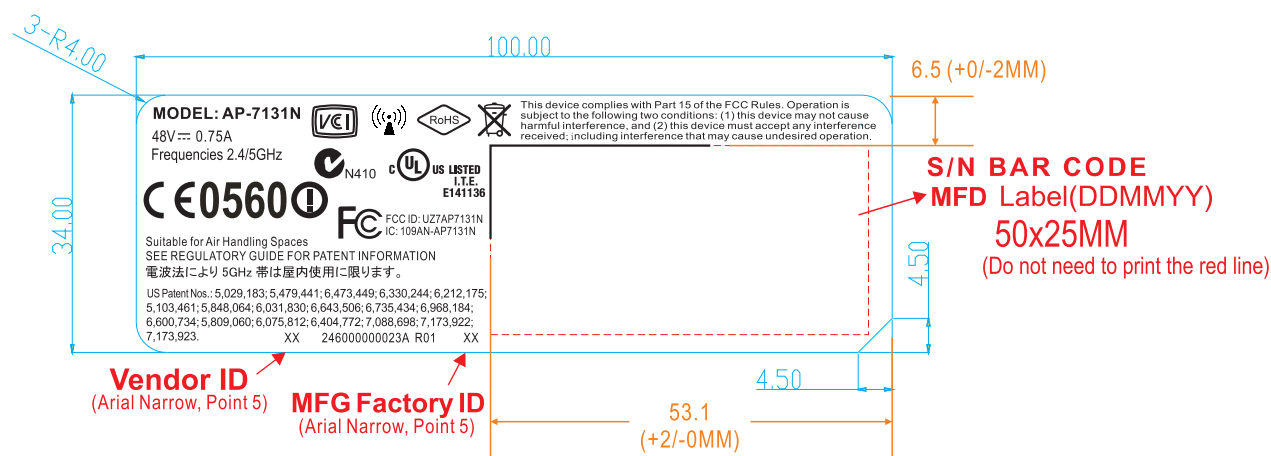

Modification	Card Paper / Top lineboard			Corrugate list				Cardboard Die Cut Legend		Unspecialized Die Cut Tolerance = +/- 0.5 mm		PE Bag (A Degree)		Label list		Comply with RoHS		Accton TECHNOLOGY CORP.								
	Paper GSM (g/m <sup>2</sup> )	CCNB	SBS	Flute (A Degree)	Single wall GSM (g/m <sup>2</sup> )	Double wall GSM (g/m <sup>2</sup> )	Burning Strength (kg/cm <sup>2</sup> )	East Coast Test (kg/cm <sup>2</sup> )	(CL) Cutting Line	(CI) Crease Line	(PBL) Partial Blunt Line	(SO) Slit-Score Line	(SL) Slit Line	Material	Thickness	Adhesive	Others									
1	250			A/C	230 X 180 X 230	250 X 150 X 250	16	33.6	0	16	0.05	0.1	0.15	0.2	0.2	0.5	Normal (Non-Anti-Static)	ESD Value/Ω <sub>ohm</sub> = 9-11	Art paper	0.025mm / 25# / 1mil	Acrylic	T=0.022mm	Material Spec: Part No. 24600000023A REV. 01 Description: UL label EAP8632A-FLF-D8 UNIT SCALE 1 / 1 SIZE A3 MM (IN) Outside View Sheet 1 of 1			
2	280			B	230 X 100 X 230	250 X 112 X 250	14	26.2	16	63	0.05	0.15	0.2	0.3	0.3	0.8	Electronic	ESD Value/Ω <sub>ohm</sub> < 5	Metalized	0.050mm / 50# / 2mil	Acrylic UL approved	T=0.022mm				
3	300			E	230 X 100 X 230	250 X 100 X 250	14	22.5	63	250	0.05	0.2	0.25	0.4	0.5	1.2	Thickness/mm	0.04	0.06	0.08	"R" Adhesive	T=0.022mm				
4	310			AB	230 X 100 X 230	250 X 100 X 250	14	22.5	250	500	0.1	0.25	0.3	0.6	0.8	1.8	Bubble Bag (Bubble Ø=10mm)	Put-in material >= 8 kg (By 1.5M / Width x 100M / Length)	White Polyester	0.076mm / 75# / 3mil	Water Adhesive	T=0.022mm				
5	340			BC	230 X 100 X 230	250 X 100 X 250	18	37.4	500	1000	0.3	0.5	0.8	1.2	3.0	Printing Tolerance = +/- mm	Put-in material >= 16 kg (By 1.5M / Width x 100M / Length)	(PP)Pepa paper	0.178mm / 7mil	"R" Adhesive	T=0.022mm					
6	350			A/C	230 X 100 X 230	205 X 140 X 230	16	26	Printed							Pulp Tray	Recycle Kraft 80% * Newspaper 20%	PC 8B35	0.254mm / 10mil	3M 467	T=0.05mm / 2mil					
7				B	220 X 100 X 200	175 X 140 X 250	14	28.5	Weight/gs=							EPE Foam		PC 8010	0.381mm / 15mil	3M 468	T=0.127mm / 5mil					
This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.				Coated	UV	Mar Resistant Varnish			Thickness/mm	1.5	2.0	Density ( kg / m <sup>3</sup> )	33 +/-2	Other	PP Film	LF ( T = 0.045mm )	DF ( T = 0.035mm )	Approve	Lin	05.05.09	Check			Design	Melody	05.05.09