


Safety Label Note:

1. Printing color: Black
2. 製造工廠代號(MFG Factory): (UL要求標示)
 1. 昊陽 / Joytech (深圳 / ShenZhen)-----> AC
 2. 仁寶 / Compal (昆山 / KunShan)-----> CI
 3. 廣智 / SVA Accton (上海 / Shanghai)-----> GZ
 4. 智邦 / Accton (台灣 / Taiwan)-----> None

印刷廠商代號(Vender ID): (CSA要求標示)

Decide by Vendor

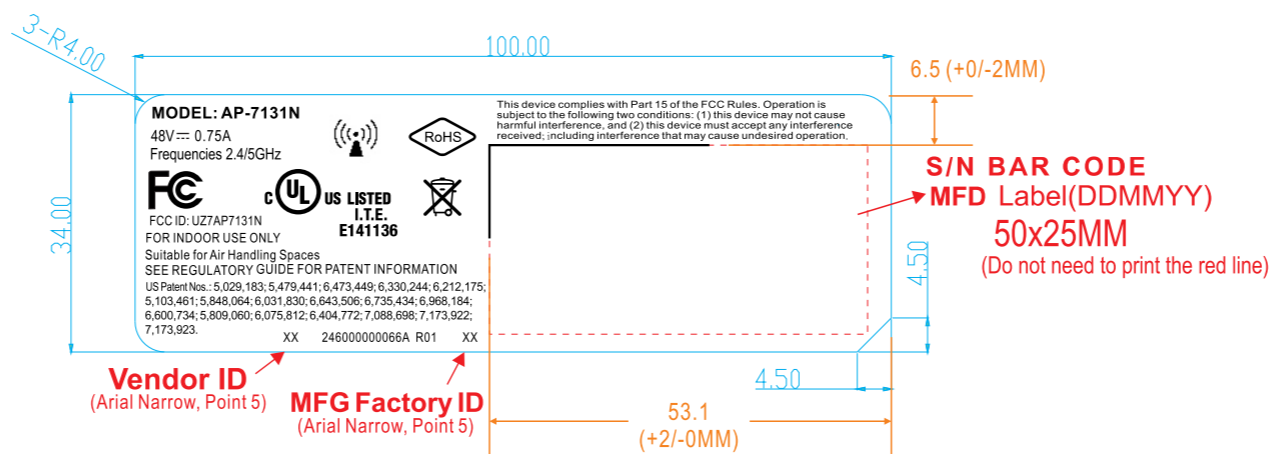

Modification	Card Paper / Top lineboard			Corrugate list				Cardboard Die Cut Legend		Unspecialized Die Cut Tolerance = +/- 0.5 mm					PE Bag (A Degree)		Label list		Comply with RoHS		Accton TECHNOLOGY CORP.						
	Paper GSM (g/m ²)	CCNB	SBS	Double SBS	Flute (A Degree)	Single wall / Double wall GSM (g/m ²)	Bursting Strength (kg/cm ²)	East Coast Test (kg/cm ²)	(CL) Cutting Line	(CI) Crease Line	(PBL) Partial Blunt Line	(SO) Slit-Score Line	(SL) Slit Line	Normal (Non-Anti-Static)	Anti-Static	ESD Value / Ω _{ohm} = 9-11	ESD Value / Ω _{ohm} < 5	Material & Thickness	Adhesive	Material Spec:			Part No.	REV.			
1	250				A/C	230 X 180 X 230	16	33.6	0	16	0.05	0.1	0.15	0.2	0.2	0.5	0.04	0.06	0.08	Art paper	0.025mm / 25# / 1mil	Acrylic	T=0.022mm	246000000066A	REV. 01		
2	280				B	250 X 150 X 250	14	26.2	16	6	0.05	0.15	0.2	0.3	0.3	0.8	0.04	0.06	0.08	Metalized	0.050mm / 50# / 2mil	Acrylic UL approved	T=0.022mm	Description: UL label EAP8632A-FLF-D8 (3 Radios) US			
3	300				E	230 X 100 X 230	14	22.5	6.3	250	0.05	0.2	0.25	0.4	0.5	1.2	0.04	0.06	0.08	White Polyester	0.076mm / 75# / 3mil	"R" Adhesive	T=0.022mm	UNIT	SCALE 1 / 1	SIZE A3	
4	310				AB	230 X 140 X 230	14	22.5	250	500	0.1	0.25	0.3	0.6	0.8	1.8	0.04	0.06	0.08	(PP)Pepa paper	0.178mm / 7mil	Water Adhesive	T=0.022mm	MM	(IN)	Outside View	Sheet 1 of 1
5	340				BC	250 X 100 X 250	18	37.4	500	1000	0.3	0.5	0.8	1.2	3.0		0.04	0.06	0.08	PC 8B35	0.254mm / 10mil	3M 467	T=0.05mm / 2mil	Approve	Lin	10.08.09	
6	350				A/C	230 X 100 X 230	16	26	Printed								0.04	0.06	0.08	PC 8010	0.381mm / 15mil	3M 468	T=0.127mm / 5mil	Check			
7					B	220 X 100 X 200	14	28.5	Pulp Tray	Recycle Kraft 80% Newspaper 20%							0.04	0.06	0.08	Other	0.500mm / 20mil	3M 7945	T=0.127mm / 5mil	Design	Melody	10.08.09	
This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.				Coated	UV	Mar Resistant Varnish			Weight/gsm = +/- 5%											PP Film	LF (T = 0.045mm)	DF (T = 0.035mm)					