


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	2.4G + 5G

Horizontal

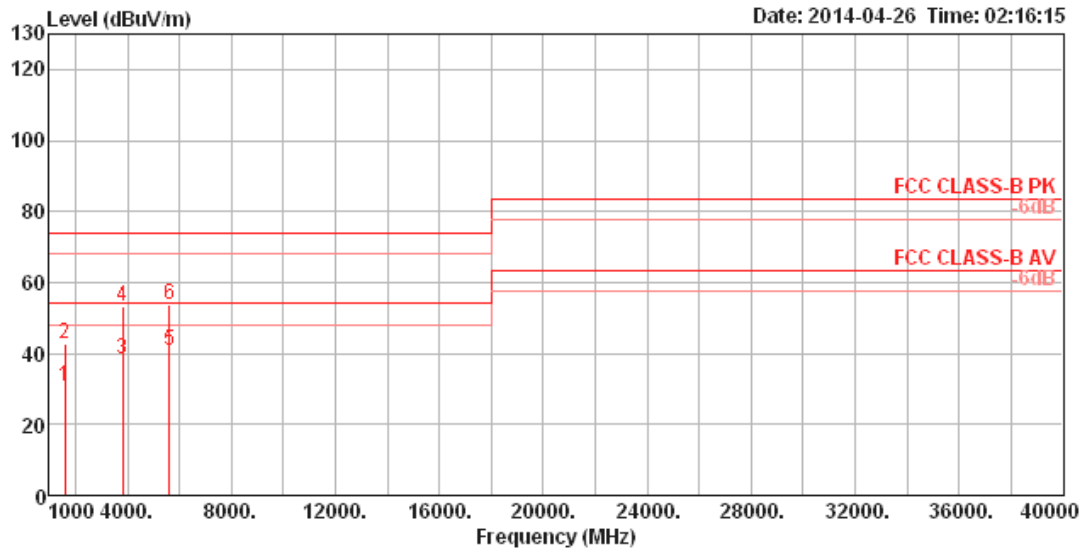

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1582.34	30.58	54.00	-23.42	38.91	2.95	25.66	36.94	100	127	HORIZONTAL Average
2	1582.34	42.58	74.00	-31.42	50.91	2.95	25.66	36.94	100	127	HORIZONTAL Peak
3	3817.34	38.20	54.00	-15.80	37.68	4.84	31.40	35.72	100	65	HORIZONTAL Average
4	3817.34	53.20	74.00	-20.80	52.68	4.84	31.40	35.72	100	65	HORIZONTAL Peak
5	5612.34	40.86	54.00	-13.14	35.98	6.28	34.04	35.44	100	284	HORIZONTAL Average
6	5612.34	53.86	74.00	-20.14	48.98	6.28	34.04	35.44	100	284	HORIZONTAL Peak

Vertical

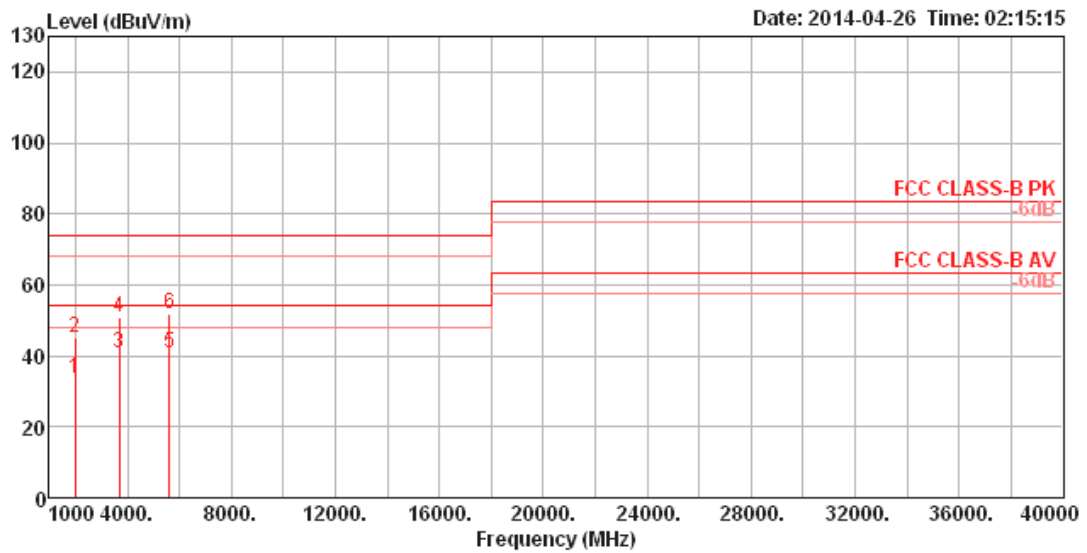

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1997.34	33.41	54.00	-20.59	37.77	3.44	27.95	35.75	100	256 VERTICAL	Average
2	1997.34	44.89	74.00	-29.11	49.25	3.44	27.95	35.75	100	256 VERTICAL	Peak
3	3677.34	40.80	54.00	-13.20	40.82	4.76	31.10	35.88	100	64 VERTICAL	Average
4	3677.34	50.80	74.00	-23.20	50.82	4.76	31.10	35.88	100	64 VERTICAL	Peak
5	5612.34	40.86	54.00	-13.14	35.98	6.28	34.04	35.44	100	22 VERTICAL	Average
6	5612.34	51.86	74.00	-22.14	46.98	6.28	34.04	35.44	100	22 VERTICAL	Peak