

FCC Test Report (BT-LE)

Report No.: RF160715E05-3

FCC ID: UZ7AP7622

Test Model: AP-7622

Received Date: July 15, 2016

Test Date: Sep. 13 to 29, 2016

Issued Date: Oct. 28, 2016

Applicant: Zebra Technologies Corporation

Address: One Zebra Plaza, Holtsville, NY,11742, USA

Manufacturer: Zebra Technologies Corporation

Address: One Zebra Plaza, Holtsville, NY,11742, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (BT-LE)	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedures	20
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup	21
4.1.6 EUT Operating Conditions	22
4.1.7 Test Results (Mode 1)	23
4.1.8 Test Results (Mode 2)	29
4.2 Conducted Emission Measurement	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup	33
4.2.6 EUT Operating Conditions	33
4.2.7 Test Results (Mode 1)	34
4.2.8 Test Results (Mode 2)	36
4.3 6dB Bandwidth Measurement	38
4.3.1 Limits of 6dB Bandwidth Measurement	38
4.3.2 Test Setup	38
4.3.3 Test Instruments	38
4.3.4 Test Procedure	38
4.3.5 Deviation from Test Standard	38
4.3.6 EUT Operating Conditions	38
4.3.7 Test Result	39
4.4 Conducted Output Power Measurement	40
4.4.1 Limits OF Conducted Output Power Measurement	40
4.4.2 Test Setup	40
4.4.3 Test Instruments	40
4.4.4 Test Procedures	40
4.4.5 Deviation from Test Standard	40
4.4.6 EUT Operating Conditions	40
4.4.7 Test Results	41
4.5 Power Spectral Density Measurement	42
4.5.1 Limits of Power Spectral Density Measurement	42
4.5.2 Test Setup	42
4.5.3 Test Instruments	42
4.5.4 Test Procedure	42

4.5.5	Deviation from Test Standard	42
4.5.6	EUT Operating Condition	42
4.5.7	Test Results	43
4.6	Conducted Out of Band Emission Measurement	44
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	44
4.6.2	Test Setup.....	44
4.6.3	Test Instruments	44
4.6.4	Test Procedure	44
4.6.5	Deviation from Test Standard	44
4.6.6	EUT Operating Condition	44
4.6.7	Test Results	45
5	Pictures of Test Arrangements.....	46
	Appendix – Information on the Testing Laboratories	47

Release Control Record

Issue No.	Description	Date Issued
RF160715E05-3	Original release.	Oct. 28, 2016

1 Certificate of Conformity

Product: Access Point

Brand: ZEBRA

Test Model: AP-7622

Sample Status: ENGINEERING SAMPLE

Applicant: Zebra Technologies Corporation

Test Date: Sep. 13 to 29, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Oct. 28, 2016
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Oct. 28, 2016
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.97dB at 22.97266MHz.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.0dB at 7320.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.72 dB
	6GHz ~ 18GHz	4.00 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (BT-LE)

Product	Access Point
Brand	ZEBRA
Test Model	AP-7622
Status of EUT	ENGINEERING SAMPLE
SW Version	esdk 5.0.9.1
HW Version	ZEBRA_ASPEN-C_BCM47452_V20_D1_20160603_fischer.brd
Power Supply Rating	12Vdc from power adapter or 55Vdc from POE
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	Up to 1Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	40
Output Power	3.342mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. There are WLAN, BT technology used for the EUT.
2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (2.4GHz-Chain0)	WLAN (5GHz-Chain1)	BT
2	WLAN (2.4GHz-Chain1)	WLAN (5GHz-Chain0)	BT
3	WLAN (2.4GHz-Chain0)	WLAN (2.4GHz-Chain1)	BT
4	WLAN (5GHz-Chain0)	WLAN (5GHz-Chain1)	BT

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter and POE as following table:

Adapter (Only for test not for sale)		
Brand	Model No.	Spec.
HIPRO	HP-A0502R3D	Input: 100-240Vac, 50-60Hz, 2.4A Output: 12Vdc, 4.16A DC output cable (Unshielded, 1.8m with one core)
POE(Only for test not for sale)		
Brand	Model No.	Spec.
Symbol	PD-9001GR/AT/AC	Input: 100-240Vac, 50/60Hz, 0.67A Output: 55Vdc, 0.6A P/N : AP-PSBIAS-2P3-ATR

From above adapters and POE, the spurious emission above 1GHz worst case was found in **POE**. Therefore only the test data of the modes were recorded in this report individually.

4. The antennas provided to the EUT, please refer to the following table:

No.	PCB Chain No	Brand	Model	Antenna Gain(dBi) Including cable loss	Frequency range	Antenna Type	Connector type
1	Chain 0	NA	NA	3.64	2.4~2.4835GHz	Monopole	i-pex(MHF)
				4.14	5.15~5.25GHz	Monopole	i-pex(MHF)
				4.33	5.25~5.35GHz	Monopole	i-pex(MHF)
				4.66	5.47~5.725GHz	Monopole	i-pex(MHF)
				4.85	5.725~5.85GHz	Monopole	i-pex(MHF)
2	Chain 1	NA	NA	2.65	2.4~2.4835GHz	Monopole	i-pex(MHF)
				4.5	5.15~5.25GHz	Monopole	i-pex(MHF)
				5.77	5.25~5.35GHz	Monopole	i-pex(MHF)
				5.54	5.47~5.725GHz	Monopole	i-pex(MHF)
				4.78	5.725~5.85GHz	Monopole	i-pex(MHF)
3	BT	NA	NA	2.42	2.4~2.4835GHz	Monopole	i-pex(MHF)

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
1	√	√	√	√	Power from POE
2	-	√	√	-	Power from adapter

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane**.
 2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0	GFSK	1

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1


Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 69%RH	120Vac, 60Hz	Weiwei Lo
RE $<$ 1G	28deg. C, 65%RH	120Vac, 60Hz	Andy Ho
PLC	25deg. C, 70%RH	120Vac, 60Hz	Barry Lee
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.

Duty cycle = $0.388 \text{ ms} / 0.628 \text{ ms} = 0.623$, Duty factor = $10 * \log(1/0.618) = 2.09$

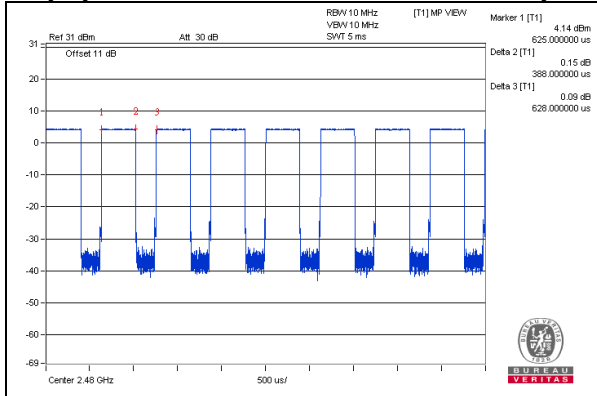

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6440	F9LYQ32	FCC DoC	Provided by Lab
B.	POE Adapter	Symbol	PD-9001GR/AT/AC	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	DC Cable	1	1.8	No	1	Supplied by client
3.	AC Cable	1	1.8	No	0	Provided by Lab
4.	RJ-45 Cable	1	3	No	0	Provided by Lab
5.	Console Cable	1	1.5	No	0	Provided by Lab

3.4.1 Configuration of System under Test


Adapter Mode:

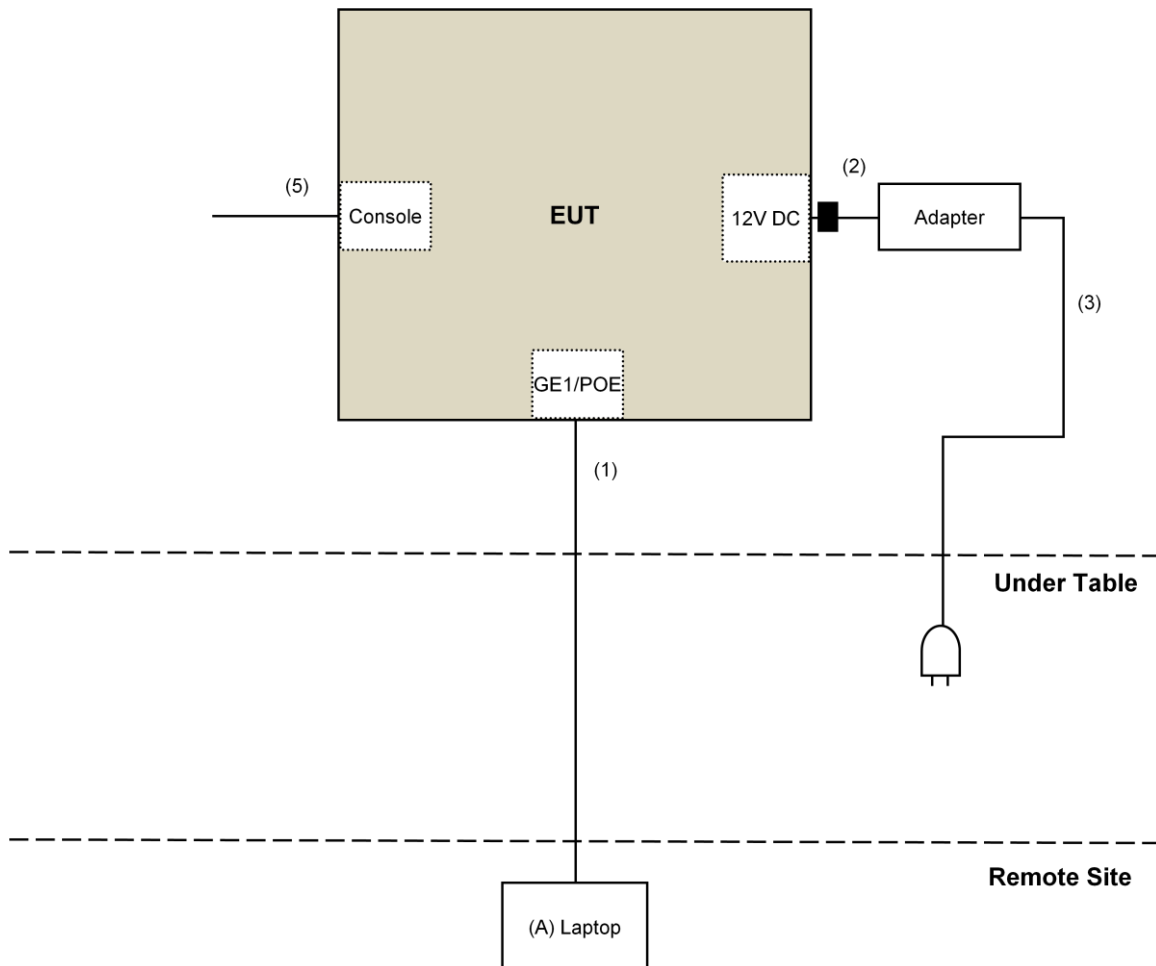

POE Mode (for Conduction test)

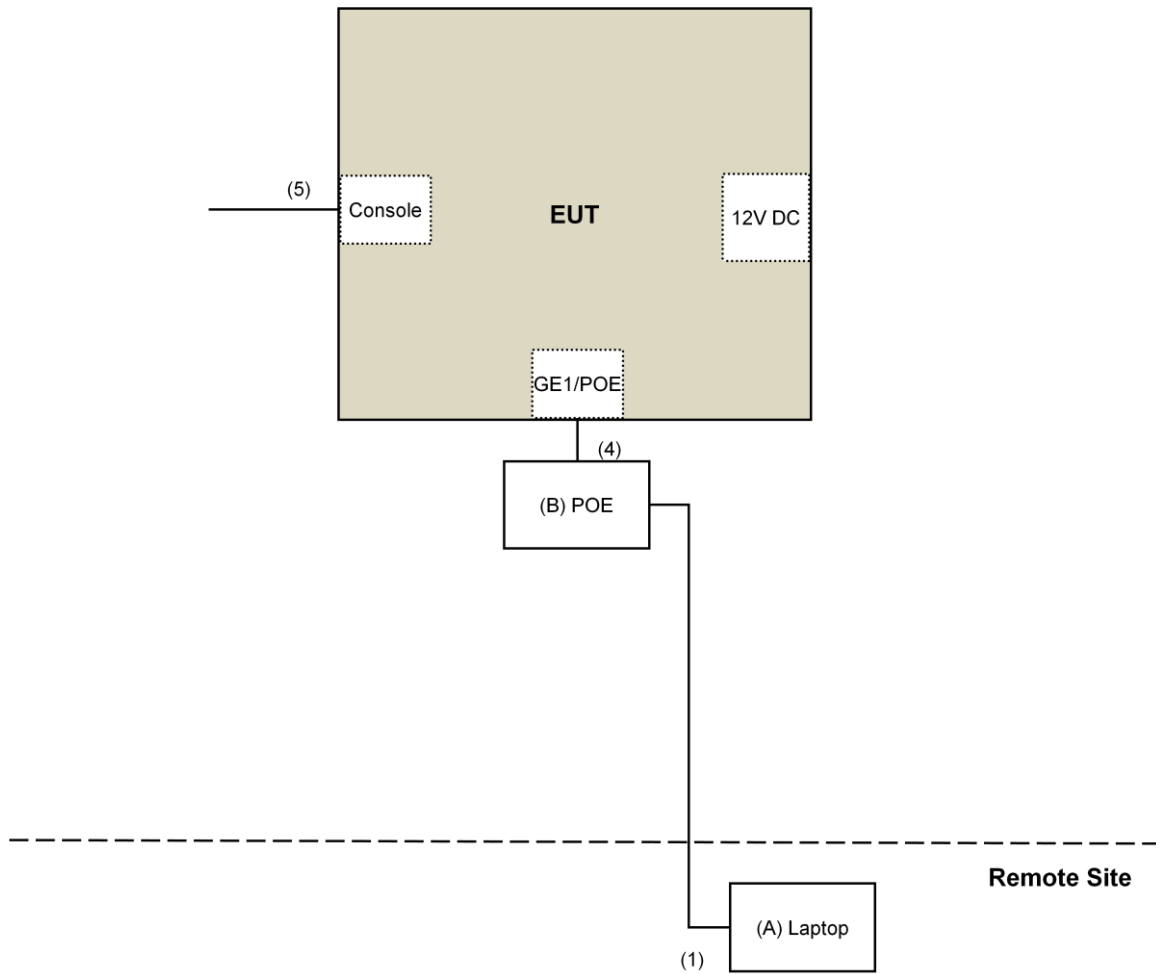

POE Mode (for other test)

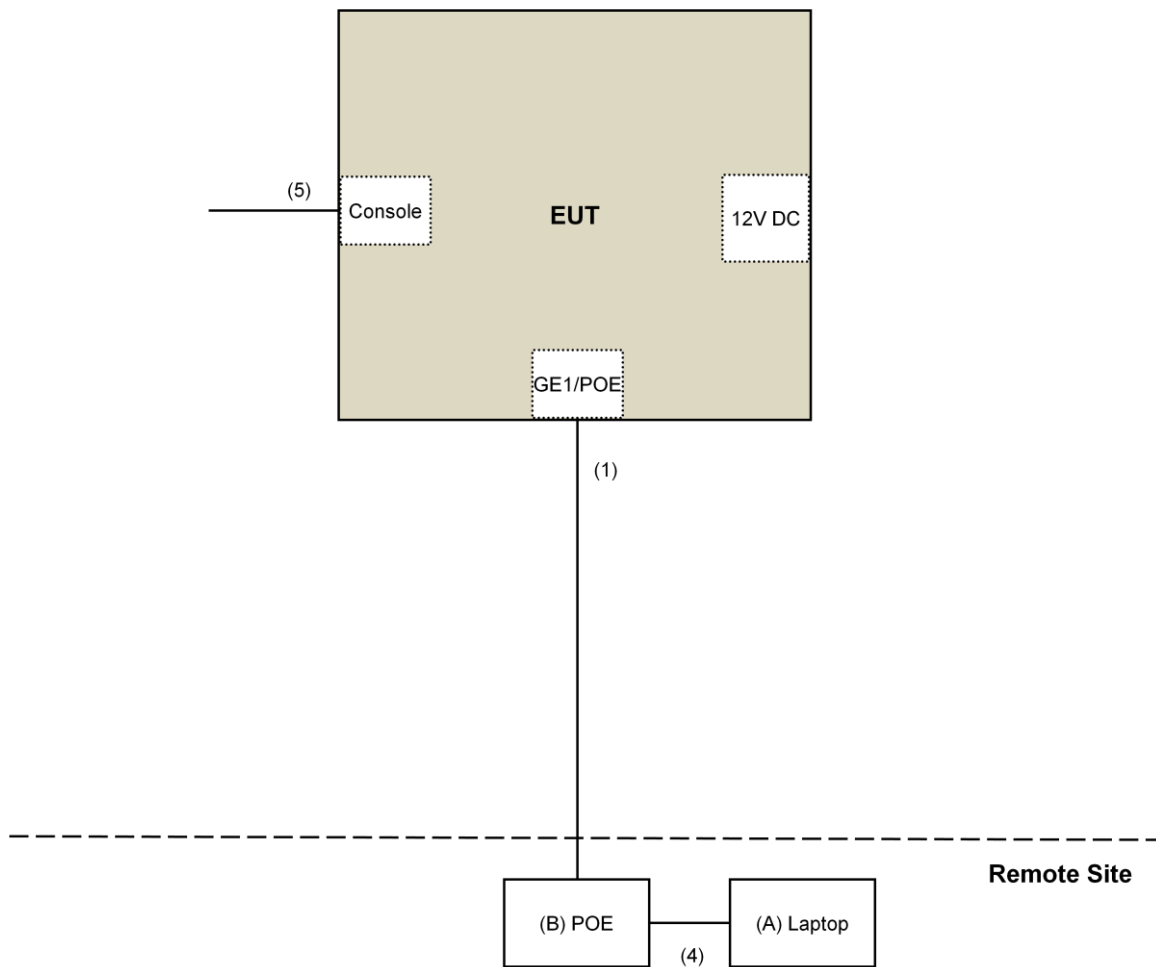

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 16, 2015	Dec. 15, 2016
Pre-Amplifier(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-04	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Jan. 07, 2016	Jan. 06, 2017
RF Cable	8D-FB	CHHCAB-001-1 CHHCAB-001-2	Oct. 04, 2015	Oct. 03, 2016
	RF-141	CHHCAB-004	Oct. 04, 2015	Oct. 03, 2016
Horn Antenna FT-RF	HA-07M18G-NF	0000220091110	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 27, 2015	Oct. 26, 2016
RF Cable	NA	131206 131213 131215 SNMY23685/4	Jan. 15, 2016	Jan. 14, 2017
Spectrum Analyzer Agilent	E4446A	MY48250254	Nov. 25, 2015	Nov. 24, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 11, 2015	Dec. 10, 2016
Horn Antenna SCHWARZBECK	BBHA 9170	9170-424	Jan. 18, 2016	Jan. 17, 2017
RF Cable	SUCOFLEX 102	36442/2 36434/2	Dec. 10, 2015	Dec.09, 2016
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table CT	CM100	NA	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-WD02	NA	NA
Spectrum Analyzer R&S	FSP40	100060	May 11, 2016	May 10, 2017
Power meter Anritsu	ML2495A	1014008	May 5, 2016	May 4, 2017
Power sensor Anritsu	MA2411B	0917122	May 5, 2016	May 4, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: Sep. 16 to 29, 2016

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

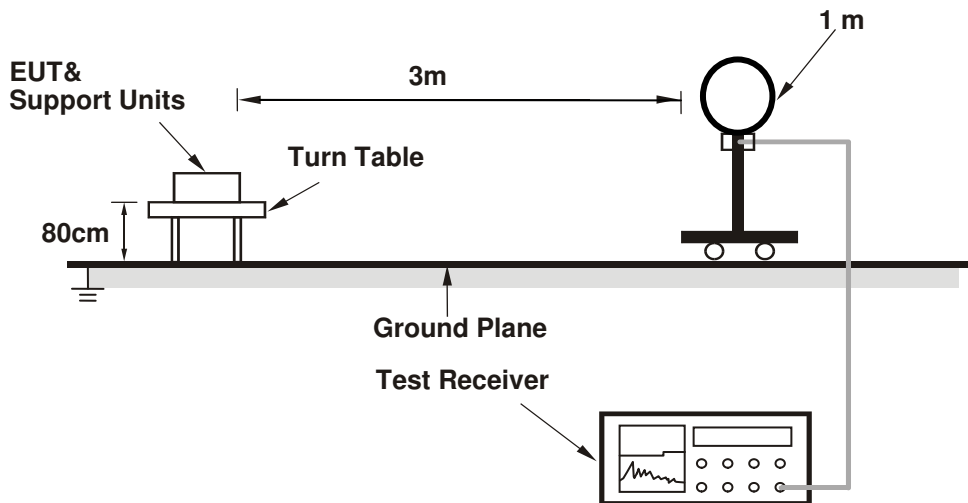

For Radiated emission 30MHz to 1GHz

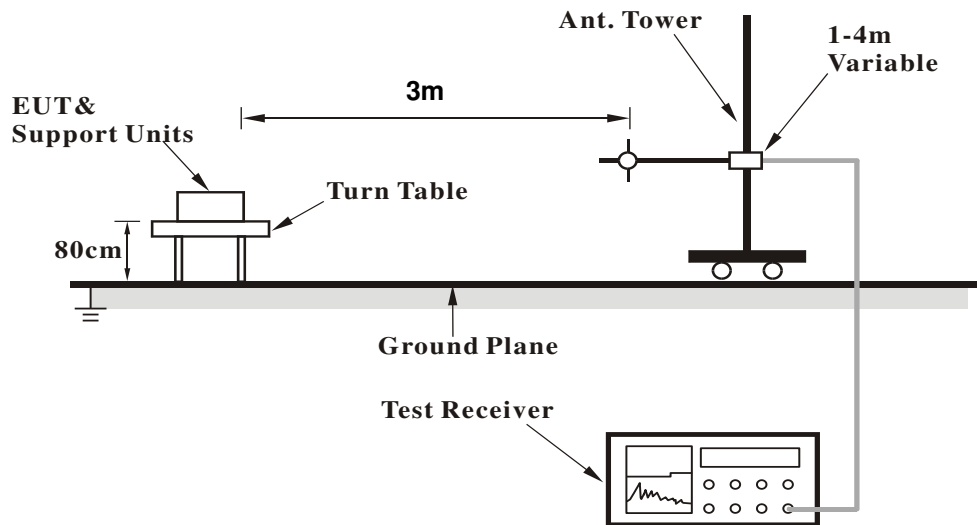

For Radiated emission above 1GHz

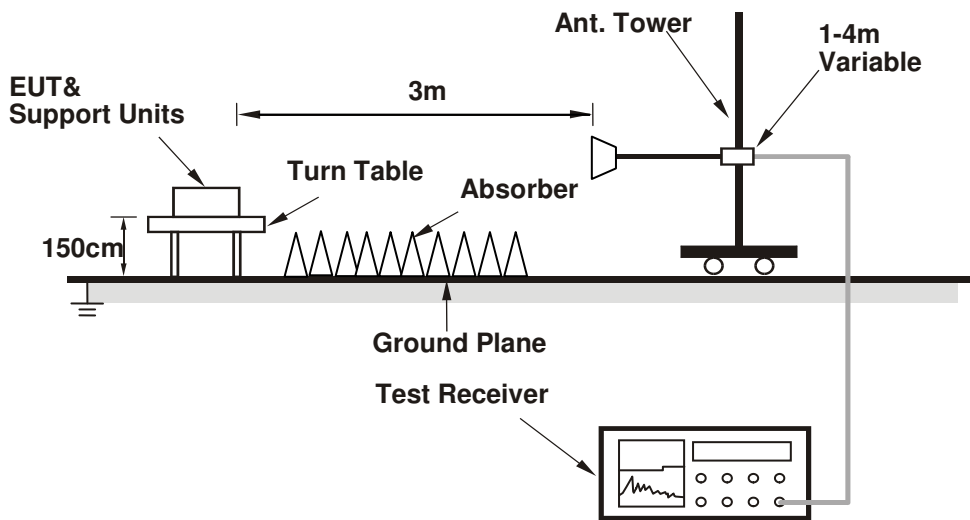

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (run tera term paste command) has been activated to set the EUT on specific status.

4.1.7 Test Results (Mode 1)

Above 1GHz Data :

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2382.00	53.5 PK	74.0	-20.5	1.75 H	294	52.6	0.9
2	2382.00	43.0 AV	54.0	-11.0	1.75 H	294	42.1	0.9
3	*2402.00	108.4 PK			1.75 H	294	107.3	1.1
4	*2402.00	103.6 AV			1.75 H	294	102.5	1.1
5	4804.00	55.3 PK	74.0	-18.7	1.37 H	195	44.6	10.7
6	4804.00	44.3 AV	54.0	-9.7	1.37 H	195	33.6	10.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2382.00	53.3 PK	74.0	-20.7	1.01 V	30	52.4	0.9
2	2382.00	41.4 AV	54.0	-12.6	1.01 V	30	40.5	0.9
3	*2402.00	101.6 PK			1.01 V	30	100.5	1.1
4	*2402.00	97.3 AV			1.01 V	30	96.2	1.1
5	4804.00	56.3 PK	74.0	-17.7	1.59 V	244	45.6	10.7
6	4804.00	45.6 AV	54.0	-8.4	1.59 V	244	34.9	10.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	107.6 PK			1.71 H	304	106.5	1.1
2	*2440.00	103.5 AV			1.71 H	304	102.4	1.1
3	4880.00	55.8 PK	74.0	-18.2	1.42 H	208	45.1	10.7
4	4880.00	44.5 AV	54.0	-9.5	1.42 H	208	33.8	10.7
5	7320.00	62.2 PK	74.0	-11.8	1.50 H	267	46.9	15.3
6	7320.00	50.3 AV	54.0	-3.7	1.50 H	267	35.0	15.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	101.0 PK			1.01 V	33	99.9	1.1
2	*2440.00	96.8 AV			1.01 V	33	95.7	1.1
3	4880.00	55.8 PK	74.0	-18.2	1.54 V	250	45.1	10.7
4	4880.00	45.2 AV	54.0	-8.8	1.54 V	250	34.5	10.7
5	7320.00	62.2 PK	74.0	-11.8	1.62 V	132	46.9	15.3
6	7320.00	51.0 AV	54.0	-3.0	1.62 V	132	35.7	15.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	107.8 PK			1.50 H	65	106.4	1.4
2	*2480.00	102.8 AV			1.50 H	65	101.4	1.4
3	2500.00	54.1 PK	74.0	-19.9	1.50 H	65	52.8	1.3
4	2500.00	43.9 AV	54.0	-10.1	1.50 H	65	42.6	1.3
5	4960.00	56.1 PK	74.0	-17.9	1.43 H	221	45.4	10.7
6	4960.00	45.0 AV	54.0	-9.0	1.43 H	221	34.3	10.7
7	7440.00	62.2 PK	74.0	-11.8	1.55 H	271	46.5	15.7
8	7440.00	50.6 AV	54.0	-3.4	1.55 H	271	34.9	15.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.0 PK			1.04 V	21	99.6	1.4
2	*2480.00	96.5 AV			1.04 V	21	95.1	1.4
3	2500.00	53.6 PK	74.0	-20.4	1.04 V	21	52.3	1.3
4	2500.00	41.8 AV	54.0	-12.2	1.04 V	21	40.5	1.3
5	4960.00	55.8 PK	74.0	-18.2	1.56 V	264	45.1	10.7
6	4960.00	44.9 AV	54.0	-9.1	1.56 V	264	34.2	10.7
7	7440.00	62.1 PK	74.0	-11.9	1.64 V	138	46.4	15.7
8	7440.00	50.7 AV	54.0	-3.3	1.64 V	138	35.0	15.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.74	29.0 QP	40.0	-11.0	1.87 H	91	37.5	-8.5
2	150.18	24.8 QP	43.5	-18.7	1.00 H	287	32.5	-7.7
3	204.78	23.7 QP	43.5	-19.8	1.00 H	41	34.5	-10.8
4	517.81	31.8 QP	46.0	-14.2	1.00 H	272	33.0	-1.2
5	625.05	37.7 QP	46.0	-8.3	1.48 H	282	36.4	1.3
6	949.39	37.1 QP	46.0	-8.9	1.00 H	257	30.2	6.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.11	35.9 QP	40.0	-4.1	1.93 V	306	45.0	-9.1
2	93.78	30.6 QP	43.5	-12.9	1.51 V	61	44.0	-13.4
3	374.92	29.6 QP	46.0	-16.4	1.00 V	231	34.3	-4.7
4	624.87	38.2 QP	46.0	-7.8	1.00 V	186	36.9	1.3
5	874.80	36.6 QP	46.0	-9.4	1.00 V	314	31.4	5.2
6	1000.00	39.7 QP	54.0	-14.3	1.41 V	63	32.2	7.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.79	29.2 QP	40.0	-10.8	1.95 H	94	37.7	-8.5
2	149.71	24.6 QP	43.5	-18.9	1.06 H	300	32.3	-7.7
3	204.44	23.9 QP	43.5	-19.6	1.06 H	35	34.7	-10.8
4	517.45	31.6 QP	46.0	-14.4	1.01 H	282	32.8	-1.2
5	625.01	38.0 QP	46.0	-8.0	1.50 H	327	36.7	1.3
6	949.57	37.5 QP	46.0	-8.5	1.00 H	250	30.6	6.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.14	35.7 QP	40.0	-4.3	2.03 V	316	44.7	-9.0
2	93.67	30.6 QP	43.5	-12.9	1.53 V	42	44.0	-13.4
3	375.05	30.4 QP	46.0	-15.6	1.00 V	228	35.1	-4.7
4	624.95	37.8 QP	46.0	-8.2	1.00 V	190	36.5	1.3
5	875.02	37.1 QP	46.0	-8.9	1.00 V	311	31.9	5.2
6	1000.00	39.8 QP	54.0	-14.2	1.50 V	63	32.3	7.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.38	29.3 QP	40.0	-10.7	1.95 H	126	37.8	-8.5
2	150.19	24.2 QP	43.5	-19.3	1.00 H	289	31.9	-7.7
3	204.65	24.2 QP	43.5	-19.3	1.00 H	59	35.0	-10.8
4	517.25	31.7 QP	46.0	-14.3	1.00 H	288	32.9	-1.2
5	624.90	37.7 QP	46.0	-8.3	1.54 H	314	36.4	1.3
6	949.79	37.4 QP	46.0	-8.6	1.00 H	231	30.5	6.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.43	35.7 QP	40.0	-4.3	2.01 V	312	44.7	-9.0
2	93.45	30.7 QP	43.5	-12.8	1.53 V	58	44.1	-13.4
3	375.03	30.2 QP	46.0	-15.8	1.00 V	251	34.9	-4.7
4	624.99	37.7 QP	46.0	-8.3	1.06 V	198	36.4	1.3
5	874.95	36.9 QP	46.0	-9.1	1.00 V	309	31.7	5.2
6	1000.00	39.6 QP	54.0	-14.4	1.55 V	64	32.1	7.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.8 Test Results (Mode 2)

Below 1GHz Data:

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.04	30.5 QP	40.0	-9.5	1.56 H	199	39.0	-8.5
2	150.50	26.5 QP	43.5	-17.0	1.00 H	136	34.2	-7.7
3	204.72	25.7 QP	43.5	-17.8	1.46 H	231	36.5	-10.8
4	517.59	32.7 QP	46.0	-13.3	1.53 H	223	33.9	-1.2
5	624.89	39.5 QP	46.0	-6.5	1.47 H	237	38.2	1.3
6	949.38	38.2 QP	46.0	-7.8	1.45 H	137	31.3	6.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.97	33.8 QP	40.0	-6.2	1.50 V	264	42.9	-9.1
2	93.46	33.7 QP	43.5	-9.8	1.00 V	274	47.1	-13.4
3	375.00	32.6 QP	46.0	-13.4	1.51 V	241	37.3	-4.7
4	517.72	29.8 QP	46.0	-16.2	1.45 V	300	31.0	-1.2
5	624.92	40.3 QP	46.0	-5.7	1.39 V	227	39.0	1.3
6	874.82	39.0 QP	46.0	-7.0	1.00 V	257	33.8	5.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.76	30.4 QP	40.0	-9.6	1.44 H	205	38.9	-8.5
2	149.77	26.6 QP	43.5	-16.9	1.00 H	149	34.3	-7.7
3	204.89	26.2 QP	43.5	-17.3	1.51 H	226	37.0	-10.8
4	517.64	32.6 QP	46.0	-13.4	1.53 H	232	33.8	-1.2
5	624.92	39.1 QP	46.0	-6.9	1.55 H	229	37.8	1.3
6	949.48	38.6 QP	46.0	-7.4	1.47 H	131	31.7	6.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.73	33.7 QP	40.0	-6.3	1.49 V	238	42.8	-9.1
2	93.53	33.2 QP	43.5	-10.3	1.03 V	258	46.6	-13.4
3	375.01	32.0 QP	46.0	-14.0	1.55 V	238	36.7	-4.7
4	517.49	30.1 QP	46.0	-15.9	1.45 V	309	31.3	-1.2
5	624.95	39.8 QP	46.0	-6.2	1.30 V	199	38.5	1.3
6	875.02	38.8 QP	46.0	-7.2	1.00 V	272	33.6	5.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.82	30.4 QP	40.0	-9.6	1.40 H	226	38.9	-8.5
2	149.97	26.7 QP	43.5	-16.8	1.02 H	138	34.4	-7.7
3	204.25	26.0 QP	43.5	-17.5	1.56 H	225	36.8	-10.8
4	517.77	32.8 QP	46.0	-13.2	1.47 H	248	34.0	-1.2
5	624.91	38.6 QP	46.0	-7.4	1.50 H	211	37.3	1.3
6	949.71	38.5 QP	46.0	-7.5	1.45 H	138	31.6	6.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.48	33.7 QP	40.0	-6.3	1.48 V	271	42.7	-9.0
2	93.87	33.0 QP	43.5	-10.5	1.00 V	263	46.4	-13.4
3	374.90	32.1 QP	46.0	-13.9	1.50 V	222	36.8	-4.7
4	517.06	29.9 QP	46.0	-16.1	1.48 V	288	31.1	-1.2
5	624.99	40.2 QP	46.0	-5.8	1.34 V	214	38.9	1.3
6	874.86	38.9 QP	46.0	-7.1	1.00 V	259	33.7	5.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 09, 2016	May 08, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Aug. 31, 2016	Aug. 30, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
RF Cable	5D-FB	COACAB-002	Mar. 04, 2016	Mar. 03, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-003	Sep. 13, 2016	Sep. 12, 2017
50 ohms Terminator	N/A	04	Nov. 18, 2015	Nov. 17, 2016
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2015	Sep. 30, 2016
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Sep. 13, 2016

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

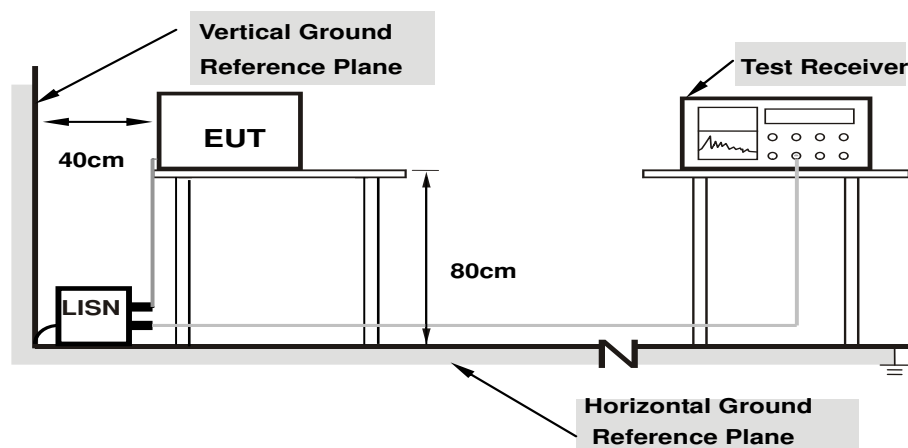

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.31	34.32	22.09	44.63	32.40	66.00	56.00	-21.37	-23.60
2	0.17734	10.27	30.10	18.75	40.37	29.02	64.61	54.61	-24.24	-25.59
3	0.41172	10.25	29.45	22.44	39.70	32.69	57.61	47.61	-17.91	-14.92
4	0.70859	10.18	13.48	8.55	23.66	18.73	56.00	46.00	-32.34	-27.27
5	15.01953	10.78	17.51	11.75	28.29	22.53	60.00	50.00	-31.71	-27.47
6	22.97266	11.03	27.70	26.00	38.73	37.03	60.00	50.00	-21.27	-12.97

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

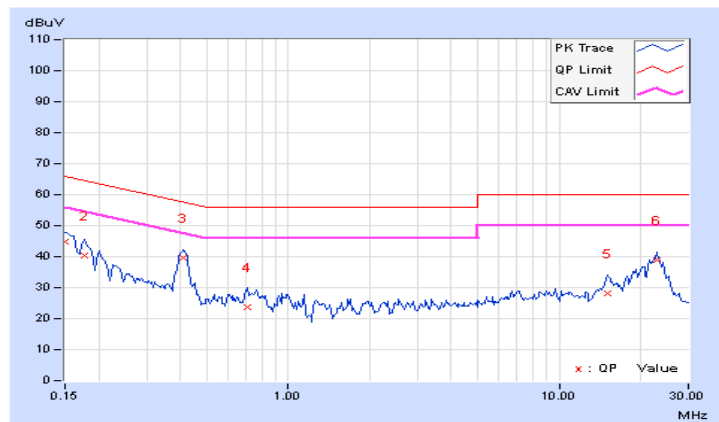


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.36	34.76	23.07	45.12	33.43	66.00	56.00	-20.88	-22.57
2	0.18125	10.26	29.93	21.13	40.19	31.39	64.43	54.43	-24.24	-23.04
3	0.40391	10.23	30.82	24.36	41.05	34.59	57.77	47.77	-16.72	-13.18
4	0.71250	10.22	16.54	11.16	26.76	21.38	56.00	46.00	-29.24	-24.62
5	18.47266	10.92	21.00	16.74	31.92	27.66	60.00	50.00	-28.08	-22.34
6	23.13281	11.06	27.00	24.44	38.06	35.50	60.00	50.00	-21.94	-14.50

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

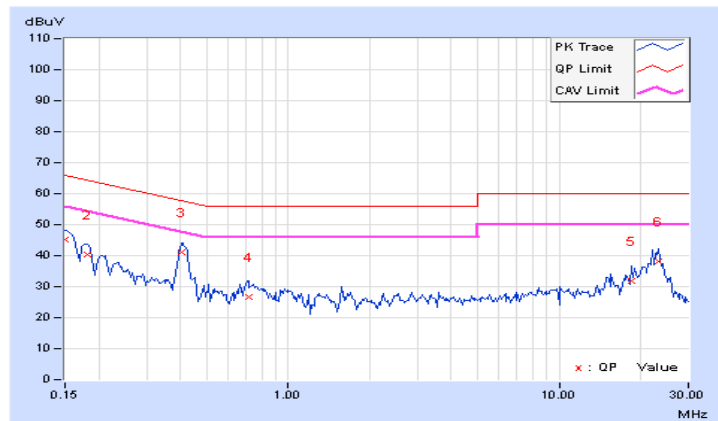


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.31	37.40	22.09	47.71	32.40	66.00	56.00	-18.29	-23.60
2	0.18125	10.27	32.97	18.66	43.24	28.93	64.43	54.43	-21.19	-25.50
3	0.20859	10.24	28.63	14.15	38.87	24.39	63.26	53.26	-24.39	-28.87
4	0.42734	10.24	21.90	16.59	32.14	26.83	57.30	47.30	-25.16	-20.47
5	0.67734	10.19	8.45	1.46	18.64	11.65	56.00	46.00	-37.36	-34.35
6	15.38672	10.79	16.64	8.35	27.43	19.14	60.00	50.00	-32.57	-30.86

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

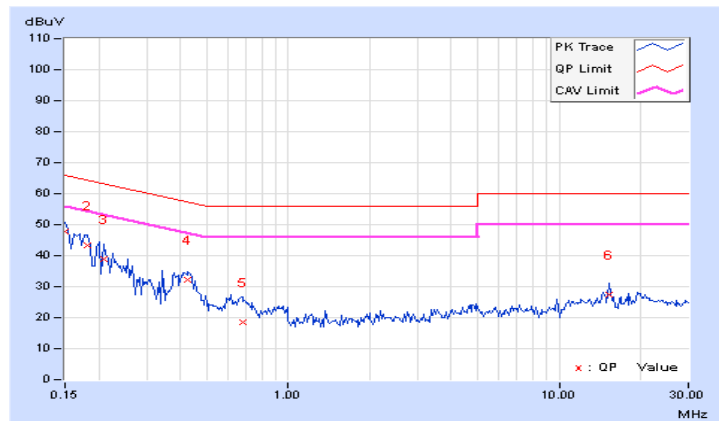


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	10.27	33.65	20.65	43.92	30.92	64.61	54.61	-20.69	-23.69
2	0.41953	10.23	23.40	16.56	33.63	26.79	57.46	47.46	-23.83	-20.67
3	0.68125	10.22	8.64	3.93	18.86	14.15	56.00	46.00	-37.14	-31.85
4	4.60938	10.49	8.34	-0.48	18.83	10.01	56.00	46.00	-37.17	-35.99
5	15.38281	10.83	18.50	11.46	29.33	22.29	60.00	50.00	-30.67	-27.71
6	19.71094	10.96	18.64	14.38	29.60	25.34	60.00	50.00	-30.40	-24.66

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

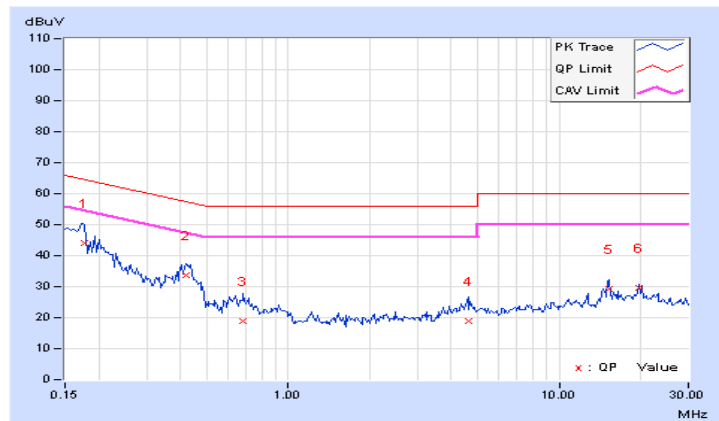


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.72	0.5	Pass
19	2440	0.74	0.5	Pass
39	2480	0.72	0.5	Pass

Spectrum Plot of Worst Value

CH 39

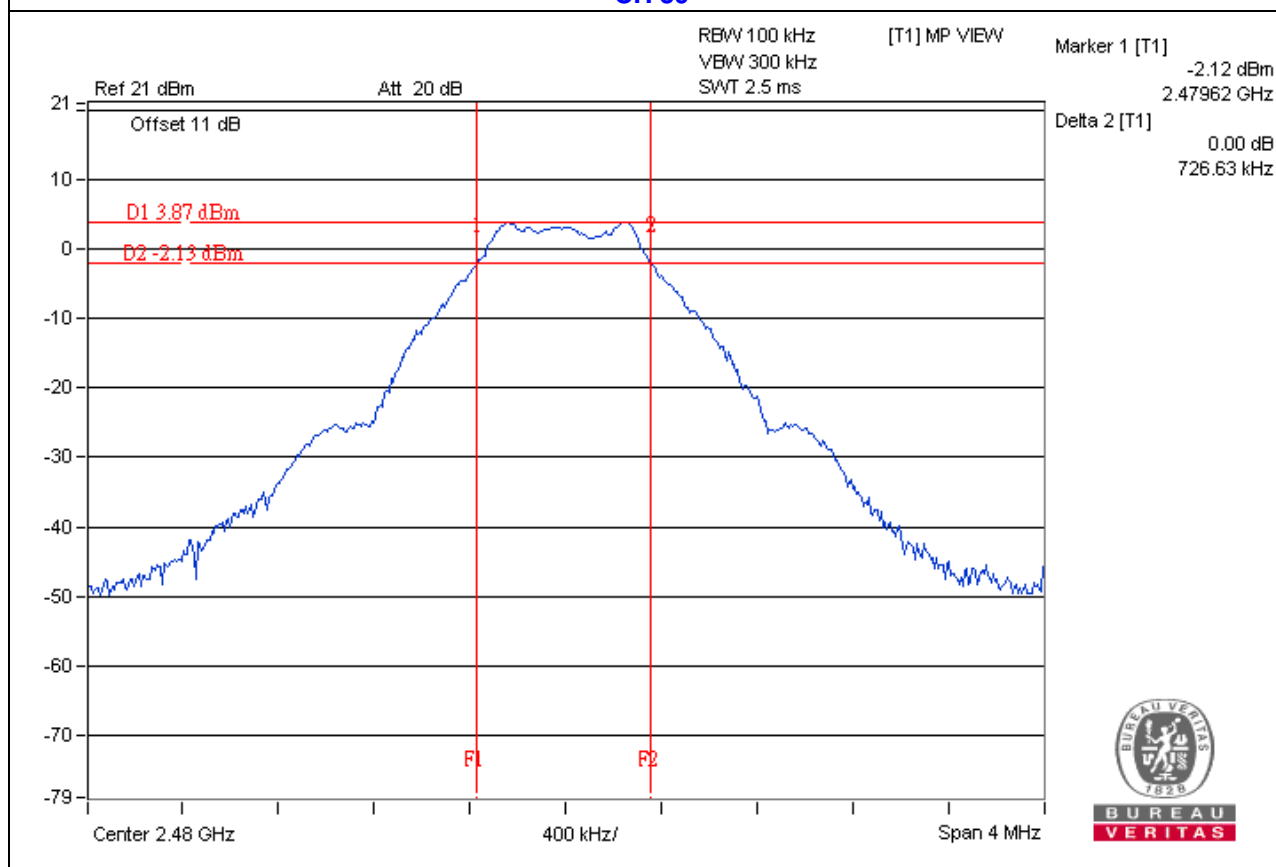


4.4 Conducted Output Power Measurement

4.4.1 Limits OF Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup

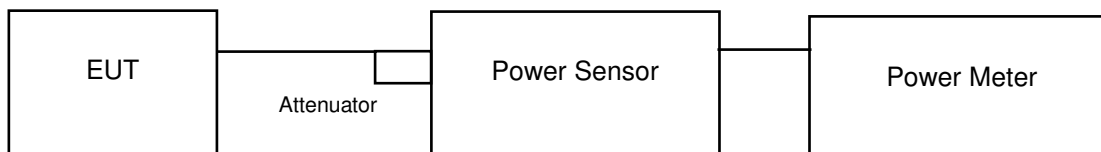

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	3.342	5.24	30	Pass
19	2440	3.243	5.11	30	Pass
39	2480	3.311	5.20	30	Pass

FOR AVERAGE POWER


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	3.214	5.07
19	2440	3.199	5.05
39	2480	3.206	5.06

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	2402	-10.05	8	Pass
19	2440	-9.54	8	Pass
39	2480	-10.25	8	Pass

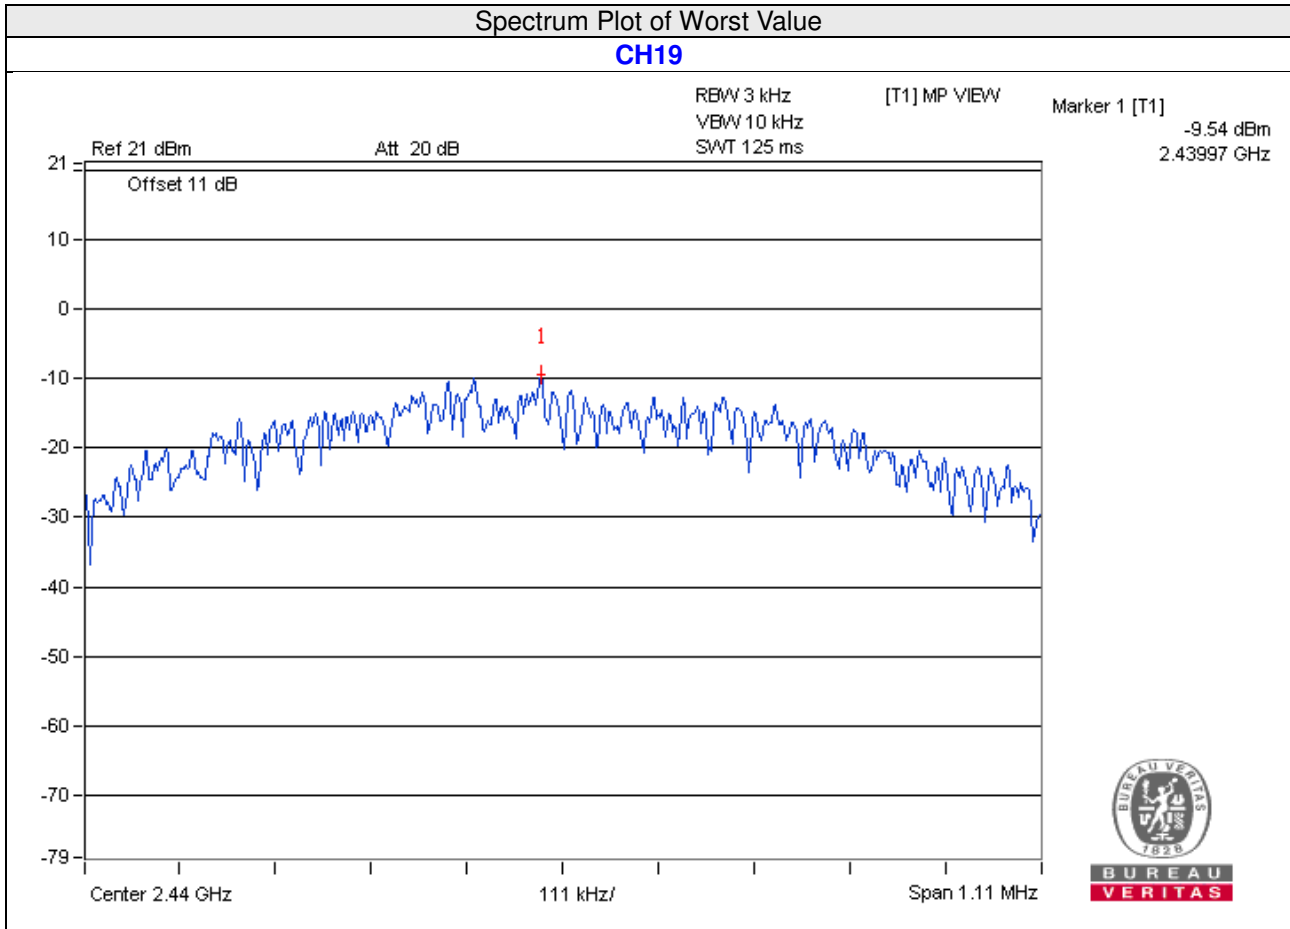


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard



No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



CH 0

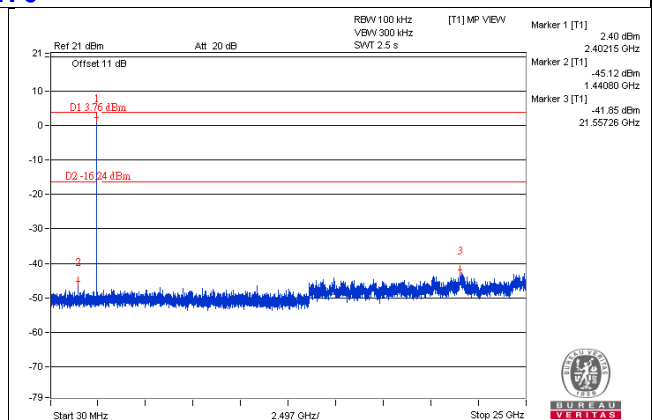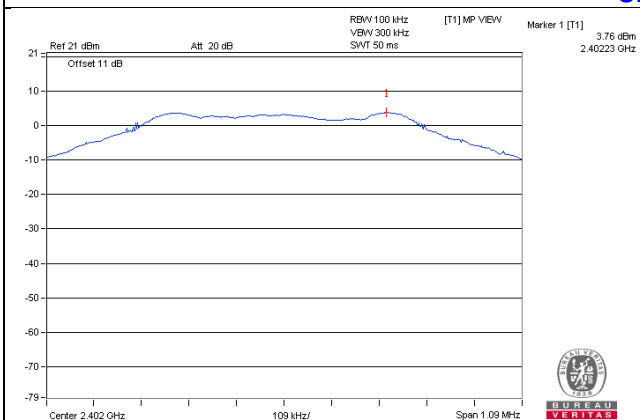


CH 19

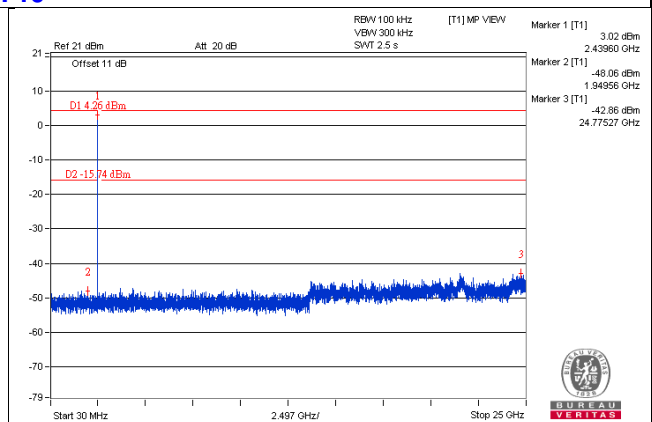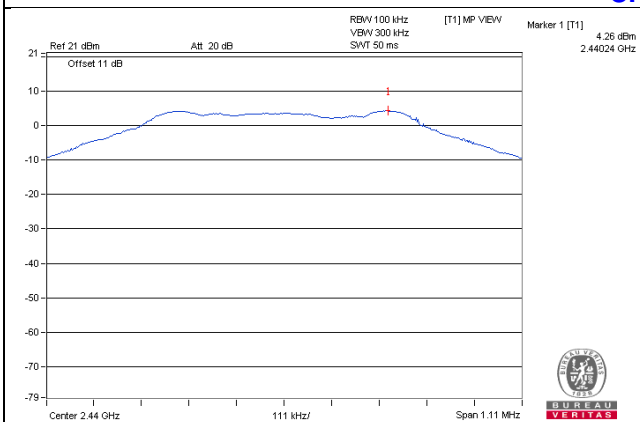


CH 39

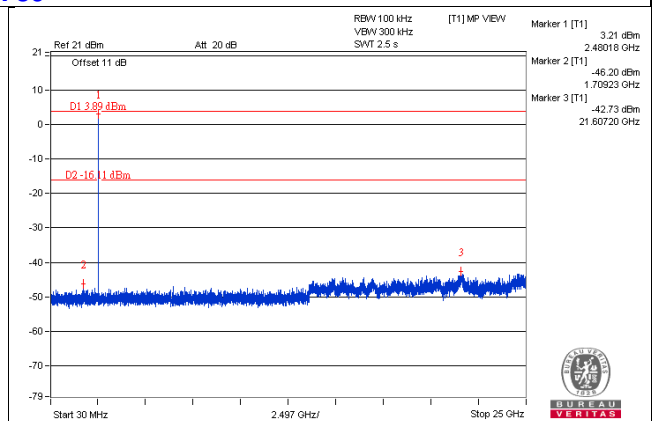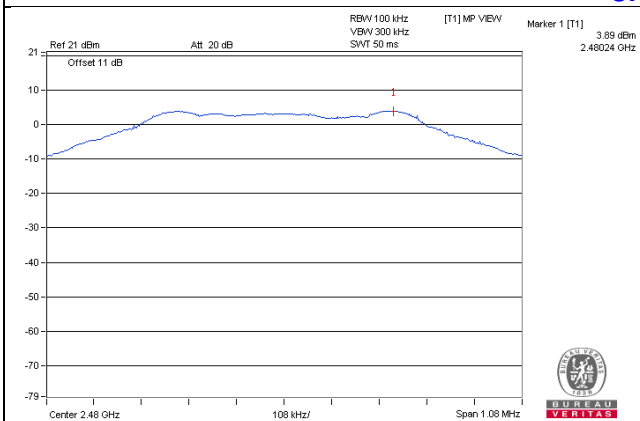

CH 0 Band edge

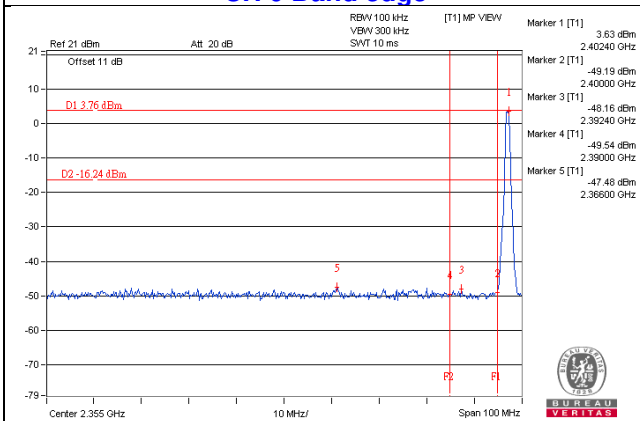

CH 39 Band edge

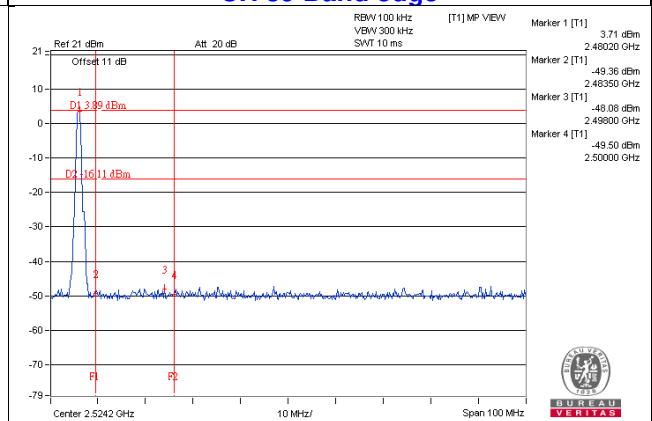

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---