



# FCC RADIO TEST REPORT

FCC ID : UZ7CC600  
Equipment : Customer Concierge  
Brand Name : ZEBRA  
Model Name : CC600  
Applicant : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Manufacturer : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jul. 31, 2019 and testing was started from Aug. 20, 2019 and completed on Oct. 23, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement .....	13
3.3 Antenna Requirements .....	17
<b>4 List of Measuring Equipment .....</b>	<b>18</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>19</b>
<b>Appendix A. Radiated Spurious Emission</b>	
<b>Appendix B. Radiated Spurious Emission Plots</b>	
<b>Appendix C. Duty Cycle Plots</b>	
<b>Appendix D. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FR911110-03B	01	Initial issue of report	Nov. 14, 2019



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.247(b)(3)	Peak Output Power	Pass	-
-	15.247(e)	Power Spectral Density	Not Required	-
-	15.247(d)	Conducted Band Edges and Spurious Emission	Not Required	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 6.21 dB at 37.760 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.3	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Remark:**

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by changing antenna to external dipole antenna. All the test cases were performed on original report which can be referred to Sporton Report Number FR911110B. Based on the original report, the test cases were verified.

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ching Chen



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Customer Concierge
Brand Name	ZEBRA
Model Name	CC600
FCC ID	UZ7CC600
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DV
SW Version	01-18-02.00-OG-U00-STD
FW Version	01-18-02.00-OG-U00-STD
MFD	30JUL19
EUT Stage	Engineering Sample

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
AC Adaptor	Brand Name	ZEBRA	Model Name	PWR-BUA5V16W0WW
DC Cable	Brand Name	ZEBRA	Model Name	CBL-DC-383A1-01
AC Cable	Brand Name	ZEBRA	Model Name	50-16000-182R

Support Unit Used in Test Configuration and System				
POE	Brand Name	Microsemi	Part Number	PD-9501GR/AC

## 1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	-0.90 dBm (0.0008 W) for 1Mbps -1.00 dBm (0.0008 W) for 2Mbps
Antenna Type / Gain	External Dipole Antenna with gain 2.30 dBi
Type of Modulation	Bluetooth LE : GFSK

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	03CH13-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode

Channel	Frequency	Bluetooth – LE 1Mbps RF Average Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	-0.90 dBm	
Ch19	2440MHz	-1.40 dBm	
Ch39	2480MHz	-1.00 dBm	

Channel	Frequency	Bluetooth – LE 2Mbps RF Average Output Power	
		Data Rate / Modulation	
		GFSK	
		2Mbps	
Ch00	2402MHz	-1.00 dBm	
Ch19	2440MHz	-1.40 dBm	
Ch39	2480MHz	-1.00 dBm	

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).






The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
<b>Conducted Test Cases</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>Radiated Test Cases</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps

### 2.3 Connection Diagram of Test System

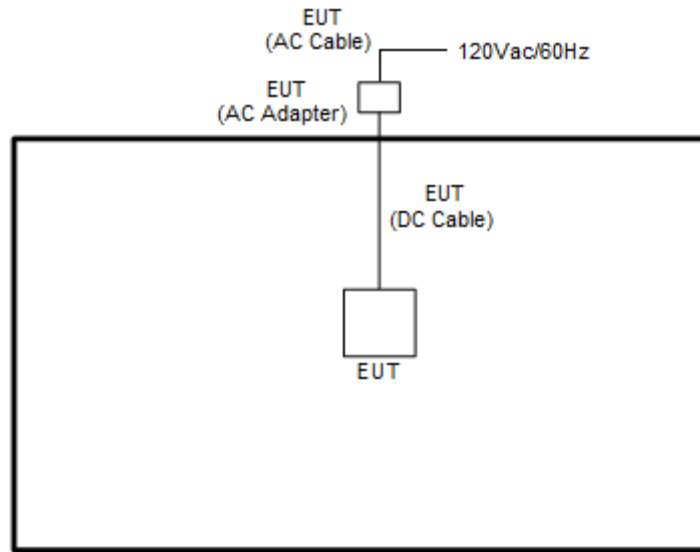

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude E3340	FCC DoC/ Contains FCC ID: PD97260NGU	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Notebook	Lenovo	Latitude E335	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

### 2.5 EUT Operation Test Setup

The RF test items, utility "QRCT V.3.0.271.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

### 3 Test Result

#### 3.1 Output Power Measurement

##### 3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for average output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the average output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

##### 3.1.4 Test Setup

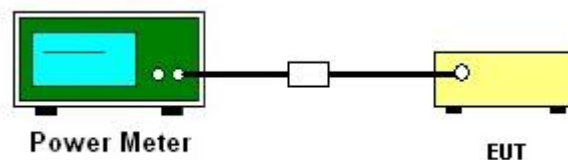



3.1.5 Test Result of Average Output Power

Test Engineer :	Eason Huang and Shiming Liu	Temperature :	21~25°C
		Relative Humidity :	51~54%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	-0.90
BLE	1Mbps	1	19	2440	-1.40
BLE	1Mbps	1	39	2480	-1.00
BLE	2Mbps	1	0	2402	-1.00
BLE	2Mbps	1	19	2440	-1.40
BLE	2Mbps	1	39	2480	-1.00



### 3.2 Radiated Band Edges and Spurious Emission Measurement

#### 3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.




### 3.2.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.2.4 Test Setup


For radiated emissions below 30MHz

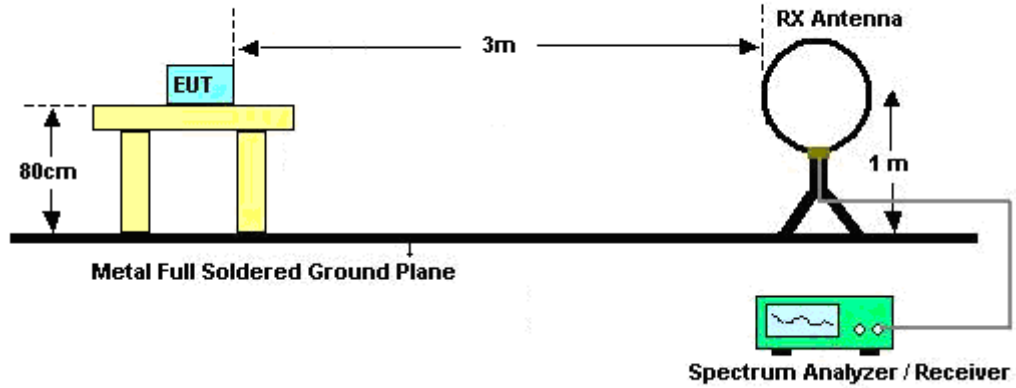

For radiated emissions from 30MHz to 1GHz

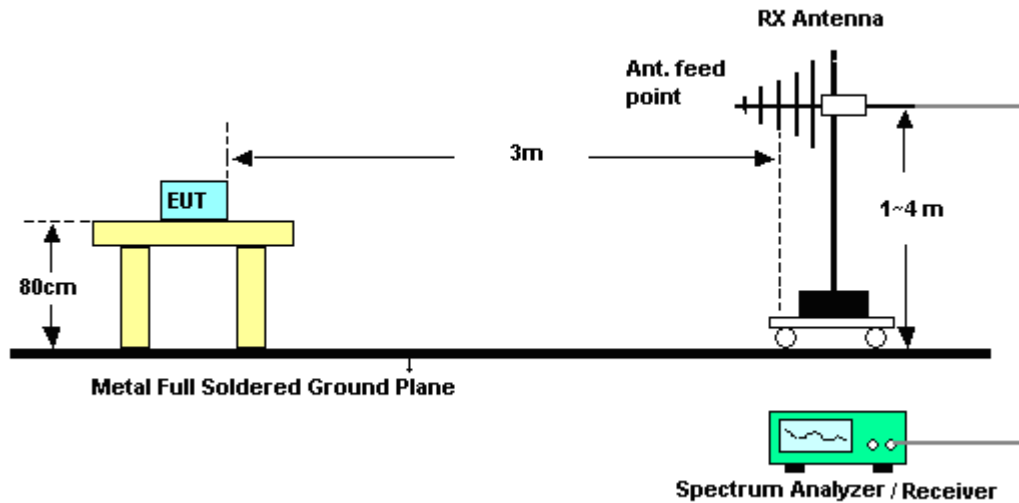

For radiated emissions above 1GHz

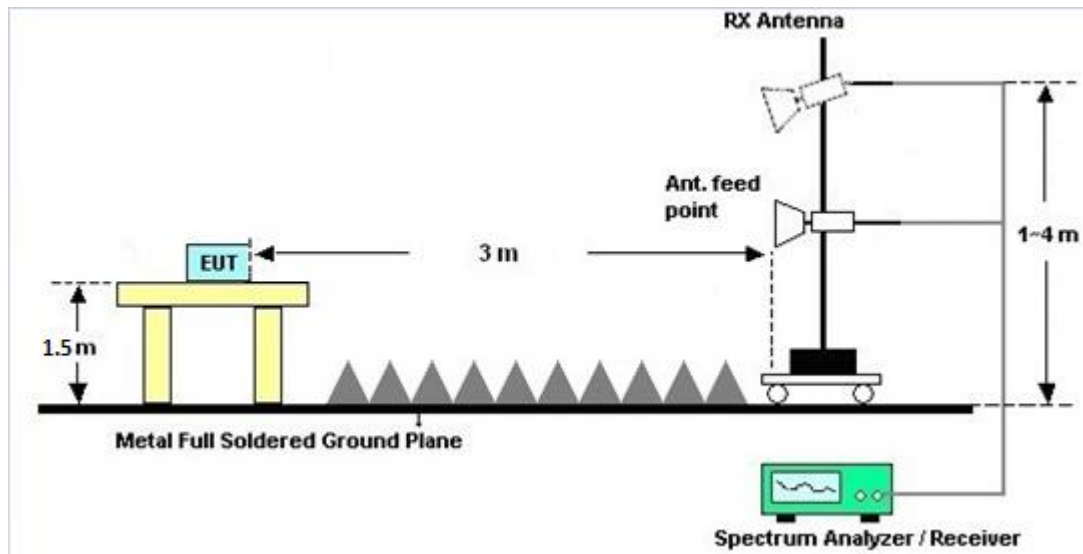

### 3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A and B.

### 3.2.7 Duty Cycle

Please refer to Appendix C.

### 3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A and B.





### **3.3 Antenna Requirements**

#### **3.3.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### **3.3.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

#### **3.3.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 19, 2018	Aug. 20, 2019	Dec. 18, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2018	Aug. 20, 2019	Nov. 20, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	EM	EMSW18	SW107090 3	N/A	Dec. 19, 2018	Aug. 20, 2019	Dec. 18, 2019	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Jan. 06, 2020	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D& 00800N1D01 N-06	40103 & 07	30MHz~1GHz	Apr. 30, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Apr. 29, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-124 1	1GHz~18GHz	Jul. 02, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Jul. 01, 2020	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 20, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	May 19, 2020	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532701 47	1GHz~26.5GHz	Mar. 15, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 14, 2020	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 18, 2018	Sep. 22, 2019 ~ Oct. 23, 2019	Dec. 17, 2019	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 06, 2018	Sep. 22, 2019 ~ Oct. 23, 2019	Dec. 05, 2019	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	10Hz~44GHz	Mar. 19, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 18, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Feb. 13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30M-18G	Feb. 13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30M-18G	Feb. 13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	10Hz~44GHz	Mar. 19, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 18, 2020	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Sep. 22, 2019 ~ Oct. 23, 2019	N/A	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Sep. 22, 2019 ~ Oct. 23, 2019	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 22, 2019 ~ Oct. 23, 2019	N/A	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A(MXE )	MY541300 85	20Hz ~ 8.4GHz	Nov. 01, 2018	Sep. 22, 2019 ~ Oct. 23, 2019	Oct. 31, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WLKS1200-1 2SS	SN2	1.2GHz Low Pass Filter	Mar. 22, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 21, 2020	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN2	3GHz High Pass Filter	Jul. 14, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Jul. 13, 2020	Radiation (03CH13-HY)
Filter	Woken	WHKX8-5272. 5-6750-18000 -40ST	SN5	6.75G Highpass	Mar.13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 12, 2020	Radiation (03CH13-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.4
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.3
---	-----



## Appendix A. Radiated Spurious Emission

Test Engineer :	Ryan Lin, JC Linag and Wilson Wu	Temperature :	21.5~23.5°C
		Relative Humidity :	46.5~49.5%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		2382.45	53.02	-20.98	74	41.01	27.67	13.92	29.58	111	132	P	H	
		2348.22	43.49	-10.51	54	31.39	27.8	13.89	29.59	111	132	A	H	
	*	2402	92.76	-	-	80.81	27.6	13.93	29.58	111	132	P	H	
	*	2402	92.14	-	-	80.19	27.6	13.93	29.58	111	132	A	H	
													H	
			2328.06	53.02	-20.98	74	40.9	27.84	13.87	29.59	378	220	P	V
			2372.37	43.4	-10.6	54	31.37	27.71	13.91	29.59	378	220	A	V
	*		2402	93.31	-	-	81.36	27.6	13.93	29.58	378	220	P	V
	*		2402	92.59	-	-	80.64	27.6	13.93	29.58	378	220	A	V
														V
BLE CH 19 2440MHz		2378.88	53.18	-20.82	74	41.17	27.68	13.91	29.58	119	146	P	H	
		2338	43.6	-10.4	54	31.49	27.82	13.88	29.59	119	146	A	H	
	*	2440	94.55	-	-	82.65	27.52	13.96	29.58	119	146	P	H	
	*	2440	94.08	-	-	82.18	27.52	13.96	29.58	119	146	A	H	
			2485.58	52.94	-21.06	74	41.01	27.5	14	29.57	119	146	P	H
			2496.22	43.38	-10.62	54	31.44	27.5	14.01	29.57	119	146	A	H
			2315.74	52.62	-21.38	74	40.48	27.87	13.86	29.59	400	216	P	V
			2382.1	43.77	-10.23	54	31.76	27.67	13.92	29.58	400	216	A	V
	*		2440	94.57	-	-	82.67	27.52	13.96	29.58	400	216	P	V
	*		2440	94.09	-	-	82.19	27.52	13.96	29.58	400	216	A	V
			2493.63	52.57	-21.43	74	40.63	27.5	14.01	29.57	400	216	P	V
			2486.91	43.51	-10.49	54	31.58	27.5	14	29.57	400	216	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	96.75	-	-	84.82	27.5	14	29.57	120	150	P	H
	*	2480	96.25	-	-	84.32	27.5	14	29.57	120	150	A	H
		2491.08	52.67	-21.33	74	40.73	27.5	14.01	29.57	120	150	P	H
		2497.48	43.31	-10.69	54	31.37	27.5	14.01	29.57	120	150	A	H
													H
	*	2480	96.99	-	-	85.06	27.5	14	29.57	398	214	P	V
	*	2480	96.42	-	-	84.49	27.5	14	29.57	398	214	A	V
		2497.68	52.55	-21.45	74	40.61	27.5	14.01	29.57	398	214	P	V
		2486.88	43.15	-10.85	54	31.22	27.5	14	29.57	398	214	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	36.45	-37.55	74	56.55	31.11	6.38	57.59	100	0	P	H
													H
													H
													H
													V
													V
													V
BLE CH 19 2440MHz		4880	36.58	-37.42	74	56.23	31.2	6.59	57.44	100	0	P	H
		7320	43.84	-30.16	74	56.13	36.76	8.23	57.28	100	0	P	H
													H
													H
													V
													V
													V
BLE CH 39 2480MHz		4960	36.73	-37.27	74	55.83	31.36	6.82	57.28	100	0	P	H
		7440	44.05	-29.95	74	56.6	36.68	8.2	57.43	100	0	P	H
													H
													H
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		70.74	31.52	-8.48	40	50.87	12.25	0.66	32.26	-	-	P	H	
		122.15	35.9	-7.6	43.5	49.94	17.19	0.96	32.19	100	0	P	H	
		135.73	34.99	-8.51	43.5	48.93	17.23	1.01	32.18	-	-	P	H	
		212.36	34.83	-8.67	43.5	51.04	14.66	1.27	32.14	-	-	P	H	
		856.44	32.25	-13.75	46	32.45	28.8	2.62	31.62	-	-	P	H	
		947.62	32.99	-13.01	46	30.98	30.36	2.66	31.01	-	-	P	H	
														H
														H
														H
														H
														H
														H
			37.76	33.79	-6.21	40	44.96	20.62	0.5	32.29	100	0	P	V
			66.86	33.61	-6.39	40	53.36	11.86	0.65	32.26	-	-	P	V
			122.15	28.7	-14.8	43.5	42.74	17.19	0.96	32.19	-	-	P	V
			165.8	29.65	-13.85	43.5	45.09	15.62	1.1	32.16	-	-	P	V
			222.06	28.21	-17.79	46	43.95	15.12	1.28	32.14	-	-	P	V
			957.32	33.91	-12.09	46	31.5	30.65	2.68	30.92	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<2Mbps>  
2.4GHz 2400~2483.5MHz  
BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		2369.955	52.53	-21.47	74	40.49	27.72	13.91	29.59	110	131	P	H	
		2388.645	44.8	-9.2	54	32.81	27.65	13.92	29.58	110	131	A	H	
	*	2402	92.57	-	-	80.62	27.6	13.93	29.58	110	131	P	H	
	*	2402	91.24	-	-	79.29	27.6	13.93	29.58	110	131	A	H	
													H	
													H	
			2311.785	52.73	-21.27	74	40.58	27.88	13.86	29.59	378	219	P	V
			2362.92	45.1	-8.9	54	33.04	27.75	13.9	29.59	378	219	A	V
	*		2402	93.18	-	-	81.23	27.6	13.93	29.58	378	219	P	V
	*		2402	91.87	-	-	79.92	27.6	13.93	29.58	378	219	A	V
														V
														V
BLE CH 19 2440MHz		2343.74	52.39	-21.61	74	40.29	27.81	13.88	29.59	119	145	P	H	
		2338.28	45	-9	54	32.89	27.82	13.88	29.59	119	145	A	H	
	*	2440	94.38	-	-	82.48	27.52	13.96	29.58	119	145	P	H	
	*	2440	92.88	-	-	80.98	27.52	13.96	29.58	119	145	A	H	
			2499.86	52.47	-21.53	74	40.53	27.5	14.01	29.57	119	145	P	H
			2485.51	44.65	-9.35	54	32.72	27.5	14	29.57	119	145	A	H
			2382.24	53.08	-20.92	74	41.07	27.67	13.92	29.58	400	215	P	V
			2350.32	45.3	-8.7	54	33.2	27.8	13.89	29.59	400	215	A	V
	*		2440	94.4	-	-	82.5	27.52	13.96	29.58	400	215	P	V
	*		2440	92.86	-	-	80.96	27.52	13.96	29.58	400	215	A	V
			2488.1	52.1	-21.9	74	40.17	27.5	14	29.57	400	215	P	V
			2497.97	44.49	-9.51	54	32.55	27.5	14.01	29.57	400	215	A	V





<b>BLE CH 39 2480MHz</b>	*	2480	96.66	-	-	84.73	27.5	14	29.57	118	149	P	H
	*	2480	95.35	-	-	83.42	27.5	14	29.57	118	149	A	H
		2487.96	52.42	-21.58	74	40.49	27.5	14	29.57	118	149	P	H
		2487.16	44.85	-9.15	54	32.92	27.5	14	29.57	118	149	A	H
													H
													H
	*	2480	96.84	-	-	84.91	27.5	14	29.57	395	215	P	V
	*	2480	95.53	-	-	83.6	27.5	14	29.57	395	215	A	V
		2485.08	52.53	-21.47	74	40.6	27.5	14	29.57	395	215	P	V
		2491.12	44.7	-9.3	54	32.76	27.5	14.01	29.57	395	215	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		4804	36.06	-37.94	74	56.16	31.11	6.38	57.59	100	0	P	H	
													H	
													H	
													H	
			4804	37.97	-36.03	74	58.07	31.11	6.38	57.59	100	0	P	V
														V
														V
BLE CH 19 2440MHz		4880	35.87	-38.13	74	55.52	31.2	6.59	57.44	100	0	P	H	
		7320	42.77	-31.23	74	55.06	36.76	8.23	57.28	100	0	P	H	
													H	
													H	
			4880	36.18	-37.82	74	55.83	31.2	6.59	57.44	100	0	P	V
			7320	43.06	-30.94	74	55.35	36.76	8.23	57.28	100	0	P	V
														V
BLE CH 39 2480MHz		4960	36.58	-37.42	74	55.68	31.36	6.82	57.28	100	0	P	H	
		7440	42.96	-31.04	74	55.51	36.68	8.2	57.43	100	0	P	H	
													H	
													H	
			4960	36.13	-37.87	74	55.23	31.36	6.82	57.28	100	0	P	V
			7440	43.59	-30.41	74	56.14	36.68	8.2	57.43	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		67.83	30.92	-9.08	40	50.46	12.07	0.65	32.26	-	-	P	H	
		122.15	36.69	-6.81	43.5	50.73	17.19	0.96	32.19	100	0	P	H	
		135.73	35.86	-7.64	43.5	49.8	17.23	1.01	32.18	-	-	P	H	
		211.39	34.77	-8.73	43.5	50.92	14.72	1.27	32.14	-	-	P	H	
		844.8	31.57	-14.43	46	31.94	28.7	2.6	31.67	-	-	P	H	
		945.68	34.16	-11.84	46	32.28	30.24	2.66	31.02	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			38.73	33.33	-6.67	40	44.91	20.21	0.5	32.29	100	0	P	V
			65.89	33.32	-6.68	40	53.32	11.61	0.65	32.26	-	-	P	V
			127	28.67	-14.83	43.5	42.59	17.3	0.97	32.19	-	-	P	V
			166.77	30.37	-13.13	43.5	45.9	15.52	1.11	32.16	-	-	P	V
			729.37	31.02	-14.98	46	33.48	27.27	2.3	32.03	-	-	P	V
			948.59	33.97	-12.03	46	31.89	30.42	2.66	31	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix B. Radiated Spurious Emission Plots

Test Engineer :	Ryan Lin, JC Linag and Wilson Wu	Temperature :	21.5~23.5°C
		Relative Humidity :	46.5~49.5%

**Note symbol**





-L	Low channel location
-R	High channel location



<1Mbps>  
 2.4GHz 2400~2483.5MHz  
 BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH13-1FY          Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 911110-03          Mode : 4</p>	<p>Site : 03CH13-1FY          Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 911110-03          Mode : 4</p>
Avg.	<p>Site : 03CH13-1FY          Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL          RBW:1000.000KHz VBW:3.000KHz SWT:Auto          Detector : Peak          Project : 911110-03          Mode : 4</p>	<p>Site : 03CH13-1FY          Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL          RBW:1000.000KHz VBW:3.000KHz SWT:Auto          Detector : Peak          Project : 911110-03          Mode : 4</p>

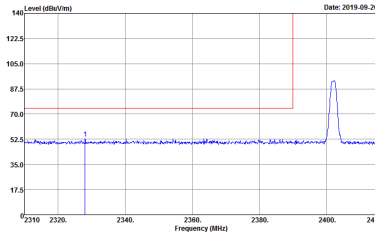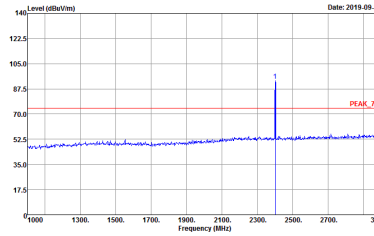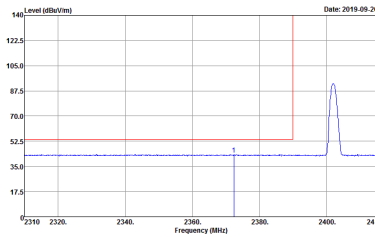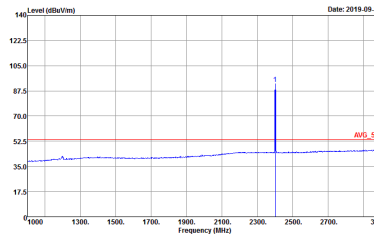



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH13-IHY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 4</p>	 <p>Site : 03CH13-IHY            Condition : PEAK_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 4</p>
<p><b>Avg</b></p>	 <p>Site : 03CH13-IHY            Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 4</p>	 <p>Site : 03CH13-IHY            Condition : AVG_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 4</p>









BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	<p>Date: 2019-09-26</p> <p>Site : 03CH13-HV            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 5</p>	<p>Date: 2019-09-26</p> <p>Site : 03CH13-HV            Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 5</p>
Avg.	<p>Date: 2019-09-26</p> <p>Site : 03CH13-HV            Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 5</p>	<p>Date: 2019-09-26</p> <p>Site : 03CH13-HV            Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 5</p>

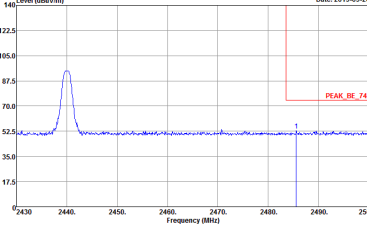
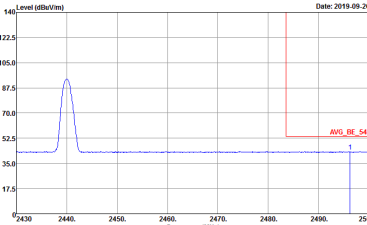


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
<p><b>Peak</b></p>	 <p>Date: 2019-09-26</p> <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 5</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Date: 2019-09-26</p> <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 5</p>	<p>Left blank</p>

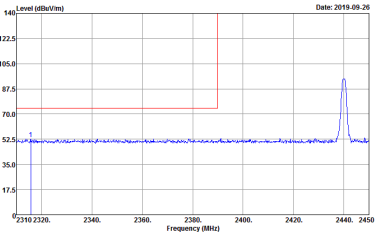
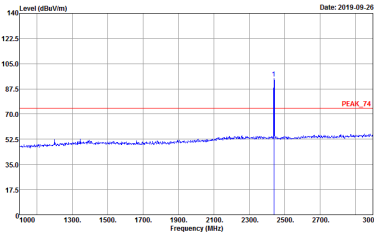
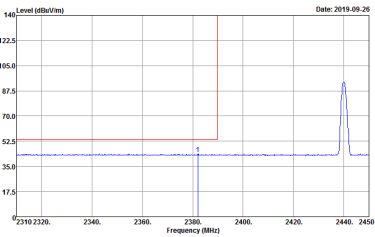
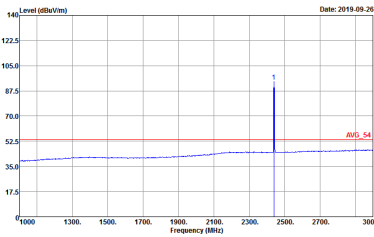


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 5</p>	 <p>Site : 03CH13-HY            Condition : PEAK_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 5</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 5</p>	 <p>Site : 03CH13-HY            Condition : AVG_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 5</p>



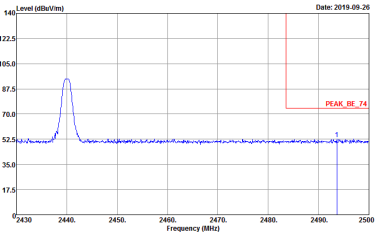
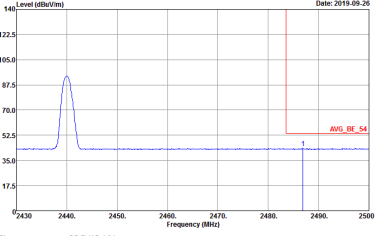


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 5</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 5</p>	<p>Left blank</p>

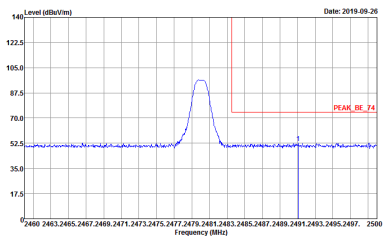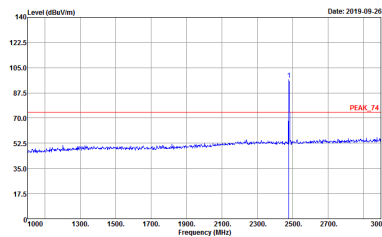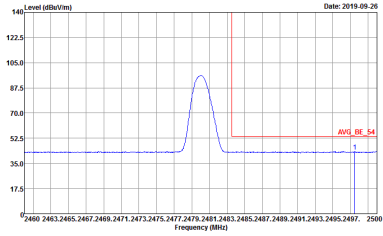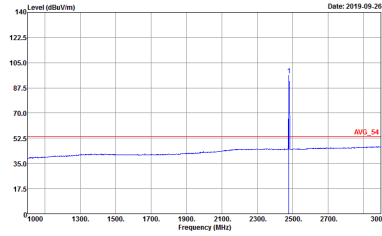

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 6</p>	 <p>Site : 03CH13-HY            Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 6</p>
Avg.	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 6</p>	 <p>Site : 03CH13-HY            Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 6</p>

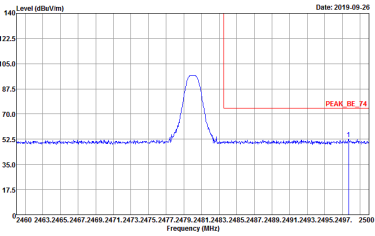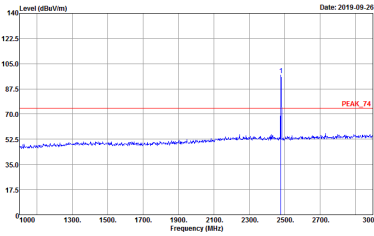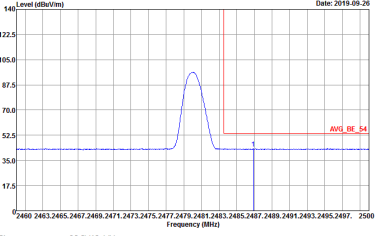
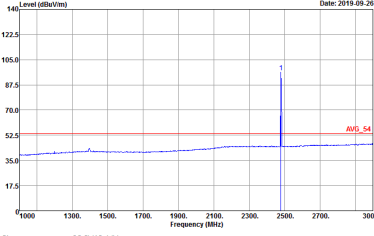


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH13-1HY            Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 6</p>	 <p>Site : 03CH13-1HY            Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 6</p>
Avg.	 <p>Site : 03CH13-1HY            Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 6</p>	 <p>Site : 03CH13-1HY            Condition : AVG_54 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 6</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

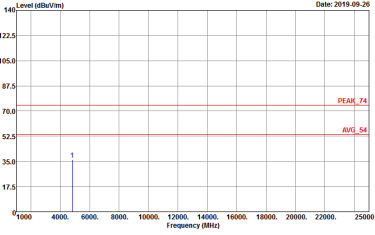
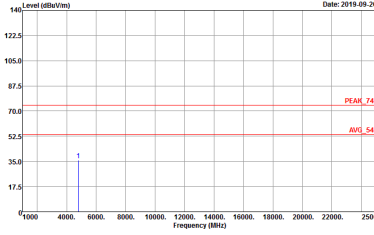
BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH13-HY          Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL          Detector : Peak          Project : 911110-03          Mode : 4</p>	 <p>Site : 03CH13-HY          Condition : PEAK_74 3m HORN_91200_1241 VERTICAL          Detector : Peak          Project : 911110-03          Mode : 4</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 911110-03 Mode : -5</p>	<p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 911110-03 Mode : -5</p>



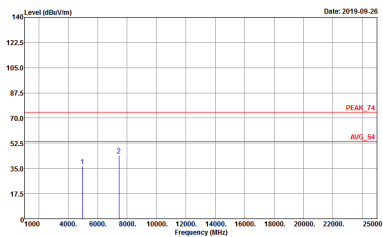
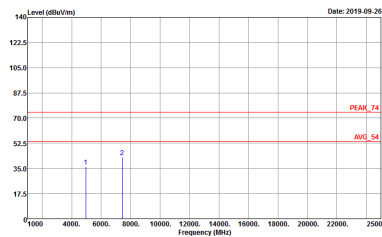


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
<b>Peak</b>	 <p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 911110-03 Mode : -6</p>	 <p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 911110-03 Mode : -6</p>







Emission below 1GHz

2.4GHz BLE (LF)



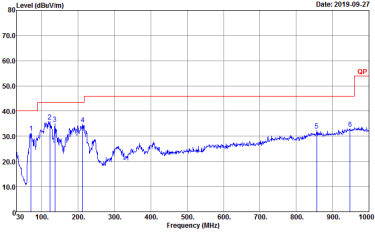
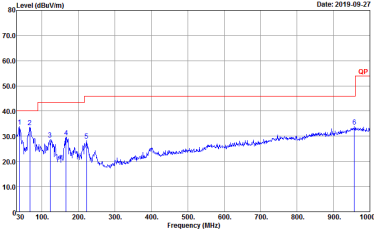
BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH13-HY  Condition : QP 3m BTL06_40103 HORIZONTAL  Detector : Peak  Project : 911110-03  Mode : 54</p>	 <p>Site : 03CH13-HY  Condition : QP 3m BTL06_40103 VERTICAL  Detector : Peak  Project : 911110-03  Mode : 54</p>







<2Mbps>  
 2.4GHz 2400~2483.5MHz  
 BLE (Band Edge @ 3m)

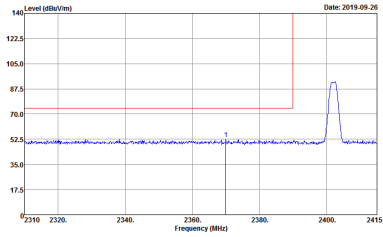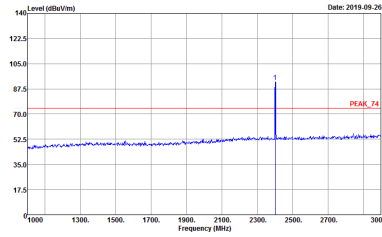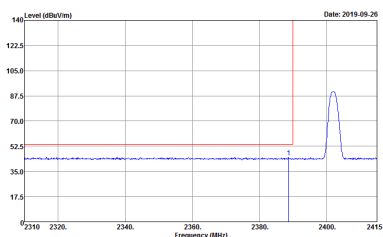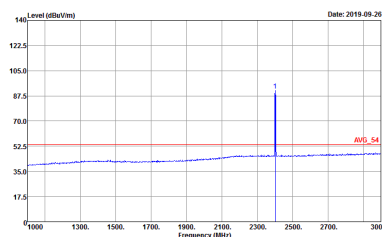BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-1FY            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 7</p>	 <p>Site : 03CH13-1FY            Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 7</p>
Avg.	 <p>Site : 03CH13-1FY            Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:10.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 7</p>	 <p>Site : 03CH13-1FY            Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:10.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 7</p>

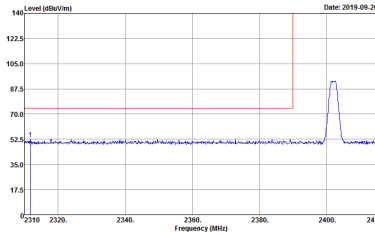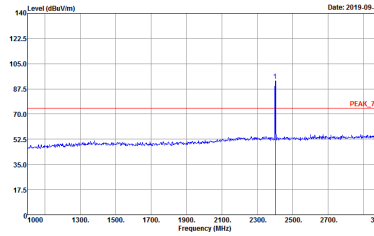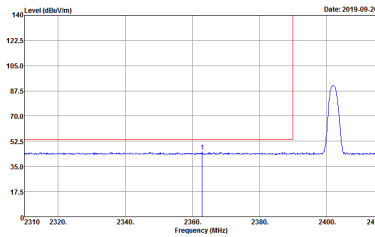
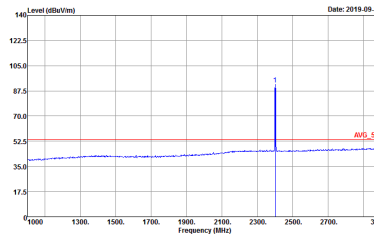


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH13-IHY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 7</p>	 <p>Site : 03CH13-IHY            Condition : PEAK_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 7</p>
<p><b>Avg</b></p>	 <p>Site : 03CH13-IHY            Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 7</p>	 <p>Site : 03CH13-IHY            Condition : AVG_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 7</p>

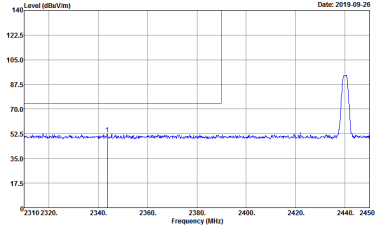
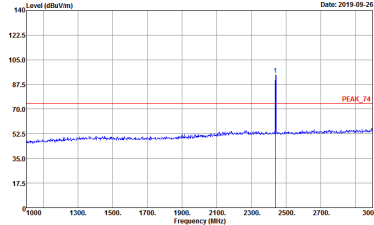
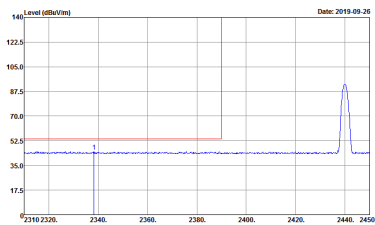
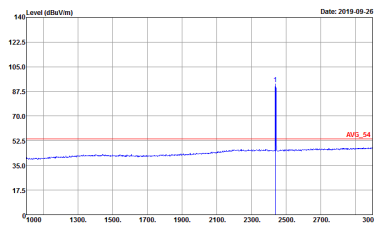


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	 <p>Date: 2019-09-26</p> <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 8</p>	 <p>Date: 2019-09-26</p> <p>Site : 03CH13-HY            Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 8</p>
Avg.	 <p>Date: 2019-09-26</p> <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL            RBW:1000.000KHz VBW:10.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 8</p>	 <p>Date: 2019-09-26</p> <p>Site : 03CH13-HY            Condition : AVG_54 3m HORN_9120D_1241 HORIZONTAL            RBW:1000.000KHz VBW:10.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : 8</p>

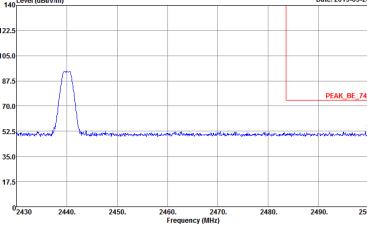
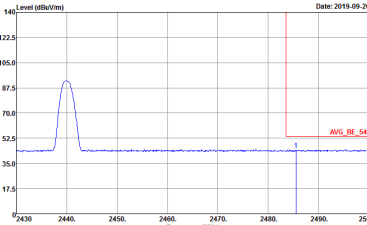


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : B</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL            : RBW:1000.000KHz VBW:10.000KHz SWT:Auto            Detector : Peak            Project : 911110-03            Mode : B</p>	<p>Left blank</p>

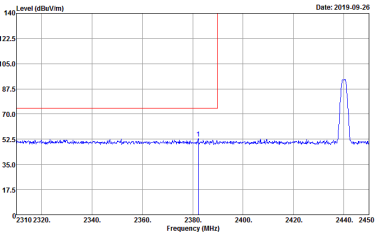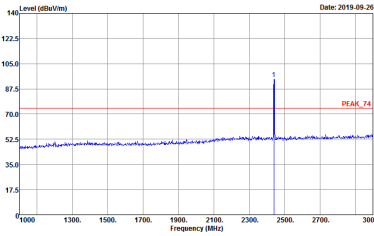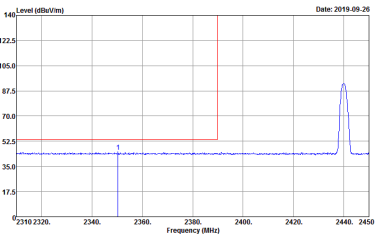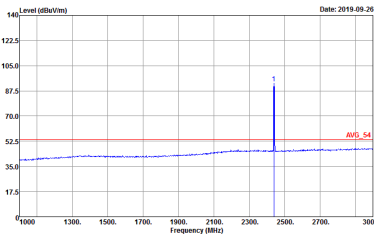





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	 <p>Site : 03CH13-IHY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : B</p>	 <p>Site : 03CH13-IHY            Condition : PEAK_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : B</p>
Avg.	 <p>Site : 03CH13-IHY            Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : B</p>	 <p>Site : 03CH13-IHY            Condition : AVG_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : B</p>

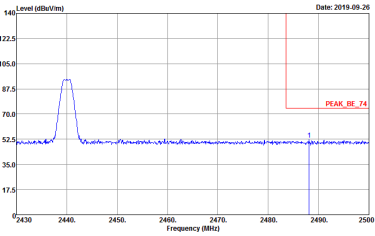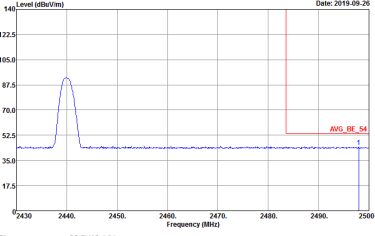

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : B</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : B</p>	<p>Left blank</p>



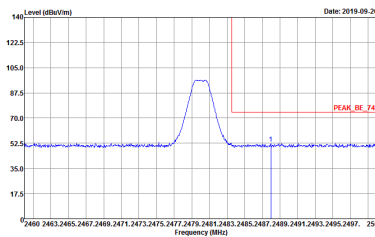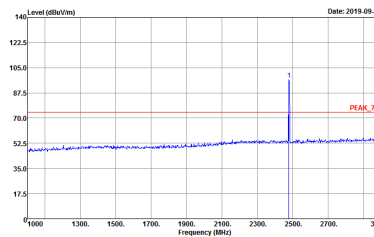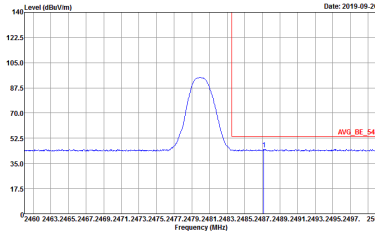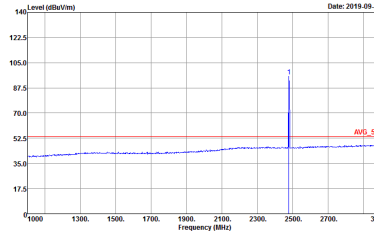

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            Detector : Peak            Project : 911110-03            Mode : 9</p>	 <p>Site : 03CH13-HY            Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL            Detector : Peak            Project : 911110-03            Mode : 9</p>
Avg.	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL            Detector : Peak            Project : 911110-03            Mode : 9</p>	 <p>Site : 03CH13-HY            Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL            Detector : Peak            Project : 911110-03            Mode : 9</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH13-1HY            Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 9</p>	<p>Site : 03CH13-1HY            Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 9</p>
<p><b>Avg.</b></p>	<p>Site : 03CH13-1HY            Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 9</p>	<p>Site : 03CH13-1HY            Condition : AVG_54 3m HORN_9120D_1241 VERTICAL            Detector : Peak            Project : 911110-03            Mode : 9</p>



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)
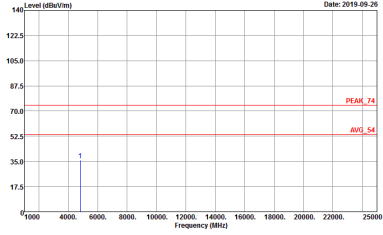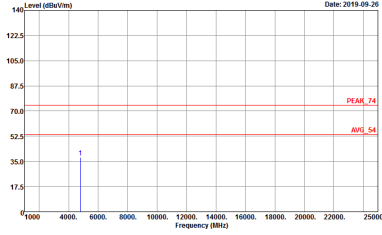
<b>BLE</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
	<b>BLE CH00 2402MHz</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak</b> <b>Avg.</b>	 <p>Site : 03CH13-HY  Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL  Detector : Peak  Project : 911110-03  Mode : 7</p>	 <p>Site : 03CH13-HY  Condition : PEAK_74 3m HORN_91200_1241 VERTICAL  Detector : Peak  Project : 911110-03  Mode : 7</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 911110-03 Mode : 8</p>	<p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 911110-03 Mode : 8</p>

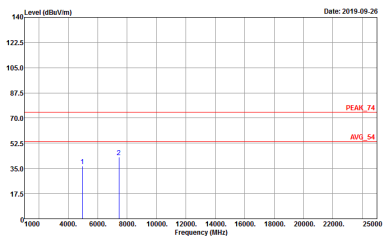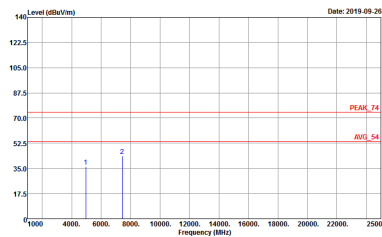

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
<b>Peak</b>	 <p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 911110-03 Mode : -9</p>	 <p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 911110-03 Mode : -9</p>



Emission below 1GHz

2.4GHz BLE (LF)


BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH13-HY Condition : QP 3m BTL06_40103 HORIZONTAL Detector : Peak Project : 911110-03 Mode : 55</p>	<p>Site : 03CH13-HY Condition : QP 3m BTL06_40103 VERTICAL Detector : Peak Project : 911110-03 Mode : 55</p>



### Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Bluetooth -LE for 1Mbps	62.18	388	2.58	3kHz	2.06
Bluetooth -LE for 2Mbps	32.05	200	5.00	10kHz	4.94


#### Bluetooth -LE for 1Mbps

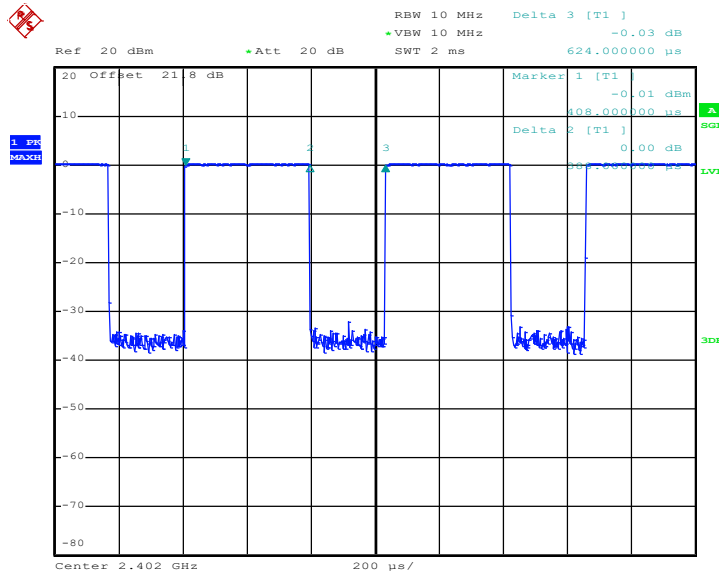

Date: 20.AUG.2019 16:43:05



Bluetooth -LE for 2Mbps

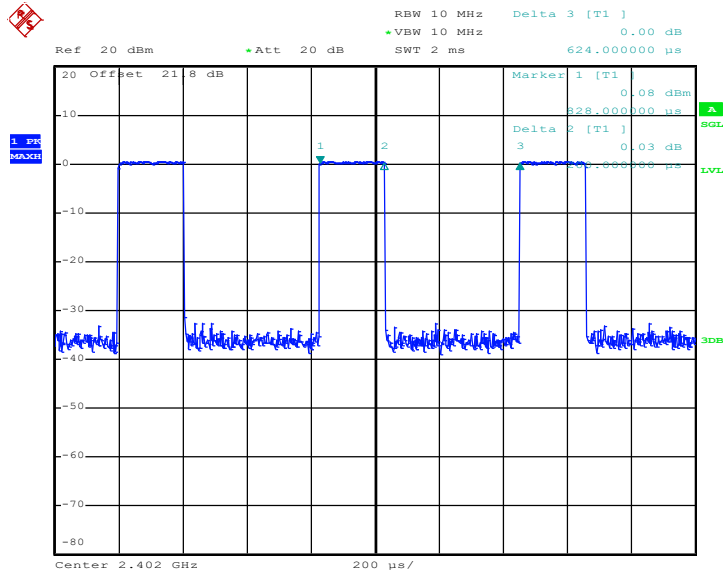

Date: 20.AUG.2019 16:47:04