



Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

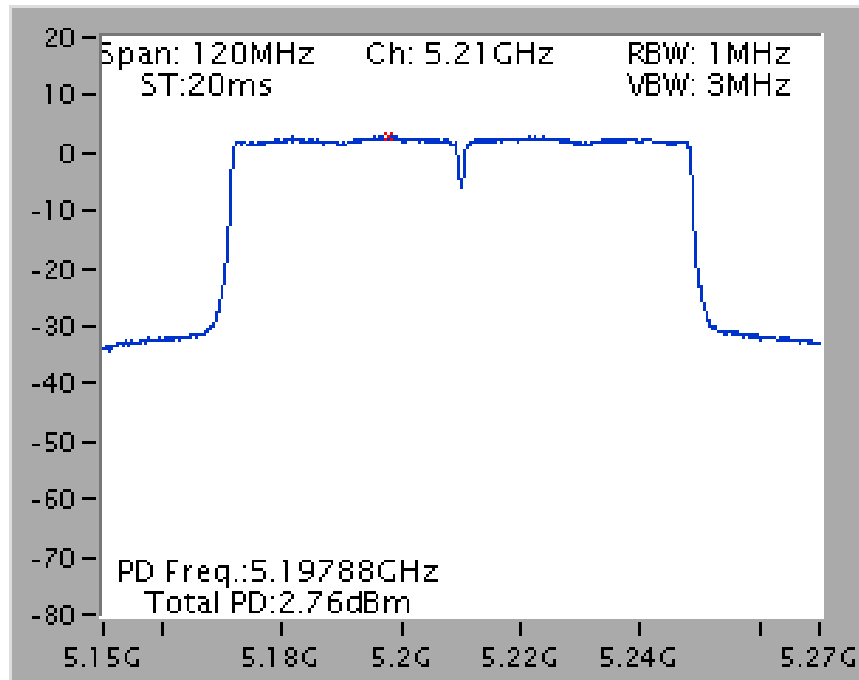


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

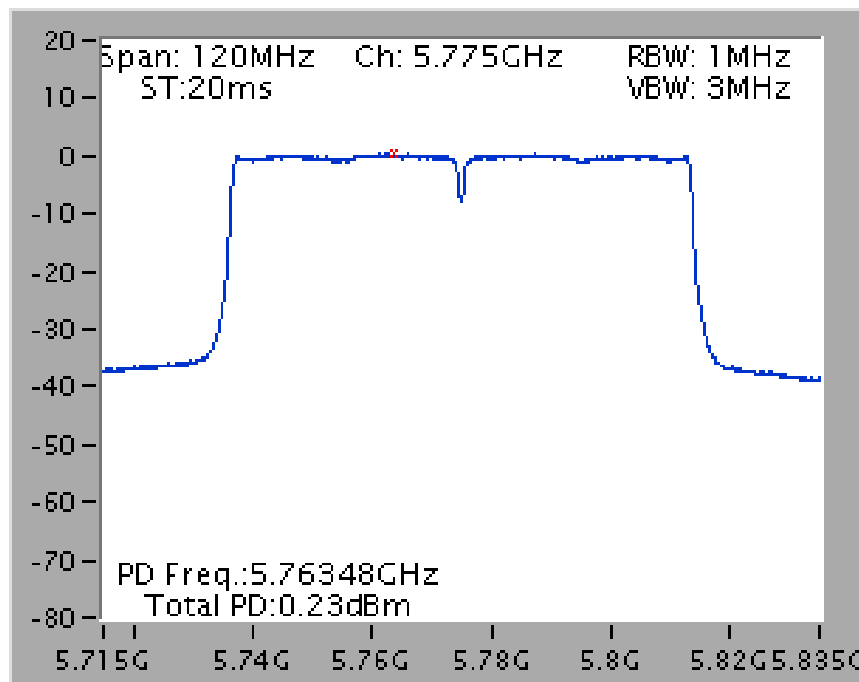


Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

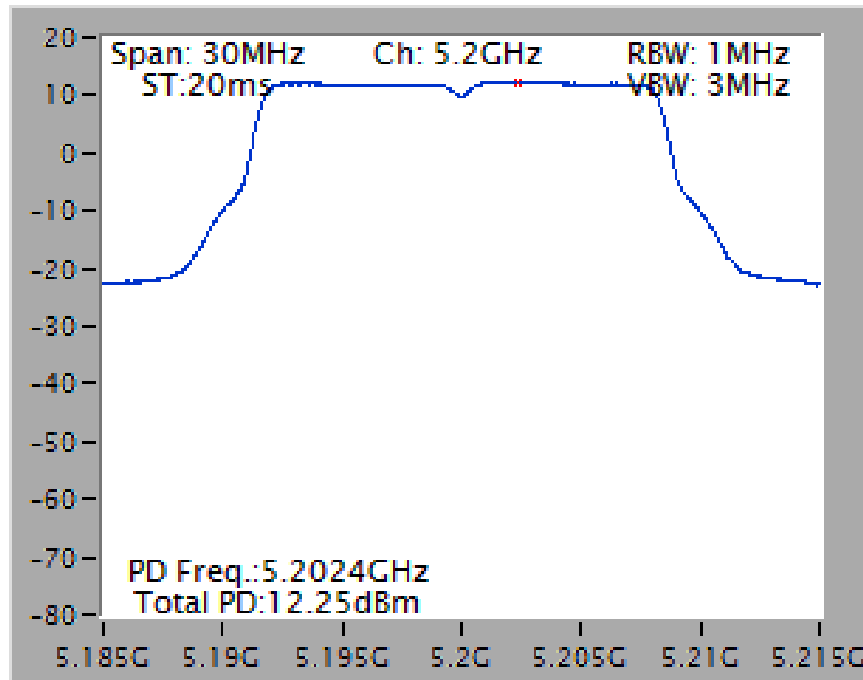


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5785 MHz

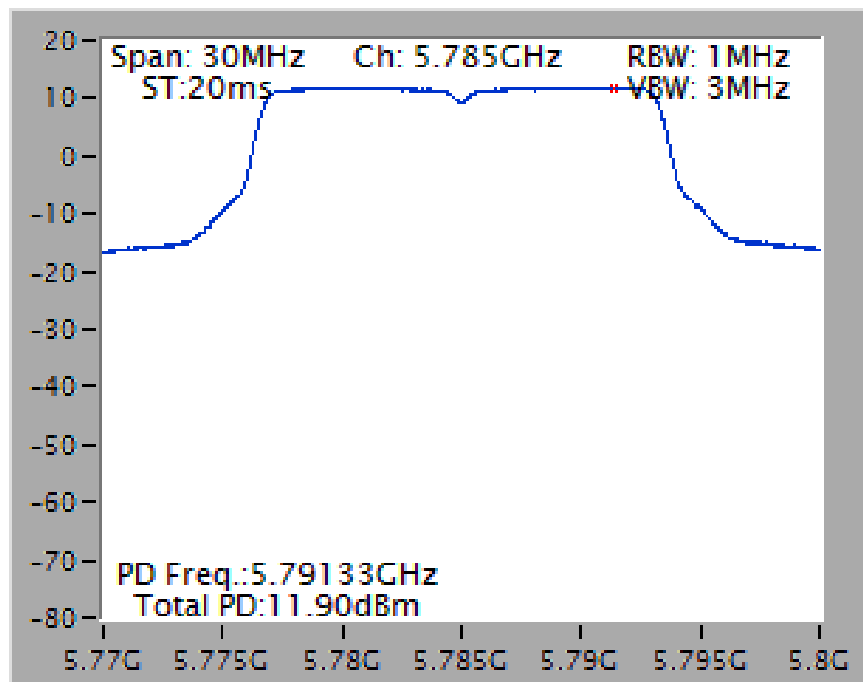


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5200 MHz

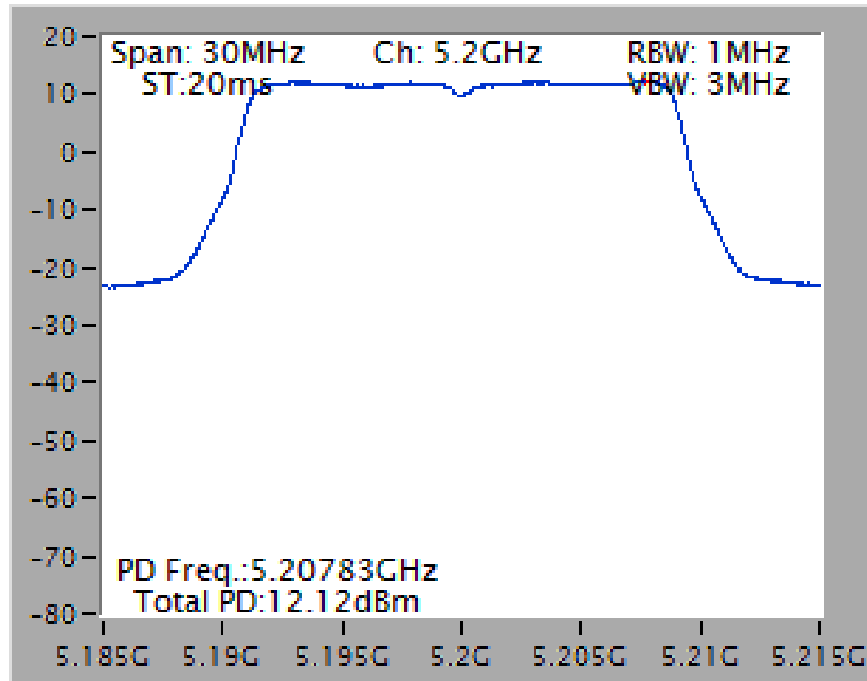


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

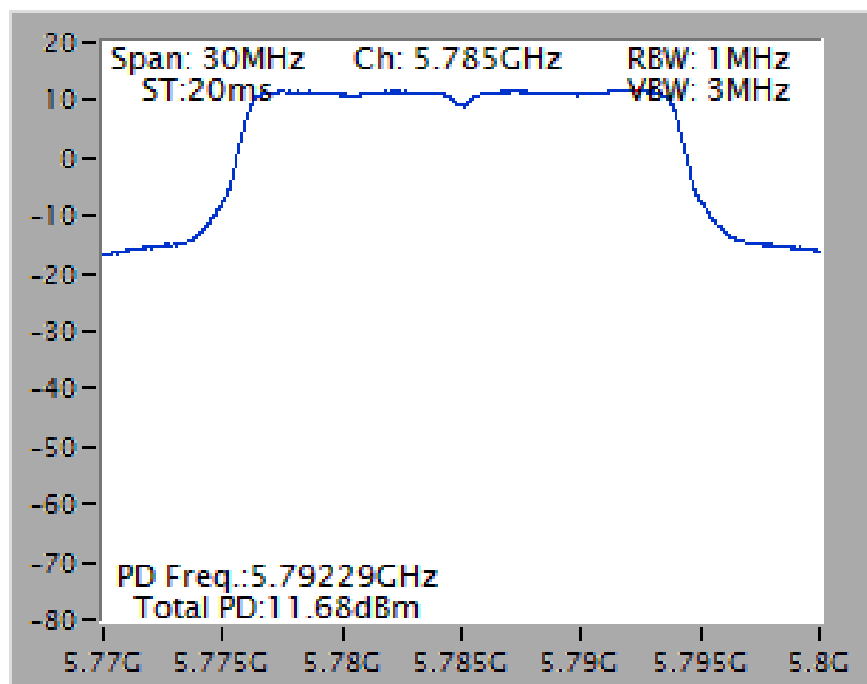


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

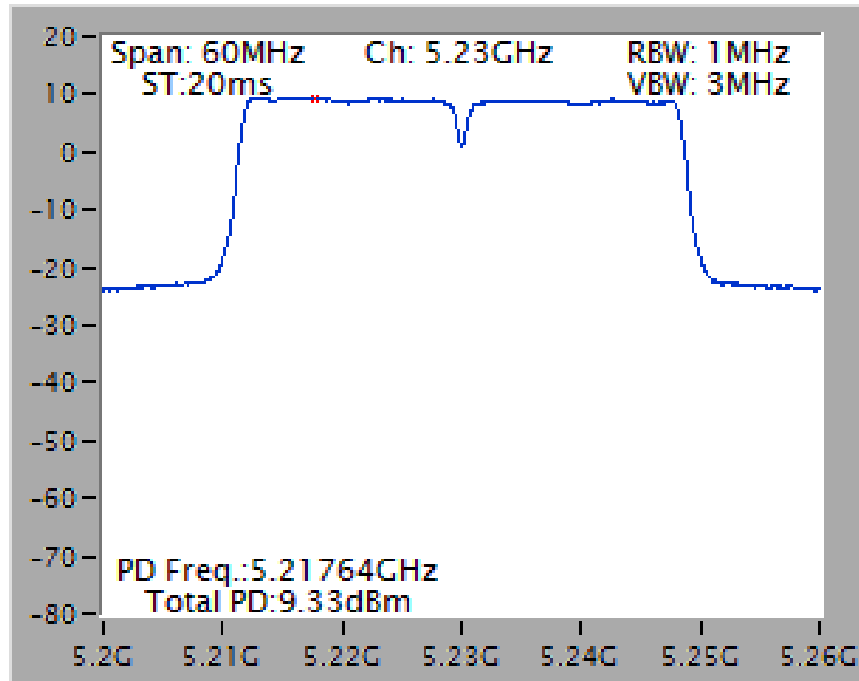


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

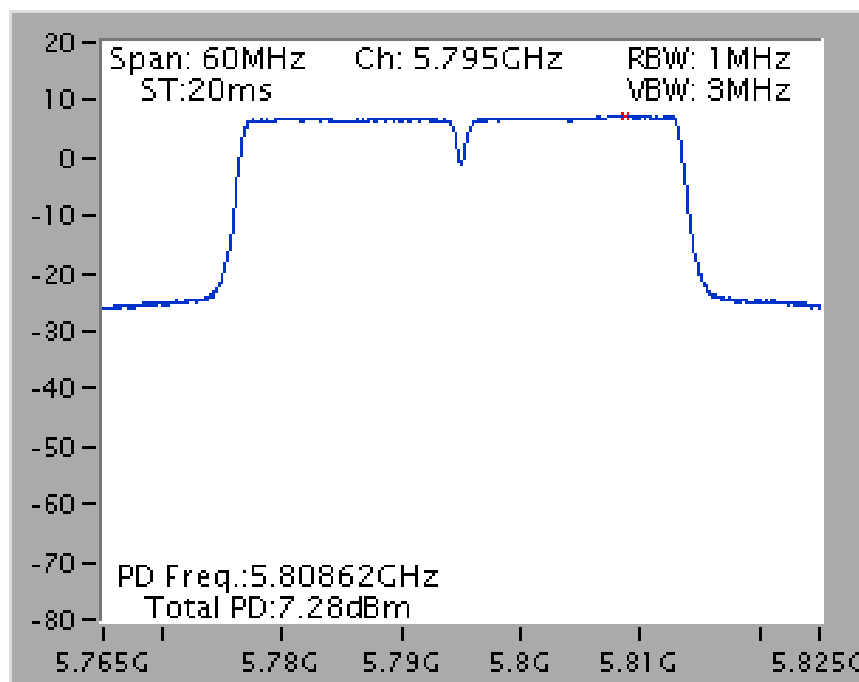

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

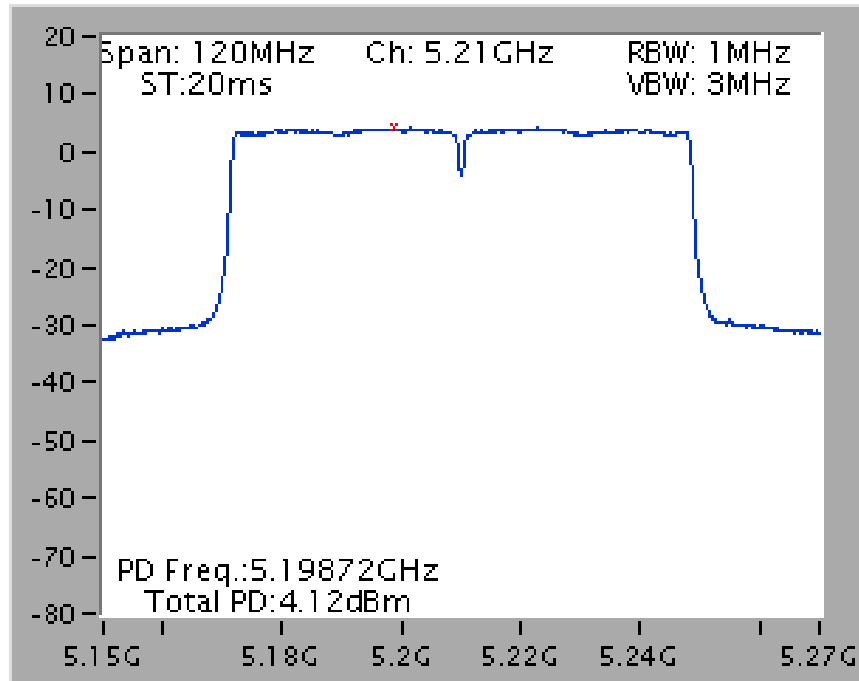


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

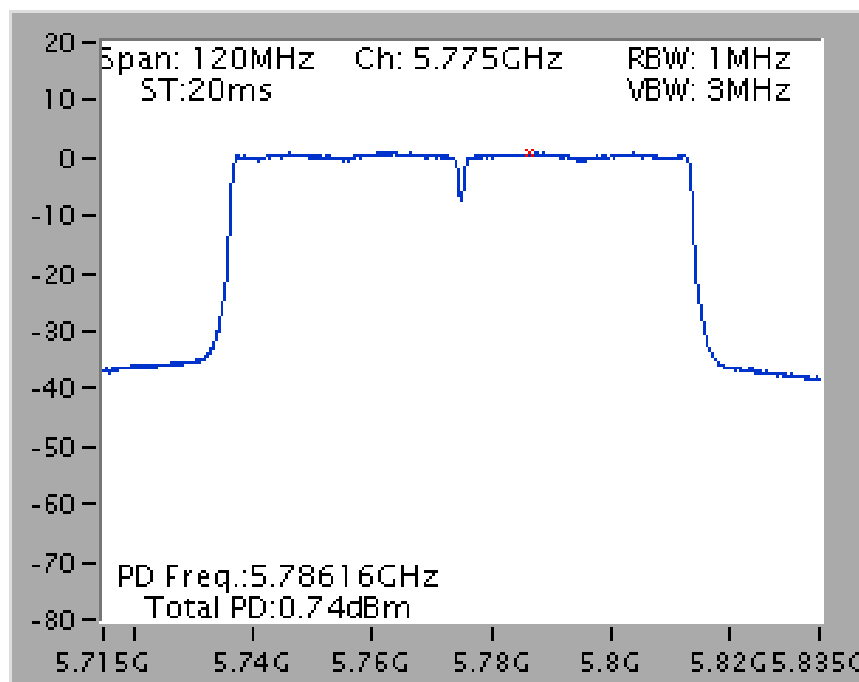


Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

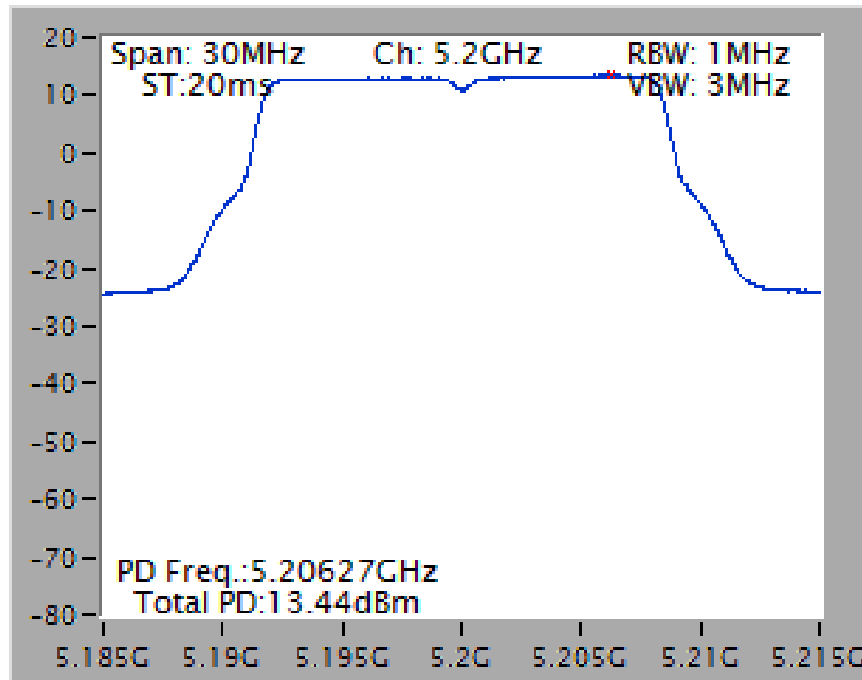


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

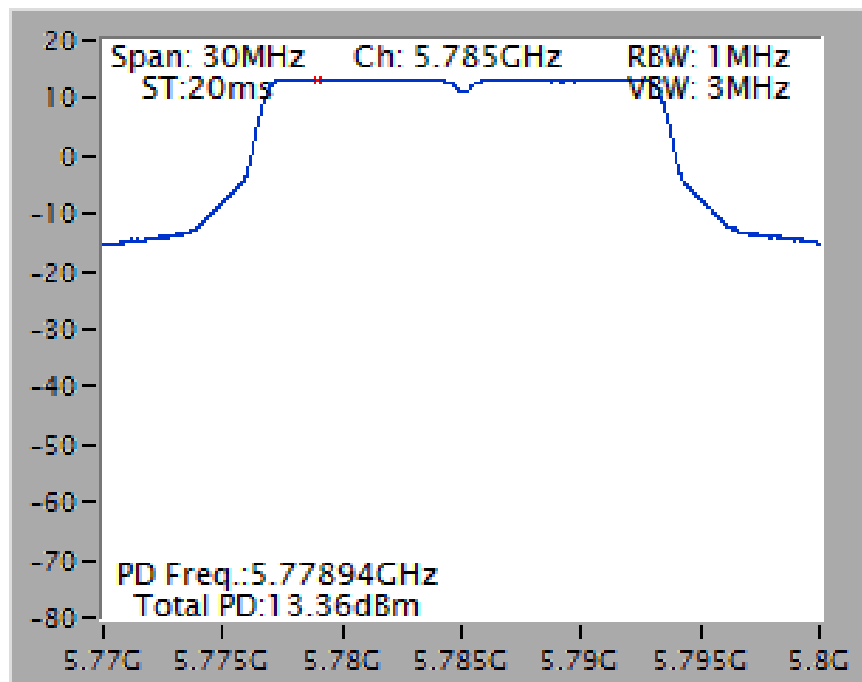


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

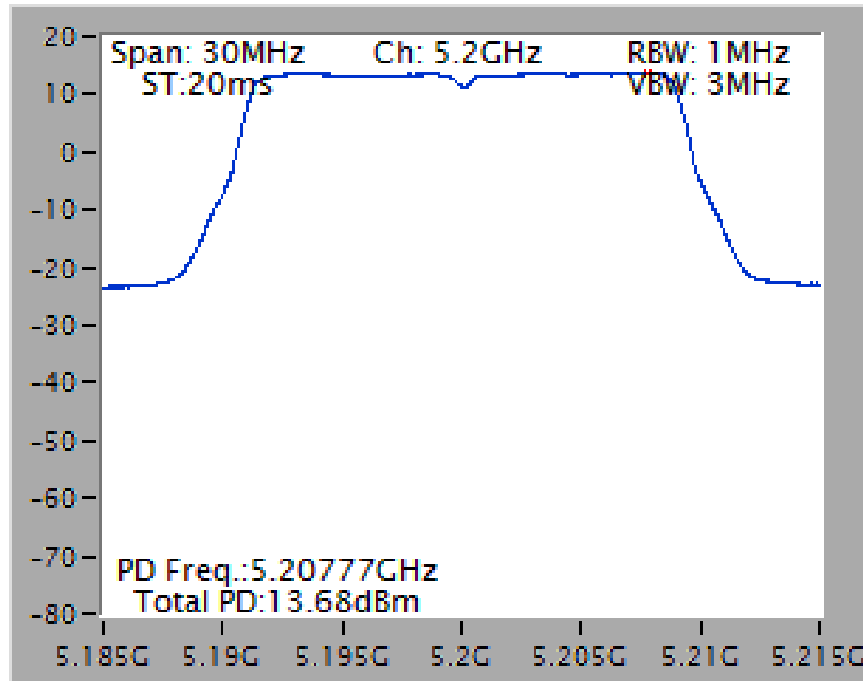


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

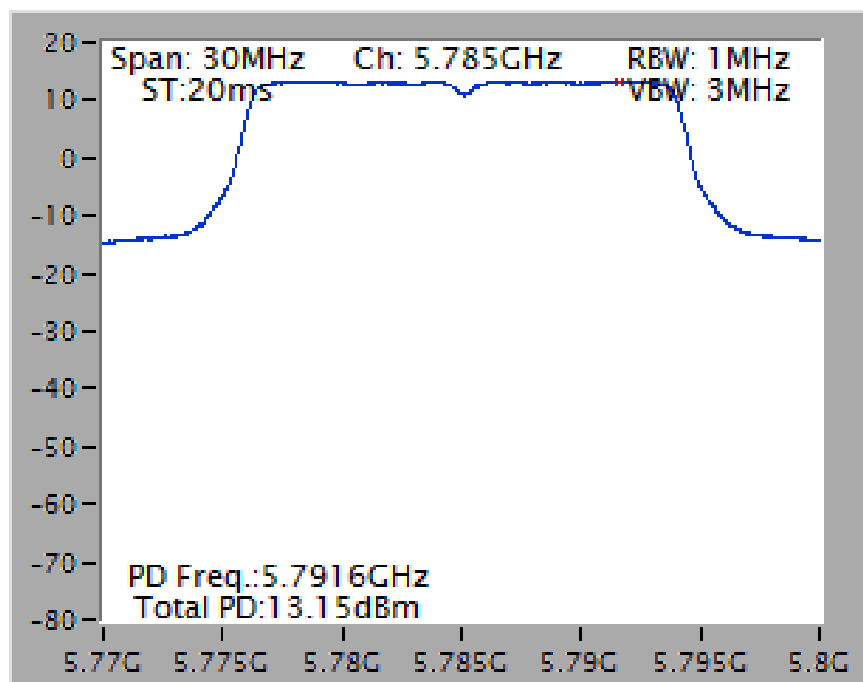


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

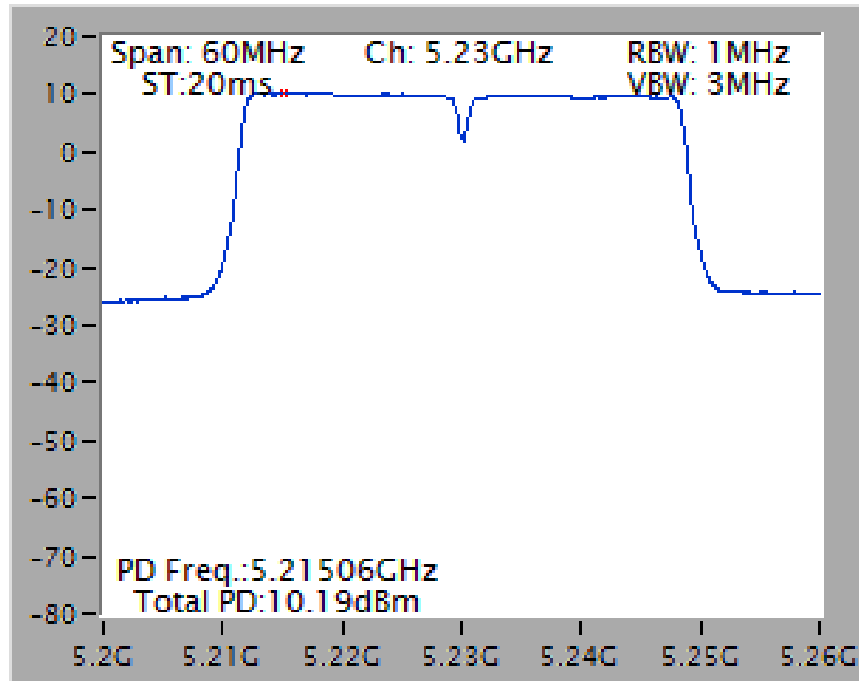


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

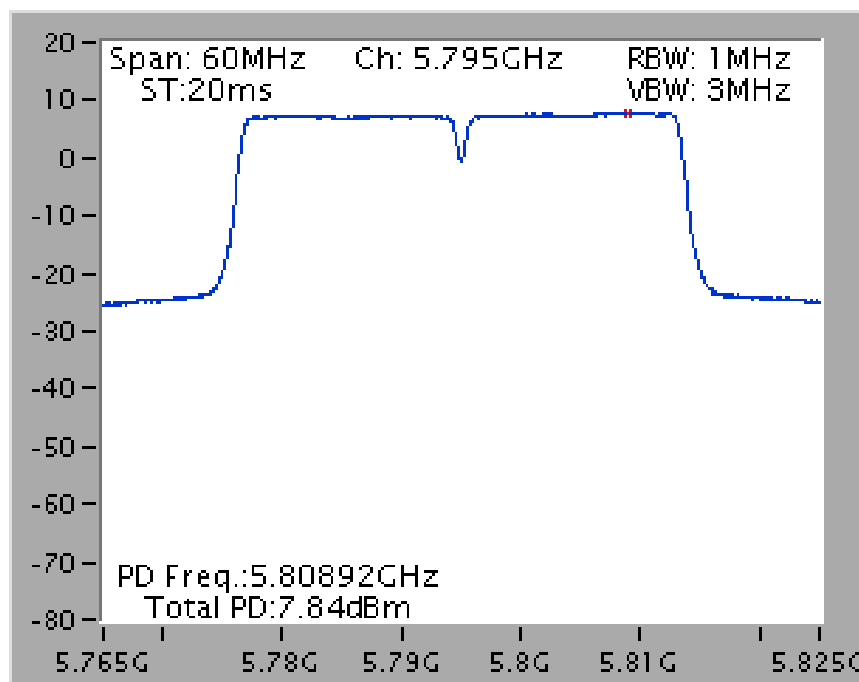

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

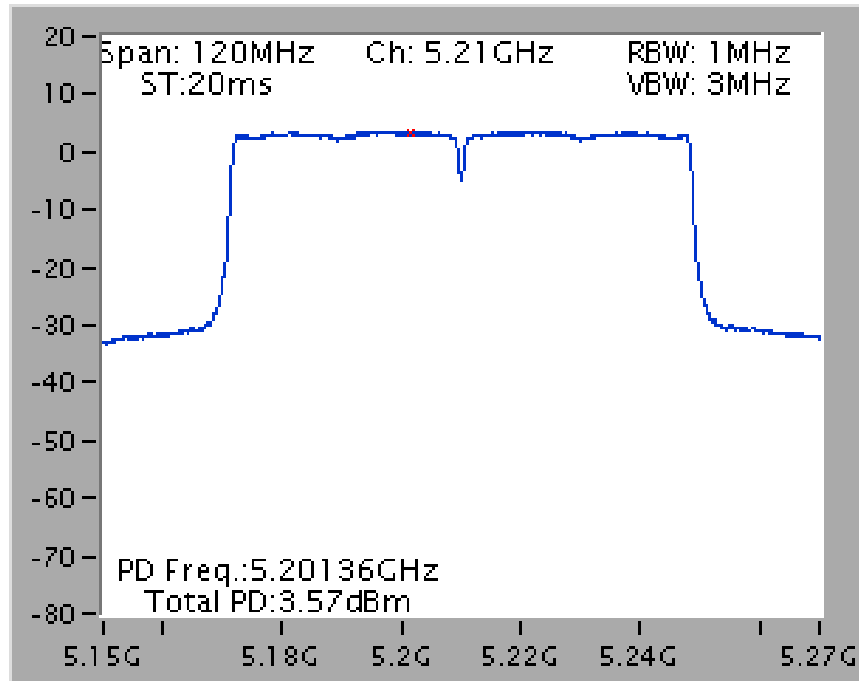


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

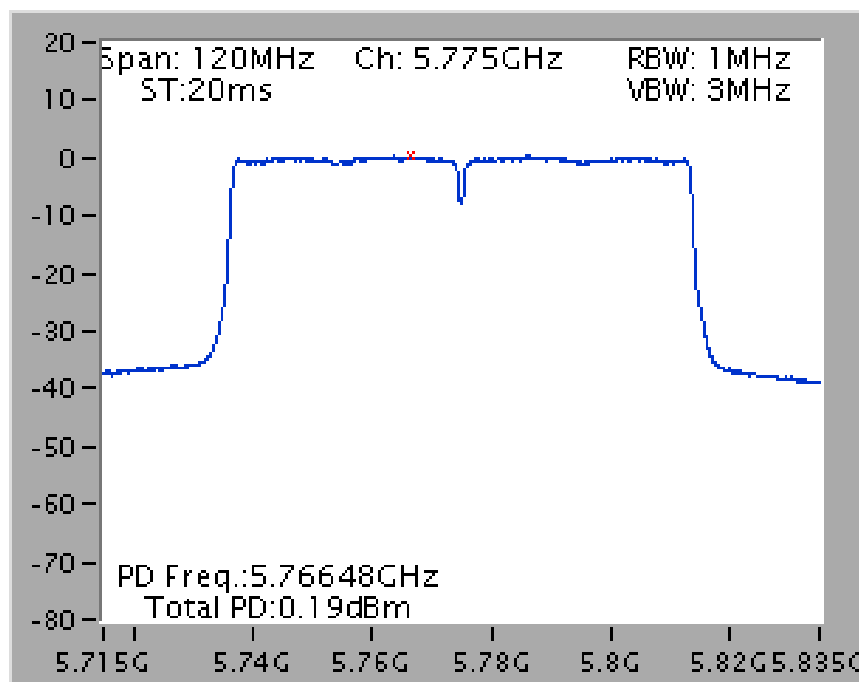


For indoor use

Mode 5 (Set 8 Patch antenna / 3.26dBi / 1TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5240 MHz

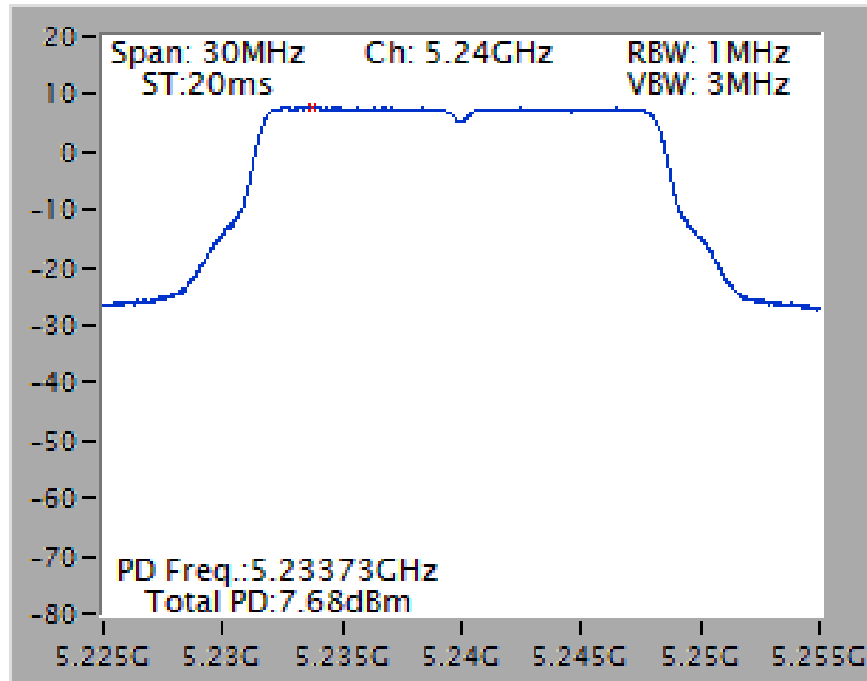


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5785 MHz

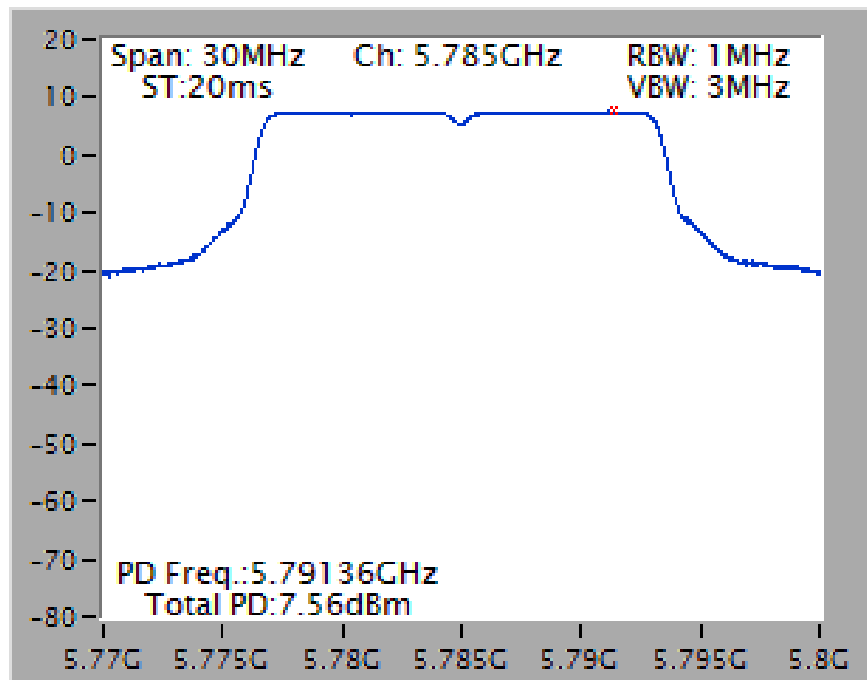


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5200 MHz

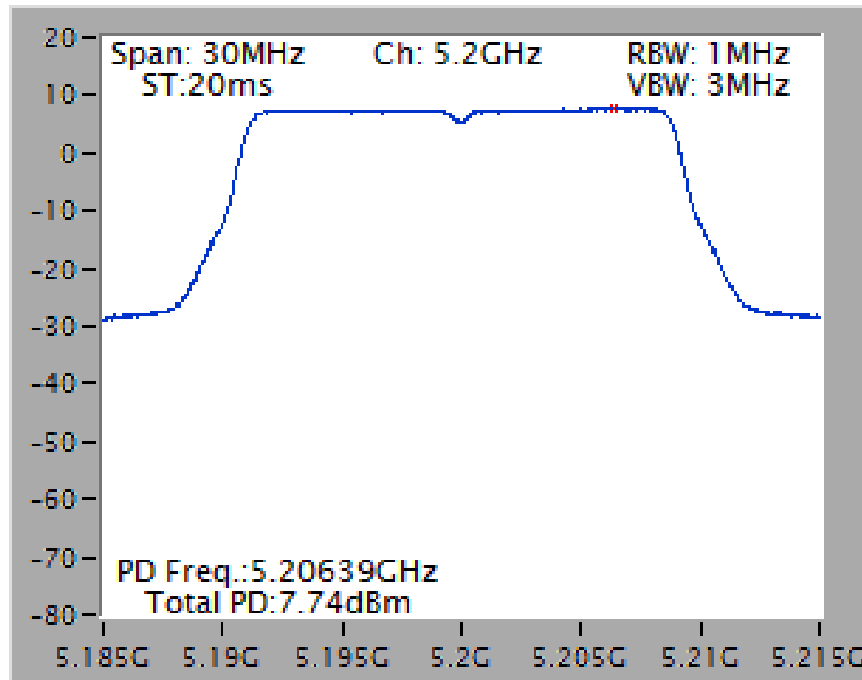


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5785 MHz

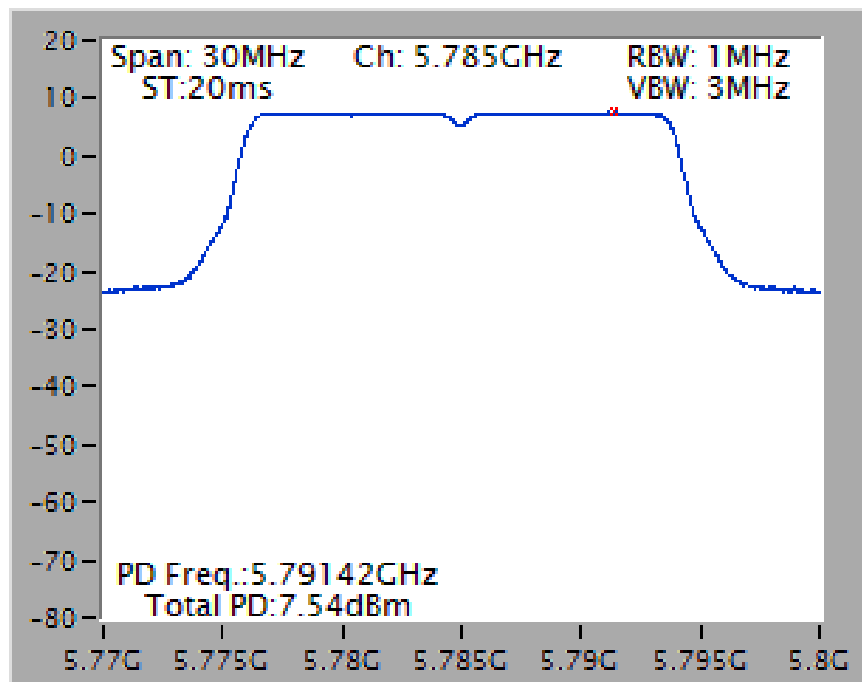


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5230 MHz

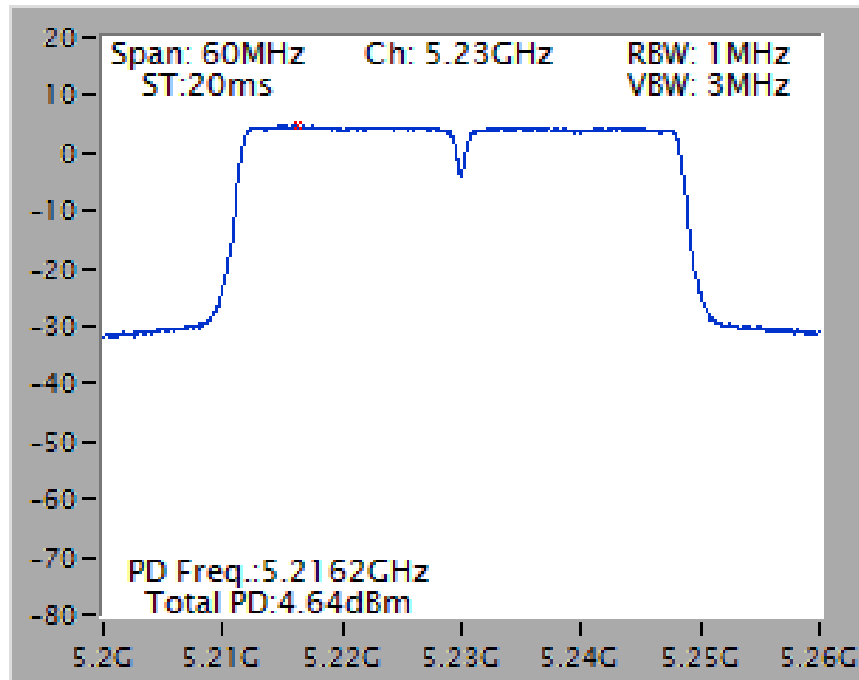


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5755 MHz

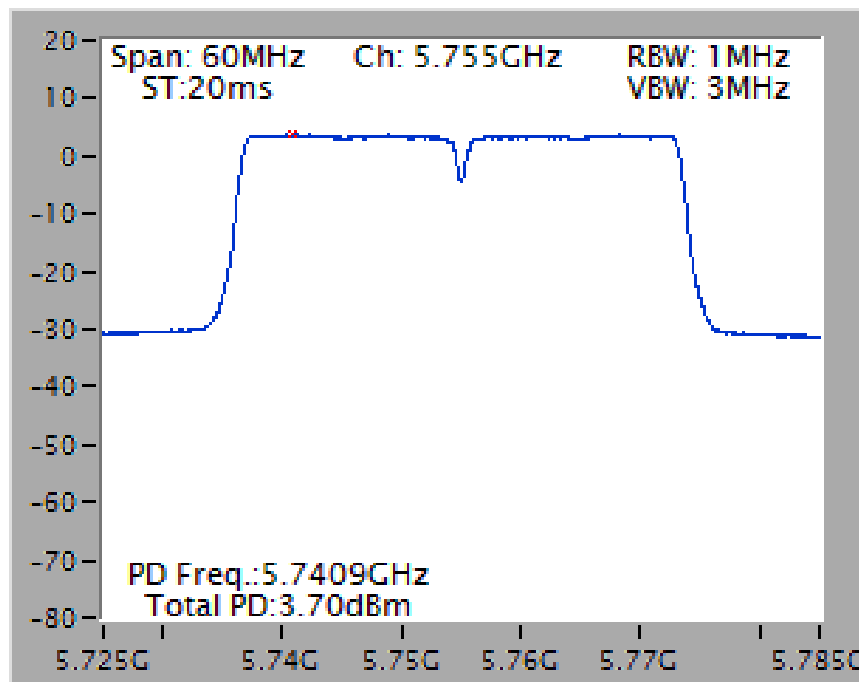

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5210 MHz

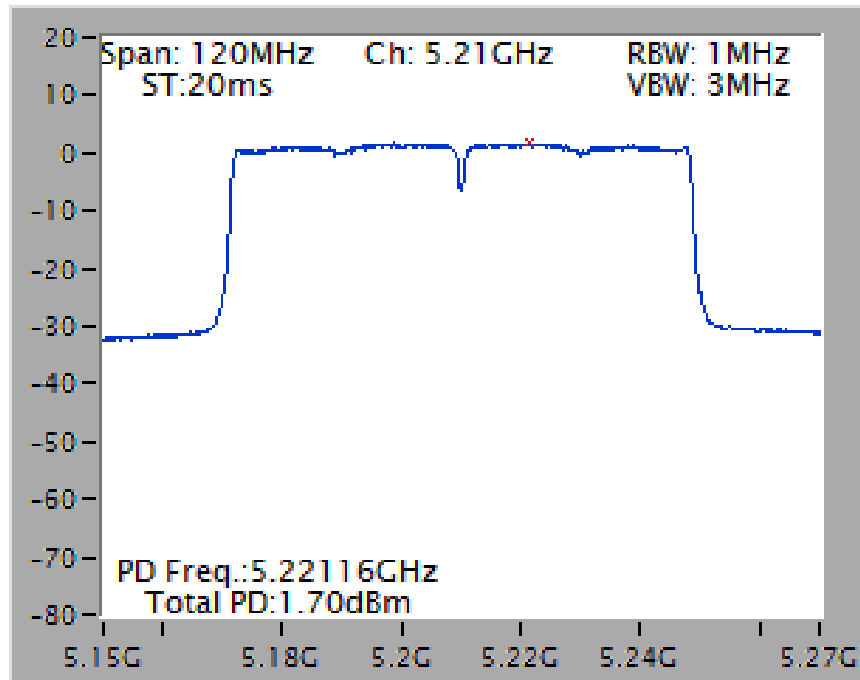


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5775 MHz

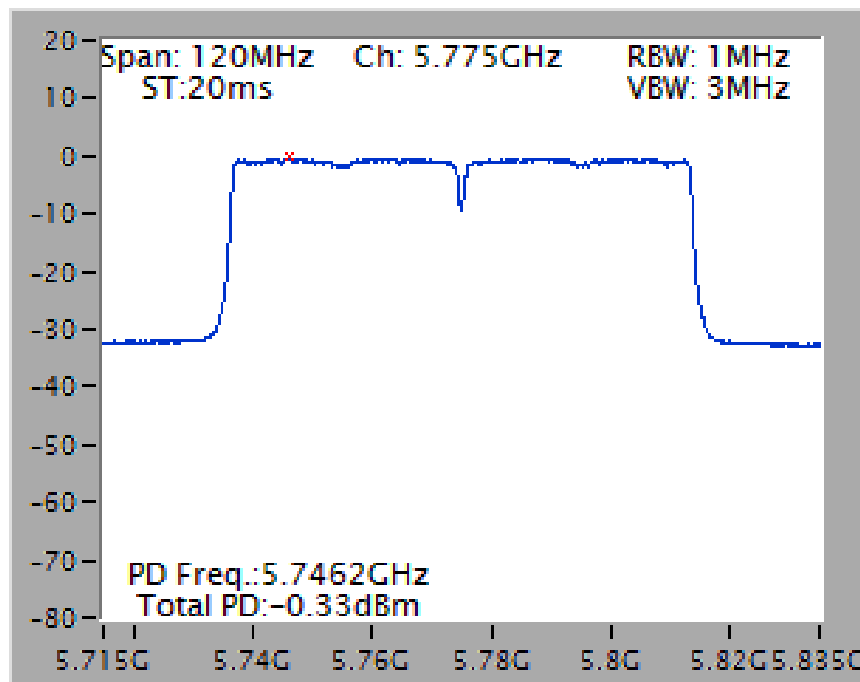


Mode 5 (Set 8 Patch antenna / 3.26dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5240 MHz

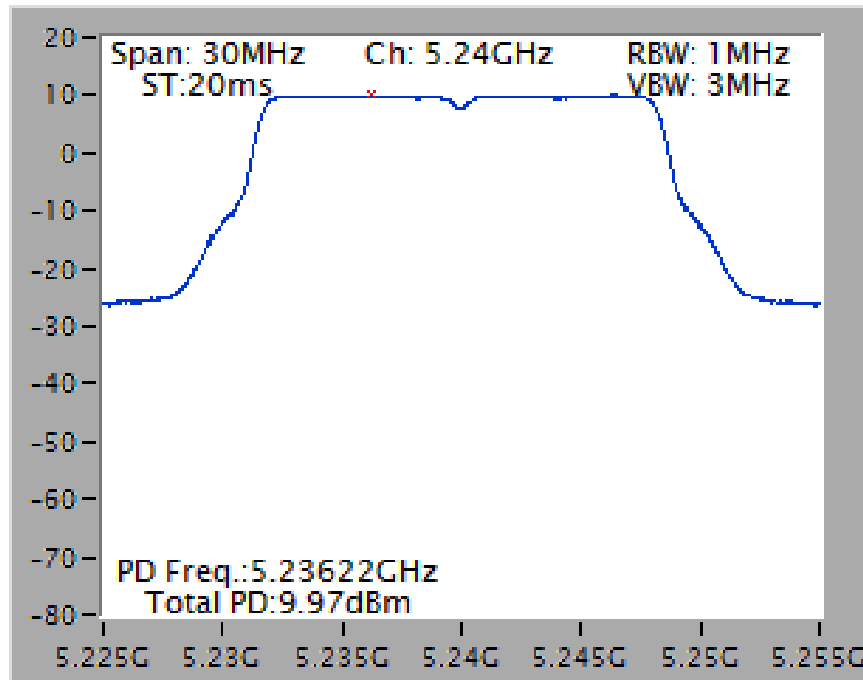


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

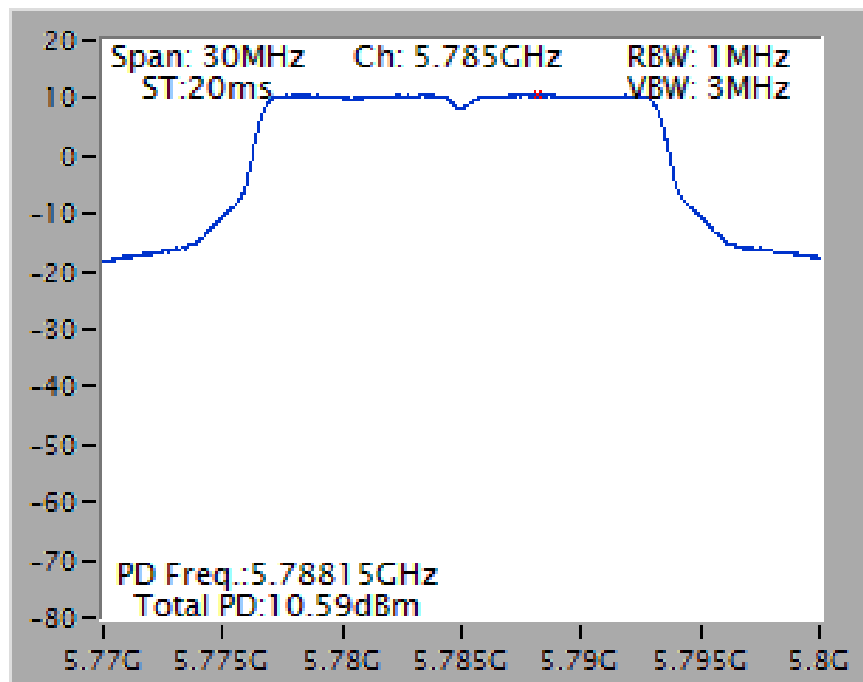


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

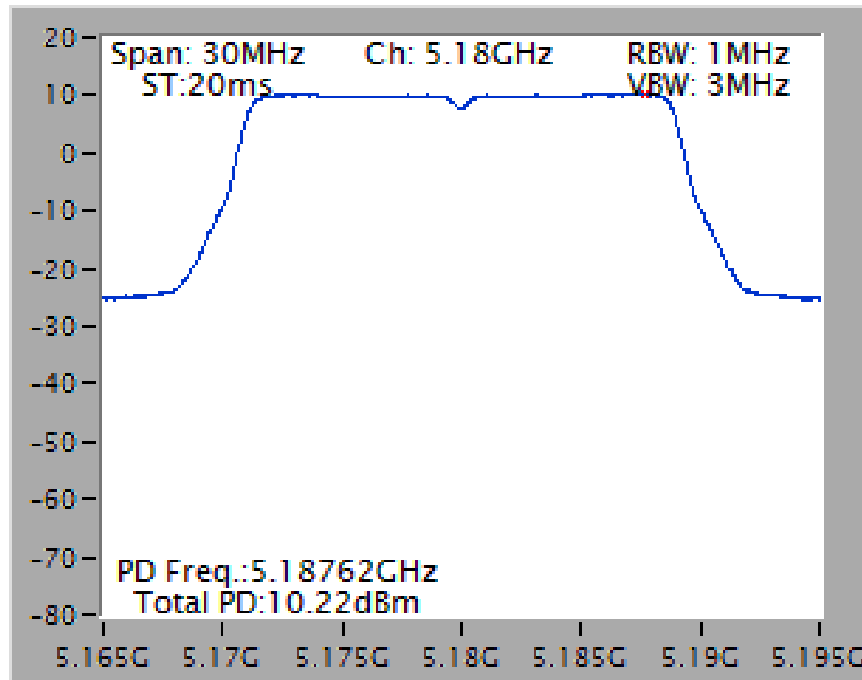


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

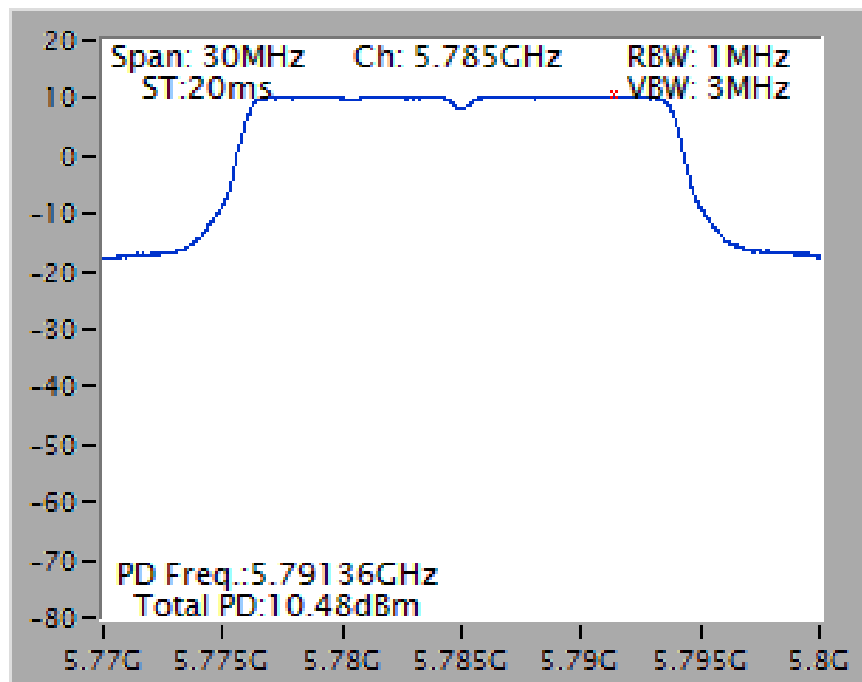


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

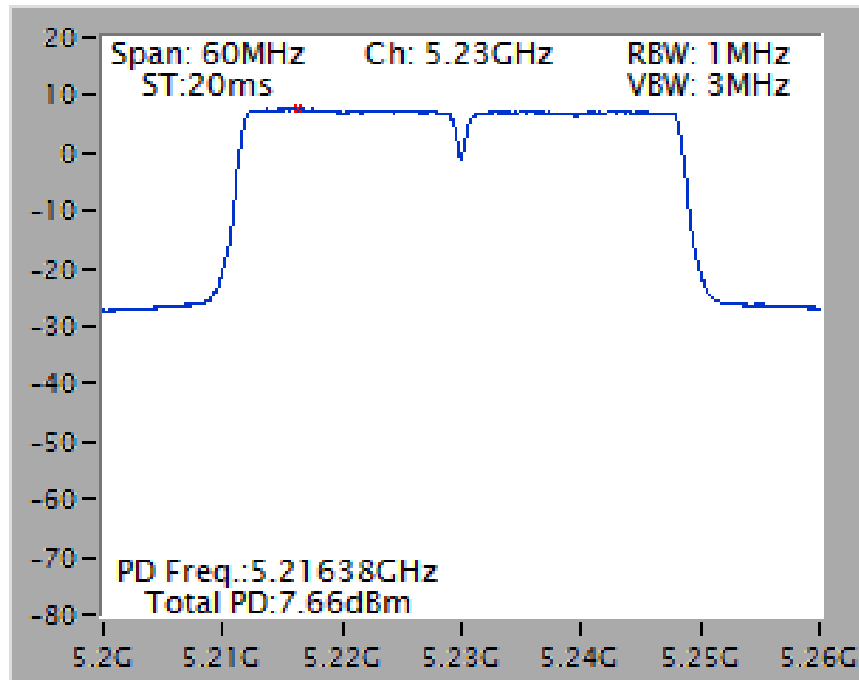


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

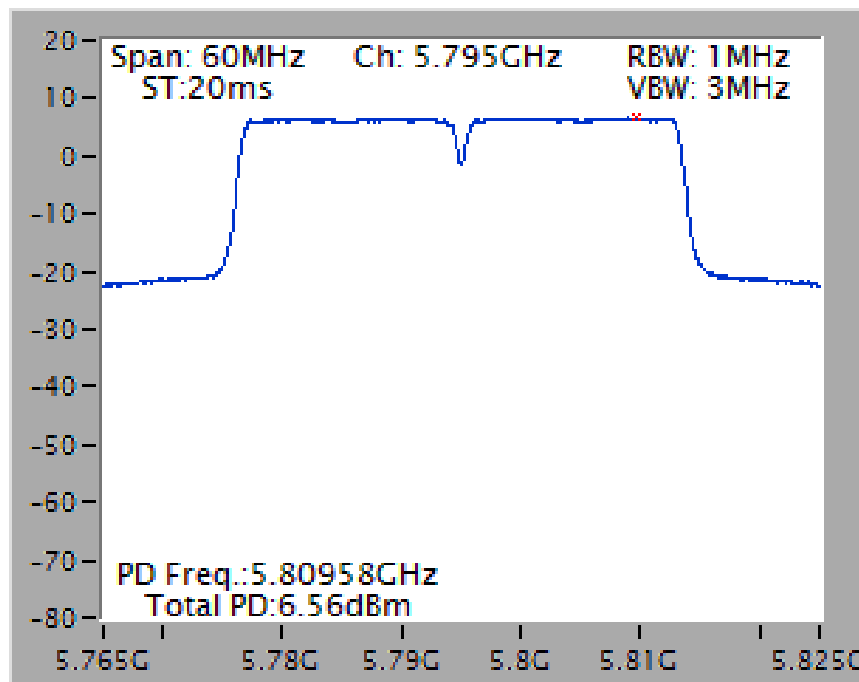

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

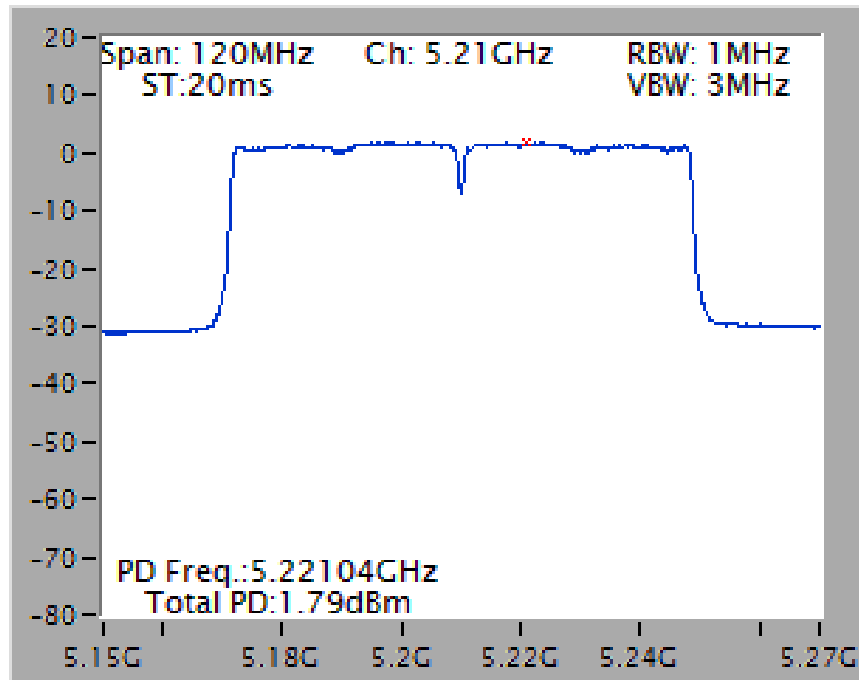


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

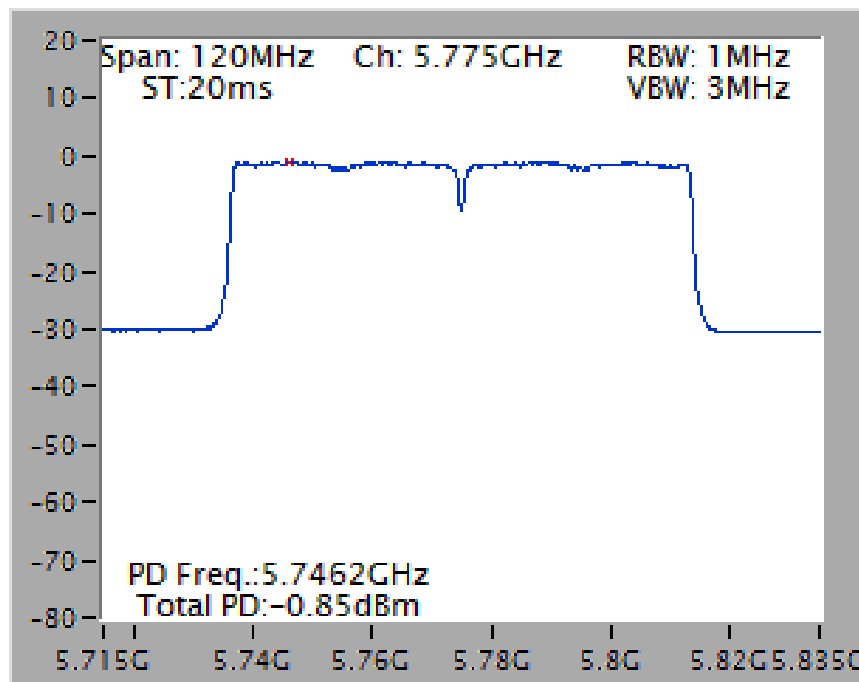


Mode 5 (Set 8 Patch antenna / 3.26dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

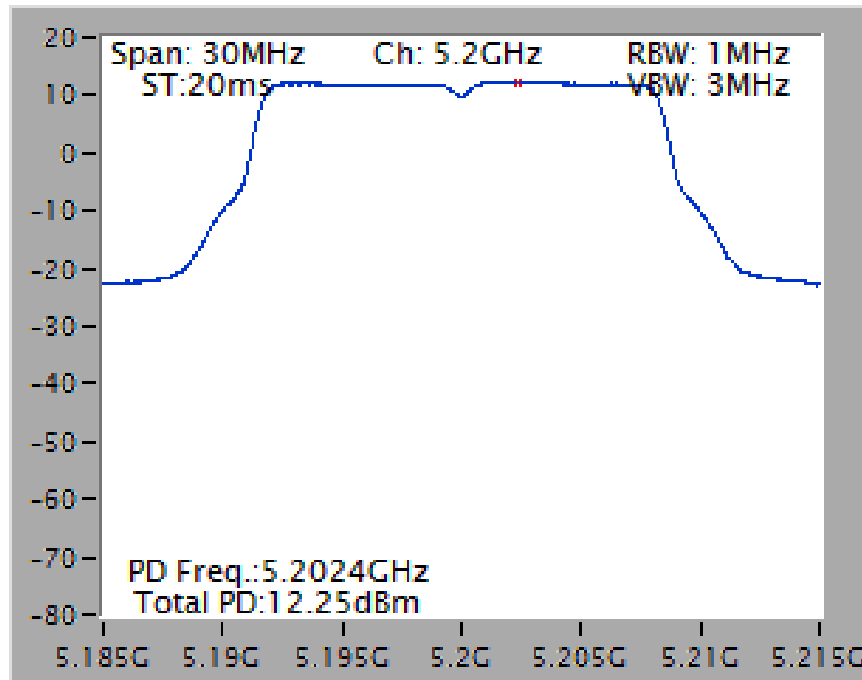


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5785 MHz

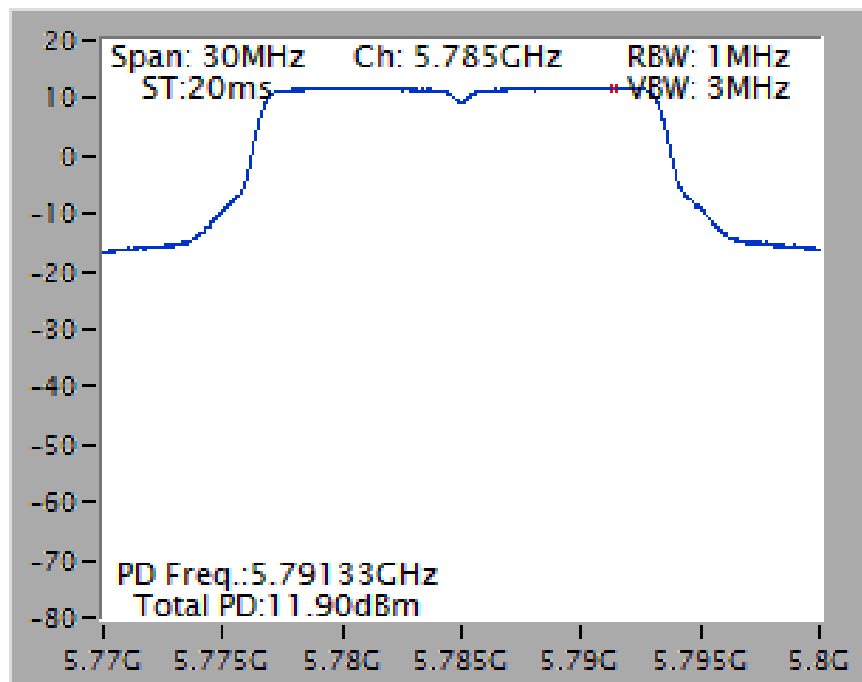


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

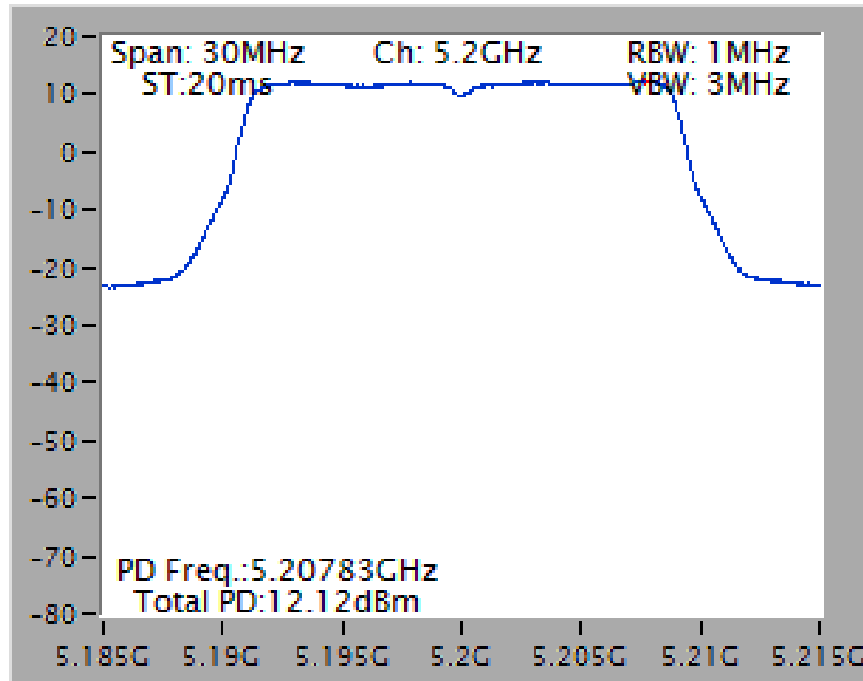


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 / 5785 MHz

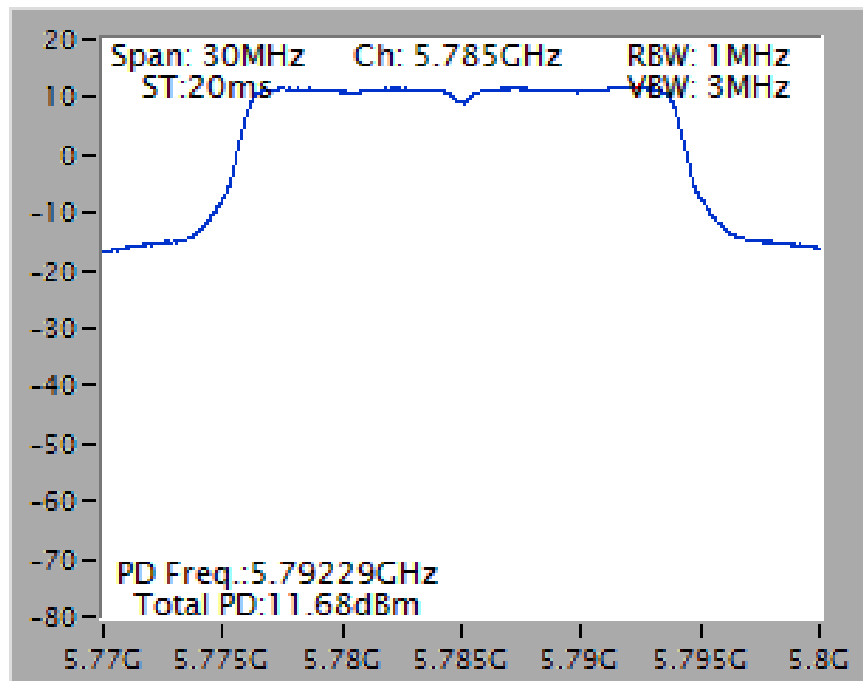


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

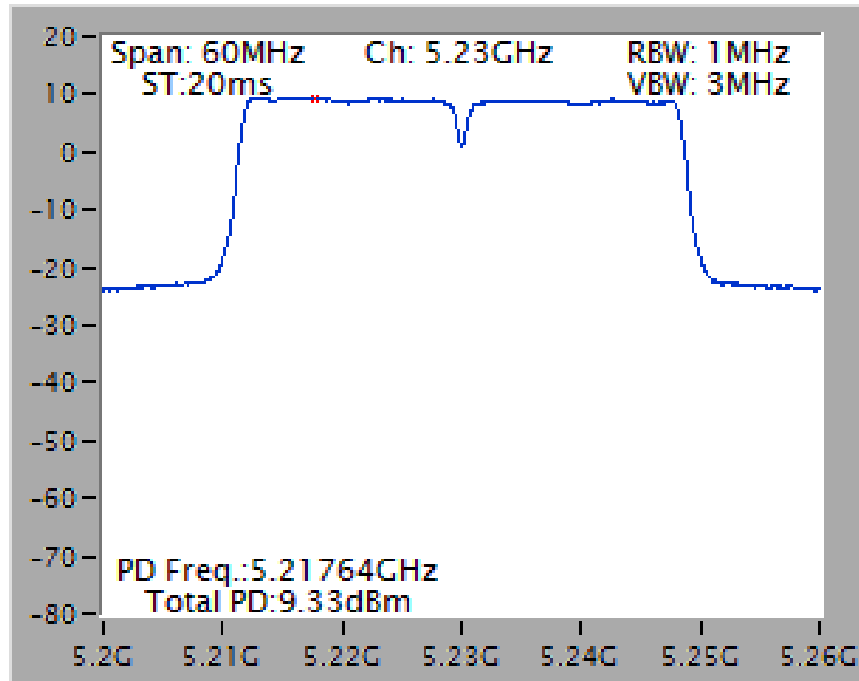


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

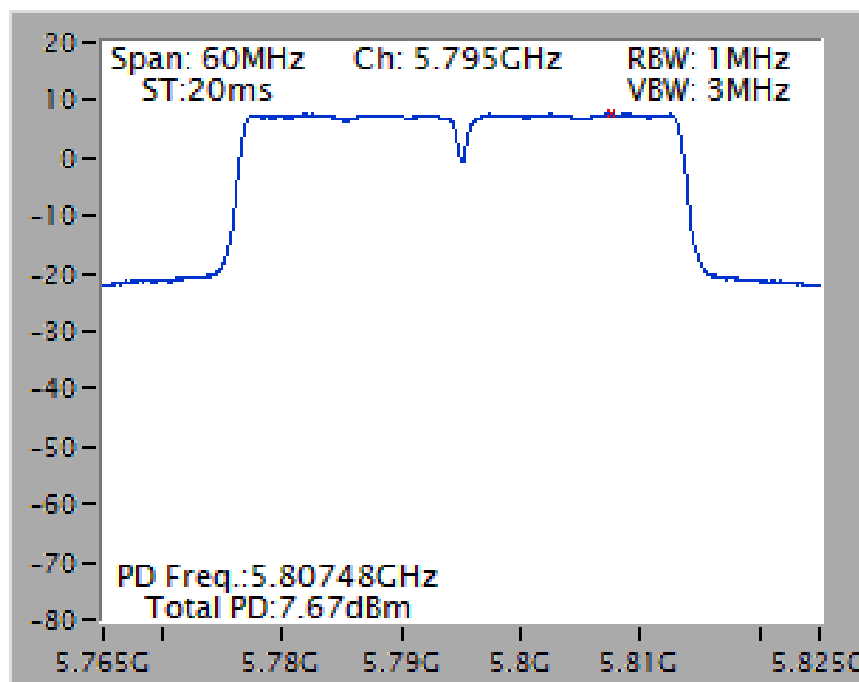

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

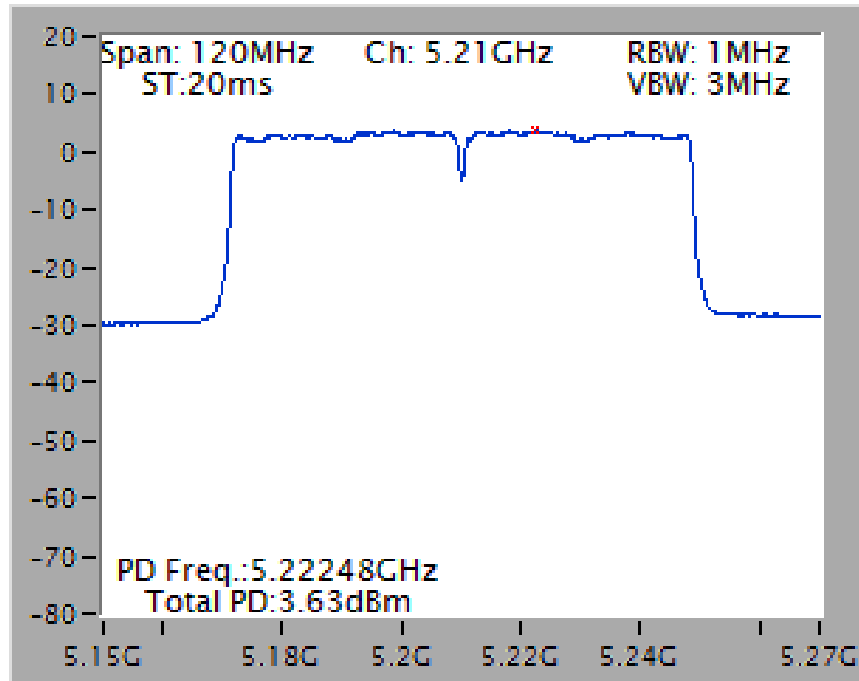


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

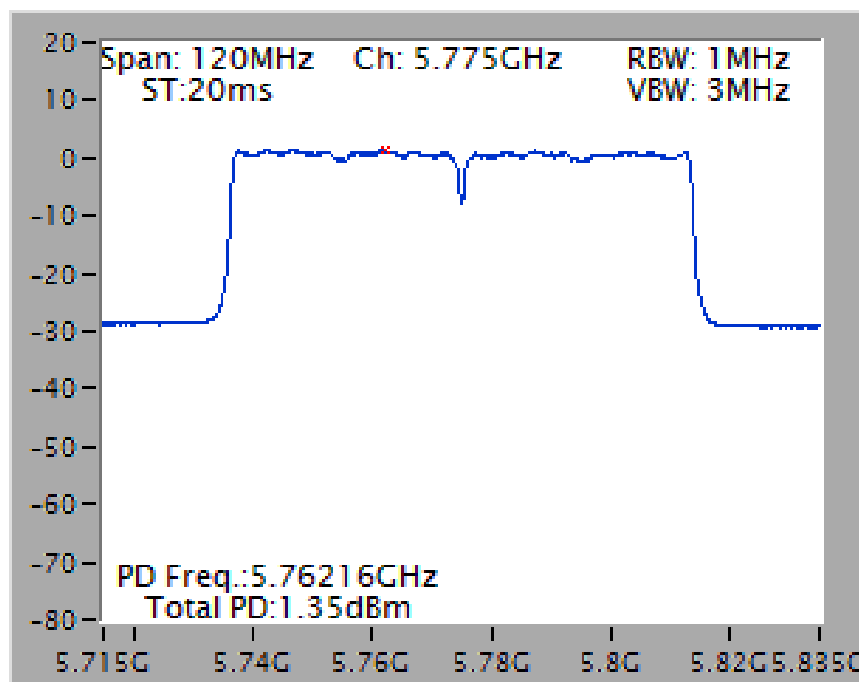


Mode 5 (Set 8 Patch antenna / 3.26dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

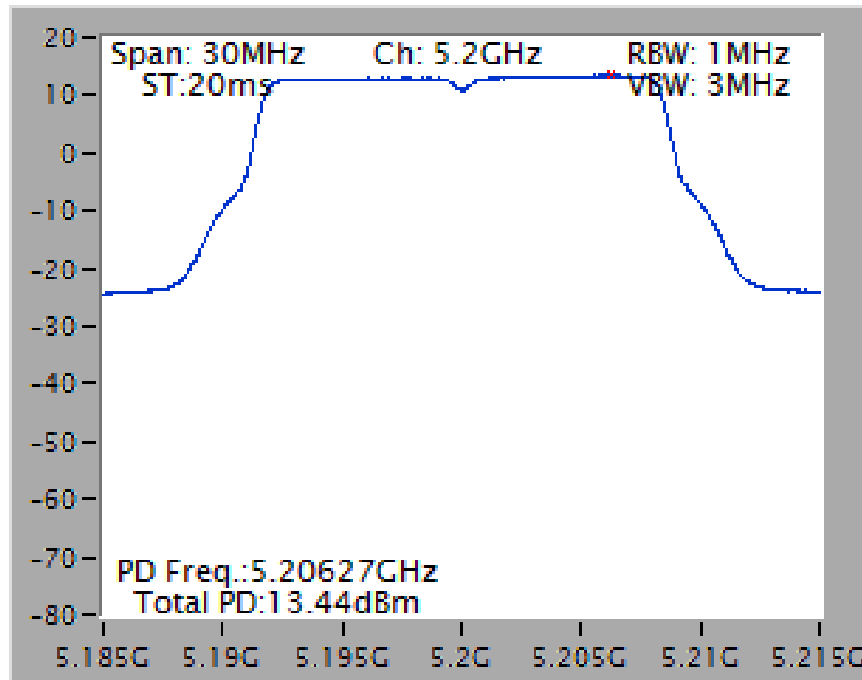


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

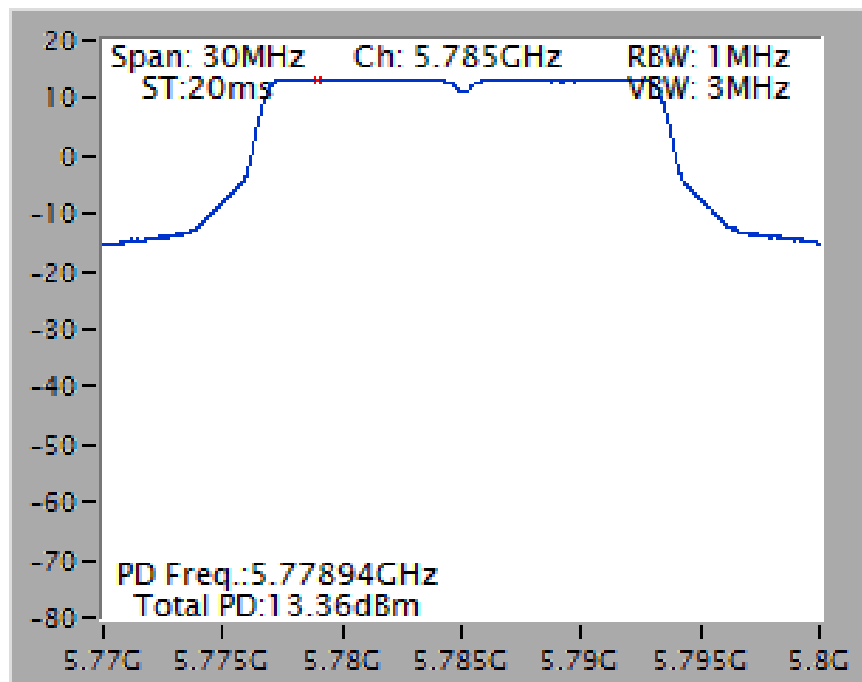


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

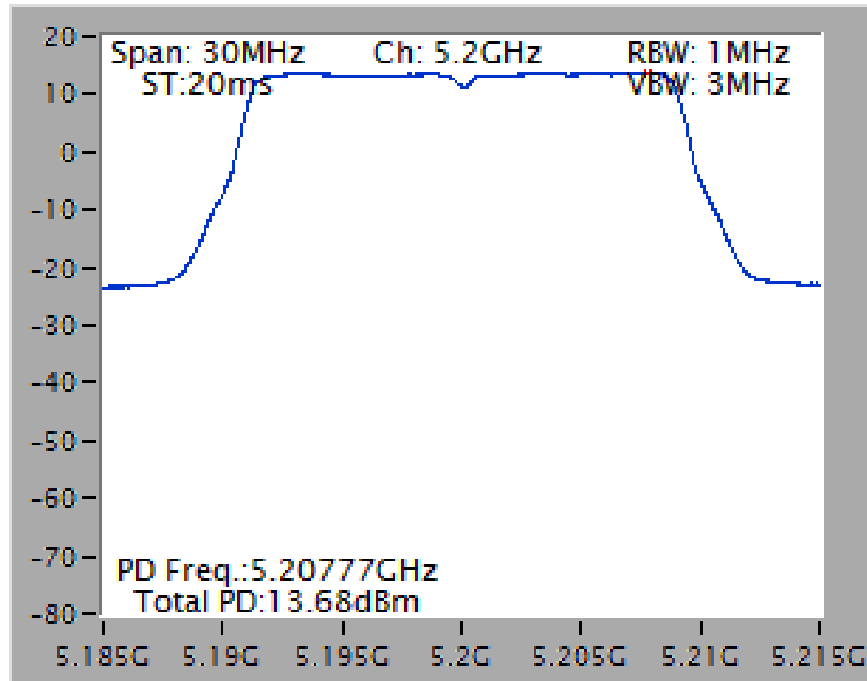


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

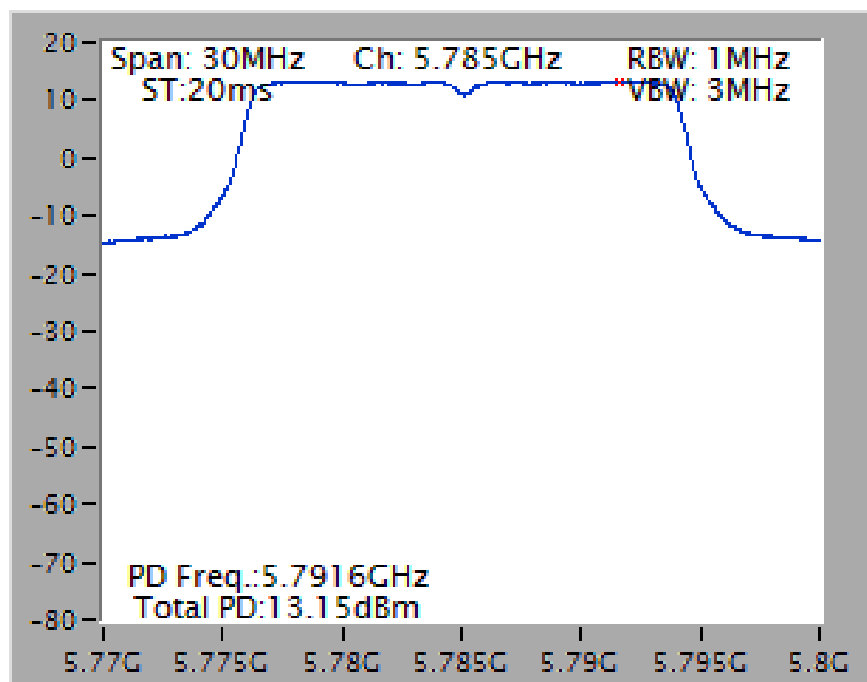


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

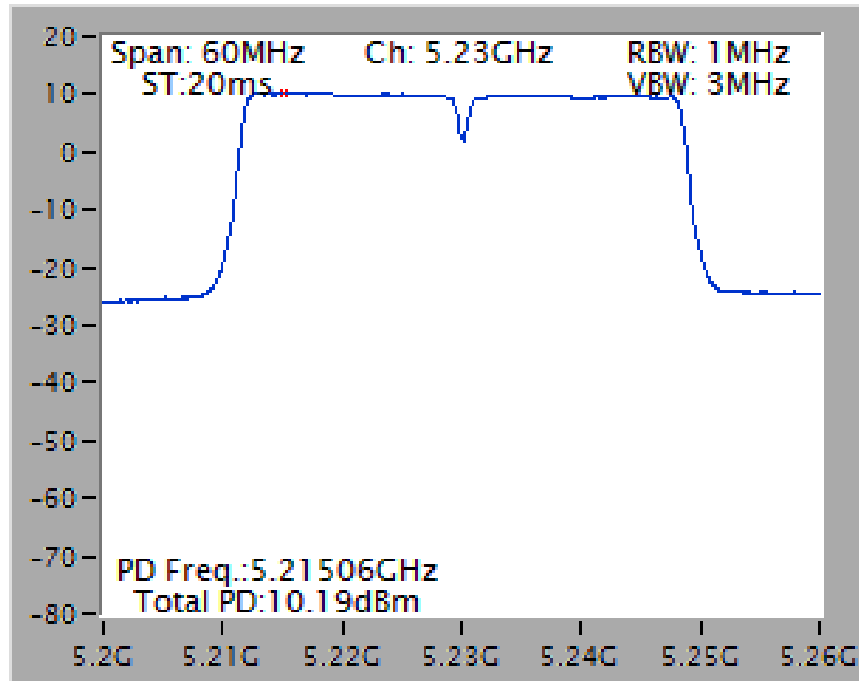


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

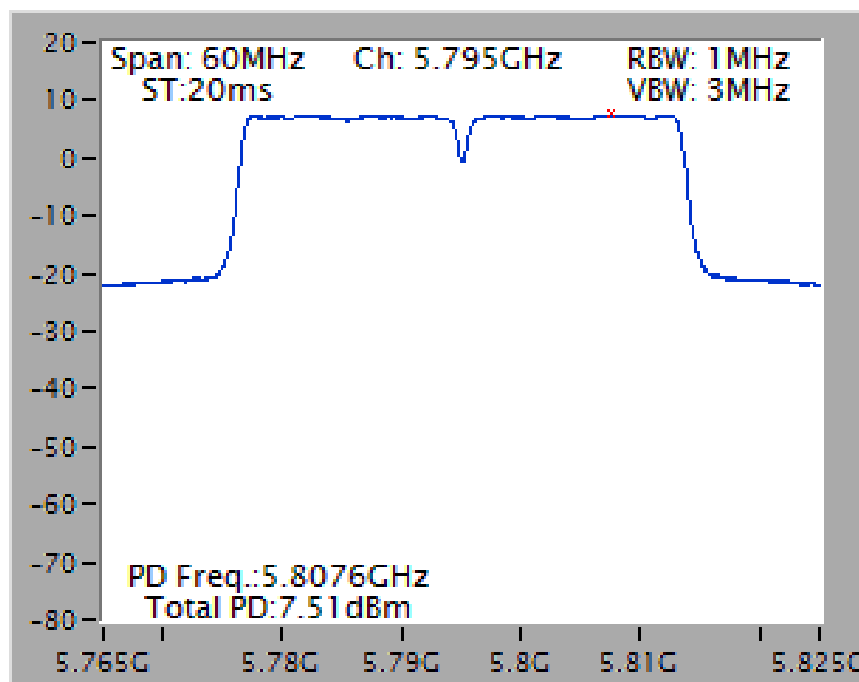

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

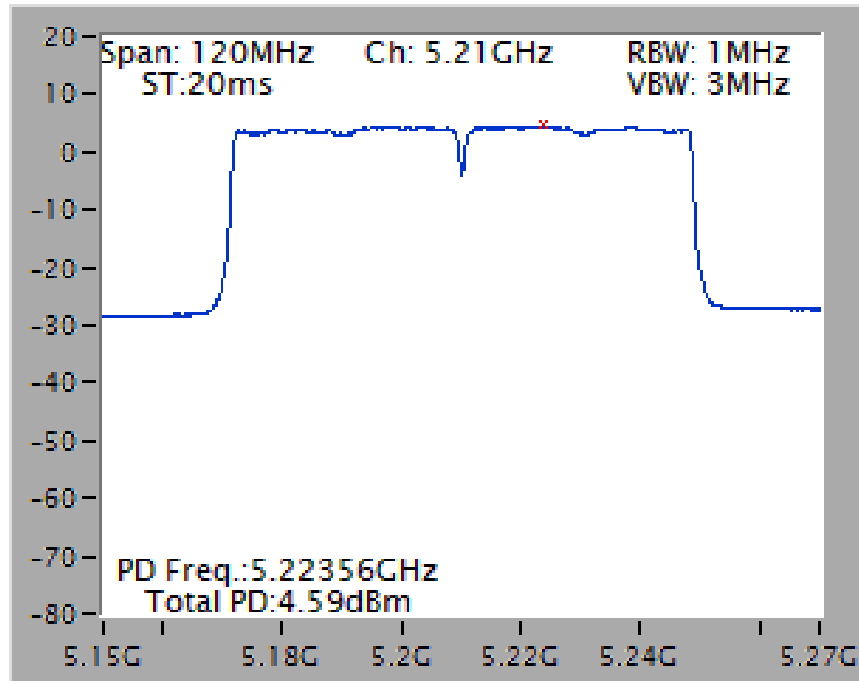


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

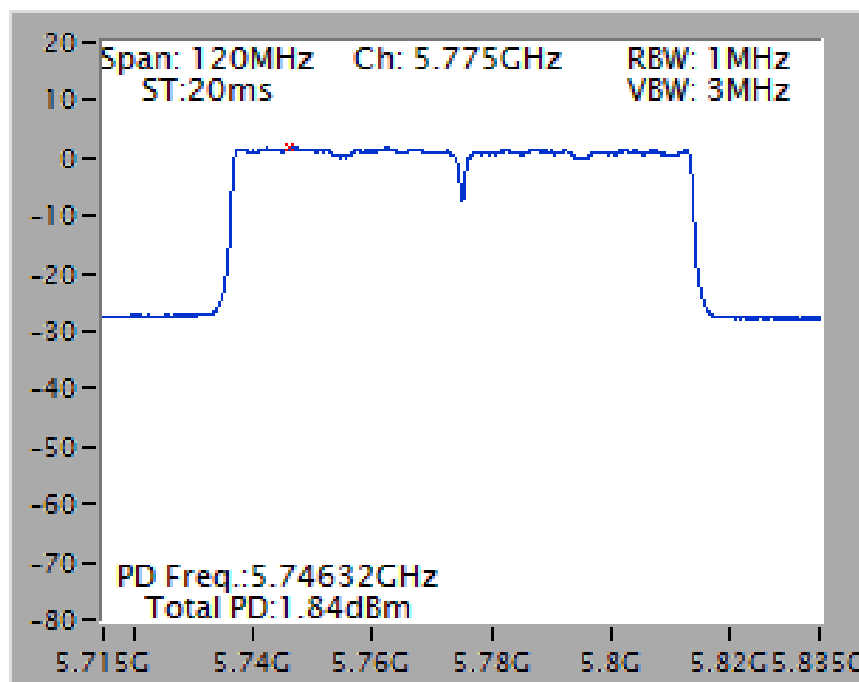


For indoor / outdoor use

Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi / 1TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5240 MHz

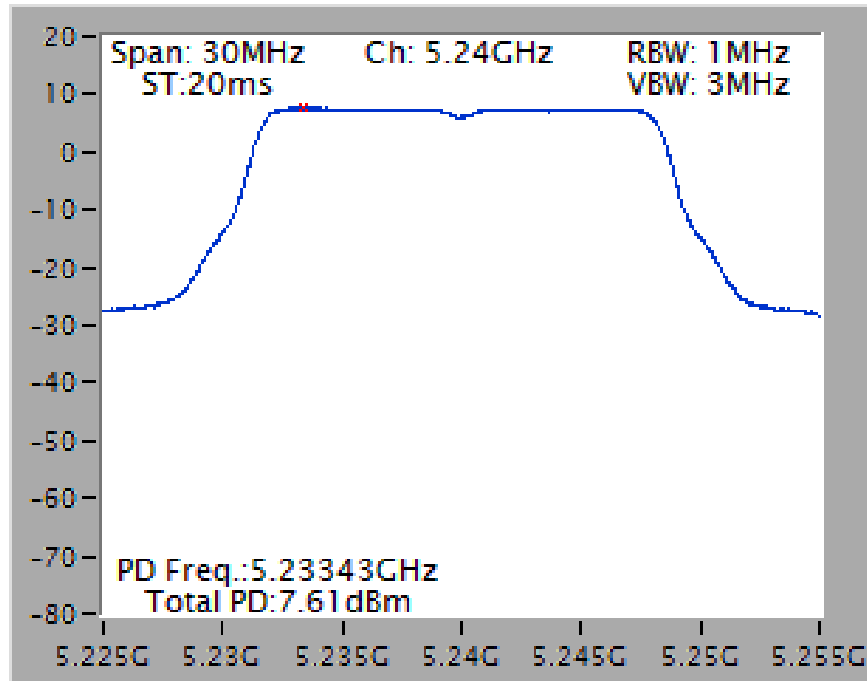


Power Density Plot on Configuration IEEE 802.11a / Chain 1 / 5785 MHz

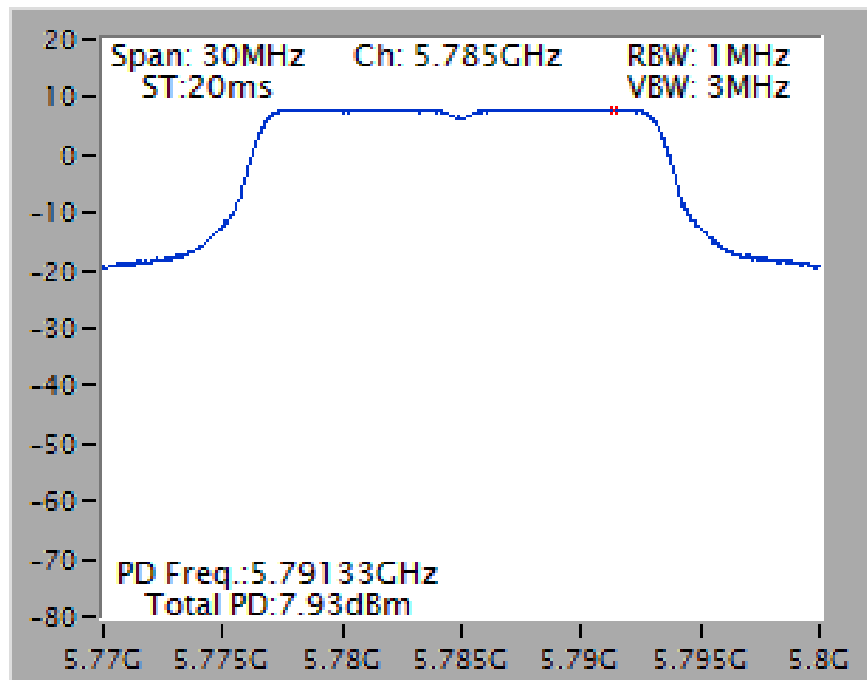


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5200 MHz

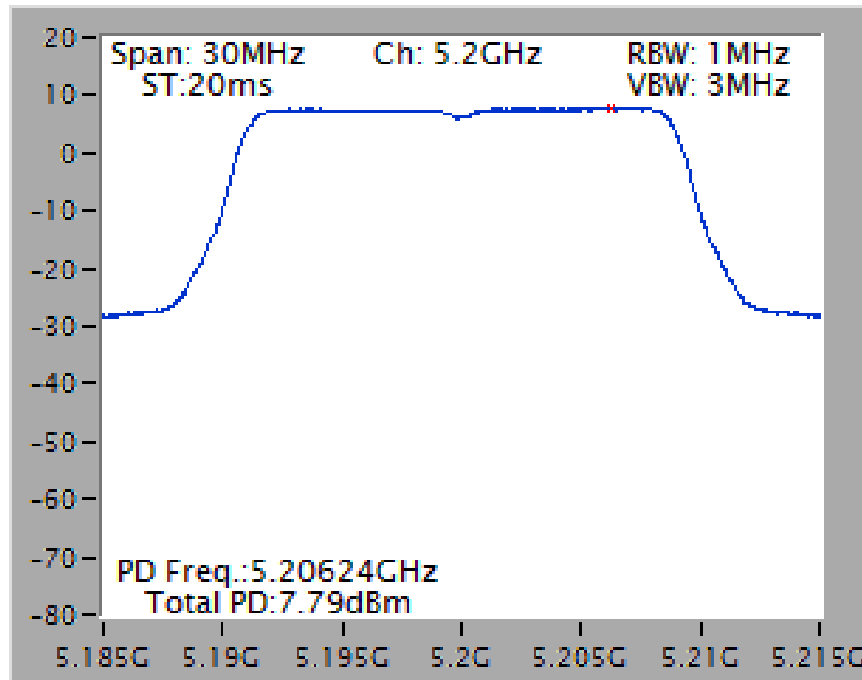


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5785 MHz

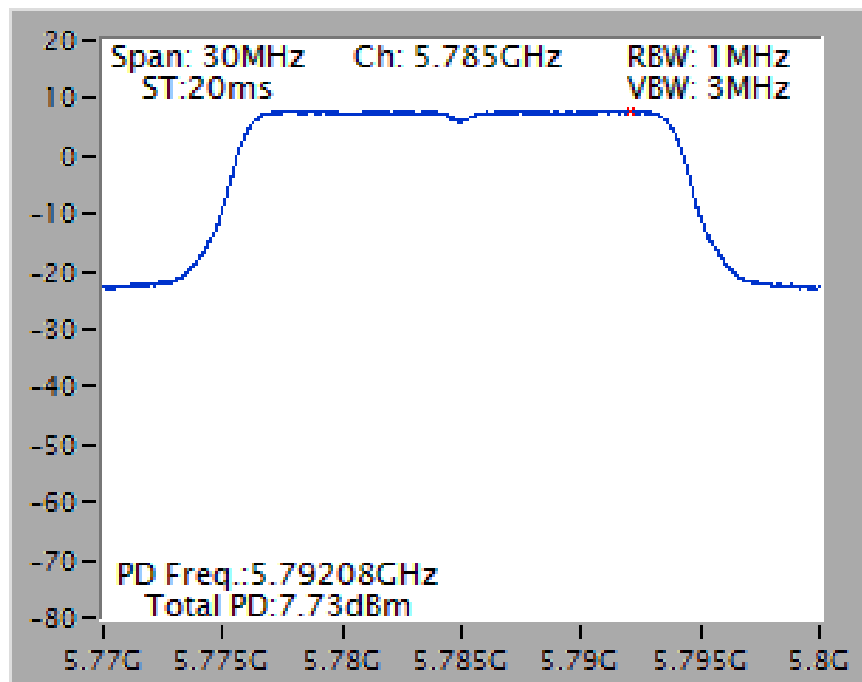


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5230 MHz

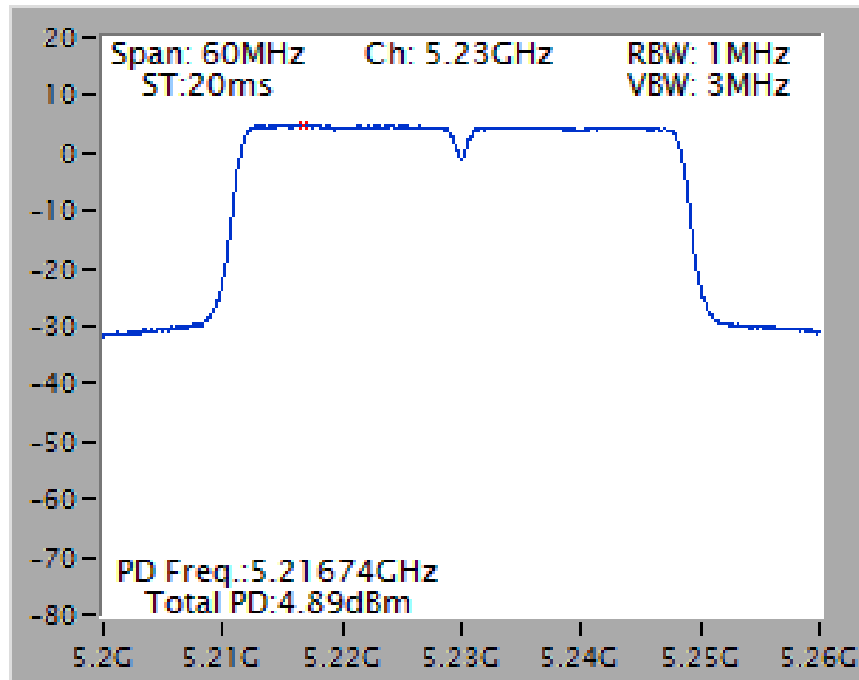


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5795 MHz

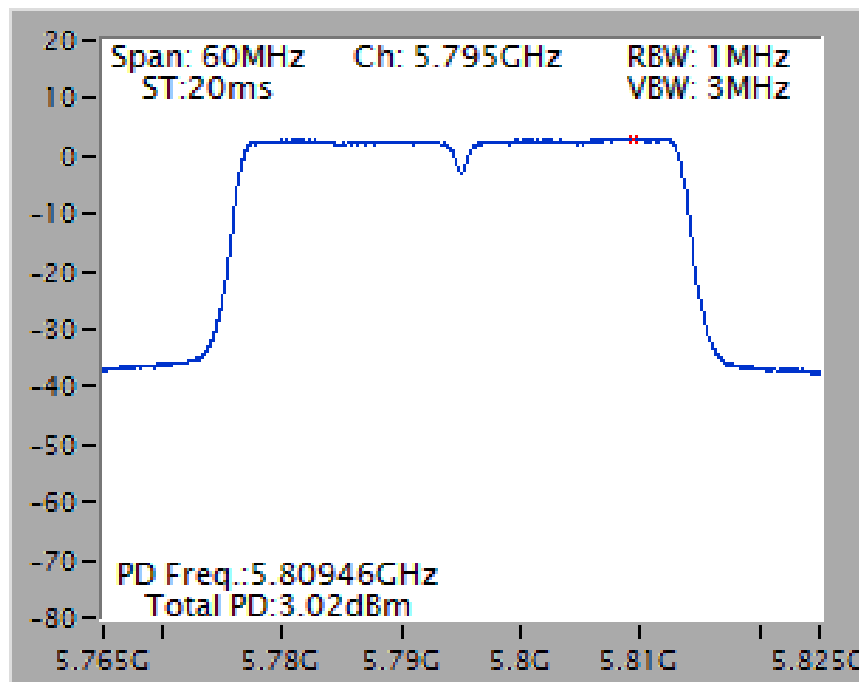

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5210 MHz

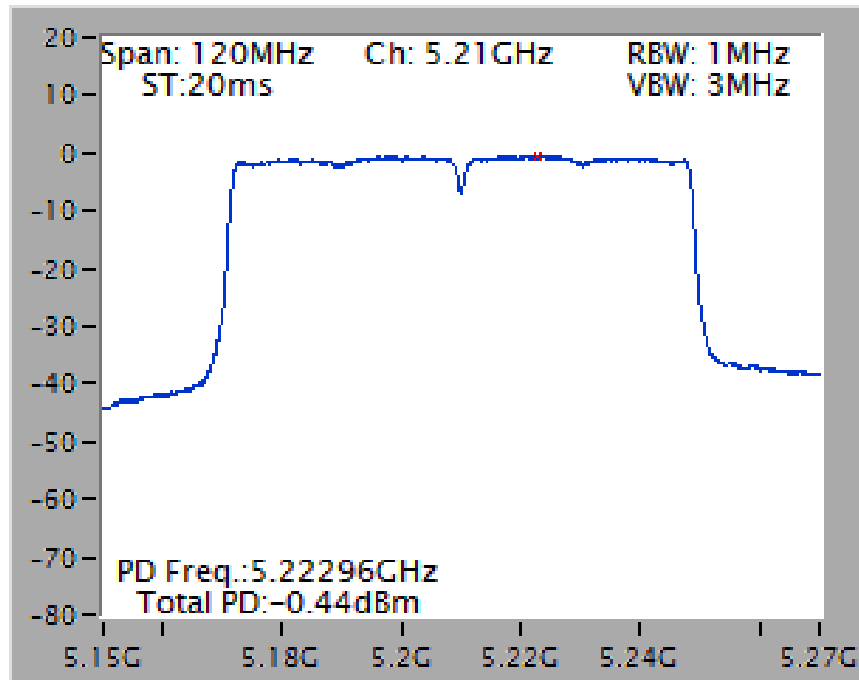


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5775 MHz

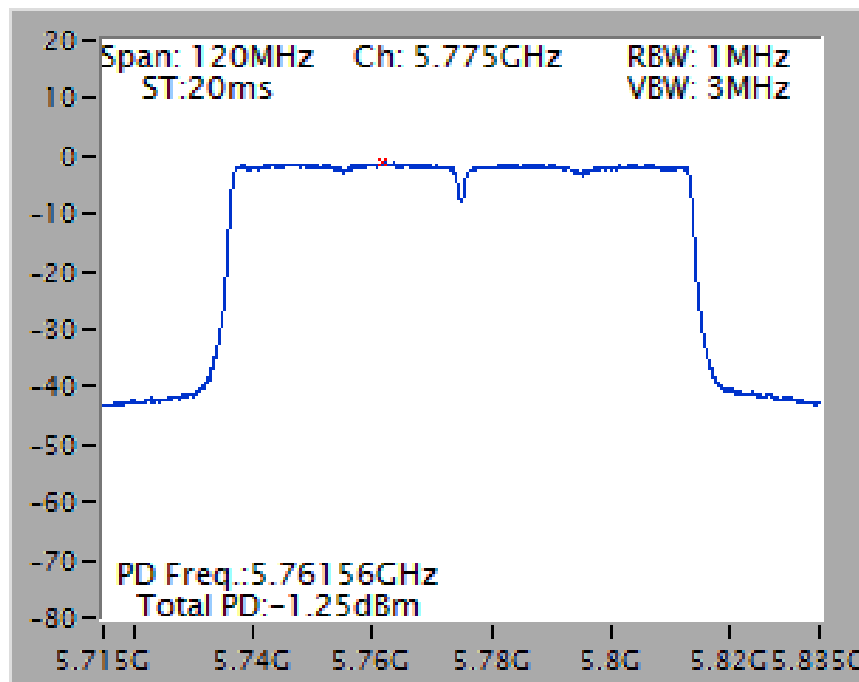


Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5180 MHz

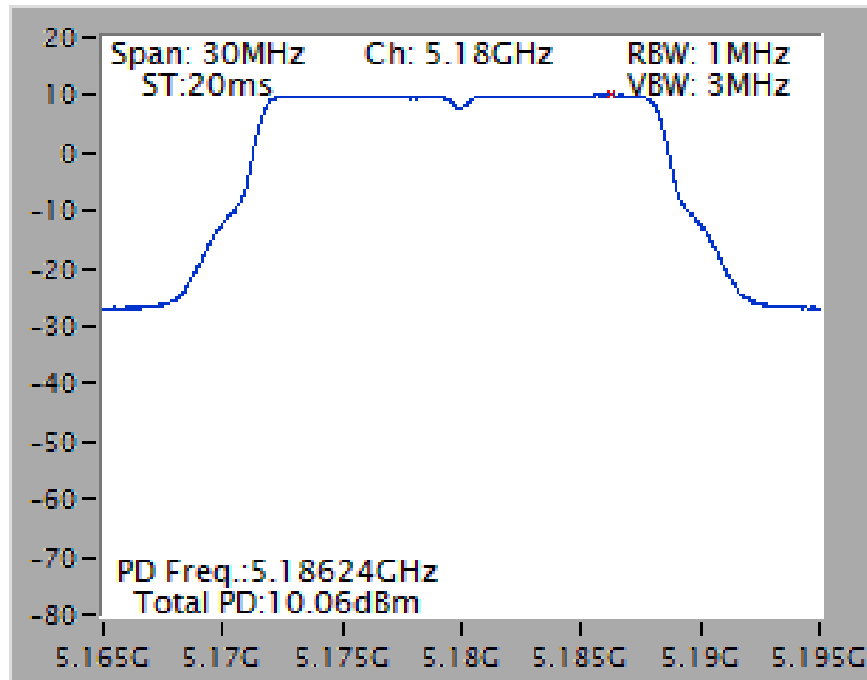


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

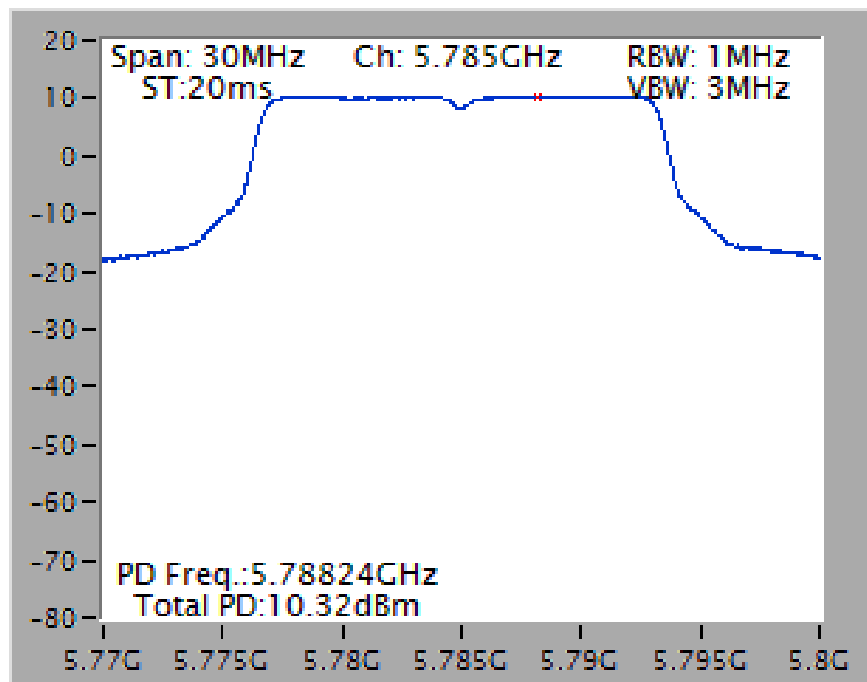


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

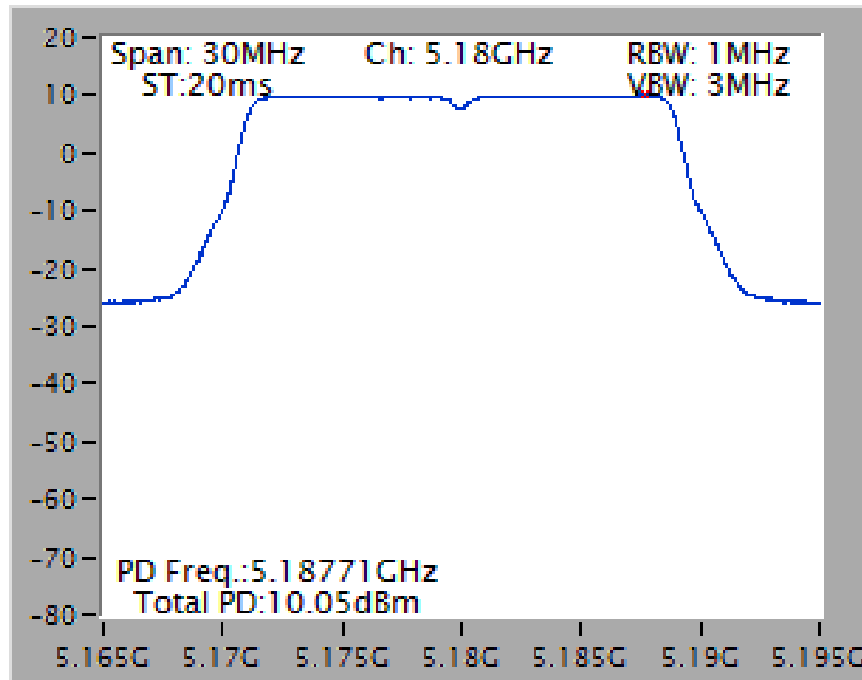


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

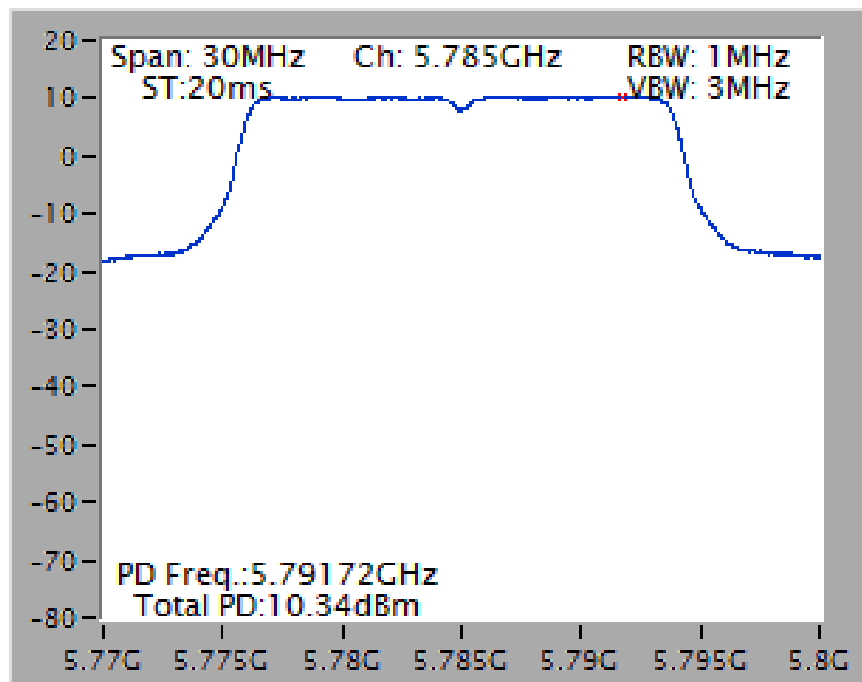


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

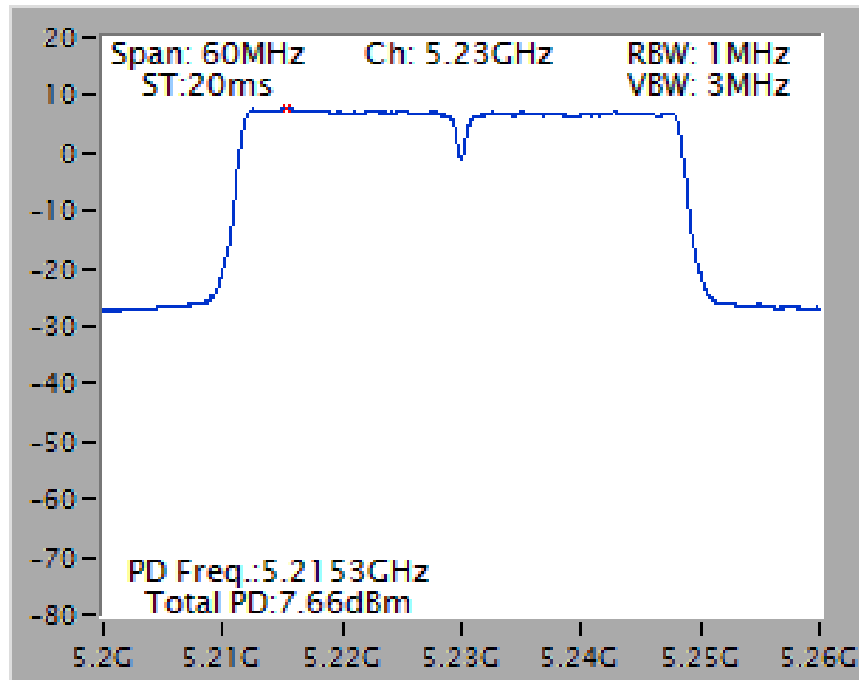


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

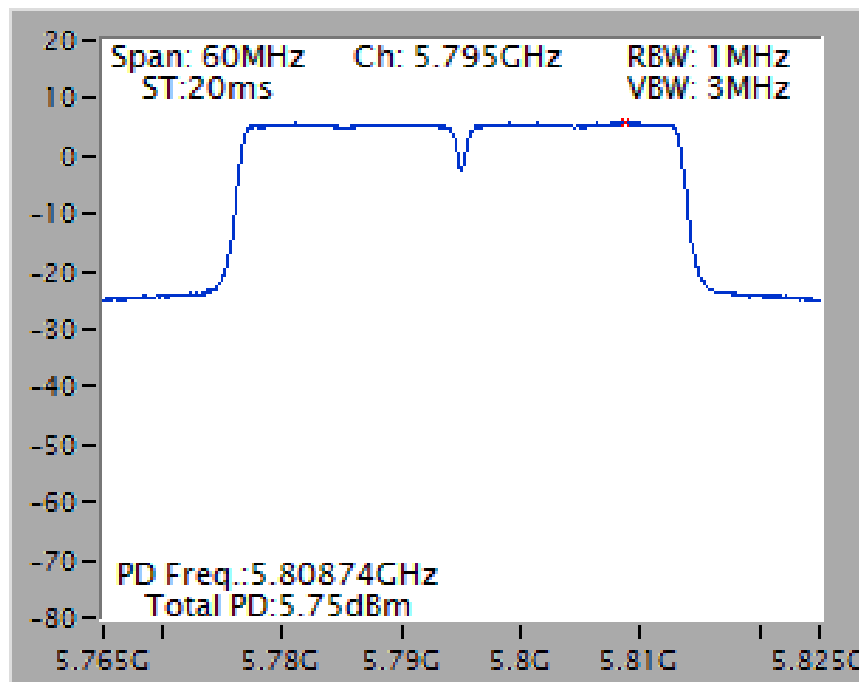

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

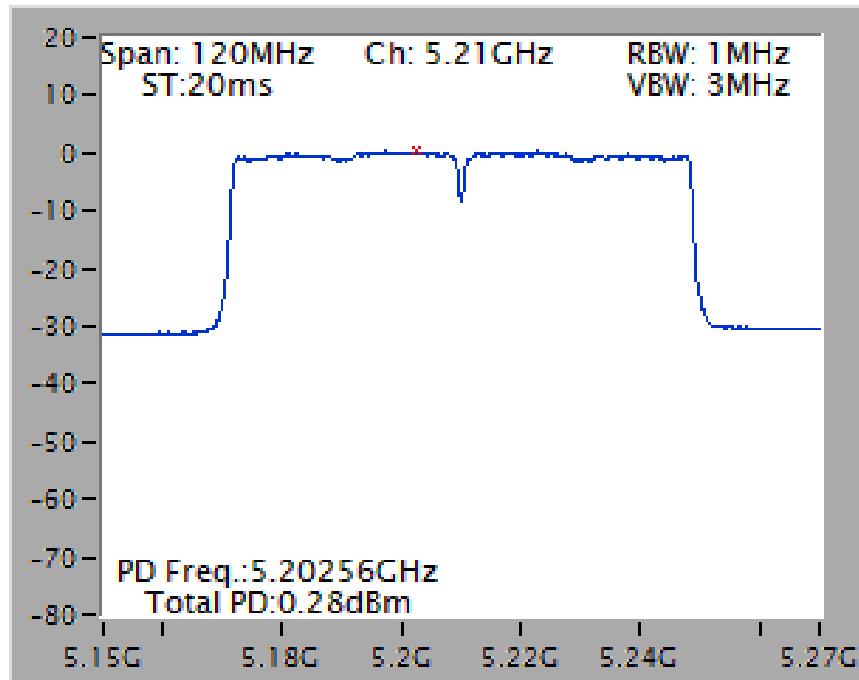


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

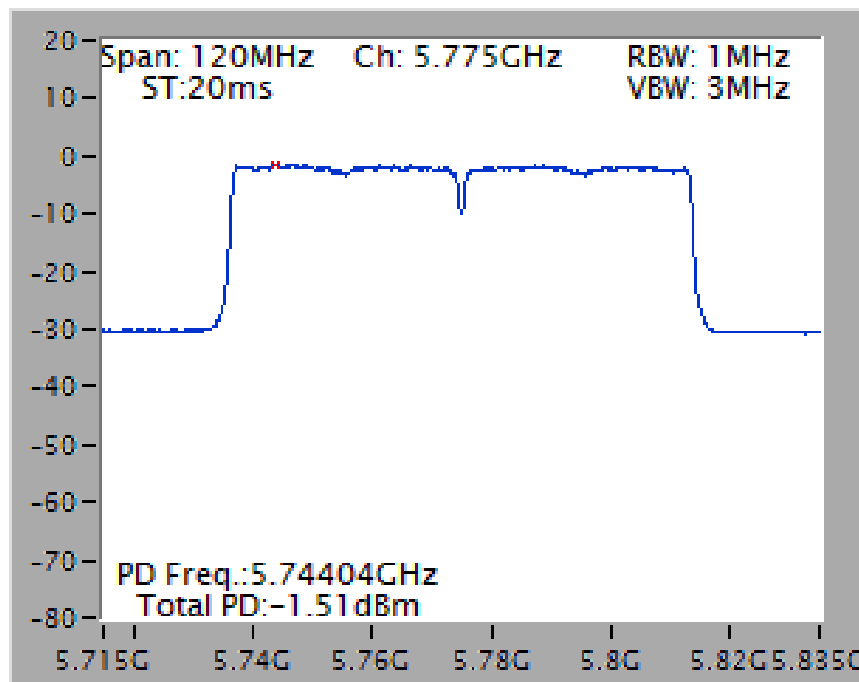


Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

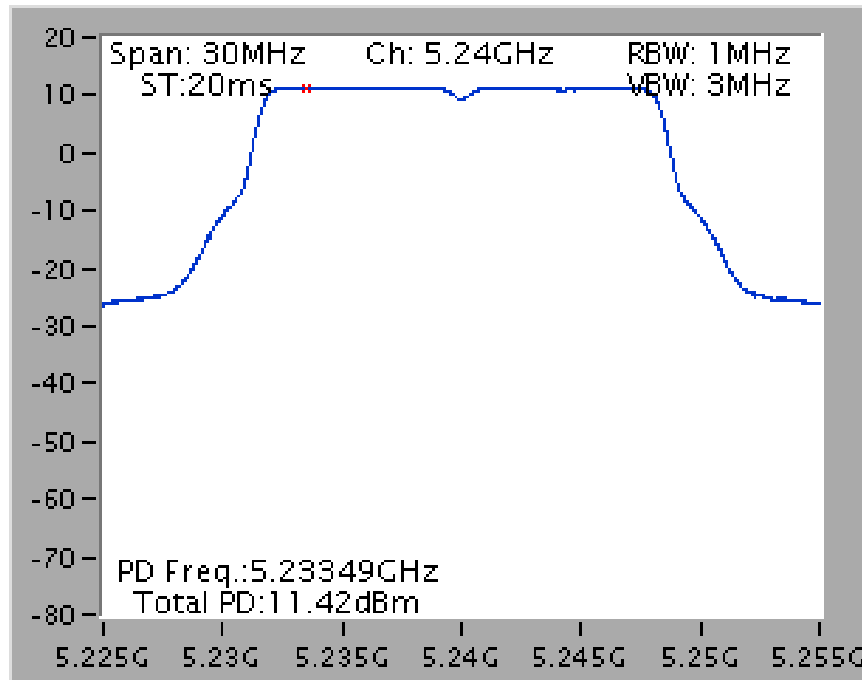


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5785 MHz

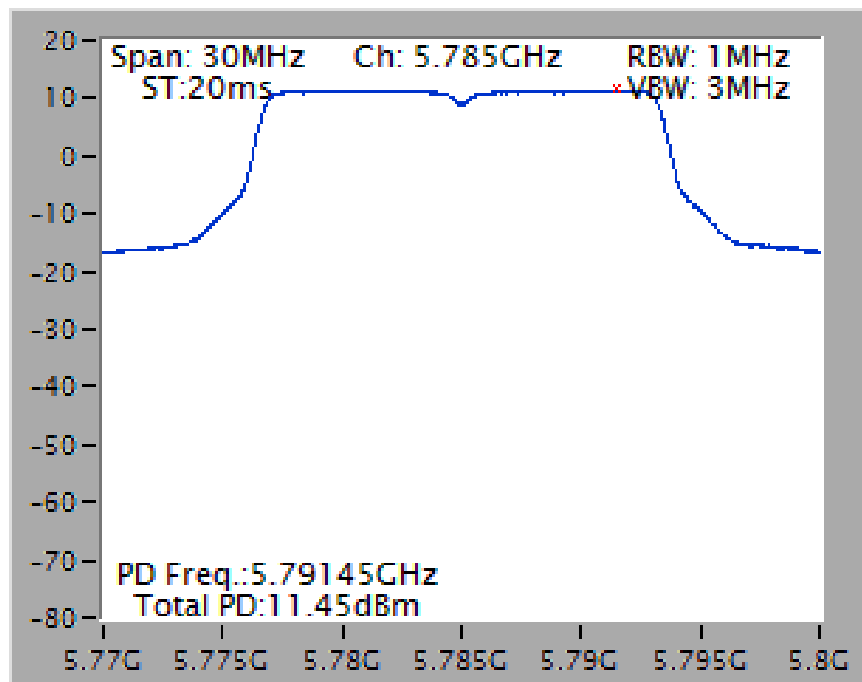


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5200 MHz

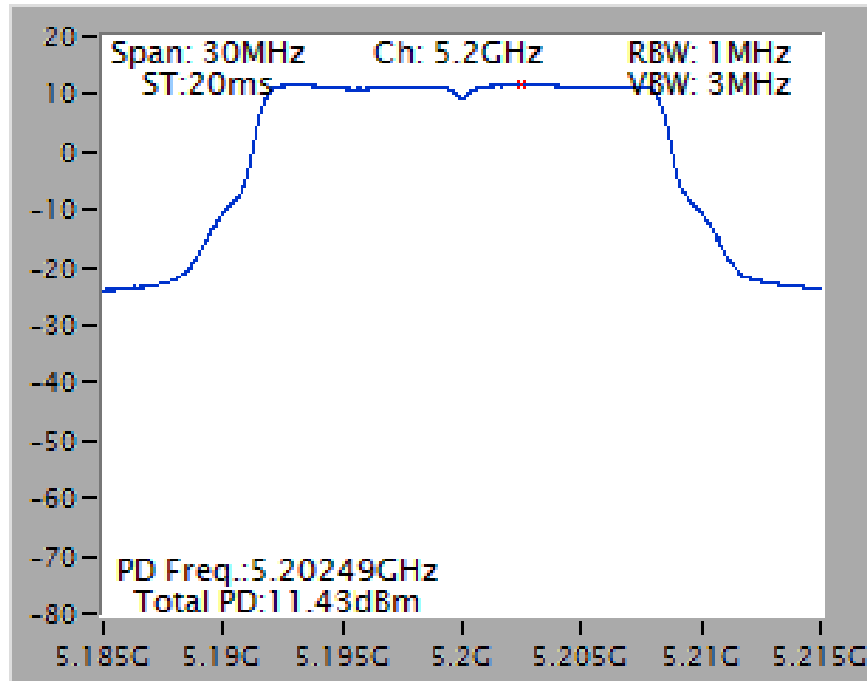


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

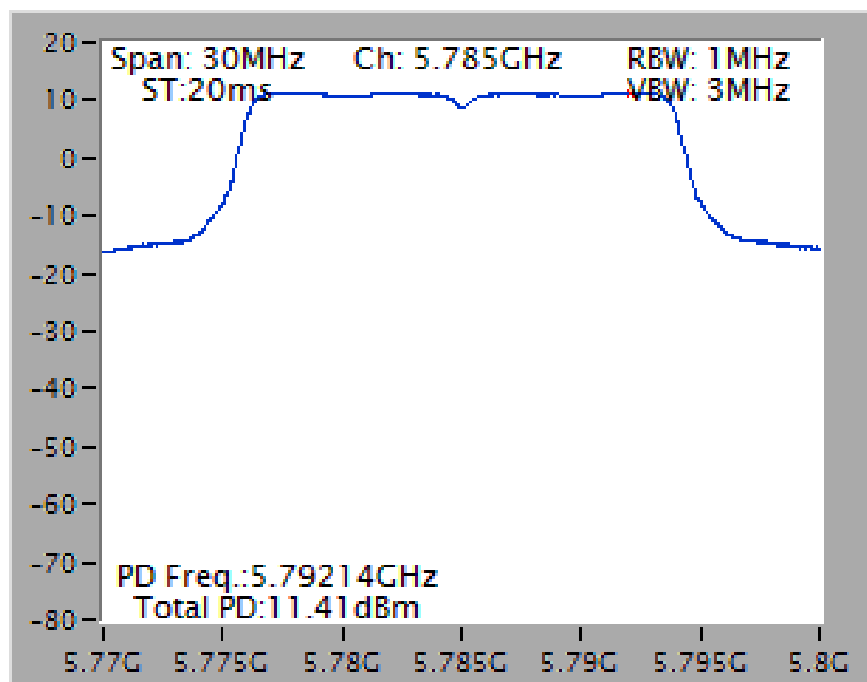


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

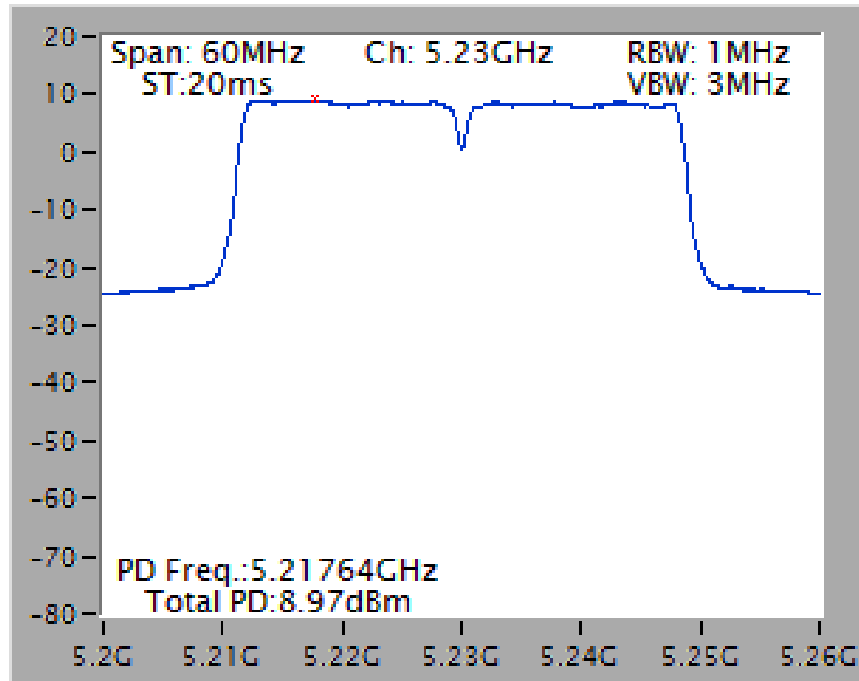


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

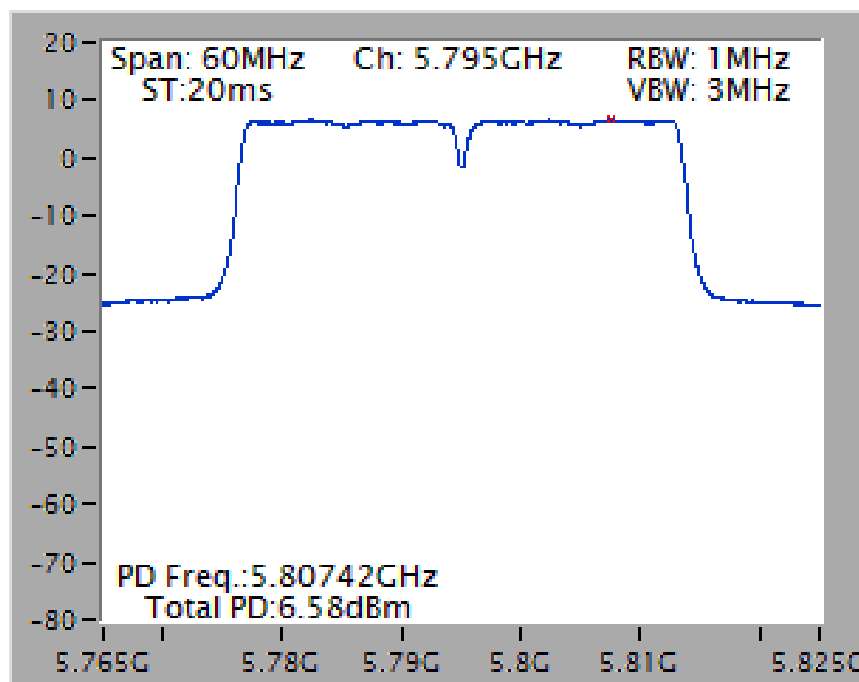

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

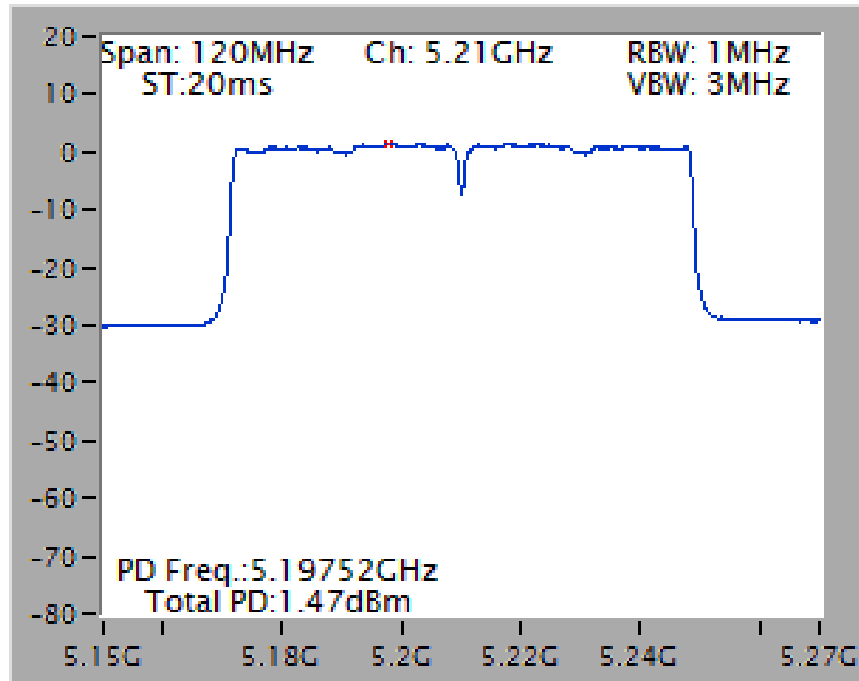


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

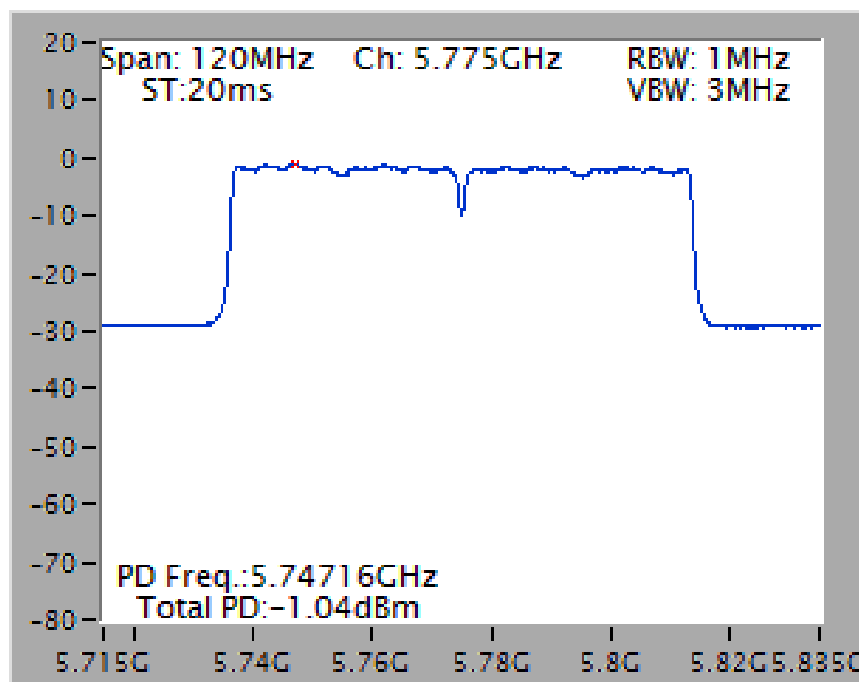


Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi, Chain 4: 5.9dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

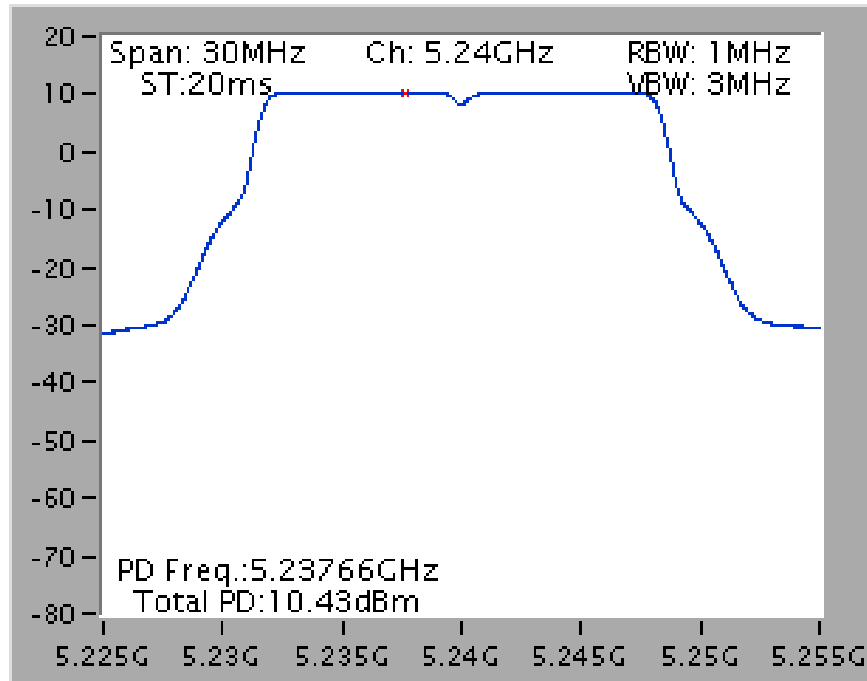


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

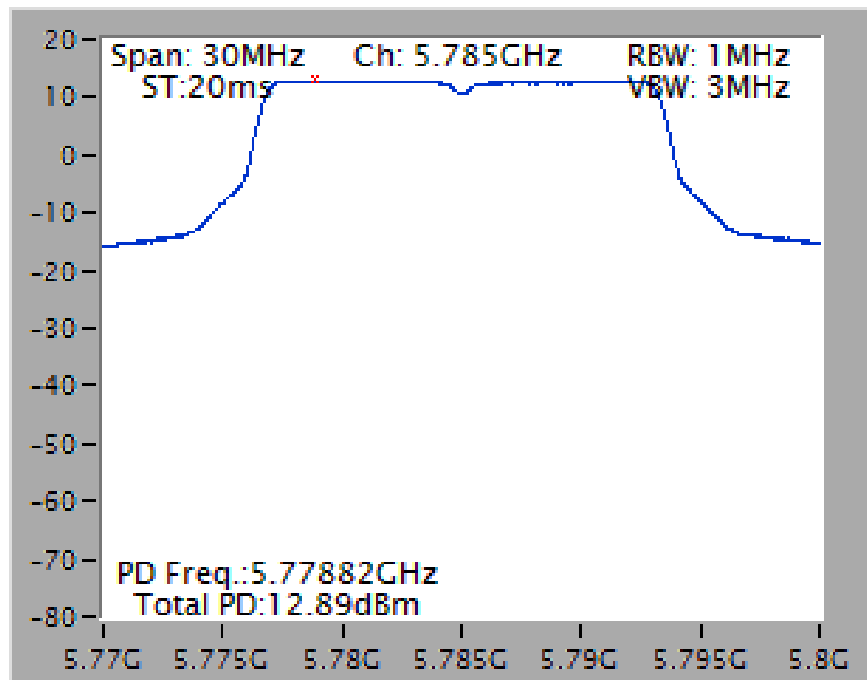


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

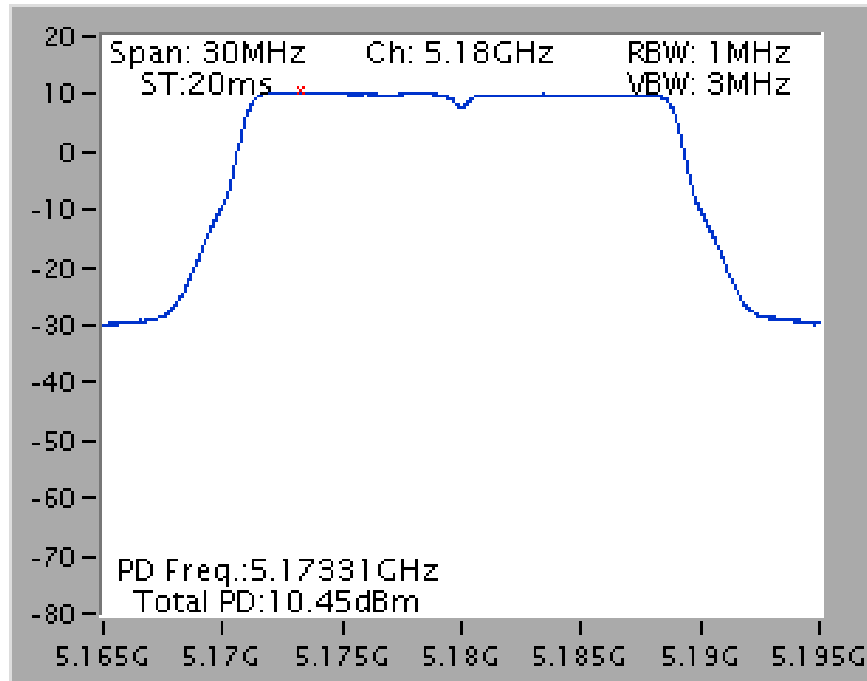


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

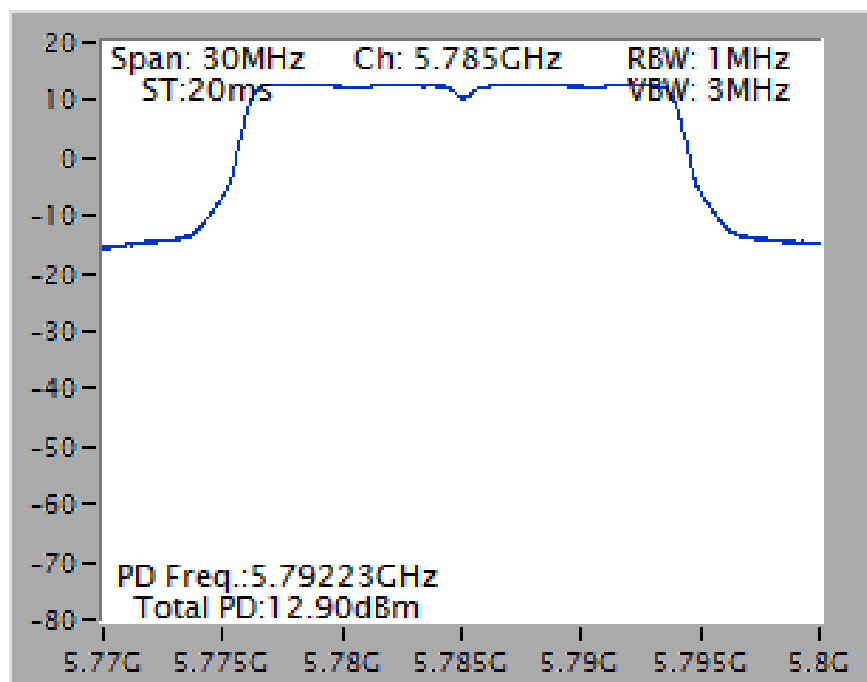


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

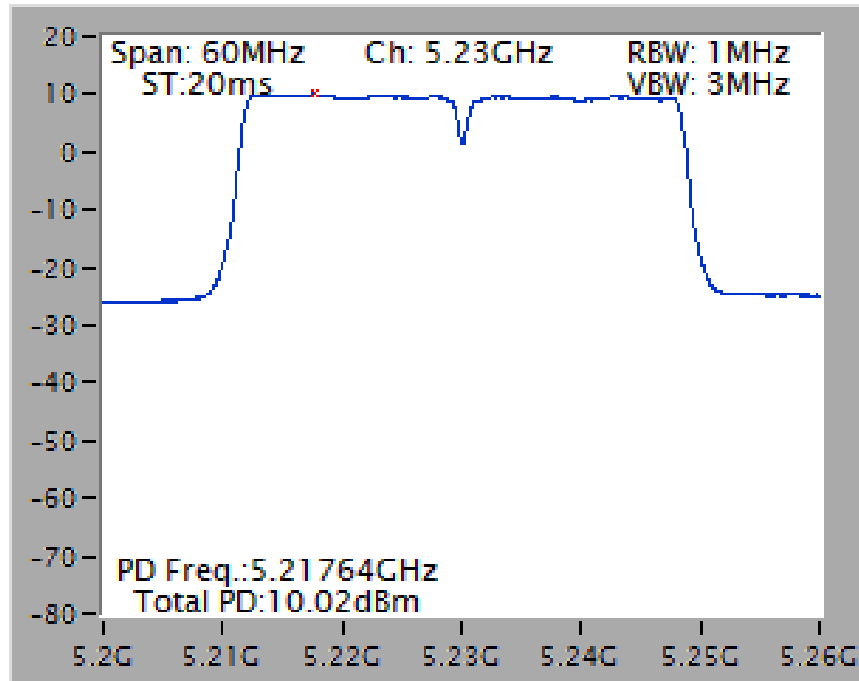


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

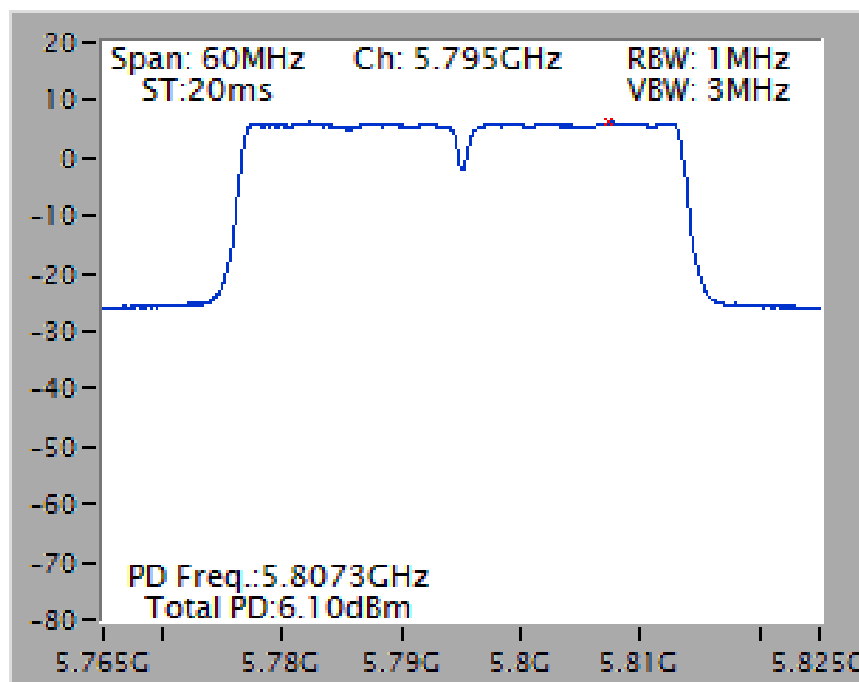

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

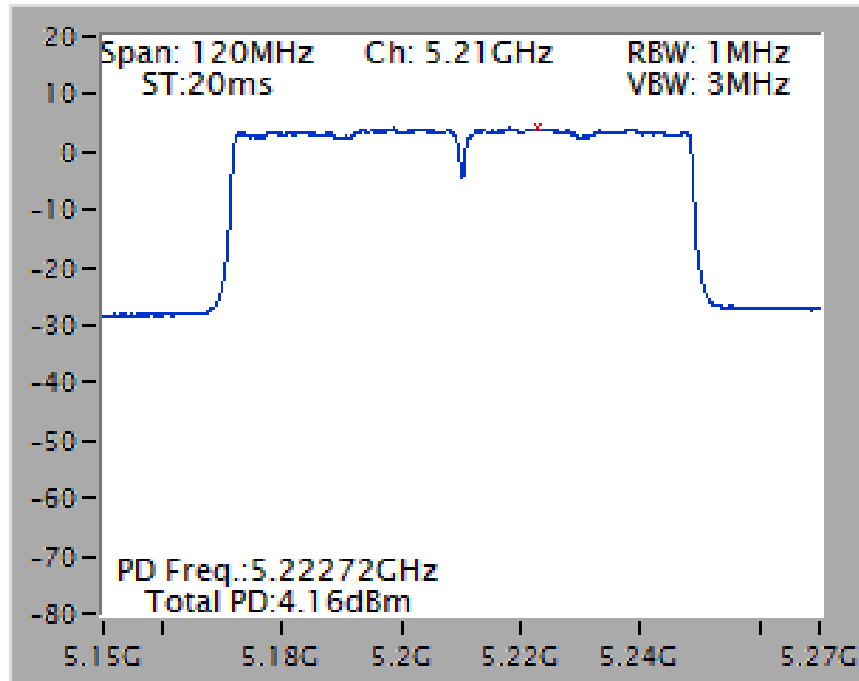

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

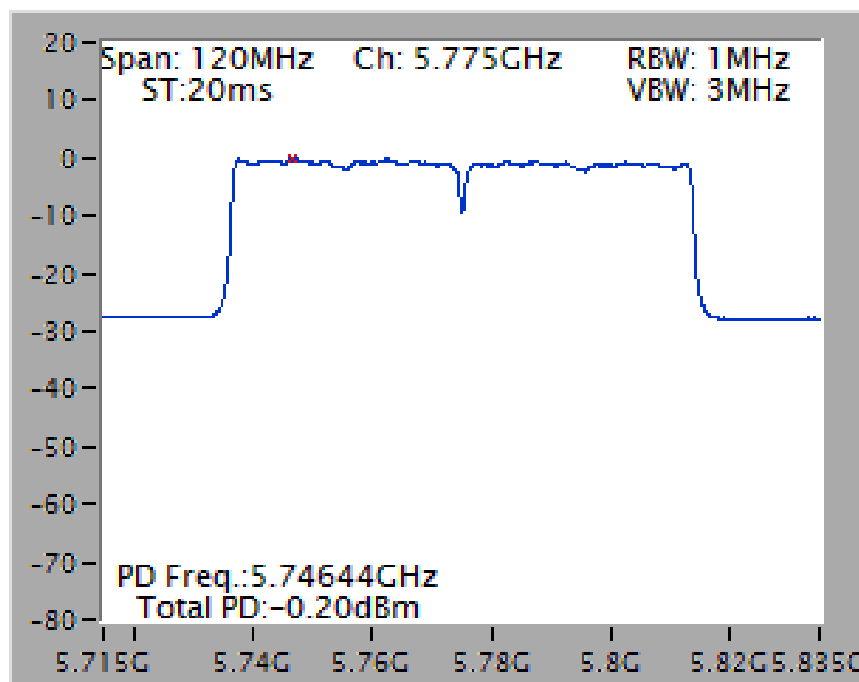


For Beamforming Mode


For indoor / outdoor use

Mode 1 (Set 1 Dipole antenna / 3.96dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

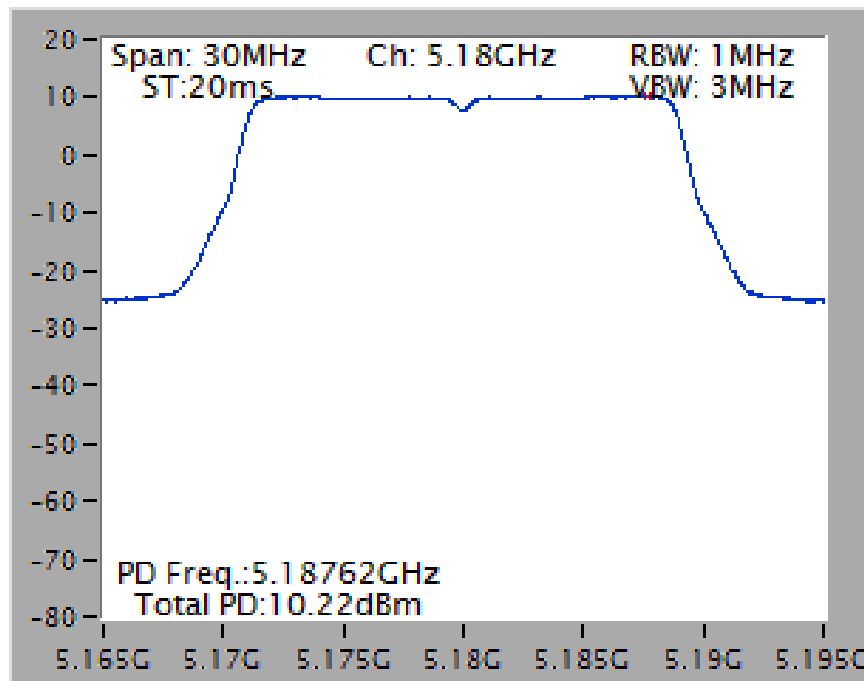


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

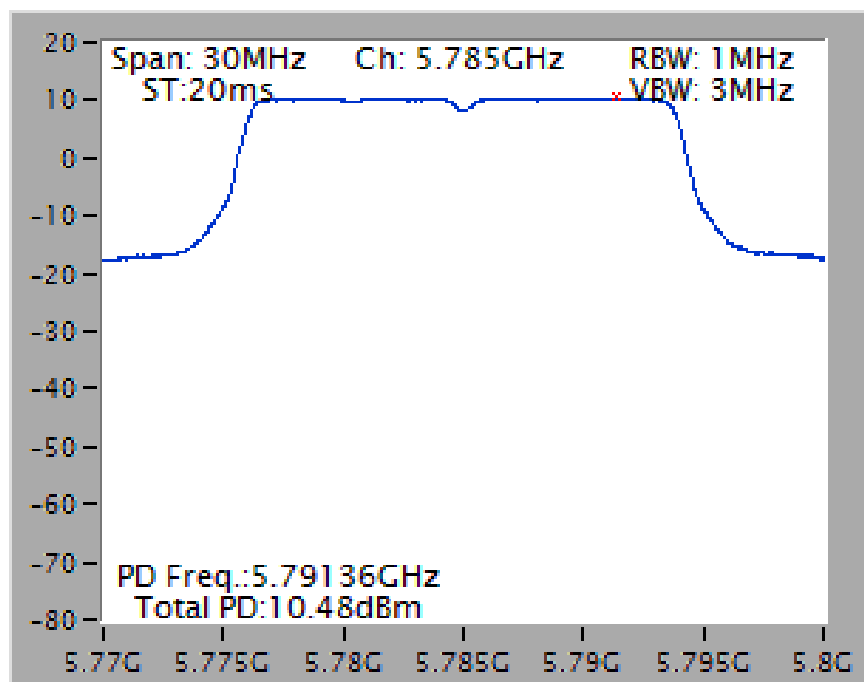


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

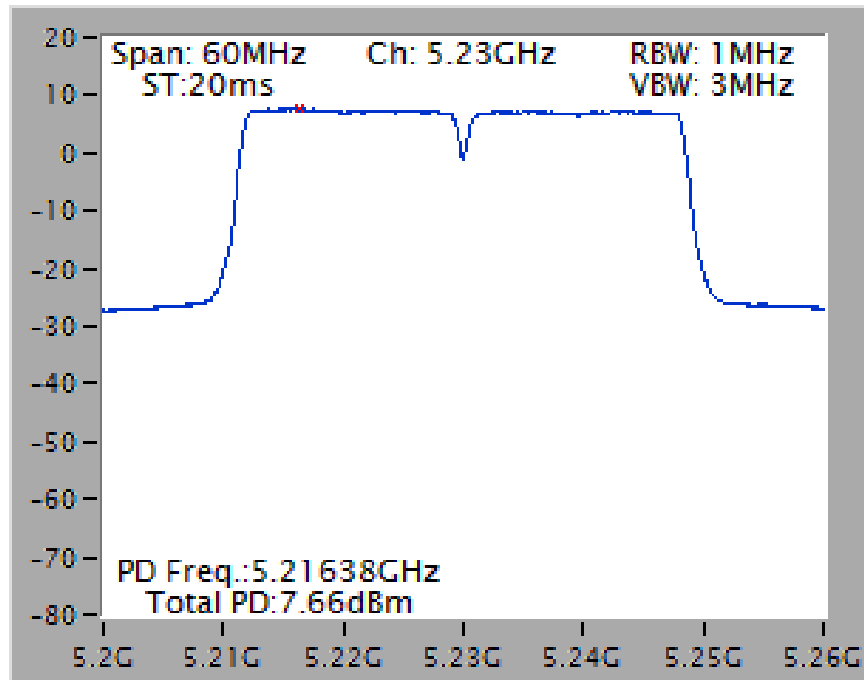


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

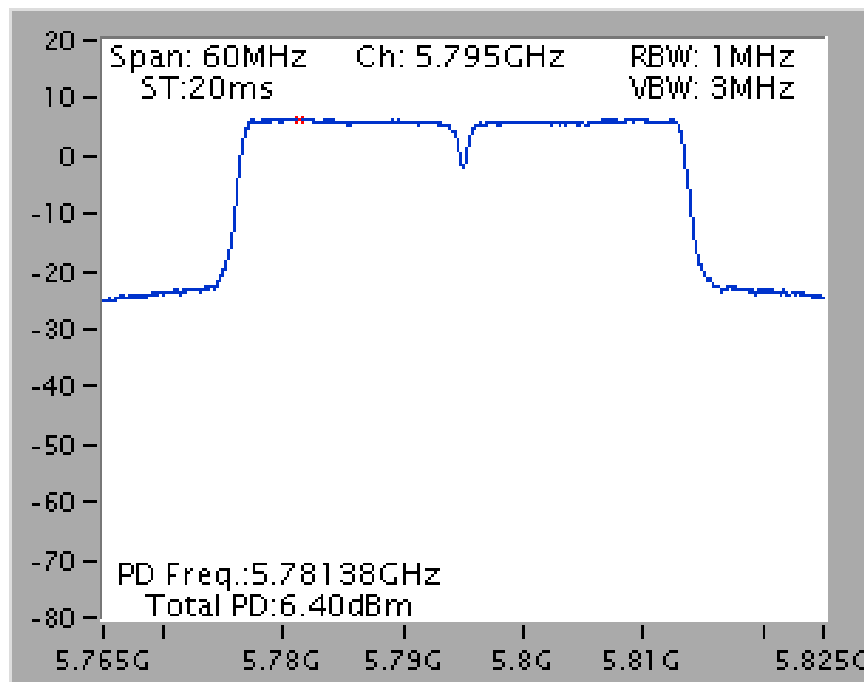

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

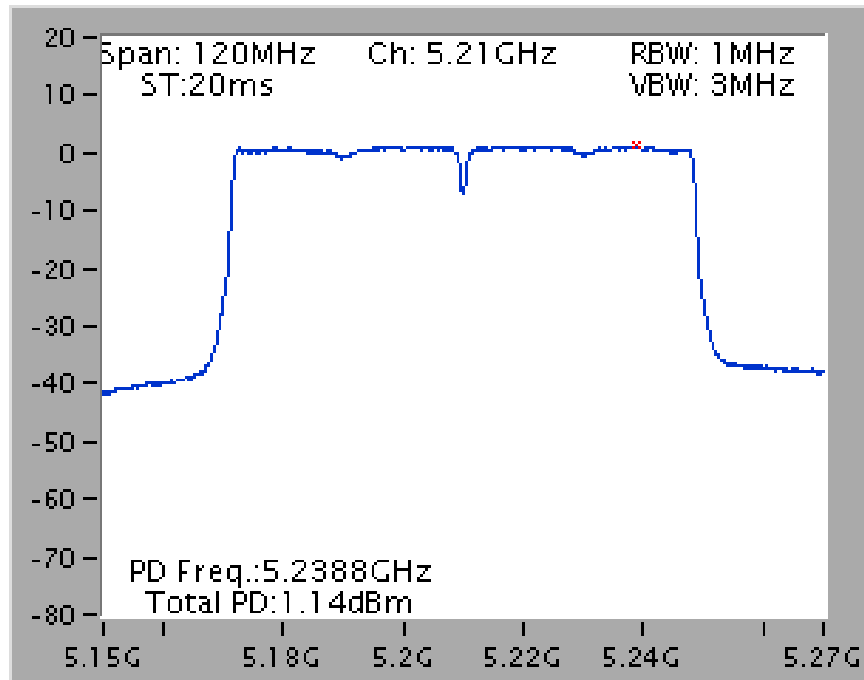


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

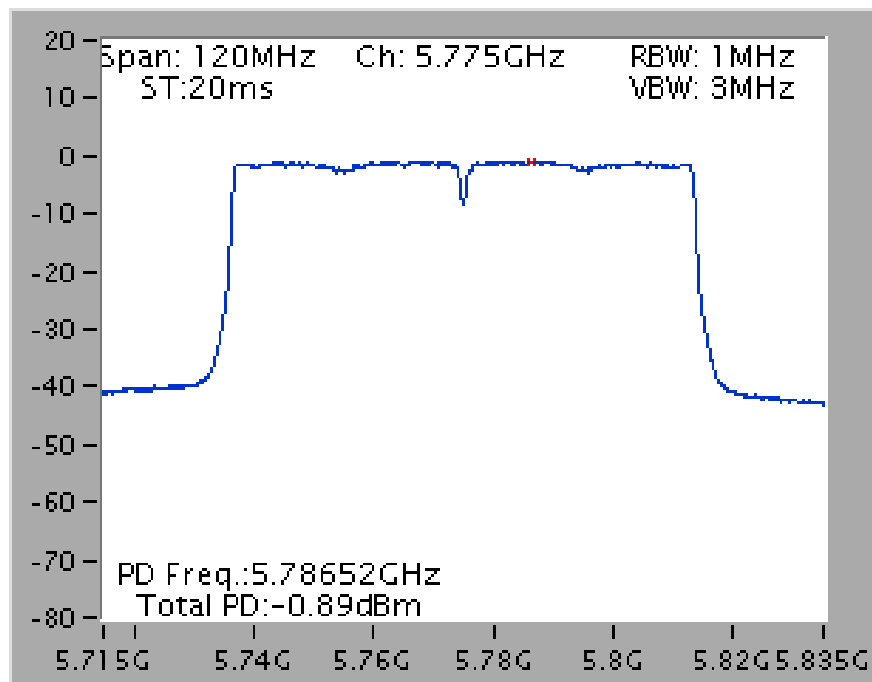


Mode 1 (Set 1 Dipole antenna / 3.96dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5240 MHz

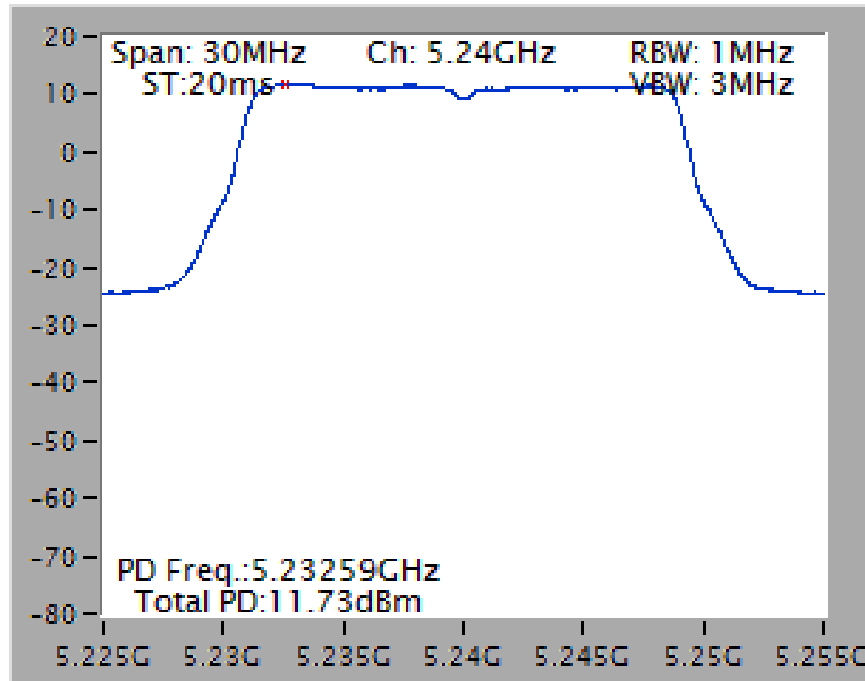


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

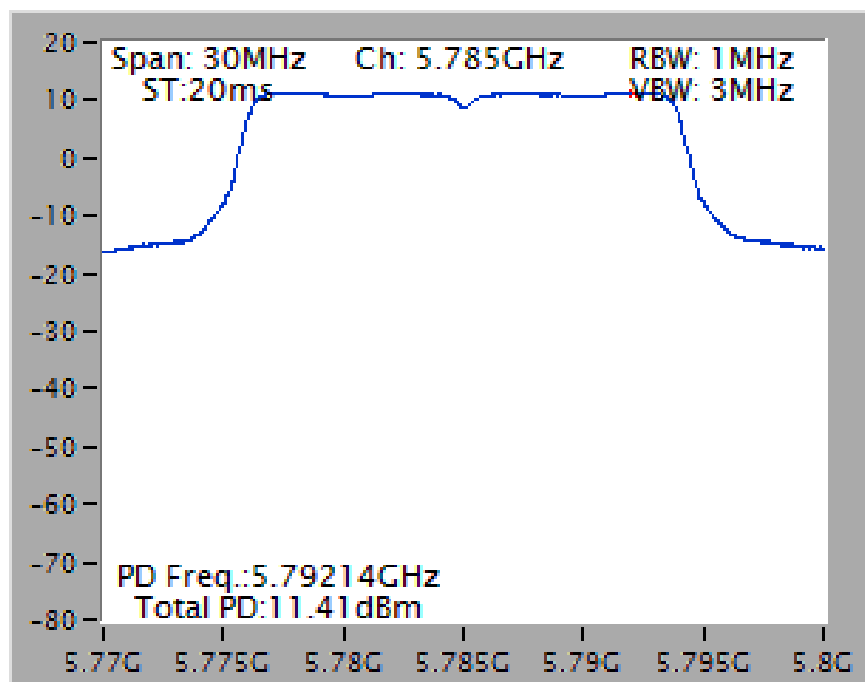


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

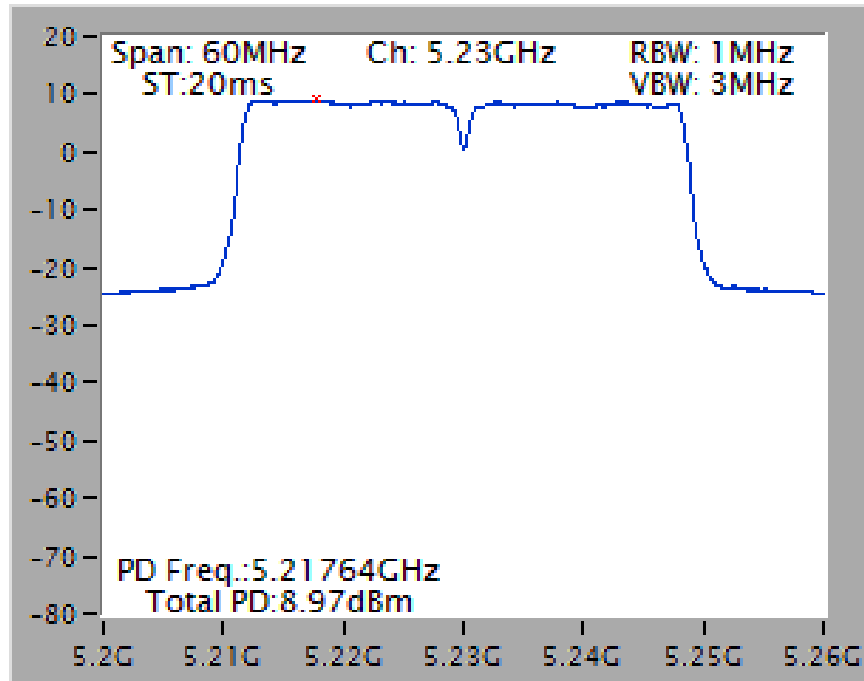


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

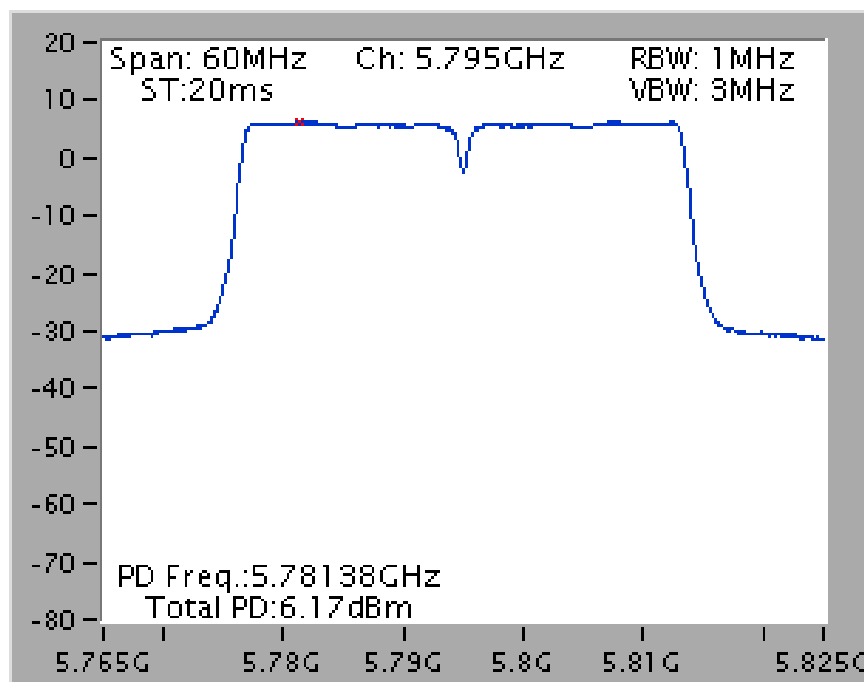

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

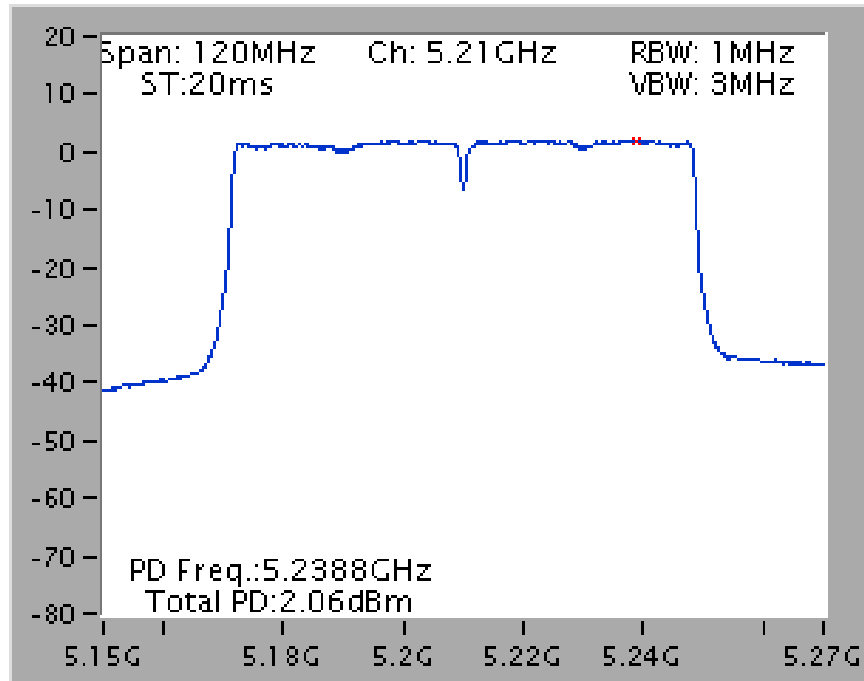


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

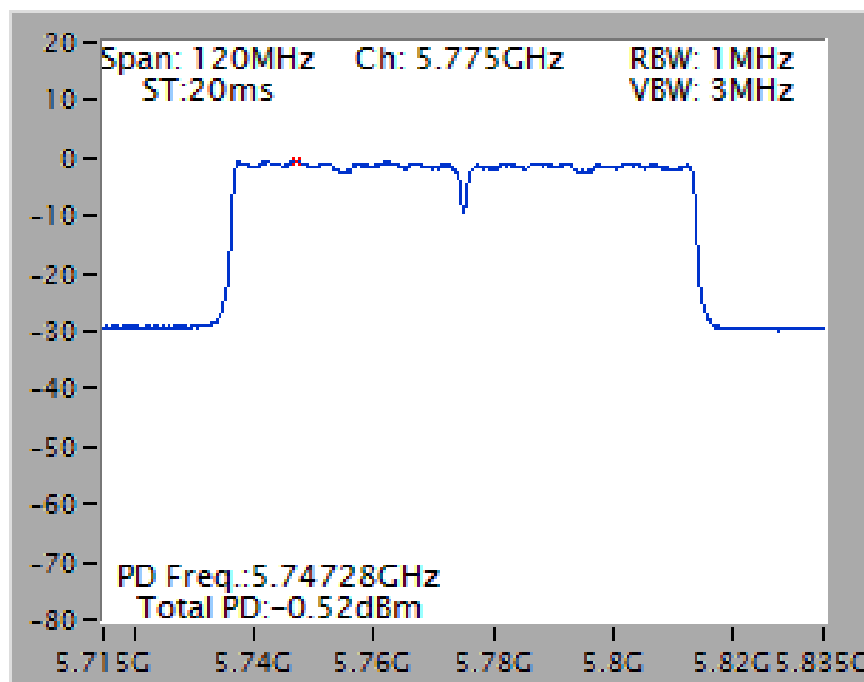


Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

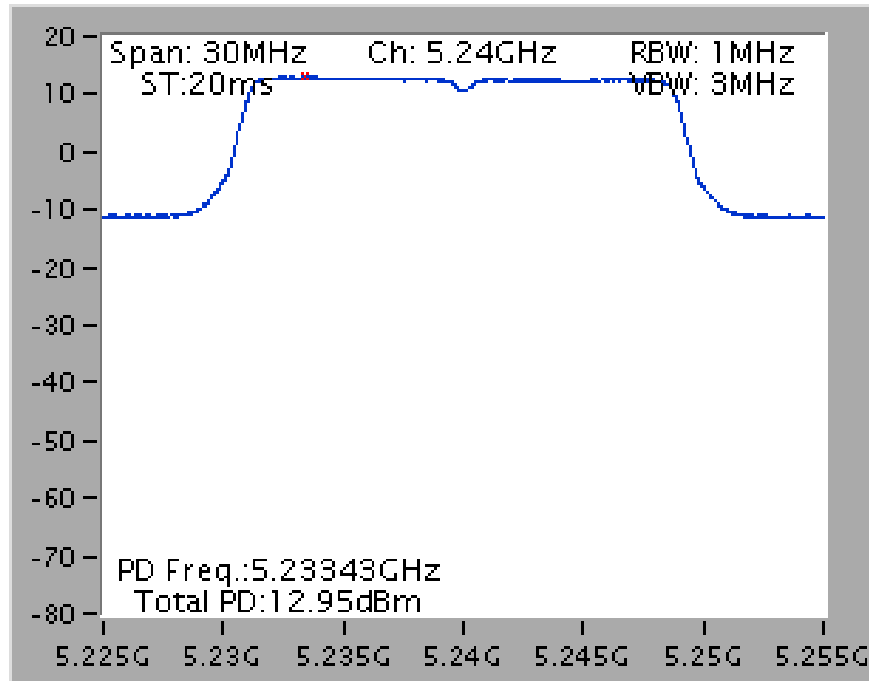


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

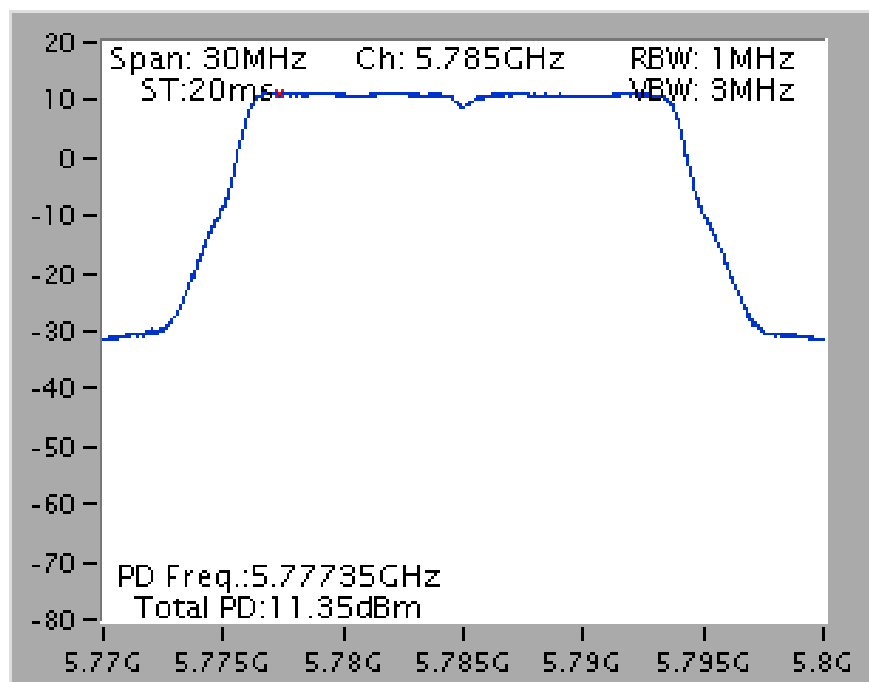


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

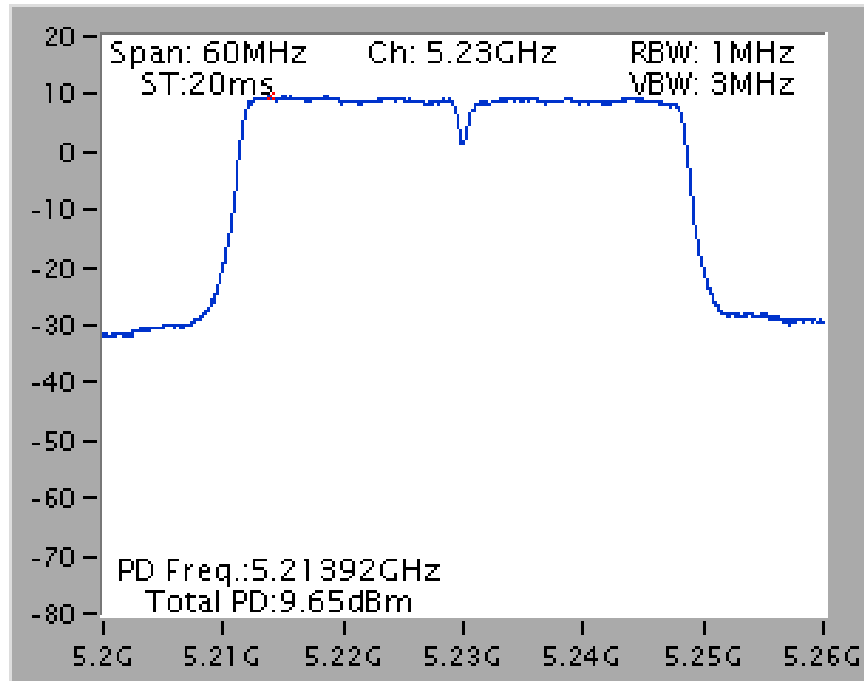


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

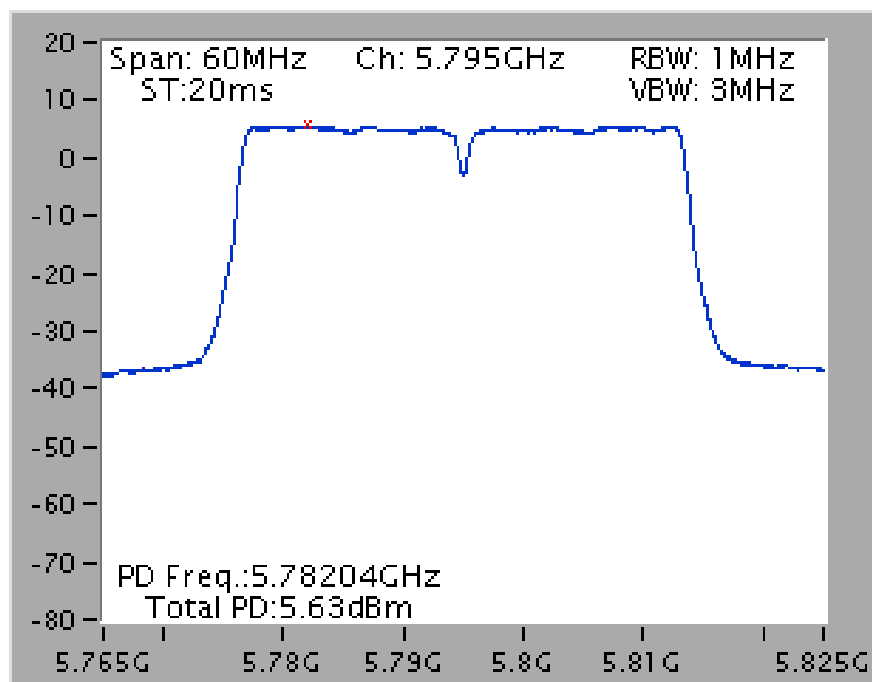

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

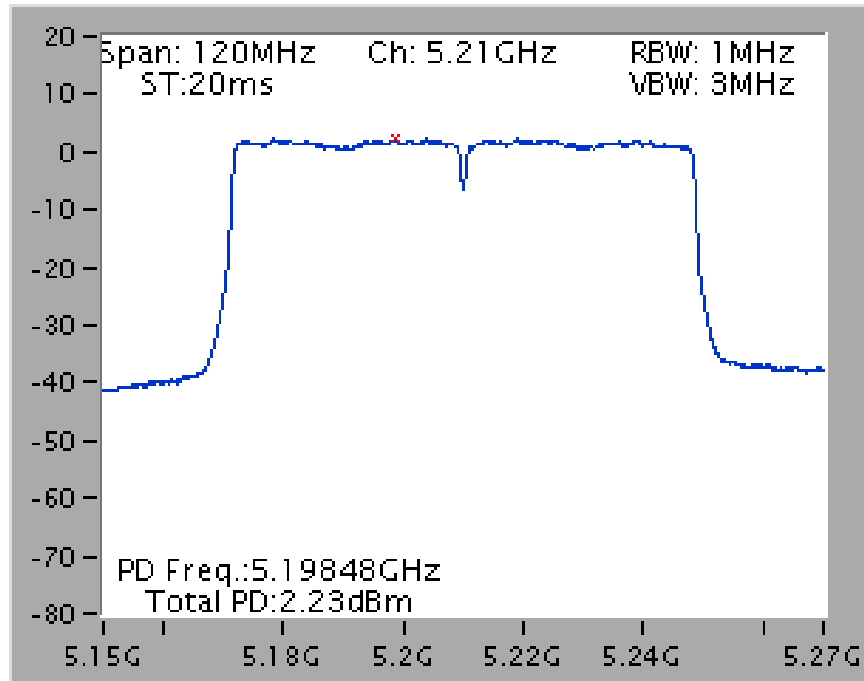


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

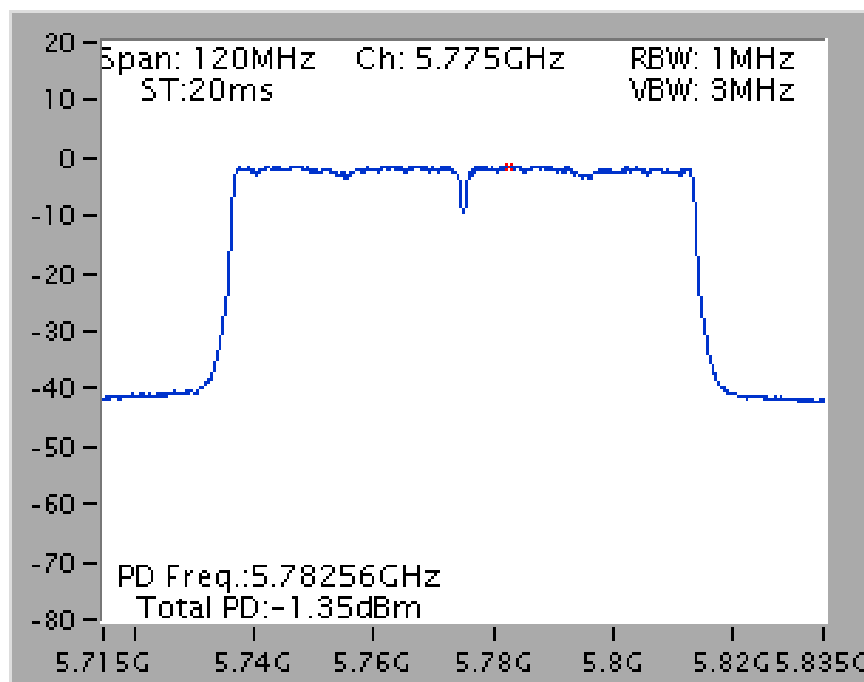


For indoor / outdoor use

Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*1, (2B)1.66dBi*1 / 2TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

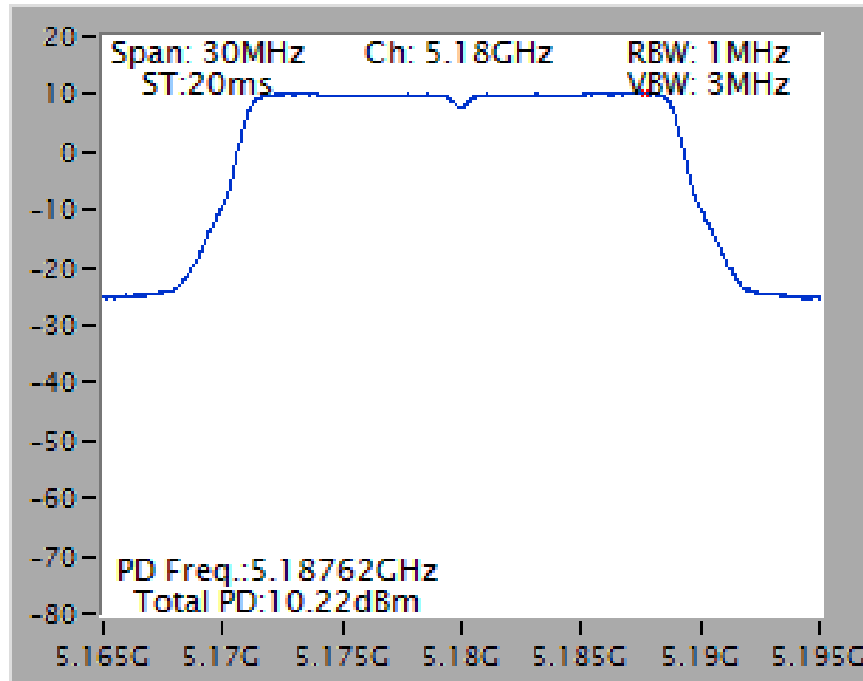


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

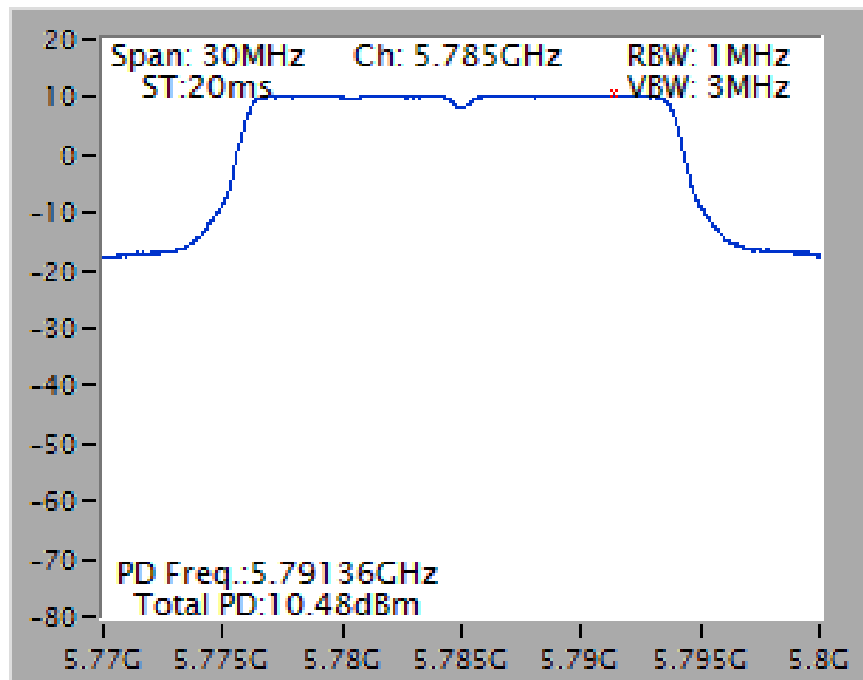


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

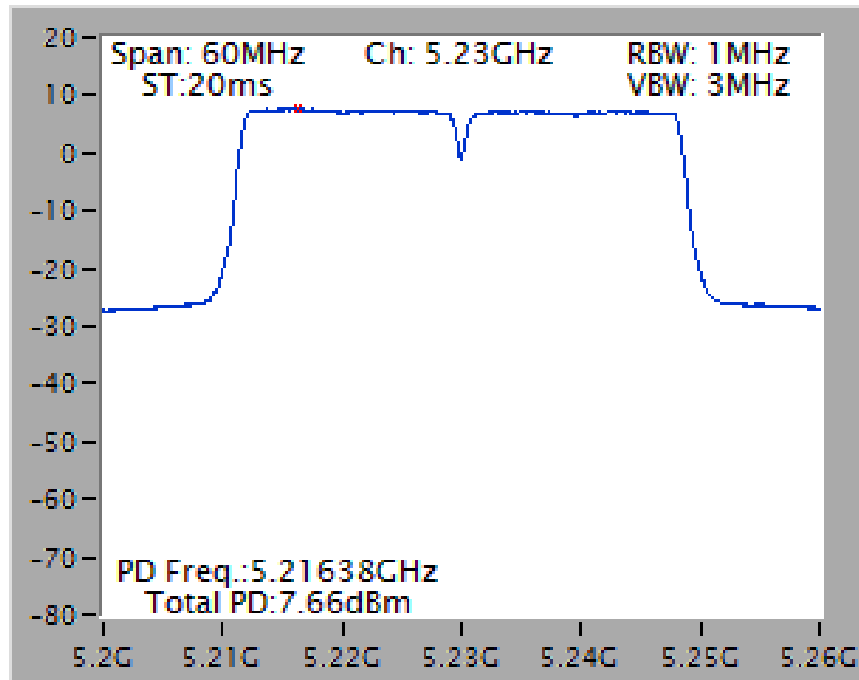


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

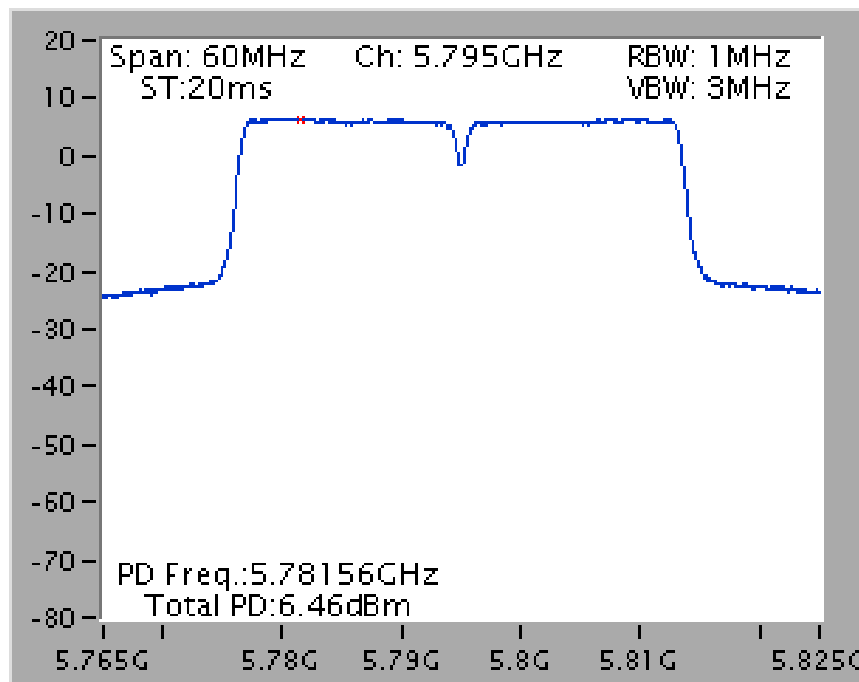

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

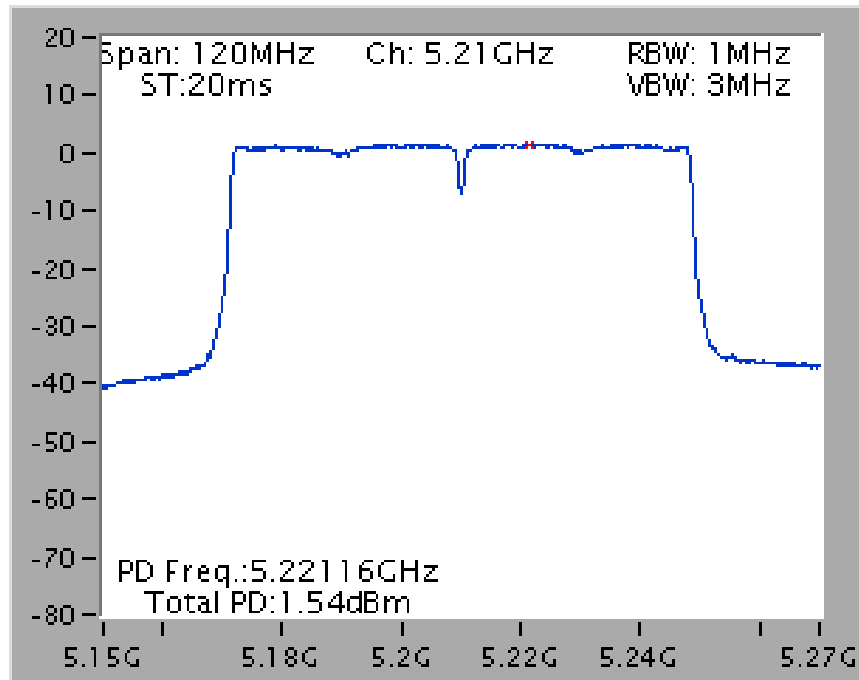


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

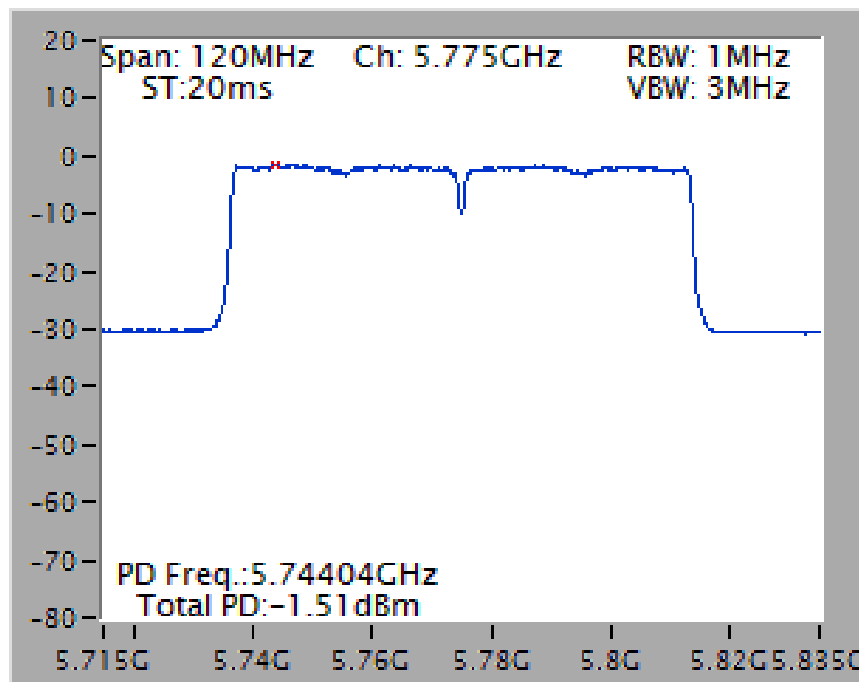


Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*1 / 3TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5240 MHz

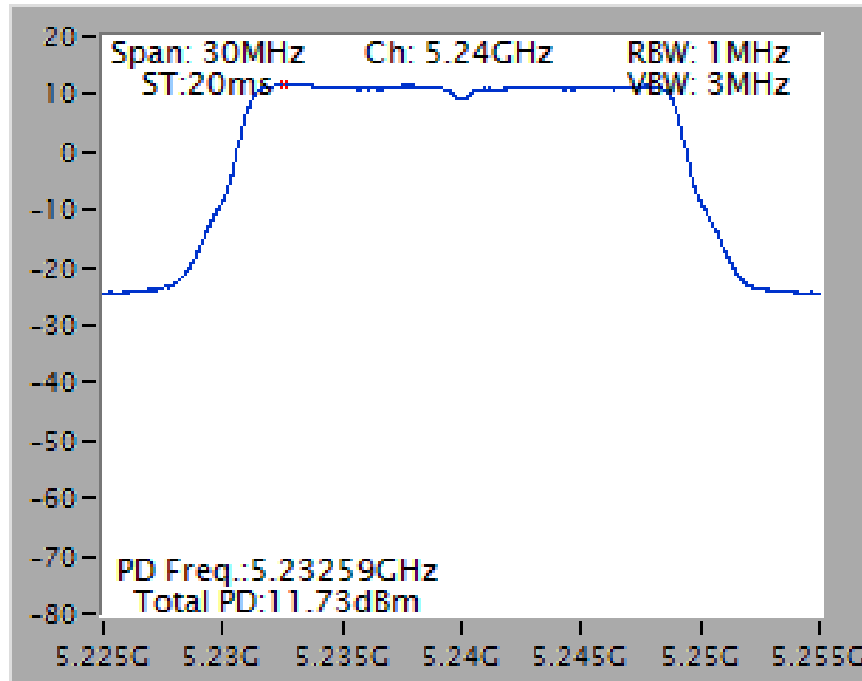


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

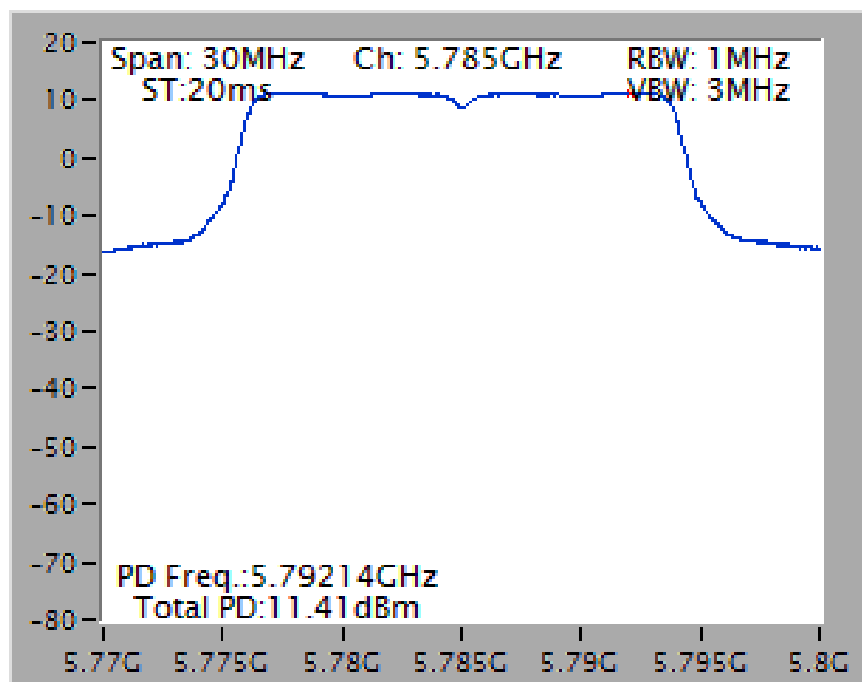


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

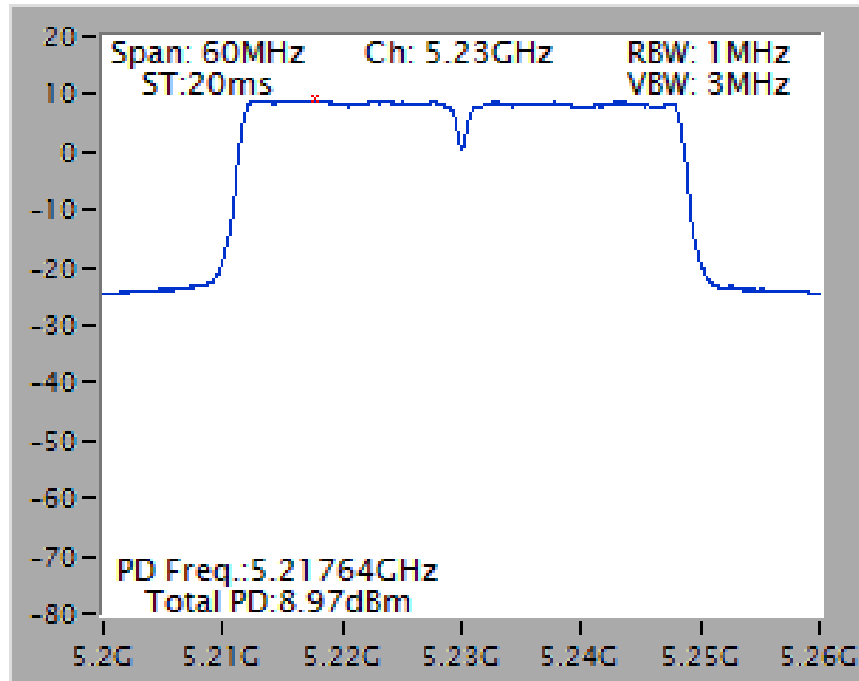


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

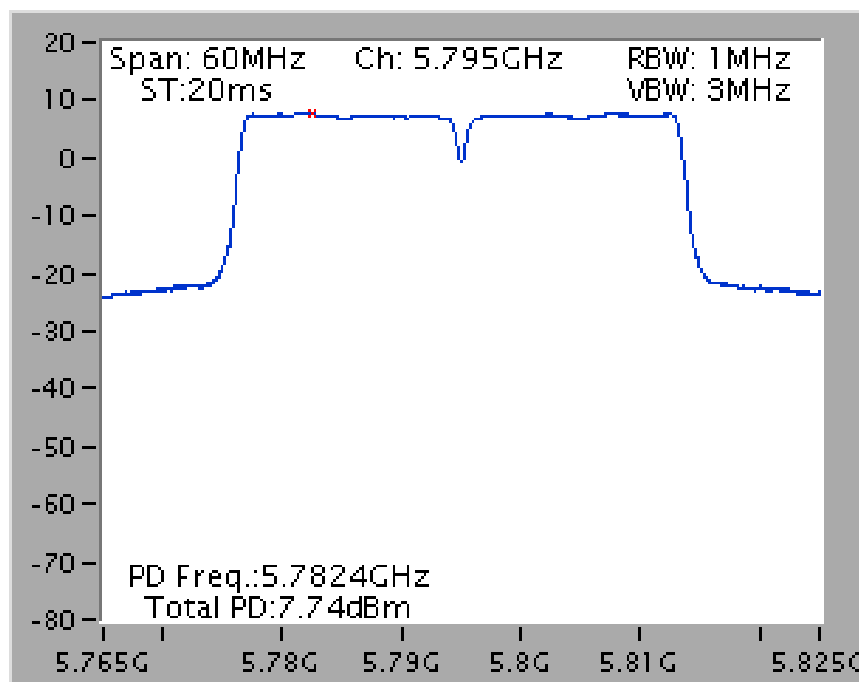

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

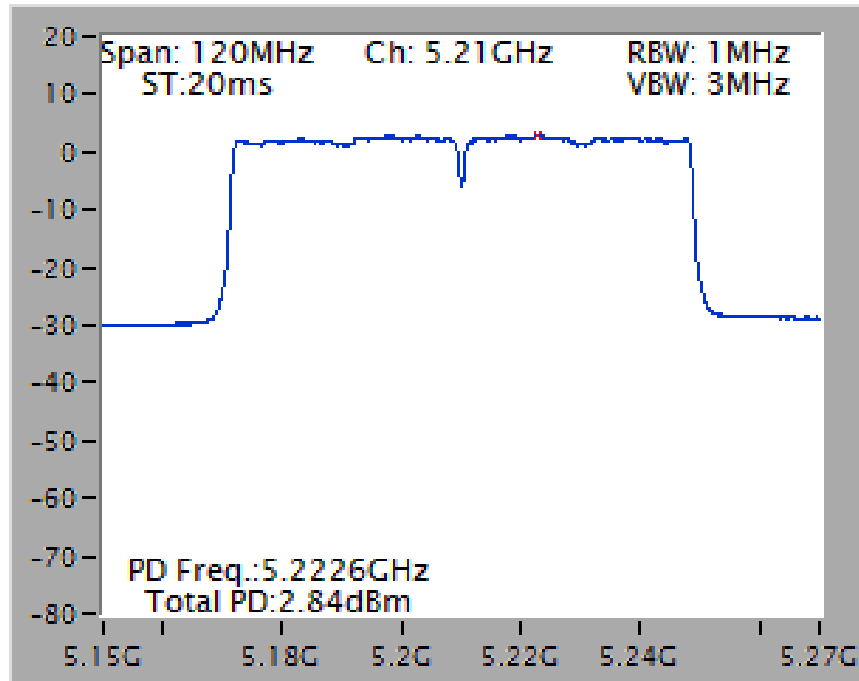


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

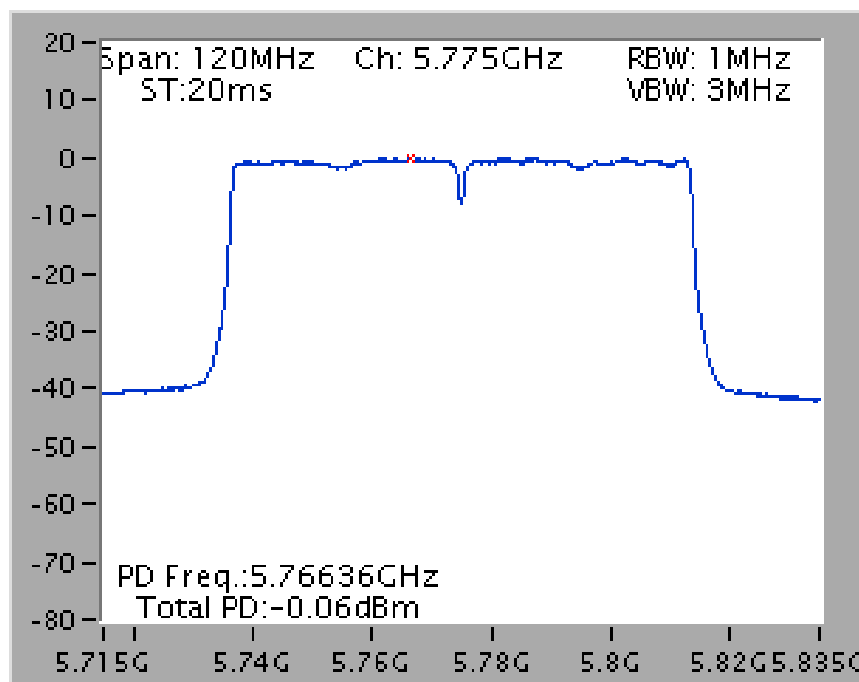


Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

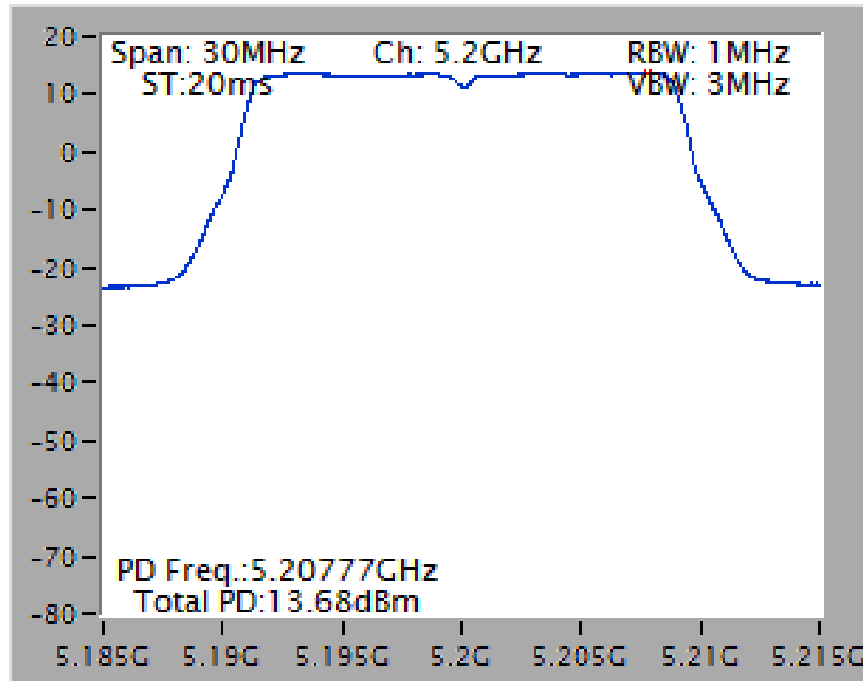


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

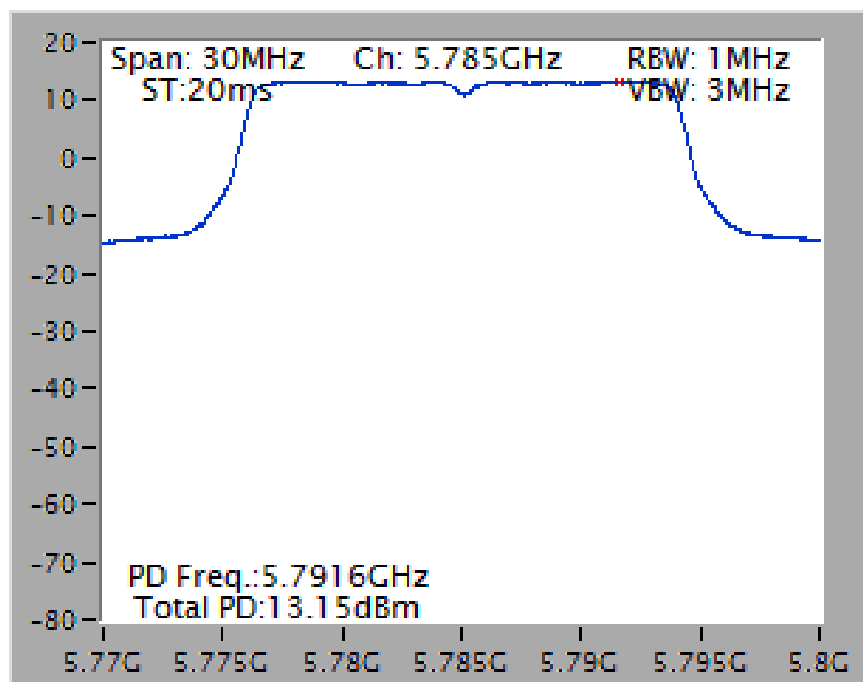


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

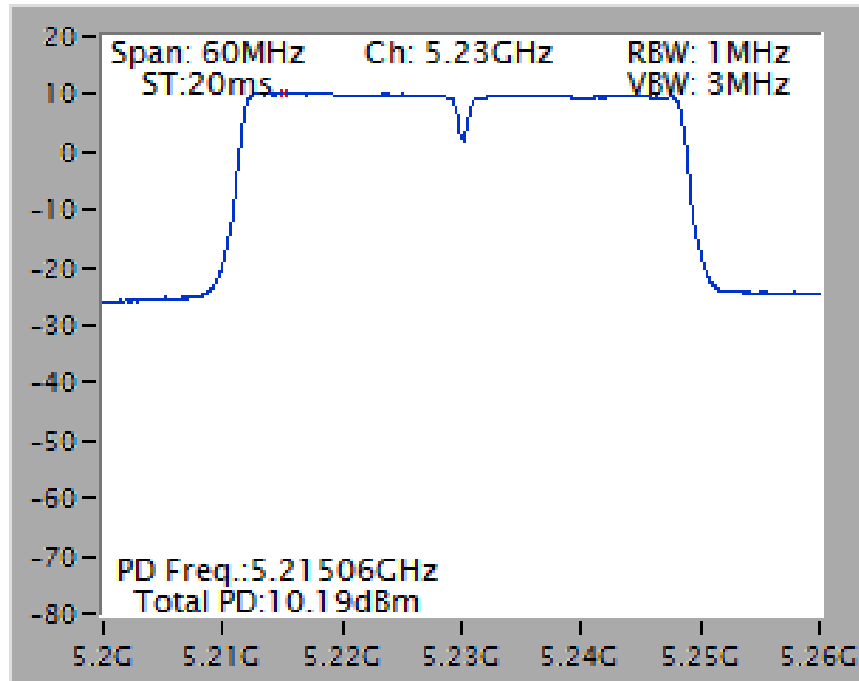


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

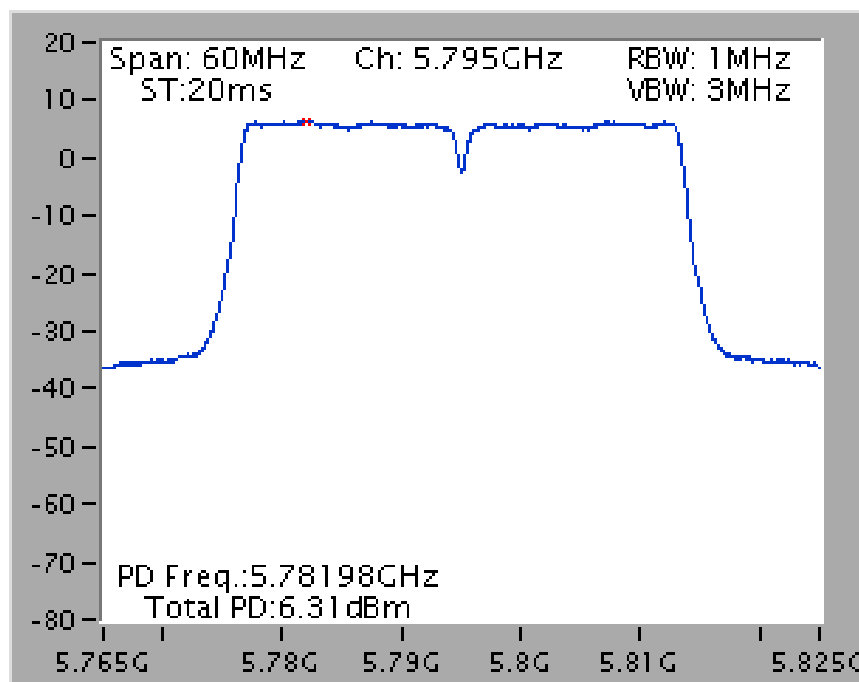

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

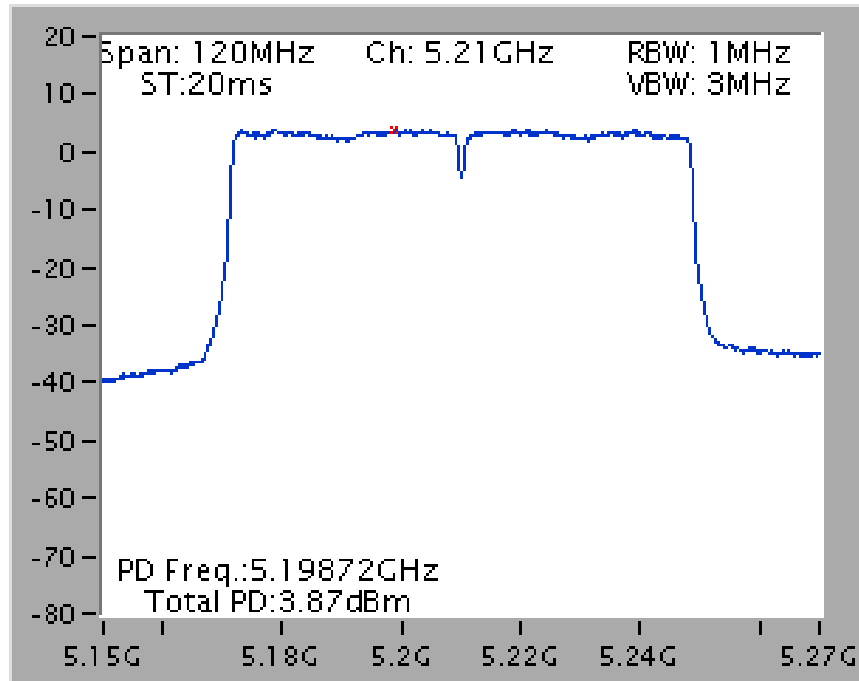


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

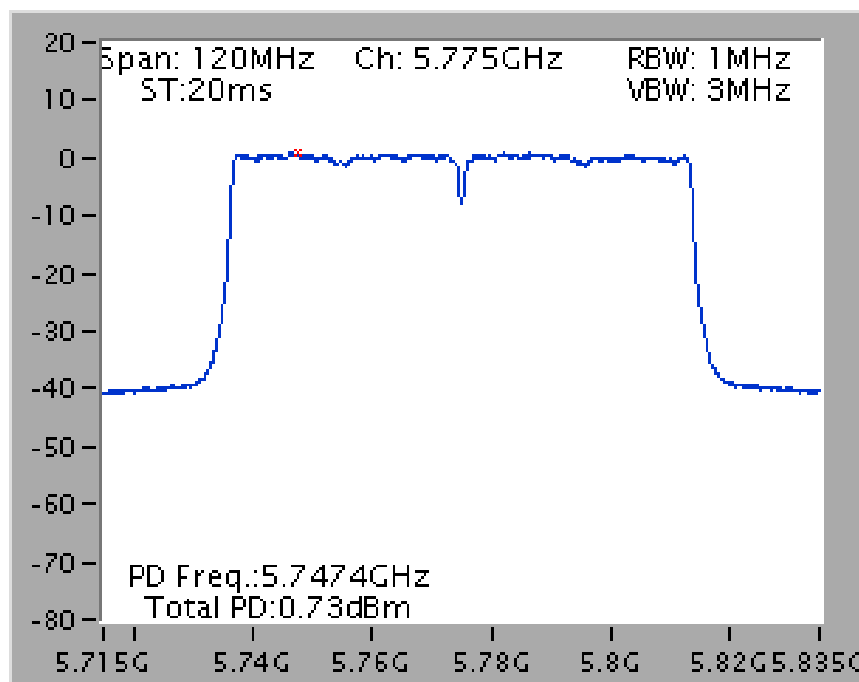


For indoor / outdoor use

Mode 3 (Set 6 Panel antenna / 2.66dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

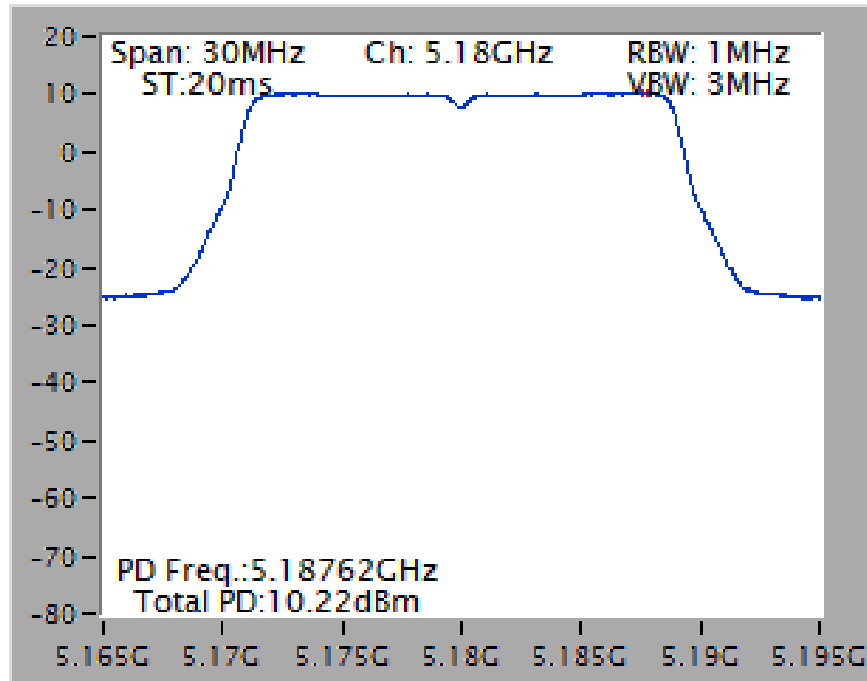


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

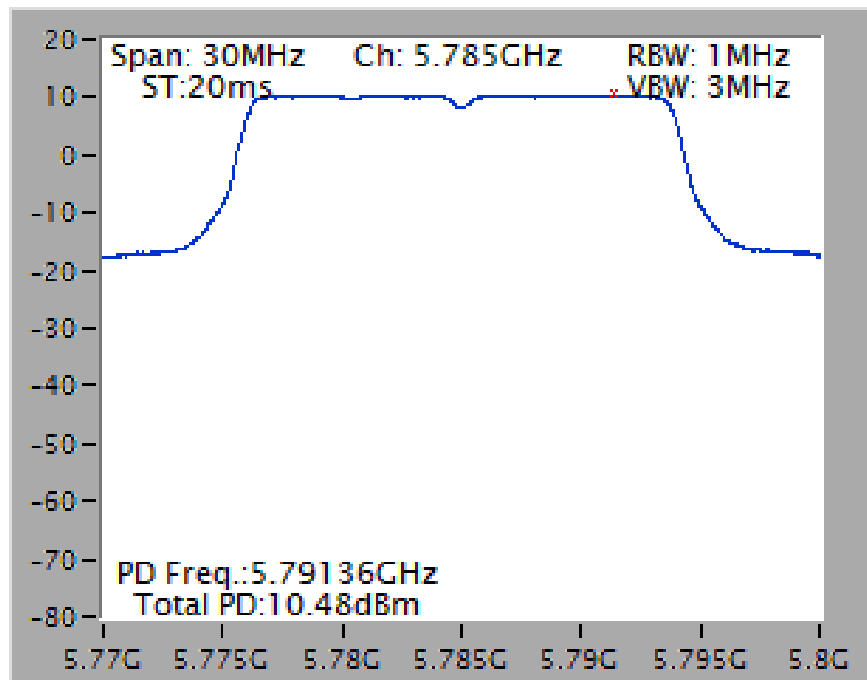


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

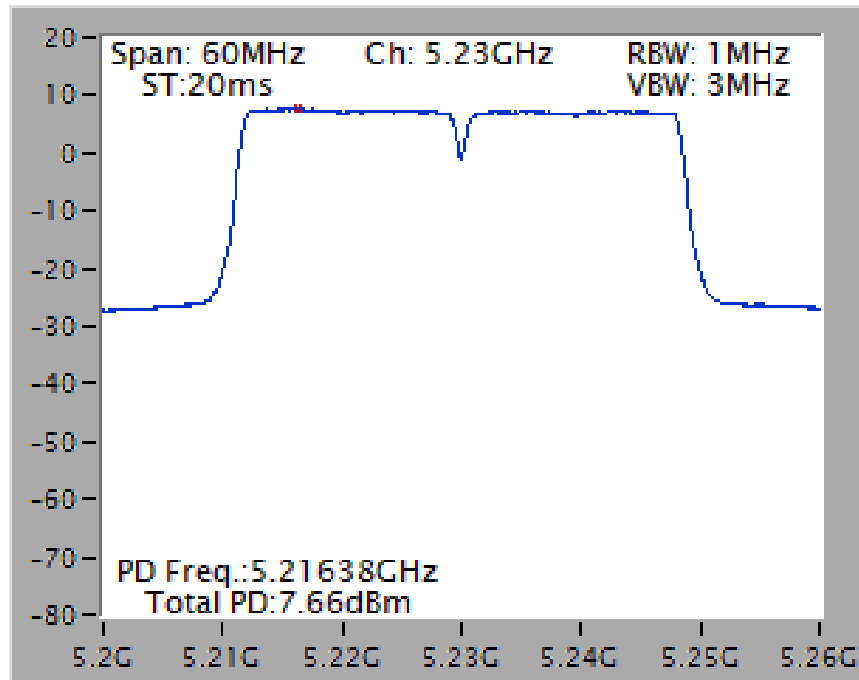


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

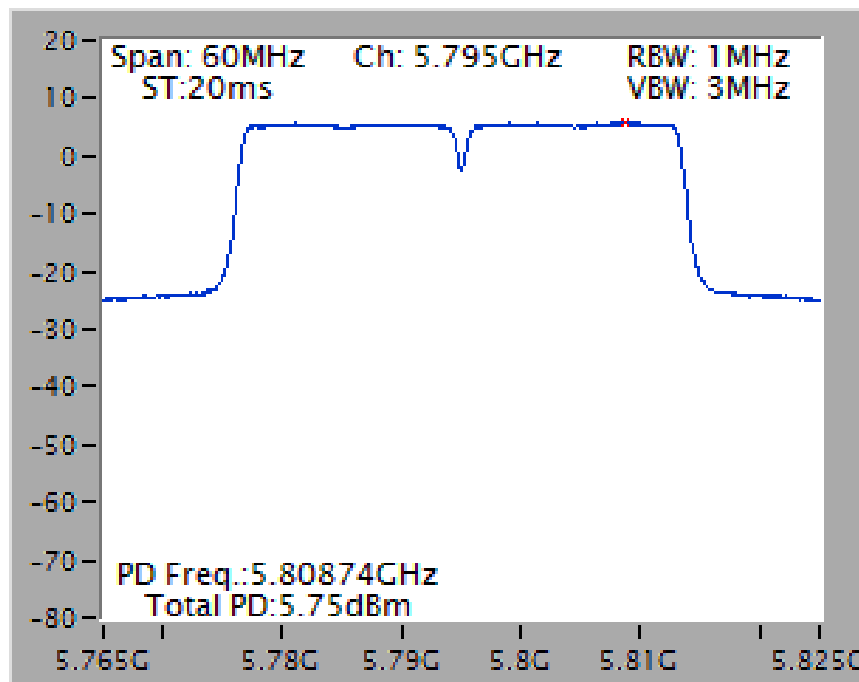

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

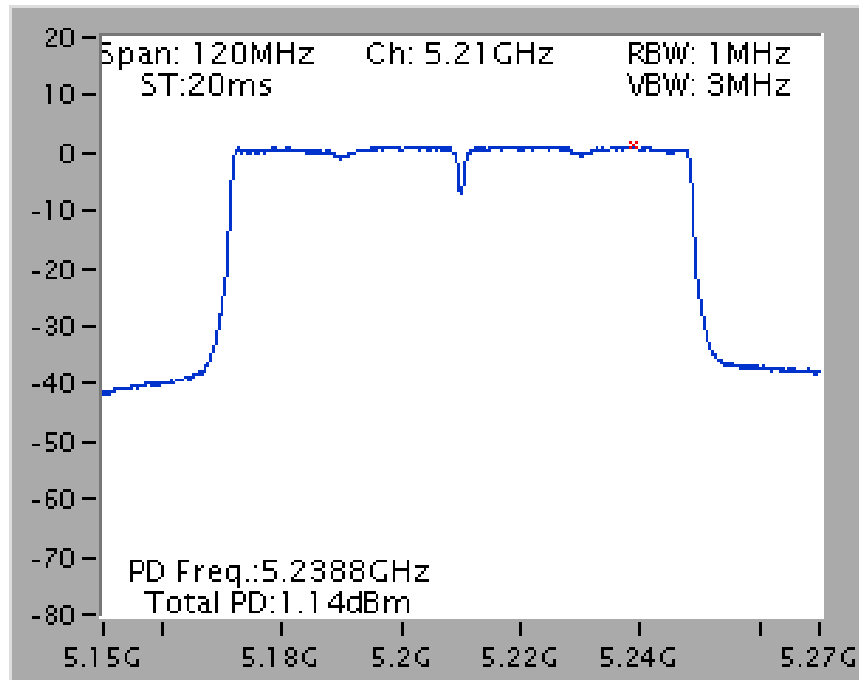


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

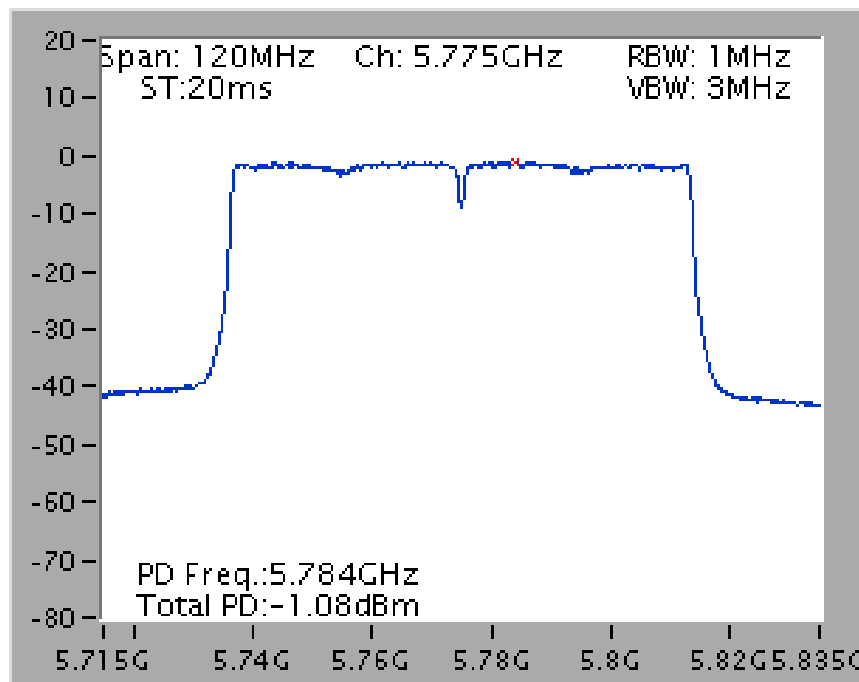


Mode 3 (Set 6 Panel antenna / 2.66dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5240 MHz

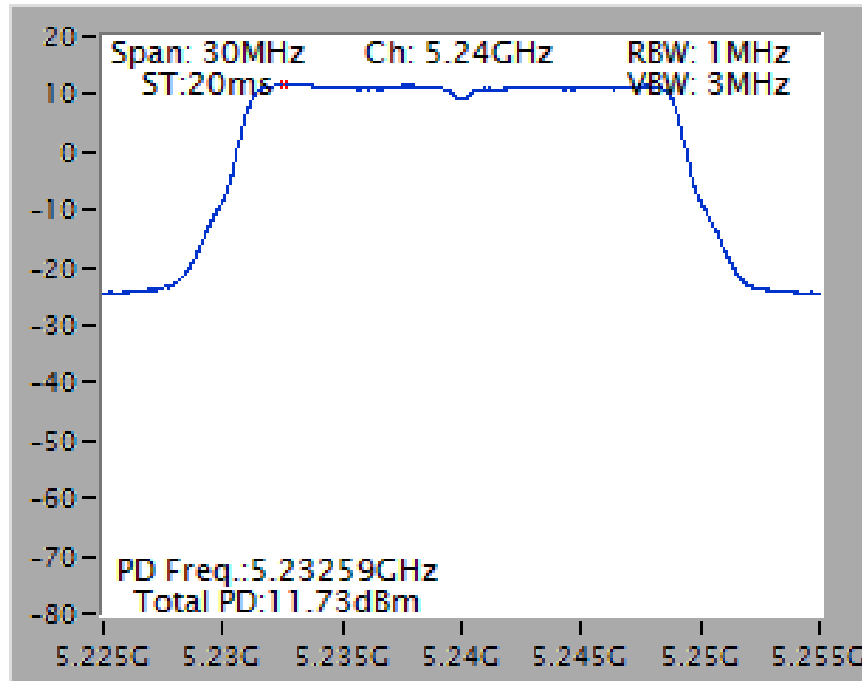


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

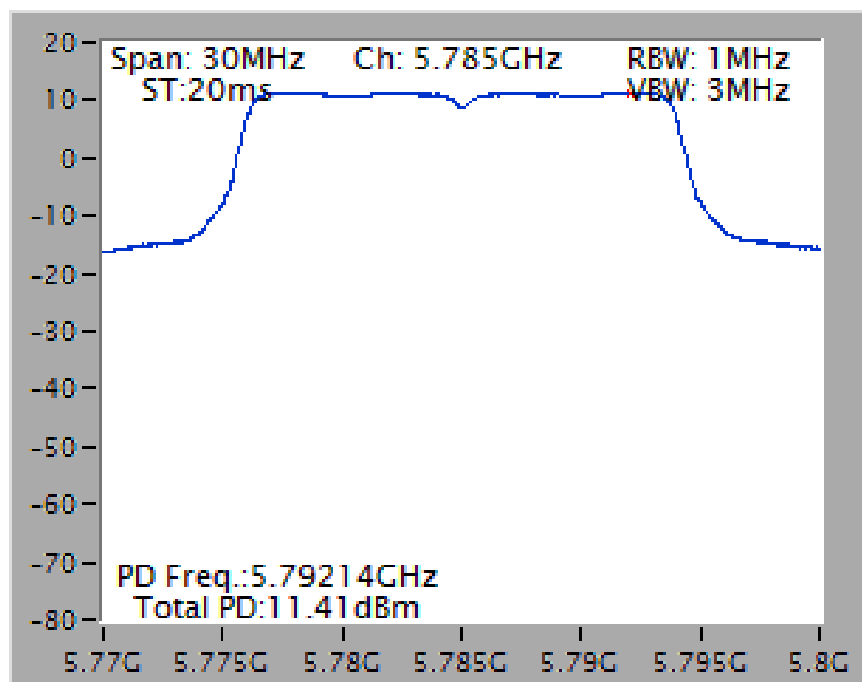


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

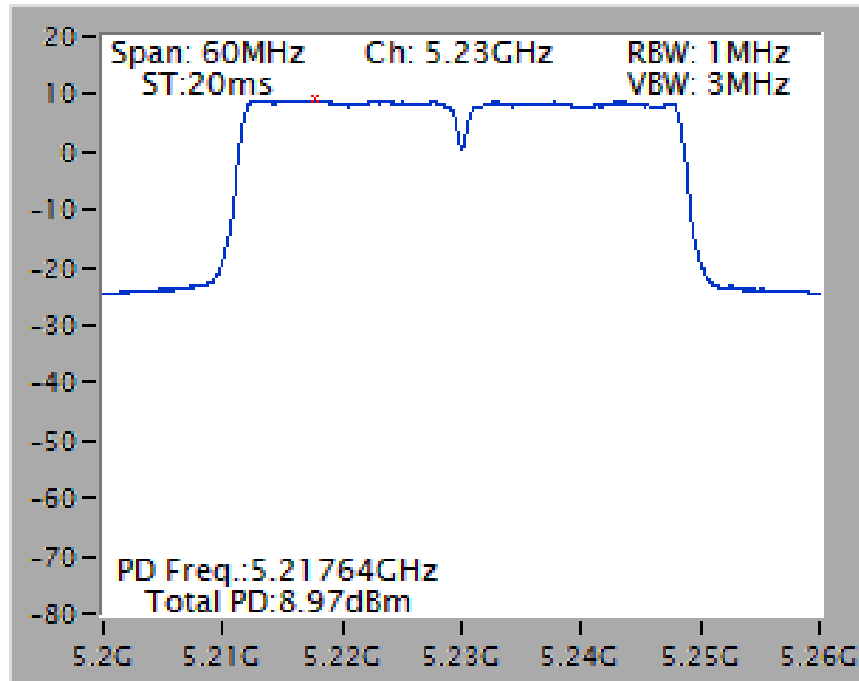


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

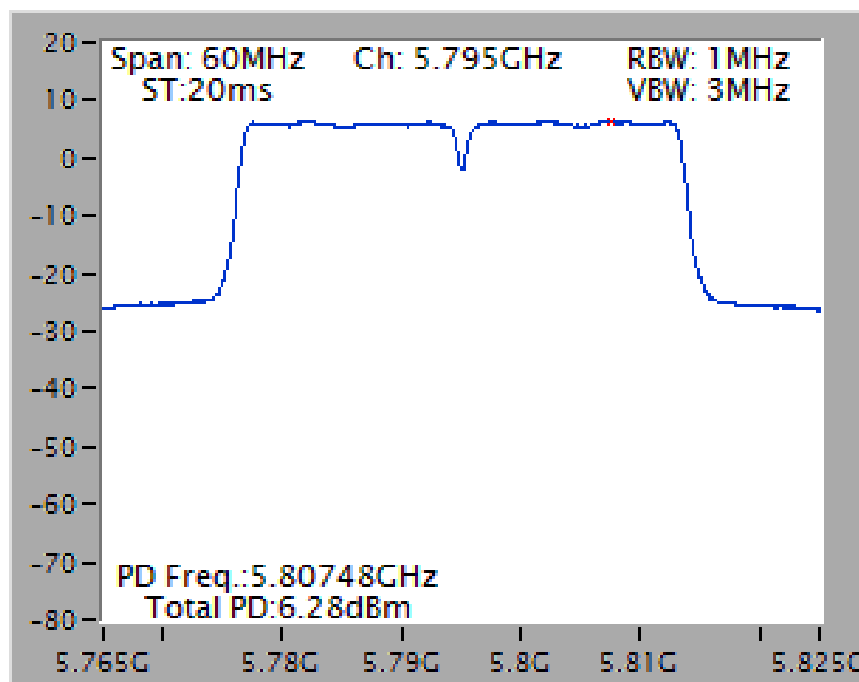

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

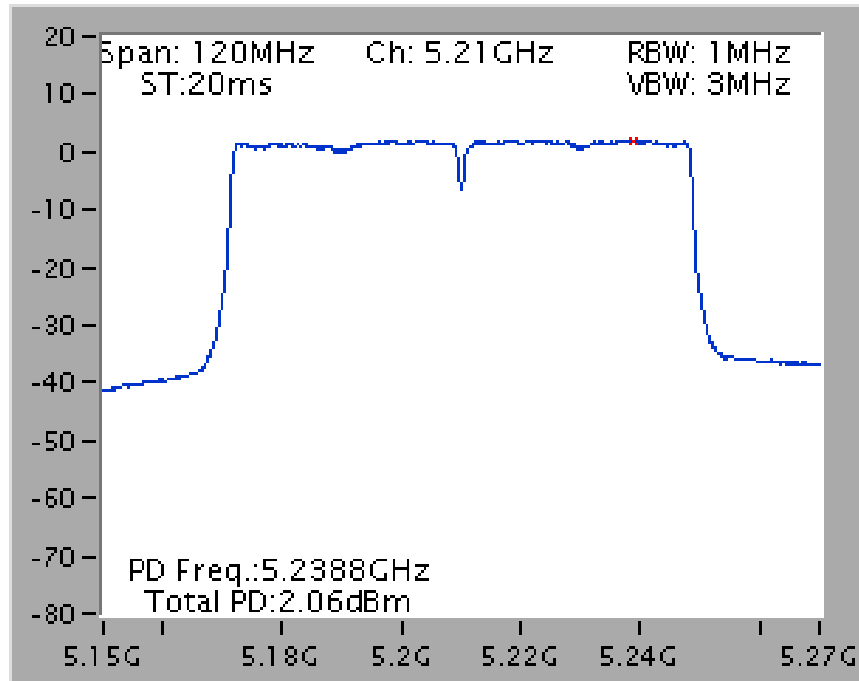


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

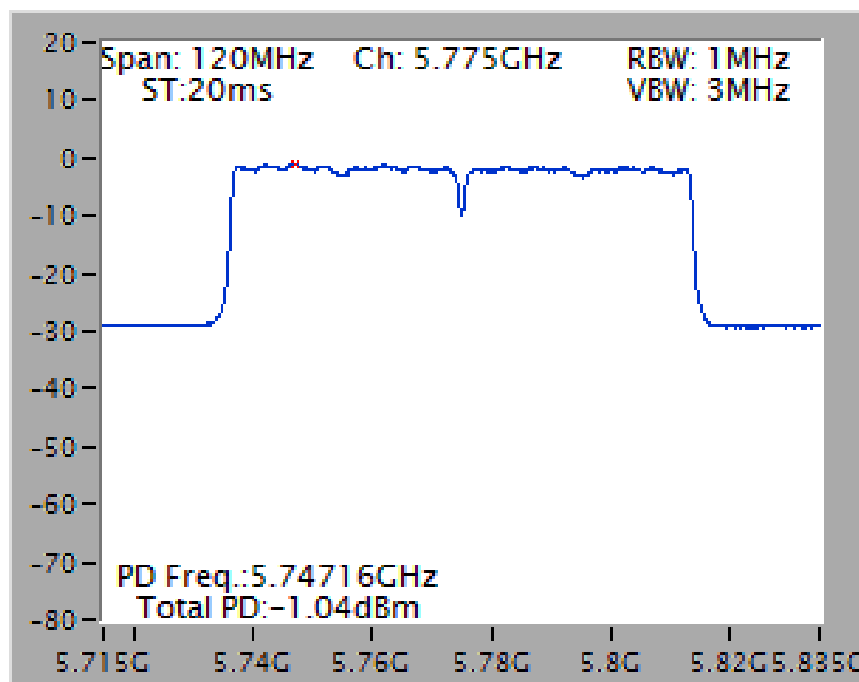


Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

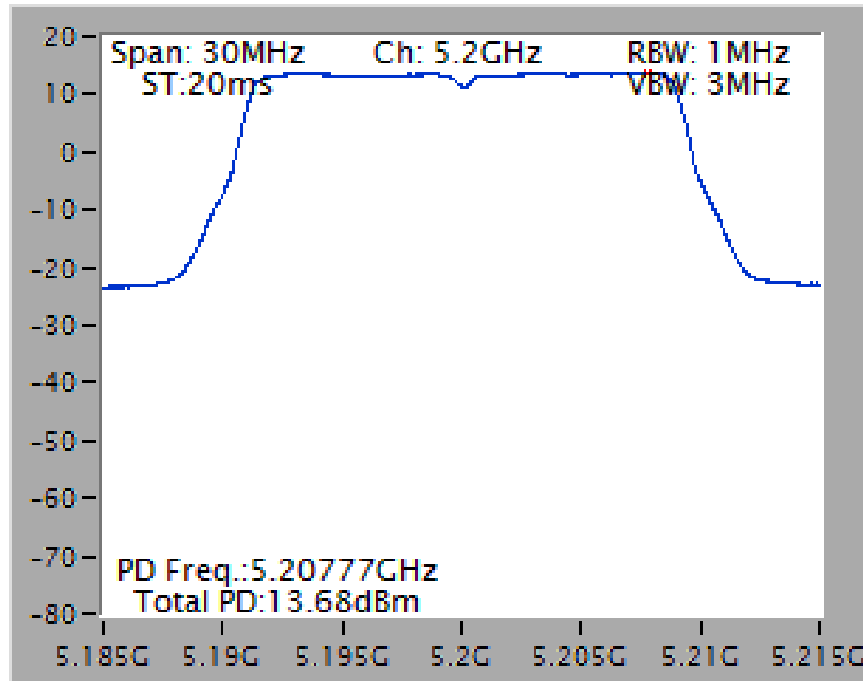


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

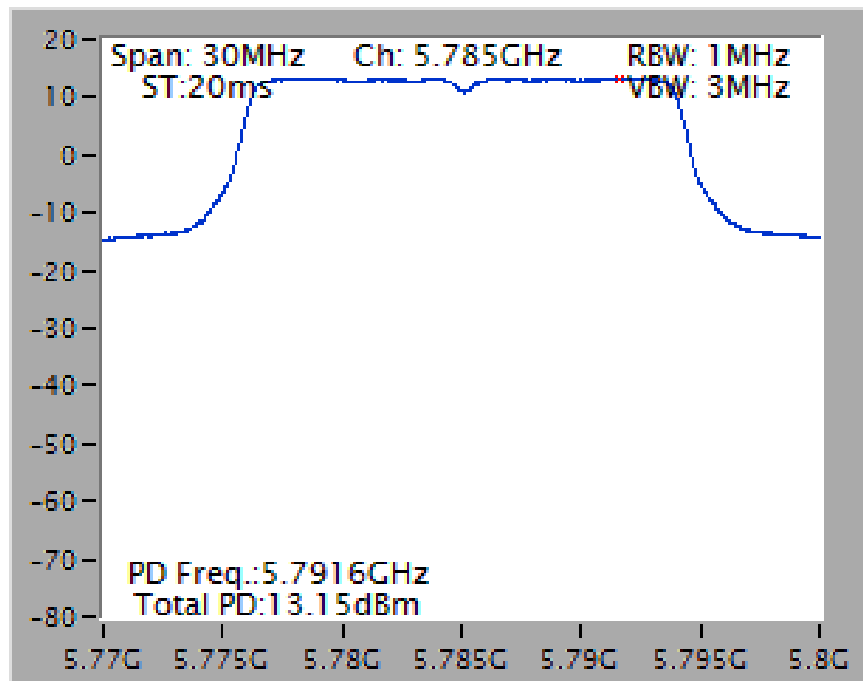


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

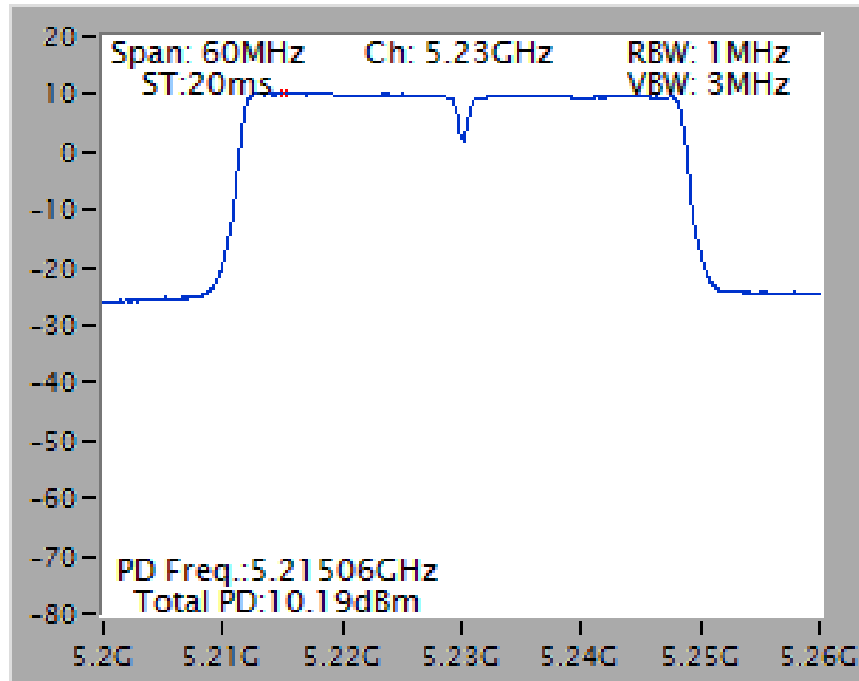


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

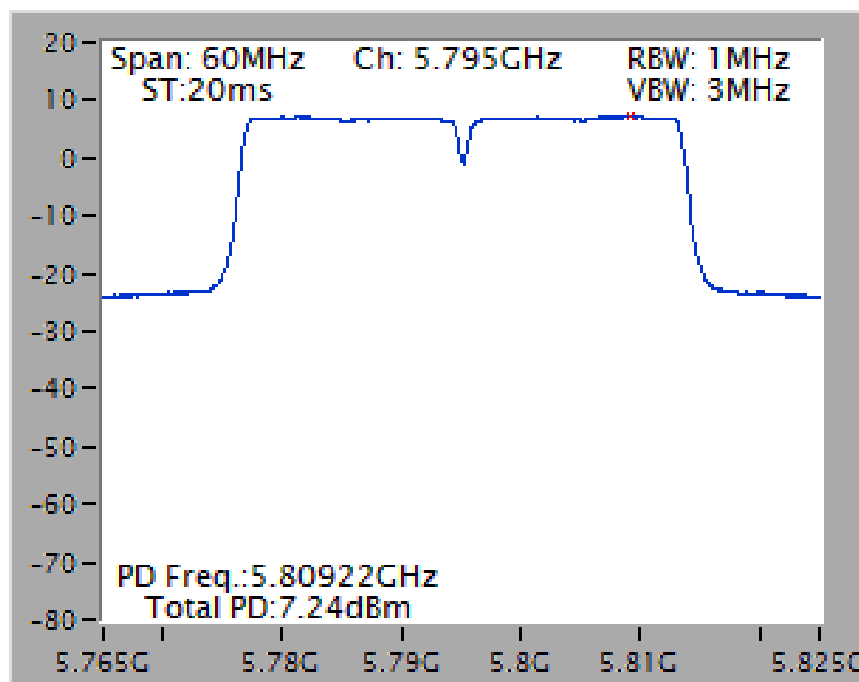

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

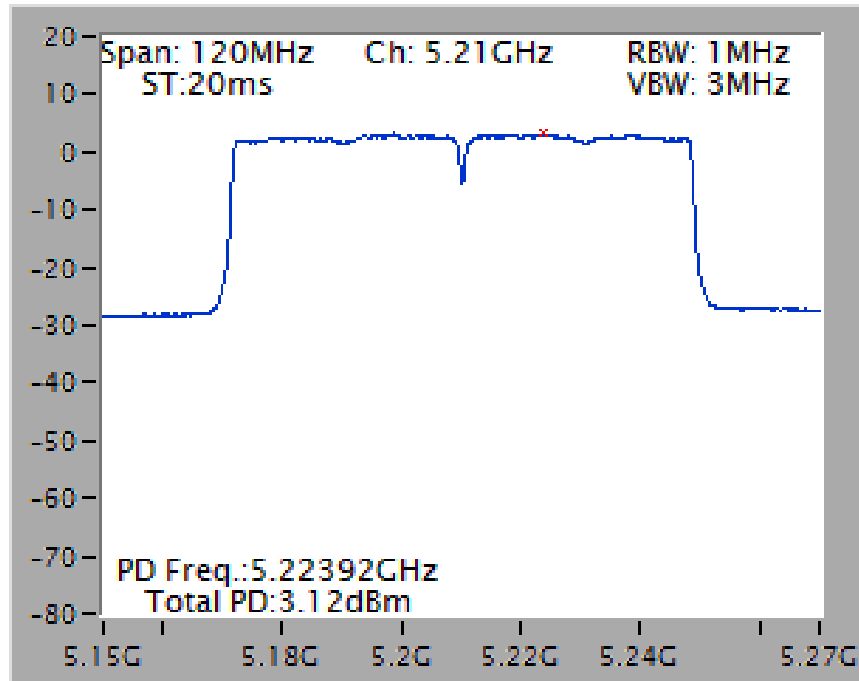


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

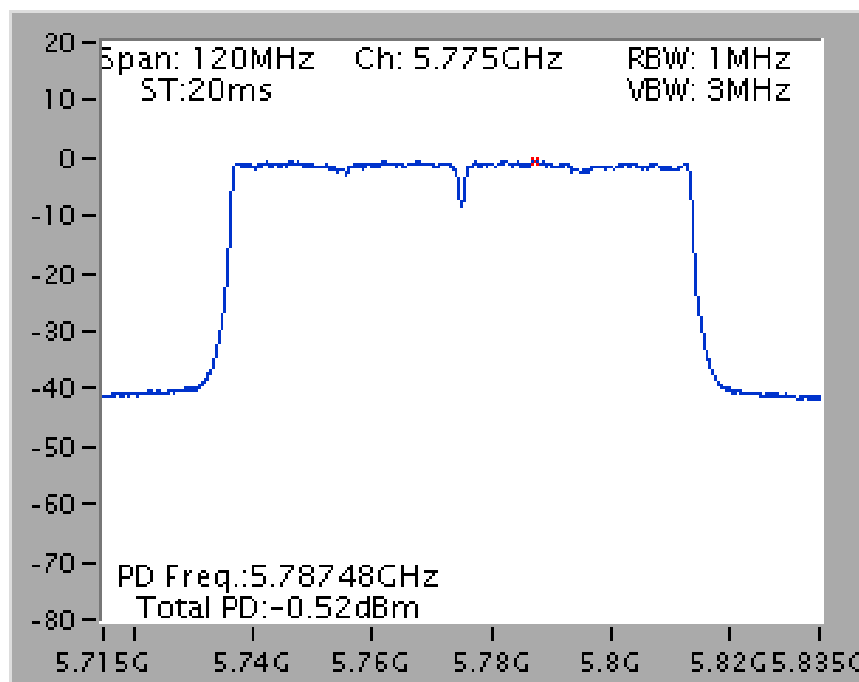


For indoor / outdoor use

Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

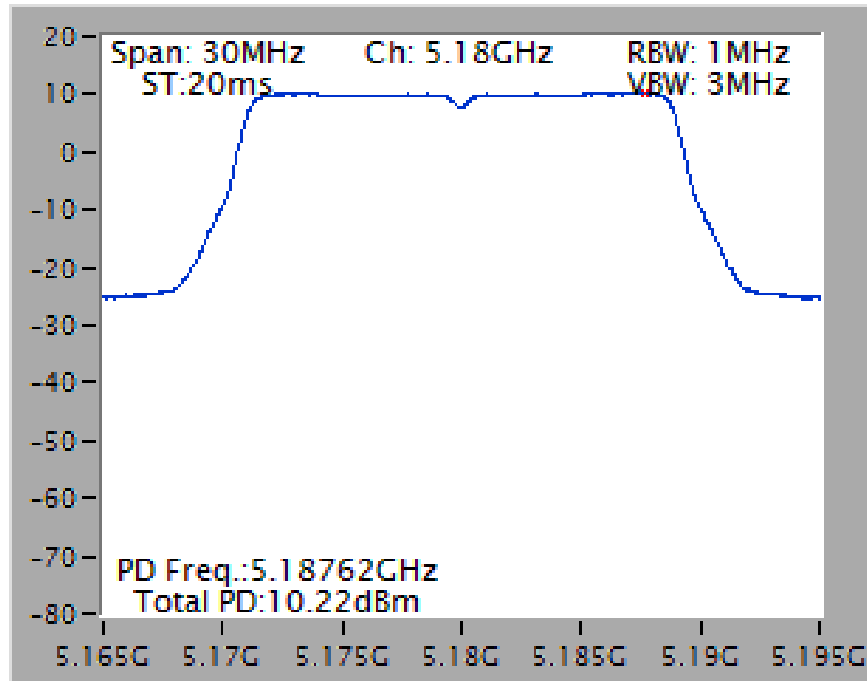


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

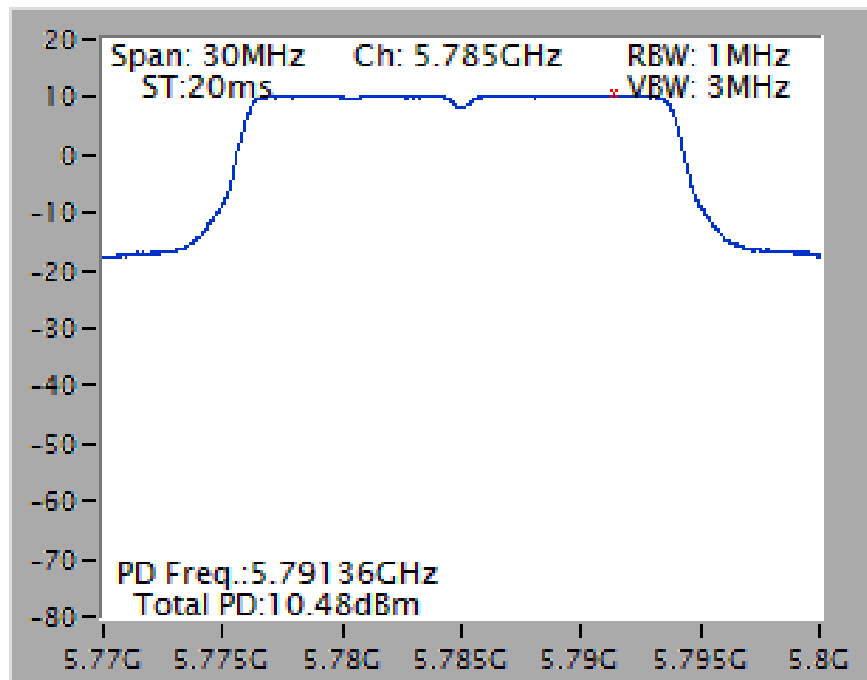


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

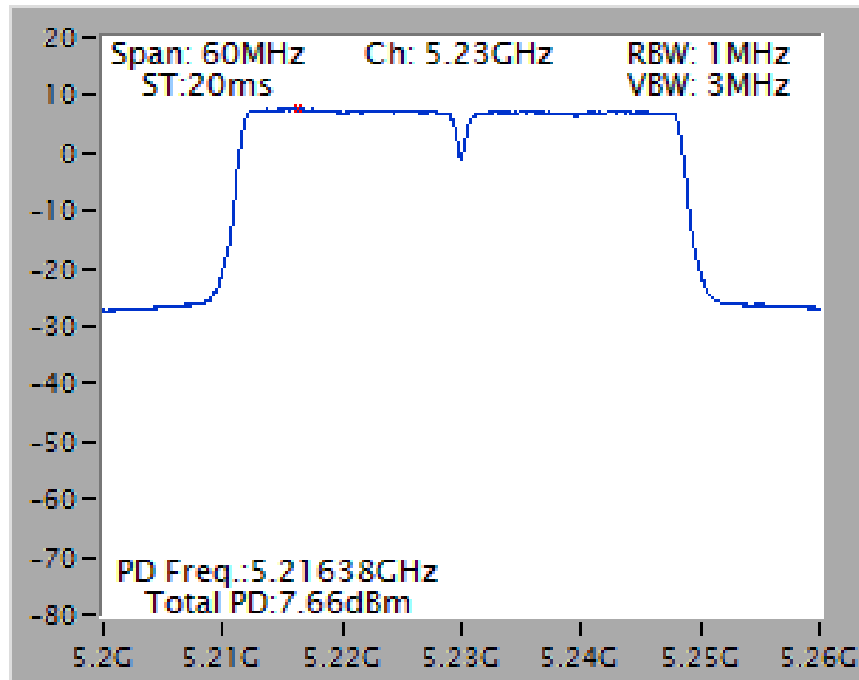


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

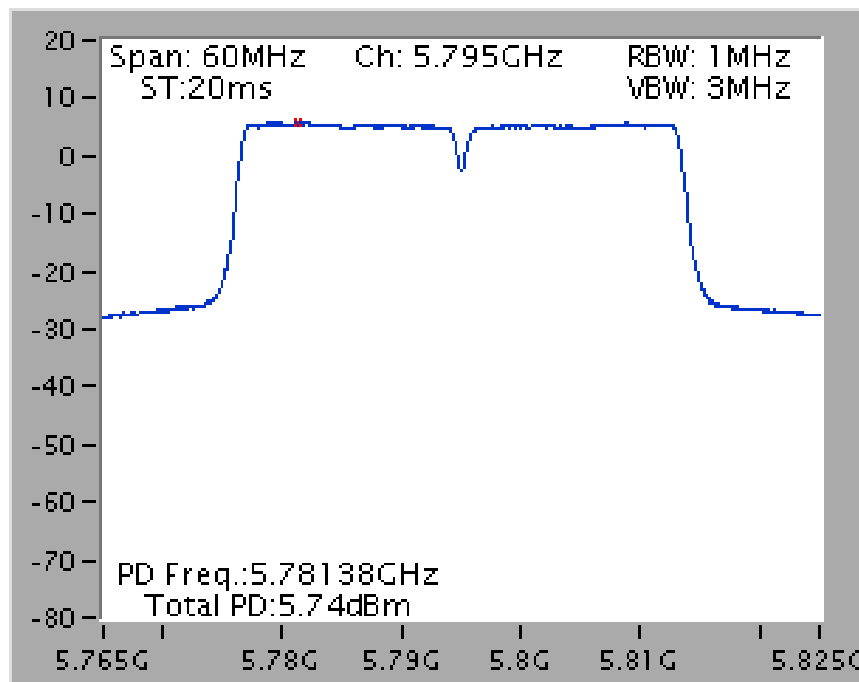

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

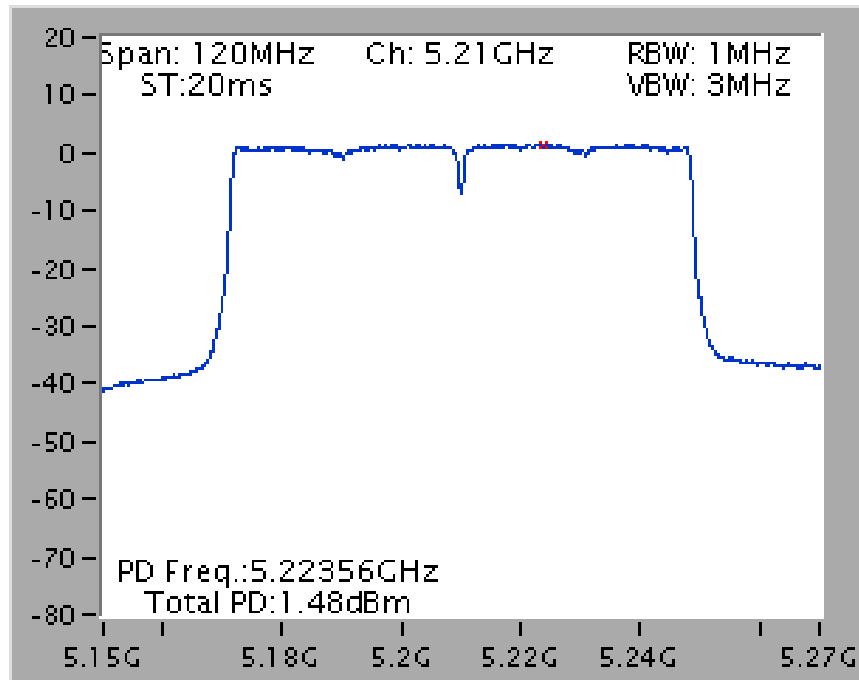


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

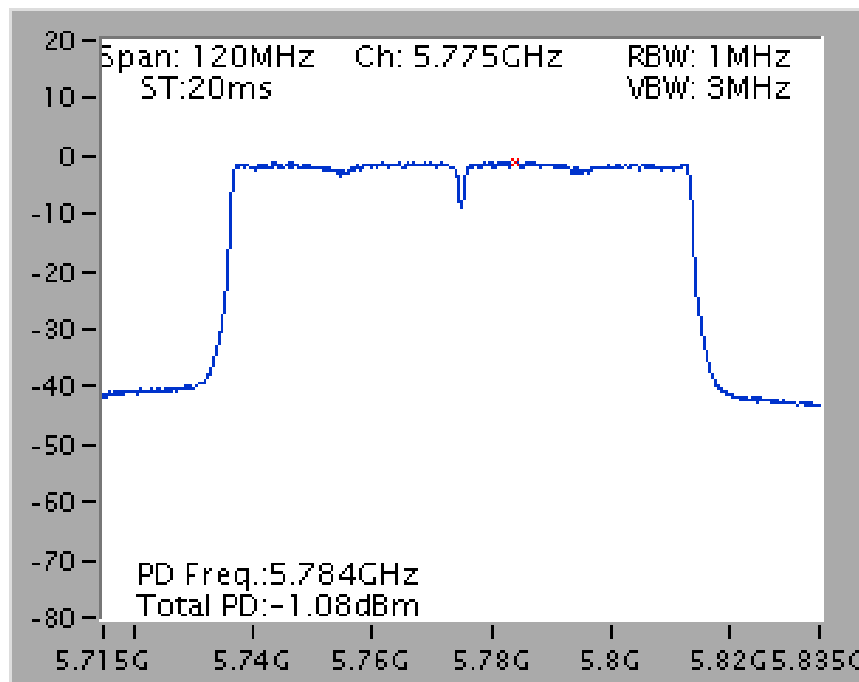


Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5240 MHz

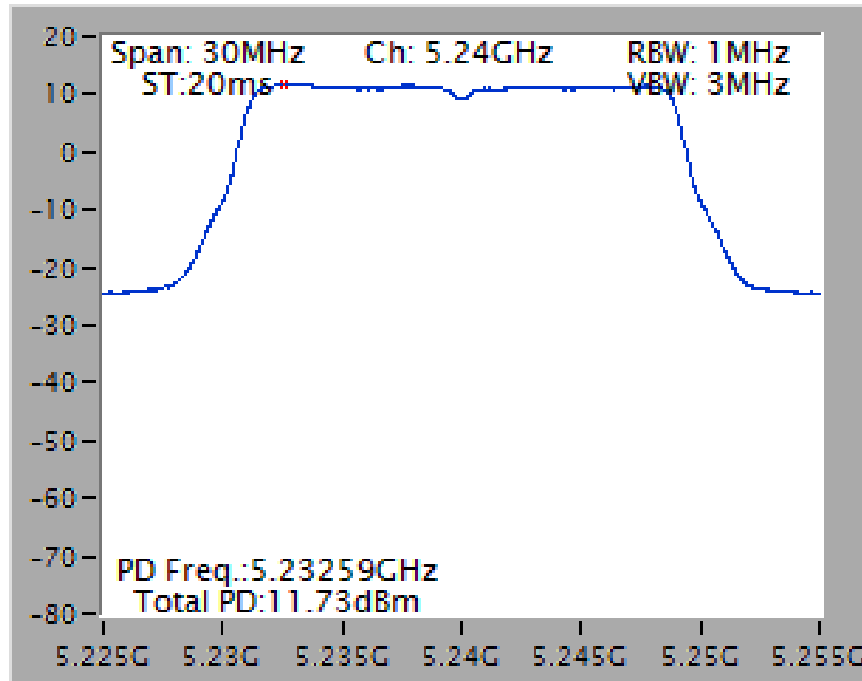


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

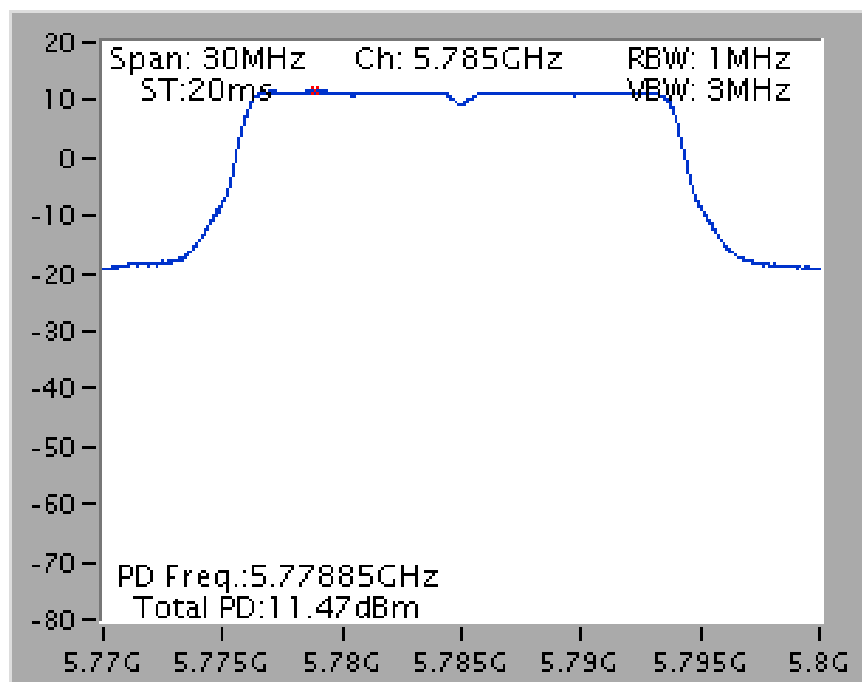


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

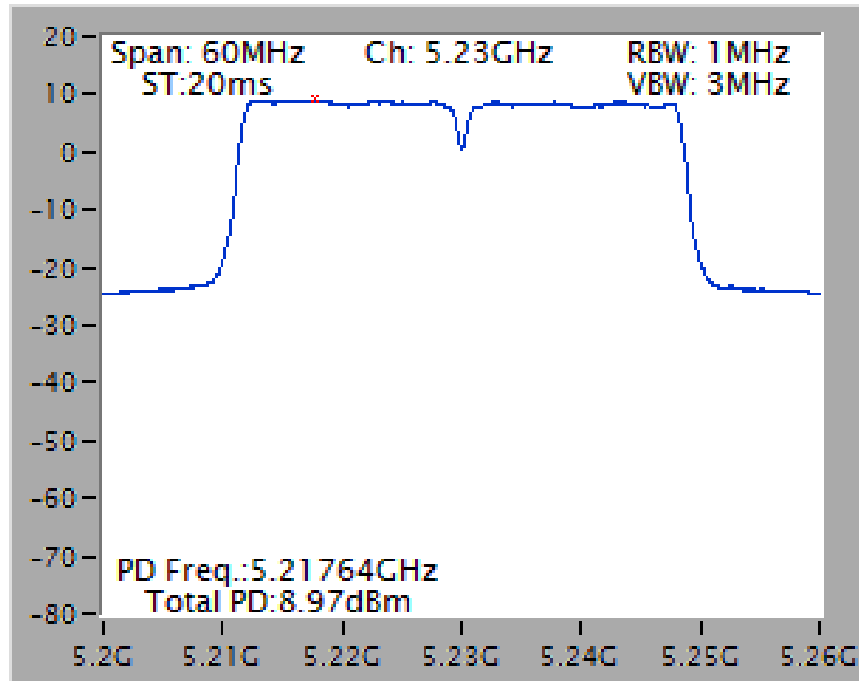


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

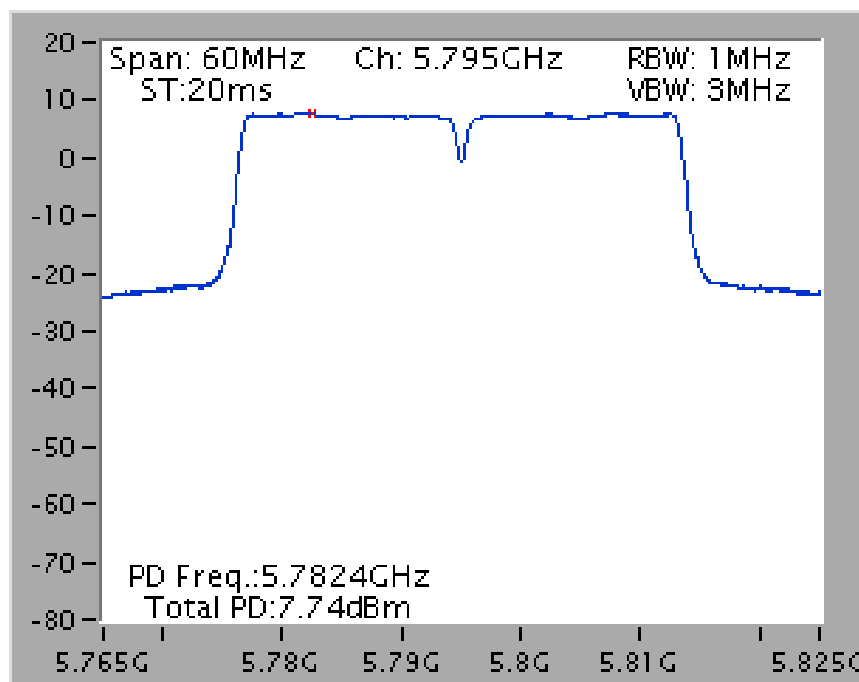

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

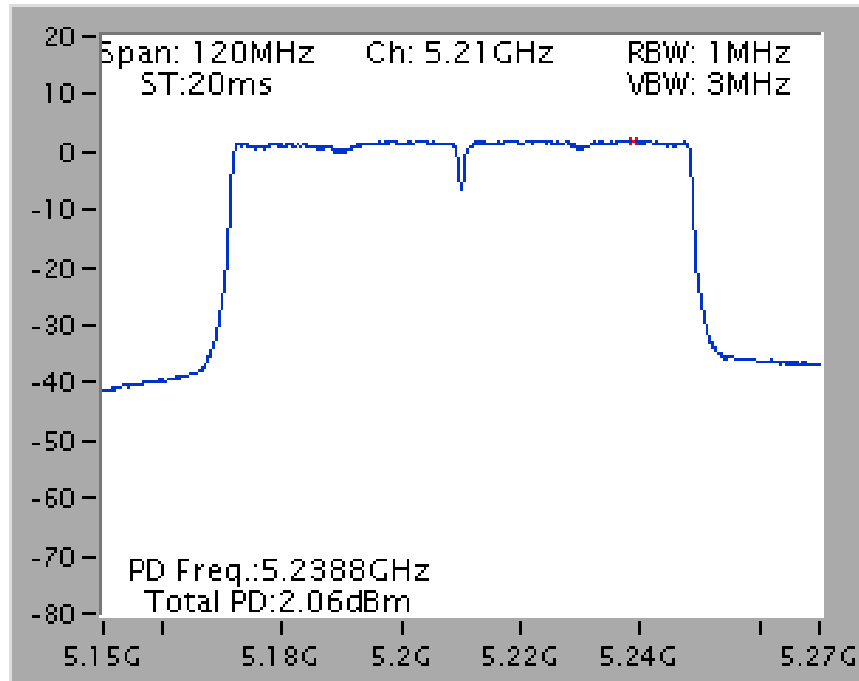


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

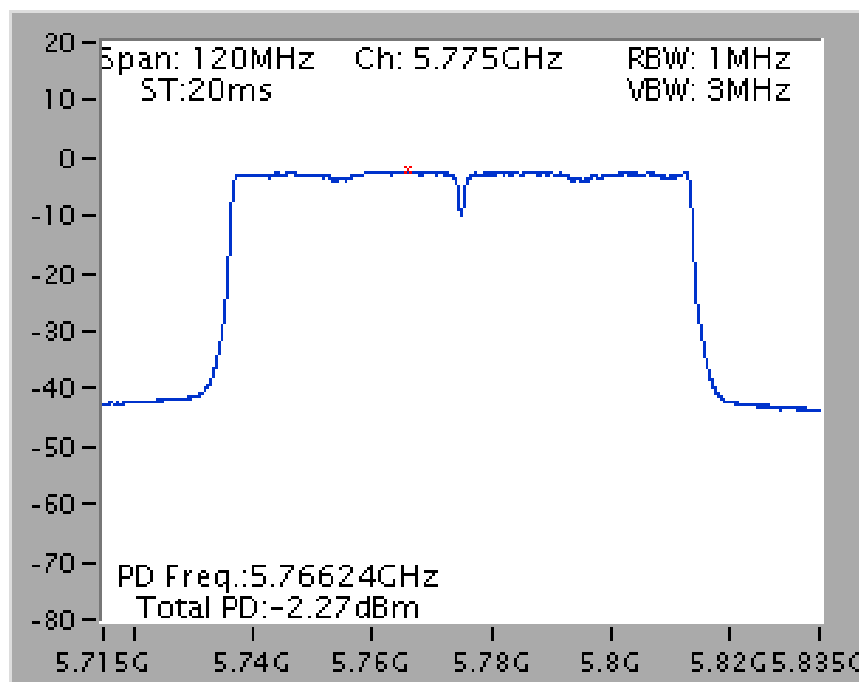


Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

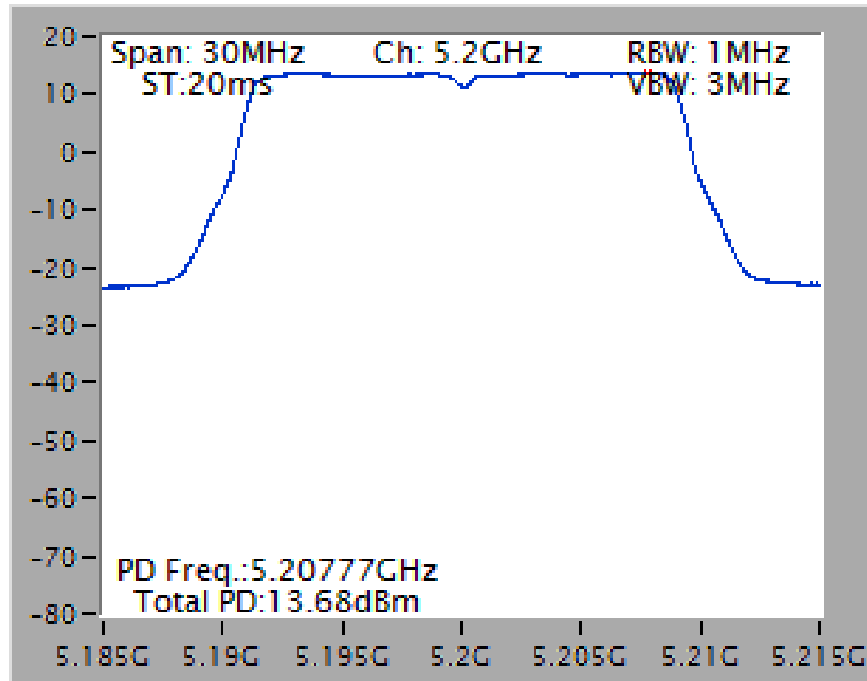


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

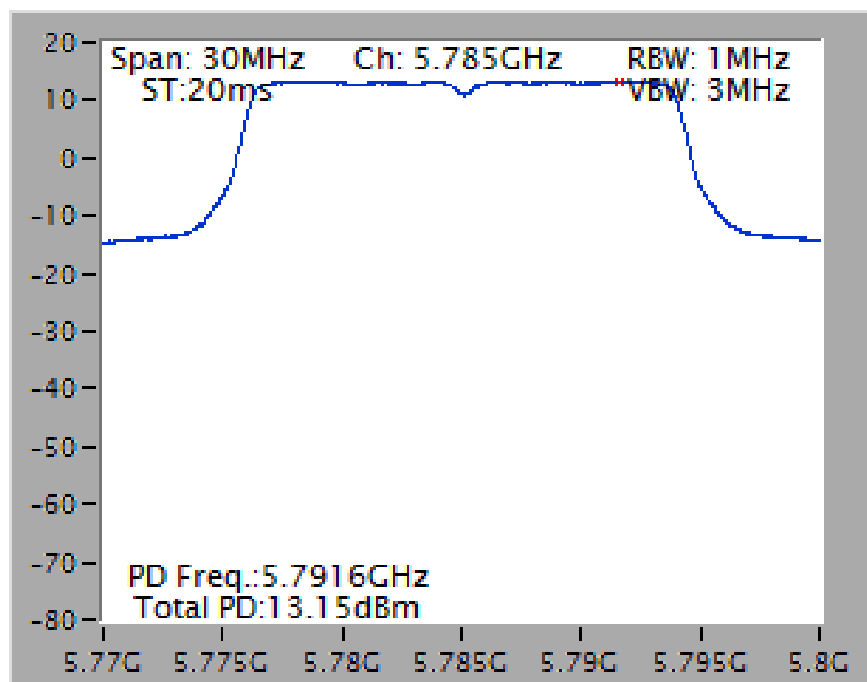


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

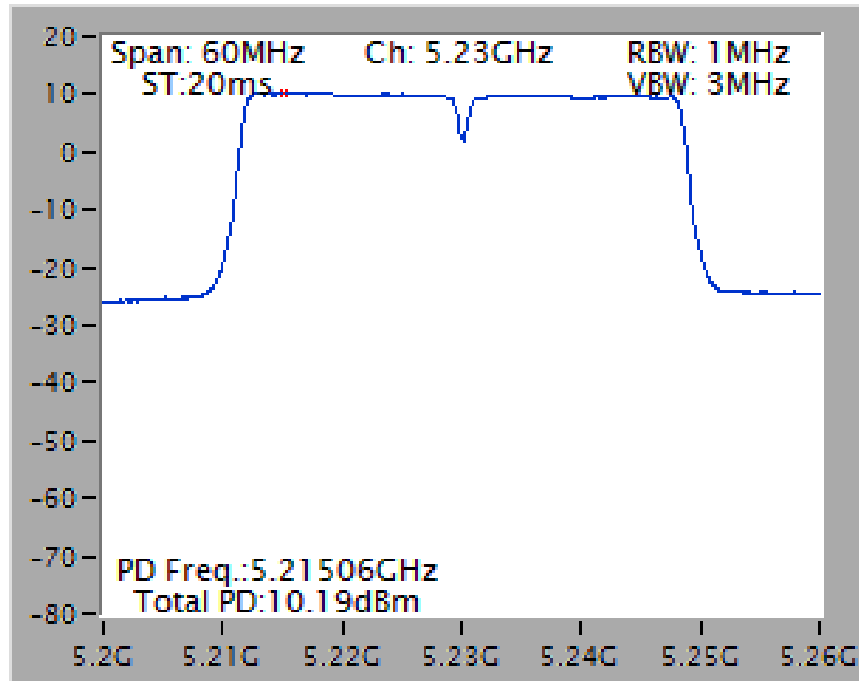


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

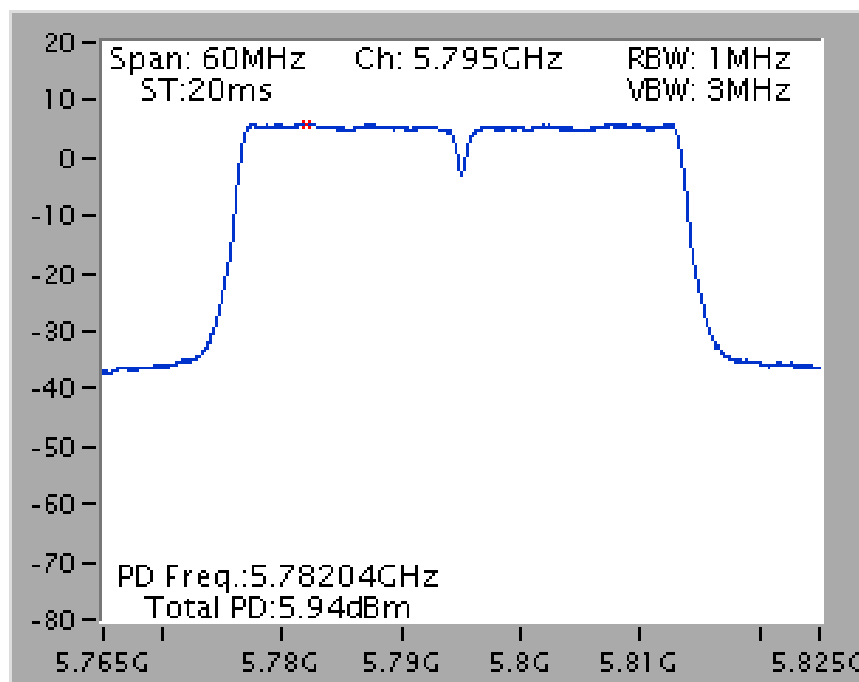

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

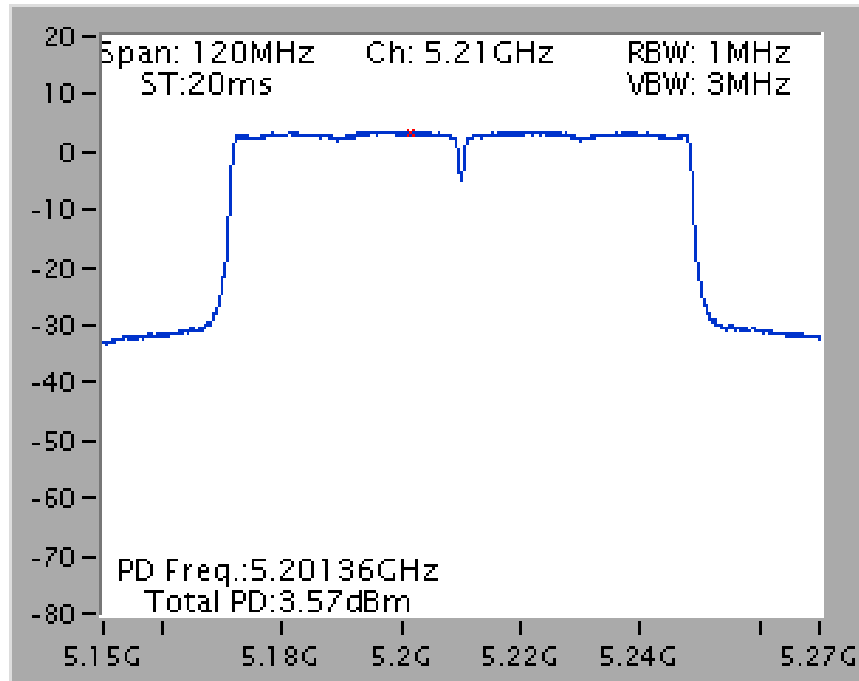


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

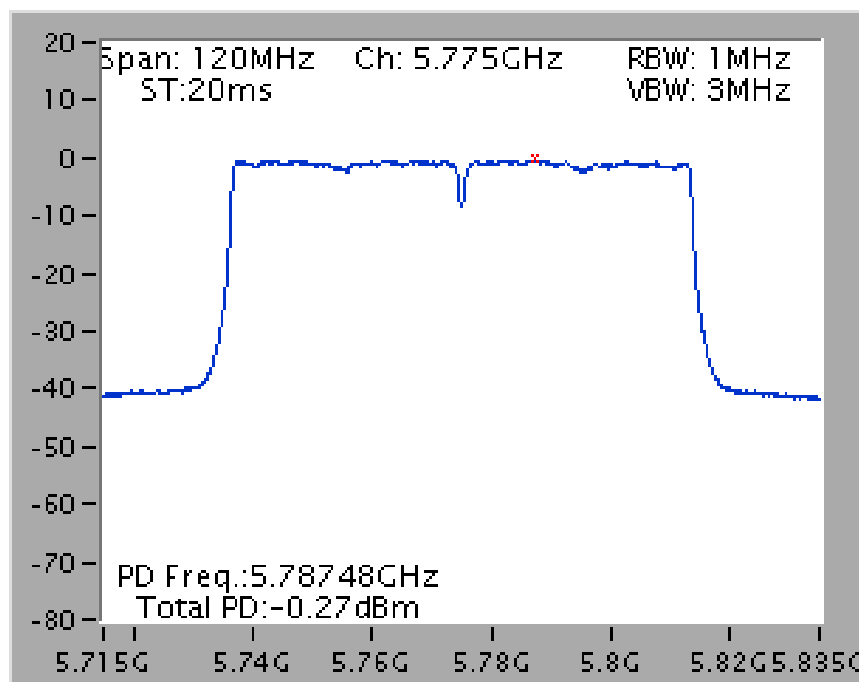


For indoor use

Mode 5 (Set 8 Patch antenna / 3.26dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

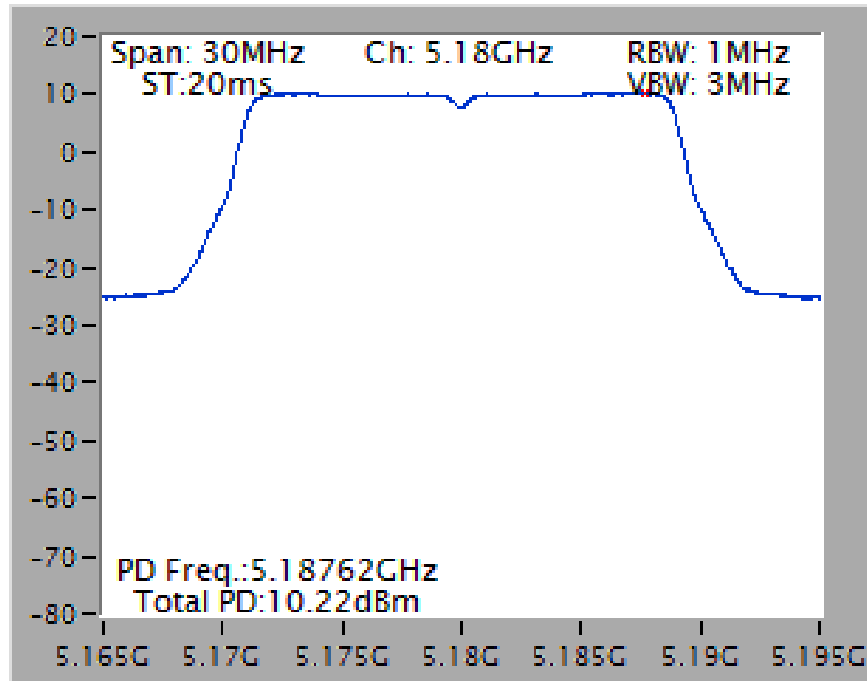


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

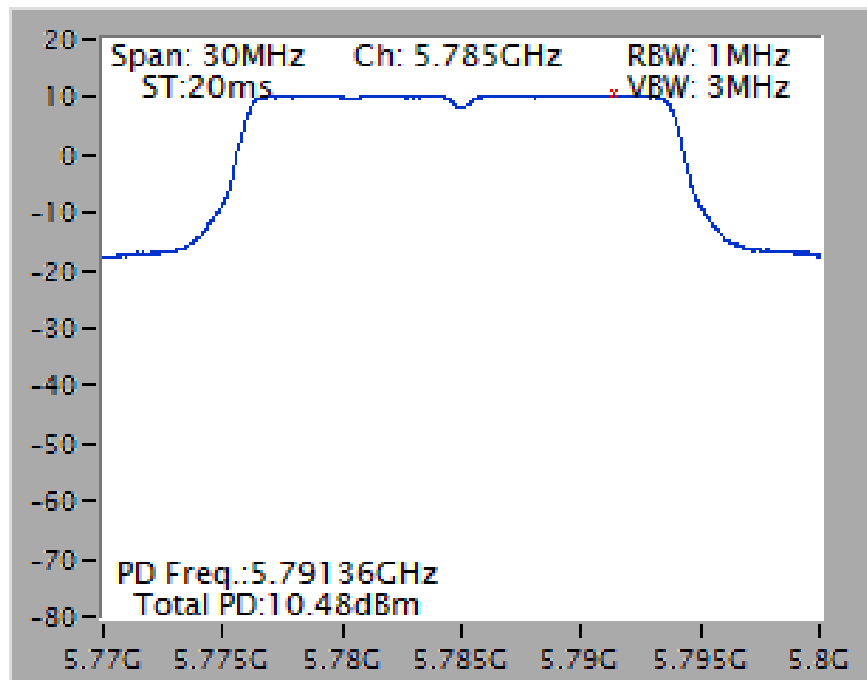


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

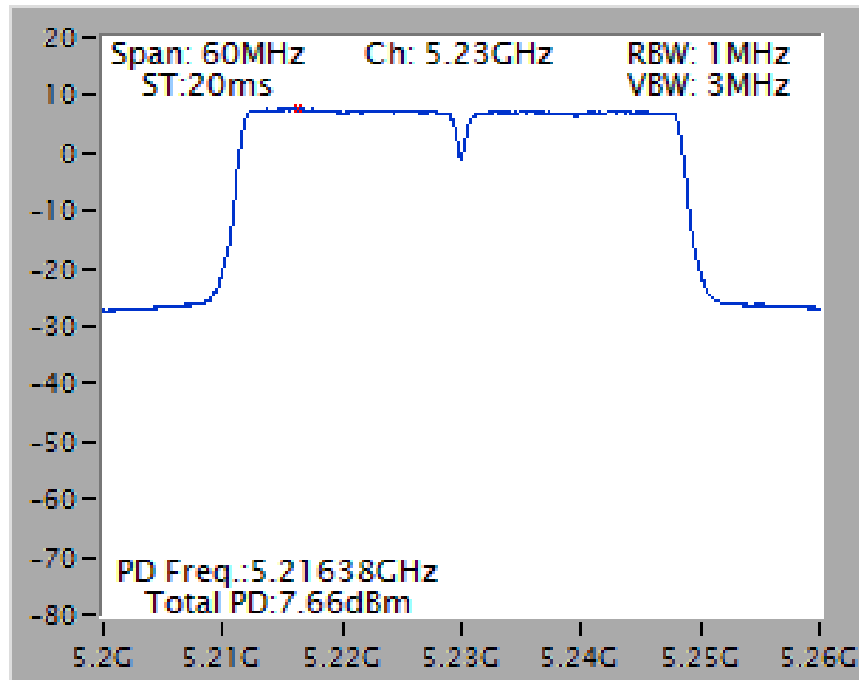


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

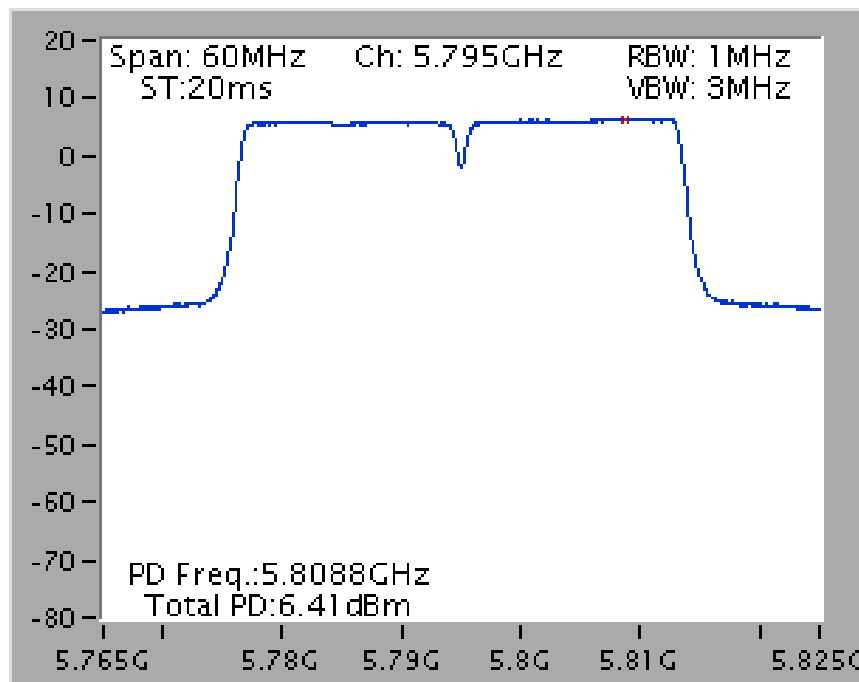

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

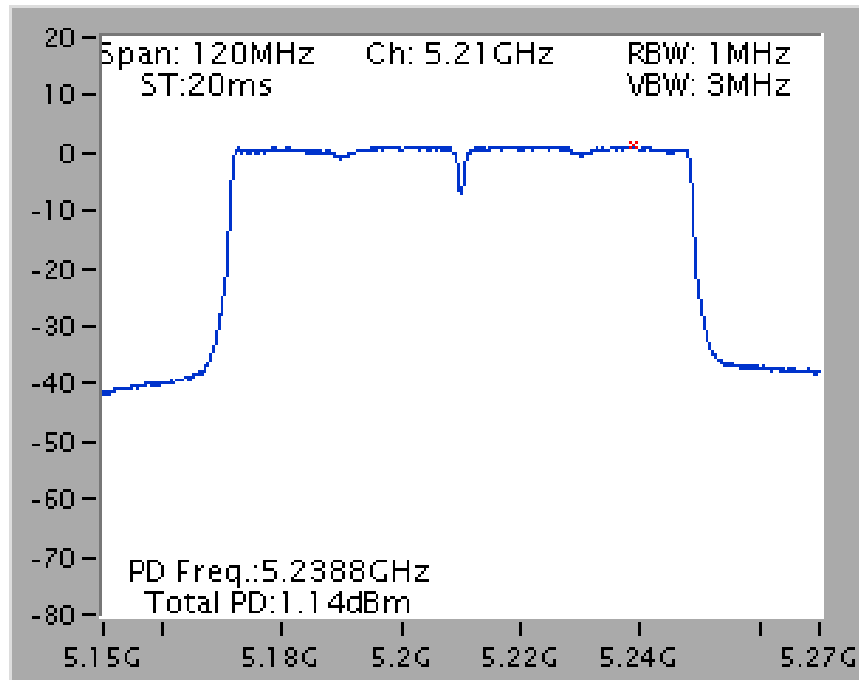


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

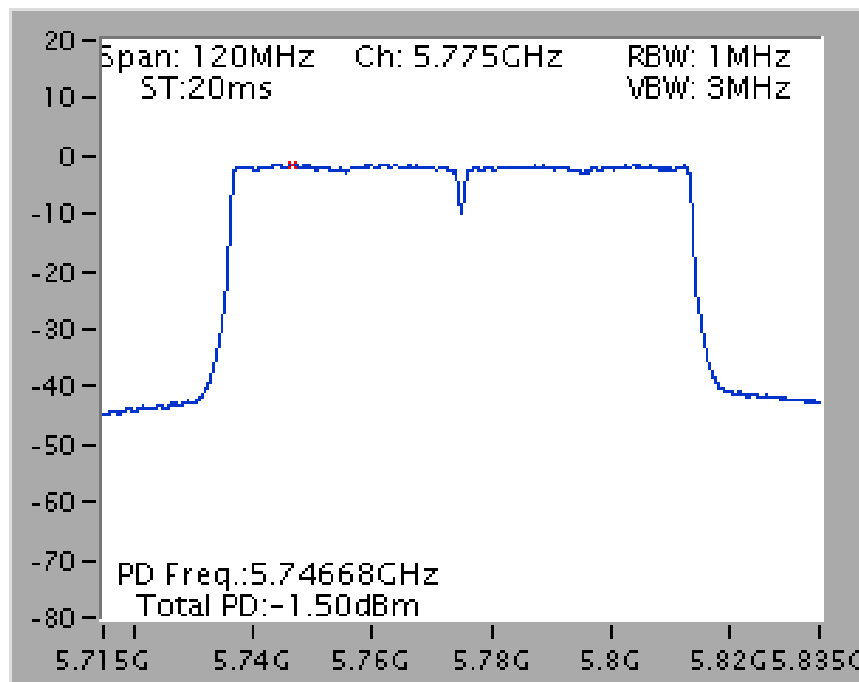


Mode 5 (Set 8 Patch antenna / 3.26dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5200 MHz

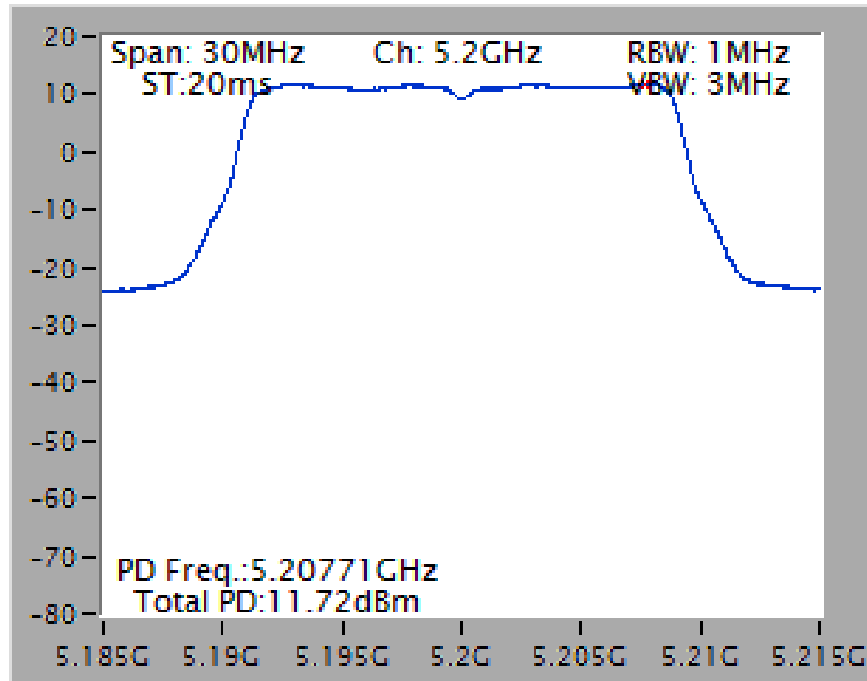


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

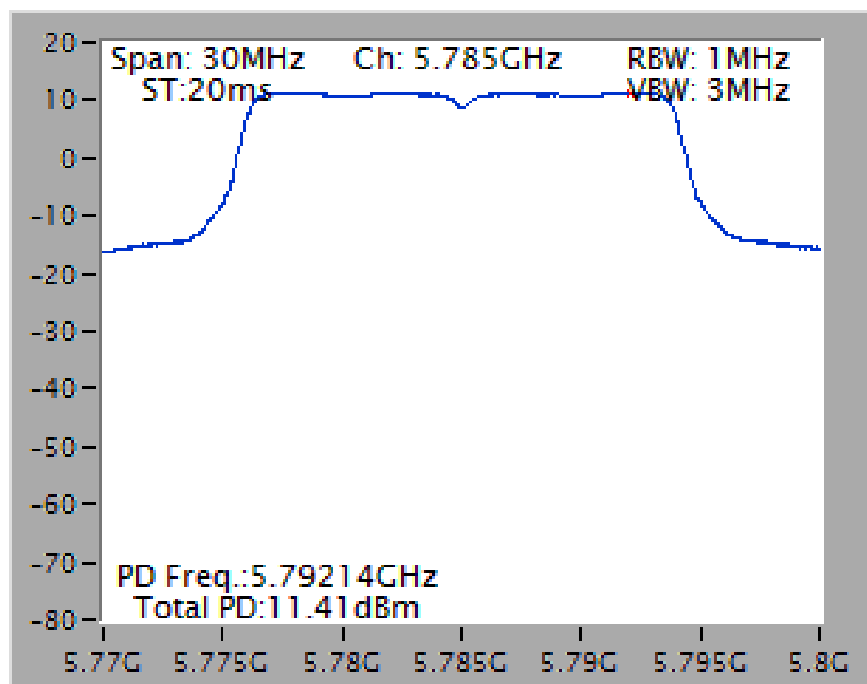


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

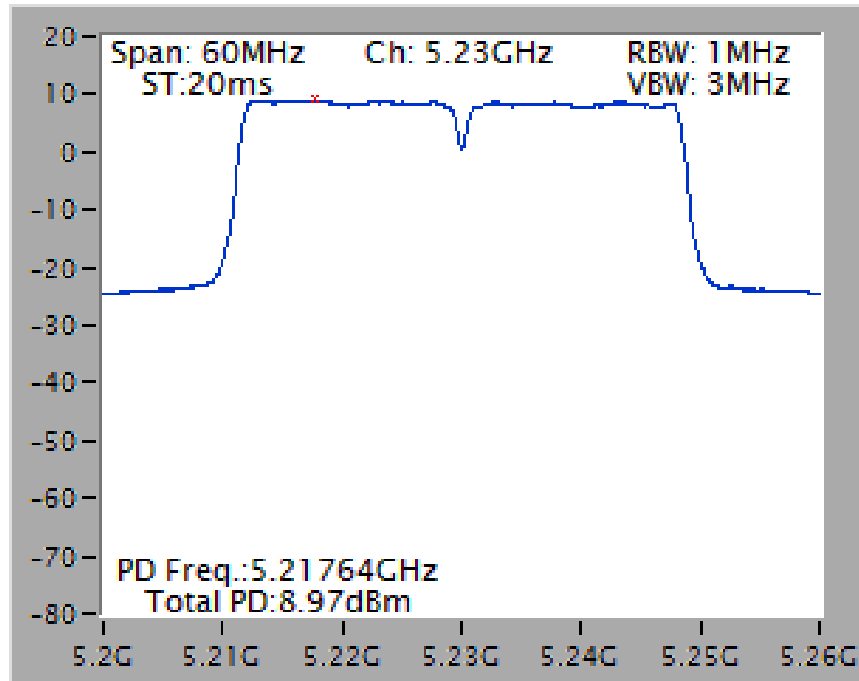


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

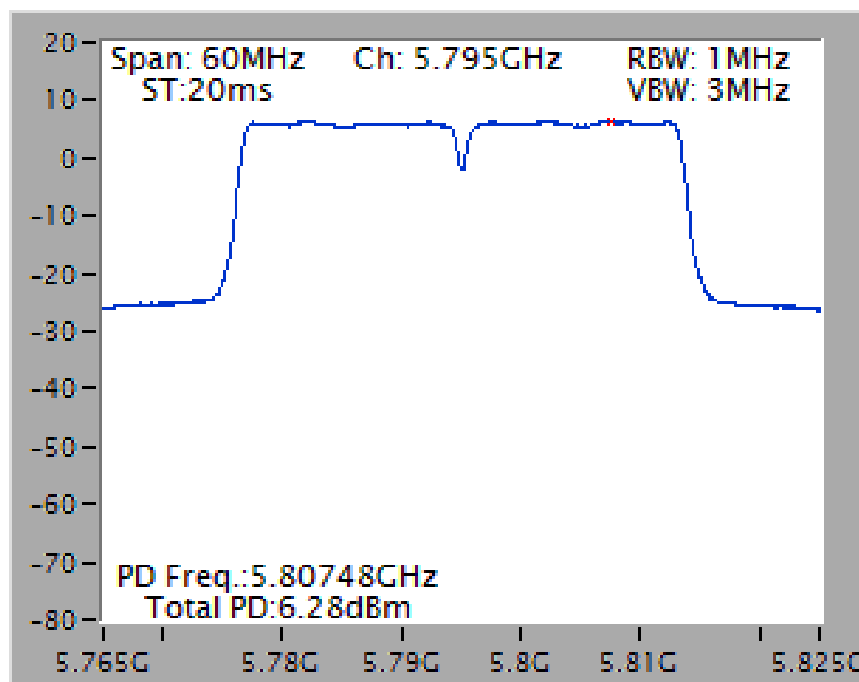

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

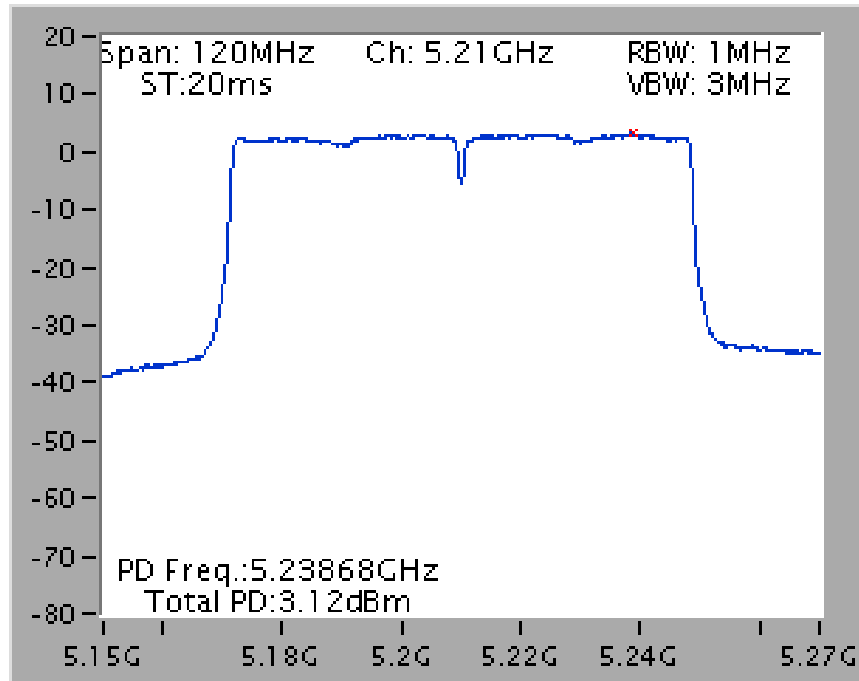


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

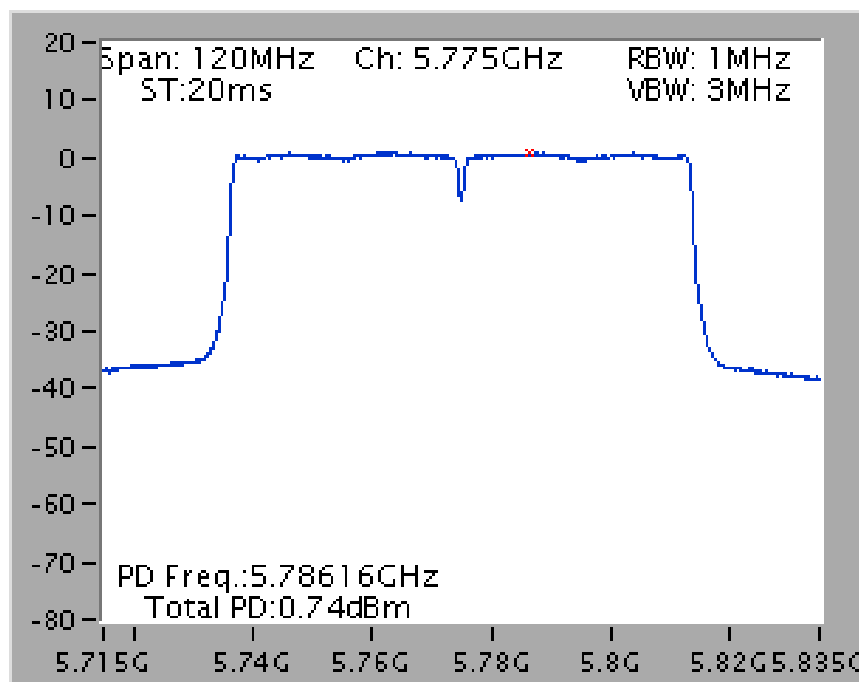


Mode 5 (Set 8 Patch antenna / 3.26dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

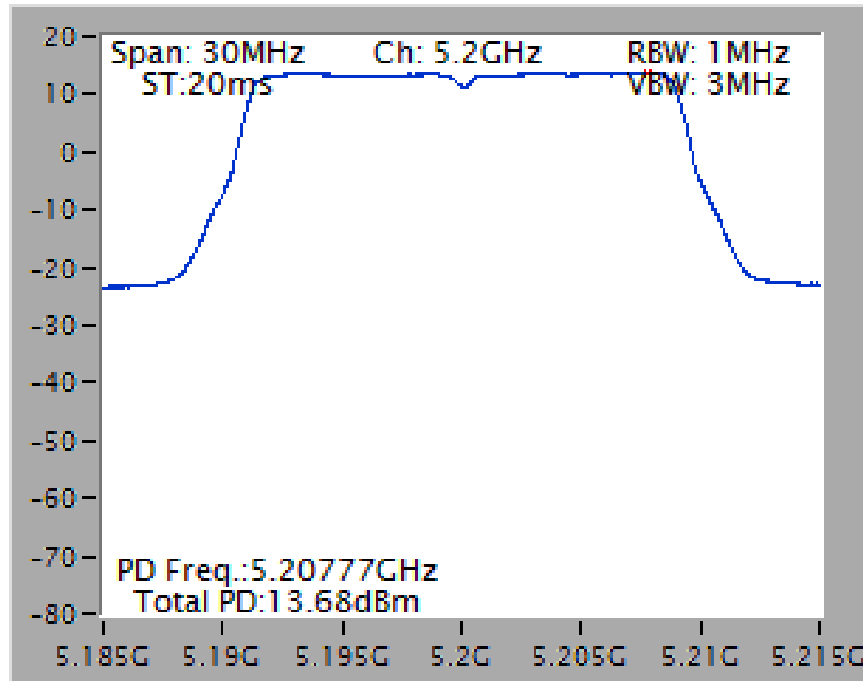


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

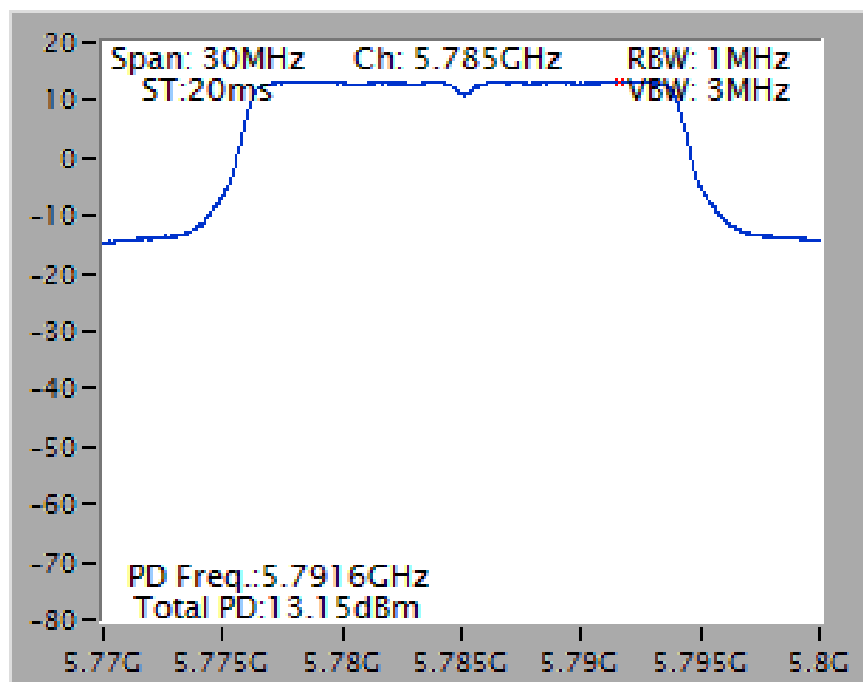


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

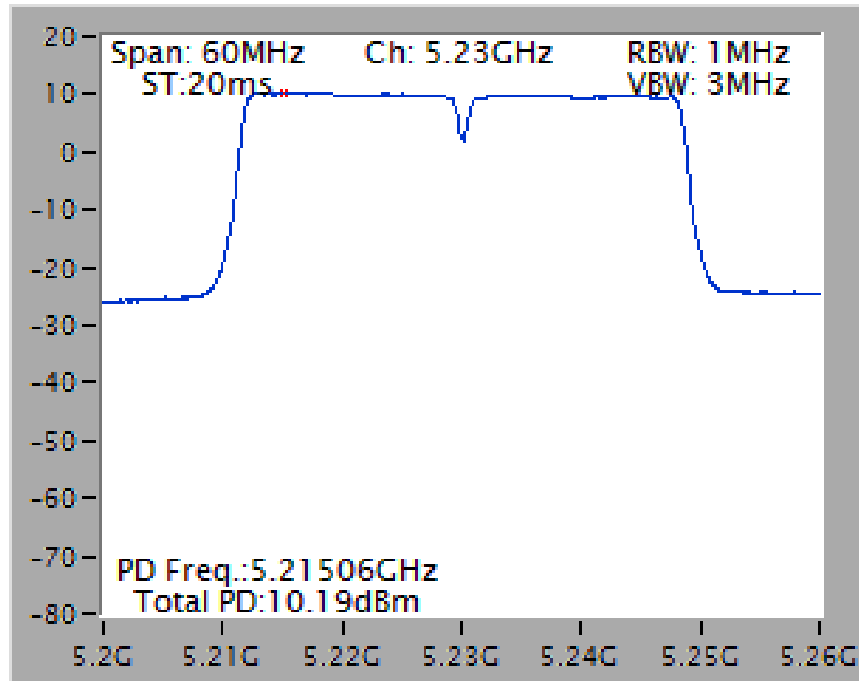


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

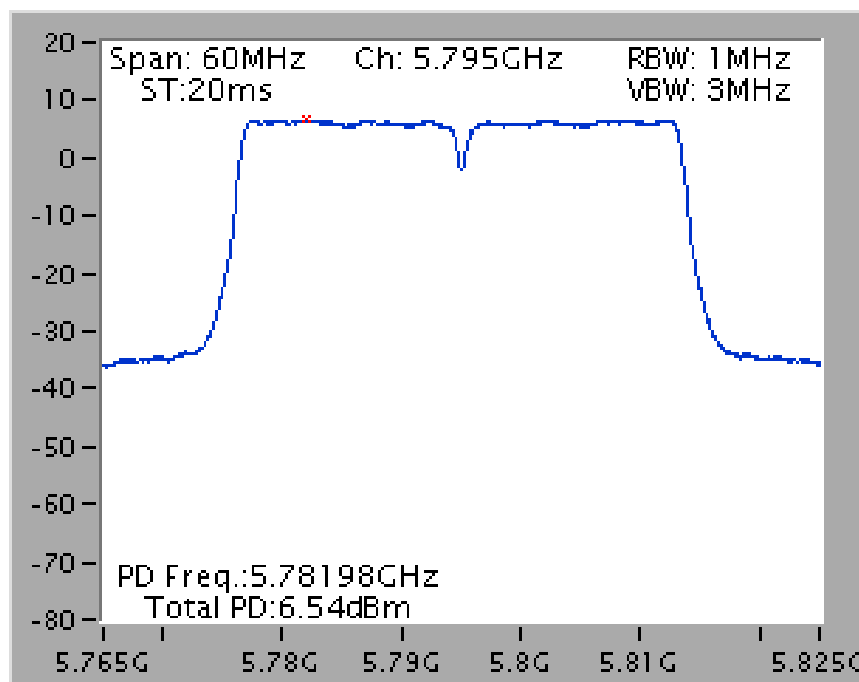

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

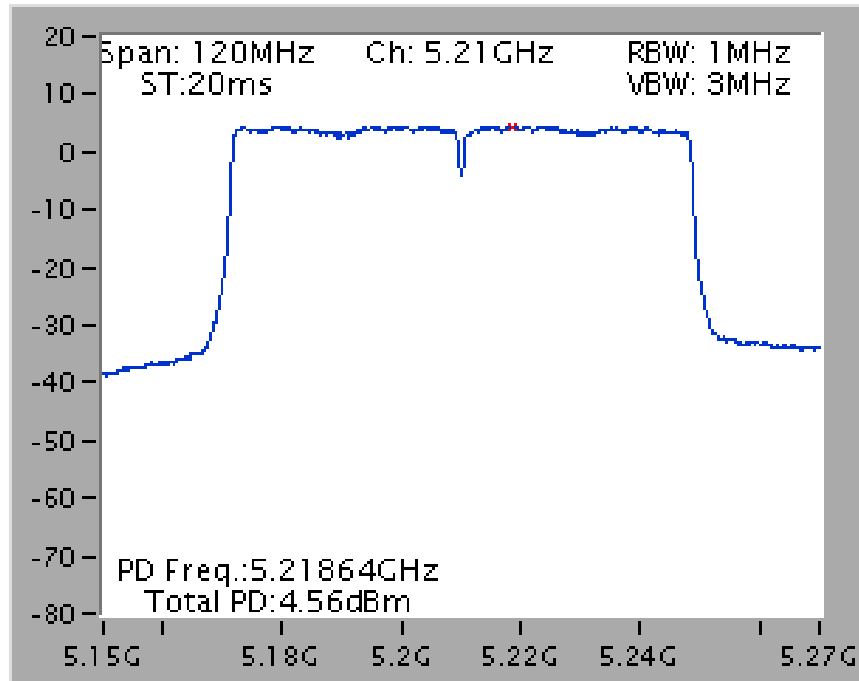


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

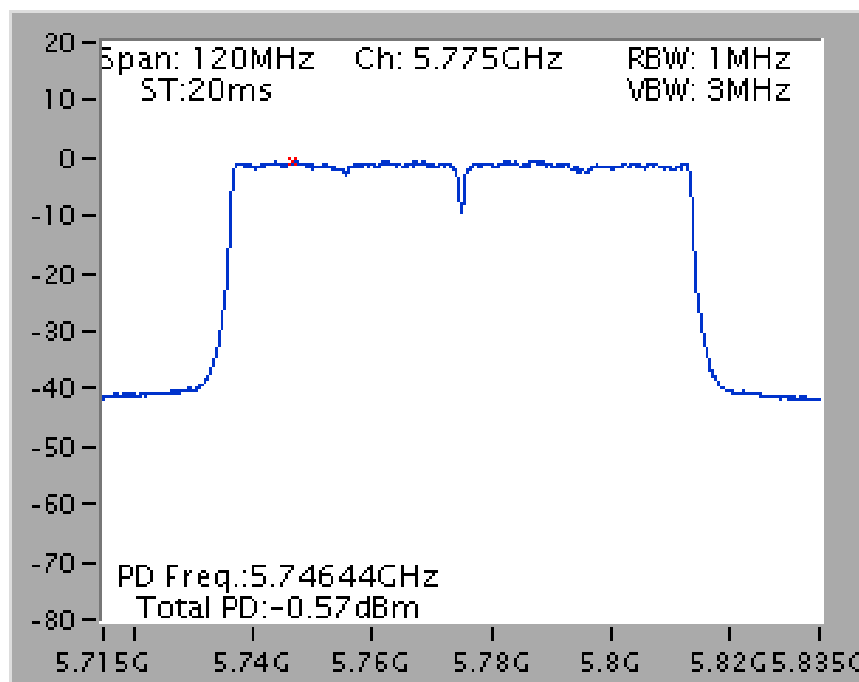


For indoor / outdoor use

Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi / 2TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

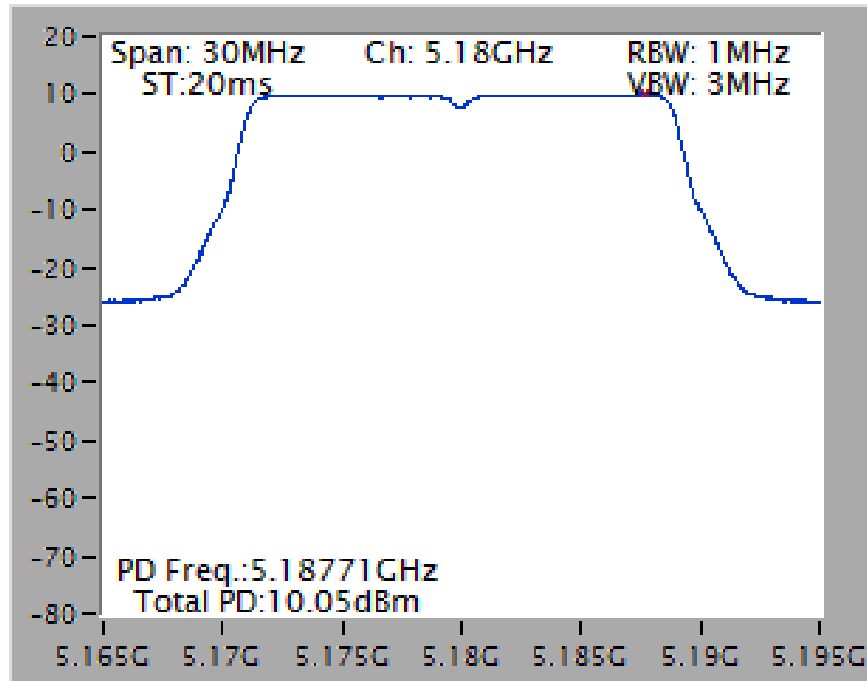


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

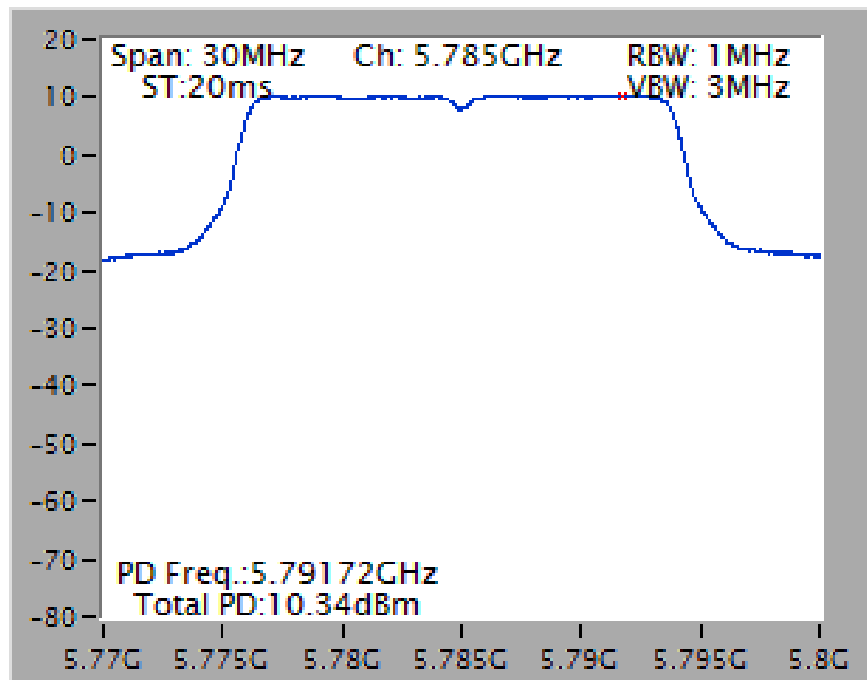


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

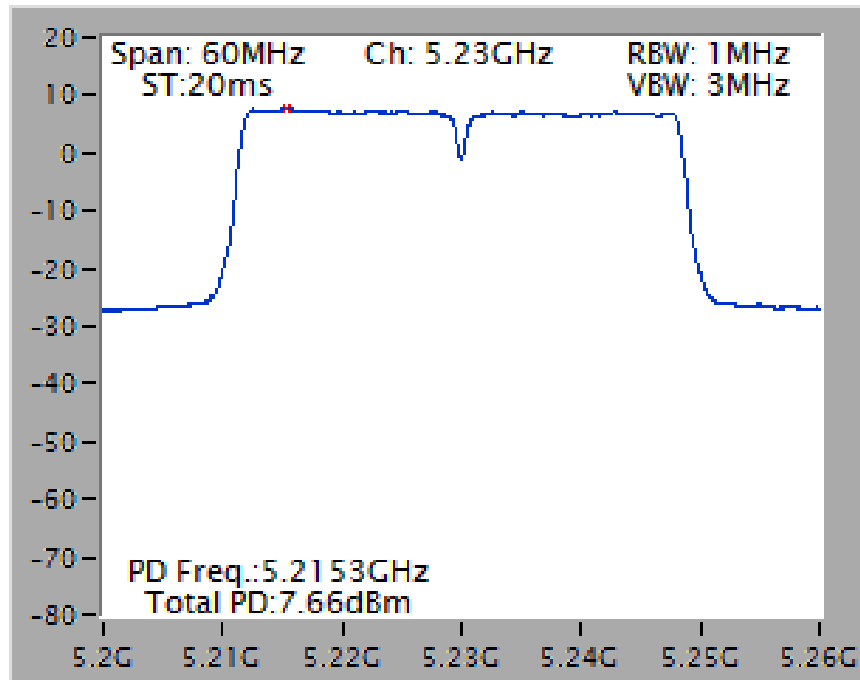


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

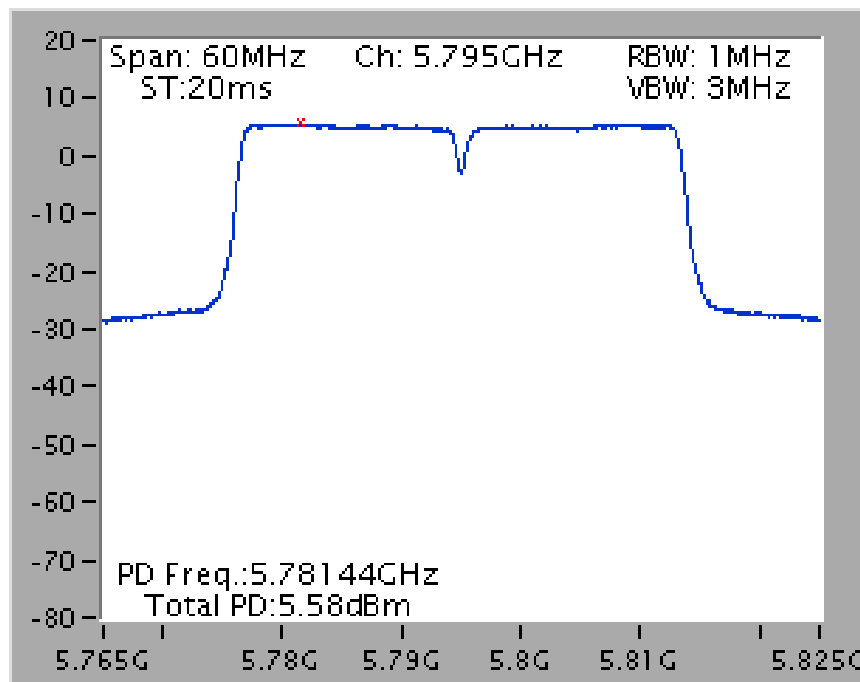

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

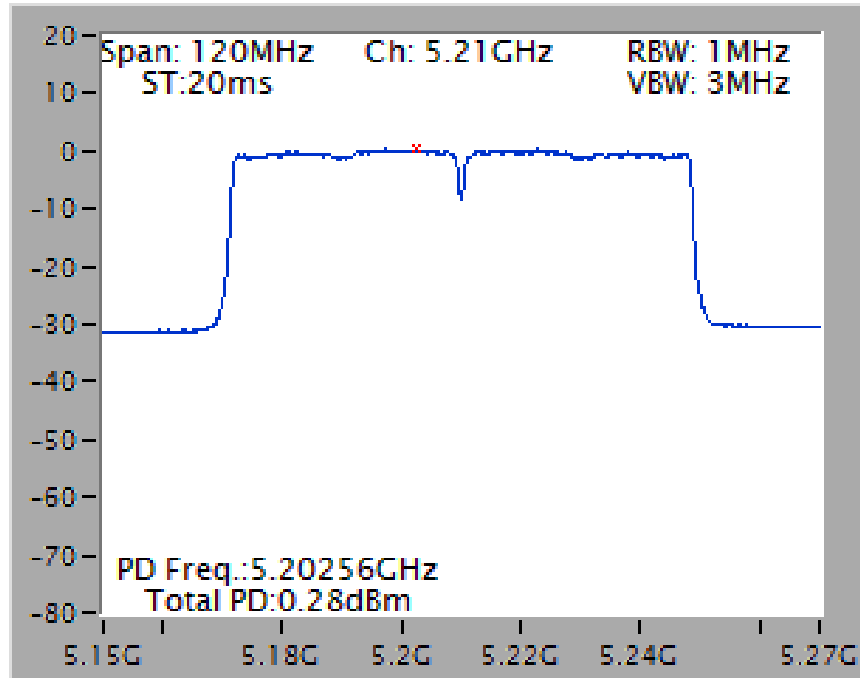


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

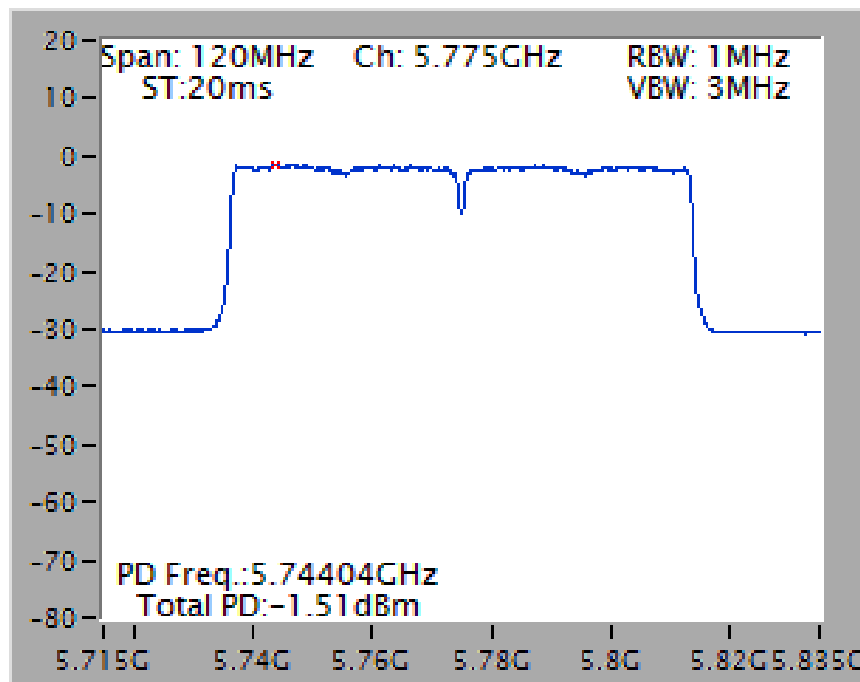


Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi / 3TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5180 MHz

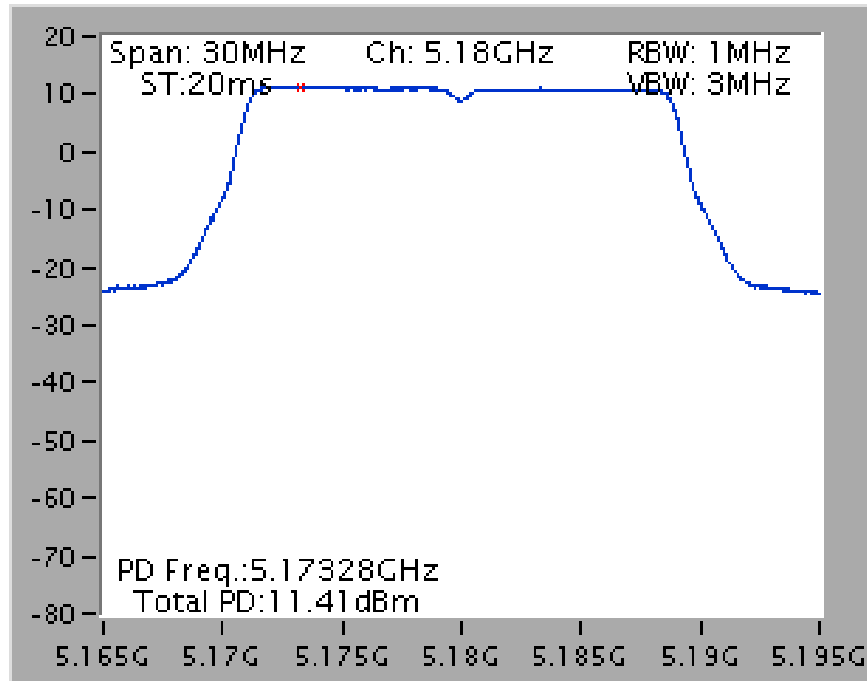


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 /
5785 MHz

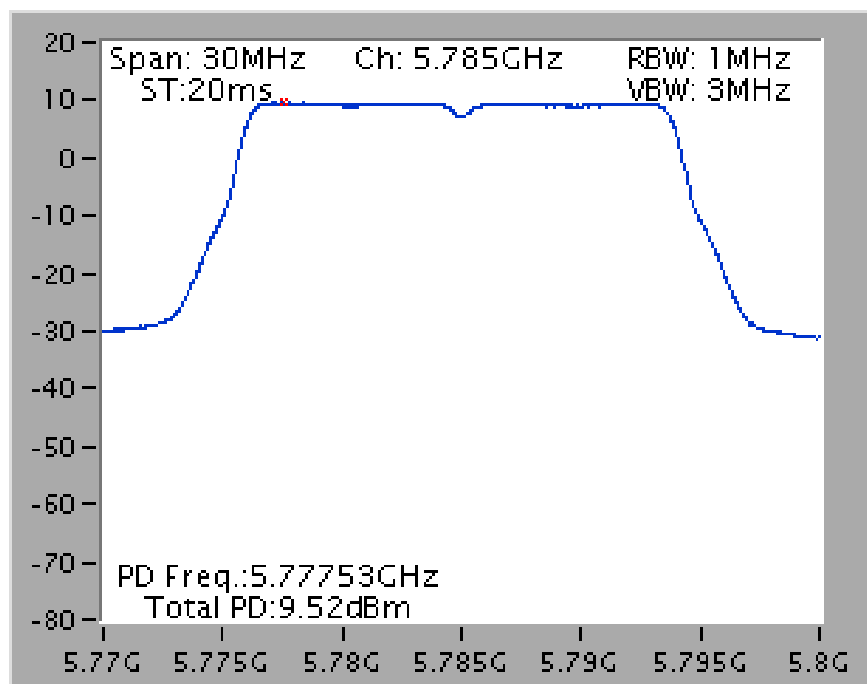


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5230 MHz

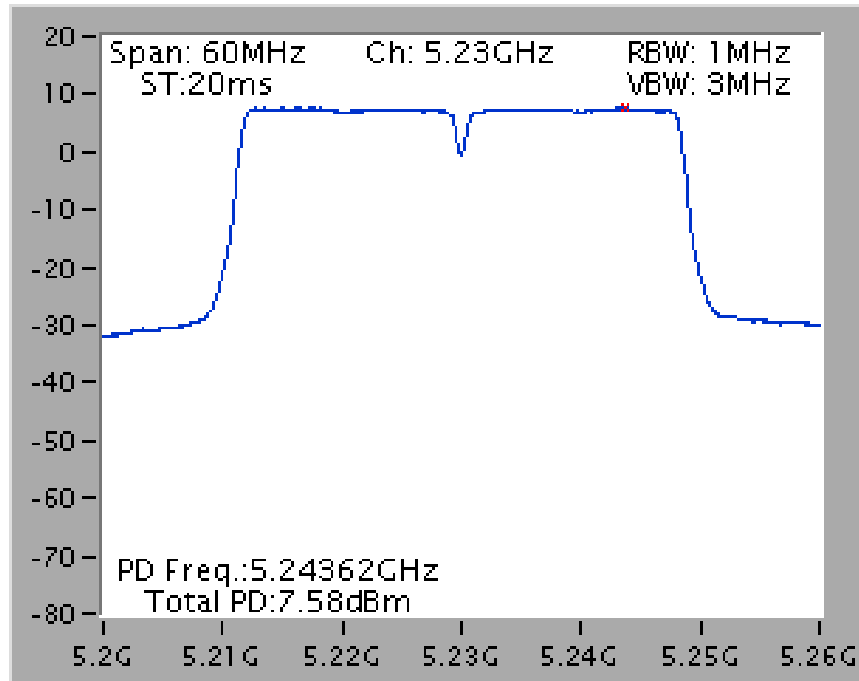


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 /
5795 MHz

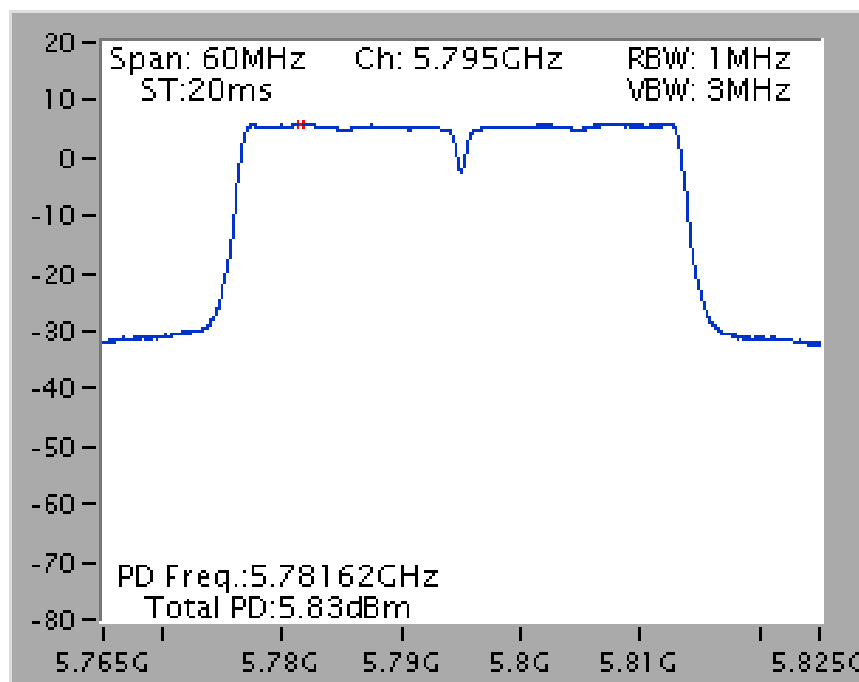

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5210 MHz

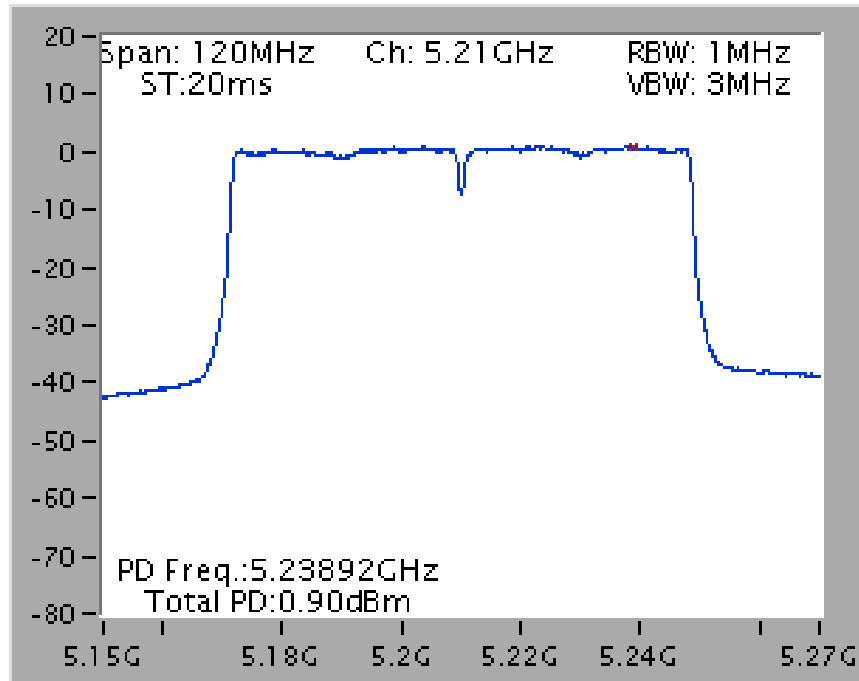


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 /
5775 MHz

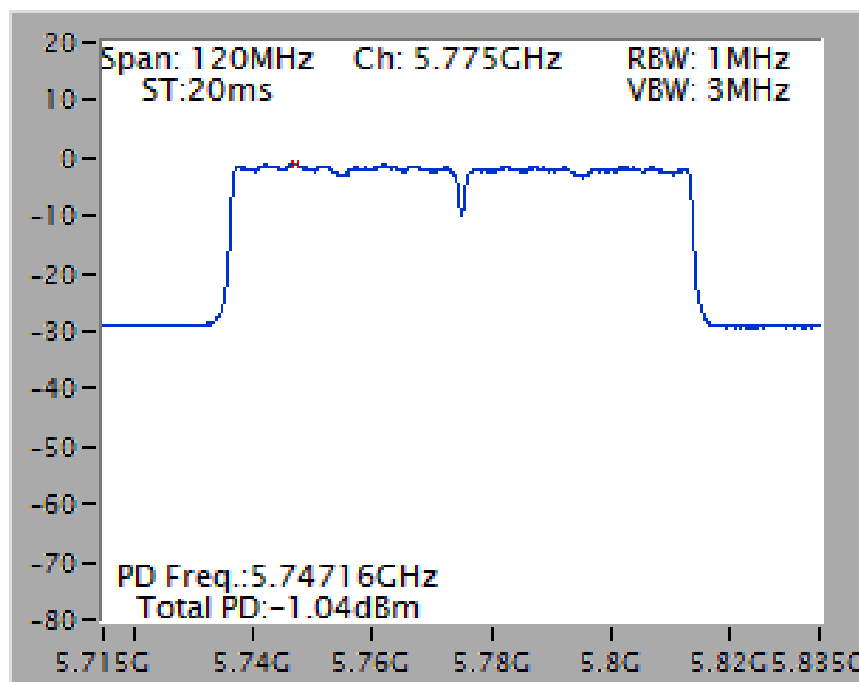


Mode 6 (Set 9 Monopole antenna / Chain 1: 6.8dBi, Chain 2: 6.7dBi, Chain 3: 6.6dBi, Chain 4: 5.9dBi / 4TX)


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

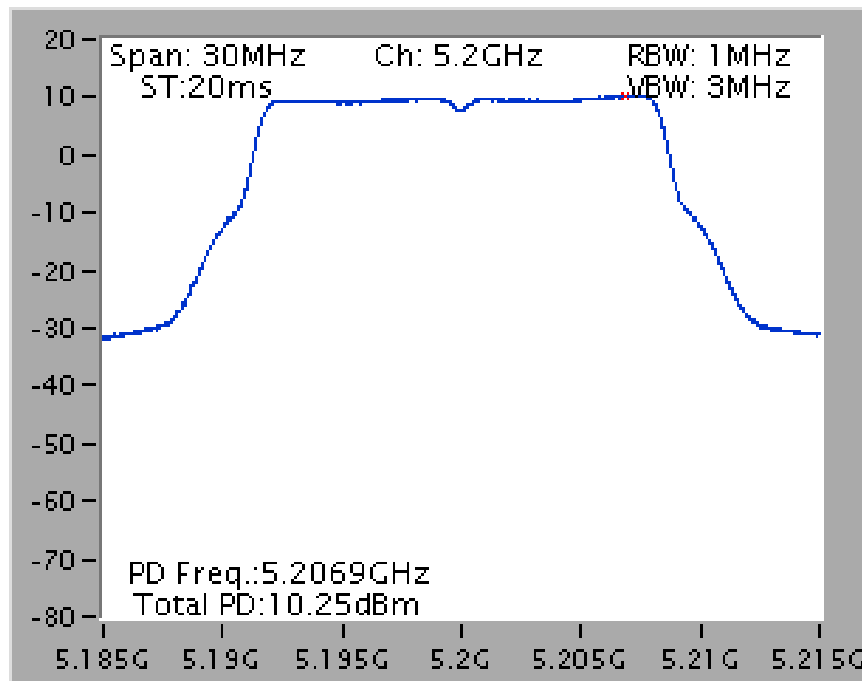


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

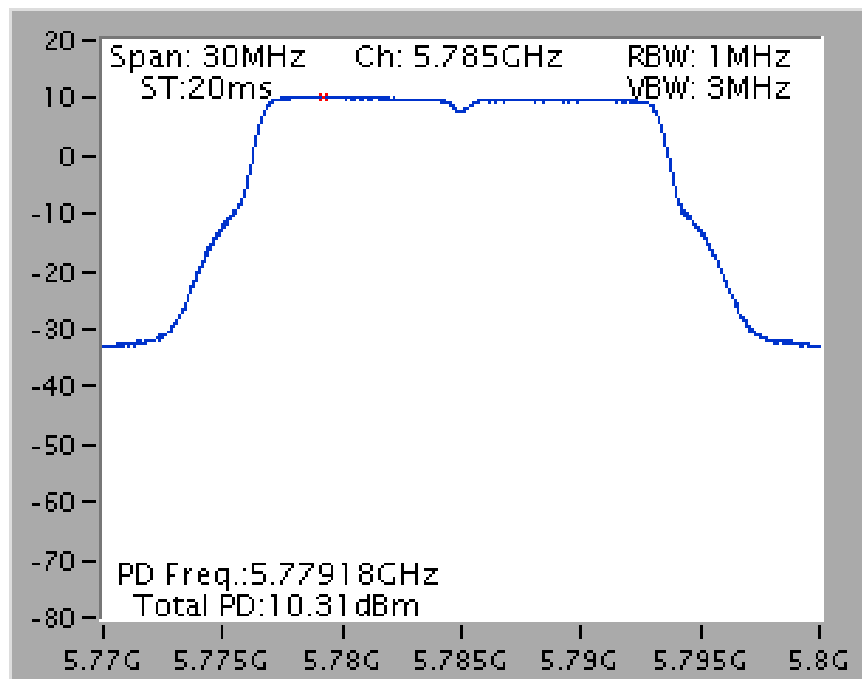


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

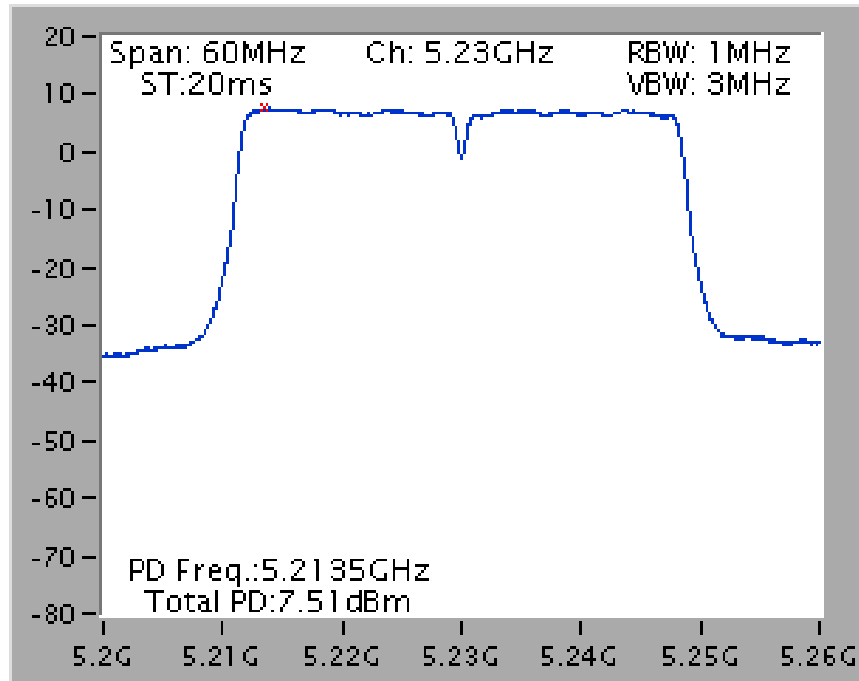


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

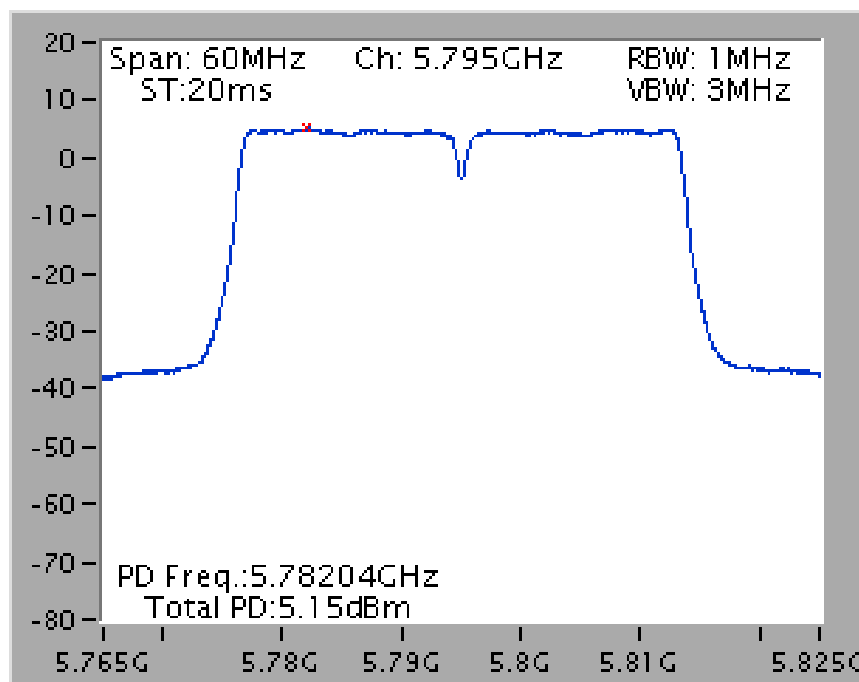

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

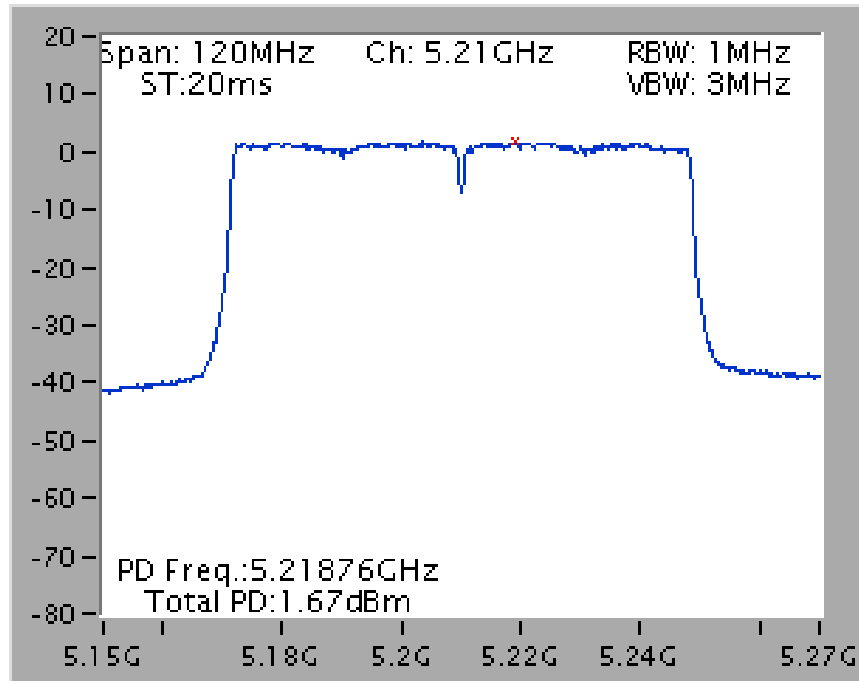

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

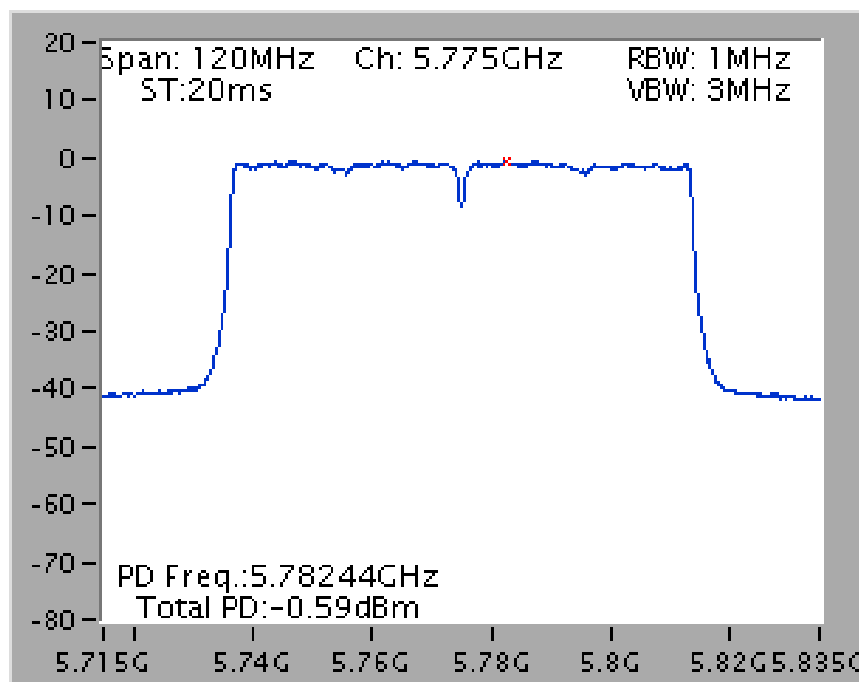

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

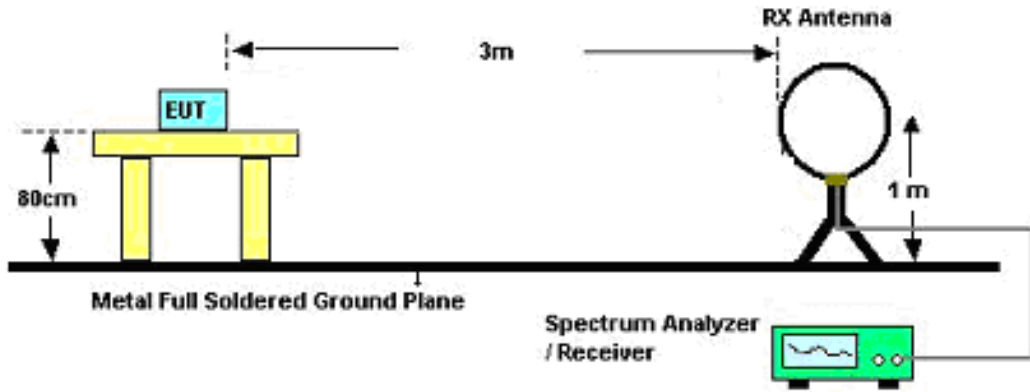

For Radiated Emissions: 30MHz~1GHz

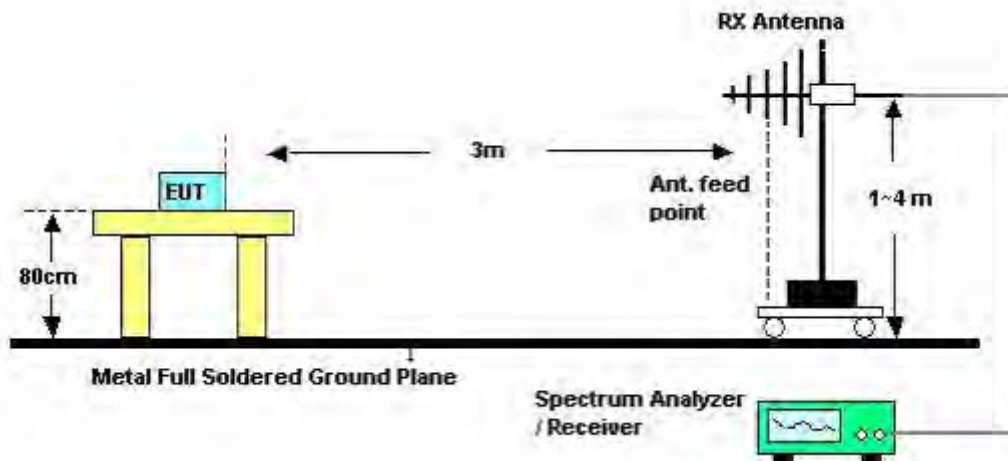

For Radiated Emissions: Above 1GHz

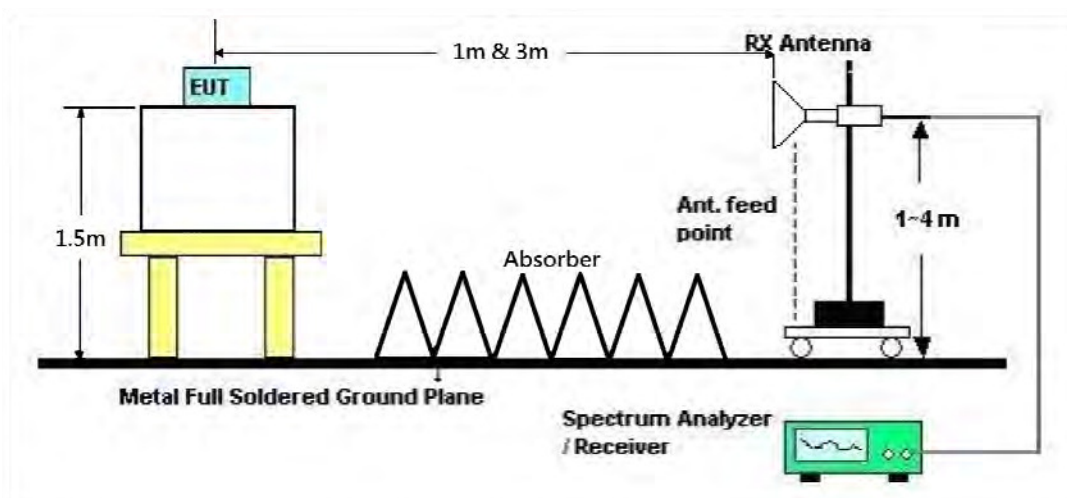

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	CTX
Test Date	Dec. 13, 2015		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	CTX
Test Mode	Mode 1		

Horizontal

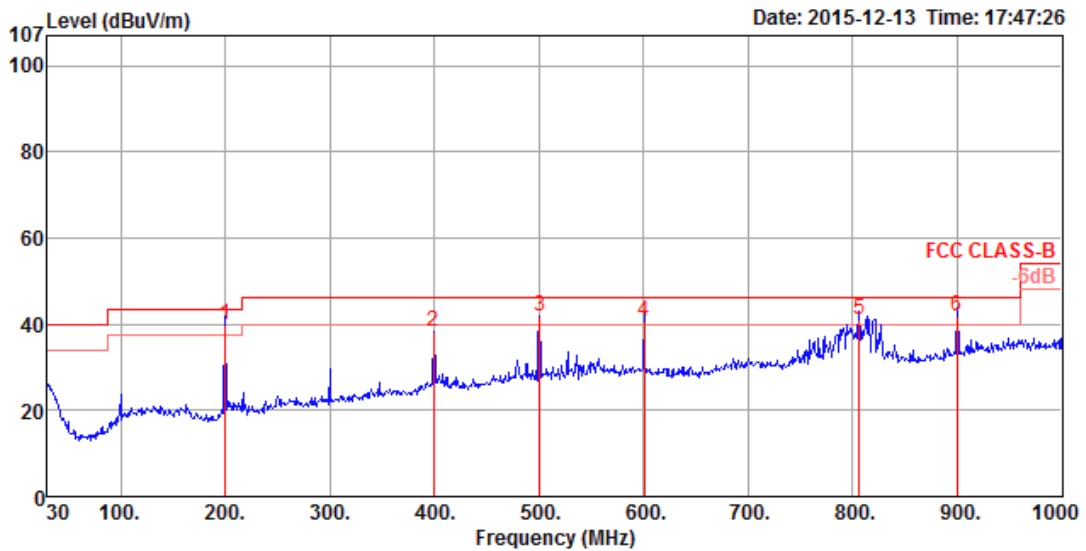

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	199.75	39.85	43.50	-3.65	60.30	1.70	32.55	10.40	HORIZONTAL	180	125	QP
2	399.57	38.31	46.00	-7.69	52.08	2.30	32.54	16.47	HORIZONTAL	219	100	Peak
3	500.45	41.68	46.00	-4.32	53.75	2.61	32.61	17.93	HORIZONTAL	53	250	Peak
4	600.36	40.64	46.00	-5.36	51.50	2.83	32.69	19.00	HORIZONTAL	15	200	QP
5	806.00	40.93	46.00	-5.07	49.30	3.24	32.37	20.76	HORIZONTAL	161	125	QP
6	900.09	41.69	46.00	-4.31	48.58	3.37	31.86	21.60	HORIZONTAL	177	150	QP

Vertical

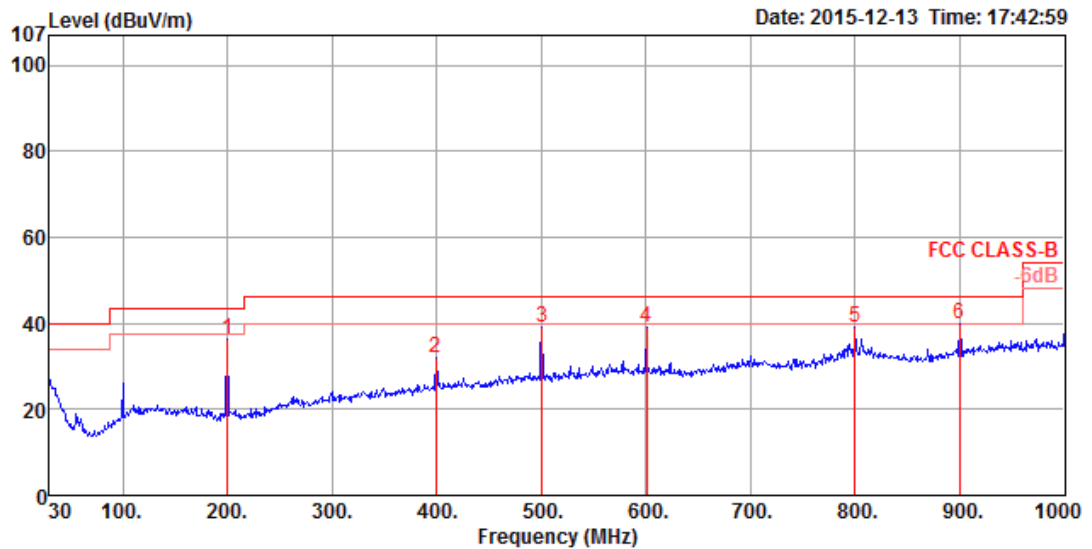

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	199.75	36.37	43.50	-7.13	56.82	1.70	32.55	10.40	VERTICAL	359	125	Peak
2	399.57	31.91	46.00	-14.09	45.68	2.30	32.54	16.47	VERTICAL	201	100	Peak
3	500.45	39.22	46.00	-6.78	51.29	2.61	32.61	17.93	VERTICAL	86	100	Peak
4	600.36	39.08	46.00	-6.92	49.94	2.83	32.69	19.00	VERTICAL	60	100	Peak
5	800.18	39.22	46.00	-6.78	47.68	3.23	32.39	20.70	VERTICAL	156	150	Peak
6	900.09	40.02	46.00	-5.98	46.91	3.37	31.86	21.60	VERTICAL	188	150	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

For Non-Beamforming Mode

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15539.63	46.24	54.00	-7.76	29.22	12.58	38.14	33.70	142	160	Average	HORIZONTAL
2	15540.55	59.91	74.00	-14.09	42.89	12.58	38.14	33.70	142	160	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15539.48	46.47	54.00	-7.53	29.45	12.58	38.14	33.70	170	123	Average	VERTICAL
2	15539.85	59.22	74.00	-14.78	42.20	12.58	38.14	33.70	170	123	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15591.76	60.35	74.00	-13.65	43.46	12.58	38.06	33.75	166	193	Peak	HORIZONTAL
2	15599.40	47.40	54.00	-6.60	30.57	12.58	38.03	33.78	166	193	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15597.76	60.08	74.00	-13.92	43.22	12.58	38.03	33.75	169	252	Peak	VERTICAL
2	15608.72	47.73	54.00	-6.27	30.90	12.58	38.03	33.78	169	252	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15718.79	46.81	54.00	-7.19	30.28	12.57	37.84	33.88	174	277	Average	HORIZONTAL
2	15720.52	60.25	74.00	-13.75	43.72	12.57	37.84	33.88	174	277	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15719.29	60.68	74.00	-13.32	44.15	12.57	37.84	33.88	171	132	Peak	VERTICAL
2	15722.20	46.96	54.00	-7.04	30.43	12.57	37.84	33.88	171	132	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11487.66	42.96	54.00	-11.04	26.74	10.71	38.88	33.37	166	310	Average	HORIZONTAL
2	11492.22	56.23	74.00	-17.77	40.01	10.71	38.88	33.37	166	310	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11490.86	56.67	74.00	-17.33	40.45	10.71	38.88	33.37	169	280	Peak	VERTICAL
2	11491.16	42.90	54.00	-11.10	26.68	10.71	38.88	33.37	169	280	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.74	56.94	74.00	-17.06	40.63	10.75	38.94	33.38	160	256	Peak	HORIZONTAL
2	11570.06	43.01	54.00	-10.99	26.70	10.76	38.94	33.39	160	256	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11567.99	43.38	54.00	-10.62	27.07	10.75	38.94	33.38	162	285	Average	VERTICAL
2	11569.61	55.96	74.00	-18.04	39.65	10.75	38.94	33.38	162	285	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11648.29	44.18	54.00	-9.82	27.80	10.81	38.98	33.41	156	203	Average	HORIZONTAL
2	11651.18	57.32	74.00	-16.68	40.93	10.81	38.99	33.41	156	203	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11648.35	44.37	54.00	-9.63	27.99	10.81	38.98	33.41	158	232	Average	VERTICAL
2	11651.63	57.49	74.00	-16.51	41.10	10.81	38.99	33.41	158	232	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15538.74	47.88	54.00	-6.12	30.86	12.58	38.14	33.70	171	298	Average	HORIZONTAL
2	15541.68	60.69	74.00	-13.31	43.67	12.58	38.14	33.70	171	298	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15538.24	61.43	74.00	-12.57	44.41	12.58	38.14	33.70	174	273	Peak	VERTICAL
2	15541.82	48.12	54.00	-5.88	31.10	12.58	38.14	33.70	174	273	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15597.60	47.49	54.00	-6.51	30.63	12.58	38.03	33.75	164	256	Average	HORIZONTAL
2	15600.71	61.07	74.00	-12.93	44.24	12.58	38.03	33.78	164	256	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15597.62	60.81	74.00	-13.19	43.95	12.58	38.03	33.75	168	275	Peak	VERTICAL
2	15598.01	47.65	54.00	-6.35	30.79	12.58	38.03	33.75	168	275	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15717.60	46.96	54.00	-7.04	30.43	12.57	37.84	33.88	160	203	Average	HORIZONTAL
2	15718.52	60.02	74.00	-13.98	43.49	12.57	37.84	33.88	160	203	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15720.83	59.72	74.00	-14.28	43.19	12.57	37.84	33.88	162	223	Peak	VERTICAL
2	15721.71	47.03	54.00	-6.97	30.50	12.57	37.84	33.88	162	223	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11490.05	42.62	54.00	-11.38	26.40	10.71	38.88	33.37	154	217	Average	HORIZONTAL
2	11491.77	55.66	74.00	-18.34	39.44	10.71	38.88	33.37	154	217	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11489.87	55.72	74.00	-18.28	39.50	10.71	38.88	33.37	157	179	Peak	VERTICAL
2	11490.67	42.78	54.00	-11.22	26.56	10.71	38.88	33.37	157	179	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11567.64	43.19	54.00	-10.81	26.88	10.75	38.94	33.38	156	278	Average	HORIZONTAL
2	11568.38	55.95	74.00	-18.05	39.64	10.75	38.94	33.38	156	278	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.06	56.23	74.00	-17.77	39.92	10.75	38.94	33.38	152	254	Peak	VERTICAL
2	11570.26	43.31	54.00	-10.69	27.00	10.76	38.94	33.39	152	254	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.66	44.16	54.00	-9.84	27.77	10.81	38.99	33.41	149	219	Average	HORIZONTAL
2	11650.77	57.12	74.00	-16.88	40.73	10.81	38.99	33.41	149	219	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11648.32	44.26	54.00	-9.74	27.88	10.81	38.98	33.41	151	248	Average	VERTICAL
2	11650.84	57.63	74.00	-16.37	41.24	10.81	38.99	33.41	151	248	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15568.99	47.71	54.00	-6.29	30.77	12.58	38.09	33.73	156	204	Average	HORIZONTAL
2	15569.30	60.73	74.00	-13.27	43.79	12.58	38.09	33.73	156	204	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15569.92	60.74	74.00	-13.26	43.80	12.58	38.09	33.73	159	177	Peak	VERTICAL
2	15571.99	47.88	54.00	-6.12	30.94	12.58	38.09	33.73	159	177	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15690.27	46.96	54.00	-7.04	30.33	12.58	37.90	33.85	156	159	Average	HORIZONTAL
2	15691.61	59.94	74.00	-14.06	43.31	12.58	37.90	33.85	156	159	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15688.96	47.10	54.00	-6.90	30.47	12.58	37.90	33.85	159	181	Average	VERTICAL
2	15689.17	59.62	74.00	-14.38	42.99	12.58	37.90	33.85	159	181	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11510.71	55.66	74.00	-18.34	39.41	10.72	38.90	33.37	152	162	Peak	HORIZONTAL
2	11510.80	42.66	54.00	-11.34	26.41	10.72	38.90	33.37	152	162	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11507.99	42.92	54.00	-11.08	26.67	10.72	38.90	33.37	154	130	Average	VERTICAL
2	11510.69	55.89	74.00	-18.11	39.64	10.72	38.90	33.37	154	130	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11589.58	43.40	54.00	-10.60	27.08	10.76	38.95	33.39	152	163	Average	HORIZONTAL
2	11590.67	56.59	74.00	-17.41	40.27	10.76	38.95	33.39	152	163	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11589.28	43.47	54.00	-10.53	27.15	10.76	38.95	33.39	150	134	Average	VERTICAL
2	11592.38	56.80	74.00	-17.20	40.48	10.76	38.95	33.39	150	134	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15627.77	60.28	74.00	-13.72	43.49	12.58	38.01	33.80	150	162	Peak	HORIZONTAL
2	15628.25	47.21	54.00	-6.79	30.42	12.58	38.01	33.80	150	162	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15629.31	60.30	74.00	-13.70	43.54	12.58	37.98	33.80	152	130	Peak	VERTICAL
2	15631.80	47.21	54.00	-6.79	30.45	12.58	37.98	33.80	152	130	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 06, 2015		
Test Mode	Mode 1 (Set 1 Dipole antenna / 3.96dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11547.82	43.14	54.00	-10.86	26.85	10.75	38.92	33.38	153	170	Average	HORIZONTAL
2	11550.36	56.62	74.00	-17.38	40.32	10.75	38.93	33.38	153	170	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11547.56	43.26	54.00	-10.74	26.97	10.75	38.92	33.38	147	135	Average	VERTICAL
2	11550.82	57.24	74.00	-16.76	40.94	10.75	38.93	33.38	147	135	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15538.13	61.13	74.00	-12.87	44.11	12.58	38.14	33.70	154	204	Peak	HORIZONTAL
2	15541.61	47.74	54.00	-6.26	30.72	12.58	38.14	33.70	154	204	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15538.17	61.13	74.00	-12.87	44.11	12.58	38.14	33.70	153	190	Peak	VERTICAL
2	15539.35	48.37	54.00	-5.63	31.35	12.58	38.14	33.70	153	190	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.40	60.23	74.00	-13.77	43.40	12.58	38.03	33.78	156	158	Peak	HORIZONTAL
2	15600.52	47.37	54.00	-6.63	30.54	12.58	38.03	33.78	156	158	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.94	47.44	54.00	-6.56	30.61	12.58	38.03	33.78	157	175	Average	VERTICAL
2	15599.82	60.31	74.00	-13.69	43.48	12.58	38.03	33.78	157	175	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15718.58	59.94	74.00	-14.06	43.41	12.57	37.84	33.88	156	200	Peak	HORIZONTAL
2	15718.94	47.05	54.00	-6.95	30.52	12.57	37.84	33.88	156	200	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15717.79	47.16	54.00	-6.84	30.63	12.57	37.84	33.88	154	174	Average	VERTICAL
2	15721.98	60.61	74.00	-13.39	44.08	12.57	37.84	33.88	154	174	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11488.84	46.87	54.00	-7.13	30.65	10.71	38.88	33.37	222	219	Average	HORIZONTAL
2	11489.42	60.70	74.00	-13.30	44.48	10.71	38.88	33.37	222	219	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11489.18	46.57	54.00	-7.43	30.35	10.71	38.88	33.37	221	204	Average	VERTICAL
2	11490.69	60.03	74.00	-13.97	43.81	10.71	38.88	33.37	221	204	Peak	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.43	59.61	74.00	-14.39	43.30	10.75	38.94	33.38	222	219	Peak	HORIZONTAL
2	11569.58	45.81	54.00	-8.19	29.50	10.75	38.94	33.38	222	219	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11570.30	59.82	74.00	-14.18	43.51	10.76	38.94	33.39	221	204	Peak	VERTICAL
2	11570.47	46.47	54.00	-7.53	30.16	10.76	38.94	33.39	221	204	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11649.50	61.61	74.00	-12.39	45.23	10.81	38.98	33.41	222	201	Peak	HORIZONTAL
2	11650.47	47.79	54.00	-6.21	31.41	10.81	38.98	33.41	222	201	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11649.77	62.48	74.00	-11.52	46.10	10.81	38.98	33.41	223	215	Peak	VERTICAL
2	11650.58	48.80	54.00	-5.20	32.41	10.81	38.99	33.41	223	215	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15537.90	47.83	54.00	-6.17	30.81	12.58	38.14	33.70	218	199 Average	HORIZONTAL
2	15539.11	61.17	74.00	-12.83	44.15	12.58	38.14	33.70	218	199 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15540.51	60.90	74.00	-13.10	43.88	12.58	38.14	33.70	217	183 Peak	VERTICAL
2	15540.89	48.48	54.00	-5.52	31.46	12.58	38.14	33.70	217	183 Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.56	60.88	74.00	-13.12	44.05	12.58	38.03	33.78	220	176	Peak	HORIZONTAL
2	15600.63	47.55	54.00	-6.45	30.72	12.58	38.03	33.78	220	176	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.23	60.34	74.00	-13.66	43.48	12.58	38.03	33.75	220	192	Peak	VERTICAL
2	15600.87	47.69	54.00	-6.31	30.86	12.58	38.03	33.78	220	192	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15719.08	60.08	74.00	-13.92	43.55	12.57	37.84	33.88	221	184	Peak	HORIZONTAL
2	15720.96	47.10	54.00	-6.90	30.57	12.57	37.84	33.88	221	184	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15719.89	60.93	74.00	-13.07	44.40	12.57	37.84	33.88	223	201	Peak	VERTICAL
2	15722.46	47.27	54.00	-6.73	30.74	12.57	37.84	33.88	223	201	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11490.28	46.45	54.00	-7.55	30.23	10.71	38.88	33.37	226	208	Average	HORIZONTAL
2	11490.35	60.13	74.00	-13.87	43.91	10.71	38.88	33.37	226	208	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11489.78	46.65	54.00	-7.35	30.43	10.71	38.88	33.37	229	208	Average	VERTICAL
2	11490.08	59.65	74.00	-14.35	43.43	10.71	38.88	33.37	229	208	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11570.36	47.21	54.00	-6.79	30.90	10.76	38.94	33.39	230	201	Average	HORIZONTAL
2	11570.60	60.47	74.00	-13.53	44.16	10.76	38.94	33.39	230	201	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.97	47.17	54.00	-6.83	30.86	10.76	38.94	33.39	234	215	Average	VERTICAL
2	11569.98	60.62	74.00	-13.38	44.31	10.76	38.94	33.39	234	215	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.57	49.07	54.00	-4.93	32.68	10.81	38.99	33.41	226	210	Average	HORIZONTAL
2	11650.64	61.97	74.00	-12.03	45.58	10.81	38.99	33.41	226	210	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.18	62.86	74.00	-11.14	46.48	10.81	38.98	33.41	228	207	Peak	VERTICAL
2	11650.32	49.10	54.00	-4.90	32.72	10.81	38.98	33.41	228	207	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15570.30	61.20	74.00	-12.80	44.26	12.58	38.09	33.73	208	177	Peak	HORIZONTAL
2	15570.87	47.67	54.00	-6.33	30.73	12.58	38.09	33.73	208	177	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15567.68	61.21	74.00	-12.79	44.27	12.58	38.09	33.73	207	191	Peak	VERTICAL
2	15568.18	47.91	54.00	-6.09	30.97	12.58	38.09	33.73	207	191	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15689.88	60.89	74.00	-13.11	44.26	12.58	37.90	33.85	210	192	Peak	HORIZONTAL
2	15690.37	47.06	54.00	-6.94	30.43	12.58	37.90	33.85	210	192	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15689.24	60.68	74.00	-13.32	44.05	12.58	37.90	33.85	212	191	Peak	VERTICAL
2	15691.56	47.11	54.00	-6.89	30.48	12.58	37.90	33.85	212	191	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11508.59	57.11	74.00	-16.89	40.86	10.72	38.90	33.37	226	224	Peak	HORIZONTAL
2	11509.60	43.27	54.00	-10.73	27.02	10.72	38.90	33.37	226	224	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11508.83	58.79	74.00	-15.21	42.54	10.72	38.90	33.37	227	209	Peak	VERTICAL
2	11510.08	45.06	54.00	-8.94	28.81	10.72	38.90	33.37	227	209	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11588.18	56.79	74.00	-17.21	40.47	10.76	38.95	33.39	210	193	Peak	HORIZONTAL
2	11588.68	43.86	54.00	-10.14	27.54	10.76	38.95	33.39	210	193	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11590.42	44.85	54.00	-9.15	28.53	10.76	38.95	33.39	211	207	Average	VERTICAL
2	11591.34	58.38	74.00	-15.62	42.06	10.76	38.95	33.39	211	207	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15629.69	60.60	74.00	-13.40	43.84	12.58	37.98	33.80	208	187	Peak	HORIZONTAL
2	15631.30	47.09	54.00	-6.91	30.33	12.58	37.98	33.80	208	187	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15629.48	47.10	54.00	-6.90	30.34	12.58	37.98	33.80	207	204	Average	VERTICAL
2	15631.66	60.51	74.00	-13.49	43.75	12.58	37.98	33.80	207	204	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 2 (Set 5 Polarized Dipole antenna / (2A)3.96dBi*2, (2B)1.66dBi*2 / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11551.02	43.24	54.00	-10.76	26.94	10.75	38.93	33.38	211	194	Average	HORIZONTAL
2	11551.63	56.55	74.00	-17.45	40.25	10.75	38.93	33.38	211	194	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11549.84	56.46	74.00	-17.54	40.16	10.75	38.93	33.38	209	208	Peak	VERTICAL
2	11550.41	43.47	54.00	-10.53	27.17	10.75	38.93	33.38	209	208	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15534.40	47.90	54.00	-6.10	30.88	12.58	38.14	33.70	150	112	Average	HORIZONTAL
2	15534.48	60.42	74.00	-13.58	43.40	12.58	38.14	33.70	150	112	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15539.76	60.87	74.00	-13.13	43.85	12.58	38.14	33.70	152	140	Peak	VERTICAL
2	15539.80	48.19	54.00	-5.81	31.17	12.58	38.14	33.70	152	140	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.17	47.22	54.00	-6.78	30.36	12.58	38.03	33.75	151	192	Average	HORIZONTAL
2	15599.53	60.60	74.00	-13.40	43.77	12.58	38.03	33.78	151	192	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.72	60.00	74.00	-14.00	43.17	12.58	38.03	33.78	152	166	Peak	VERTICAL
2	15600.79	47.33	54.00	-6.67	30.50	12.58	38.03	33.78	152	166	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15720.36	60.37	74.00	-13.63	43.84	12.57	37.84	33.88	151	193	Peak	HORIZONTAL
2	15721.51	46.95	54.00	-7.05	30.42	12.57	37.84	33.88	151	193	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15718.30	59.85	74.00	-14.15	43.32	12.57	37.84	33.88	153	219	Peak	VERTICAL
2	15722.09	47.13	54.00	-6.87	30.60	12.57	37.84	33.88	153	219	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11488.39	43.25	54.00	-10.75	27.03	10.71	38.88	33.37	151	247	Average	HORIZONTAL
2	11492.29	55.83	74.00	-18.17	39.61	10.71	38.88	33.37	151	247	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11487.89	56.17	74.00	-17.83	39.95	10.71	38.88	33.37	153	221	Peak	VERTICAL
2	11490.44	43.02	54.00	-10.98	26.80	10.71	38.88	33.37	153	221	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11568.49	56.30	74.00	-17.70	39.99	10.75	38.94	33.38	151	261	Peak	HORIZONTAL
2	11570.52	42.72	54.00	-11.28	26.41	10.76	38.94	33.39	151	261	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11568.91	43.36	54.00	-10.64	27.05	10.75	38.94	33.38	152	254	Average	VERTICAL
2	11569.26	55.91	74.00	-18.09	39.60	10.75	38.94	33.38	152	254	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.08	47.81	54.00	-6.19	31.43	10.81	38.98	33.41	268	149	Average	HORIZONTAL
2	11651.91	62.11	74.00	-11.89	45.72	10.81	38.99	33.41	268	149	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11648.73	60.99	74.00	-13.01	44.61	10.81	38.98	33.41	262	107	Peak	VERTICAL
2	11649.18	47.20	54.00	-6.80	30.82	10.81	38.98	33.41	262	107	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15539.26	60.37	74.00	-13.63	43.35	12.58	38.14	33.70	256	77	Peak	HORIZONTAL
2	15540.52	47.89	54.00	-6.11	30.87	12.58	38.14	33.70	256	77	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15538.68	48.05	54.00	-5.95	31.03	12.58	38.14	33.70	262	73	Average	VERTICAL
2	15541.67	60.91	74.00	-13.09	43.89	12.58	38.14	33.70	262	73	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.74	47.35	54.00	-6.65	30.49	12.58	38.03	33.75	234	100	Average	HORIZONTAL
2	15602.50	60.12	74.00	-13.88	43.29	12.58	38.03	33.78	234	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.11	47.35	54.00	-6.65	30.49	12.58	38.03	33.75	236	85	Average	VERTICAL
2	15598.43	59.91	74.00	-14.09	43.05	12.58	38.03	33.75	236	85	Peak	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15717.70	47.02	54.00	-6.98	30.49	12.57	37.84	33.88	215	123	Average	HORIZONTAL
2	15718.17	60.29	74.00	-13.71	43.76	12.57	37.84	33.88	215	123	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15720.27	60.33	74.00	-13.67	43.80	12.57	37.84	33.88	217	104	Peak	VERTICAL
2	15721.76	47.05	54.00	-6.95	30.52	12.57	37.84	33.88	217	104	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11491.42	43.31	54.00	-10.69	27.09	10.71	38.88	33.37	268	195	Average	HORIZONTAL
2	11491.73	56.20	74.00	-17.80	39.98	10.71	38.88	33.37	268	195	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11490.59	47.16	54.00	-6.84	30.94	10.71	38.88	33.37	218	154	Average	VERTICAL
2	11491.26	59.25	74.00	-14.75	43.03	10.71	38.88	33.37	218	154	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	cm	deg		
1	11569.83	44.35	54.00	-9.65	28.04	10.76	38.94	248	138	Average	HORIZONTAL
2	11572.21	57.22	74.00	-16.78	40.91	10.76	38.94	248	138	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	cm	deg		
1	11570.88	46.66	54.00	-7.34	30.35	10.76	38.94	272	118	Average	VERTICAL
2	11571.03	59.79	74.00	-14.21	43.48	10.76	38.94	272	118	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11648.38	58.77	74.00	-15.23	42.39	10.81	38.98	33.41	245	144	Peak	HORIZONTAL
2	11648.49	44.96	54.00	-9.04	28.58	10.81	38.98	33.41	245	144	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.60	47.02	54.00	-6.98	30.63	10.81	38.99	33.41	250	132	Average	VERTICAL
2	11651.43	59.46	74.00	-14.54	43.07	10.81	38.99	33.41	250	132	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15570.47	60.42	74.00	-13.58	43.48	12.58	38.09	33.73	223	193	Peak	HORIZONTAL
2	15570.94	47.59	54.00	-6.41	30.65	12.58	38.09	33.73	223	193	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15568.05	60.99	74.00	-13.01	44.05	12.58	38.09	33.73	228	173	Peak	VERTICAL
2	15570.76	47.78	54.00	-6.22	30.84	12.58	38.09	33.73	228	173	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10458.46	43.17	54.00	-10.83	28.31	10.11	38.46	33.71	212	243	Average	HORIZONTAL
2	10461.91	56.73	74.00	-17.27	41.89	10.11	38.44	33.71	212	243	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10458.76	43.23	54.00	-10.77	28.37	10.11	38.46	33.71	234	217	Average	VERTICAL
2	10460.19	56.19	74.00	-17.81	41.33	10.11	38.46	33.71	234	217	Peak	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 07, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11510.11	43.02	54.00	-10.98	26.77	10.72	38.90	33.37	220	275	Average	HORIZONTAL
2	11510.20	56.61	74.00	-17.39	40.36	10.72	38.90	33.37	220	275	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11508.79	58.18	74.00	-15.82	41.93	10.72	38.90	33.37	231	223	Peak	VERTICAL
2	11510.69	45.66	54.00	-8.34	29.41	10.72	38.90	33.37	231	223	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11590.47	43.12	54.00	-10.88	26.80	10.76	38.95	33.39	213	111 Average	HORIZONTAL
2	11591.78	56.59	74.00	-17.41	40.27	10.76	38.95	33.39	213	111 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11590.87	45.83	54.00	-8.17	29.51	10.76	38.95	33.39	223	154 Average	VERTICAL
2	11591.39	59.31	74.00	-14.69	42.99	10.76	38.95	33.39	223	154 Peak	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15627.60	47.01	54.00	-6.99	30.22	12.58	38.01	33.80	193	172	Average	HORIZONTAL
2	15629.93	59.89	74.00	-14.11	43.13	12.58	37.98	33.80	193	172	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15630.68	60.63	74.00	-13.37	43.87	12.58	37.98	33.80	199	140	Peak	VERTICAL
2	15631.32	47.32	54.00	-6.68	30.56	12.58	37.98	33.80	199	140	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 08, 2015		
Test Mode	Mode 3 (Set 6 Panel antenna / 2.66dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11548.01	56.43	74.00	-17.57	40.14	10.75	38.92	33.38	200	187	Peak	HORIZONTAL
2	11549.38	43.16	54.00	-10.84	26.86	10.75	38.93	33.38	200	187	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11548.45	57.22	74.00	-16.78	40.93	10.75	38.92	33.38	212	160	Peak	VERTICAL
2	11550.55	44.12	54.00	-9.88	27.82	10.75	38.93	33.38	212	160	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15531.20	49.70	54.00	-4.30	32.68	12.58	38.14	33.70	150	112	Average	HORIZONTAL
2	15535.04	63.12	74.00	-10.88	46.10	12.58	38.14	33.70	150	112	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15530.16	62.56	74.00	-11.44	45.54	12.58	38.14	33.70	150	223	Peak	VERTICAL
2	15533.80	49.67	54.00	-4.33	32.65	12.58	38.14	33.70	150	223	Average	VERTICAL

Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15590.16	48.97	54.00	-5.03	32.08	12.58	38.06	33.75	150	204	Average	HORIZONTAL
2	15590.84	62.16	74.00	-11.84	45.27	12.58	38.06	33.75	150	204	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15594.28	49.21	54.00	-4.79	32.32	12.58	38.06	33.75	150	128	Average	VERTICAL
2	15604.40	62.29	74.00	-11.71	45.46	12.58	38.03	33.78	150	128	Peak	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15714.12	48.72	54.00	-5.28	32.19	12.57	37.84	33.88	150	165	Average	HORIZONTAL
2	15723.96	62.42	74.00	-11.58	45.89	12.57	37.84	33.88	150	165	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15726.40	61.59	74.00	-12.41	45.08	12.57	37.84	33.90	150	252	Peak	VERTICAL
2	15726.72	48.65	54.00	-5.35	32.14	12.57	37.84	33.90	150	252	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11483.72	43.78	54.00	-10.22	27.56	10.71	38.88	33.37	150	214	Average	HORIZONTAL
2	11495.68	57.48	74.00	-16.52	41.25	10.72	38.88	33.37	150	214	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11495.12	57.50	74.00	-16.50	41.27	10.72	38.88	33.37	150	129	Peak	VERTICAL
2	11495.20	44.68	54.00	-9.32	28.45	10.72	38.88	33.37	150	129	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11571.72	58.26	74.00	-15.74	41.95	10.76	38.94	33.39	150	309	Peak	HORIZONTAL
2	11576.68	44.97	54.00	-9.03	28.66	10.76	38.94	33.39	150	309	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11561.12	57.95	74.00	-16.05	41.65	10.75	38.93	33.38	150	241	Peak	VERTICAL
2	11579.48	44.45	54.00	-9.55	28.14	10.76	38.94	33.39	150	241	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11657.16	59.35	74.00	-14.65	42.96	10.81	38.99	33.41	150	219	Peak	HORIZONTAL
2	11659.72	45.68	54.00	-8.32	29.29	10.81	38.99	33.41	150	219	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11649.04	46.08	54.00	-7.92	29.70	10.81	38.98	33.41	150	289	Average	VERTICAL
2	11654.16	59.43	74.00	-14.57	43.04	10.81	38.99	33.41	150	289	Peak	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15538.48	63.27	74.00	-10.73	46.25	12.58	38.14	33.70	150	192	Peak	HORIZONTAL
2	15546.48	49.77	54.00	-4.23	32.77	12.58	38.12	33.70	150	192	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15532.84	48.92	54.00	-5.08	31.90	12.58	38.14	33.70	150	256	Average	VERTICAL
2	15539.52	62.40	74.00	-11.60	45.38	12.58	38.14	33.70	150	256	Peak	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15594.84	48.02	54.00	-5.98	31.16	12.58	38.03	33.75	150	192	Average	HORIZONTAL
2	15600.12	62.10	74.00	-11.90	45.27	12.58	38.03	33.78	150	192	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15591.52	62.95	74.00	-11.05	46.06	12.58	38.06	33.75	150	236	Peak	VERTICAL
2	15592.60	49.20	54.00	-4.80	32.31	12.58	38.06	33.75	150	236	Average	VERTICAL



Temperature	24°C	Humidity	65%
Test Engineer	Brian Sun & Gino Huang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 09, 2015		
Test Mode	Mode 4 (Set 7 Polarized Panel antenna / 3.89dBi / 4TX)		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15710.44	48.85	54.00	-5.15	32.29	12.57	37.87	33.88	150	218	Average	HORIZONTAL
2	15720.52	62.25	74.00	-11.75	45.72	12.57	37.84	33.88	150	218	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15710.88	48.58	54.00	-5.42	32.02	12.57	37.87	33.88	150	168	Average	VERTICAL
2	15718.48	61.72	74.00	-12.28	45.19	12.57	37.84	33.88	150	168	Peak	VERTICAL