


## Appendix A. Test Setup Photos

### Test Setup Photos>

The equipment under test was placed on a wooden desk inside of shield room. The isotropic field probe was used to measure the field strength for 6 EUT surfaces, and during measurement a separation of 10cm is maintained between EUT surface and the center of the field probe.

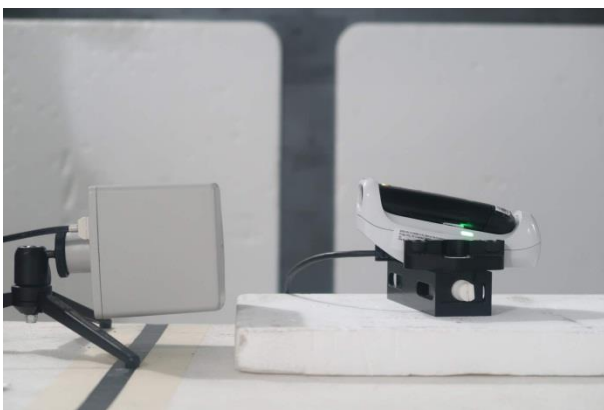

The Electric Field Probe is placed 10cm distance to the front surface of EUT