




# FCC SAR TEST REPORT

FCC ID : UZ7EC55BK  
Equipment : Enterprise Computer  
Brand Name : Zebra  
Model Name : EC55BK  
Applicant : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Manufacturer : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Aug. 05, 2020 and testing was started from Aug. 28, 2020 and completed on Oct. 15, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 5
3. Equipment Under Test (EUT) Information..... 5
3.1 General Information ..... 5
3.2 General LTE SAR Test and Reporting Considerations ..... 6
4. RF Exposure Limits..... 8
4.1 Uncontrolled Environment..... 8
4.2 Controlled Environment..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction ..... 9
5.2 SAR Definition..... 9
6. System Description and Setup .....10
6.1 Test Site Location.....10
6.2 E-Field Probe .....11
6.3 Data Acquisition Electronics (DAE) .....11
6.4 Phantom.....12
6.5 Device Holder.....13
7. Measurement Procedures .....14
7.1 Spatial Peak SAR Evaluation.....14
7.2 Power Reference Measurement.....15
7.3 Area Scan .....15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures.....16
7.6 Power Drift Monitoring.....16
8. Test Equipment List.....17
9. System Verification .....18
9.1 Tissue Simulating Liquids.....18
9.2 Tissue Verification .....19
9.3 System Performance Check Results.....20
10. RF Exposure Positions .....22
10.1 Ear and handset reference point .....22
10.2 Definition of the cheek position .....23
10.3 Definition of the tilt position .....24
10.4 Body Worn Accessory .....24
10.5 Hand Exposure .....25
10.6 Wireless Router.....25
11. GSM/UMTS/LTE Output Power (Unit: dBm) .....26
12. WiFi/Bluetooth Output Power (Unit: dBm).....51
13. Antenna Location.....62
14. SAR Test Results .....63
14.1 Head SAR .....66
14.2 Hotspot SAR .....70
14.3 Body Worn Accessory SAR.....74
14.4 Hand SAR .....77
14.5 Repeated SAR Measurement .....79
15. Simultaneous Transmission Analysis .....80
15.1 Head Exposure Conditions .....81
15.2 Hotspot Exposure Conditions.....82
15.3 Body-Worn Accessory Exposure Conditions .....83
15.4 SPLSR Evaluation and Analysis.....84
16. Supplemental Antenna tuner tests results .....94
17. Uncertainty Assessment .....98
18. References.....98
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos





**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for **Zebra Technologies Corporation, Enterprise Computer, EC55BK**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission	
		Head (Separation 0mm)	Body-worn (Separation 0mm)	Hotspot (Separation 10mm)	Hand (Separation 0mm)	1g SAR (W/kg)	10g SAR (W/kg)
		1g SAR (W/kg)			10g SAR (W/kg)		
Licensed	GSM850	0.42	0.52	0.64	0.59	1.59	2.13
	GSM1900	0.38	0.17	0.53	0.44		
	WCDMA II	0.50	0.49	0.78	0.45		
	WCDMA IV	0.49	0.40	0.73	0.41		
	WCDMA V	0.33	0.38	0.51	0.35		
	LTE Band 2	0.60	0.42	0.80	0.40		
	LTE Band 4	0.45	0.44	0.83	0.37		
	LTE Band 5	0.38	0.43	0.41	0.31		
	LTE Band 7	0.54	0.86	1.34	0.58		
LTE Band 38 / 41	0.54	0.52	0.59	0.34			
DTS	2.4GHz WLAN	1.27	0.04	0.21	0.67	1.49	2.13
NII	5GHz WLAN	1.23	0.29	0.49	0.87	1.59	2.13
DSS	Bluetooth	< 0.01	< 0.01	< 0.01	< 0.01	1.42	1.46
Date of Testing:		2020/8/28 ~ 2020/10/15					

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.(FCC). This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

**Reviewed by: Jason Wang**  
**Report Producer: Daisy Peng**



## 2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, if the KDB standards were not list within TAF approval, because it is include in the FCC KDB 447498.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

## 3. Equipment Under Test (EUT) Information

### 3.1 General Information

Product Feature & Specification	
Equipment Name	Enterprise Computer
Brand Name	Zebra
Model Name	EC55BK
FCC ID	UZ7EC55BK
IMEI Code	352764550005388
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS/DTM RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	EV2
SW Version	Android version 10
FW Version	10-13-12.00-QG-U0D-PRD-HEL-04
MFD	02JUL20
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Engineering sample



**3.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05												
FCC ID	UZ7EC55BK											
Equipment Name	Enterprise Computer											
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz											
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz											
uplink modulations used	QPSK / 16QAM / 64QAM											
LTE Voice / Data requirements	Voice and Data											
LTE MPR permanently built-in by design	<b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b>											
	Modulation		Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)			
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz					
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1				
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1				
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2				
	256 QAM	≥ 1						≤ 5				
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)											
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.											
Power reduction applied to satisfy SAR compliance	Yes, when operating in hotspot mode that LTE B7 power reduction applied to satisfy SAR compliance.											
<b>Transmission (H, M, L) channel numbers and frequencies in each LTE band</b>												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				



LTE Band 7								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560
LTE Band 38								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610
LTE Band 41								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680



### 4. RF Exposure Limits

#### 4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

#### 4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

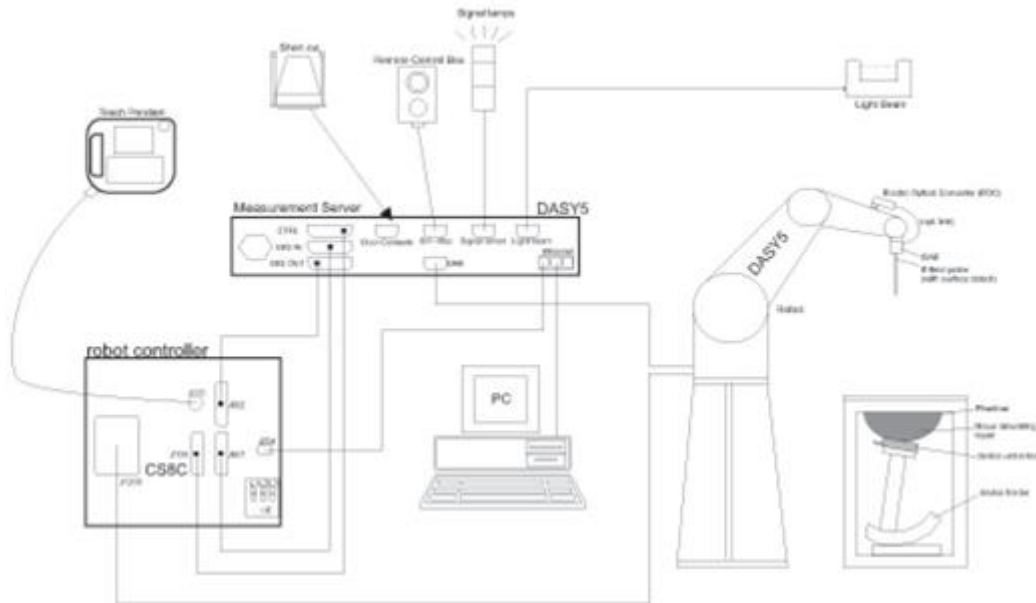

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location


Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
Test Site No.	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.





**8. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1750MHz System Validation Kit <sup>(2)</sup>	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit <sup>(2)</sup>	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	2450MHz System Validation Kit	D2450V2	929	Nov. 21, 2019	Nov. 20, 2020
SPEAG	2600MHz System Validation Kit <sup>(2)</sup>	D2600V2	1008	Aug. 31, 2018	Aug. 28, 2021
SPEAG	5GHz System Validation Kit <sup>(2)</sup>	D5GHzV2	1006	Sep. 27, 2018	Sep. 24, 2021
SPEAG	Data Acquisition Electronics	DAE4	316	Dec. 20, 2019	Dec. 19, 2020
SPEAG	Data Acquisition Electronics	DAE3	495	Jul. 21, 2020	Jul. 20, 2021
SPEAG	Data Acquisition Electronics	DAE4	854	May. 26, 2020	May. 25, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Dec. 18, 2019	Dec. 17, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3753	Jun. 25, 2020	Jun. 24, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2020	Jul. 23, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
R&S	BT Base Station	CBT	100815	Feb. 15, 2020	Feb. 14, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 22, 2020	Jul. 21, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 18, 2019	Nov. 17, 2020
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1240001	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Power Sensor	MA2411B	1207349	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Aug. 26, 2020	Aug. 25, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 06, 2020	Aug. 05, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.


## **9. System Verification**

### **9.1 Tissue Simulating Liquids**

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



**Fig 10.1** Photo of Liquid Height for Head SAR

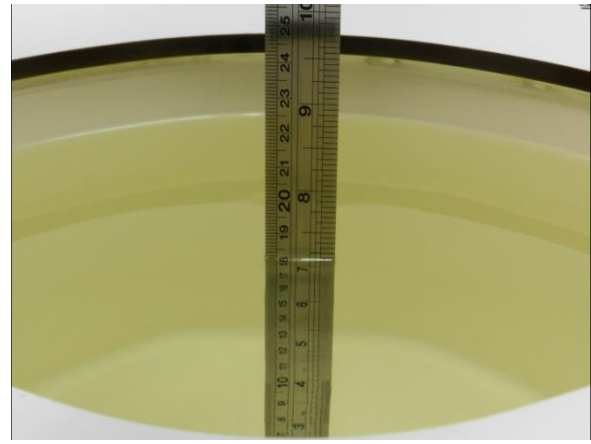

**Fig 10.2** Photo of Liquid Height for Body SAR



**9.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	22.3	0.871	40.832	0.90	41.50	-3.22	-1.61	±5	2020/9/29
835	22.3	0.931	42.291	0.90	41.50	3.44	1.91	±5	2020/10/7
1750	22.5	1.360	40.072	1.37	40.10	-0.73	-0.07	±5	2020/9/30
1750	22.5	1.350	40.022	1.37	40.10	-1.46	-0.19	±5	2020/10/8
1900	22.5	1.433	38.773	1.40	40.00	2.36	-3.07	±5	2020/10/2
1900	22.5	1.432	38.772	1.40	40.00	2.29	-3.07	±5	2020/10/8
2450	22.6	1.842	39.874	1.80	39.20	2.33	1.72	±5	2020/8/28
2450	22.4	1.800	39.388	1.80	39.20	0.00	0.48	±5	2020/10/15
2600	22.6	1.984	38.231	1.96	39.00	1.22	-1.97	±5	2020/10/1
2600	22.5	2.021	40.188	1.96	39.00	3.11	3.05	±5	2020/10/8
5250	22.4	4.592	36.821	4.71	35.95	-2.51	2.42	±5	2020/9/7
5600	22.4	4.921	36.171	5.07	35.50	-2.94	1.89	±5	2020/9/8
5750	22.4	5.131	36.068	5.22	35.30	-1.70	2.18	±5	2020/8/31




9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/9/29	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	2.26	9.55	9.04	-5.34
2020/10/7	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	2.41	9.55	9.64	0.94
2020/9/30	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	8.89	36.70	35.56	-3.11
2020/10/8	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	8.83	36.70	35.32	-3.76
2020/10/2	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	9.74	40.20	38.96	-3.08
2020/10/8	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	9.74	40.20	38.96	-3.08
2020/8/28	2450	250	D2450V2-929	ES3DV3 - SN3124	DAE4 Sn316	12.90	53.10	51.6	-2.82
2020/10/15	2450	250	D2450V2-929	EX3DV4 - SN3753	DAE4 Sn854	12.90	53.10	51.6	-2.82
2020/10/1	2600	250	D2600V2-1008	ES3DV3 - SN3124	DAE4 Sn316	13.30	56.40	53.2	-5.67
2020/10/8	2600	250	D2600V2-1008	ES3DV3 - SN3124	DAE4 Sn316	13.60	56.40	54.4	-3.55
2020/9/7	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE3 Sn495	7.54	80.70	75.4	-6.57
2020/9/8	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE3 Sn495	8.52	83.30	85.2	2.28
2020/8/31	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7306	DAE3 Sn495	7.52	80.40	75.2	-6.47

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/9/29	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	1.49	6.21	5.96	-4.03
2020/10/7	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	1.59	6.21	6.36	2.42
2020/9/30	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	4.79	19.40	19.16	-1.24
2020/10/8	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	4.75	19.40	19	-2.06
2020/10/2	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	5.04	21.20	20.16	-4.91
2020/10/8	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	5.04	21.20	20.16	-4.91
2020/8/28	2450	250	D2450V2-929	ES3DV3 - SN3124	DAE4 Sn316	5.91	24.70	23.64	-4.29
2020/10/15	2450	250	D2450V2-929	EX3DV4 - SN3753	DAE4 Sn854	6.04	24.70	24.16	-2.19
2020/10/1	2600	250	D2600V2-1008	ES3DV3 - SN3124	DAE4 Sn316	5.92	25.30	23.68	-6.40
2020/10/8	2600	250	D2600V2-1008	ES3DV3 - SN3124	DAE4 Sn316	6.03	25.30	24.12	-4.66
2020/9/7	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE3 Sn495	2.15	23.20	21.5	-7.33
2020/9/8	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE3 Sn495	2.35	23.80	23.5	-1.26
2020/8/31	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7306	DAE3 Sn495	2.11	22.90	21.1	-7.86

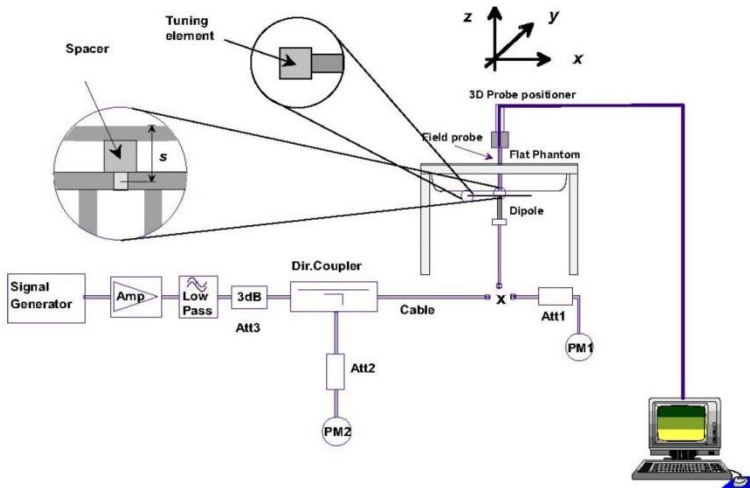

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 10. RF Exposure Positions

### 10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

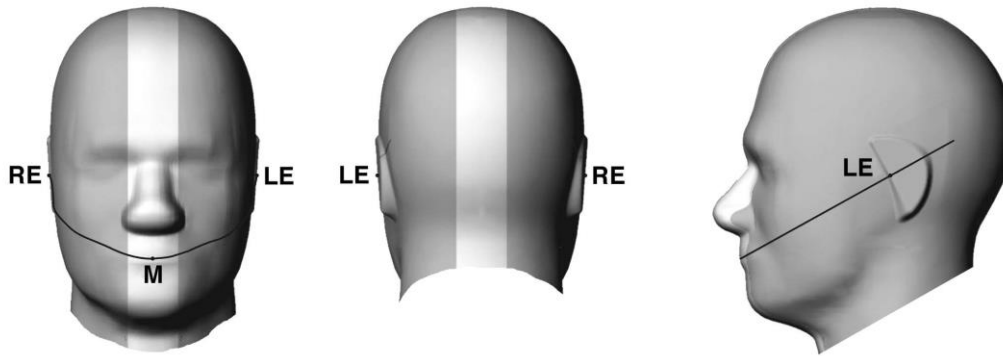


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.


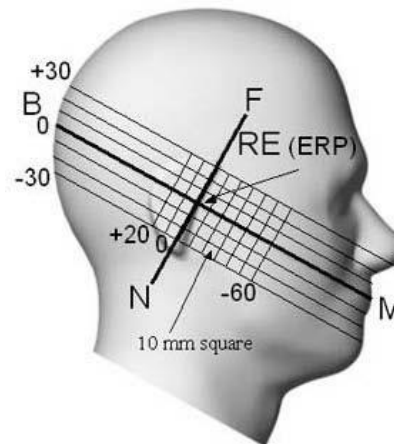



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**10.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

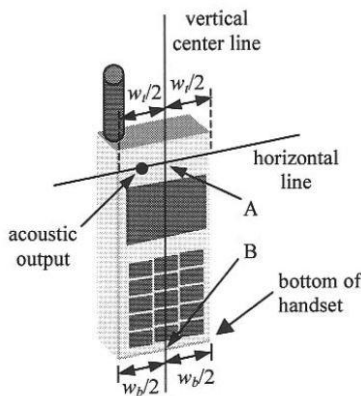

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

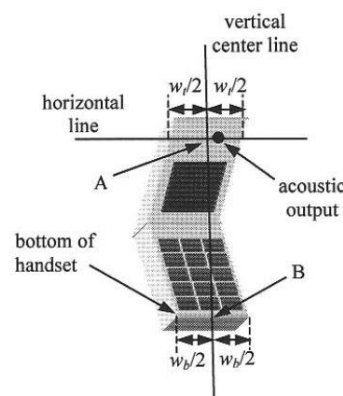

**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

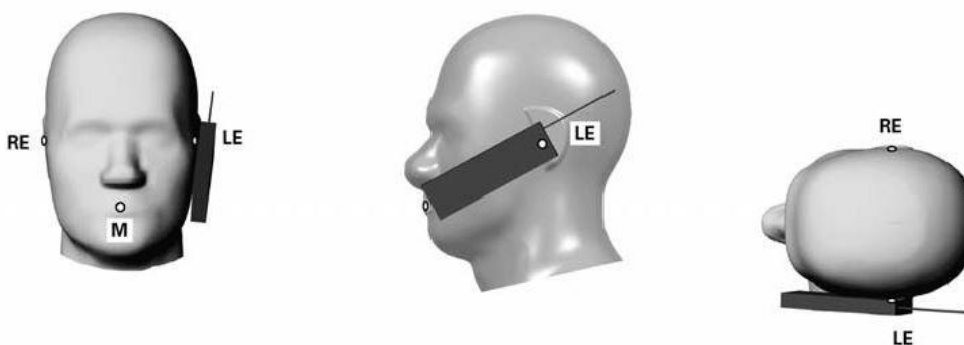


**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**



**10.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

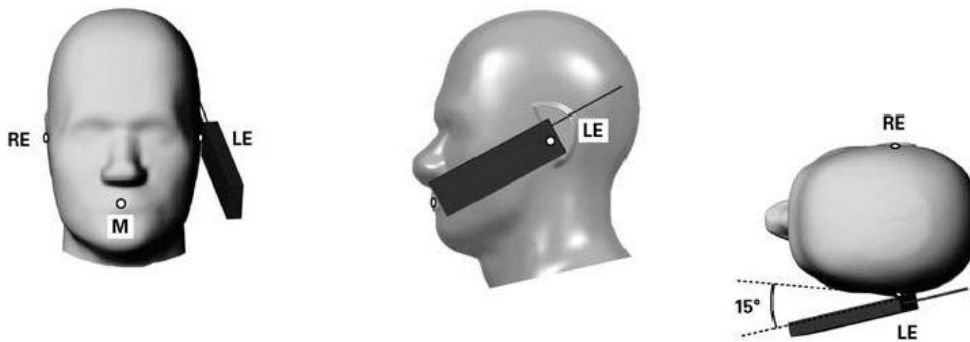


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

**10.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

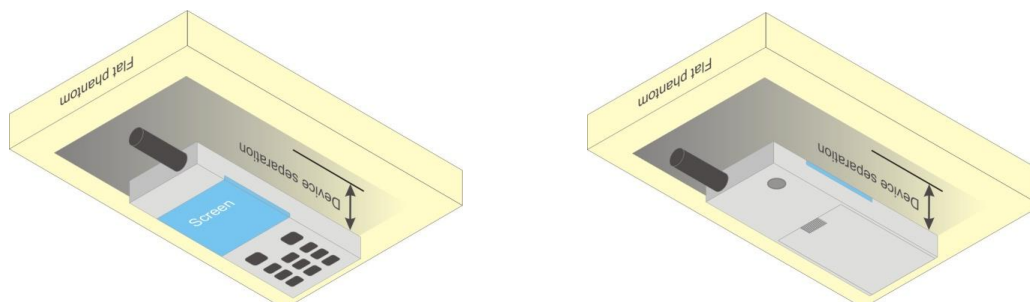

**Fig 9.4 Body Worn Position**



### **10.5 Hand Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W  $\geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 11. GSM/UMTS/LTE Output Power (Unit: dBm)

### <GSM Conducted Power>

**General Note:**

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table below, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 * \log [\sum (\text{power of each slot, in mW}) / 8]$$

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		32.92	33.11	33.20	34.00	23.92	24.11	24.20	25.00
GPRS 1 Tx slot		32.98	33.12	33.30	33.50	23.98	24.12	24.30	24.50
GPRS 2 Tx slots		32.01	32.08	32.24	32.50	26.01	26.08	26.24	26.50
GPRS 3 Tx slots		31.14	30.70	31.10	31.50	26.88	26.44	26.84	27.24
GPRS 4 Tx slots		29.90	30.25	29.45	30.50	26.90	27.25	26.45	27.50
EDGE 1 Tx slot		27.24	26.86	26.72	28.00	18.24	17.86	17.72	19.00
EDGE 2 Tx slots		26.69	26.47	26.29	27.00	20.69	20.47	20.29	21.00
EDGE 3 Tx slots		25.44	25.27	25.41	26.00	21.18	21.01	21.15	21.74
EDGE 4 Tx slots		24.71	24.64	24.69	25.50	21.71	21.64	21.69	22.50
DTM Multi-slot class 5	GSM 1 Tx slot	31.96	32.10	32.13	32.50	25.98	26.12	26.14	26.48
	GPRS 1 Tx slot	32.04	32.19	32.20	32.50				
DTM Multi-slot class 9	GSM 1 Tx slot	31.99	32.14	32.17	32.50	26.01	26.15	26.18	26.48
	GPRS 1 Tx slot	32.08	32.21	32.24	32.50				
DTM Multi-slot class 11	GSM 1 Tx slot	30.61	30.77	30.84	31.50	26.41	26.56	26.62	27.24
	GPRS 2 Tx slots	30.70	30.85	30.90	31.50				
DTM Multi-slot class 5	GSM 1 Tx slot	32.45	32.41	32.47	32.50	24.50	24.43	24.48	24.55
	EDGE 1 Tx slot	26.98	26.77	26.81	27.00				
DTM Multi-slot class 9	GSM 1 Tx slot	32.20	32.28	32.35	32.50	24.11	24.18	24.39	24.55
	EDGE 1 Tx slot	26.03	26.04	26.83	27.00				
DTM Multi-slot class 11	GSM 1 Tx slot	31.24	31.44	31.12	31.50	24.07	24.25	24.01	24.41
	EDGE 2 Tx slots	25.50	25.65	25.56	26.00				



GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		30.20	30.26	30.30	31.00	21.20	21.26	21.30	22.00
GPRS 1 Tx slot		30.21	30.37	30.35	30.50	21.21	21.37	21.35	21.50
GPRS 2 Tx slots		29.25	29.30	29.19	29.50	23.25	23.30	23.19	23.50
GPRS 3 Tx slots		28.27	28.21	27.90	28.50	24.01	23.95	23.64	24.24
GPRS 4 Tx slots		27.07	27.10	27.06	27.50	24.07	24.10	24.06	24.50
EDGE 1 Tx slot		26.43	26.45	26.15	27.00	17.43	17.45	17.15	18.00
EDGE 2 Tx slots		25.49	25.53	25.33	26.00	19.49	19.53	19.33	20.00
EDGE 3 Tx slots		24.33	24.52	24.70	25.00	20.07	20.26	20.44	20.74
EDGE 4 Tx slots		23.89	23.79	23.92	24.50	20.89	20.79	20.92	21.50
DTM Multi-slot class 5	GSM 1 Tx slot	29.22	29.00	29.49	29.50	23.23	23.03	23.46	23.48
	GPRS 1 Tx slot	29.29	29.10	29.48	29.50				
DTM Multi-slot class 9	GSM 1 Tx slot	29.21	29.00	29.50	29.50	23.22	23.03	23.47	23.48
	GPRS 1 Tx slot	29.28	29.10	29.49	29.50				
DTM Multi-slot class 11	GSM 1 Tx slot	28.32	27.76	27.85	28.50	24.12	23.60	23.70	24.24
	GPRS 2 Tx slots	28.41	27.91	28.02	28.50				
DTM Multi-slot class 5	GSM 1 Tx slot	29.45	29.48	29.50	29.50	21.93	21.90	21.96	22.07
	EDGE 1 Tx slot	25.63	25.48	25.63	26.00				
DTM Multi-slot class 9	GSM 1 Tx slot	29.29	29.35	29.34	29.50	21.73	21.79	21.81	22.07
	EDGE 1 Tx slot	25.35	25.39	25.51	26.00				
DTM Multi-slot class 11	GSM 1 Tx slot	28.50	28.45	28.46	28.50	22.23	22.16	22.01	22.24
	EDGE 2 Tx slots	24.98	24.88	24.55	25.00				

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

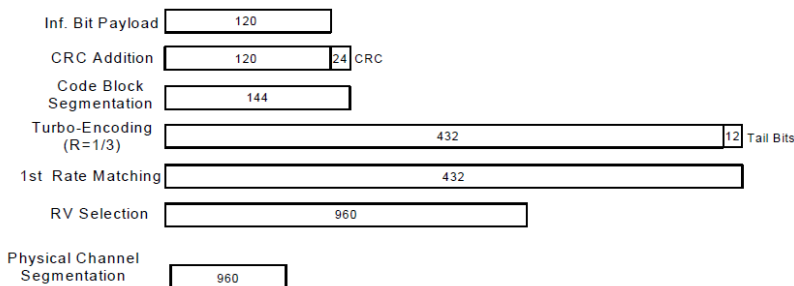

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.


Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel	Rx Channel	9262	9400	9538		1312	1413	1513		4132	4182	4233	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	24.49	24.66	24.57	25.00	24.46	24.54	24.48	25.00	24.80	24.85	24.72	25.50
3GPP Rel 99	RMC 12.2Kbps	24.60	24.67	24.66	25.00	24.62	24.69	24.64	25.00	24.89	24.92	24.86	25.50
3GPP Rel 6	HSDPA Subtest-1	23.65	23.66	23.64	25.00	23.54	23.61	23.50	25.00	24.83	24.79	24.67	25.50
3GPP Rel 6	HSDPA Subtest-2	23.72	23.70	23.68	25.00	23.57	23.61	23.57	25.00	23.78	23.90	23.92	25.50
3GPP Rel 6	HSDPA Subtest-3	23.05	23.19	23.20	24.50	22.95	23.12	23.16	24.50	23.44	23.43	23.36	25.00
3GPP Rel 6	HSDPA Subtest-4	23.17	23.18	23.17	24.50	22.95	23.11	23.15	24.50	23.32	23.41	23.34	25.00
3GPP Rel 8	DC-HSDPA Subtest-1	23.44	23.52	23.60	25.00	23.43	23.49	23.36	25.00	24.67	24.79	24.71	25.50
3GPP Rel 8	DC-HSDPA Subtest-2	23.53	23.60	23.76	25.00	23.44	23.51	23.49	25.00	23.77	23.80	23.71	25.50
3GPP Rel 8	DC-HSDPA Subtest-3	23.18	23.16	22.96	24.50	22.97	23.09	22.97	24.50	23.24	23.39	23.28	25.00
3GPP Rel 8	DC-HSDPA Subtest-4	23.10	23.09	23.09	24.50	23.04	22.98	23.01	24.50	23.31	23.32	23.23	25.00
3GPP Rel 6	HSUPA Subtest-1	23.46	23.47	23.43	25.00	23.06	23.02	23.05	25.00	23.89	23.87	23.74	25.50
3GPP Rel 6	HSUPA Subtest-2	21.50	21.60	21.54	23.00	21.51	21.54	21.53	23.00	21.91	21.90	21.85	23.50
3GPP Rel 6	HSUPA Subtest-3	22.61	22.61	22.60	24.00	22.45	22.57	22.45	24.00	22.76	22.89	22.83	24.50
3GPP Rel 6	HSUPA Subtest-4	21.56	21.63	21.67	23.00	21.42	21.58	21.47	23.00	21.80	21.87	21.83	23.50
3GPP Rel 6	HSUPA Subtest-5	23.55	23.63	23.67	25.00	23.50	23.59	23.48	25.00	23.83	23.88	23.88	25.50




**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B17/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 38 SAR test was covered by Band 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

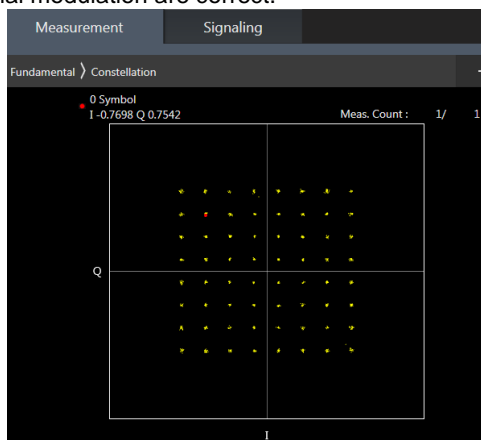

**64QAM**

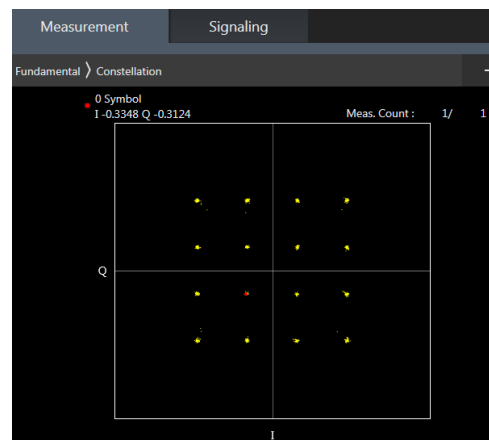

**16QAM**





**Default Power Mode**

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	24.91	25.06	24.80	25.5	0
20	QPSK	1	49	24.96	24.95	24.73		
20	QPSK	1	99	24.79	24.88	24.66		
20	QPSK	50	0	24.02	24.04	23.87	24.5	1
20	QPSK	50	24	24.02	24.05	23.79		
20	QPSK	50	50	23.93	23.96	23.75		
20	QPSK	100	0	23.98	24.02	23.85	24.5	1
20	16QAM	1	0	24.20	24.19	24.05		
20	16QAM	1	49	24.26	24.15	24.08		
20	16QAM	1	99	24.20	24.20	23.96	23.5	2
20	16QAM	50	0	23.05	23.15	22.93		
20	16QAM	50	24	23.11	23.14	22.89		
20	16QAM	50	50	23.03	23.12	22.82	23.5	2
20	16QAM	100	0	23.07	23.12	22.93		
20	64QAM	1	0	23.14	23.15	23.00		
20	64QAM	1	49	23.23	23.03	23.04	23.5	2
20	64QAM	1	99	22.91	23.16	22.91		
20	64QAM	50	0	22.05	22.15	21.96		
20	64QAM	50	24	22.16	22.17	21.87	22.5	3
20	64QAM	50	50	22.06	22.11	21.85		
20	64QAM	100	0	22.08	22.14	21.94		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	24.76	24.92	24.68	25.5	0
15	QPSK	1	37	24.85	24.83	24.72		
15	QPSK	1	74	24.69	24.78	24.49		
15	QPSK	36	0	23.88	23.91	23.79	24.5	1
15	QPSK	36	20	23.98	24.03	23.78		
15	QPSK	36	39	23.83	23.95	23.68		
15	QPSK	75	0	23.78	23.88	23.74	24.5	1
15	16QAM	1	0	24.19	23.99	23.96		
15	16QAM	1	37	24.12	24.14	24.00		
15	16QAM	1	74	24.03	24.04	23.93	23.5	2
15	16QAM	36	0	22.93	22.97	22.88		
15	16QAM	36	20	23.02	23.14	22.72		
15	16QAM	36	39	23.02	23.04	22.67	23.5	2
15	16QAM	75	0	22.94	23.12	22.93		
15	64QAM	1	0	23.04	23.04	22.90		
15	64QAM	1	37	23.21	22.86	22.90	23.5	2
15	64QAM	1	74	22.71	23.14	22.84		
15	64QAM	36	0	21.99	22.05	21.86		
15	64QAM	36	20	21.97	22.06	21.87	22.5	3
15	64QAM	36	39	22.01	22.00	21.69		
15	64QAM	75	0	21.91	21.98	21.93		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	24.57	24.86	24.67	25.5	0
10	QPSK	1	25	24.66	24.63	24.70		
10	QPSK	1	49	24.50	24.60	24.33		
10	QPSK	25	0	23.81	23.84	23.65	24.5	1
10	QPSK	25	12	23.81	23.96	23.74		
10	QPSK	25	25	23.81	23.95	23.48		
10	QPSK	50	0	23.67	23.83	23.55		
10	16QAM	1	0	24.00	23.95	23.86	24.5	1
10	16QAM	1	25	24.12	24.13	23.91		
10	16QAM	1	49	23.97	23.91	23.82		
10	16QAM	25	0	22.77	22.94	22.79	23.5	2
10	16QAM	25	12	22.87	22.94	22.57		
10	16QAM	25	25	22.96	23.00	22.60		
10	16QAM	50	0	22.81	23.12	22.79		
10	64QAM	1	0	23.03	23.02	22.84	23.5	2
10	64QAM	1	25	23.15	22.78	22.73		
10	64QAM	1	49	22.61	23.14	22.75		
10	64QAM	25	0	21.87	21.89	21.68	22.5	3
10	64QAM	25	12	21.95	21.92	21.72		
10	64QAM	25	25	21.83	21.82	21.57		
10	64QAM	50	0	21.86	21.96	21.77		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	24.52	24.82	24.55	25.5	0
5	QPSK	1	12	24.54	24.50	24.60		
5	QPSK	1	24	24.32	24.40	24.32		
5	QPSK	12	0	23.73	23.76	23.64	24.5	1
5	QPSK	12	7	23.61	23.90	23.56		
5	QPSK	12	13	23.81	23.78	23.46		
5	QPSK	25	0	23.49	23.65	23.50		
5	16QAM	1	0	23.98	23.84	23.81	24.5	1
5	16QAM	1	12	24.04	24.00	23.88		
5	16QAM	1	24	23.90	23.86	23.71		
5	16QAM	12	0	22.70	22.76	22.79	23.5	2
5	16QAM	12	7	22.71	22.80	22.50		
5	16QAM	12	13	22.89	22.87	22.59		
5	16QAM	25	0	22.75	23.02	22.79		
5	64QAM	1	0	22.94	22.86	22.69	23.5	2
5	64QAM	1	12	23.15	22.68	22.60		
5	64QAM	1	24	22.48	23.05	22.71		
5	64QAM	12	0	21.82	21.72	21.51	22.5	3
5	64QAM	12	7	21.93	21.78	21.65		
5	64QAM	12	13	21.78	21.72	21.49		
5	64QAM	25	0	21.84	21.76	21.65		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	24.46	24.75	24.38	25.5	0
3	QPSK	1	8	24.35	24.43	24.58		



3	QPSK	1	14	24.24	24.39	24.18		
3	QPSK	8	0	23.66	23.67	23.47	24.5	1
3	QPSK	8	4	23.46	23.72	23.54		
3	QPSK	8	7	23.68	23.66	23.27		
3	QPSK	15	0	23.44	23.47	23.48		
3	16QAM	1	0	23.82	23.83	23.64	24.5	1
3	16QAM	1	8	24.02	23.80	23.88		
3	16QAM	1	14	23.73	23.80	23.67		
3	16QAM	8	0	22.54	22.60	22.70	23.5	2
3	16QAM	8	4	22.54	22.77	22.48		
3	16QAM	8	7	22.72	22.70	22.42		
3	16QAM	15	0	22.68	22.94	22.59		
3	64QAM	1	0	22.85	22.72	22.60	23.5	2
3	64QAM	1	8	22.95	22.68	22.51		
3	64QAM	1	14	22.39	22.99	22.62		
3	64QAM	8	0	21.62	21.67	21.41	22.5	3
3	64QAM	8	4	21.80	21.78	21.62		
3	64QAM	8	7	21.66	21.67	21.32		
3	64QAM	15	0	21.70	21.68	21.56		
Channel				18607	18900	19193		
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	24.49	24.68	24.53	25.5	0
1.4	QPSK	1	3	24.34	24.40	24.55		
1.4	QPSK	1	5	24.14	24.20	24.22		
1.4	QPSK	3	0	23.56	23.57	23.56		
1.4	QPSK	3	1	23.59	23.84	23.54		
1.4	QPSK	3	3	23.77	23.59	23.52		
1.4	QPSK	6	0	23.39	23.58	23.45	24.5	1
1.4	16QAM	1	0	23.92	23.74	23.72	24.5	1
1.4	16QAM	1	3	23.85	23.81	23.88		
1.4	16QAM	1	5	23.71	23.78	23.60		
1.4	16QAM	3	0	22.69	22.56	22.61		
1.4	16QAM	3	1	22.64	22.66	22.63		
1.4	16QAM	3	3	22.87	22.87	22.61		
1.4	16QAM	6	0	22.70	22.92	22.72	23.5	2
1.4	64QAM	1	0	22.86	22.83	22.61	23.5	2
1.4	64QAM	1	3	22.97	22.48	22.52		
1.4	64QAM	1	5	22.33	22.87	22.62		
1.4	64QAM	3	0	21.70	21.55	21.67		
1.4	64QAM	3	1	21.77	21.74	21.65		
1.4	64QAM	3	3	21.74	21.70	21.65		
1.4	64QAM	6	0	21.66	21.63	21.54	22.5	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	24.83	24.89	24.84	25.5	0
20	QPSK	1	49	24.78	24.79	24.84		
20	QPSK	1	99	24.74	24.66	24.68		
20	QPSK	50	0	23.85	23.87	23.82	24.5	1
20	QPSK	50	24	23.94	23.90	23.84		
20	QPSK	50	50	23.88	23.78	23.83		
20	QPSK	100	0	23.89	23.82	23.82	24.5	1
20	16QAM	1	0	24.08	24.21	24.17		
20	16QAM	1	49	24.08	24.08	24.15		
20	16QAM	1	99	24.05	23.94	24.04	23.5	2
20	16QAM	50	0	22.95	22.96	22.93		
20	16QAM	50	24	23.00	22.98	22.90		
20	16QAM	50	50	22.95	22.89	22.92	23.5	2
20	16QAM	100	0	22.97	22.91	22.87		
20	64QAM	1	0	23.01	23.12	23.07		
20	64QAM	1	49	23.02	23.06	23.08	23.5	2
20	64QAM	1	99	23.02	22.88	23.00		
20	64QAM	50	0	21.94	21.99	21.97		
20	64QAM	50	24	22.03	21.95	21.90	22.5	3
20	64QAM	50	50	21.95	21.89	21.93		
20	64QAM	100	0	21.99	21.95	21.89		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	24.64	24.89	24.77	25.5	0
15	QPSK	1	37	24.61	24.66	24.71		
15	QPSK	1	74	24.68	24.65	24.53		
15	QPSK	36	0	23.83	23.74	23.69	24.5	1
15	QPSK	36	20	23.77	23.75	23.80		
15	QPSK	36	39	23.83	23.67	23.74		
15	QPSK	75	0	23.75	23.80	23.77	24.5	1
15	16QAM	1	0	23.98	24.18	24.14		
15	16QAM	1	37	23.98	24.07	23.97		
15	16QAM	1	74	23.85	23.81	24.03	23.5	2
15	16QAM	36	0	22.88	22.83	22.91		
15	16QAM	36	20	22.81	22.82	22.83		
15	16QAM	36	39	22.81	22.84	22.76	23.5	2
15	16QAM	75	0	22.86	22.86	22.78		
15	64QAM	1	0	22.96	23.04	22.92		
15	64QAM	1	37	22.87	23.03	22.91	23.5	2
15	64QAM	1	74	23.00	22.86	22.83		
15	64QAM	36	0	21.78	21.89	21.84		
15	64QAM	36	20	21.98	21.81	21.83	22.5	3
15	64QAM	36	39	21.89	21.80	21.73		
15	64QAM	75	0	21.99	21.83	21.85		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	24.54	24.79	24.74	25.5	0
10	QPSK	1	25	24.50	24.63	24.67		
10	QPSK	1	49	24.53	24.45	24.50		
10	QPSK	25	0	23.78	23.57	23.50	24.5	1
10	QPSK	25	12	23.69	23.69	23.66		
10	QPSK	25	25	23.70	23.54	23.73		
10	QPSK	50	0	23.75	23.63	23.57		
10	16QAM	1	0	23.98	24.07	23.96	24.5	1
10	16QAM	1	25	23.87	23.98	23.88		
10	16QAM	1	49	23.68	23.67	23.98		
10	16QAM	25	0	22.74	22.68	22.87	23.5	2
10	16QAM	25	12	22.68	22.72	22.74		
10	16QAM	25	25	22.61	22.69	22.59		
10	16QAM	50	0	22.71	22.83	22.60	23.5	2
10	64QAM	1	0	22.94	23.03	22.88		
10	64QAM	1	25	22.79	22.91	22.83		
10	64QAM	1	49	22.92	22.85	22.74		
10	64QAM	25	0	21.76	21.83	21.75	22.5	3
10	64QAM	25	12	21.92	21.72	21.77		
10	64QAM	25	25	21.83	21.68	21.54		
10	64QAM	50	0	21.91	21.82	21.79		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	24.36	24.68	24.74	25.5	0
5	QPSK	1	12	24.47	24.61	24.51		
5	QPSK	1	24	24.47	24.35	24.43		
5	QPSK	12	0	23.58	23.57	23.32	24.5	1
5	QPSK	12	7	23.61	23.49	23.59		
5	QPSK	12	13	23.59	23.35	23.60		
5	QPSK	25	0	23.56	23.61	23.48	24.5	1
5	16QAM	1	0	23.79	24.01	23.80		
5	16QAM	1	12	23.76	23.86	23.83		
5	16QAM	1	24	23.65	23.57	23.85	23.5	2
5	16QAM	12	0	22.72	22.66	22.76		
5	16QAM	12	7	22.59	22.52	22.57		
5	16QAM	12	13	22.48	22.58	22.46	22.5	3
5	16QAM	25	0	22.66	22.82	22.42		
5	64QAM	1	0	22.89	22.90	22.79		
5	64QAM	1	12	22.73	22.82	22.75	23.5	2
5	64QAM	1	24	22.82	22.69	22.68		
5	64QAM	12	0	21.59	21.81	21.60		
5	64QAM	12	7	21.82	21.55	21.65	22.5	3
5	64QAM	12	13	21.65	21.51	21.46		
5	64QAM	25	0	21.81	21.69	21.77		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	24.35	24.61	24.74	25.5	0
3	QPSK	1	8	24.46	24.46	24.35		



3	QPSK	1	14	24.31	24.30	24.35		
3	QPSK	8	0	23.58	23.39	23.22	24.5	1
3	QPSK	8	4	23.49	23.30	23.49		
3	QPSK	8	7	23.49	23.20	23.53		
3	QPSK	15	0	23.42	23.44	23.43		
3	16QAM	1	0	23.74	23.93	23.70	24.5	1
3	16QAM	1	8	23.72	23.81	23.68		
3	16QAM	1	14	23.46	23.51	23.75		
3	16QAM	8	0	22.60	22.61	22.74	23.5	2
3	16QAM	8	4	22.56	22.52	22.50		
3	16QAM	8	7	22.36	22.38	22.32		
3	16QAM	15	0	22.58	22.69	22.35		
3	64QAM	1	0	22.70	22.90	22.77	23.5	2
3	64QAM	1	8	22.72	22.67	22.64		
3	64QAM	1	14	22.62	22.66	22.62		
3	64QAM	8	0	21.45	21.77	21.55	22.5	3
3	64QAM	8	4	21.79	21.40	21.46		
3	64QAM	8	7	21.49	21.32	21.31		
3	64QAM	15	0	21.63	21.53	21.72		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	24.17	24.64	24.63	25.5	0
1.4	QPSK	1	3	24.47	24.45	24.31		
1.4	QPSK	1	5	24.32	24.15	24.41		
1.4	QPSK	3	0	23.51	23.68	23.56		
1.4	QPSK	3	1	23.53	23.57	23.67		
1.4	QPSK	3	3	23.54	23.51	23.63	24.5	1
1.4	QPSK	6	0	23.52	23.49	23.33		
1.4	16QAM	1	0	23.62	23.98	23.63	24.5	1
1.4	16QAM	1	3	23.60	23.67	23.81		
1.4	16QAM	1	5	23.61	23.40	23.84		
1.4	16QAM	3	0	22.71	22.52	22.58		
1.4	16QAM	3	1	22.59	22.76	22.53		
1.4	16QAM	3	3	22.62	22.68	22.60	23.5	2
1.4	16QAM	6	0	22.48	22.76	22.28		
1.4	64QAM	1	0	22.81	22.87	22.59	23.5	2
1.4	64QAM	1	3	22.70	22.82	22.61		
1.4	64QAM	1	5	22.75	22.64	22.60		
1.4	64QAM	3	0	21.59	21.78	21.66		
1.4	64QAM	3	1	21.80	21.53	21.62		
1.4	64QAM	3	3	21.56	21.55	21.57		
1.4	64QAM	6	0	21.74	21.68	21.70	22.5	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	25.01	25.05	24.93	25.7	0
10	QPSK	1	25	24.95	24.92	24.75		
10	QPSK	1	49	24.64	24.53	24.41		
10	QPSK	25	0	24.00	23.92	23.71	24.7	1
10	QPSK	25	12	24.09	23.95	23.77		
10	QPSK	25	25	24.03	23.91	23.76		
10	QPSK	50	0	24.08	23.95	23.85	24.7	1
10	16QAM	1	0	24.28	24.30	24.25		
10	16QAM	1	25	24.25	24.22	23.64		
10	16QAM	1	49	24.20	23.93	23.76	23.7	2
10	16QAM	25	0	23.08	23.10	22.60		
10	16QAM	25	12	23.17	23.06	22.42		
10	16QAM	25	25	23.13	22.97	22.61	23.7	2
10	16QAM	50	0	23.16	23.02	22.88		
10	64QAM	1	0	23.21	23.20	23.17		
10	64QAM	1	25	23.14	23.15	22.74	23.7	2
10	64QAM	1	49	23.16	22.90	22.82		
10	64QAM	25	0	22.09	22.09	21.66		
10	64QAM	25	12	22.19	22.05	21.41	22.7	3
10	64QAM	25	25	22.13	21.99	21.56		
10	64QAM	50	0	22.16	22.03	21.74		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	24.85	24.86	24.84	25.7	0
5	QPSK	1	12	24.89	24.87	24.14		
5	QPSK	1	24	24.82	24.35	24.36		
5	QPSK	12	0	23.80	24.02	23.46	24.7	1
5	QPSK	12	7	23.92	23.84	23.09		
5	QPSK	12	13	23.99	23.82	23.41		
5	QPSK	25	0	23.92	23.84	23.70	24.7	1
5	16QAM	1	0	24.11	24.30	24.11		
5	16QAM	1	12	24.18	24.10	23.54		
5	16QAM	1	24	24.08	23.81	23.65	23.7	2
5	16QAM	12	0	22.91	22.90	22.57		
5	16QAM	12	7	23.02	23.03	22.37		
5	16QAM	12	13	23.10	22.91	22.50	23.7	2
5	16QAM	25	0	23.12	23.01	22.84		
5	64QAM	1	0	23.01	23.00	23.00		
5	64QAM	1	12	23.04	23.02	22.56	23.7	2
5	64QAM	1	24	22.97	22.75	22.67		
5	64QAM	12	0	22.08	22.02	21.60		
5	64QAM	12	7	22.07	21.94	21.27	22.7	3
5	64QAM	12	13	22.02	21.95	21.45		
5	64QAM	25	0	22.09	21.83	21.71		





Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	24.79	24.66	24.79	25.7	0
3	QPSK	1	8	24.79	24.74	23.97		
3	QPSK	1	14	24.67	24.26	24.34		
3	QPSK	8	0	23.73	23.97	23.45	24.7	1
3	QPSK	8	4	23.87	23.84	22.89		
3	QPSK	8	7	23.84	23.67	23.40		
3	QPSK	15	0	23.92	23.79	23.63		
3	16QAM	1	0	23.91	24.25	24.03	24.7	1
3	16QAM	1	8	24.03	23.94	23.47		
3	16QAM	1	14	23.91	23.64	23.47		
3	16QAM	8	0	22.89	22.80	22.42	23.7	2
3	16QAM	8	4	22.90	22.98	22.21		
3	16QAM	8	7	23.03	22.86	22.33		
3	16QAM	15	0	22.97	22.92	22.66		
3	64QAM	1	0	22.95	22.83	22.92	23.7	2
3	64QAM	1	8	22.84	22.85	22.41		
3	64QAM	1	14	22.82	22.74	22.47		
3	64QAM	8	0	22.08	21.87	21.52	22.7	3
3	64QAM	8	4	22.07	21.89	21.23		
3	64QAM	8	7	22.02	21.77	21.32		
3	64QAM	15	0	21.98	21.78	21.57		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	24.77	24.57	24.74	25.7	0
1.4	QPSK	1	3	24.79	24.73	23.86		
1.4	QPSK	1	5	24.49	24.26	24.28		
1.4	QPSK	3	0	23.83	23.91	23.70		
1.4	QPSK	3	1	23.77	23.80	23.78		
1.4	QPSK	3	3	23.75	23.88	23.81	24.7	1
1.4	QPSK	6	0	23.72	23.60	23.62	24.7	1
1.4	16QAM	1	0	23.91	24.07	23.99		
1.4	16QAM	1	3	23.94	23.82	23.31		
1.4	16QAM	1	5	23.72	23.61	23.43		
1.4	16QAM	3	0	22.87	22.73	22.75		
1.4	16QAM	3	1	22.83	22.98	22.72		
1.4	16QAM	3	3	22.94	22.71	22.71		
1.4	16QAM	6	0	22.86	22.86	22.50	23.7	2
1.4	64QAM	1	0	22.78	22.67	22.74	23.7	2
1.4	64QAM	1	3	22.84	22.77	22.28		
1.4	64QAM	1	5	22.70	22.72	22.37		
1.4	64QAM	3	0	22.07	21.70	21.85		
1.4	64QAM	3	1	22.07	21.73	21.78		
1.4	64QAM	3	3	22.02	21.70	21.70		
1.4	64QAM	6	0	21.81	21.76	21.40	22.7	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.84	23.92	23.80	25	0
20	QPSK	1	49	23.90	23.91	23.85		
20	QPSK	1	99	23.87	23.88	23.88		
20	QPSK	50	0	23.07	22.98	22.90	24	1
20	QPSK	50	24	23.09	22.98	22.94		
20	QPSK	50	50	23.06	22.96	22.97		
20	QPSK	100	0	23.03	22.96	22.95		
20	16QAM	1	0	23.05	23.06	23.03	24	1
20	16QAM	1	49	23.10	23.21	23.13		
20	16QAM	1	99	23.10	23.19	22.88		
20	16QAM	50	0	22.11	22.07	21.97	23	2
20	16QAM	50	24	22.09	22.07	22.02		
20	16QAM	50	50	22.09	22.04	22.01		
20	16QAM	100	0	22.03	22.03	21.97		
20	64QAM	1	0	22.05	22.06	22.01	23	2
20	64QAM	1	49	22.10	22.18	22.09		
20	64QAM	1	99	22.10	22.15	21.93		
20	64QAM	50	0	21.16	21.10	21.01	22	3
20	64QAM	50	24	21.13	21.10	21.06		
20	64QAM	50	50	21.09	21.06	21.05		
20	64QAM	100	0	21.10	21.08	21.01		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.72	23.76	23.67	25	0
15	QPSK	1	37	23.79	23.72	23.66		
15	QPSK	1	74	23.72	23.84	23.76		
15	QPSK	36	0	22.92	22.91	22.84	24	1
15	QPSK	36	20	22.94	22.86	22.86		
15	QPSK	36	39	22.88	22.93	22.88		
15	QPSK	75	0	23.01	22.86	22.83		
15	16QAM	1	0	23.01	22.89	22.97	24	1
15	16QAM	1	37	23.02	23.11	23.10		
15	16QAM	1	74	22.95	23.10	22.72		
15	16QAM	36	0	22.09	22.03	21.79	23	2
15	16QAM	36	20	21.89	22.02	22.02		
15	16QAM	36	39	21.91	21.92	21.97		
15	16QAM	75	0	21.87	21.92	21.85		
15	64QAM	1	0	21.87	21.98	21.88	23	2
15	64QAM	1	37	21.94	22.11	21.89		
15	64QAM	1	74	21.92	22.09	21.85		
15	64QAM	36	0	21.07	20.92	20.93	22	3
15	64QAM	36	20	21.00	21.05	21.05		
15	64QAM	36	39	21.03	20.93	20.97		
15	64QAM	75	0	20.98	20.88	20.89		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.54	23.64	23.53	25	0
10	QPSK	1	25	23.63	23.69	23.59		
10	QPSK	1	49	23.68	23.79	23.69		
10	QPSK	25	0	22.92	22.74	22.80	24	1
10	QPSK	25	12	22.88	22.74	22.82		
10	QPSK	25	25	22.69	22.81	22.82		
10	QPSK	50	0	22.84	22.85	22.71		
10	16QAM	1	0	22.89	22.88	22.86	24	1
10	16QAM	1	25	22.82	23.11	23.05		
10	16QAM	1	49	22.92	23.02	22.72		
10	16QAM	25	0	22.08	21.93	21.65	23	2
10	16QAM	25	12	21.86	21.99	21.82		
10	16QAM	25	25	21.77	21.84	21.96		
10	16QAM	50	0	21.79	21.72	21.77		
10	64QAM	1	0	21.78	21.86	21.81	23	2
10	64QAM	1	25	21.92	21.97	21.87		
10	64QAM	1	49	21.74	21.91	21.78		
10	64QAM	25	0	20.94	20.79	20.92	22	3
10	64QAM	25	12	20.86	20.89	20.99		
10	64QAM	25	25	20.94	20.82	20.88		
10	64QAM	50	0	20.83	20.72	20.71		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.44	23.63	23.51	25	0
5	QPSK	1	12	23.60	23.63	23.53		
5	QPSK	1	24	23.66	23.70	23.69		
5	QPSK	12	0	22.84	22.73	22.74	24	1
5	QPSK	12	7	22.87	22.71	22.73		
5	QPSK	12	13	22.63	22.74	22.78		
5	QPSK	25	0	22.74	22.78	22.67		
5	16QAM	1	0	22.86	22.88	22.79	24	1
5	16QAM	1	12	22.81	23.11	23.03		
5	16QAM	1	24	22.88	22.95	22.72		
5	16QAM	12	0	21.99	21.85	21.55	23	2
5	16QAM	12	7	21.76	21.93	21.78		
5	16QAM	12	13	21.74	21.80	21.88		
5	16QAM	25	0	21.74	21.71	21.67		
5	64QAM	1	0	21.69	21.82	21.81	23	2
5	64QAM	1	12	21.92	21.97	21.83		
5	64QAM	1	24	21.69	21.83	21.78		
5	64QAM	12	0	20.94	20.76	20.82	22	3
5	64QAM	12	7	20.85	20.86	20.95		
5	64QAM	12	13	20.93	20.72	20.87		
5	64QAM	25	0	20.83	20.69	20.61		



**Reduced Power Mode**

**<LTE Band 7>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.00	23.12	23.10	24	0
20	QPSK	1	49	22.77	22.83	22.69		
20	QPSK	1	99	22.76	22.76	22.78		
20	QPSK	50	0	22.68	22.86	22.68	24	0
20	QPSK	50	24	22.63	22.85	22.73		
20	QPSK	50	50	22.60	22.85	22.64		
20	QPSK	100	0	22.54	22.79	22.62	24	0
20	16QAM	1	0	22.50	22.69	22.60		
20	16QAM	1	49	22.54	22.63	22.61		
20	16QAM	1	99	22.56	22.56	22.51	24	0
20	16QAM	50	0	22.64	22.64	22.49		
20	16QAM	50	24	22.56	22.55	22.55		
20	16QAM	50	50	22.58	22.60	22.53	24	0
20	16QAM	100	0	22.57	22.52	22.44		
20	64QAM	1	0	22.60	22.54	22.51		
20	64QAM	1	49	22.50	22.50	22.60	24	0
20	64QAM	1	99	22.60	22.52	22.53		
20	64QAM	50	0	22.67	22.58	22.52		
20	64QAM	50	24	22.69	22.50	22.53	24	0
20	64QAM	50	50	22.76	22.58	22.52		
20	64QAM	100	0	22.84	22.49	22.48		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.66	22.79	22.69	24	0
15	QPSK	1	37	22.68	22.80	22.73		
15	QPSK	1	74	22.64	22.75	22.65		
15	QPSK	36	0	22.58	22.78	22.62	24	0
15	QPSK	36	20	22.62	22.72	22.70		
15	QPSK	36	39	22.59	22.66	22.64		
15	QPSK	75	0	22.49	22.75	22.58	24	0
15	16QAM	1	0	22.44	22.83	22.50		
15	16QAM	1	37	22.44	22.74	22.49		
15	16QAM	1	74	22.54	22.75	22.55	24	0
15	16QAM	36	0	22.49	22.77	22.59		
15	16QAM	36	20	22.56	22.73	22.69		
15	16QAM	36	39	22.57	22.74	22.68	24	0
15	16QAM	75	0	22.49	22.72	22.70		
15	64QAM	1	0	22.39	22.70	22.66		
15	64QAM	1	37	22.49	22.71	22.61	24	0
15	64QAM	1	74	22.46	22.75	22.66		
15	64QAM	36	0	22.43	22.84	22.65		
15	64QAM	36	20	22.33	22.79	22.75	24	0
15	64QAM	36	39	22.26	22.87	22.78		
15	64QAM	75	0	22.27	22.84	22.70		




Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.67	22.81	22.76	24	0
10	QPSK	1	25	22.69	22.80	22.75		
10	QPSK	1	49	22.66	22.83	22.58		
10	QPSK	25	0	22.67	22.74	22.71	24	0
10	QPSK	25	12	22.55	22.66	22.60		
10	QPSK	25	25	22.60	22.74	22.59		
10	QPSK	50	0	22.52	22.73	22.49		
10	16QAM	1	0	22.48	22.81	22.48	24	0
10	16QAM	1	25	22.35	22.81	22.40		
10	16QAM	1	49	22.49	22.68	22.56		
10	16QAM	25	0	22.58	22.70	22.53	24	0
10	16QAM	25	12	22.53	22.83	22.77		
10	16QAM	25	25	22.54	22.84	22.75		
10	16QAM	50	0	22.44	22.75	22.63		
10	64QAM	1	0	22.47	22.71	22.64	24	0
10	64QAM	1	25	22.58	22.77	22.59		
10	64QAM	1	49	22.37	22.67	22.75		
10	64QAM	25	0	22.53	22.82	22.74	24	0
10	64QAM	25	12	22.28	22.79	22.70		
10	64QAM	25	25	22.20	22.74	22.71		
10	64QAM	50	0	22.36	22.69	22.64		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.66	22.74	22.61	24	0
5	QPSK	1	12	22.72	22.78	22.72		
5	QPSK	1	24	22.59	22.88	22.60		
5	QPSK	12	0	22.67	22.82	22.69	24	0
5	QPSK	12	7	22.51	22.75	22.84		
5	QPSK	12	13	22.62	22.57	22.70		
5	QPSK	25	0	22.53	22.83	22.43		
5	16QAM	1	0	22.46	22.79	22.48	24	0
5	16QAM	1	12	22.44	22.66	22.38		
5	16QAM	1	24	22.49	22.70	22.61		
5	16QAM	12	0	22.58	22.84	22.55	24	0
5	16QAM	12	7	22.49	22.80	22.78		
5	16QAM	12	13	22.54	22.86	22.57		
5	16QAM	25	0	22.44	22.63	22.60		
5	64QAM	1	0	22.53	22.72	22.56	24	0
5	64QAM	1	12	22.51	22.65	22.57		
5	64QAM	1	24	22.62	22.72	22.80		
5	64QAM	12	0	22.33	22.87	22.65	24	0
5	64QAM	12	7	22.30	22.68	22.87		
5	64QAM	12	13	22.19	22.78	22.80		
5	64QAM	25	0	22.27	22.75	22.68		

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

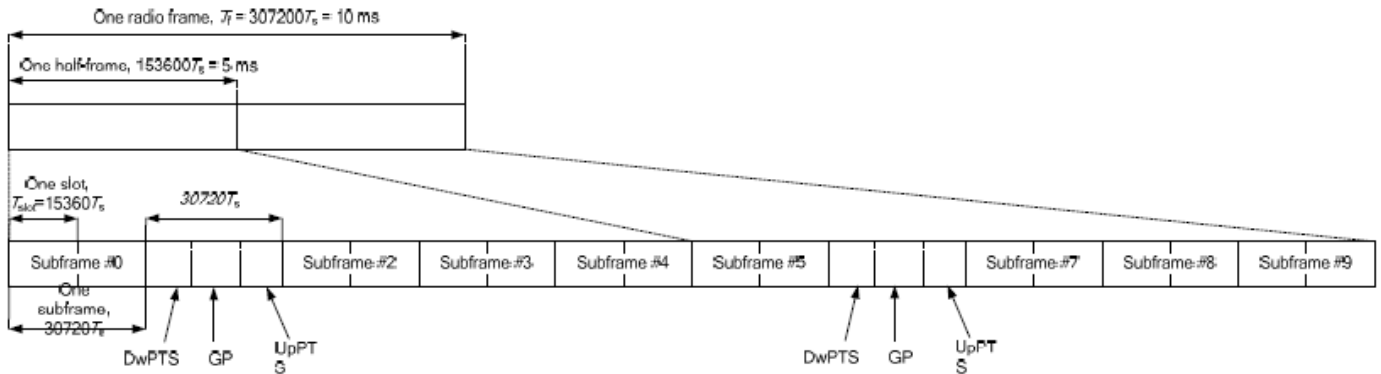

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$	-	-	-	-	-

<b>Special subframe (30720·T<sub>s</sub>): Normal cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~4</b>	7.13%	8.33%
	<b>5~9</b>	14.3%	16.7%

<b>Special subframe(30720·T<sub>s</sub>): Extended cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~3</b>	7.13%	8.33%
	<b>4~7</b>	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  
 $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  
 $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.





<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.56	23.66	23.56	25	0
20	QPSK	1	49	23.62	23.64	23.62		
20	QPSK	1	99	23.64	23.62	23.59		
20	QPSK	50	0	22.68	22.73	22.60	24	1
20	QPSK	50	24	22.70	22.72	22.60		
20	QPSK	50	50	22.75	22.69	22.69		
20	QPSK	100	0	22.63	22.70	22.62	24	1
20	16QAM	1	0	22.69	22.74	22.71		
20	16QAM	1	49	22.76	22.77	22.75		
20	16QAM	1	99	22.76	22.72	22.70	23	2
20	16QAM	50	0	21.77	21.79	21.72		
20	16QAM	50	24	21.81	21.83	21.71		
20	16QAM	50	50	21.86	21.81	21.76	23	2
20	16QAM	100	0	21.75	21.80	21.67		
20	64QAM	1	0	21.41	21.49	21.45		
20	64QAM	1	49	21.50	21.55	21.48	23	2
20	64QAM	1	99	21.56	21.50	21.47		
20	64QAM	50	0	20.79	20.84	20.71		
20	64QAM	50	24	20.81	20.84	20.71	22	3
20	64QAM	50	50	20.87	20.78	20.80		
20	64QAM	100	0	20.78	20.82	20.68		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.55	23.42	23.53	25	0
15	QPSK	1	37	23.49	23.58	23.55		
15	QPSK	1	74	23.49	23.42	23.56		
15	QPSK	36	0	22.53	22.60	22.44	24	1
15	QPSK	36	20	22.52	22.69	22.56		
15	QPSK	36	39	22.60	22.49	22.53		
15	QPSK	75	0	22.59	22.56	22.61	24	1
15	16QAM	1	0	22.52	22.60	22.69		
15	16QAM	1	37	22.63	22.69	22.71		
15	16QAM	1	74	22.68	22.56	22.63	23	2
15	16QAM	36	0	21.64	21.69	21.66		
15	16QAM	36	20	21.67	21.71	21.52		
15	16QAM	36	39	21.76	21.71	21.75	23	2
15	16QAM	75	0	21.70	21.65	21.63		
15	64QAM	1	0	21.34	21.49	21.31		
15	64QAM	1	37	21.42	21.53	21.43	23	2
15	64QAM	1	74	21.51	21.30	21.33		
15	64QAM	36	0	20.67	20.73	20.71		
15	64QAM	36	20	20.68	20.73	20.65	22	3
15	64QAM	36	39	20.67	20.68	20.69		
15	64QAM	75	0	20.66	20.76	20.61		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.45	23.32	23.35	25	0
10	QPSK	1	25	23.37	23.40	23.47		
10	QPSK	1	49	23.37	23.33	23.49		
10	QPSK	25	0	22.44	22.43	22.37	24	1
10	QPSK	25	12	22.46	22.55	22.48		
10	QPSK	25	25	22.56	22.41	22.45		
10	QPSK	50	0	22.39	22.51	22.59		
10	16QAM	1	0	22.32	22.53	22.63	24	1
10	16QAM	1	25	22.43	22.57	22.59		
10	16QAM	1	49	22.50	22.48	22.61		
10	16QAM	25	0	21.45	21.64	21.61	23	2
10	16QAM	25	12	21.49	21.54	21.45		
10	16QAM	25	25	21.73	21.60	21.72		
10	16QAM	50	0	21.52	21.45	21.60		
10	64QAM	1	0	21.21	21.33	21.21	23	2
10	64QAM	1	25	21.22	21.33	21.35		
10	64QAM	1	49	21.47	21.12	21.31		
10	64QAM	25	0	20.60	20.70	20.63	22	3
10	64QAM	25	12	20.58	20.59	20.64		
10	64QAM	25	25	20.67	20.59	20.51		
10	64QAM	50	0	20.54	20.63	20.53		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.37	23.28	23.23	25	0
5	QPSK	1	12	23.18	23.32	23.41		
5	QPSK	1	24	23.23	23.19	23.42		
5	QPSK	12	0	22.33	22.39	22.29	24	1
5	QPSK	12	7	22.32	22.54	22.35		
5	QPSK	12	13	22.37	22.32	22.41		
5	QPSK	25	0	22.28	22.40	22.56		
5	16QAM	1	0	22.29	22.42	22.56	24	1
5	16QAM	1	12	22.43	22.43	22.43		
5	16QAM	1	24	22.49	22.45	22.44		
5	16QAM	12	0	21.40	21.63	21.51	23	2
5	16QAM	12	7	21.35	21.48	21.30		
5	16QAM	12	13	21.62	21.40	21.64		
5	16QAM	25	0	21.38	21.42	21.52		
5	64QAM	1	0	21.05	21.29	21.10	23	2
5	64QAM	1	12	21.05	21.30	21.17		
5	64QAM	1	24	21.40	21.00	21.29		
5	64QAM	12	0	20.43	20.69	20.61	22	3
5	64QAM	12	7	20.47	20.39	20.59		
5	64QAM	12	13	20.47	20.48	20.43		
5	64QAM	25	0	20.50	20.63	20.46		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.76	23.75	23.87	23.75	23.82	25	0
20	QPSK	1	49	23.67	23.69	23.75	23.73	23.75		
20	QPSK	1	99	23.74	23.73	23.67	23.71	23.70		
20	QPSK	50	0	22.74	22.80	22.87	22.77	22.81	24	1
20	QPSK	50	24	22.78	22.80	22.85	22.74	22.77		
20	QPSK	50	50	22.79	22.72	22.77	22.73	22.81		
20	QPSK	100	0	22.85	22.78	22.84	22.71	22.75	24	1
20	16QAM	1	0	22.93	22.82	22.91	22.88	22.94		
20	16QAM	1	49	22.79	22.83	22.86	22.87	22.91		
20	16QAM	1	99	22.85	22.80	22.80	22.79	22.77	23	2
20	16QAM	50	0	21.88	21.97	21.96	21.87	22.04		
20	16QAM	50	24	21.86	21.91	21.92	21.82	21.93		
20	16QAM	50	50	21.94	21.82	21.85	21.88	21.83	22	3
20	16QAM	100	0	21.96	21.93	21.88	21.82	21.82		
20	64QAM	1	0	21.68	21.77	21.66	21.64	21.73		
20	64QAM	1	49	21.54	21.60	21.64	21.64	21.66	23	2
20	64QAM	1	99	21.58	21.56	21.53	21.53	21.67		
20	64QAM	50	0	20.89	20.97	20.95	20.89	21.03		
20	64QAM	50	24	20.84	20.95	20.91	20.83	20.99	22	3
20	64QAM	50	50	20.94	20.86	20.87	20.86	21.03		
20	64QAM	100	0	20.96	20.93	20.91	20.81	20.90		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.73	23.74	23.56	23.69	23.63	25	0
15	QPSK	1	37	23.61	23.62	23.56	23.53	23.62		
15	QPSK	1	74	23.70	23.64	23.67	23.66	23.63		
15	QPSK	36	0	22.59	22.64	22.68	22.73	22.64	24	1
15	QPSK	36	20	22.59	22.75	22.80	22.57	22.71		
15	QPSK	36	39	22.64	22.63	22.76	22.68	22.61		
15	QPSK	75	0	22.82	22.71	22.79	22.66	22.67	24	1
15	16QAM	1	0	22.80	22.93	22.71	22.81	22.90		
15	16QAM	1	37	22.65	22.78	22.78	22.68	22.90		
15	16QAM	1	74	22.67	22.72	22.63	22.68	22.64	23	2
15	16QAM	36	0	21.75	21.85	21.89	21.75	21.98		
15	16QAM	36	20	21.69	21.73	21.72	21.81	21.77		
15	16QAM	36	39	21.76	21.81	21.66	21.80	21.79	23	2
15	16QAM	75	0	21.84	21.85	21.82	21.62	21.69		
15	64QAM	1	0	21.66	21.70	21.60	21.50	21.67		
15	64QAM	1	37	21.43	21.54	21.52	21.49	21.53	23	2
15	64QAM	1	74	21.51	21.48	21.42	21.47	21.63		
15	64QAM	36	0	20.75	20.82	20.75	20.74	20.93		
15	64QAM	36	20	20.73	20.92	20.88	20.66	20.92	22	3
15	64QAM	36	39	20.83	20.74	20.72	20.68	20.96		
15	64QAM	75	0	20.77	20.87	20.91	20.67	20.86		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.73	23.74	23.56	23.69	23.63	25	0
10	QPSK	1	25	23.61	23.62	23.56	23.53	23.62		
10	QPSK	1	49	23.70	23.64	23.67	23.66	23.63		
10	QPSK	25	0	22.59	22.64	22.68	22.73	22.64	24	1
10	QPSK	25	12	22.59	22.75	22.80	22.57	22.71		
10	QPSK	25	25	22.64	22.63	22.76	22.68	22.61		
10	QPSK	50	0	22.82	22.71	22.79	22.66	22.67		
10	16QAM	1	0	22.80	22.93	22.71	22.81	22.90	24	1
10	16QAM	1	25	22.65	22.78	22.78	22.68	22.90		
10	16QAM	1	49	22.67	22.72	22.63	22.68	22.64		
10	16QAM	25	0	21.75	21.85	21.89	21.75	21.98	23	2
10	16QAM	25	12	21.69	21.73	21.72	21.81	21.77		
10	16QAM	25	25	21.76	21.81	21.66	21.80	21.79		
10	16QAM	50	0	21.84	21.85	21.82	21.62	21.69		
10	64QAM	1	0	21.66	21.70	21.60	21.50	21.67	23	2
10	64QAM	1	25	21.43	21.54	21.52	21.49	21.53		
10	64QAM	1	49	21.51	21.48	21.42	21.47	21.63		
10	64QAM	25	0	20.75	20.82	20.75	20.74	20.93	22	3
10	64QAM	25	12	20.73	20.92	20.88	20.66	20.92		
10	64QAM	25	25	20.83	20.74	20.72	20.68	20.96		
10	64QAM	50	0	20.77	20.87	20.91	20.67	20.86		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	23.68	23.55	23.43	23.64	23.63	25	0
5	QPSK	1	12	23.52	23.62	23.49	23.51	23.52		
5	QPSK	1	24	23.67	23.55	23.50	23.49	23.52		
5	QPSK	12	0	22.44	22.59	22.53	22.72	22.49	24	1
5	QPSK	12	7	22.39	22.60	22.76	22.40	22.71		
5	QPSK	12	13	22.52	22.52	22.63	22.56	22.53		
5	QPSK	25	0	22.64	22.52	22.77	22.49	22.62		
5	16QAM	1	0	22.68	22.74	22.56	22.69	22.78	24	1
5	16QAM	1	12	22.59	22.58	22.72	22.57	22.70		
5	16QAM	1	24	22.59	22.52	22.44	22.56	22.45		
5	16QAM	12	0	21.57	21.80	21.83	21.67	21.97	23	2
5	16QAM	12	7	21.64	21.71	21.60	21.66	21.62		
5	16QAM	12	13	21.69	21.76	21.64	21.69	21.71		
5	16QAM	25	0	21.72	21.78	21.73	21.59	21.54		
5	64QAM	1	0	21.46	21.56	21.41	21.34	21.59	23	2
5	64QAM	1	12	21.26	21.47	21.50	21.32	21.50		
5	64QAM	1	24	21.34	21.36	21.28	21.45	21.62		
5	64QAM	12	0	20.65	20.70	20.64	20.71	20.75	22	3
5	64QAM	12	7	20.60	20.84	20.78	20.46	20.90		
5	64QAM	12	13	20.65	20.64	20.72	20.56	20.88		
5	64QAM	25	0	20.70	20.79	20.77	20.65	20.72		

## **12. WiFi/Bluetooth Output Power (Unit: dBm)**

### **General Note:**

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6\text{W/kg}$  and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4\text{ W/kg}$ , further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4\text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8\text{ W/kg}$  or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.



**Non Beamforming Mode**

**<2.4GHz WLAN ANT 1>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.88	18.00	99.12
		6	2437	17.93	18.00	
		11	2462	17.86	18.00	
	802.11g 6Mbps	1	2412	16.19	16.50	98.33
		6	2437	17.73	18.00	
		11	2462	17.06	18.00	
	802.11n-HT20 MCS0	1	2412	14.20	15.00	98.21
		6	2437	17.97	18.00	
		11	2462	15.53	16.00	
	802.11n-HT40 MCS0	3	2422	11.35	12.00	94.50
		6	2437	16.92	17.00	
		9	2452	14.42	15.00	

**<2.4GHz WLAN ANT 2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.89	18.00	99.44
		6	2437	17.92	18.00	
		11	2462	17.85	18.00	
	802.11g 6Mbps	1	2412	17.92	18.00	98.33
		6	2437	17.95	18.00	
		11	2462	17.71	18.00	
	802.11n-HT20 MCS0	1	2412	16.78	17.00	98.21
		6	2437	17.80	18.00	
		11	2462	17.53	18.00	
	802.11n-HT40 MCS0	3	2422	15.37	15.50	95.00
		6	2437	17.32	17.50	
		9	2452	16.41	17.00	



<2.4GHz WLAN ANT 1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.84	21.00	99.28
		6	2437	20.98	21.00	
		11	2462	20.94	21.00	
	802.11g 6Mbps	1	2412	19.77	20.00	98.33
		6	2437	20.86	21.00	
		11	2462	18.70	19.00	
	802.11n-HT20 MCS0	1	2412	16.63	17.50	98.21
		6	2437	20.78	21.00	
		11	2462	17.57	18.00	
	802.11n-HT40 MCS0	3	2422	14.80	15.00	94.97
		6	2437	19.30	20.00	
		9	2452	16.76	17.00	





<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.20	17.50	97.65
		40	5200	17.30	17.50	
		44	5220	17.40	17.50	
		48	5240	17.40	17.50	
	802.11n-HT20 MCS0	36	5180	17.30	17.50	97.47
		40	5200	17.30	17.50	
		44	5220	17.20	17.50	
		48	5240	17.20	17.50	
	802.11n-HT40 MCS0	38	5190	17.00	17.50	96.46
		46	5230	17.20	17.50	
	802.11ac-VHT20 MCS0	36	5180	17.40	17.50	97.98
		40	5200	17.40	17.50	
		44	5220	17.30	17.50	
		48	5240	17.30	17.50	
	802.11ac-VHT40 MCS0	38	5190	17.10	17.50	95.98
		46	5230	17.30	17.50	
802.11ac-VHT80 MCS0	42	5210	16.70	17.00	92.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.30	17.50	97.65
		56	5280	17.30	17.50	
		60	5300	17.40	17.50	
		64	5320	17.20	17.50	
	802.11n-HT20 MCS0	52	5260	17.30	17.50	97.47
		56	5280	17.30	17.50	
		60	5300	17.10	17.50	
		64	5320	17.30	17.50	
	802.11n-HT40 MCS0	54	5270	17.10	17.50	96.46
		62	5310	16.20	16.50	
	802.11ac-VHT20 MCS0	52	5260	17.40	17.50	97.98
		56	5280	17.40	17.50	
		60	5300	17.20	17.50	
		64	5320	17.40	17.50	
	802.11ac-VHT40 MCS0	54	5270	17.20	17.50	95.98
		62	5310	16.30	16.50	
802.11ac-VHT80 MCS0	58	5290	15.30	15.50	92.00	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	17.20	17.50	97.65
		116	5580	17.40	17.50	
		124	5620	17.30	17.50	
		132	5660	17.40	17.50	
		144	5720	17.30	17.50	
	802.11n-HT20 MCS0	100	5500	17.30	17.50	97.47
		116	5580	17.10	17.50	
		124	5620	17.10	17.50	
		132	5660	17.10	17.50	
144		5720	17.10	17.50		
802.11n-HT40 MCS0	102	5510	17.30	17.50	96.46	
	110	5550	17.10	17.50		
	126	5630	17.20	17.50		
	134	5670	17.20	17.50		
	142	5710	17.10	17.50		
802.11ac-VHT20 MCS0	100	5500	17.40	17.50	97.98	
	116	5580	17.20	17.50		
	124	5620	17.20	17.50		
	132	5660	17.20	17.50		
	144	5720	17.20	17.50		
802.11ac-VHT40 MCS0	102	5510	17.40	17.50	95.98	
	110	5550	17.20	17.50		
	126	5630	17.30	17.50		
	134	5670	17.30	17.50		
	142	5710	17.20	17.50		
802.11ac-VHT80 MCS0	106	5530	17.40	17.50	92.00	
	122	5610	17.30	17.50		
	138	5690	17.40	17.50		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	17.30	17.50	97.65
		157	5785	17.20	17.50	
		165	5825	17.40	17.50	
	802.11n-HT20 MCS0	149	5745	17.30	17.50	97.47
		157	5785	17.30	17.50	
		165	5825	17.20	17.50	
	802.11n-HT40 MCS0	151	5755	17.20	17.50	96.46
		159	5795	17.30	17.50	
	802.11ac-VHT20 MCS0	149	5745	17.40	17.50	97.98
157		5785	17.40	17.50		
165		5825	17.30	17.50		
802.11ac-VHT40 MCS0	151	5755	17.30	17.50	95.98	
	159	5795	17.40	17.50		
802.11ac-VHT80 MCS0	155	5775	17.40	17.50	92.00	



<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.40	17.50	97.65
		40	5200	17.40	17.50	
		44	5220	17.40	17.50	
		48	5240	17.30	17.50	
	802.11n-HT20 MCS0	36	5180	17.20	17.50	97.97
		40	5200	17.20	17.50	
		44	5220	17.10	17.50	
		48	5240	17.10	17.50	
	802.11n-HT40 MCS0	38	5190	17.20	17.50	95.96
		46	5230	17.10	17.50	
	802.11ac-VHT20 MCS0	36	5180	17.30	17.50	97.49
		40	5200	17.30	17.50	
		44	5220	17.20	17.50	
		48	5240	17.20	17.50	
	802.11ac-VHT40 MCS0	38	5190	17.30	17.50	95.48
		46	5230	17.20	17.50	
802.11ac-VHT80 MCS0	42	5210	16.60	17.00	92.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.20	17.50	97.65
		56	5280	17.30	17.50	
		60	5300	17.40	17.50	
		64	5320	17.40	17.50	
	802.11n-HT20 MCS0	52	5260	17.30	17.50	97.97
		56	5280	17.30	17.50	
		60	5300	17.10	17.50	
		64	5320	17.20	17.50	
	802.11n-HT40 MCS0	54	5270	17.10	17.50	95.96
		62	5310	15.60	16.50	
	802.11ac-VHT20 MCS0	52	5260	17.40	17.50	97.49
		56	5280	17.40	17.50	
		60	5300	17.20	17.50	
		64	5320	17.30	17.50	
	802.11ac-VHT40 MCS0	54	5270	17.20	17.50	95.48
		62	5310	15.70	16.50	
802.11ac-VHT80 MCS0	58	5290	15.30	15.50	92.00	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.20	17.50	97.65
		116	5580	17.40	17.50	
		124	5620	17.30	17.50	
		132	5660	17.30	17.50	
		144	5720	17.40	17.50	
	802.11n-HT20 MCS0	100	5500	17.30	17.50	97.97
		116	5580	17.10	17.50	
		124	5620	17.10	17.50	
		132	5660	17.10	17.50	
		144	5720	17.20	17.50	
	802.11n-HT40 MCS0	102	5510	16.20	16.50	95.96
		110	5550	17.20	17.50	
		126	5630	17.10	17.50	
		134	5670	17.10	17.50	
		142	5710	17.20	17.50	
	802.11ac-VHT20 MCS0	100	5500	17.40	17.50	97.49
		116	5580	17.20	17.50	
		124	5620	17.20	17.50	
		132	5660	17.20	17.50	
		144	5720	17.30	17.50	
802.11ac-VHT40 MCS0	102	5510	16.30	16.50	95.48	
	110	5550	17.30	17.50		
	126	5630	17.20	17.50		
	134	5670	17.20	17.50		
	142	5710	17.30	17.50		
802.11ac-VHT80 MCS0	106	5530	15.40	16.50	92.00	
	122	5610	17.20	17.50		
	138	5690	17.40	17.50		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	17.20	17.50	97.65
		157	5785	17.20	17.50	
		165	5825	17.40	17.50	
	802.11n-HT20 MCS0	149	5745	17.30	17.50	97.97
		157	5785	17.30	17.50	
		165	5825	17.10	17.50	
	802.11n-HT40 MCS0	151	5755	17.30	17.50	95.96
		159	5795	17.30	17.50	
	802.11ac-VHT20 MCS0	149	5745	17.40	17.50	97.49
		157	5785	17.40	17.50	
		165	5825	17.20	17.50	
	802.11ac-VHT40 MCS0	151	5755	17.40	17.50	95.48
		159	5795	17.40	17.50	
	802.11ac-VHT80 MCS0	155	5775	17.20	17.50	92.00



<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	19.41	19.50	97.64
		40	5200	19.36	19.50	
		44	5220	19.36	19.50	
		48	5240	19.36	19.50	
	802.11n-HT20 MCS0	36	5180	19.21	19.50	97.48
		40	5200	19.21	19.50	
		44	5220	19.16	19.50	
		48	5240	19.16	19.50	
	802.11n-HT40 MCS0	38	5190	19.21	19.50	95.15
		46	5230	19.16	19.50	
	802.11ac-VHT20 MCS0	36	5180	19.31	19.50	97.73
		40	5200	19.31	19.50	
		44	5220	19.26	19.50	
		48	5240	19.26	19.50	
	802.11ac-VHT40 MCS0	38	5190	19.31	19.50	95.48
		46	5230	19.26	19.50	
802.11ac-VHT80 MCS0	42	5210	19.07	19.50	92.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	19.16	19.50	97.64
		56	5280	19.16	19.50	
		60	5300	19.26	19.50	
		64	5320	19.26	19.50	
	802.11n-HT20 MCS0	52	5260	19.06	19.50	97.48
		56	5280	19.06	19.50	
		60	5300	19.11	19.50	
		64	5320	19.16	19.50	
	802.11n-HT40 MCS0	54	5270	18.97	19.50	95.15
		62	5310	17.47	18.50	
	802.11ac-VHT20 MCS0	52	5260	19.16	19.50	97.73
		56	5280	19.16	19.50	
		60	5300	19.21	19.50	
		64	5320	19.26	19.50	
	802.11ac-VHT40 MCS0	54	5270	19.07	19.50	95.48
		62	5310	17.57	18.50	
802.11ac-VHT80 MCS0	58	5290	15.62	16.50	92.00	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	19.86	20.00	97.64
		116	5580	19.91	20.00	
		124	5620	19.91	20.00	
		132	5660	19.91	20.00	
		144	5720	19.61	20.00	
	802.11n-HT20 MCS0	100	5500	19.66	20.00	97.48
		116	5580	19.71	20.00	
		124	5620	19.71	20.00	
		132	5660	19.81	20.00	
		144	5720	19.76	20.00	
	802.11n-HT40 MCS0	102	5510	19.46	20.00	95.15
		110	5550	19.76	20.00	
		126	5630	19.76	20.00	
		134	5670	19.76	20.00	
		142	5710	19.71	20.00	
	802.11ac-VHT20 MCS0	100	5500	19.76	20.00	97.73
		116	5580	19.81	20.00	
		124	5620	19.81	20.00	
		132	5660	19.91	20.00	
		144	5720	19.86	20.00	
802.11ac-VHT40 MCS0	102	5510	19.56	20.00	95.48	
	110	5550	19.86	20.00		
	126	5630	19.86	20.00		
	134	5670	19.86	20.00		
	142	5710	19.81	20.00		
802.11ac-VHT80 MCS0	106	5530	18.16	18.50	92.00	
	122	5610	19.86	20.00		
	138	5690	19.91	20.00		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	19.86	20.00	97.64
		157	5785	19.76	20.00	
		165	5825	19.91	20.00	
	802.11n-HT20 MCS0	149	5745	19.61	20.00	97.48
		157	5785	19.56	20.00	
		165	5825	19.76	20.00	
	802.11n-HT40 MCS0	151	5755	19.66	20.00	95.15
		159	5795	19.71	20.00	
	802.11ac-VHT20 MCS0	149	5745	19.71	20.00	97.73
		157	5785	19.66	20.00	
		165	5825	19.86	20.00	
	802.11ac-VHT40 MCS0	151	5755	19.76	20.00	95.48
		159	5795	19.81	20.00	
	802.11ac-VHT80 MCS0	155	5775	19.86	20.00	92.00

**Beamforming Mode**

**<5GHz WLAN ANT1+2>**

	Mode	Channel	Frequency (MHz)	ANT 1+2 Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11ac-VHT20 MCS0	36	5180	18.92	19.50	100
		40	5200	18.92	19.50	
		44	5220	19.02	19.50	
		48	5240	18.91	19.50	
	802.11ac-VHT40 MCS0	38	5190	19.17	19.50	100
		46	5230	19.21	19.50	
802.11ac-VHT80 MCS0	42	5210	18.68	19.00	100	

	Mode	Channel	Frequency (MHz)	ANT 1+2 Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11ac-VHT20 MCS0	52	5260	18.97	19.50	100
		56	5280	18.97	19.50	
		60	5300	19.17	19.50	
		64	5320	19.21	19.50	
	802.11ac-VHT40 MCS0	54	5270	19.02	19.50	100
		62	5310	17.57	18.00	
	802.11ac-VHT80 MCS0	58	5290	16.27	16.50	100

	Mode	Channel	Frequency (MHz)	ANT 1+2 Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11ac-VHT20 MCS0	100	5500	19.46	20.00	100
		116	5580	19.51	20.00	
		124	5620	19.47	20.00	
		132	5660	19.46	20.00	
		144	5720	19.51	20.00	
	802.11ac-VHT40 MCS0	102	5510	19.07	19.50	100
		110	5550	19.37	19.50	
		126	5630	19.37	19.50	
		134	5670	19.43	19.50	
	802.11ac-VHT80 MCS0	142	5710	19.34	19.50	100
		106	5530	16.92	17.00	
	122	5610	19.40	19.50	100	
	138	5690	19.43	19.50		

	Mode	Channel	Frequency (MHz)	ANT 1+2 Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11ac-VHT20 MCS0	149	5745	19.51	20.00	100
		157	5785	19.47	20.00	
		165	5825	19.56	20.00	
	802.11ac-VHT40 MCS0	151	5755	19.47	20.00	100
		159	5795	19.61	20.00	
	802.11ac-VHT80 MCS0	155	5775	19.52	20.00	100



<2.4GHz Bluetooth Module 1>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	3.98	0.70	0.85
	CH 39	2441	3.99	1.10	1.20
	CH 78	2480	3.96	0.68	0.81
Tune-up Limit			4.00	1.50	1.50


Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	5.10	5.00
	CH 19	2440	5.80	5.80
	CH 39	2480	5.50	5.50
Tune-up Limit			6.00	6.00

<2.4GHz Bluetooth Module 2>


Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	2.60	2.40
	CH 19	2440	2.40	2.40
	CH 39	2480	2.50	2.50
Tune-up Limit			3.00	3.00

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 62.3% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

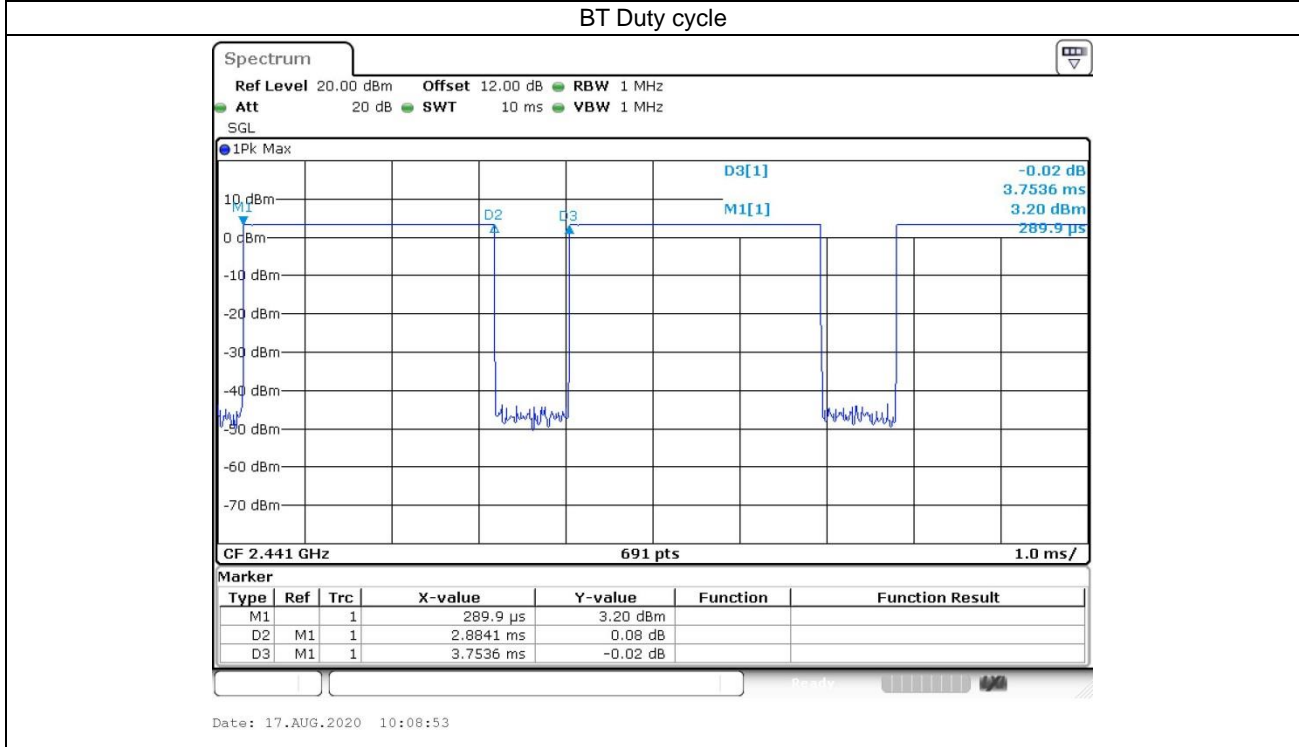

### 13. Antenna Location

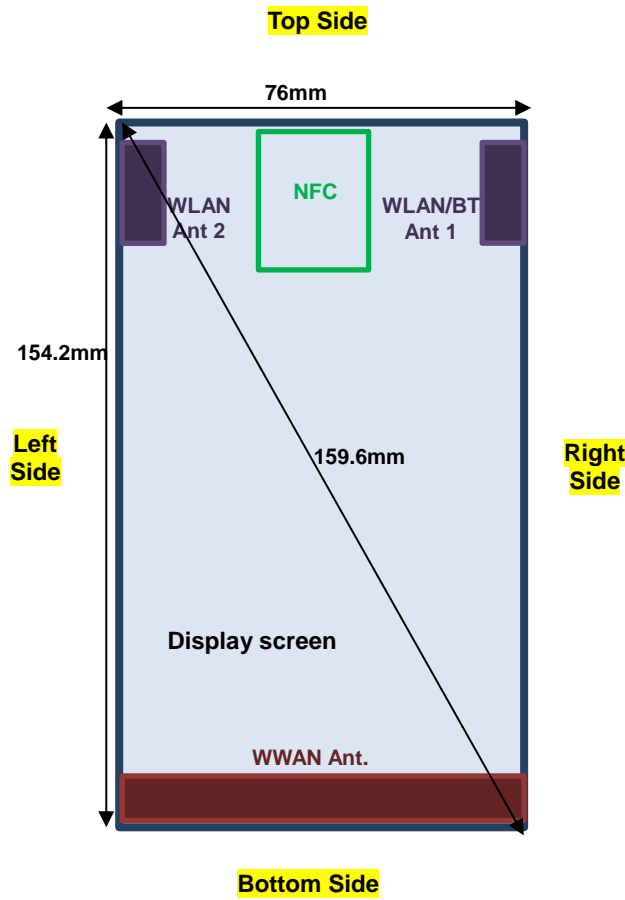

Front View

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN Ant 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
WLAN Ant 2	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN Ant 1	Yes	Yes	Yes	No	Yes	No
WLAN Ant 2	Yes	Yes	Yes	No	No	Yes

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 14. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE B7.
5. The device support trigger handle accessories which the user can use the product while holding the handle, due to the test limitation, therefore, for hand SAR testing is remove the handle to attach the device to be tested.

**GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B17/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 38 SAR test was covered by Band 41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.



**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$ W/kg and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	Battery 1	189	836.4	30.25	30.50	1.059	0.07	0.387	0.410
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	Battery 1	189	836.4	30.25	30.50	1.059	0.04	0.307	0.325
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	Battery 1	189	836.4	30.25	30.50	1.059	-0.07	0.397	0.421
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	Battery 1	189	836.4	30.25	30.50	1.059	-0.02	0.195	0.207
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	Battery 2	189	836.4	30.25	30.50	1.059	0.11	0.385	0.408
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	Battery 1	661	1880	27.10	27.50	1.096	-0.07	0.312	0.342
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	Battery 1	661	1880	27.10	27.50	1.096	0.09	0.100	0.110
02	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	Battery 1	661	1880	27.10	27.50	1.096	-0.08	0.344	0.377
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	Battery 1	661	1880	27.10	27.50	1.096	0.02	0.182	0.200
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	Battery 2	661	1880	27.10	27.50	1.096	0.07	0.329	0.361

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	9400	1880	24.67	25.00	1.079	-0.01	0.445	0.480
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	Battery 1	9400	1880	24.67	25.00	1.079	0.05	0.170	0.183
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	9400	1880	24.67	25.00	1.079	-0.02	0.466	0.503
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	Battery 1	9400	1880	24.67	25.00	1.079	0.03	0.237	0.256
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Battery 2	9400	1880	24.67	25.00	1.079	-0.12	0.455	0.491
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	1413	1732.6	24.69	25.00	1.074	-0.06	0.314	0.337
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	Battery 1	1413	1732.6	24.69	25.00	1.074	0.08	0.092	0.099
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	1413	1732.6	24.69	25.00	1.074	0.05	0.459	0.493
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	Battery 1	1413	1732.6	24.69	25.00	1.074	-0.03	0.090	0.097
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Battery 2	1413	1732.6	24.69	25.00	1.074	0.07	0.447	0.480
05	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	4182	836.4	24.92	25.50	1.143	-0.03	0.285	0.326
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	Battery 1	4182	836.4	24.92	25.50	1.143	0.05	0.217	0.248
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	4182	836.4	24.92	25.50	1.143	-0.03	0.204	0.233
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	Battery 1	4182	836.4	24.92	25.50	1.143	0.07	0.170	0.194
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Battery 2	4182	836.4	24.92	25.50	1.143	0.09	0.266	0.304

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	Battery 1	18900	1880	25.06	25.50	1.107	0.01	0.541	0.599
	LTE Band 2	20M	QPSK	50	24	Right Cheek	0mm	Battery 1	18900	1880	24.05	24.50	1.109	-0.02	0.390	0.433
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Battery 1	18900	1880	25.06	25.50	1.107	-0.01	0.335	0.371
	LTE Band 2	20M	QPSK	50	24	Right Tilted	0mm	Battery 1	18900	1880	24.05	24.50	1.109	-0.11	0.238	0.264
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	18900	1880	25.06	25.50	1.107	-0.06	0.433	0.479
	LTE Band 2	20M	QPSK	50	24	Left Cheek	0mm	Battery 1	18900	1880	24.05	24.50	1.109	0.06	0.421	0.467
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	Battery 1	18900	1880	25.06	25.50	1.107	0.03	0.264	0.292
	LTE Band 2	20M	QPSK	50	24	Left Tilted	0mm	Battery 1	18900	1880	24.05	24.50	1.109	0.08	0.213	0.236
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	Battery 2	18900	1880	25.06	25.50	1.107	0.01	0.499	0.552



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	Battery 1	20175	1732.5	24.89	25.50	1.151	0.13	0.345	0.397
	LTE Band 4	20M	QPSK	50	24	Right Cheek	0mm	Battery 1	20175	1732.5	23.90	24.50	1.148	0.01	0.209	0.240
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	Battery 1	20175	1732.5	24.89	25.50	1.151	0.06	0.145	0.167
	LTE Band 4	20M	QPSK	50	24	Right Tilted	0mm	Battery 1	20175	1732.5	23.90	24.50	1.148	0.04	0.113	0.130
07	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	20175	1732.5	24.89	25.50	1.151	-0.07	0.391	0.450
	LTE Band 4	20M	QPSK	50	24	Left Cheek	0mm	Battery 1	20175	1732.5	23.90	24.50	1.148	-0.01	0.313	0.359
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	Battery 1	20175	1732.5	24.89	25.50	1.151	0.08	0.129	0.148
	LTE Band 4	20M	QPSK	50	24	Left Tilted	0mm	Battery 1	20175	1732.5	23.90	24.50	1.148	0.04	0.097	0.111
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	Battery 2	20175	1732.5	24.89	25.50	1.151	0.01	0.388	0.447
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	Battery 1	20525	836.5	25.05	25.70	1.161	-0.01	0.310	0.360
	LTE Band 5	10M	QPSK	25	12	Right Cheek	0mm	Battery 1	20525	836.5	23.95	24.70	1.189	0.10	0.270	0.321
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	Battery 1	20525	836.5	25.05	25.70	1.161	-0.01	0.256	0.297
	LTE Band 5	10M	QPSK	25	12	Right Tilted	0mm	Battery 1	20525	836.5	23.95	24.70	1.189	0.03	0.234	0.278
08	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	Battery 1	20525	836.5	25.05	25.70	1.161	-0.06	0.323	0.375
	LTE Band 5	10M	QPSK	25	12	Left Cheek	0mm	Battery 1	20525	836.5	23.95	24.70	1.189	-0.08	0.204	0.242
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	Battery 1	20525	836.5	25.05	25.70	1.161	-0.05	0.167	0.194
	LTE Band 5	10M	QPSK	25	12	Left Tilted	0mm	Battery 1	20525	836.5	23.95	24.70	1.189	0.07	0.147	0.175
	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	Battery 2	20525	836.5	25.05	25.70	1.161	-0.09	0.305	0.354
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Battery 1	21100	2535	23.92	25.00	1.282	-0.09	0.399	0.512
	LTE Band 7	20M	QPSK	50	24	Right Cheek	0mm	Battery 1	20850	2510	23.09	24.00	1.233	0.03	0.379	0.467
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	Battery 1	21100	2535	23.92	25.00	1.282	0.04	0.159	0.204
	LTE Band 7	20M	QPSK	50	24	Right Tilted	0mm	Battery 1	20850	2510	23.09	24.00	1.233	0.10	0.144	0.178
09	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	21100	2535	23.92	25.00	1.282	-0.05	0.418	0.536
	LTE Band 7	20M	QPSK	50	24	Left Cheek	0mm	Battery 1	20850	2510	23.09	24.00	1.233	-0.08	0.310	0.382
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Battery 1	21100	2535	23.92	25.00	1.282	-0.01	0.152	0.195
	LTE Band 7	20M	QPSK	50	24	Left Tilted	0mm	Battery 1	20850	2510	23.09	24.00	1.233	0.03	0.136	0.168
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Battery 2	21100	2535	23.92	25.00	1.282	-0.01	0.405	0.519

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	Battery 1	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.09	0.307	0.401
	LTE Band 41	20M	QPSK	50	0	Right Cheek	0mm	Battery 1	40620	2593	22.87	24.00	1.297	62.9	1.006	0.01	0.272	0.355
	LTE Band 41	20M	QPSK	1	0	Right Tilted	0mm	Battery 1	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.05	0.205	0.268
	LTE Band 41	20M	QPSK	50	0	Right Tilted	0mm	Battery 1	40620	2593	22.87	24.00	1.297	62.9	1.006	0.01	0.154	0.201
10	LTE Band 41	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.08	0.413	0.539
	LTE Band 41	20M	QPSK	50	0	Left Cheek	0mm	Battery 1	40620	2593	22.87	24.00	1.297	62.9	1.006	0.02	0.355	0.463
	LTE Band 41	20M	QPSK	1	0	Left Tilted	0mm	Battery 1	40620	2593	23.87	25.00	1.297	62.9	1.006	0.08	0.211	0.275
	LTE Band 41	20M	QPSK	50	0	Left Tilted	0mm	Battery 1	40620	2593	22.87	24.00	1.297	62.9	1.006	0.11	0.161	0.210
	LTE Band 41	20M	QPSK	1	0	Left Cheek	0mm	Battery 2	40620	2593	23.87	25.00	1.297	62.9	1.006	0.05	0.401	0.523





<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	0.15	0.163	0.167
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	0.13	0.151	0.155
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	0.01	1.080	1.107
11	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	Battery 1	1	2412	17.88	18.00	1.028	99.12	1.009	0.03	1.220	1.265
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	Battery 1	11	2462	17.86	18.00	1.033	99.12	1.009	0.05	0.930	0.969
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	-0.06	0.375	0.385
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	Battery 2	1	2412	17.88	18.00	1.028	99.12	1.009	0.06	1.090	1.131
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	0.02	0.350	0.359
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	0.11	0.156	0.160
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	0.13	0.165	0.169
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	0.02	0.149	0.153
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 2	Battery 2	6	2437	17.92	18.00	1.019	99.44	1.006	0.16	0.343	0.351
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	-0.1	0.387	0.431
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	-0.06	0.402	0.446
12	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	0.08	0.992	1.102
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	38	5190	17.00	17.50	1.122	96.46	1.037	0.01	0.886	1.031
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	0.13	0.585	0.650
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 2	46	5230	17.20	17.50	1.072	96.46	1.037	0.14	0.942	1.047
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 1	Battery 1	54	5270	17.10	17.50	1.096	96.46	1.037	-0.12	0.564	0.641
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 1	Battery 1	54	5270	17.10	17.50	1.096	96.46	1.037	0.15	0.527	0.599
13	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	54	5270	17.10	17.50	1.096	96.46	1.037	0.07	1.080	1.228
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 1	Battery 1	60	5300	17.40	17.50	1.023	97.65	1.024	0.17	0.997	1.045
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 1	Battery 1	54	5270	17.10	17.50	1.096	96.46	1.037	0	0.689	0.783
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 2	54	5270	17.10	17.50	1.096	96.46	1.037	0.12	1.010	1.148
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 2	Battery 1	54	5270	17.10	17.50	1.096	95.96	1.042	0.12	0.113	0.129
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 2	Battery 1	54	5270	17.10	17.50	1.096	95.96	1.042	-0.05	0.040	0.046
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 2	Battery 1	54	5270	17.10	17.50	1.096	95.96	1.042	-0.19	0.028	0.032
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 2	Battery 1	54	5270	17.10	17.50	1.096	95.96	1.042	0.06	0.032	0.036
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 2	Battery 2	54	5270	17.10	17.50	1.096	95.96	1.042	-0.1	0.107	0.122
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 1	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	0.08	0.614	0.683
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 1	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	0.14	0.683	0.759
14	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	-0.16	1.080	1.201
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 1	106	5530	17.40	17.50	1.023	92	1.087	-0.1	0.982	1.092
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	0.11	0.716	0.796
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 2	138	5690	17.40	17.50	1.023	92	1.087	0.07	0.994	1.106
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	0.13	0.214	0.238
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	-0.16	0.119	0.133
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	0.05	0.090	0.101
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 2	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	0.07	0.067	0.074
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	Battery 2	138	5690	17.40	17.50	1.023	92	1.087	-0.18	0.205	0.228



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	0.1	0.251	0.279
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	0.02	0.304	0.338
15	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	-0.12	1.080	1.201
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	159	5795	17.30	17.50	1.047	96.46	1.037	0.11	0.831	0.902
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	-0.06	0.332	0.369
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 2	155	5775	17.40	17.50	1.023	92	1.087	0.05	0.942	1.048
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	0.15	0.336	0.391
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	0.05	0.198	0.231
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	-0.02	0.137	0.160
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	0.03	0.115	0.134
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	Battery 2	155	5775	17.20	17.50	1.072	92	1.087	-0.08	0.318	0.370

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	LE-1Mbps	Right Cheek	0mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	0.15	0.002	0.003
	Bluetooth	LE-1Mbps	Right Tilted	0mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	0.02	0.001	0.001
16	Bluetooth	LE-1Mbps	Left Cheek	0mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	-0.11	0.003	0.004
	Bluetooth	LE-1Mbps	Left Tilted	0mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	0.14	0.001	0.001
	Bluetooth	LE-1Mbps	Left Cheek	0mm	Ant 1	Battery 2	19	2440	5.80	6.00	1.047	62.3	1.337	-0.07	0.002	0.003



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	Battery 1	OFF	189	836.4	30.25	30.50	1.059	0.12	0.405	0.429
17	GSM850	GPRS (4 Tx slots)	Back	10mm	Battery 1	OFF	189	836.4	30.25	30.50	1.059	0.04	0.605	0.641
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	Battery 1	OFF	189	836.4	30.25	30.50	1.059	0.03	0.117	0.124
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	Battery 1	OFF	189	836.4	30.25	30.50	1.059	0.07	0.224	0.237
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	Battery 1	OFF	189	836.4	30.25	30.50	1.059	-0.09	0.358	0.379
	GSM850	GPRS (4 Tx slots)	Back	10mm	Battery 2	OFF	189	836.4	30.25	30.50	1.059	0.07	0.588	0.623
	GSM1900	GPRS (4 Tx slots)	Front	10mm	Battery 1	OFF	661	1880	27.10	27.50	1.096	0.03	0.405	0.444
18	GSM1900	GPRS (4 Tx slots)	Back	10mm	Battery 1	OFF	661	1880	27.10	27.50	1.096	0.04	0.487	0.534
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	Battery 1	OFF	661	1880	27.10	27.50	1.096	0.06	0.308	0.338
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	Battery 1	OFF	661	1880	27.10	27.50	1.096	0.01	0.059	0.065
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	Battery 1	OFF	661	1880	27.10	27.50	1.096	0.09	0.313	0.343
	GSM1900	GPRS (4 Tx slots)	Back	10mm	Battery 2	OFF	661	1880	27.10	27.50	1.096	0.05	0.469	0.514

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
19	WCDMA II	RMC 12.2Kbps	Front	10mm	Battery 1	OFF	9400	1880	24.67	25.00	1.079	0.15	0.725	0.782
	WCDMA II	RMC 12.2Kbps	Back	10mm	Battery 1	OFF	9400	1880	24.67	25.00	1.079	0.12	0.672	0.725
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	Battery 1	OFF	9400	1880	24.67	25.00	1.079	-0.08	0.504	0.544
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	Battery 1	OFF	9400	1880	24.67	25.00	1.079	0.03	0.110	0.119
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	9400	1880	24.67	25.00	1.079	-0.08	0.537	0.579
	WCDMA II	RMC 12.2Kbps	Front	10mm	Battery 2	OFF	9400	1880	24.67	25.00	1.079	-0.14	0.707	0.763
20	WCDMA IV	RMC 12.2Kbps	Front	10mm	Battery 1	OFF	1413	1732.6	24.69	25.00	1.074	0.05	0.679	0.729
	WCDMA IV	RMC 12.2Kbps	Back	10mm	Battery 1	OFF	1413	1732.6	24.69	25.00	1.074	0.01	0.671	0.721
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	Battery 1	OFF	1413	1732.6	24.69	25.00	1.074	0.02	0.481	0.517
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	Battery 1	OFF	1413	1732.6	24.69	25.00	1.074	-0.01	0.099	0.106
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	1413	1732.6	24.69	25.00	1.074	0.08	0.273	0.293
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Battery 2	OFF	1413	1732.6	24.69	25.00	1.074	0.11	0.664	0.713
	WCDMA V	RMC 12.2Kbps	Front	10mm	Battery 1	OFF	4182	836.4	24.92	25.50	1.143	-0.09	0.353	0.403
21	WCDMA V	RMC 12.2Kbps	Back	10mm	Battery 1	OFF	4182	836.4	24.92	25.50	1.143	0.08	0.445	0.509
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	Battery 1	OFF	4182	836.4	24.92	25.50	1.143	-0.14	0.217	0.248
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	Battery 1	OFF	4182	836.4	24.92	25.50	1.143	0.08	0.251	0.287
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	4182	836.4	24.92	25.50	1.143	-0.09	0.326	0.373
	WCDMA V	RMC 12.2Kbps	Back	10mm	Battery 2	OFF	4182	836.4	24.92	25.50	1.143	0.02	0.440	0.503



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
22	LTE Band 2	20M	QPSK	1	0	Front	10mm	Battery 1	OFF	18900	1880	25.06	25.50	1.107	-0.04	0.721	0.798
	LTE Band 2	20M	QPSK	50	24	Front	10mm	Battery 1	OFF	18900	1880	24.05	24.50	1.109	-0.01	0.669	0.742
	LTE Band 2	20M	QPSK	1	0	Back	10mm	Battery 1	OFF	18900	1880	25.06	25.50	1.107	-0.02	0.685	0.758
	LTE Band 2	20M	QPSK	50	24	Back	10mm	Battery 1	OFF	18900	1880	24.05	24.50	1.109	-0.09	0.643	0.713
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	Battery 1	OFF	18900	1880	25.06	25.50	1.107	0.06	0.471	0.521
	LTE Band 2	20M	QPSK	50	24	Left Side	10mm	Battery 1	OFF	18900	1880	24.05	24.50	1.109	-0.05	0.429	0.476
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	Battery 1	OFF	18900	1880	25.06	25.50	1.107	-0.1	0.189	0.209
	LTE Band 2	20M	QPSK	50	24	Right Side	10mm	Battery 1	OFF	18900	1880	24.05	24.50	1.109	-0.05	0.152	0.169
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	OFF	18900	1880	25.06	25.50	1.107	0.03	0.466	0.516
	LTE Band 2	20M	QPSK	50	24	Bottom Side	10mm	Battery 1	OFF	18900	1880	24.05	24.50	1.109	-0.05	0.420	0.466
	LTE Band 2	20M	QPSK	1	0	Front	10mm	Battery 2	OFF	18900	1880	25.06	25.50	1.107	-0.16	0.705	0.780
23	LTE Band 4	20M	QPSK	1	0	Front	10mm	Battery 1	OFF	20175	1732.5	24.89	25.50	1.151	-0.14	0.724	0.833
	LTE Band 4	20M	QPSK	50	24	Front	10mm	Battery 1	OFF	20175	1732.5	23.90	24.50	1.148	-0.05	0.486	0.558
	LTE Band 4	20M	QPSK	100	0	Front	10mm	Battery 1	OFF	20175	1732.5	23.82	24.50	1.169	0.08	0.471	0.551
	LTE Band 4	20M	QPSK	1	0	Back	10mm	Battery 1	OFF	20175	1732.5	24.89	25.50	1.151	0.06	0.567	0.653
	LTE Band 4	20M	QPSK	50	24	Back	10mm	Battery 1	OFF	20175	1732.5	23.90	24.50	1.148	0.01	0.528	0.606
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	Battery 1	OFF	20175	1732.5	24.89	25.50	1.151	0.02	0.481	0.554
	LTE Band 4	20M	QPSK	50	24	Left Side	10mm	Battery 1	OFF	20175	1732.5	23.90	24.50	1.148	0.15	0.362	0.416
	LTE Band 4	20M	QPSK	1	0	Right Side	10mm	Battery 1	OFF	20175	1732.5	24.89	25.50	1.151	0.06	0.075	0.086
	LTE Band 4	20M	QPSK	50	24	Right Side	10mm	Battery 1	OFF	20175	1732.5	23.90	24.50	1.148	-0.01	0.059	0.068
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	OFF	20175	1732.5	24.89	25.50	1.151	-0.07	0.307	0.353
	LTE Band 4	20M	QPSK	50	24	Bottom Side	10mm	Battery 1	OFF	20175	1732.5	23.90	24.50	1.148	0.05	0.278	0.319
	LTE Band 4	20M	QPSK	1	0	Front	10mm	Battery 2	OFF	20175	1732.5	24.89	25.50	1.151	0.04	0.711	0.818
	LTE Band 5	10M	QPSK	1	0	Front	10mm	Battery 1	OFF	20525	836.5	25.05	25.70	1.161	0.09	0.277	0.322
	LTE Band 5	10M	QPSK	25	12	Front	10mm	Battery 1	OFF	20525	836.5	23.95	24.70	1.189	0.12	0.243	0.289
24	LTE Band 5	10M	QPSK	1	0	Back	10mm	Battery 1	OFF	20525	836.5	25.05	25.70	1.161	0.07	0.352	0.409
	LTE Band 5	10M	QPSK	25	12	Back	10mm	Battery 1	OFF	20525	836.5	23.95	24.70	1.189	0.03	0.339	0.403
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	Battery 1	OFF	20525	836.5	25.05	25.70	1.161	-0.06	0.163	0.189
	LTE Band 5	10M	QPSK	25	12	Left Side	10mm	Battery 1	OFF	20525	836.5	23.95	24.70	1.189	0.08	0.151	0.179
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	Battery 1	OFF	20525	836.5	25.05	25.70	1.161	0.09	0.261	0.303
	LTE Band 5	10M	QPSK	25	12	Right Side	10mm	Battery 1	OFF	20525	836.5	23.95	24.70	1.189	0.09	0.241	0.286
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	Battery 1	OFF	20525	836.5	25.05	25.70	1.161	0.05	0.208	0.242
	LTE Band 5	10M	QPSK	25	12	Bottom Side	10mm	Battery 1	OFF	20525	836.5	23.95	24.70	1.189	0.01	0.185	0.220
	LTE Band 5	10M	QPSK	1	0	Back	10mm	Battery 2	OFF	20525	836.5	25.05	25.70	1.161	-0.07	0.341	0.396



# FCC SAR TEST REPORT

Report No. : FA070405

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	10mm	Battery 1	ON	21100	2535	23.12	24.00	1.225	-0.09	0.996	1.220
	LTE Band 7	20M	QPSK	1	0	Front	10mm	Battery 1	ON	20850	2510	23.00	24.00	1.259	0.12	0.910	1.146
	LTE Band 7	20M	QPSK	1	0	Front	10mm	Battery 1	ON	21350	2560	23.10	24.00	1.230	-0.03	0.921	1.133
	LTE Band 7	20M	QPSK	50	0	Front	10mm	Battery 1	ON	21100	2535	22.86	24.00	1.300	0.11	0.791	1.028
	LTE Band 7	20M	QPSK	50	0	Front	10mm	Battery 1	ON	20850	2510	22.68	24.00	1.355	0.04	0.755	1.023
	LTE Band 7	20M	QPSK	50	0	Front	10mm	Battery 1	ON	21350	2560	22.68	24.00	1.355	-0.09	0.743	1.007
	LTE Band 7	20M	QPSK	100	0	Front	10mm	Battery 1	ON	21100	2535	22.79	24.00	1.321	0.01	0.815	1.077
25	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 1	ON	21100	2535	23.12	24.00	1.225	-0.05	1.090	1.335
	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 1	ON	20850	2510	23.00	24.00	1.259	0.09	1.010	1.272
	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 1	ON	21350	2560	23.10	24.00	1.230	-0.14	1.020	1.255
	LTE Band 7	20M	QPSK	50	0	Back	10mm	Battery 1	ON	21100	2535	22.86	24.00	1.300	-0.01	0.738	0.960
	LTE Band 7	20M	QPSK	50	0	Back	10mm	Battery 1	ON	20850	2510	22.68	24.00	1.355	0.09	0.716	0.970
	LTE Band 7	20M	QPSK	50	0	Back	10mm	Battery 1	ON	21350	2560	22.68	24.00	1.355	-0.11	0.701	0.950
	LTE Band 7	20M	QPSK	100	0	Back	10mm	Battery 1	ON	21100	2535	22.79	24.00	1.321	0.14	0.732	0.967
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	Battery 1	ON	21100	2535	23.12	24.00	1.225	-0.05	0.232	0.284
	LTE Band 7	20M	QPSK	50	0	Left Side	10mm	Battery 1	ON	21100	2535	22.86	24.00	1.300	0.02	0.206	0.268
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	Battery 1	ON	21100	2535	23.12	24.00	1.225	0.03	0.251	0.307
	LTE Band 7	20M	QPSK	50	0	Right Side	10mm	Battery 1	ON	21100	2535	22.86	24.00	1.300	-0.08	0.230	0.299
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	ON	21100	2535	23.12	24.00	1.225	0.12	0.734	0.899
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	ON	20850	2510	23.00	24.00	1.259	0.08	0.704	0.886
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	ON	21350	2560	23.10	24.00	1.230	-0.13	0.695	0.855
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	ON	21100	2535	22.86	24.00	1.300	0.01	0.671	0.872
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	ON	20850	2510	22.68	24.00	1.355	-0.09	0.654	0.886
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	ON	21350	2560	22.68	24.00	1.355	0.17	0.643	0.871
	LTE Band 7	20M	QPSK	100	0	Bottom Side	10mm	Battery 1	ON	21100	2535	22.79	24.00	1.321	0.04	0.659	0.871
	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 2	ON	21100	2535	23.12	24.00	1.225	0.02	0.995	1.218

## <TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
26	LTE Band 41	20M	QPSK	1	0	Front	10mm	Battery 1	OFF	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.09	0.455	0.594
	LTE Band 41	20M	QPSK	50	0	Front	10mm	Battery 1	OFF	40620	2593	22.87	24.00	1.297	62.9	1.006	-0.01	0.425	0.555
	LTE Band 41	20M	QPSK	1	0	Back	10mm	Battery 1	OFF	40620	2593	23.87	25.00	1.297	62.9	1.006	0.04	0.437	0.570
	LTE Band 41	20M	QPSK	50	0	Back	10mm	Battery 1	OFF	40620	2593	22.87	24.00	1.297	62.9	1.006	-0.04	0.407	0.531
	LTE Band 41	20M	QPSK	1	0	Left Side	10mm	Battery 1	OFF	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.09	0.158	0.206
	LTE Band 41	20M	QPSK	50	0	Left Side	10mm	Battery 1	OFF	40620	2593	22.87	24.00	1.297	62.9	1.006	0.12	0.116	0.151
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	Battery 1	OFF	40620	2593	23.87	25.00	1.297	62.9	1.006	0.08	0.109	0.142
	LTE Band 41	20M	QPSK	50	0	Right Side	10mm	Battery 1	OFF	40620	2593	22.87	24.00	1.297	62.9	1.006	-0.09	0.077	0.100
	LTE Band 41	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	OFF	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.08	0.423	0.552
	LTE Band 41	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	OFF	40620	2593	22.87	24.00	1.297	62.9	1.006	0.13	0.380	0.496
	LTE Band 41	20M	QPSK	1	0	Front	10mm	Battery 2	OFF	40620	2593	23.87	25.00	1.297	62.9	1.006	0.05	0.446	0.582



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	0.01	0.066	0.068
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	-0.02	0.112	0.115
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	-0.11	0.121	0.124
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 1	Battery 1	6	2437	17.93	18.00	1.016	99.12	1.009	-0.13	0.068	0.070
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 1	Battery 2	6	2437	17.93	18.00	1.016	99.12	1.009	0.13	0.146	0.150
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	0.08	0.124	0.127
27	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	0.02	0.205	0.210
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	-0.1	0.175	0.179
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 2	Battery 1	6	2437	17.92	18.00	1.019	99.44	1.006	-0.01	0.156	0.160
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	Battery 2	6	2437	17.92	18.00	1.019	99.44	1.006	0.12	0.198	0.203
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	-0.12	0.228	0.253
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	0.07	0.177	0.196
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	0.07	0.185	0.205
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	0.02	0.165	0.184
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 1	Battery 2	46	5230	17.20	17.50	1.072	96.46	1.037	0.06	0.209	0.232
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 2	Battery 1	38	5190	17.20	17.50	1.072	95.96	1.042	0.01	0.030	0.033
28	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 2	Battery 1	38	5190	17.20	17.50	1.072	95.96	1.042	-0.16	0.317	0.354
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	Ant 2	Battery 1	38	5190	17.20	17.50	1.072	95.96	1.042	0.15	0.068	0.076
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 2	Battery 1	38	5190	17.20	17.50	1.072	95.96	1.042	0.09	0.037	0.041
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 2	Battery 2	38	5190	17.20	17.50	1.072	95.96	1.042	0.06	0.301	0.336
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	0.01	0.213	0.237
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	0.12	0.210	0.234
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	0.05	0.165	0.184
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	0.01	0.223	0.248
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 1	Battery 2	155	5775	17.40	17.50	1.023	92	1.087	0.12	0.197	0.219
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	0.15	0.170	0.198
29	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	-0.13	0.420	0.489
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	0	0.372	0.433
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 2	Battery 1	155	5775	17.20	17.50	1.072	92	1.087	-0.06	0.157	0.183
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 2	Battery 2	155	5775	17.20	17.50	1.072	92	1.087	0.17	0.392	0.457

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	LE-1Mbps	Front	10mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	0	< 0.001	< 0.001
	Bluetooth	LE-1Mbps	Back	10mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	0	< 0.001	< 0.001
30	Bluetooth	LE-1Mbps	Right Side	10mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	-0.07	< 0.001	< 0.001
	Bluetooth	LE-1Mbps	Top Side	10mm	Ant 1	Battery 1	19	2440	5.80	6.00	1.047	62.3	1.337	0	< 0.001	< 0.001
	Bluetooth	LE-1Mbps	Right Side	10mm	Ant 1	Battery 2	19	2440	5.80	6.00	1.047	62.3	1.337	0.02	< 0.001	< 0.001



**14.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	0mm	Battery 1	Soft Holster + Trigger Handle	189	836.4	30.25	30.50	1.059	0.04	0.231	0.245
	GSM850	GPRS (4 Tx slots)	Front	0mm	Battery 1	Soft Holster + Rigid Holster	189	836.4	30.25	30.50	1.059	0.05	0.460	0.487
31	GSM850	GPRS (4 Tx slots)	Back	0mm	Battery 1	Soft Holster + Rigid Holster	189	836.4	30.25	30.50	1.059	0.03	0.495	0.524
	GSM850	GPRS (4 Tx slots)	Back	0mm	Battery 2	Soft Holster + Rigid Holster	189	836.4	30.25	30.50	1.059	0.03	0.451	0.478
	GSM1900	GPRS (4 Tx slots)	Front	0mm	Battery 1	Soft Holster + Trigger Handle	661	1880	27.10	27.50	1.096	0.02	0.082	0.090
	GSM1900	GPRS (4 Tx slots)	Front	0mm	Battery 1	Soft Holster + Rigid Holster	661	1880	27.10	27.50	1.096	0.07	0.133	0.146
32	GSM1900	GPRS (4 Tx slots)	Back	0mm	Battery 1	Soft Holster + Rigid Holster	661	1880	27.10	27.50	1.096	0.11	0.154	0.169
	GSM1900	GPRS (4 Tx slots)	Back	0mm	Battery 2	Soft Holster + Rigid Holster	661	1880	27.10	27.50	1.096	-0.08	0.144	0.158

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0mm	Battery 1	Soft Holster + Trigger Handle	9400	1880	24.67	25.00	1.079	0.11	0.151	0.163
33	WCDMA II	RMC 12.2Kbps	Front	0mm	Battery 1	Soft Holster + Rigid Holster	9400	1880	24.67	25.00	1.079	0.05	0.454	0.490
	WCDMA II	RMC 12.2Kbps	Back	0mm	Battery 1	Soft Holster + Rigid Holster	9400	1880	24.67	25.00	1.079	0.06	0.396	0.427
	WCDMA II	RMC 12.2Kbps	Front	0mm	Battery 2	Soft Holster + Rigid Holster	9400	1880	24.67	25.00	1.079	-0.03	0.442	0.477
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Battery 1	Soft Holster + Trigger Handle	1413	1732.6	24.69	25.00	1.074	0.12	0.239	0.257
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Battery 1	Soft Holster + Rigid Holster	1413	1732.6	24.69	25.00	1.074	0.05	0.309	0.332
34	WCDMA IV	RMC 12.2Kbps	Back	0mm	Battery 1	Soft Holster + Rigid Holster	1413	1732.6	24.69	25.00	1.074	0.06	0.368	0.395
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Battery 2	Soft Holster + Rigid Holster	1413	1732.6	24.69	25.00	1.074	-0.07	0.354	0.380
	WCDMA V	RMC 12.2Kbps	Front	0mm	Battery 1	Soft Holster + Trigger Handle	4182	836.4	24.92	25.50	1.143	0.03	0.132	0.151
	WCDMA V	RMC 12.2Kbps	Front	0mm	Battery 1	Soft Holster + Rigid Holster	4182	836.4	24.92	25.50	1.143	0.09	0.254	0.290
35	WCDMA V	RMC 12.2Kbps	Back	0mm	Battery 1	Soft Holster + Rigid Holster	4182	836.4	24.92	25.50	1.143	0.08	0.333	0.381
	WCDMA V	RMC 12.2Kbps	Back	0mm	Battery 2	Soft Holster + Rigid Holster	4182	836.4	24.92	25.50	1.143	0.07	0.313	0.358





<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	18900	1880	25.06	25.50	1.107	-0.01	0.349	0.386
	LTE Band 2	20M	QPSK	50	24	Front	0mm	Battery 1	Soft Holster + Trigger Handle	18900	1880	24.05	24.50	1.109	0.06	0.305	0.338
36	LTE Band 2	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	18900	1880	25.06	25.50	1.107	-0.13	0.379	0.419
	LTE Band 2	20M	QPSK	50	24	Front	0mm	Battery 1	Soft Holster + Rigid Holster	18900	1880	24.05	24.50	1.109	0.04	0.359	0.398
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Battery 1	Soft Holster + Rigid Holster	18900	1880	25.06	25.50	1.107	0.03	0.369	0.408
	LTE Band 2	20M	QPSK	50	24	Back	0mm	Battery 1	Soft Holster + Rigid Holster	18900	1880	24.05	24.50	1.109	0.01	0.343	0.380
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Battery 2	Soft Holster + Rigid Holster	18900	1880	25.06	25.50	1.107	-0.12	0.368	0.407
	LTE Band 4	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	20175	1732.5	24.89	25.50	1.151	0.05	0.331	0.381
	LTE Band 4	20M	QPSK	50	24	Front	0mm	Battery 1	Soft Holster + Trigger Handle	20175	1732.5	23.90	24.50	1.148	-0.02	0.316	0.363
37	LTE Band 4	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	20175	1732.5	24.89	25.50	1.151	0.15	0.378	0.435
	LTE Band 4	20M	QPSK	50	24	Front	0mm	Battery 1	Soft Holster + Rigid Holster	20175	1732.5	23.90	24.50	1.148	0.01	0.370	0.425
	LTE Band 4	20M	QPSK	1	0	Back	0mm	Battery 1	Soft Holster + Rigid Holster	20175	1732.5	24.89	25.50	1.151	0.06	0.280	0.322
	LTE Band 4	20M	QPSK	50	24	Back	0mm	Battery 1	Soft Holster + Rigid Holster	20175	1732.5	23.90	24.50	1.148	0.04	0.268	0.308
	LTE Band 4	20M	QPSK	1	0	Front	0mm	Battery 2	Soft Holster + Rigid Holster	20175	1732.5	24.89	25.50	1.151	0.03	0.371	0.427
	LTE Band 5	10M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	20525	836.5	25.05	25.70	1.161	0.06	0.190	0.221
	LTE Band 5	10M	QPSK	25	12	Front	0mm	Battery 1	Soft Holster + Trigger Handle	20525	836.5	23.95	24.70	1.189	0.01	0.167	0.198
	LTE Band 5	10M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	20525	836.5	25.05	25.70	1.161	0.01	0.365	0.424
	LTE Band 5	10M	QPSK	25	12	Front	0mm	Battery 1	Soft Holster + Rigid Holster	20525	836.5	23.95	24.70	1.189	-0.04	0.320	0.380
38	LTE Band 5	10M	QPSK	1	0	Back	0mm	Battery 1	Soft Holster + Rigid Holster	20525	836.5	25.05	25.70	1.161	-0.13	0.370	0.430
	LTE Band 5	10M	QPSK	25	12	Back	0mm	Battery 1	Soft Holster + Rigid Holster	20525	836.5	23.95	24.70	1.189	-0.01	0.281	0.334
	LTE Band 5	10M	QPSK	1	0	Back	0mm	Battery 2	Soft Holster + Rigid Holster	20525	836.5	25.05	25.70	1.161	0.13	0.344	0.400
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	21100	2535	23.92	25.00	1.282	-0.01	0.669	0.858
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	20850	2510	23.84	25.00	1.306	0.06	0.641	0.837
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	21350	2560	23.80	25.00	1.318	-0.13	0.648	0.854
	LTE Band 7	20M	QPSK	50	24	Front	0mm	Battery 1	Soft Holster + Trigger Handle	20850	2510	23.09	24.00	1.233	0.06	0.644	0.794
	LTE Band 7	20M	QPSK	100	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	20850	2510	23.03	24.00	1.250	0.07	0.631	0.789
39	LTE Band 7	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	21100	2535	23.92	25.00	1.282	0.01	0.673	0.863
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	20850	2510	23.84	25.00	1.306	0.07	0.651	0.850
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	21350	2560	23.80	25.00	1.318	-0.08	0.651	0.858
	LTE Band 7	20M	QPSK	50	24	Front	0mm	Battery 1	Soft Holster + Rigid Holster	20850	2510	23.09	24.00	1.233	0.08	0.643	0.793
	LTE Band 7	20M	QPSK	100	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	20850	2510	23.03	24.00	1.250	0.05	0.622	0.778
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Battery 1	Soft Holster + Rigid Holster	21100	2535	23.92	25.00	1.282	0.09	0.371	0.476
	LTE Band 7	20M	QPSK	50	24	Back	0mm	Battery 1	Soft Holster + Rigid Holster	20850	2510	23.09	24.00	1.233	0.04	0.361	0.445
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Battery 2	Soft Holster + Rigid Holster	21100	2535	23.92	25.00	1.282	0.02	0.658	0.844





<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	40620	2593	23.87	25.00	1.297	62.9	1.006	0.08	0.180	0.235
	LTE Band 41	20M	QPSK	50	0	Front	0mm	Battery 1	Soft Holster + Trigger Handle	40620	2593	22.87	24.00	1.297	62.9	1.006	0.02	0.152	0.198
40	LTE Band 41	20M	QPSK	1	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	40620	2593	23.87	25.00	1.297	62.9	1.006	0.08	0.396	0.517
	LTE Band 41	20M	QPSK	50	0	Front	0mm	Battery 1	Soft Holster + Rigid Holster	40620	2593	22.87	24.00	1.297	62.9	1.006	-0.01	0.271	0.354
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Battery 1	Soft Holster + Rigid Holster	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.03	0.256	0.334
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Battery 1	Soft Holster + Rigid Holster	40620	2593	22.87	24.00	1.297	62.9	1.006	0.03	0.185	0.241
	LTE Band 41	20M	QPSK	1	0	Front	0mm	Battery 2	Soft Holster + Rigid Holster	40620	2593	23.87	25.00	1.297	62.9	1.006	0.01	0.388	0.506

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	Soft Holster + Trigger Handle	6	2437	17.93	18.00	1.016	99.12	1.009	-0.15	0.027	0.028
41	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	6	2437	17.93	18.00	1.016	99.12	1.009	0.01	0.035	0.036
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	6	2437	17.93	18.00	1.016	99.12	1.009	-0.12	0.02	0.021
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Battery 2	Soft Holster + Rigid Holster	6	2437	17.93	18.00	1.016	99.12	1.009	0.07	0.021	0.022
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Battery 1	Soft Holster + Trigger Handle	6	2437	17.92	18.00	1.019	99.44	1.006	0.02	0.033	0.034
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	6	2437	17.92	18.00	1.019	99.44	1.006	-0.10	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	6	2437	17.92	18.00	1.019	99.44	1.006	0.02	0.032	0.033
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 2	Soft Holster + Trigger Handle	6	2437	17.92	18.00	1.019	99.44	1.006	0.08	0.030	0.031
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1	Battery 1	Soft Holster + Trigger Handle	54	5270	17.10	17.50	1.096	96.46	1.037	0.00	0.148	0.168
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	54	5270	17.10	17.50	1.096	96.46	1.037	-0.07	0.201	0.229
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	54	5270	17.10	17.50	1.096	96.46	1.037	-0.09	0.103	0.117
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1	Battery 2	Soft Holster + Rigid Holster	54	5270	17.10	17.50	1.096	96.46	1.037	-0.04	0.190	0.216
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 2	Battery 1	Soft Holster + Trigger Handle	54	5270	17.10	17.50	1.096	95.96	1.042	0.15	0.065	0.074
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	54	5270	17.10	17.50	1.096	95.96	1.042	-0.01	0.048	0.055
42	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	54	5270	17.10	17.50	1.096	95.96	1.042	0.17	0.250	0.286
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 2	Battery 2	Soft Holster + Rigid Holster	54	5270	17.10	17.50	1.096	95.96	1.042	0.01	0.231	0.264
43	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	Soft Holster + Trigger Handle	138	5690	17.40	17.50	1.023	92	1.087	-0.09	0.149	0.166
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	138	5690	17.40	17.50	1.023	92	1.087	-0.04	0.131	0.146
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	138	5690	17.40	17.50	1.023	92	1.087	-0.18	0.116	0.129
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 2	Soft Holster + Trigger Handle	138	5690	17.40	17.50	1.023	92	1.087	0.07	0.145	0.161
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	Soft Holster + Trigger Handle	138	5690	17.40	17.50	1.023	92	1.087	0.06	0.096	0.107
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	138	5690	17.40	17.50	1.023	92	1.087	-0.14	0.073	0.081
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	138	5690	17.40	17.50	1.023	92	1.087	-0.01	0.121	0.135
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	Soft Holster + Rigid Holster	138	5690	17.40	17.50	1.023	92	1.087	0.00	0.115	0.128
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	Soft Holster + Trigger Handle	155	5775	17.40	17.50	1.023	92	1.087	0.04	0.153	0.170
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	155	5775	17.40	17.50	1.023	92	1.087	0.10	0.118	0.131
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	155	5775	17.40	17.50	1.023	92	1.087	0.04	0.096	0.107
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Battery 2	Soft Holster + Trigger Handle	155	5775	17.40	17.50	1.023	92	1.087	0.05	0.147	0.164
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	Soft Holster + Trigger Handle	155	5775	17.20	17.50	1.072	92	1.087	-0.07	0.135	0.157
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	155	5775	17.20	17.50	1.072	92	1.087	0.09	0.101	0.118
44	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	Soft Holster + Rigid Holster	155	5775	17.20	17.50	1.072	92	1.087	0.15	0.187	0.218
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	Soft Holster + Rigid Holster	155	5775	17.20	17.50	1.072	92	1.087	-0.10	0.121	0.141



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
45	Bluetooth	LE-1Mbps	Front	0mm	Ant 1	Battery 1	Soft Holster + Trigger Handle	19	2440	5.80	6.00	1.047	62.3	1.337	0	< 0.001	< 0.001
	Bluetooth	LE-1Mbps	Front	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	19	2440	5.80	6.00	1.047	62.3	1.337	0	< 0.001	< 0.001
	Bluetooth	LE-1Mbps	Back	0mm	Ant 1	Battery 1	Soft Holster + Rigid Holster	19	2440	5.80	6.00	1.047	62.3	1.337	0	< 0.001	< 0.001
	Bluetooth	LE-1Mbps	Front	0mm	Ant 1	Battery 2	Soft Holster + Trigger Handle	19	2440	5.80	6.00	1.047	62.3	1.337	0	< 0.001	< 0.001

14.4 Hand SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
46	GSM850	GPRS (4 Tx slots)	Back	0mm	Battery 1	Trigger Handle	189	836.4	30.25	30.50	1.059	-0.02	0.556	0.589
	GSM850	GPRS (4 Tx slots)	Back	0mm	Battery 2	Trigger Handle	189	836.4	30.25	30.50	1.059	0.05	0.524	0.555
47	GSM1900	GPRS (4 Tx slots)	Back	0mm	Battery 1	Trigger Handle	661	1880	27.10	27.50	1.096	-0.04	0.403	0.442
	GSM1900	GPRS (4 Tx slots)	Back	0mm	Battery 2	Trigger Handle	661	1880	27.10	27.50	1.096	0.05	0.385	0.422

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
48	WCDMA II	1RMC 12.2Kbps	Back	0mm	Battery 1	Trigger Handle	9400	1880	24.67	25.00	1.079	-0.03	0.418	0.451
	WCDMA II	1RMC 12.2Kbps	Back	0mm	Battery 2	Trigger Handle	9400	1880	24.67	25.00	1.079	0.05	0.402	0.434
49	WCDMA IV	1RMC 12.2Kbps	Back	0mm	Battery 1	Trigger Handle	1413	1732.6	24.69	25.00	1.074	-0.01	0.380	0.408
	WCDMA IV	1RMC 12.2Kbps	Back	0mm	Battery 2	Trigger Handle	1413	1732.6	24.69	25.00	1.074	0.04	0.370	0.397
50	WCDMA V	RMC 12.2Kbps	Back	0mm	Battery 1	Trigger Handle	4182	836.4	24.92	25.50	1.143	-0.05	0.308	0.352
	WCDMA V	RMC 12.2Kbps	Back	0mm	Battery 2	Trigger Handle	4182	836.4	24.92	25.50	1.143	0.11	0.288	0.329

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
51	LTE Band 2	20M	QPSK	1	0	Back	0mm	Battery 1	Trigger Handle	18900	1880	25.06	25.50	1.107	-0.07	0.362	0.401
	LTE Band 2	20M	QPSK	50	24	Back	0mm	Battery 1	Trigger Handle	18900	1880	24.05	24.50	1.109	0.02	0.312	0.346
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Battery 2	Trigger Handle	18900	1880	25.06	25.50	1.107	0.04	0.351	0.388
52	LTE Band 4	20M	QPSK	1	0	Back	0mm	Battery 1	Trigger Handle	20175	1732.5	24.89	25.50	1.151	-0.01	0.320	0.368
	LTE Band 4	20M	QPSK	50	24	Back	0mm	Battery 1	Trigger Handle	20175	1732.5	23.90	24.50	1.148	0.05	0.285	0.327
	LTE Band 4	20M	QPSK	1	0	Back	0mm	Battery 2	Trigger Handle	20175	1732.5	24.89	25.50	1.151	0.07	0.308	0.354
53	LTE Band 5	10M	QPSK	1	0	Back	0mm	Battery 1	Trigger Handle	20525	836.5	25.05	25.70	1.161	-0.09	0.263	0.305
	LTE Band 5	10M	QPSK	25	12	Back	0mm	Battery 1	Trigger Handle	20525	836.5	23.95	24.70	1.189	0.01	0.201	0.239
	LTE Band 5	10M	QPSK	1	0	Back	0mm	Battery 2	Trigger Handle	20525	836.5	25.05	25.70	1.161	-0.11	0.249	0.289
54	LTE Band 7	20M	QPSK	1	0	Back	0mm	Battery 1	Trigger Handle	21100	2535	23.92	25.00	1.282	-0.02	0.451	0.578
	LTE Band 7	20M	QPSK	50	24	Back	0mm	Battery 1	Trigger Handle	20850	2510	23.09	24.00	1.233	0.03	0.387	0.477
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Battery 2	Trigger Handle	21100	2535	23.92	25.00	1.282	-0.08	0.425	0.545

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
55	LTE Band 41	20M	QPSK	1	0	Back	0mm	Battery 1	Trigger Handle	40620	2593	23.87	25.00	1.297	62.9	1.006	-0.09	0.257	0.335
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Battery 1	Trigger Handle	40620	2593	22.87	24.00	1.297	62.9	1.006	0.01	0.247	0.322
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Battery 2	Trigger Handle	40620	2593	23.87	25.00	1.297	62.9	1.006	0.09	0.241	0.314

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
56	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 1	Trigger Handle	6	2437	17.93	18.00	1.016	99.12	1.009	0.01	0.655	0.672
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Battery 2	Trigger Handle	6	2437	17.93	18.00	1.016	99.12	1.009	-0.01	0.632	0.648
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 1	Trigger Handle	6	2437	17.92	18.00	1.019	99.44	1.006	0.09	0.342	0.350
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Battery 2	Trigger Handle	6	2437	17.92	18.00	1.019	99.44	1.006	-0.07	0.335	0.343
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 1	Battery 1	Trigger Handle	54	5270	17.10	17.50	1.096	96.46	1.037	0.13	0.190	0.216
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 1	Battery 2	Trigger Handle	54	5270	17.10	17.50	1.096	96.46	1.037	-0.03	0.173	0.197
57	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 2	Battery 1	Trigger Handle	54	5270	17.10	17.50	1.096	95.96	1.042	0.16	0.475	0.543
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 2	Battery 2	Trigger Handle	54	5270	17.10	17.50	1.096	95.96	1.042	-0.02	0.446	0.510
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	Trigger Handle	138	5690	17.40	17.50	1.023	92	1.087	0.15	0.262	0.291
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	Trigger Handle	138	5690	17.40	17.50	1.023	92	1.087	-0.01	0.251	0.279
58	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	Trigger Handle	138	5690	17.40	17.50	1.023	92	1.087	0.16	0.785	0.873
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	Trigger Handle	122	5610	17.20	17.50	1.072	92	1.087	-0.04	0.693	0.807
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	Trigger Handle	138	5690	17.40	17.50	1.023	92	1.087	0.01	0.737	0.820
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 1	Trigger Handle	155	5775	17.40	17.50	1.023	92	1.087	0.16	0.237	0.264
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Battery 2	Trigger Handle	155	5775	17.40	17.50	1.023	92	1.087	-0.07	0.229	0.255
59	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 1	Trigger Handle	155	5775	17.20	17.50	1.072	92	1.087	0.15	0.680	0.792
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Battery 2	Trigger Handle	155	5775	17.20	17.50	1.072	92	1.087	0.13	0.626	0.729

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
60	Bluetooth	LE-1Mbps	Back	0mm	Ant 1	Battery 1	Trigger Handle	19	2440	5.80	6.00	1.047	62.3	1.337	-0.04	< 0.001	< 0.001
	Bluetooth	LE-1Mbps	Back	0mm	Ant 1	Battery 2	Trigger Handle	19	2440	5.80	6.00	1.047	62.3	1.337	-0.12	< 0.001	< 0.001



**14.5 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	Battery 1	1	2412	17.88	18.00	1.028	99.12	1.009	0.03	1.220		1.265
2nd	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	Battery 1	1	2412	17.88	18.00	1.028	99.12	1.009	0.12	1.180	1.03	1.224
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	0.08	0.992		1.102
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	46	5230	17.20	17.50	1.072	96.46	1.037	0.04	0.978	1.01	1.087
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	54	5270	17.10	17.50	1.096	96.46	1.037	0.07	1.080		1.228
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 1	Battery 1	54	5270	17.10	17.50	1.096	96.46	1.037	0.07	1.060	1.02	1.205
37	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	-0.16	1.080		1.201
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 1	138	5690	17.40	17.50	1.023	92	1.087	-0.16	1.030	1.05	1.146
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	-0.12	1.080		1.201
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	Battery 1	155	5775	17.40	17.50	1.023	92	1.087	0.02	1.010	1.07	1.123
1st	LTE Band 7	20M_QPSK_1_0	Back	10mm		Battery 1	21100	2535	23.12	24.00	1.225			-0.05	1.090		1.335
2nd	LTE Band 7	20M_QPSK_1_0	Back	10mm		Battery 1	21100	2535	23.12	24.00	1.225			-0.01	1.040	1.05	1.274

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**15. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Hand
1.	WWAN + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz Ant 1 + WLAN5GHz Ant 2	Yes	Yes	Yes	Yes
3.	WWAN + WLAN2.4GHz Ant 1 + WLAN5GHz Ant 2	Yes	Yes	Yes	Yes
4.	WWAN + WLAN5GHz Ant 2 + Bluetooth Ant 1	Yes	Yes	Yes	Yes

**General Note:**

1. The BT module 2 will not transmit simultaneous with WWAN and module 1 WLAN/BT operation.
2. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
3. WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
4. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
5. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
6. The Scaled SAR summation is calculated based on the same configuration and test position.
7. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

The SPLSR calculated results please refer to section 15.5.



15.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+2+3 SPLSR	1+2+3 Case No	1+4+5 SPLSR	1+4+5 Case No	1+2+5 SPLSR	1+2+5 Case No
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1										
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)										
GSM850	Right Cheek	0.410	0.167	0.359	0.683	0.391	0.003	0.936	1.484	0.968	0.804						
	Right Tilted	0.325	0.155	0.160	0.759	0.231	0.001	0.640	1.315	0.711	0.557						
	Left Cheek	0.421	1.265	0.169	1.228	0.160	0.004	1.855	1.809	1.846	0.585	0.04	Case 1	0.02	Case 12	0.03	Case 24
	Left Tilted	0.207	0.385	0.153	0.796	0.134	0.001	0.745	1.137	0.726	0.342						
GSM1900	Right Cheek	0.342	0.167	0.359	0.683	0.391	0.003	0.868	1.416	0.900	0.736						
	Right Tilted	0.110	0.155	0.160	0.759	0.231	0.001	0.425	1.100	0.496	0.342						
	Left Cheek	0.377	1.265	0.169	1.228	0.160	0.004	1.811	1.765	1.802	0.541	0.04	Case 2	0.02	Case 13	0.02	Case 25
	Left Tilted	0.200	0.385	0.153	0.796	0.134	0.001	0.738	1.130	0.719	0.335						
WCDMA II	Right Cheek	0.480	0.167	0.359	0.683	0.391	0.003	1.006	1.554	1.038	0.874						
	Right Tilted	0.183	0.155	0.160	0.759	0.231	0.001	0.498	1.173	0.569	0.415						
	Left Cheek	0.503	1.265	0.169	1.228	0.160	0.004	1.937	1.891	1.928	0.667	0.04	Case 3	0.02	Case 14	0.03	Case 26
	Left Tilted	0.256	0.385	0.153	0.796	0.134	0.001	0.794	1.186	0.775	0.391						
WCDMA IV	Right Cheek	0.337	0.167	0.359	0.683	0.391	0.003	0.863	1.411	0.895	0.731						
	Right Tilted	0.099	0.155	0.160	0.759	0.231	0.001	0.414	1.089	0.485	0.331						
	Left Cheek	0.493	1.265	0.169	1.228	0.160	0.004	1.927	1.881	1.918	0.657	0.04	Case 4	0.02	Case 15	0.03	Case 27
	Left Tilted	0.097	0.385	0.153	0.796	0.134	0.001	0.635	1.027	0.616	0.232						
WCDMA V	Right Cheek	0.326	0.167	0.359	0.683	0.391	0.003	0.852	1.400	0.884	0.720						
	Right Tilted	0.248	0.155	0.160	0.759	0.231	0.001	0.563	1.238	0.634	0.480						
	Left Cheek	0.233	1.265	0.169	1.228	0.160	0.004	1.667	1.621	1.658	0.397	0.04	Case 5	0.02	Case 16	0.02	Case 28
	Left Tilted	0.194	0.385	0.153	0.796	0.134	0.001	0.732	1.124	0.713	0.329						
LTE Band 2	Right Cheek	0.599	0.167	0.359	0.683	0.391	0.003	1.125	1.673	1.157	0.993			0.02	Case 17		
	Right Tilted	0.371	0.155	0.160	0.759	0.231	0.001	0.686	1.361	0.757	0.603						
	Left Cheek	0.479	1.265	0.169	1.228	0.160	0.004	1.913	1.867	1.904	0.643	0.04	Case 6	0.02	Case 18	0.03	Case 29
	Left Tilted	0.292	0.385	0.153	0.796	0.134	0.001	0.830	1.222	0.811	0.427						
LTE Band 4	Right Cheek	0.397	0.167	0.359	0.683	0.391	0.003	0.923	1.471	0.955	0.791						
	Right Tilted	0.167	0.155	0.160	0.759	0.231	0.001	0.482	1.157	0.553	0.399						
	Left Cheek	0.450	1.265	0.169	1.228	0.160	0.004	1.884	1.838	1.875	0.614	0.04	Case 7	0.02	Case 19	0.02	Case 30
	Left Tilted	0.148	0.385	0.153	0.796	0.134	0.001	0.686	1.078	0.667	0.283						
LTE Band 5	Right Cheek	0.360	0.167	0.359	0.683	0.391	0.003	0.886	1.434	0.918	0.754						
	Right Tilted	0.297	0.155	0.160	0.759	0.231	0.001	0.612	1.287	0.683	0.529						
	Left Cheek	0.375	1.265	0.169	1.228	0.160	0.004	1.809	1.763	1.800	0.539	0.04	Case 8	0.02	Case 20	0.03	Case 31
	Left Tilted	0.194	0.385	0.153	0.796	0.134	0.001	0.732	1.124	0.713	0.329						
LTE Band 7	Right Cheek	0.512	0.167	0.359	0.683	0.391	0.003	1.038	1.586	1.070	0.906						
	Right Tilted	0.204	0.155	0.160	0.759	0.231	0.001	0.519	1.194	0.590	0.436						
	Left Cheek	0.536	1.265	0.169	1.228	0.160	0.004	1.970	1.924	1.961	0.700	0.04	Case 9	0.02	Case 21	0.03	Case 32
	Left Tilted	0.195	0.385	0.153	0.796	0.134	0.001	0.733	1.125	0.714	0.330						
LTE Band 41	Right Cheek	0.401	0.167	0.359	0.683	0.391	0.003	0.927	1.475	0.959	0.795						
	Right Tilted	0.268	0.155	0.160	0.759	0.231	0.001	0.583	1.258	0.654	0.500						
	Left Cheek	0.539	1.265	0.169	1.228	0.160	0.004	1.973	1.927	1.964	0.703	0.04	Case 11	0.03	Case 23	0.03	Case 34
	Left Tilted	0.275	0.385	0.153	0.796	0.134	0.001	0.813	1.205	0.794	0.410						





15.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+2+3 SPLSR	1+2+3 Case No	1+4+5 SPLSR	1+4+5 Case No	1+2+5 SPLSR	1+2+5 Case No	1+5+6 SPLSR	1+5+6 Case No	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1													
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)													
GSM850	Front	0.429	0.068	0.127	0.253	0.198	0.001	0.624	0.880	0.695	0.628									
	Back	0.641	0.115	0.210	0.234	0.489	0.001	0.966	1.364	1.245	1.131									
	Left side	0.124		0.179		0.433		0.303	0.557	0.557	0.557									
	Right side	0.237	0.124		0.205		0.001	0.361	0.442	0.361	0.238									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.379						0.379	0.379	0.379	0.379									
GSM1900	Front	0.444	0.068	0.127	0.253	0.198	0.001	0.639	0.895	0.710	0.643									
	Back	0.534	0.115	0.210	0.234	0.489	0.001	0.859	1.257	1.138	1.024									
	Left side	0.338		0.179		0.433		0.517	0.771	0.771	0.771									
	Right side	0.065	0.124		0.205		0.001	0.189	0.270	0.189	0.066									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.343						0.343	0.343	0.343	0.343									
WCDMA II	Front	0.782	0.068	0.127	0.253	0.198	0.001	0.977	1.233	1.048	0.981									
	Back	0.725	0.115	0.210	0.234	0.489	0.001	1.050	1.448	1.329	1.215									
	Left side	0.544		0.179		0.433		0.723	0.977	0.977	0.977									
	Right side	0.119	0.124		0.205		0.001	0.243	0.324	0.243	0.120									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.579						0.579	0.579	0.579	0.579									
WCDMA IV	Front	0.729	0.068	0.127	0.253	0.198	0.001	0.924	1.180	0.995	0.928									
	Back	0.721	0.115	0.210	0.234	0.489	0.001	1.046	1.444	1.325	1.211									
	Left side	0.517		0.179		0.433		0.696	0.950	0.950	0.950									
	Right side	0.106	0.124		0.205		0.001	0.230	0.311	0.230	0.107									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.293						0.293	0.293	0.293	0.293									
WCDMA V	Front	0.403	0.068	0.127	0.253	0.198	0.001	0.598	0.854	0.669	0.602									
	Back	0.509	0.115	0.210	0.234	0.489	0.001	0.834	1.232	1.113	0.999									
	Left side	0.248		0.179		0.433		0.427	0.681	0.681	0.681									
	Right side	0.287	0.124		0.205		0.001	0.411	0.492	0.411	0.288									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.373						0.373	0.373	0.373	0.373									
LTE Band 2	Front	0.798	0.068	0.127	0.253	0.198	0.001	0.993	1.249	1.064	0.997									
	Back	0.758	0.115	0.210	0.234	0.489	0.001	1.083	1.481	1.362	1.248									
	Left side	0.521		0.179		0.433		0.700	0.954	0.954	0.954									
	Right side	0.209	0.124		0.205		0.001	0.333	0.414	0.333	0.210									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.516						0.516	0.516	0.516	0.516									
LTE Band 4	Front	0.833	0.068	0.127	0.253	0.198	0.001	1.028	1.284	1.099	1.032									
	Back	0.653	0.115	0.210	0.234	0.489	0.001	0.978	1.376	1.257	1.143									
	Left side	0.554		0.179		0.433		0.733	0.987	0.987	0.987									
	Right side	0.086	0.124		0.205		0.001	0.210	0.291	0.210	0.087									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.353						0.353	0.353	0.353	0.353									
LTE Band 5	Front	0.322	0.068	0.127	0.253	0.198	0.001	0.517	0.773	0.588	0.521									
	Back	0.409	0.115	0.210	0.234	0.489	0.001	0.734	1.132	1.013	0.899									
	Left side	0.189		0.179		0.433		0.368	0.622	0.622	0.622									
	Right side	0.303	0.124		0.205		0.001	0.427	0.508	0.427	0.304									
	Top side		0.070	0.160	0.248	0.183	0.001	0.230	0.431	0.253	0.184									
	Bottom side	0.242						0.242	0.242	0.242	0.242									
LTE Band 7	Front	1.220	0.068	0.127	0.253	0.198	0.001	1.415	1.671	1.486	1.419			0.01	Case 35					
	Back	1.335	0.115	0.210	0.234	0.489	0.001	1.660	2.058	1.939	1.825	0.01	Case 36	0.02	Case 37	0.02	Case 38	0.02	Case 39	



	Left side	0.284		0.179		0.433		<b>0.463</b>	<b>0.717</b>	<b>0.717</b>	<b>0.717</b>							
	Right side	0.307	0.124		0.205		0.001	<b>0.431</b>	<b>0.512</b>	<b>0.431</b>	<b>0.308</b>							
	Top side		0.070	0.160	0.248	0.183	0.001	<b>0.230</b>	<b>0.431</b>	<b>0.253</b>	<b>0.184</b>							
	Bottom side	0.899						<b>0.899</b>	<b>0.899</b>	<b>0.899</b>	<b>0.899</b>							
LTE Band 41	Front	0.594	0.068	0.127	0.253	0.198	0.001	<b>0.789</b>	<b>1.045</b>	<b>0.860</b>	<b>0.793</b>							
	Back	0.570	0.115	0.210	0.234	0.489	0.001	<b>0.895</b>	<b>1.293</b>	<b>1.174</b>	<b>1.060</b>							
	Left side	0.206		0.179		0.433		<b>0.385</b>	<b>0.639</b>	<b>0.639</b>	<b>0.639</b>							
	Right side	0.142	0.124		0.205		0.001	<b>0.266</b>	<b>0.347</b>	<b>0.266</b>	<b>0.143</b>							
	Top side		0.070	0.160	0.248	0.183	0.001	<b>0.230</b>	<b>0.431</b>	<b>0.253</b>	<b>0.184</b>							
	Bottom side	0.552						<b>0.552</b>	<b>0.552</b>	<b>0.552</b>	<b>0.552</b>							

**15.3 Body-Worn Accessory Exposure Conditions**


WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM850	Front	0.487	0.036	0.034	0.229	0.157	0.001	<b>0.557</b>	<b>0.873</b>	<b>0.680</b>	<b>0.645</b>
	Back	0.524	0.021	0.033	0.129	0.286	0.001	<b>0.578</b>	<b>0.939</b>	<b>0.831</b>	<b>0.811</b>
GSM1900	Front	0.146	0.036	0.034	0.229	0.157	0.001	<b>0.216</b>	<b>0.532</b>	<b>0.339</b>	<b>0.304</b>
	Back	0.169	0.021	0.033	0.129	0.286	0.001	<b>0.223</b>	<b>0.584</b>	<b>0.476</b>	<b>0.456</b>
WCDMA II	Front	0.490	0.036	0.034	0.229	0.157	0.001	<b>0.560</b>	<b>0.876</b>	<b>0.683</b>	<b>0.648</b>
	Back	0.427	0.021	0.033	0.129	0.286	0.001	<b>0.481</b>	<b>0.842</b>	<b>0.734</b>	<b>0.714</b>
WCDMA IV	Front	0.332	0.036	0.034	0.229	0.157	0.001	<b>0.402</b>	<b>0.718</b>	<b>0.525</b>	<b>0.490</b>
	Back	0.395	0.021	0.033	0.129	0.286	0.001	<b>0.449</b>	<b>0.810</b>	<b>0.702</b>	<b>0.682</b>
WCDMA V	Front	0.290	0.036	0.034	0.229	0.157	0.001	<b>0.360</b>	<b>0.676</b>	<b>0.483</b>	<b>0.448</b>
	Back	0.381	0.021	0.033	0.129	0.286	0.001	<b>0.435</b>	<b>0.796</b>	<b>0.688</b>	<b>0.668</b>
LTE Band 2	Front	0.419	0.036	0.034	0.229	0.157	0.001	<b>0.489</b>	<b>0.805</b>	<b>0.612</b>	<b>0.577</b>
	Back	0.408	0.021	0.033	0.129	0.286	0.001	<b>0.462</b>	<b>0.823</b>	<b>0.715</b>	<b>0.695</b>
LTE Band 4	Front	0.435	0.036	0.034	0.229	0.157	0.001	<b>0.505</b>	<b>0.821</b>	<b>0.628</b>	<b>0.593</b>
	Back	0.322	0.021	0.033	0.129	0.286	0.001	<b>0.376</b>	<b>0.737</b>	<b>0.629</b>	<b>0.609</b>
LTE Band 5	Front	0.424	0.036	0.034	0.229	0.157	0.001	<b>0.494</b>	<b>0.810</b>	<b>0.617</b>	<b>0.582</b>
	Back	0.430	0.021	0.033	0.129	0.286	0.001	<b>0.484</b>	<b>0.845</b>	<b>0.737</b>	<b>0.717</b>
LTE Band 7	Front	0.863	0.036	0.034	0.229	0.157	0.001	<b>0.933</b>	<b>1.249</b>	<b>1.056</b>	<b>1.021</b>
	Back	0.476	0.021	0.033	0.129	0.286	0.001	<b>0.530</b>	<b>0.891</b>	<b>0.783</b>	<b>0.763</b>
LTE Band 41	Front	0.517	0.036	0.034	0.229	0.157	0.001	<b>0.587</b>	<b>0.903</b>	<b>0.710</b>	<b>0.675</b>
	Back	0.334	0.021	0.033	0.129	0.286	0.001	<b>0.388</b>	<b>0.749</b>	<b>0.641</b>	<b>0.621</b>





### 15.4 SPLSR Evaluation and Analysis


**General Note:**

1.  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary
2. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

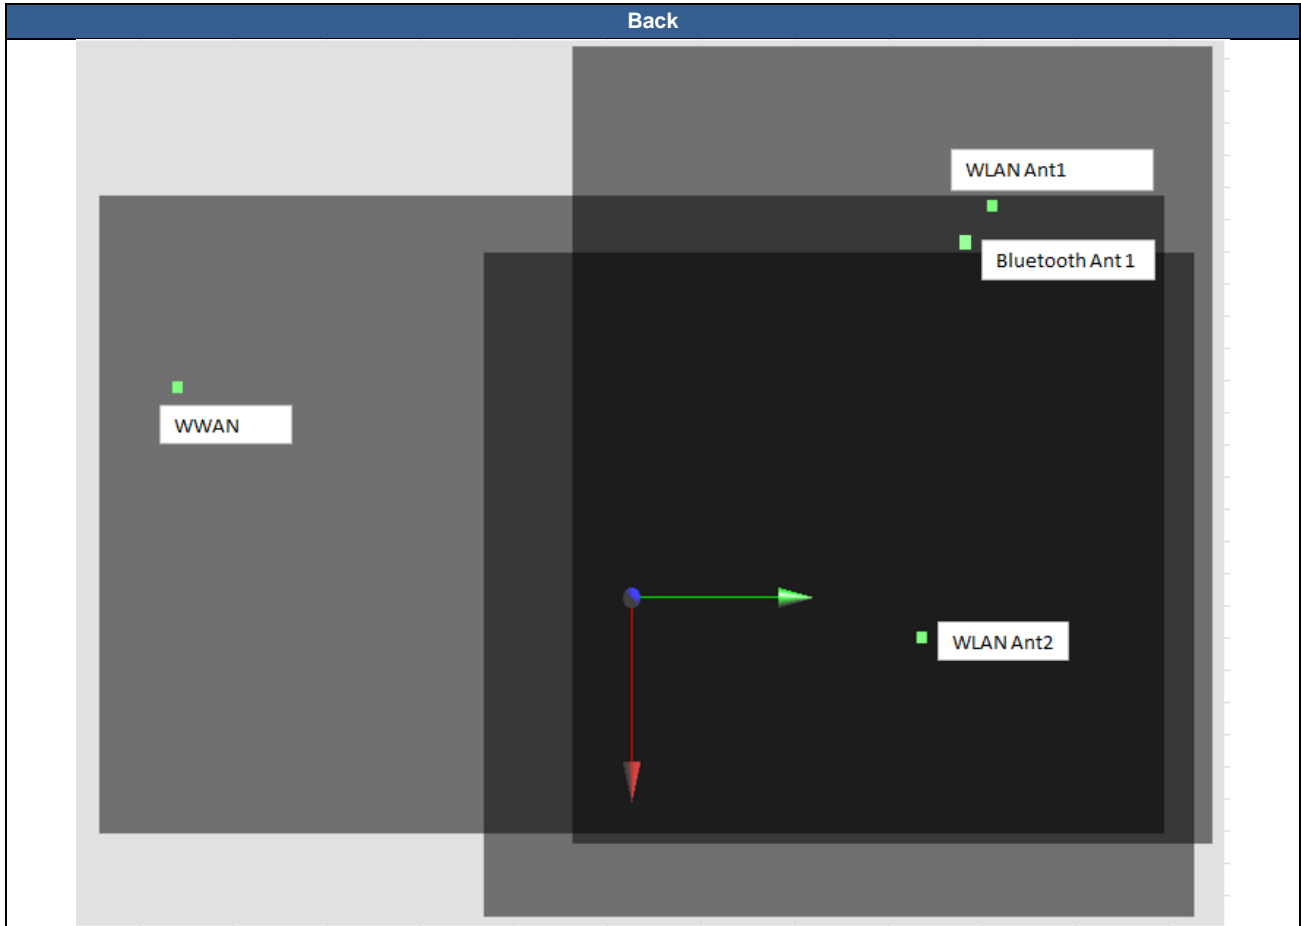

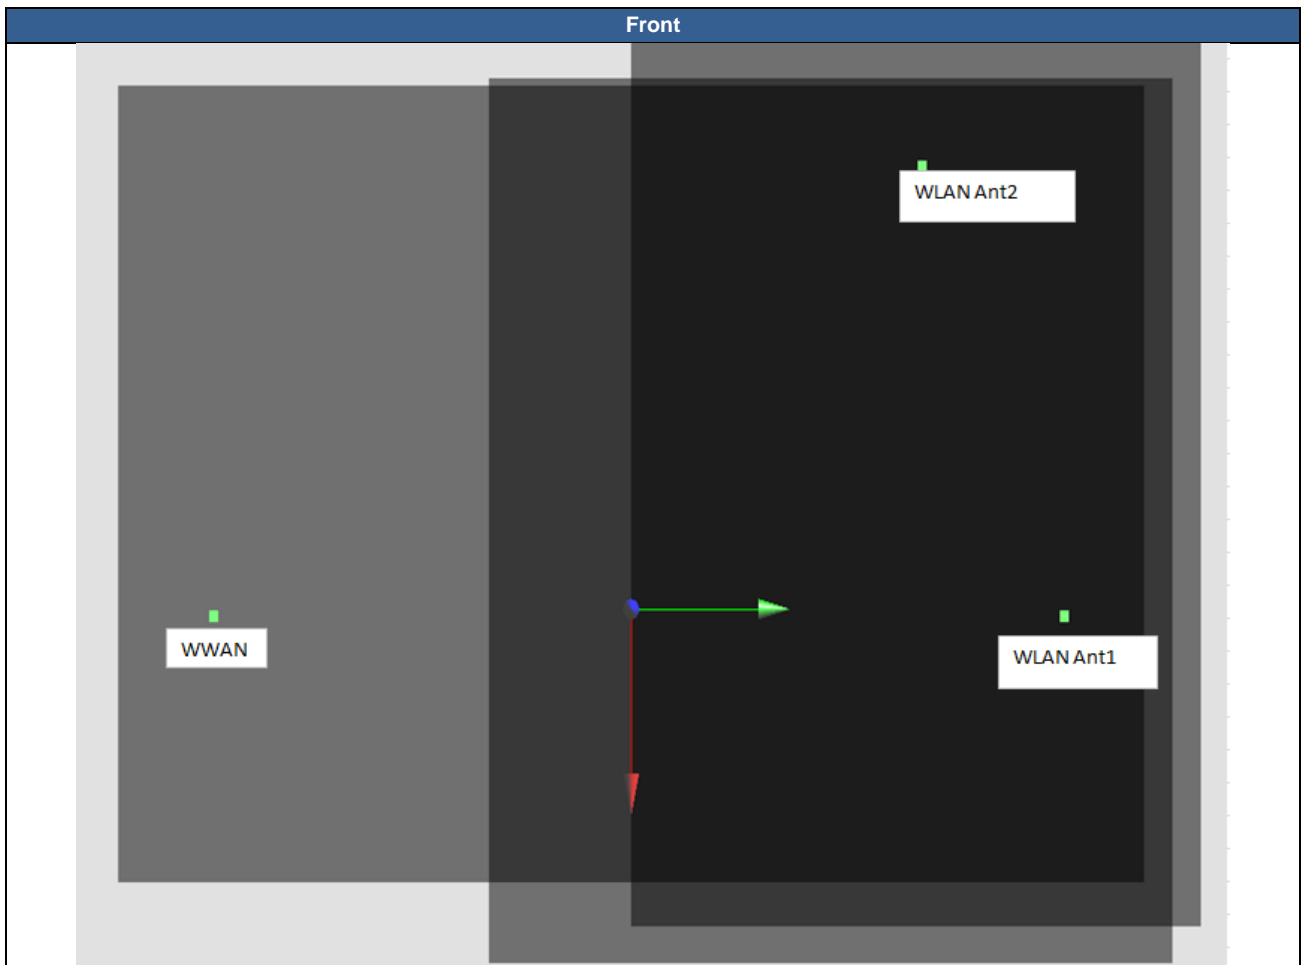

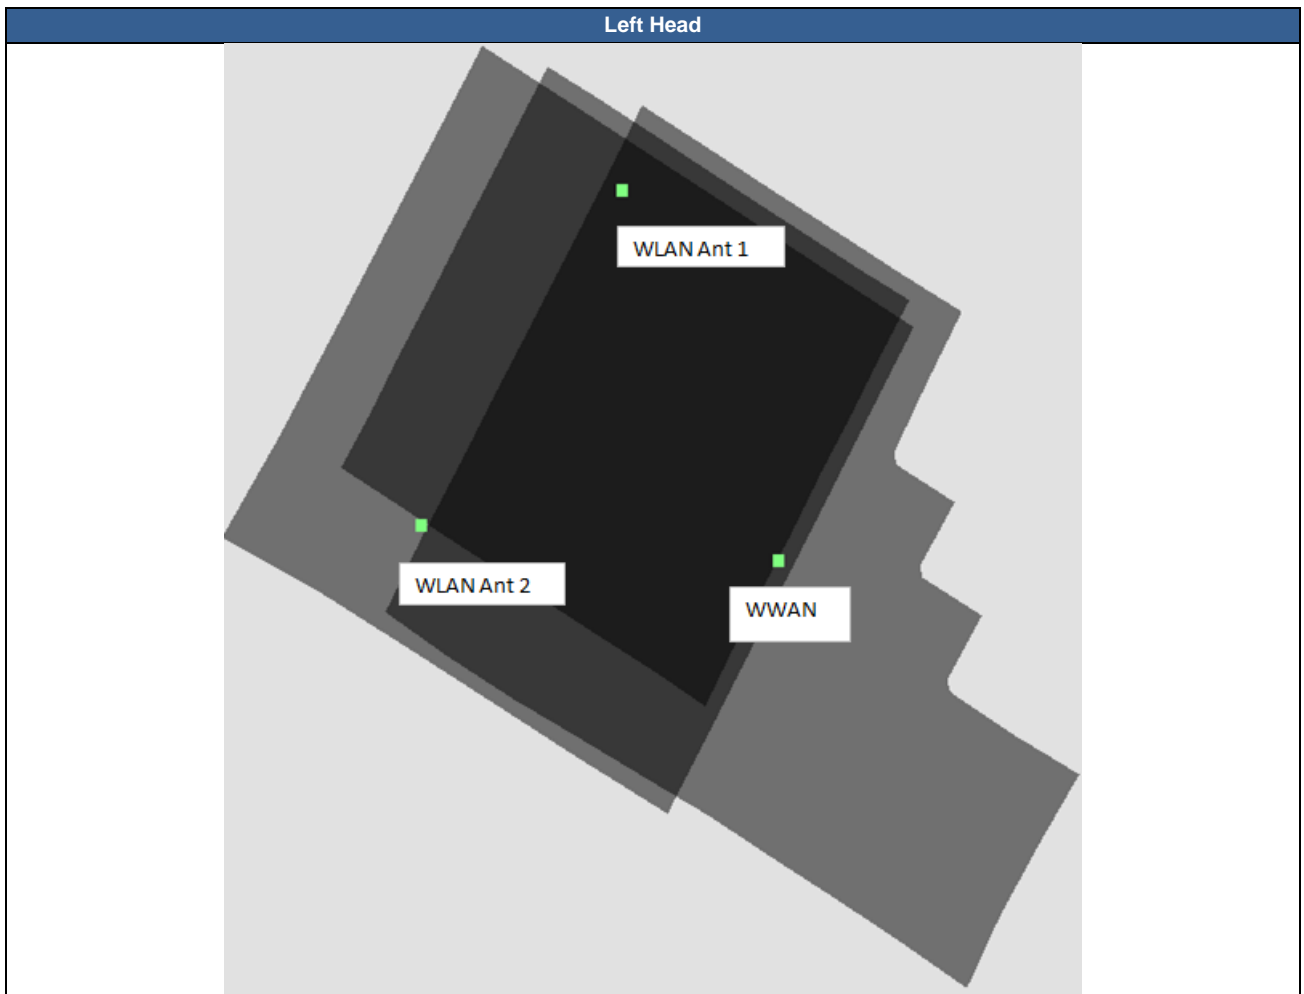

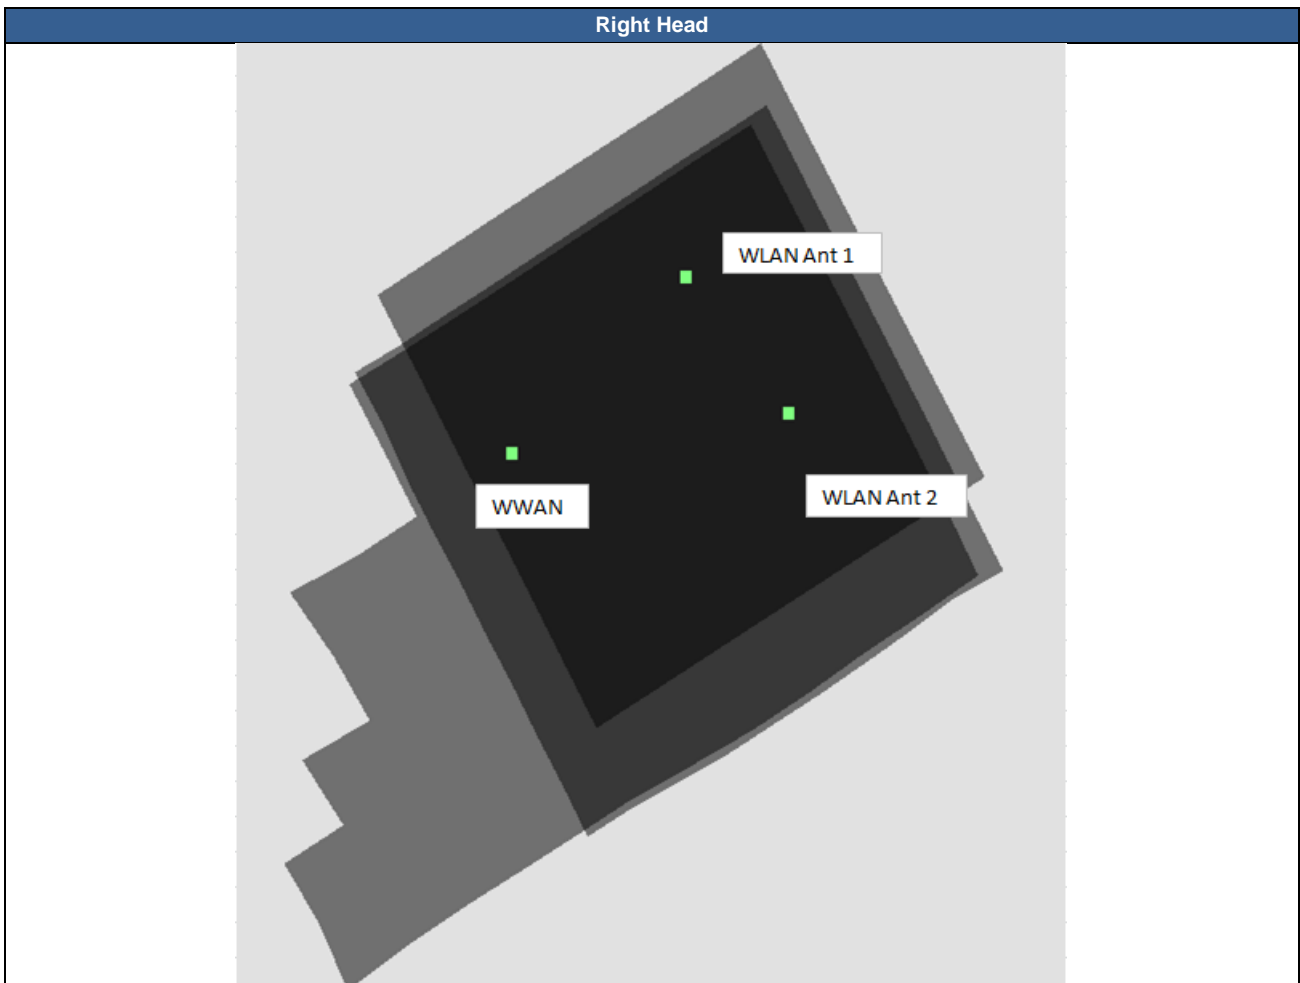

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	GSM850	Left Cheek	0.421	0	54.52	-44.13	-1.04	79.8	1.69	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	GSM850	Left Cheek	0.421	0	54.52	-44.13	-1.04	67.7	0.59	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 2	GSM1900	Left Cheek	0.377	0	50.89	-60.71	0.05	94.0	1.64	0.02	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	GSM1900	Left Cheek	0.377	0	50.89	-60.71	0.05	75.7	0.55	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 3	WCDMA II	Left Cheek	0.503	0	48.65	-59.3	-0.55	92.0	1.77	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	WCDMA II	Left Cheek	0.503	0	48.65	-59.3	-0.55	73.1	0.67	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 4	WCDMA IV	Left Cheek	0.493	0	48.26	-59.11	-0.78	91.7	1.76	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	WCDMA IV	Left Cheek	0.493	0	48.26	-59.11	-0.78	72.7	0.66	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 5	WCDMA V	Left Cheek	0.233	0	51.78	-41.44	-1.67	76.2	1.50	0.02	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	WCDMA V	Left Cheek	0.233	0	51.78	-41.44	-1.67	63.9	0.40	0.00	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 6	LTE Band 2	Left Cheek	0.479	0	46.13	-59.72	-0.9	91.7	1.74	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 2	Left Cheek	0.479	0	46.13	-59.72	-0.9	71.8	0.65	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 7	LTE Band 4	Left Cheek	0.45	0	46.59	-59.78	-0.88	91.8	1.72	0.02	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 4	Left Cheek	0.45	0	46.59	-59.78	-0.88	72.1	0.62	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					WLAN2.4G Ant 2	0	-1.24				
Case 8	LTE B5	Left Cheek	0.375	0	53.29	-39.75	-1.34	75.3	1.64	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE B5	Left Cheek	0.375	0	53.29	-39.75	-1.34	64.3	0.54	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 9	LTE Band 7	Left Cheek	0.536	0	42.75	-58.24	-1.09	89.4	1.80	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 7	Left Cheek	0.536	0	42.75	-58.24	-1.09	68.4	0.71	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 11	LTE Band 41	Left Cheek	0.539	0	44.38	-57.05	-1.22	88.6	1.80	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 41	Left Cheek	0.539	0	44.38	-57.05	-1.22	68.6	0.71	0.01	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	41.6	1.43	0.04	Not required
	WLAN2.4G Ant 2		0.169	0	-1.24	-5.87	1.4				
Case 12	GSM850	Left Cheek	0.421	0	54.52	-44.13	-1.04	85.8	1.65	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	GSM850	Left Cheek	0.421	0	54.52	-44.13	-1.04	73.8	0.58	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 13	GSM1900	Left Cheek	0.377	0	50.89	-60.71	0.05	99.1	1.61	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	GSM1900	Left Cheek	0.377	0	50.89	-60.71	0.05	75.5	0.54	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 14	WCDMA II	Left Cheek	0.503	0	48.65	-59.3	-0.55	96.9	1.73	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	WCDMA II	Left Cheek	0.503	0	48.65	-59.3	-0.55	72.9	0.66	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 15	WCDMA IV	Left Cheek	0.493	0	48.26	-59.11	-0.78	96.6	1.72	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	WCDMA IV	Left Cheek	0.493	0	48.26	-59.11	-0.78	72.5	0.65	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required



**FCC SAR TEST REPORT**

Report No. : FA070405

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 16											
	WCDMA V	Left Cheek	0.233	0	51.78	-41.44	-1.67	82.2	1.46	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	WCDMA V	Left Cheek	0.233	0	51.78	-41.44	-1.67	70.7	0.39	0.00	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
WLAN5G Ant 2	0.16		0	-17.25	-29.08	7.21					
Case 17											
	LTE Band 2	Right Cheek	0.599	0	57.92	5.48	-0.84	78.5	1.28	0.02	Not required
	WLAN5G Ant 1		0.683	0	-18.16	23.55	6.42				
	LTE Band 2	Right Cheek	0.599	0	57.92	5.48	-0.84	48.1	0.99	0.02	Not required
	WLAN5G Ant 2		0.391	0	23.03	-27.56	-0.75				
	WLAN5G Ant 1	Right Cheek	0.683	0	-18.16	23.55	6.42	66.0	1.07	0.02	Not required
WLAN5G Ant 2	0.391		0	23.03	-27.56	-0.75					
Case 18											
	LTE Band 2	Left Cheek	0.479	0	46.13	-59.72	-0.9	96.3	1.71	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	LTE Band 2	Left Cheek	0.479	0	46.13	-59.72	-0.9	70.9	0.64	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
WLAN5G Ant 2	0.16		0	-17.25	-29.08	7.21					
Case 19											
	LTE Band 4	Left Cheek	0.45	0	46.59	-59.78	-0.88	96.6	1.68	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	LTE Band 4	Left Cheek	0.45	0	46.59	-59.78	-0.88	71.3	0.61	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
WLAN5G Ant 2	0.16		0	-17.25	-29.08	7.21					
Case 20											
	LTE B5	Left Cheek	0.375	0	53.29	-39.75	-1.34	81.4	1.60	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	LTE B5	Left Cheek	0.375	0	53.29	-39.75	-1.34	71.9	0.54	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
WLAN5G Ant 2	0.16		0	-17.25	-29.08	7.21					
Case 21											
	LTE Band 7	Left Cheek	0.536	0	42.75	-58.24	-1.09	93.8	1.76	0.02	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	LTE Band 7	Left Cheek	0.536	0	42.75	-58.24	-1.09	67.2	0.70	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required
WLAN5G Ant 2	0.16		0	-17.25	-29.08	7.21					
Case 23											
	LTE Band 41	Left Cheek	0.539	0	44.38	-57.05	-1.22	93.2	1.77	0.03	Not required
	WLAN5G Ant 1		1.228	0	11.62	30.22	-0.73				
	LTE Band 41	Left Cheek	0.539	0	44.38	-57.05	-1.22	68.2	0.70	0.01	Not required
	WLAN2.4G Ant 2		0.16	0	-17.25	-29.08	7.21				
WLAN5G Ant 1	Left Cheek	1.228	0	11.62	30.22	-0.73	66.4	1.39	0.02	Not required	



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					Band	Position	SAR (W/kg)				
Case 24	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	GSM850	Left Cheek	0.421	0	54.52	-44.13	-1.04	79.8	1.69	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	GSM850	Left Cheek	0.421	0	54.52	-44.13	-1.04	73.8	0.58	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
WLAN5G Ant 2	0.16		0	-17.25	-29.08	7.21					
Case 25	GSM1900	Left Cheek	0.377	0	50.89	-60.71	0.05	94.0	1.64	0.02	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	GSM1900	Left Cheek	0.377	0	50.89	-60.71	0.05	75.5	0.54	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 26	WCDMA II	Left Cheek	0.503	0	48.65	-59.3	-0.55	92.0	1.77	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	WCDMA II	Left Cheek	0.503	0	48.65	-59.3	-0.55	72.9	0.66	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 27	WCDMA IV	Left Cheek	0.493	0	48.26	-59.11	-0.78	91.7	1.76	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	WCDMA IV	Left Cheek	0.493	0	48.26	-59.11	-0.78	72.5	0.65	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 28	WCDMA V	Left Cheek	0.233	0	51.78	-41.44	-1.67	76.2	1.50	0.02	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	WCDMA V	Left Cheek	0.233	0	51.78	-41.44	-1.67	70.7	0.39	0.00	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 29	LTE Band 2	Left Cheek	0.479	0	46.13	-59.72	-0.9	91.7	1.74	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 2	Left Cheek	0.479	0	46.13	-59.72	-0.9	70.9	0.64	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 30	LTE Band 4	Left Cheek	0.45	0	46.59	-59.78	-0.88	91.8	1.72	0.02	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 4	Left Cheek	0.45	0	46.59	-59.78	-0.88	71.3	0.61	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required





Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
					SAR peak location (mm)						
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 31	LTE B5	Left Cheek	0.375	0	53.29	-39.75	-1.34	75.3	1.64	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE B5	Left Cheek	0.375	0	53.29	-39.75	-1.34	71.9	0.54	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 32	LTE Band 7	Left Cheek	0.536	0	42.75	-58.24	-1.09	89.4	1.80	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 7	Left Cheek	0.536	0	42.75	-58.24	-1.09	67.2	0.70	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 34	LTE Band 41	Left Cheek	0.539	0	44.38	-57.05	-1.22	88.6	1.80	0.03	Not required
	WLAN2.4G Ant 1		1.265	0	21.85	28.67	-0.14				
	LTE Band 41	Left Cheek	0.539	0	44.38	-57.05	-1.22	68.2	0.70	0.01	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
	WLAN2.4G Ant 1	Left Cheek	1.265	0	21.85	28.67	-0.14	70.1	1.43	0.02	Not required
	WLAN5G Ant 2		0.16	0	-17.25	-29.08	7.21				
Case 35	LTE Band 7	Front	1.22	10	19.98	-71.19	-0.3	143.2	1.47	0.01	Not required
	WLAN5G Ant 1		0.253	10	18	72	-0.74				
	LTE Band 7	Front	1.22	10	19.98	-71.19	-0.3	132.9	1.42	0.01	Not required
	WLAN5G Ant 2		0.198	10	-39	47.83	-2.78				
	WLAN5G Ant 1	Front	0.253	10	18	72	-0.74	61.9	0.45	0.00	Not required
	WLAN5G Ant 2		0.198	10	-39	47.83	-2.78				
Case 36	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	137.7	1.45	0.01	Not required
	WLAN2.4G Ant 1		0.115	10	-41.06	60.8	-0.66				
	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	130.5	1.55	0.01	Not required
	WLAN2.4G Ant 2		0.21	10	16.61	53.6	-0.56				
	WLAN2.4G Ant 1	Back	0.115	10	-41.06	60.8	-0.66	58.1	0.33	0.00	Not required
	WLAN2.4G Ant 2		0.21	10	16.61	53.6	-0.56				
Case 37	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	143.4	1.57	0.01	Not required
	WLAN5G Ant 1		0.234	10	-33	68	-1.01				
	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	130.6	1.82	0.02	Not required
	WLAN5G Ant 2		0.489	10	29.8	50	-0.75				
	WLAN5G Ant 1	Back	0.234	10	-33	68	-1.01	65.3	0.72	0.01	Not required
	WLAN5G Ant 2		0.489	10	29.8	50	-0.75				
Case 38	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	137.7	1.45	0.01	Not required
	WLAN2.4G Ant 1		0.115	10	-41.06	60.8	-0.66				
	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	130.6	1.82	0.02	Not required
	WLAN5G Ant 2		0.489	10	29.8	50	-0.75				
	WLAN2.4G Ant 1	Back	0.115	10	-41.06	60.8	-0.66	71.7	0.60	0.01	Not required



Case 39	WLAN5G Ant 2		0.489	10	29.8	50	-0.75				
	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	130.6	1.82	0.02	Not required
	WLAN5G Ant 2		0.489	10	29.8	50	-0.75				
	LTE Band 7	Back	1.335	10	-11.73	-73.78	-0.42	135.2	1.34	0.01	Not required
	Bluetooth Ant 1		0.001	10	-32.8	59.8	-1.32				
	WLAN5G Ant 2	Back	0.489	10	29.8	50	-0.75	63.4	0.49	0.01	Not required
	Bluetooth Ant 1		0.001	10	-32.8	59.8	-1.32				



16. Supplemental Antenna tuner tests results

General Note:

- 1. This device implements aperture tuner (6 status) \* impedance tuner (96 status) techniques in the GSM850, UMTS B5 and LTE B5. SAR test proposal was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing and this design will provide the highest power at different user scenarios and would not influence to the antenna characteristics other than impedance matching.
2. SAR test proposal was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing and this design will provide the highest power at different user scenarios and would not influence to the antenna characteristics other than impedance matching.
3. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values.
4. To evaluate all of the tuner states, the 96 tuner states are divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
5. The tuner state was established remotely through Wi-Fi so that the device is not moved for the entire series of single point SAR for the tuner states in each combination (band, mode, exposure conditions).

<Aperture tuner configuration>

Table with 6 columns: LTE, Aperture tuner configuration, WCDMA, Aperture tuner configuration, WCDMA, Aperture tuner configuration. Rows include B5, B8, B17, B19, B20, B28.

**<Aperture tuner 0>**

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									Auto-Tune (State 47)	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48		
LTE Band 17_Ant 0	QPSK	710	23790	1	0	Left Cheek	0 mm	0.431	0.466	0.051	0.152	0.171	0.126	0.218	0.093	0.055	0.251	0.318	0.272	0.247	0.109	0.056	0.077	0.161	0.171	0.141	0.221	0.191	0.151	0.161	0.191	0.231	0.241	0.141		
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
LTE Band 17_Ant 0	QPSK	710	23790	1	0	Soft Holster + Rigid Holster	0 mm	0.533	0.559	0.244	0.093	0.145	0.205	0.182	0.199	0.299	0.308	0.139	0.156	0.155	0.102	0.245	0.139	0.139	0.203	0.274	0.033	0.165	0.235	0.182	0.209	0.259	0.378	0.099		

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	96				
LTE Band 17_Ant 0	QPSK	710	23790	1	0	Left Cheek	0 mm	0.431	0.141	0.161	0.191	0.241	0.231	0.191	0.161	0.151	0.161	0.201	0.201	0.161	0.211	0.231	0.241	0.181	0.231	0.231	0.171	0.151	0.171	0.221	0.151	0.014				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
LTE Band 17_Ant 0	QPSK	710	23790	1	0	Soft Holster + Rigid Holster	0 mm	0.533	0.086	0.155	0.102	0.215	0.209	0.069	0.113	0.151	0.221	0.141	0.141	0.191	0.191	0.221	0.181	0.191	0.161	0.191	0.151	0.221	0.211	0.211	0.241	-				

**<Aperture tuner 1>**

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
									Auto-Tune (State 23)	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96										
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Left Cheek	0 mm	0.296	0.326	0.041	0.075	0.156	0.055	0.022	0.141	0.234	0.196	0.272	0.065	0.016	0.022	0.092	0.051	0.099	0.131	0.131										
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Right Cheek	0 mm	0.299	0.311	0.055	0.091	0.192	0.045	0.149	0.122	0.199	0.165	0.269	0.181	0.098	0.168	0.049	0.065	0.099	0.132	-										
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Left Cheek	0 mm	0.289	0.305	0.114	0.063	0.085	0.135	0.062	0.079	0.209	0.308	0.039	0.096	0.115	0.072	0.115	0.079	0.039	0.133	-										
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Back	10mm	0.559	0.596	0.054	0.115	0.075	0.065	0.042	0.079	0.179	0.268	0.039	0.056	0.105	0.002	0.055	0.019	0.125	0.083	-										
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Back	10 mm	0.402	0.411	0.154	0.099	0.075	0.005	0.132	0.079	0.139	0.178	0.112	0.036	0.015	0.088	0.096	0.144	0.152	0.188	-										
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																											
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Back Soft Holster + Rigid Holster	0 mm	0.351	0.366	0.122	0.132	0.055	0.005	0.111	0.029	0.059	0.098	0.055	0.026	0.12	0.114	0.126	0.147	0.199	0.221	-										



<Aperture tuner 2>

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
									Auto-Tune (State 23)	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Left Cheek	0 mm	0.296	0.326	0.151	0.185	0.266	0.115	0.142	0.261	0.294	0.296	0.342	0.085	0.076	0.112	0.112	0.171	0.139	0.181	0.221
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Right Cheek	0 mm	0.299	0.311	0.105	0.141	0.212	0.155	0.239	0.242	0.239	0.265	0.389	0.281	0.178	0.258	0.159	0.165	0.189	0.242	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Left Cheek	0 mm	0.289	0.305	0.234	0.083	0.145	0.225	0.172	0.179	0.299	0.368	0.149	0.146	0.175	0.102	0.225	0.199	0.129	0.163	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Back	10mm	0.559	0.596	0.074	0.225	0.185	0.185	0.162	0.139	0.229	0.288	0.139	0.146	0.215	0.092	0.175	0.049	0.155	0.163	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Back	10 mm	0.402	0.411	0.224	0.189	0.135	0.065	0.182	0.099	0.209	0.228	0.182	0.116	0.065	0.188	0.166	0.194	0.252	0.238	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Back Soft Holster + Rigid Holster	0 mm	0.351	0.366	0.242	0.232	0.105	0.035	0.151	0.059	0.159	0.188	0.165	0.076	0.16	0.194	0.196	0.167	0.219	0.321	-

<Aperture tuner 3>

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
									Auto-Tune (State 23)	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Left Cheek	0 mm	0.296	0.326	0.031	0.065	0.146	0.045	0.012	0.131	0.224	0.186	0.262	0.055	0.006	0.012	0.082	0.041	0.089	0.121	0.121
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Right Cheek	0 mm	0.299	0.311	0.045	0.081	0.182	0.035	0.139	0.112	0.189	0.155	0.259	0.171	0.088	0.158	0.039	0.055	0.089	0.122	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Left Cheek	0 mm	0.289	0.305	0.104	0.053	0.075	0.125	0.052	0.069	0.199	0.298	0.029	0.086	0.105	0.062	0.105	0.069	0.029	0.123	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Back	10mm	0.559	0.596	0.054	0.115	0.075	0.065	0.042	0.079	0.179	0.268	0.039	0.056	0.105	0.002	0.055	0.019	0.125	0.083	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Back	10 mm	0.402	0.411	0.044	0.105	0.065	0.055	0.032	0.069	0.169	0.258	0.029	0.046	0.095	-0.008	0.045	0.009	0.115	0.073	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Back Soft Holster + Rigid Holster	0 mm	0.351	0.366	0.112	0.122	0.045	-0.005	0.101	0.019	0.049	0.088	0.045	0.016	0.11	0.104	0.116	0.137	0.189	0.211	-



<Aperture tuner 4>

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
									Auto-Tune (State 23)	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Left Cheek	0 mm	0.296	0.326	0.141	0.185	0.186	0.095	0.102	0.211	0.294	0.306	0.332	0.125	0.066	0.092	0.142	0.091	0.119	0.241	0.211
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Right Cheek	0 mm	0.299	0.311	0.125	0.181	0.212	0.055	0.189	0.162	0.239	0.235	0.379	0.281	0.158	0.268	0.099	0.085	0.189	0.152	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Left Cheek	0 mm	0.289	0.305	0.124	0.073	0.145	0.165	0.092	0.139	0.259	0.358	0.049	0.126	0.175	0.122	0.185	0.159	0.109	0.213	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Back	10mm	0.559	0.596	0.164	0.215	0.105	0.125	0.132	0.159	0.219	0.308	0.109	0.096	0.115	0.072	0.065	0.099	0.135	0.143	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Back	10 mm	0.402	0.411	0.194	0.119	0.105	0.045	0.232	0.169	0.239	0.238	0.122	0.126	0.025	0.148	0.136	0.254	0.232	0.278	-
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Back Soft Holster + Rigid Holster	0 mm	0.351	0.366	0.232	0.232	0.105	0.075	0.131	0.129	0.109	0.198	0.095	0.056	0.22	0.154	0.146	0.217	0.279	0.271	-

<Aperture tuner 6>

Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
									Auto-Tune (State 23)	0	8	16	24	32	40	48	56	64	72	80	88	96				
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Left Cheek	0 mm	0.296	0.326	0.132	0.155	0.176	0.105	-0.008	0.201	0.244	0.236	0.312	0.105	0.066	0.095	0.162				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Right Cheek	0 mm	0.299	0.311	0.126	0.151	0.162	0.105	0.249	0.096	0.032	0.305	0.259	0.241	0.178	0.142	-				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Left Cheek	0 mm	0.289	0.305	0.112	0.133	0.235	0.215	0.042	0.059	0.309	0.338	0.129	0.088	0.021	0.172	-				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 17_Ant 0	QPSK	710	23790	1	0	Left Cheek	0 mm	0.431	0.305	0.112	0.083	0.225	0.285	0.122	0.129	0.269	0.378	0.059	0.058	0.011	0.102	-				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
GSM 850_Ant 0	GPRS (4 Tx slots)	836.4	189	N/A	N/A	Back	10mm	0.559	0.596	0.187	0.306	0.373	0.16	0.077	0.371	0.465	0.533	0.547	0.175	0.25	0.243	-				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
WCDMA B5_Ant 0	RMC12.2K	836.4	4182	N/A	N/A	Back	10 mm	0.402	0.411	0.065	0.184	0.301	0.298	0.159	0.102	0.229	0.146	0.161	0.044	0.019	0.143	-				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 5_Ant 0	QPSK	836.5	20525	1	0	Back Soft Holster + Rigid Holster	0 mm	0.351	0.366	0.081	0.132	0.281	0.116	0.258	0.043	0.035	0.271	0.308	0.232	0.257	0.139	-				
Mode	Service/Modulation	Frequency (MHz)	Channel	RB Size	RB Offset	Test Position	Spacing	Measured 1g SAR (W/kg)	Average Value of Time Sweep (W/kg)																	
LTE Band 17_Ant 0	QPSK	710	23790	1	0	Soft Holster + Rigid Holster	0 mm	0.533	0.366	0.129	0.172	0.211	0.186	0.278	0.073	0.085	0.321	0.298	0.292	0.247	0.079	-				

Test Engineer : Jimmy Lu, Brian Wang and Bob Cheng



## **17. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.