



FCC RF Test Report

FCC ID : UZ7EM45A2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H), 27(F)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
Test Date(s) : Jun. 26, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Test Software.....	7
1.6 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Frequency List of Low/Middle/High Channels	10
3 RADIATED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Radiated Test	14
3.4 Radiated Spurious Emission	15
4 LIST OF MEASURING EQUIPMENT	17
5 MEASUREMENT UNCERTAINTY	18
APPENDIX A. TEST RESULTS OF RADIATED TEST	1



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460505J	Rev. 01	Initial issue of report	Sep. 05, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(f) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 66)	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 16.52 dB at 1564.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	$< 55 + 10\log_{10}(P[\text{Watts}])$		

Remark: The conducted test items of inter band CA were cover by LTE single carrier due to the CA power is reduced according to 3GPP MPR.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A2
FCC ID	UZ7EM45A2
IMEI Code	Radiation: 352991990029096/352991990029708
HW Version	EV2.5
SW Version	13-32-08.00-TG-U06-STD-ATH-04
MFD	08AUG24
EUT Stage	Identical Prototype

Specification of Accessory			
Battery	Brand Name	Zebra	Model
			BT-000501
			Part Number
			BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification					
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz				
	LTE Band 4 : 1710 MHz ~ 1755 MHz				
	LTE Band 5 : 824 MHz ~ 849 MHz				
	LTE Band 7 : 2500 MHz ~ 2570 MHz				
	LTE Band 12 : 699 MHz ~ 716 MHz				
	LTE Band 13 : 777 MHz ~ 787 MHz				
	LTE Band 66 : 1710 MHz ~ 1780 MHz				
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz				
	LTE Band 4 : 2110 MHz ~ 2155 MHz				
	LTE Band 5 : 869 MHz ~ 894 MHz				
	LTE Band 7 : 2620 MHz ~ 2690 MHz				
	LTE Band 12 : 729 MHz ~ 746 MHz				
	LTE Band 13 : 746 MHz ~ 756 MHz				
	LTE Band 66 : 2110 MHz ~ 2200 MHz				
Uplink CA Bands	2A-4A	2A-12A	4A-5A	4A-13A	12A-66A
	2A-5A	2A-13A	4A-7A	5A-7A	13A-66A
	2A-7A	2A-66A	4A-12A	5A-66A	
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM				

Note: For all uplink inter-band CA combinations, only the worst combinations were tested and recorded in the report.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone		
	Jiangsu Province 215300 People's Republic of China		
	TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	210616

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H), 27(F)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X/Y-Plane)

	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Test Items	2A-12A	Worst Case													v	v	v
	2A-13A	Worst Case													v	v	v
	2A-4A	Worst Case													v	v	v
	2A-5A	Worst Case													v	v	v
	2A-7A	Worst Case													v	v	v
	2A-66A	Worst Case													v	v	v
	4A-12A	Worst Case													v	v	v
	4A-13A	Worst Case													v	v	v
	4A-5A	Worst Case													v	v	v
	4A-7A	Worst Case													v	v	v
	5A-7A	Worst Case													v	v	v
	5A-66A	Worst Case													v	v	v
	12A-66A	Worst Case													v	v	v
	13A-66A	Worst Case													v	v	v
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

2.2 Connection Diagram of Test System

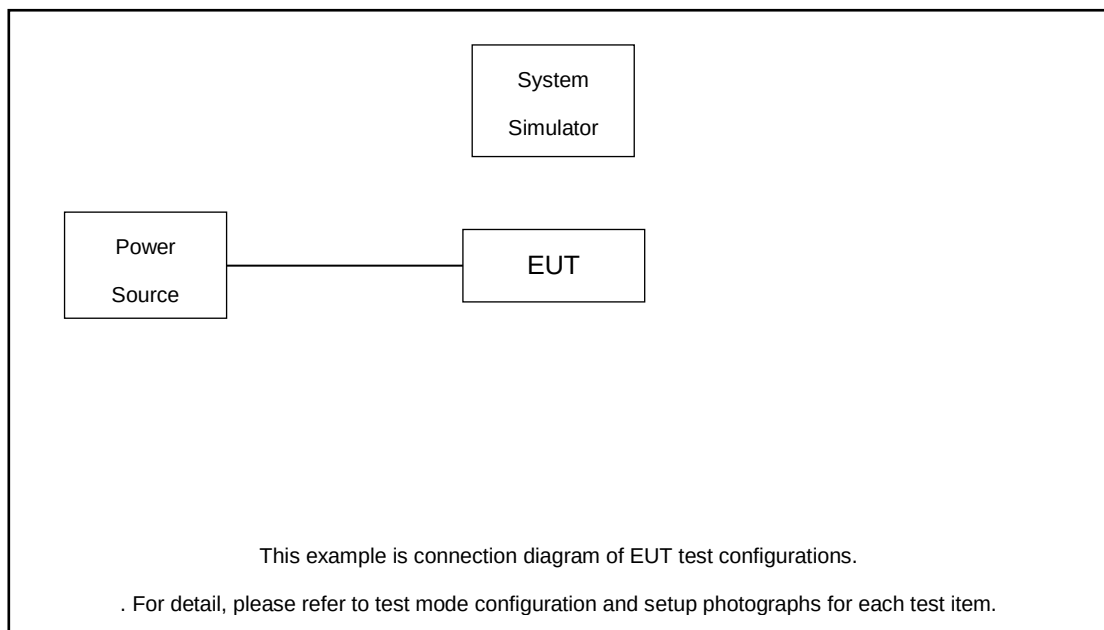

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m



2.4 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3



LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 For radiated test below 30MHz

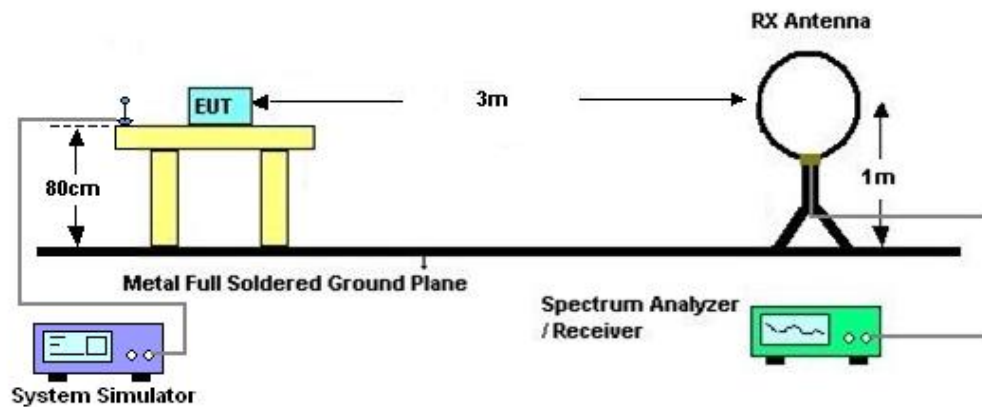

3.2.2 For radiated test from 30MHz to 1GHz

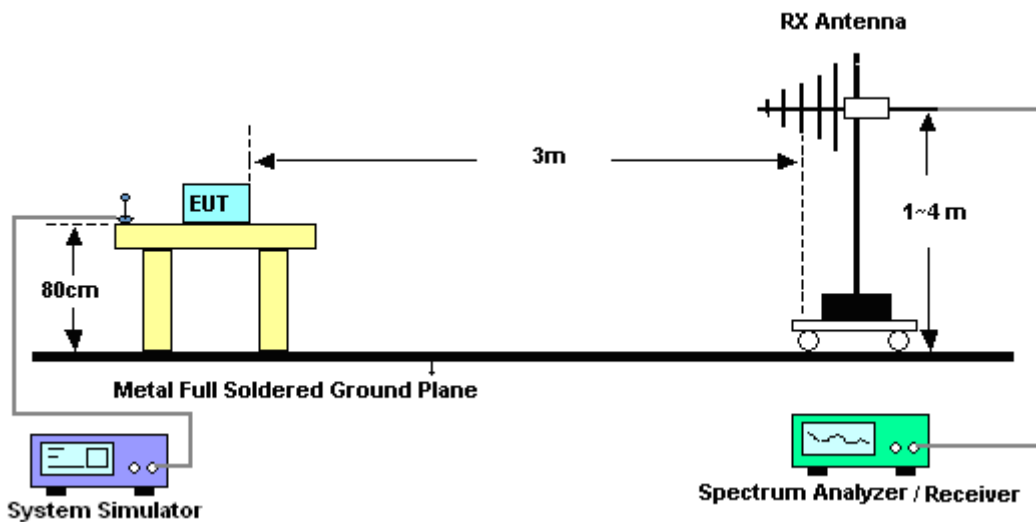

3.2.3 For radiated test above 1GHz

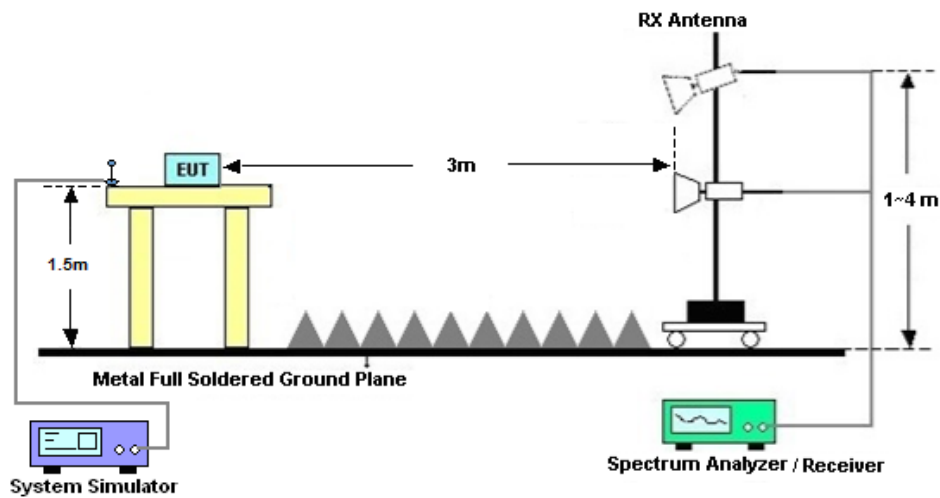

3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix A.



3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

For LTE Band 2, 4, 5, 12 , 66

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For Band 2, 4, 5, 12, 13, 66

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
= -13dBm.

For Band 7

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2023	Jun. 26, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jun. 26, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 19, 2023	Jun. 26, 2024	Aug. 18, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 12, 2023	Jun. 26, 2024	Jul. 11, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	Jun. 26, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul. 06, 2023	Jun. 26, 2024	Jul. 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2024	Jun. 26, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 10, 2023	Jun. 26, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 10, 2023	Jun. 26, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 26, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 26, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 26, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Bruce	Temperature :	23~25°C
		Relative Humidity :	41~42%

ULCA 2A-12A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.57	-13	-42.57	-67.83	2.64	14.90	H
	5550	-54.67	-13	-41.67	-66.53	2.94	14.80	H
	7410	-53.83	-13	-40.83	-63.60	3.39	13.16	H
	3705	-55.46	-13	-42.46	-67.72	2.64	14.90	V
	5550	-54.72	-13	-41.72	-66.58	2.94	14.80	V
	7410	-53.69	-13	-40.69	-63.46	3.39	13.16	V
LTE B12 BW 10MHz Lowest 1RB0,QPSK	1400	-59.72	-13	-46.72	-66.69	1.58	10.70	H
	2098	-62.29	-13	-49.29	-70.54	2.102	12.50	H
	2798	-58.39	-13	-45.39	-67.28	2.856	13.90	H
	1400	-60.77	-13	-47.77	-67.74	1.58	10.70	V
	2098	-61.73	-13	-48.73	-69.98	2.10	12.50	V
	2798	-58.19	-13	-45.19	-67.08	2.86	13.90	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.52	-13	-42.52	-67.78	2.64	14.90	H
	5610	-54.30	-13	-41.30	-66.16	2.94	14.80	H
	7485	-52.48	-13	-39.48	-62.25	3.39	13.16	H
	3735	-55.26	-13	-42.26	-67.52	2.64	14.90	V
	5610	-53.09	-13	-40.09	-64.95	2.94	14.80	V
	7485	-53.63	-13	-40.63	-63.40	3.39	13.16	V
LTE B12 BW 10MHz Middle 1RB0,QPSK	1406	-56.79	-13	-43.79	-63.76	1.58	10.70	H
	2110	-52.68	-13	-39.68	-60.93	2.102	12.50	H
	2812	-56.27	-13	-43.27	-65.16	2.856	13.90	H
	1406	-58.15	-13	-45.15	-65.12	1.58	10.70	V
	2110	-55.25	-13	-42.25	-63.50	2.10	12.50	V
	2812	-56.00	-13	-43.00	-64.89	2.86	13.90	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-54.87	-13	-41.87	-67.13	2.64	14.90	H
	5670	-54.54	-13	-41.54	-66.40	2.94	14.80	H
	7560	-53.39	-13	-40.39	-63.16	3.39	13.16	H
	3780	-55.08	-13	-42.08	-67.34	2.64	14.90	V
	5670	-53.38	-13	-40.38	-65.24	2.94	14.80	V
	7560	-52.95	-13	-39.95	-62.72	3.39	13.16	V
LTE B12 BW 10MHz Highest 1RB0,QPSK	1414	-62.35	-13	-49.35	-69.32	1.58	10.70	H
	2120	-54.12	-13	-41.12	-62.37	2.102	12.50	H
	2826	-58.28	-13	-45.28	-67.17	2.856	13.90	H
	1414	-62.22	-13	-49.22	-69.19	1.58	10.70	V
	2120	-59.86	-13	-46.86	-68.11	2.10	12.50	V
	2826	-58.17	-13	-45.17	-67.06	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-13A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.29	-13	-42.29	-67.55	2.64	14.90	H
	5550	-54.78	-13	-41.78	-66.64	2.94	14.80	H
	7410	-53.85	-13	-40.85	-63.62	3.39	13.16	H
	3705	-54.94	-13	-41.94	-67.20	2.64	14.90	V
	5550	-52.63	-13	-39.63	-64.49	2.94	14.80	V
	7410	-54.16	-13	-41.16	-63.93	3.39	13.16	V
LTE B13 BW 10MHz Lowest 1RB0,QPSK	1554	-59.75	-13	-46.75	-62.38	1.09	5.87	H
	2332	-55.30	-13	-42.30	-57.70	1.37	5.92	H
	3105	-57.16	-13	-44.16	-61.05	1.64	7.68	H
	1554	-61.92	-13	-48.92	-64.55	1.09	5.87	V
	2332	-56.03	-13	-43.03	-58.43	1.37	5.92	V
	3105	-57.06	-13	-44.06	-60.95	1.64	7.68	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.46	-13	-42.46	-67.72	2.64	14.90	H
	5610	-55.16	-13	-42.16	-67.02	2.94	14.80	H
	7485	-53.43	-13	-40.43	-63.20	3.39	13.16	H
	3735	-55.98	-13	-42.98	-68.24	2.64	14.90	V
	5610	-54.63	-13	-41.63	-66.49	2.94	14.80	V
	7485	-53.31	-13	-40.31	-63.08	3.39	13.16	V
LTE B13 BW 10MHz Middle 1RB0,QPSK	1560	-61.47	-42.15	-19.32	-64.10	1.09	5.87	H
	2340	-55.45	-13	-42.45	-57.85	1.37	5.92	H
	3120	-57.35	-13	-44.35	-61.24	1.64	7.68	H
	1560	-62.17	-42.15	-20.02	-64.80	1.09	5.87	V
	2340	-55.77	-13	-42.77	-58.17	1.37	5.92	V
	3120	-57.38	-13	-44.38	-61.27	1.64	7.68	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.52	-13	-42.52	-67.78	2.64	14.90	H
	5670	-55.22	-13	-42.22	-67.08	2.94	14.80	H
	7560	-53.38	-13	-40.38	-63.15	3.39	13.16	H
	3780	-55.51	-13	-42.51	-67.77	2.64	14.90	V
	5670	-53.98	-13	-40.98	-65.84	2.94	14.80	V
	7560	-53.34	-13	-40.34	-63.11	3.39	13.16	V
LTE B13 BW 10MHz Highest 1RB0,QPSK	1564	-61.67	-42.15	-19.52	-64.30	1.09	5.87	H
	2348	-57.24	-13	-44.24	-59.64	1.37	5.92	H
	3135	-57.68	-13	-44.68	-61.57	1.64	7.68	H
	1564	-62.21	-42.15	-20.06	-64.84	1.09	5.87	V
	2348	-59.04	-13	-46.04	-61.44	1.37	5.92	V
	3135	-57.68	-13	-44.68	-61.57	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA 2A-4A (ANT2+5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.07	-13	-42.07	-67.33	2.64	14.90	H
	5550	-54.47	-13	-41.47	-66.33	2.94	14.80	H
	7410	-53.63	-13	-40.63	-63.40	3.39	13.16	H
	3705	-55.58	-13	-42.58	-67.84	2.64	14.90	V
	5550	-52.47	-13	-39.47	-64.33	2.94	14.80	V
	7410	-53.72	-13	-40.72	-63.49	3.39	13.16	V
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-56.80	-13	-43.80	-67.54	2.604	13.34	H
	5130	-53.63	-13	-40.63	-64.14	3.011	13.52	H
	6840	-54.95	-13	-41.95	-65.15	3.271	13.47	H
	3420	-57.18	-13	-44.18	-67.92	2.604	13.34	V
	5130	-54.05	-13	-41.05	-64.56	3.011	13.52	V
	6840	-55.08	-13	-42.08	-65.28	3.271	13.47	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.34	-13	-42.34	-67.60	2.64	14.90	H
	5610	-54.73	-13	-41.73	-66.59	2.94	14.80	H
	7485	-53.35	-13	-40.35	-63.12	3.39	13.16	H
	3735	-55.74	-13	-42.74	-68.00	2.64	14.90	V
	5610	-54.45	-13	-41.45	-66.31	2.94	14.80	V
	7485	-53.44	-13	-40.44	-63.21	3.39	13.16	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-56.57	-13	-43.57	-67.31	2.604	13.34	H
	5175	-53.88	-13	-40.88	-64.39	3.011	13.52	H
	6900	-54.87	-13	-41.87	-65.07	3.271	13.47	H
	3450	-56.80	-13	-43.80	-67.54	2.604	13.34	V
	5175	-54.08	-13	-41.08	-64.59	3.011	13.52	V
	6900	-54.43	-13	-41.43	-64.63	3.271	13.47	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.70	-13	-42.70	-67.96	2.64	14.90	H
	5670	-54.26	-13	-41.26	-66.12	2.94	14.80	H
	7560	-52.93	-13	-39.93	-62.70	3.39	13.16	H
	3780	-55.38	-13	-42.38	-67.64	2.64	14.90	V
	5670	-55.14	-13	-42.14	-67.00	2.94	14.80	V
	7560	-53.19	-13	-40.19	-62.96	3.39	13.16	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-56.76	-13	-43.76	-67.50	2.604	13.34	H
	5205	-53.97	-13	-40.97	-64.48	3.011	13.52	H
	6945	-55.09	-13	-42.09	-65.29	3.271	13.47	H
	3465	-57.00	-13	-44.00	-67.74	2.604	13.34	V
	5205	-53.22	-13	-40.22	-63.73	3.011	13.52	V
	6945	-54.93	-13	-41.93	-65.13	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-5A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-57.71	-13	-44.71	-69.97	2.64	14.90	H
	5550	-56.83	-13	-43.83	-68.69	2.94	14.80	H
	7410	-56.15	-13	-43.15	-65.92	3.39	13.16	H
	3705	-57.49	-13	-44.49	-69.75	2.64	14.90	V
	5550	-55.86	-13	-42.86	-67.72	2.94	14.80	V
	7410	-56.27	-13	-43.27	-66.04	3.39	13.16	V
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-64.32	-13	-51.32	-71.29	1.58	10.70	H
	2474	-58.97	-13	-45.97	-67.22	2.102	12.50	H
	3300	-59.05	-13	-46.05	-67.94	2.856	13.90	H
	1650	-62.73	-13	-49.73	-69.70	1.58	10.70	V
	2474	-53.59	-13	-40.59	-61.84	2.10	12.50	V
	3300	-59.31	-13	-46.31	-68.20	2.86	13.90	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.19	-13	-42.19	-67.45	2.64	14.90	H
	5610	-54.61	-13	-41.61	-66.47	2.94	14.80	H
	7485	-53.45	-13	-40.45	-63.22	3.39	13.16	H
	3735	-55.58	-13	-42.58	-67.84	2.64	14.90	V
	5610	-52.72	-13	-39.72	-64.58	2.94	14.80	V
	7485	-53.12	-13	-40.12	-62.89	3.39	13.16	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-62.33	-13	-49.33	-69.30	1.58	10.70	H
	2496	-56.19	-13	-43.19	-64.44	2.102	12.50	H
	3330	-57.75	-13	-44.75	-66.64	2.856	13.90	H
	1664	-62.44	-13	-49.44	-69.41	1.58	10.70	V
	2496	-58.37	-13	-45.37	-66.62	2.10	12.50	V
	3330	-57.38	-13	-44.38	-66.27	2.86	13.90	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.30	-13	-42.30	-67.56	2.64	14.90	H
	5670	-53.61	-13	-40.61	-65.47	2.94	14.80	H
	7560	-52.74	-13	-39.74	-62.51	3.39	13.16	H
	3780	-55.27	-13	-42.27	-67.53	2.64	14.90	V
	5670	-54.75	-13	-41.75	-66.61	2.94	14.80	V
	7560	-53.33	-13	-40.33	-63.10	3.39	13.16	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1680	-56.73	-13	-43.73	-63.70	1.58	10.70	H
	2518	-58.72	-13	-45.72	-66.97	2.102	12.50	H
	3360	-56.72	-13	-43.72	-65.61	2.856	13.90	H
	1680	-59.34	-13	-46.34	-66.31	1.58	10.70	V
	2518	-58.14	-13	-45.14	-66.39	2.10	12.50	V
	3360	-57.38	-13	-44.38	-66.27	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-7A (ANT2+3)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-54.77	-13	-41.77	-67.03	2.64	14.90	H
	5550	-54.14	-13	-41.14	-66.00	2.94	14.80	H
	7410	-53.57	-13	-40.57	-63.34	3.39	13.16	H
	3705	-55.35	-13	-42.35	-67.61	2.64	14.90	V
	5550	-54.88	-13	-41.88	-66.74	2.94	14.80	V
	7410	-53.94	-13	-40.94	-63.71	3.39	13.16	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	4995	-53.40	-25	-28.40	-63.61	3.03	13.24	H
	7500	-53.04	-25	-28.04	-62.49	3.56	13.01	H
	10005	-49.25	-25	-24.25	-58.77	3.92	13.44	H
	4995	-53.79	-25	-28.79	-64.00	3.03	13.24	V
	7500	-53.50	-25	-28.50	-62.95	3.56	13.01	V
	10005	-49.88	-25	-24.88	-59.40	3.92	13.44	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.36	-13	-42.36	-67.62	2.64	14.90	H
	5610	-54.06	-13	-41.06	-65.92	2.94	14.80	H
	7485	-53.51	-13	-40.51	-63.28	3.39	13.16	H
	3735	-55.53	-13	-42.53	-67.79	2.64	14.90	V
	5610	-54.64	-13	-41.64	-66.50	2.94	14.80	V
	7485	-53.32	-13	-40.32	-63.09	3.39	13.16	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-53.87	-25	-28.87	-64.08	3.03	13.24	H
	7575	-53.42	-25	-28.42	-62.87	3.56	13.01	H
	10110	-49.17	-25	-24.17	-58.69	3.92	13.44	H
	5055	-53.87	-25	-28.87	-64.08	3.03	13.24	V
	7575	-53.22	-25	-28.22	-62.67	3.56	13.01	V
	10110	-49.22	-25	-24.22	-58.74	3.92	13.44	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.59	-13	-42.59	-67.85	2.64	14.90	H
	5670	-54.04	-13	-41.04	-65.90	2.94	14.80	H
	7560	-53.29	-13	-40.29	-63.06	3.39	13.16	H
	3780	-55.53	-13	-42.53	-67.79	2.64	14.90	V
	5670	-55.29	-13	-42.29	-67.15	2.94	14.80	V
	7560	-52.98	-13	-39.98	-62.75	3.39	13.16	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	5100	-53.42	-25	-28.42	-63.63	3.03	13.24	H
	7650	-52.79	-25	-27.79	-62.24	3.56	13.01	H
	10200	-48.69	-25	-23.69	-58.21	3.92	13.44	H
	5100	-53.74	-25	-28.74	-63.95	3.03	13.24	V
	7650	-52.61	-25	-27.61	-62.06	3.56	13.01	V
	10200	-49.17	-25	-24.17	-58.69	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA 2A-66A (ANT2+5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.27	-13	-42.27	-67.53	2.64	14.90	H
	5550	-54.44	-13	-41.44	-66.30	2.94	14.80	H
	7410	-53.51	-13	-40.51	-63.28	3.39	13.16	H
	3705	-55.12	-13	-42.12	-67.38	2.64	14.90	V
	5550	-54.37	-13	-41.37	-66.23	2.94	14.80	V
	7410	-53.26	-13	-40.26	-63.03	3.39	13.16	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-53.95	-13	-40.95	-64.69	2.604	13.34	H
	5130	-53.63	-13	-40.63	-64.14	3.011	13.52	H
	6840	-54.78	-13	-41.78	-64.98	3.271	13.47	H
	3420	-44.22	-13	-31.22	-54.96	2.604	13.34	V
	5130	-53.73	-13	-40.73	-64.24	3.011	13.52	V
	6840	-54.79	-13	-41.79	-64.99	3.271	13.47	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.94	-13	-42.94	-68.20	2.64	14.90	H
	5610	-53.74	-13	-40.74	-65.60	2.94	14.80	H
	7485	-53.41	-13	-40.41	-63.18	3.39	13.16	H
	3735	-55.78	-13	-42.78	-68.04	2.64	14.90	V
	5610	-54.60	-13	-41.60	-66.46	2.94	14.80	V
	7485	-53.40	-13	-40.40	-63.17	3.39	13.16	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-56.50	-13	-43.50	-67.24	2.604	13.34	H
	5205	-54.02	-13	-41.02	-64.53	3.011	13.52	H
	6945	-54.56	-13	-41.56	-64.76	3.271	13.47	H
	3465	-56.83	-13	-43.83	-67.57	2.604	13.34	V
	5205	-54.16	-13	-41.16	-64.67	3.011	13.52	V
	6945	-54.95	-13	-41.95	-65.15	3.271	13.47	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.70	-13	-42.70	-67.96	2.64	14.90	H
	5670	-54.60	-13	-41.60	-66.46	2.94	14.80	H
	7560	-52.93	-13	-39.93	-62.70	3.39	13.16	H
	3780	-55.09	-13	-42.09	-67.35	2.64	14.90	V
	5670	-55.24	-13	-42.24	-67.10	2.94	14.80	V
	7560	-53.12	-13	-40.12	-62.89	3.39	13.16	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-57.40	-13	-44.40	-68.14	2.604	13.34	H
	5280	-54.48	-13	-41.48	-64.99	3.011	13.52	H
	7050	-54.47	-13	-41.47	-64.67	3.271	13.47	H
	3525	-57.50	-13	-44.50	-68.24	2.604	13.34	V
	5280	-53.83	-13	-40.83	-64.34	3.011	13.52	V
	7050	-54.17	-13	-41.17	-64.37	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-12A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-57.17	-13	-44.17	-67.91	2.604	13.34	H
	5130	-52.50	-13	-39.50	-63.01	3.011	13.52	H
	6840	-55.38	-13	-42.38	-65.58	3.271	13.47	H
	3420	-57.12	-13	-44.12	-67.86	2.604	13.34	V
	5130	-52.38	-13	-39.38	-62.89	3.011	13.52	V
	6840	-55.72	-13	-42.72	-65.92	3.271	13.47	V
LTE B12 BW 10MHz Lowest 1RB0,QPSK	1400	-58.72	-13	-45.72	-65.69	1.58	10.70	H
	2098	-60.83	-13	-47.83	-69.08	2.102	12.50	H
	2798	-58.44	-13	-45.44	-67.33	2.856	13.90	H
	1400	-64.23	-13	-51.23	-71.20	1.58	10.70	V
	2098	-61.90	-13	-48.90	-70.15	2.10	12.50	V
	2798	-57.90	-13	-44.90	-66.79	2.86	13.90	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-44.88	-13	-31.88	-55.62	2.604	13.34	H
	5175	-52.83	-13	-39.83	-63.34	3.011	13.52	H
	6900	-55.89	-13	-42.89	-66.09	3.271	13.47	H
	3450	-56.62	-13	-43.62	-67.36	2.604	13.34	V
	5175	-53.62	-13	-40.62	-64.13	3.011	13.52	V
	6900	-55.74	-13	-42.74	-65.94	3.271	13.47	V
LTE B12 BW 10MHz Middle 1RB0,QPSK	1406	-64.79	-13	-51.79	-71.76	1.58	10.70	H
	2110	-58.26	-13	-45.26	-66.51	2.102	12.50	H
	2812	-58.54	-13	-45.54	-67.43	2.856	13.90	H
	1406	-60.76	-13	-47.76	-67.73	1.58	10.70	V
	2110	-60.89	-13	-47.89	-69.14	2.10	12.50	V
	2812	-58.09	-13	-45.09	-66.98	2.86	13.90	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-57.08	-13	-44.08	-67.82	2.604	13.34	H
	5205	-54.26	-13	-41.26	-64.77	3.011	13.52	H
	6945	-57.91	-13	-44.91	-68.11	3.271	13.47	H
	3465	-55.00	-13	-42.00	-65.74	2.604	13.34	V
	5205	-57.07	-13	-44.07	-67.58	3.011	13.52	V
	6945	-57.75	-13	-44.75	-67.95	3.271	13.47	V
LTE B12 BW 10MHz Highest 1RB0,QPSK	1414	-60.97	-13	-47.97	-67.94	1.58	10.70	H
	2120	-60.35	-13	-47.35	-68.60	2.102	12.50	H
	2826	-58.53	-13	-45.53	-67.42	2.856	13.90	H
	1414	-60.75	-13	-47.75	-67.72	1.58	10.70	V
	2120	-60.36	-13	-47.36	-68.61	2.10	12.50	V
	2826	-58.29	-13	-45.29	-67.18	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-13A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-55.06	-13	-42.06	-65.80	2.604	13.34	H
	5130	-54.86	-13	-41.86	-65.37	3.011	13.52	H
	6840	-56.05	-13	-43.05	-66.25	3.271	13.47	H
	3420	-56.09	-13	-43.09	-66.83	2.604	13.34	V
	5130	-54.45	-13	-41.45	-64.96	3.011	13.52	V
	6840	-56.08	-13	-43.08	-66.28	3.271	13.47	V
LTE B13 BW 10MHz Lowest 1RB0,QPSK	1556	-65.83	-13	-52.83	-68.46	1.09	5.87	H
	2332	-60.50	-13	-47.50	-62.90	1.37	5.92	H
	3105	-58.09	-13	-45.09	-61.98	1.64	7.68	H
	1556	-64.94	-13	-51.94	-67.57	1.09	5.87	V
	2332	-59.10	-13	-46.10	-61.50	1.37	5.92	V
	3105	-57.88	-13	-44.88	-61.77	1.64	7.68	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-57.01	-13	-44.01	-67.75	2.604	13.34	H
	5175	-55.24	-13	-42.24	-65.75	3.011	13.52	H
	6900	-55.79	-13	-42.79	-65.99	3.271	13.47	H
	3450	-55.35	-13	-42.35	-66.09	2.604	13.34	V
	5175	-54.37	-13	-41.37	-64.88	3.011	13.52	V
	6900	-55.75	-13	-42.75	-65.95	3.271	13.47	V
LTE B13 BW 10MHz Middle 1RB0,QPSK	1556	-65.80	-13	-52.80	-68.43	1.09	5.87	H
	2332	-59.90	-13	-46.90	-62.30	1.37	5.92	H
	3105	-57.57	-13	-44.57	-61.46	1.64	7.68	H
	1556	-64.89	-13	-51.89	-67.52	1.09	5.87	V
	2332	-58.95	-13	-45.95	-61.35	1.37	5.92	V
	3105	-57.84	-13	-44.84	-61.73	1.64	7.68	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-57.46	-13	-44.46	-68.20	2.604	13.34	H
	5205	-55.20	-13	-42.20	-65.71	3.011	13.52	H
	6945	-55.06	-13	-42.06	-65.26	3.271	13.47	H
	3465	-57.63	-13	-44.63	-68.37	2.604	13.34	V
	5205	-55.05	-13	-42.05	-65.56	3.011	13.52	V
	6945	-55.87	-13	-42.87	-66.07	3.271	13.47	V
LTE B13 BW 10MHz Highest 1RB0,QPSK	1556	-65.53	-13	-52.53	-68.16	1.09	5.87	H
	2332	-60.38	-13	-47.38	-62.78	1.37	5.92	H
	3105	-58.17	-13	-45.17	-62.06	1.64	7.68	H
	1556	-65.24	-13	-52.24	-67.87	1.09	5.87	V
	2332	-58.98	-13	-45.98	-61.38	1.37	5.92	V
	3105	-58.13	-13	-45.13	-62.02	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-5A (ANT5+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-56.07	-13	-43.07	-66.81	2.604	13.34	H
	5130	-54.33	-13	-41.33	-64.84	3.011	13.52	H
	6840	-55.63	-13	-42.63	-65.83	3.271	13.47	H
	3420	-55.94	-13	-42.94	-66.68	2.604	13.34	V
	5130	-54.84	-13	-41.84	-65.35	3.011	13.52	V
	6840	-55.50	-13	-42.50	-65.70	3.271	13.47	V
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-63.24	-13	-50.24	-70.21	1.58	10.70	H
	2474	-56.52	-13	-43.52	-64.77	2.102	12.50	H
	3300	-57.71	-13	-44.71	-66.60	2.856	13.90	H
	1650	-63.95	-13	-50.95	-70.92	1.58	10.70	V
	2474	-54.99	-13	-41.99	-63.24	2.10	12.50	V
	3300	-57.70	-13	-44.70	-66.59	2.86	13.90	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-57.85	-13	-44.85	-68.59	2.604	13.34	H
	5175	-53.62	-13	-40.62	-64.13	3.011	13.52	H
	6900	-54.09	-13	-41.09	-64.29	3.271	13.47	H
	3450	-56.61	-13	-43.61	-67.35	2.604	13.34	V
	5175	-54.79	-13	-41.79	-65.30	3.011	13.52	V
	6900	-55.63	-13	-42.63	-65.83	3.271	13.47	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-61.77	-13	-48.77	-68.74	1.58	10.70	H
	2496	-59.52	-13	-46.52	-67.77	2.102	12.50	H
	3330	-58.44	-13	-45.44	-67.33	2.856	13.90	H
	1664	-62.40	-13	-49.40	-69.37	1.58	10.70	V
	2496	-58.30	-13	-45.30	-66.55	2.10	12.50	V
	3330	-58.32	-13	-45.32	-67.21	2.86	13.90	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-57.90	-13	-44.90	-68.64	2.604	13.34	H
	5205	-54.13	-13	-41.13	-64.64	3.011	13.52	H
	6945	-55.68	-13	-42.68	-65.88	3.271	13.47	H
	3465	-57.13	-13	-44.13	-67.87	2.604	13.34	V
	5205	-54.03	-13	-41.03	-64.54	3.011	13.52	V
	6945	-55.73	-13	-42.73	-65.93	3.271	13.47	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1680	-62.41	-13	-49.41	-69.38	1.58	10.70	H
	2518	-58.71	-13	-45.71	-66.96	2.102	12.50	H
	3360	-58.08	-13	-45.08	-66.97	2.856	13.90	H
	1680	-63.08	-13	-50.08	-70.05	1.58	10.70	V
	2518	-58.68	-13	-45.68	-66.93	2.10	12.50	V
	3360	-57.53	-13	-44.53	-66.42	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-7A (ANT2+3)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-55.30	-13	-42.30	-66.04	2.604	13.34	H
	5130	-54.01	-13	-41.01	-64.52	3.011	13.52	H
	6840	-54.92	-13	-41.92	-65.12	3.271	13.47	H
	3420	-56.33	-13	-43.33	-67.07	2.604	13.34	V
	5130	-53.88	-13	-40.88	-64.39	3.011	13.52	V
	6840	-54.65	-13	-41.65	-64.85	3.271	13.47	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	4995	-53.59	-25	-28.59	-63.80	3.03	13.24	H
	7500	-53.16	-25	-28.16	-62.61	3.56	13.01	H
	10005	-50.04	-25	-25.04	-59.56	3.92	13.44	H
	4995	-53.76	-25	-28.76	-63.97	3.03	13.24	V
	7500	-53.05	-25	-28.05	-62.50	3.56	13.01	V
	10005	-49.84	-25	-24.84	-59.36	3.92	13.44	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-55.36	-13	-42.36	-66.10	2.604	13.34	H
	5175	-53.55	-13	-40.55	-64.06	3.011	13.52	H
	6900	-54.87	-13	-41.87	-65.07	3.271	13.47	H
	3450	-56.37	-13	-43.37	-67.11	2.604	13.34	V
	5175	-53.77	-13	-40.77	-64.28	3.011	13.52	V
	6900	-54.52	-13	-41.52	-64.72	3.271	13.47	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-53.34	-25	-28.34	-63.55	3.03	13.24	H
	7575	-53.36	-25	-28.36	-62.81	3.56	13.01	H
	10110	-48.44	-25	-23.44	-57.96	3.92	13.44	H
	5055	-53.86	-25	-28.86	-64.07	3.03	13.24	V
	7575	-53.10	-25	-28.10	-62.55	3.56	13.01	V
	10110	-49.05	-25	-24.05	-58.57	3.92	13.44	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-56.54	-13	-43.54	-67.28	2.604	13.34	H
	5205	-53.95	-13	-40.95	-64.46	3.011	13.52	H
	6945	-54.62	-13	-41.62	-64.82	3.271	13.47	H
	3465	-56.69	-13	-43.69	-67.43	2.604	13.34	V
	5205	-54.18	-13	-41.18	-64.69	3.011	13.52	V
	6945	-54.70	-13	-41.70	-64.90	3.271	13.47	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	5100	-53.65	-25	-28.65	-63.86	3.03	13.24	H
	7650	-52.64	-25	-27.64	-62.09	3.56	13.01	H
	10200	-48.71	-25	-23.71	-58.23	3.92	13.44	H
	5100	-54.10	-25	-29.10	-64.31	3.03	13.24	V
	7650	-53.00	-25	-28.00	-62.45	3.56	13.01	V
	10200	-49.13	-25	-24.13	-58.65	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_5A-7A (ANT0+3)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-63.57	-13	-50.57	-70.54	1.58	10.70	H
	2474	-57.98	-13	-44.98	-66.23	2.102	12.50	H
	3300	-57.94	-13	-44.94	-66.83	2.856	13.90	H
	1650	-62.39	-13	-49.39	-69.36	1.58	10.70	V
	2474	-54.09	-13	-41.09	-62.34	2.10	12.50	V
	3300	-57.80	-13	-44.80	-66.69	2.86	13.90	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	4995	-54.50	-25	-29.50	-64.71	3.03	13.24	H
	7500	-54.33	-25	-29.33	-63.78	3.56	13.01	H
	10005	-50.16	-25	-25.16	-59.68	3.92	13.44	H
	4995	-54.81	-25	-29.81	-65.02	3.03	13.24	V
	7500	-54.17	-25	-29.17	-63.62	3.56	13.01	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-62.64	-13	-49.64	-69.61	1.58	10.70	H
	2496	-52.53	-13	-39.53	-60.78	2.102	12.50	H
	3330	-58.72	-13	-45.72	-67.61	2.856	13.90	H
	1664	-61.48	-13	-48.48	-68.45	1.58	10.70	V
	2496	-45.57	-13	-32.57	-53.82	2.10	12.50	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	3330	-58.61	-13	-45.61	-67.50	2.86	13.90	V
	5055	-54.67	-25	-29.67	-64.88	3.03	13.24	H
	7575	-54.39	-25	-29.39	-63.84	3.56	13.01	H
	10110	-49.66	-25	-24.66	-59.18	3.92	13.44	H
	5055	-54.56	-25	-29.56	-64.77	3.03	13.24	V
	7575	-53.86	-25	-28.86	-63.31	3.56	13.01	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	10110	-49.83	-25	-24.83	-59.35	3.92	13.44	V
	1680	-61.92	-13	-48.92	-68.89	1.58	10.70	H
	2518	-52.89	-13	-39.89	-61.14	2.102	12.50	H
	3360	-57.95	-13	-44.95	-66.84	2.856	13.90	H
	1680	-61.12	-13	-48.12	-68.09	1.58	10.70	V
	2518	-49.57	-13	-36.57	-57.82	2.10	12.50	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	3360	-58.10	-13	-45.10	-66.99	2.86	13.90	V
	5100	-54.16	-25	-29.16	-64.37	3.03	13.24	H
	7650	-53.36	-25	-28.36	-62.81	3.56	13.01	H
	10200	-49.49	-25	-24.49	-59.01	3.92	13.44	H
	5100	-54.59	-25	-29.59	-64.80	3.03	13.24	V
	7650	-53.52	-25	-28.52	-62.97	3.56	13.01	V
	10200	-49.47	-25	-24.47	-58.99	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_5A-66A (ANT0+5)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-62.67	-13	-49.67	-69.64	1.58	10.70	H
	2472	-58.38	-13	-45.38	-66.63	2.102	12.50	H
	3300	-58.20	-13	-45.20	-67.09	2.856	13.90	H
	1650	-62.03	-13	-49.03	-69.00	1.58	10.70	V
	2472	-58.49	-13	-45.49	-66.74	2.10	12.50	V
	3300	-58.39	-13	-45.39	-67.28	2.86	13.90	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-55.16	-13	-42.16	-65.90	2.604	13.34	H
	5130	-54.65	-13	-41.65	-65.16	3.011	13.52	H
	6840	-56.02	-13	-43.02	-66.22	3.271	13.47	H
	3420	-58.04	-13	-45.04	-68.78	2.604	13.34	V
	5130	-54.50	-13	-41.50	-65.01	3.011	13.52	V
	6840	-55.54	-13	-42.54	-65.74	3.271	13.47	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-62.39	-13	-49.39	-69.36	1.58	10.70	H
	2496	-59.82	-13	-46.82	-68.07	2.102	12.50	H
	3330	-58.63	-13	-45.63	-67.52	2.856	13.90	H
	1664	-62.29	-13	-49.29	-69.26	1.58	10.70	V
	2496	-58.87	-13	-45.87	-67.12	2.10	12.50	V
	3330	-58.55	-13	-45.55	-67.44	2.86	13.90	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-57.38	-13	-44.38	-68.12	2.604	13.34	H
	5205	-54.73	-13	-41.73	-65.24	3.011	13.52	H
	6945	-55.49	-13	-42.49	-65.69	3.271	13.47	H
	3465	-57.95	-13	-44.95	-68.69	2.604	13.34	V
	5205	-54.82	-13	-41.82	-65.33	3.011	13.52	V
	6945	-55.80	-13	-42.80	-66.00	3.271	13.47	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1680	-60.05	-13	-47.05	-67.02	1.58	10.70	H
	2518	-58.88	-13	-45.88	-67.13	2.102	12.50	H
	3360	-58.46	-13	-45.46	-67.35	2.856	13.90	H
	1680	-61.00	-13	-48.00	-67.97	1.58	10.70	V
	2518	-58.68	-13	-45.68	-66.93	2.10	12.50	V
	3360	-57.70	-13	-44.70	-66.59	2.86	13.90	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-58.25	-13	-45.25	-68.99	2.604	13.34	H
	5280	-55.21	-13	-42.21	-65.72	3.011	13.52	H
	7050	-55.35	-13	-42.35	-65.55	3.271	13.47	H
	3525	-57.97	-13	-44.97	-68.71	2.604	13.34	V
	5280	-54.82	-13	-41.82	-65.33	3.011	13.52	V
	7050	-54.78	-13	-41.78	-64.98	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_12A-66A (ANT0+2)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B12 BW 10MHz Lowest 1RB0,QPSK	1400	-65.13	-13	-52.13	-72.10	1.58	10.70	H
	2098	-62.52	-13	-49.52	-70.77	2.102	12.50	H
	2798	-58.21	-13	-45.21	-67.10	2.856	13.90	H
	1400	-64.75	-13	-51.75	-71.72	1.58	10.70	V
	2098	-61.95	-13	-48.95	-70.20	2.10	12.50	V
	2798	-58.18	-13	-45.18	-67.07	2.86	13.90	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-57.85	-13	-44.85	-68.59	2.604	13.34	H
	5130	-52.34	-13	-39.34	-62.85	3.011	13.52	H
	6840	-55.83	-13	-42.83	-66.03	3.271	13.47	H
	3420	-58.01	-13	-45.01	-68.75	2.604	13.34	V
	5130	-54.55	-13	-41.55	-65.06	3.011	13.52	V
	6840	-55.76	-13	-42.76	-65.96	3.271	13.47	V
LTE B12 BW 10MHz Middle 1RB0,QPSK	1406	-61.38	-13	-48.38	-68.35	1.58	10.70	H
	2110	-61.56	-13	-48.56	-69.81	2.102	12.50	H
	2812	-58.50	-13	-45.50	-67.39	2.856	13.90	H
	1406	-62.10	-13	-49.10	-69.07	1.58	10.70	V
	2110	-60.89	-13	-47.89	-69.14	2.10	12.50	V
	2812	-58.12	-13	-45.12	-67.01	2.86	13.90	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-57.66	-13	-44.66	-68.40	2.604	13.34	H
	5205	-54.93	-13	-41.93	-65.44	3.011	13.52	H
	6945	-55.54	-13	-42.54	-65.74	3.271	13.47	H
	3465	-57.88	-13	-44.88	-68.62	2.604	13.34	V
	5205	-54.70	-13	-41.70	-65.21	3.011	13.52	V
	6945	-55.78	-13	-42.78	-65.98	3.271	13.47	V
LTE B12 BW 10MHz Highest 1RB0,QPSK	1414	-63.96	-13	-50.96	-70.93	1.58	10.70	H
	2120	-61.18	-13	-48.18	-69.43	2.102	12.50	H
	2826	-58.56	-13	-45.56	-67.45	2.856	13.90	H
	1414	-64.63	-13	-51.63	-71.60	1.58	10.70	V
	2120	-60.31	-13	-47.31	-68.56	2.10	12.50	V
	2826	-57.94	-13	-44.94	-66.83	2.86	13.90	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-58.41	-13	-45.41	-69.15	2.604	13.34	H
	5280	-55.21	-13	-42.21	-65.72	3.011	13.52	H
	7050	-55.68	-13	-42.68	-65.88	3.271	13.47	H
	3525	-58.63	-13	-45.63	-69.37	2.604	13.34	V
	5280	-55.27	-13	-42.27	-65.78	3.011	13.52	V
	7050	-55.34	-13	-42.34	-65.54	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_13A-66A (ANT0+2)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B13 BW 10MHz Lowest 1RB0,QPSK	1554	-60.40	-13	-47.40	-63.03	1.09	5.87	H
	2332	-60.90	-13	-47.90	-63.30	1.37	5.92	H
	3105	-58.02	-13	-45.02	-61.91	1.64	7.68	H
	1554	-60.23	-13	-47.23	-62.86	1.09	5.87	V
	2332	-59.41	-13	-46.41	-61.81	1.37	5.92	V
	3105	-57.74	-13	-44.74	-61.63	1.64	7.68	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-53.79	-13	-40.79	-64.53	2.604	13.34	H
	5130	-50.28	-13	-37.28	-60.79	3.011	13.52	H
	6840	-56.09	-13	-43.09	-66.29	3.271	13.47	H
	3420	-57.97	-13	-44.97	-68.71	2.604	13.34	V
	5130	-49.22	-13	-36.22	-59.73	3.011	13.52	V
	6840	-55.84	-13	-42.84	-66.04	3.271	13.47	V
LTE B13 BW 10MHz Middle 1RB0,QPSK	1560	-59.54	-42.15	-17.39	-62.17	1.09	5.87	H
	2340	-60.40	-13	-47.40	-62.80	1.37	5.92	H
	3120	-58.11	-13	-45.11	-62.00	1.64	7.68	H
	1560	-59.71	-42.15	-17.56	-62.34	1.09	5.87	V
	2340	-58.88	-13	-45.88	-61.28	1.37	5.92	V
	3120	-58.15	-13	-45.15	-62.04	1.64	7.68	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-57.95	-13	-44.95	-68.69	2.604	13.34	H
	5205	-50.20	-13	-37.20	-60.71	3.011	13.52	H
	6945	-55.73	-13	-42.73	-65.93	3.271	13.47	H
	3465	-57.10	-13	-44.10	-67.84	2.604	13.34	V
	5205	-51.06	-13	-38.06	-61.57	3.011	13.52	V
	6945	-55.55	-13	-42.55	-65.75	3.271	13.47	V
LTE B13 BW 10MHz Highest 1RB0,QPSK	1564	-58.67	-42.15	-16.52	-61.30	1.09	5.87	H
	2348	-60.75	-13	-47.75	-63.15	1.37	5.92	H
	3135	-57.71	-13	-44.71	-61.60	1.64	7.68	H
	1564	-58.68	-42.15	-16.53	-61.31	1.09	5.87	V
	2348	-59.06	-13	-46.06	-61.46	1.37	5.92	V
	3135	-58.18	-13	-45.18	-62.07	1.64	7.68	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-58.00	-13	-45.00	-68.74	2.604	13.34	H
	5280	-53.66	-13	-40.66	-64.17	3.011	13.52	H
	7050	-55.39	-13	-42.39	-65.59	3.271	13.47	H
	3525	-58.16	-13	-45.16	-68.90	2.604	13.34	V
	5280	-52.08	-13	-39.08	-62.59	3.011	13.52	V
	7050	-55.73	-13	-42.73	-65.93	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.