





Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----


**100kHz PSD reference Level**

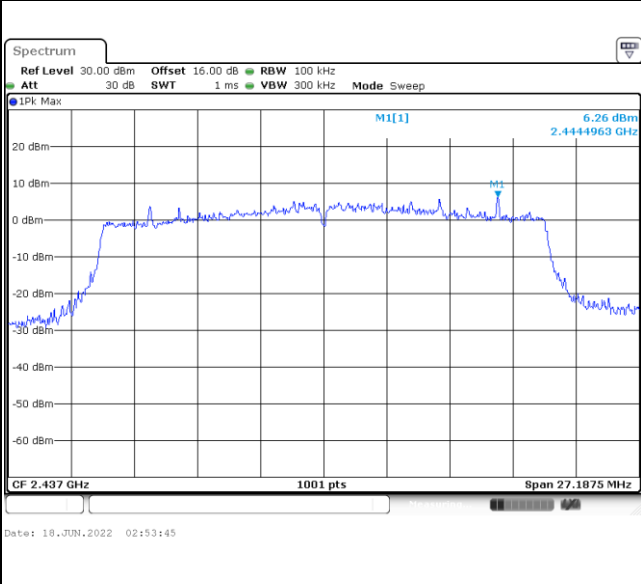

**Spurious Emission 30MHz~3GHz**


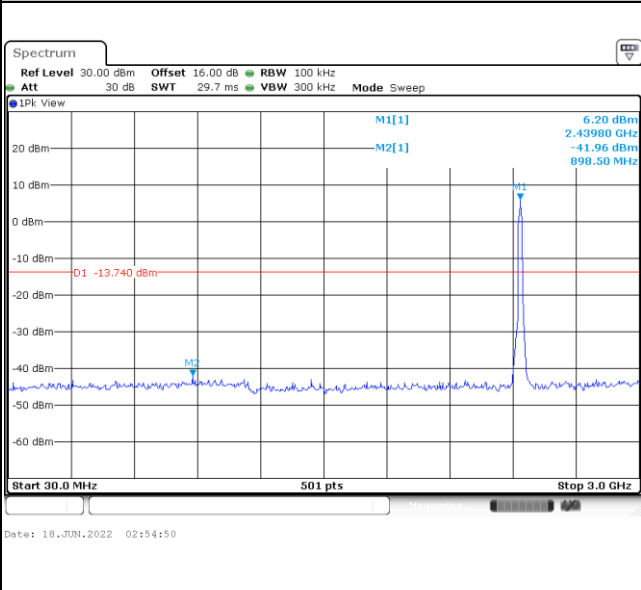


**Spurious Emission 2GHz~25GHz**

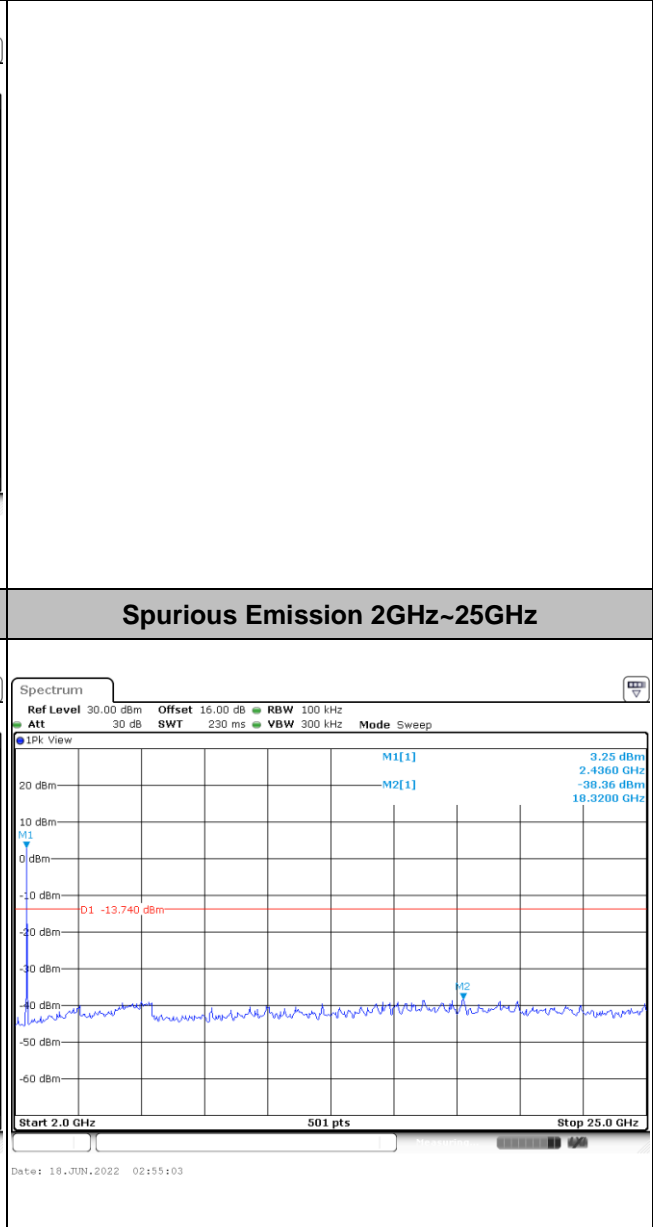





Test Mode : 802.11ax HE20 Test Channel : 09

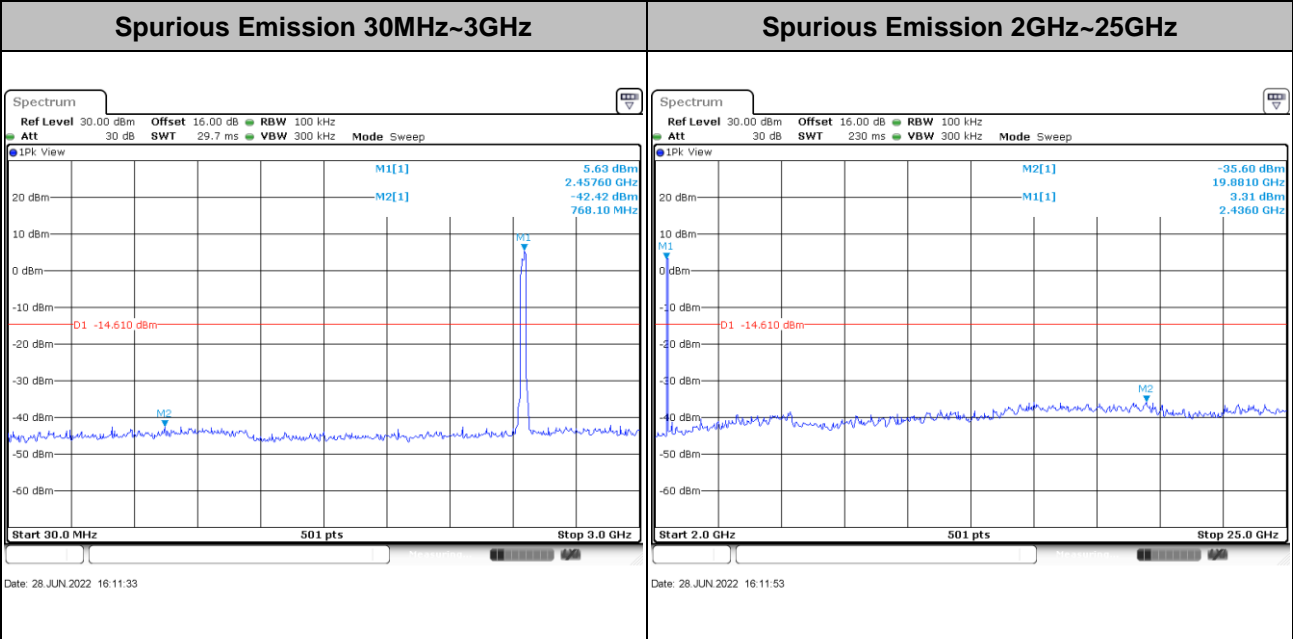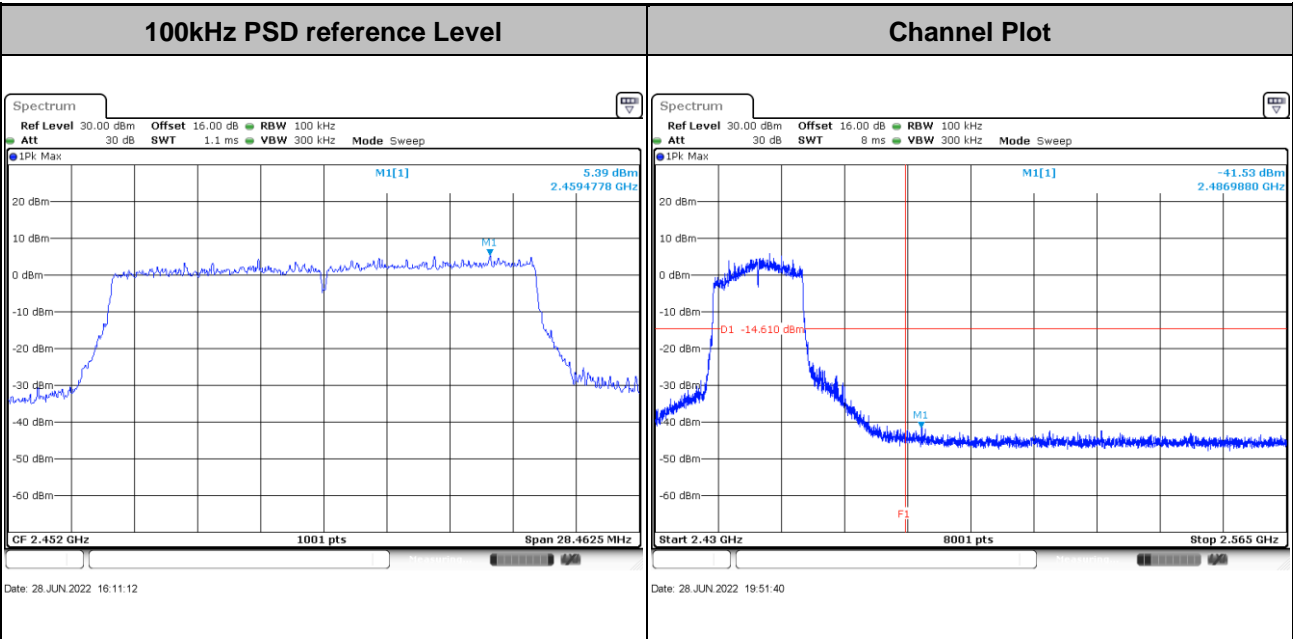





Test Mode : 802.11ax HE20 Test Channel : 10

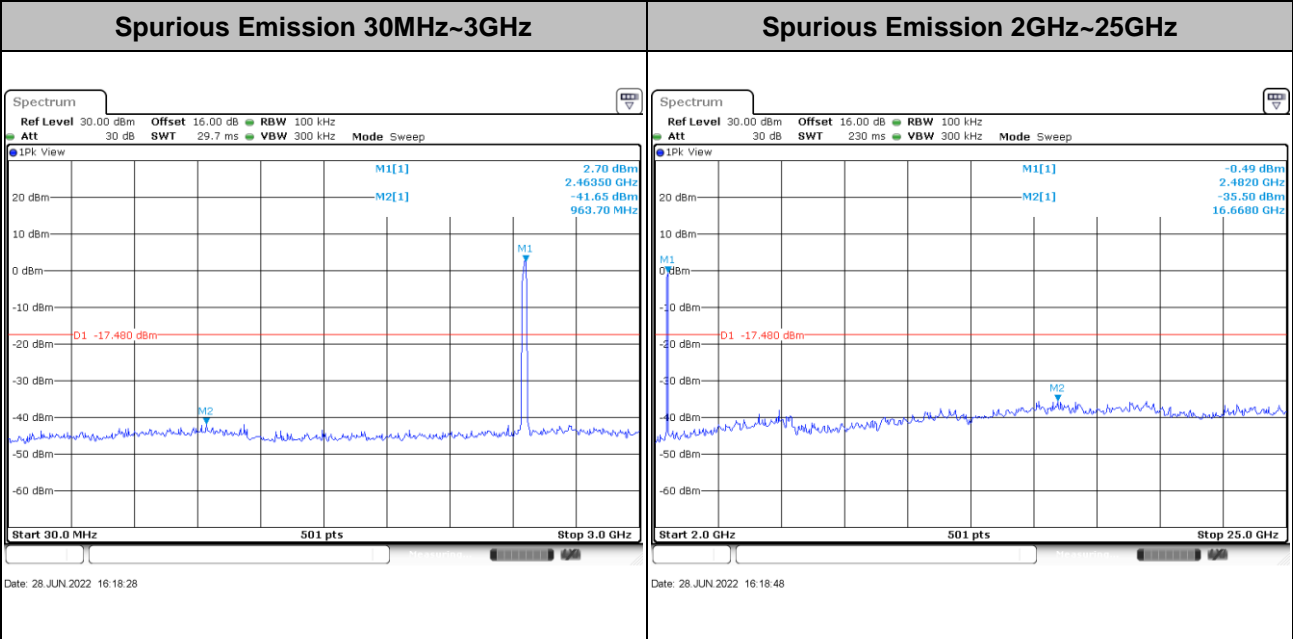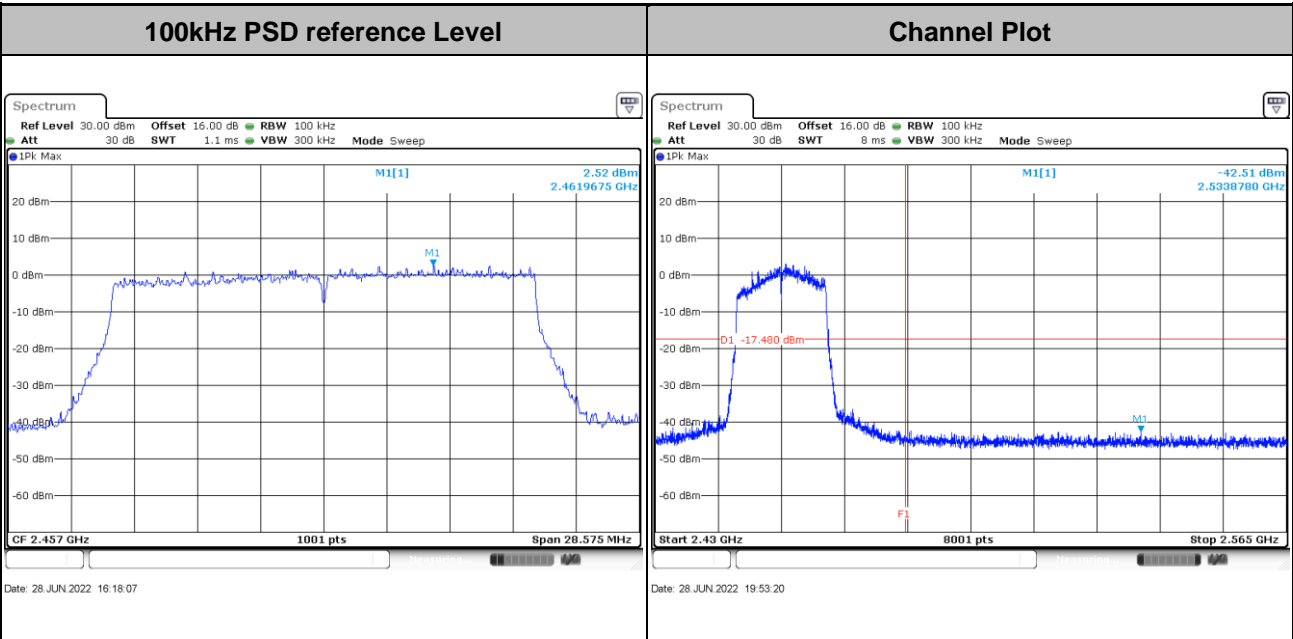




Test Mode : 802.11ax HE20 Test Channel : 11

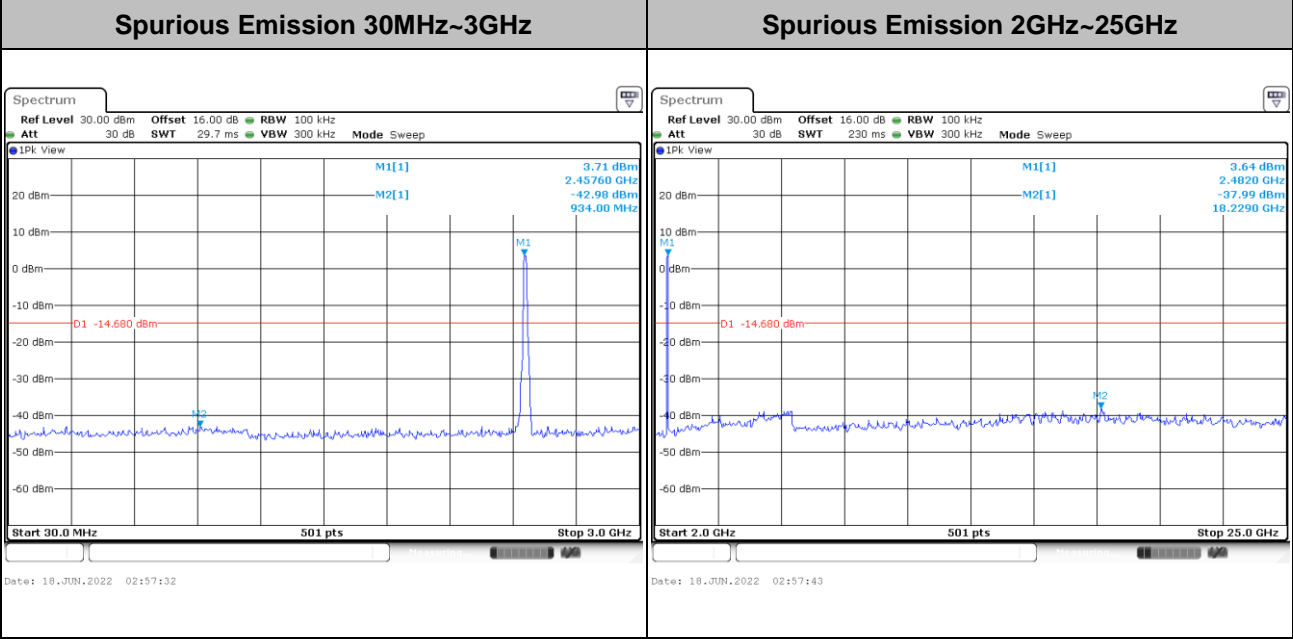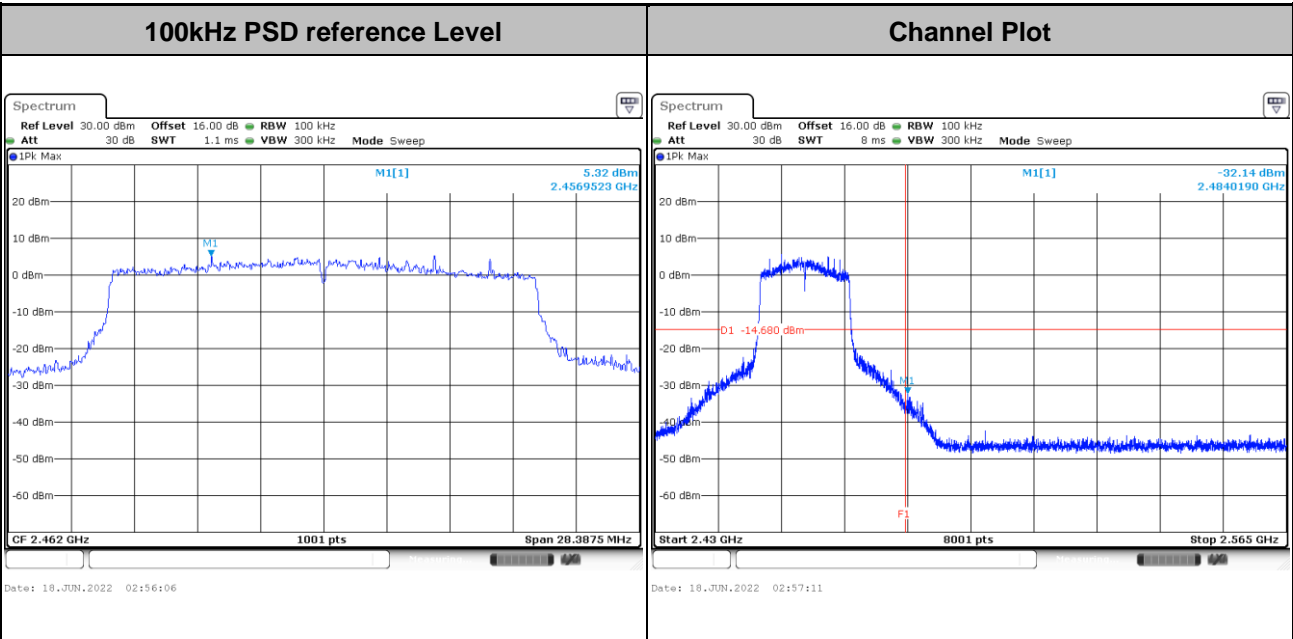




Test Mode :	802.11ax HE20	Test Channel :	01-partial RU26/0
-------------	---------------	----------------	-------------------

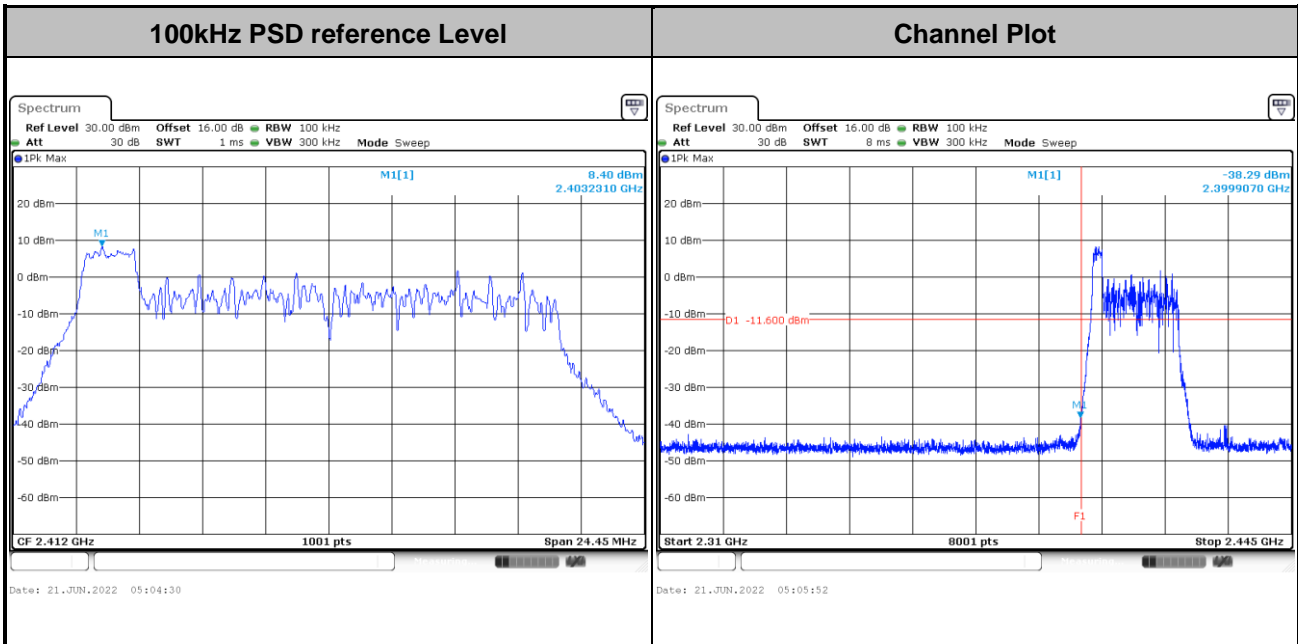


Test Mode :	802.11ax HE20	Test Channel :	01-partial RU52/37
-------------	---------------	----------------	--------------------

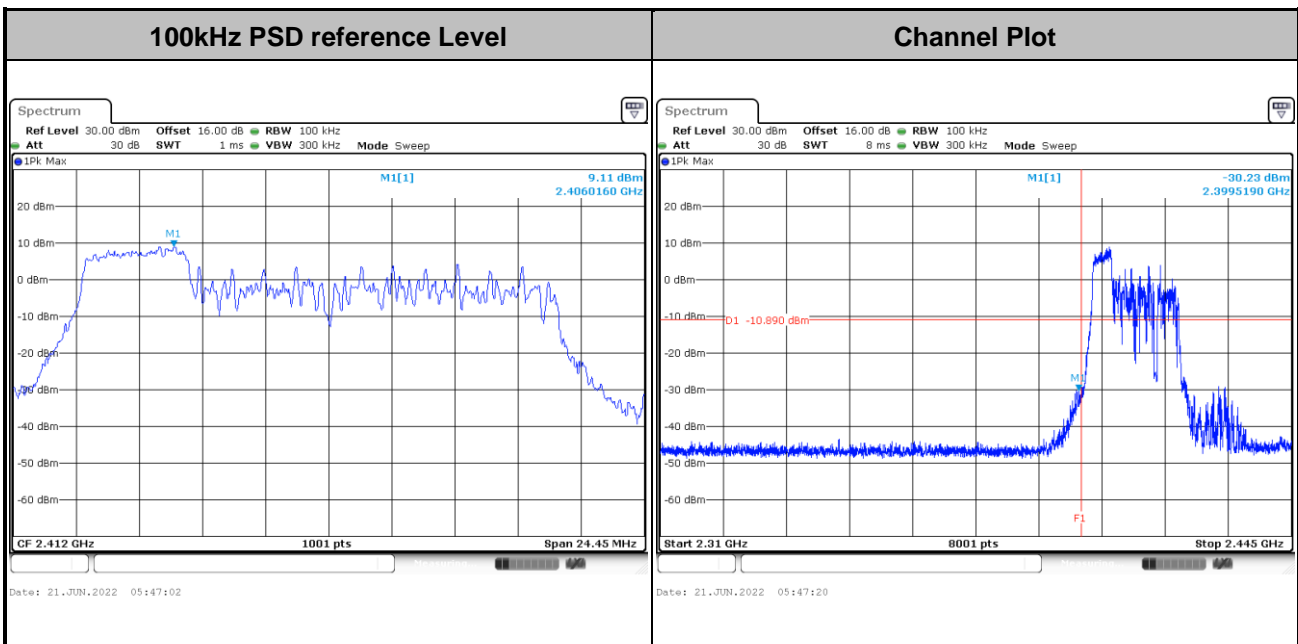




<b>Test Mode :</b>	802.11ax HE20	<b>Test Channel :</b>	01-partial RU106/53
--------------------	---------------	-----------------------	---------------------

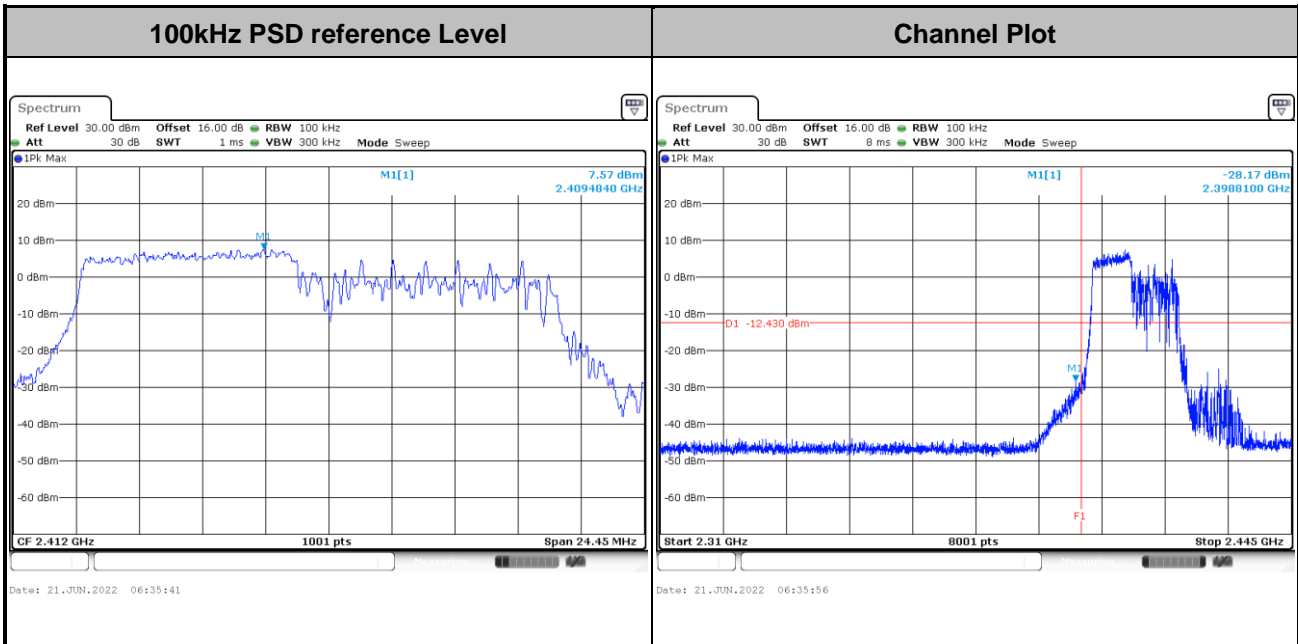




<b>Test Mode :</b>	802.11ax HE20	<b>Test Channel :</b>	06-partial RU26/4
--------------------	---------------	-----------------------	-------------------

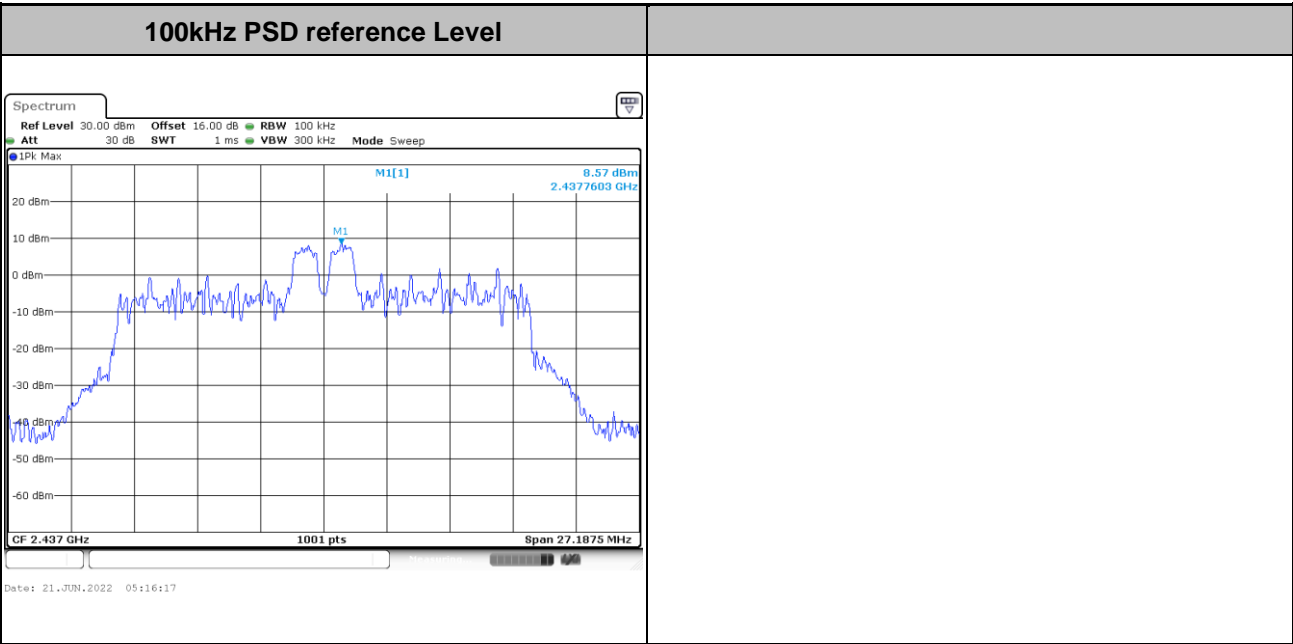


<b>Test Mode :</b>	802.11ax HE20	<b>Test Channel :</b>	06-partial RU52/39
--------------------	---------------	-----------------------	--------------------

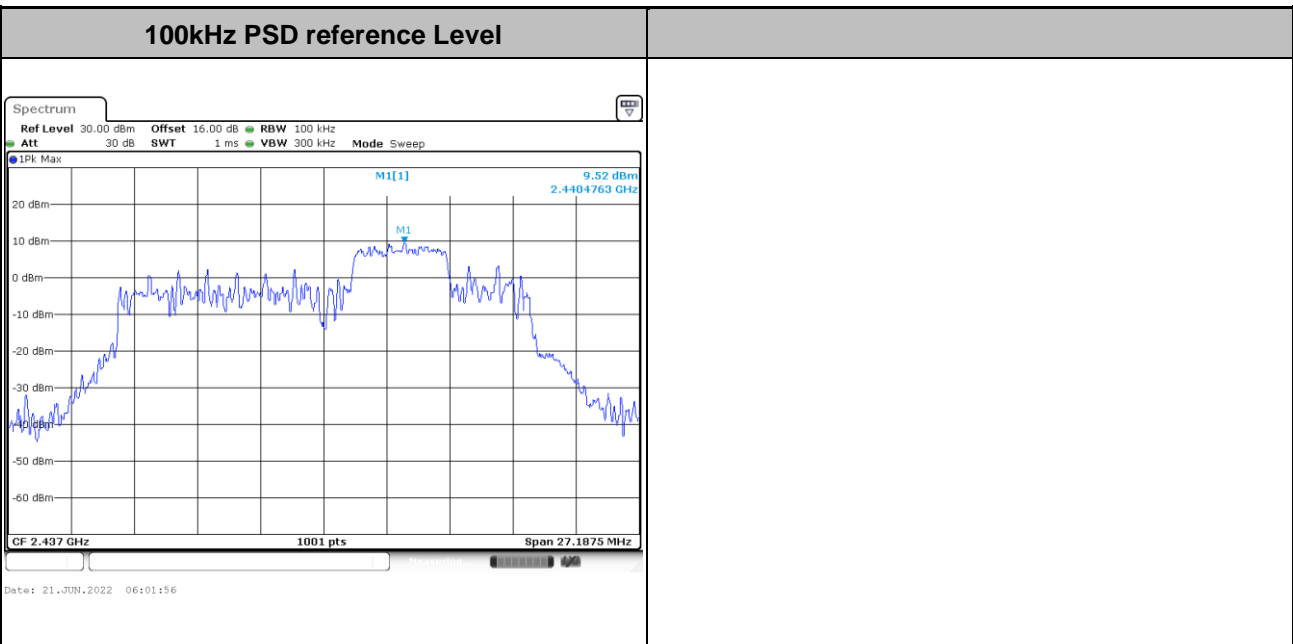




Test Mode :	802.11ax HE20	Test Channel :	06-partial RU106/53
-------------	---------------	----------------	---------------------

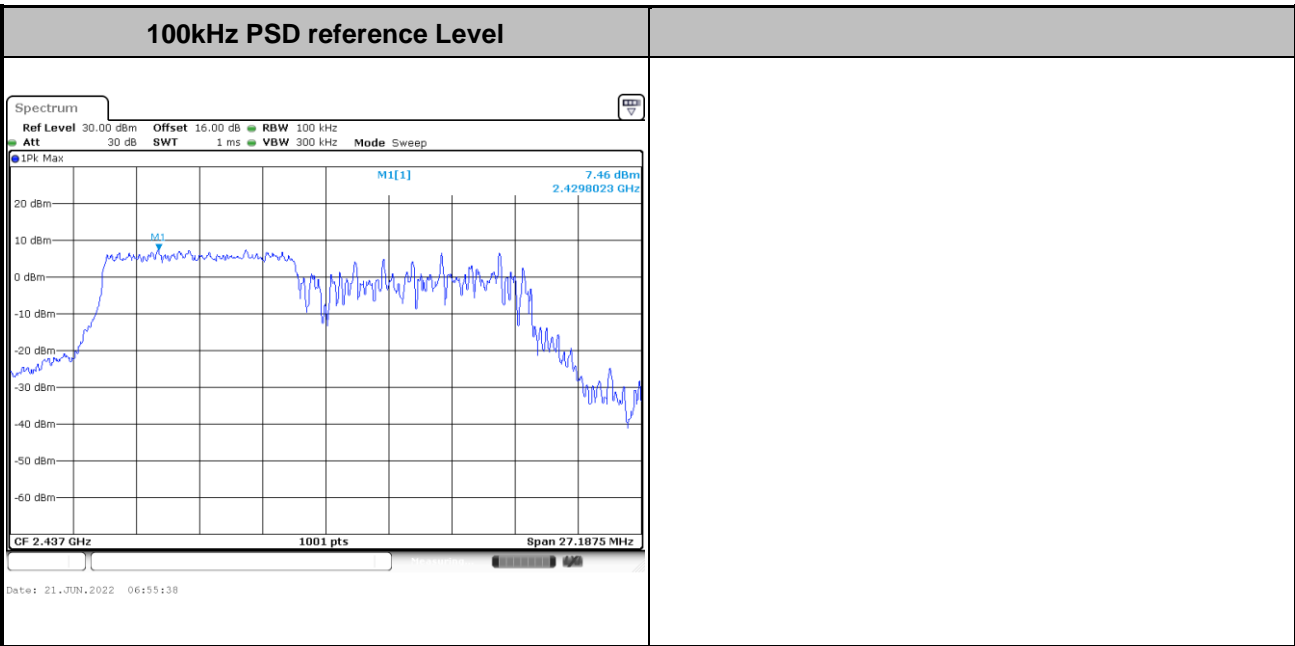






<b>Test Mode :</b>	802.11ax HE20	<b>Test Channel :</b>	11-partial RU26/8
--------------------	---------------	-----------------------	-------------------

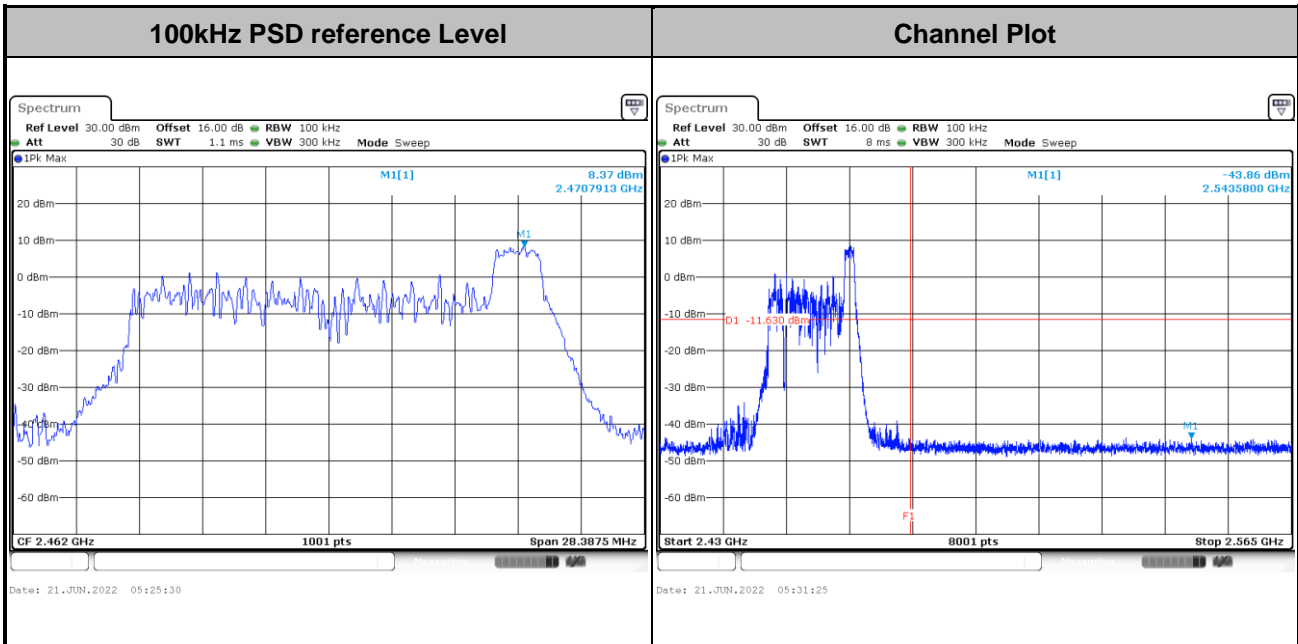


<b>Test Mode :</b>	802.11ax HE20	<b>Test Channel :</b>	11-partial RU52/40
--------------------	---------------	-----------------------	--------------------

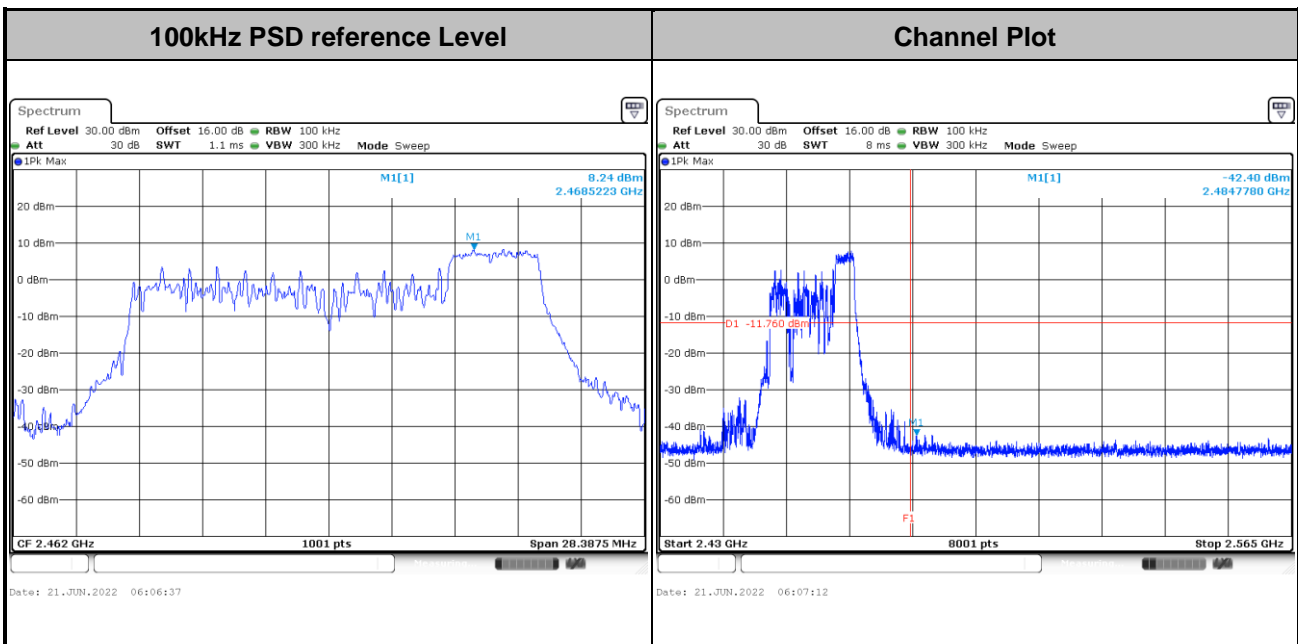



Test Mode :	802.11ax HE20	Test Channel :	11-partial RU106/54
-------------	---------------	----------------	---------------------

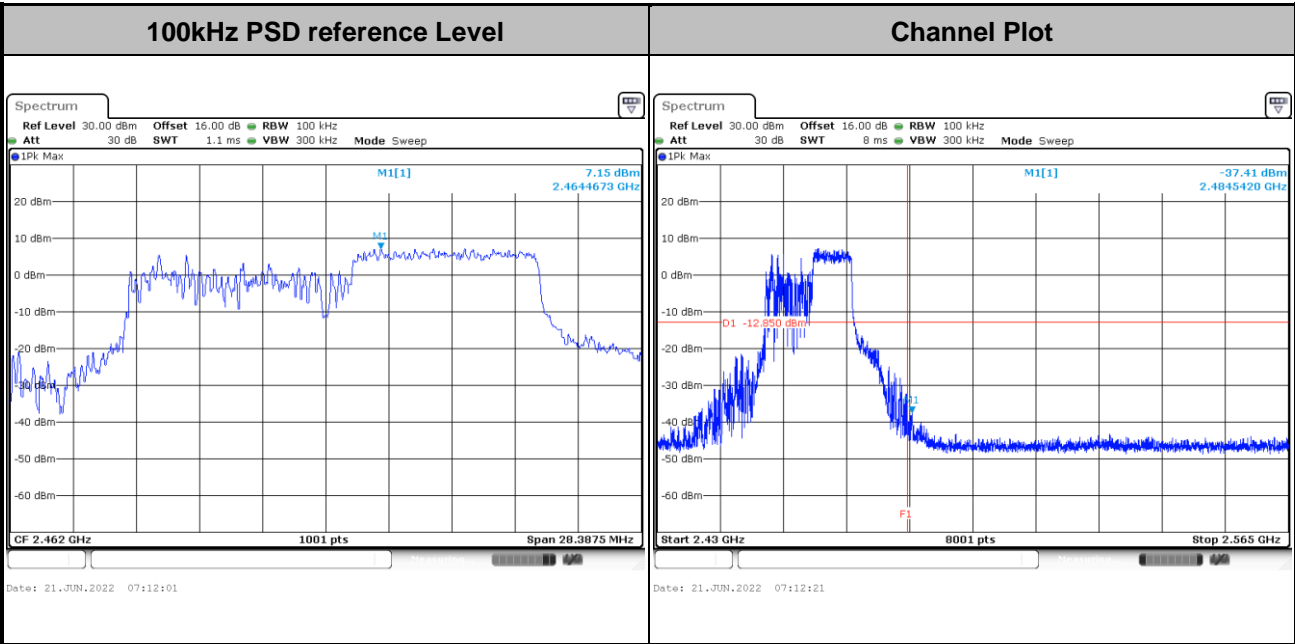



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

For average measurement for Tx Beamforming mode:


    - RBW = 1 MHz, VBW= 3MHz
    - Detector = RMS.
    - If power averaging (rms) mode was used, then the applicable correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

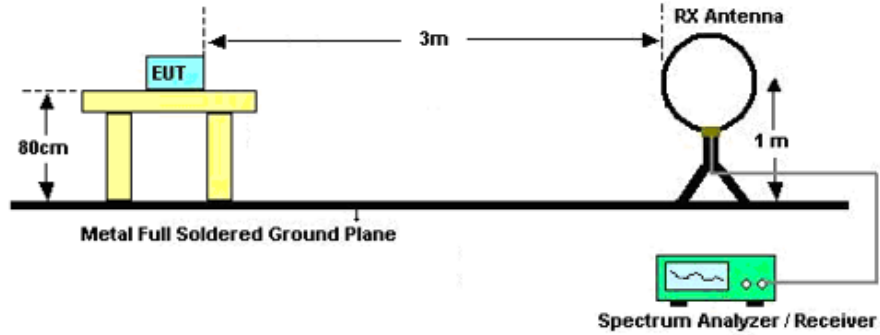

For radiated emissions from 30MHz to 1GHz

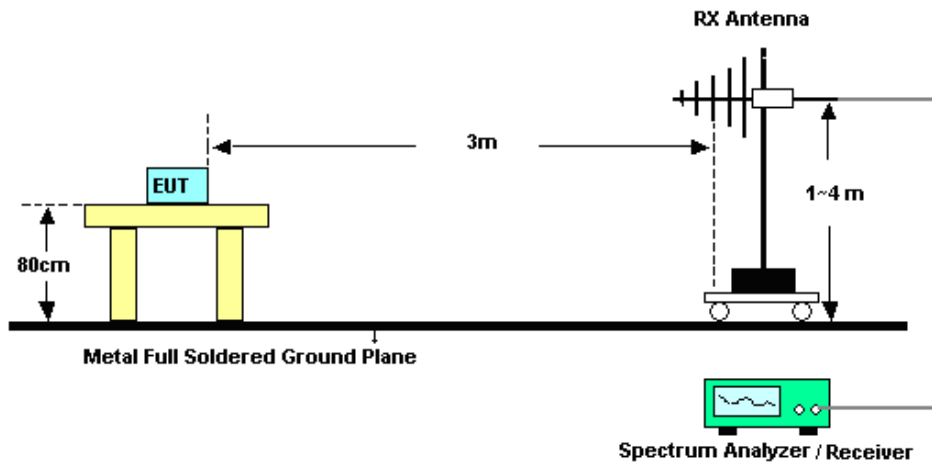

For radiated emissions above 1GHz

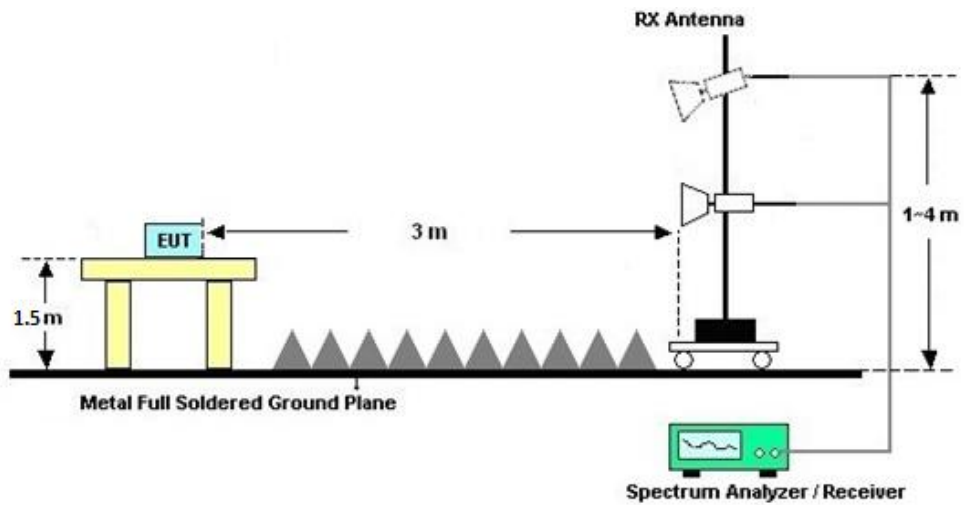



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix B&C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix B&C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

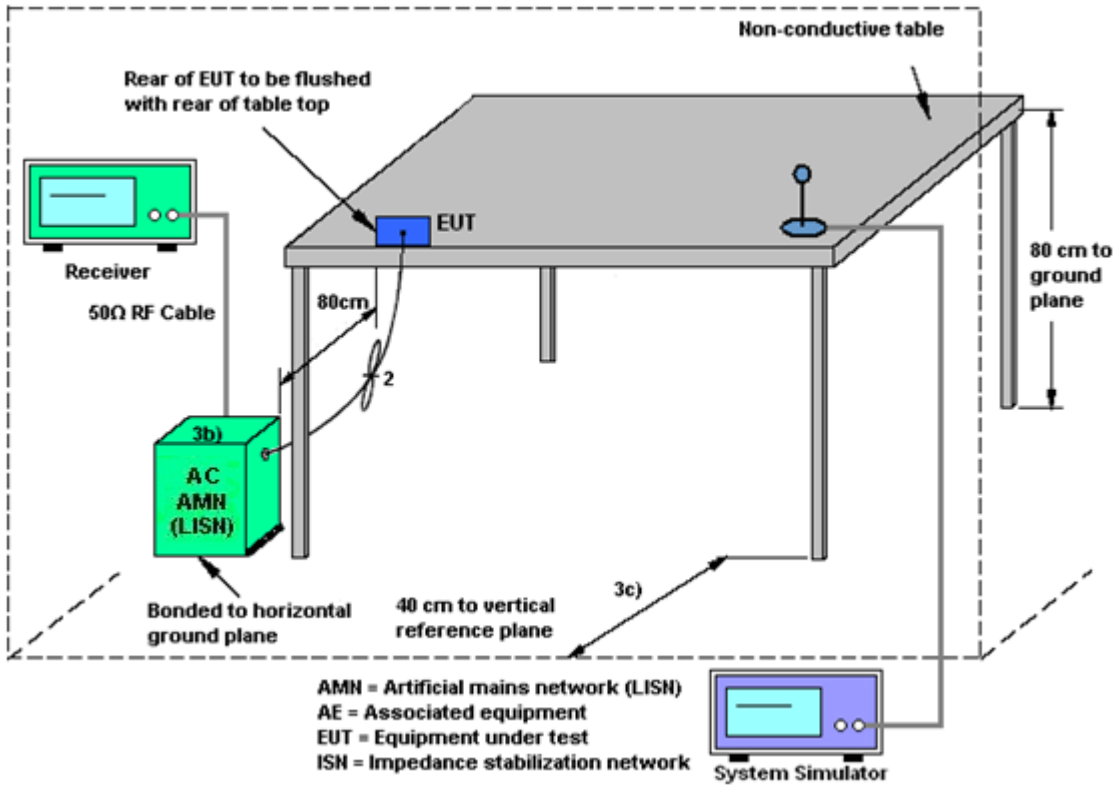

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix A.





### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	1.39	0.47	1.39	3.95	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



**TXBF modes**

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant 1 (dBi)	Ant 2 (dBi)				
2.4 GHz	1.39	0.47	3.95	3.95	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jun. 07, 2022~ Jul. 19, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jun. 07, 2022~ Jul. 19, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jun. 07, 2022~ Jul. 19, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jul. 18, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44G,MAX 30dB	Mar. 24, 2022	Jul. 18, 2022	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jul. 18, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 03, 2022	Jul. 18, 2022	Jun. 02, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2021	Jul. 18, 2022	Nov. 07, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jul. 18, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 11, 2022	Jul. 18, 2022	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jul. 18, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Jul. 18, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY532703 16	500MHz~26.5GHz	Oct. 16, 2021	Jul. 18, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jul. 18, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 18, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 18, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2022	Jun. 12, 2022	Apr. 19, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jun. 12, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 20, 2022	Jun. 12, 2022	Apr. 19, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jun. 12, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %
Conducted Power Spectral Density	±0.54 dB

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## Appendix A. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

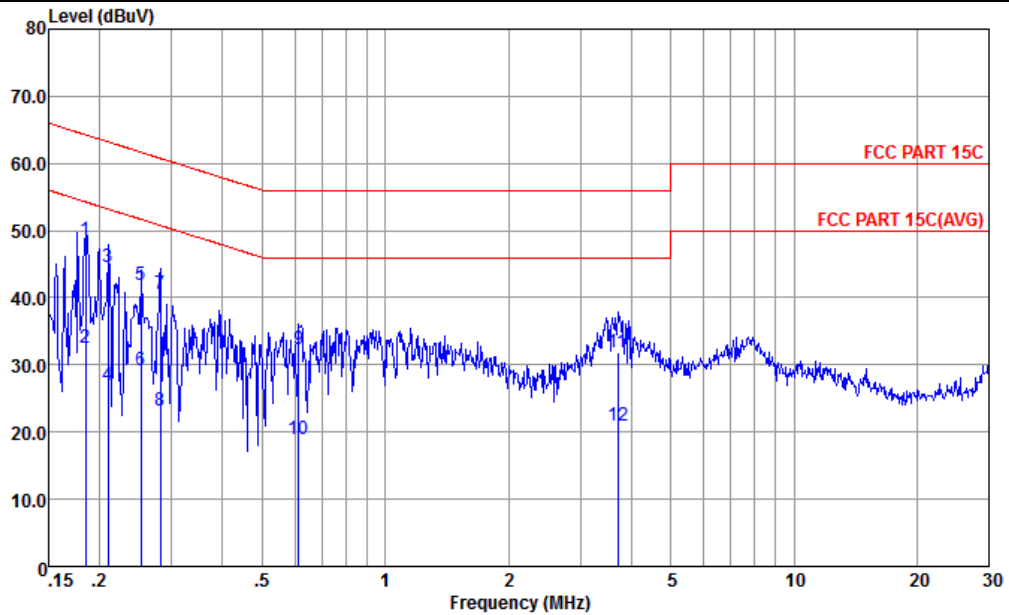


Site : CO01-KS  
 Condition : FCC PART 15C LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.184	48.53	-15.75	64.28	38.10	0.03	10.40	QP
2	0.184	32.53	-21.75	54.28	22.10	0.03	10.40	Average
3	0.209	44.60	-18.63	63.23	34.20	0.04	10.36	QP
4	0.209	27.00	-26.23	53.23	16.60	0.04	10.36	Average
5	0.252	41.89	-19.80	61.69	31.50	0.06	10.33	QP
6	0.252	29.29	-22.40	51.69	18.90	0.06	10.33	Average
7	0.282	40.58	-20.18	60.76	30.19	0.07	10.32	QP
8	0.282	23.28	-27.48	50.76	12.89	0.07	10.32	Average
9	0.614	32.24	-23.76	56.00	21.89	0.11	10.24	QP
10	0.614	18.94	-27.06	46.00	8.59	0.11	10.24	Average
11	3.700	31.91	-24.09	56.00	21.50	0.16	10.25	QP
12	3.700	21.01	-24.99	46.00	10.60	0.16	10.25	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

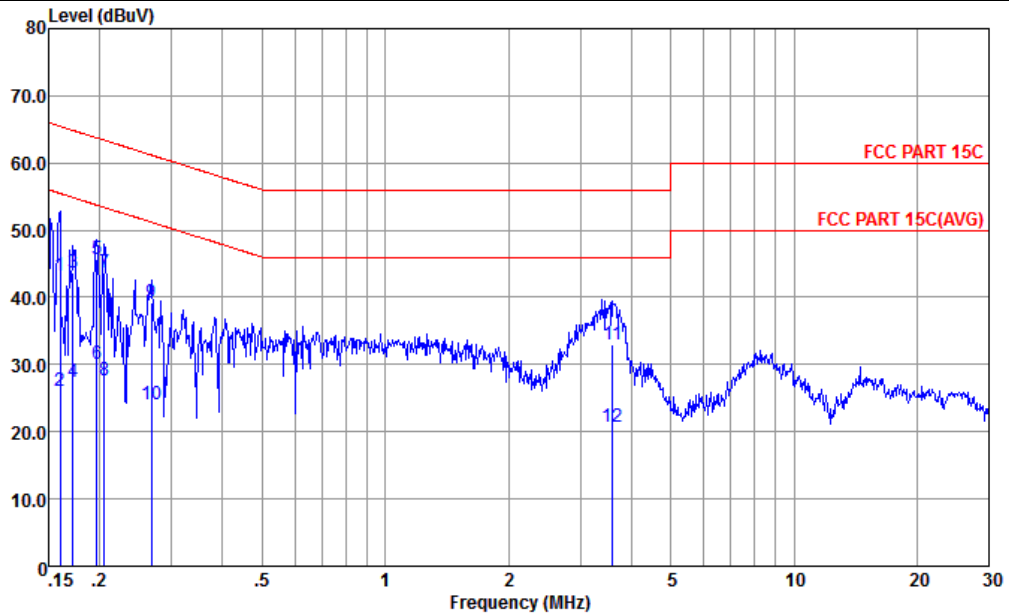

Site : CO01-KS  
Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	43.16	-22.31	65.47	32.60	0.11	10.45	QP
2	0.160	26.16	-29.31	55.47	15.60	0.11	10.45	Average
3	0.172	43.73	-21.13	64.86	33.20	0.11	10.42	QP
4	0.172	27.33	-27.53	54.86	16.80	0.11	10.42	Average
5 *	0.197	45.57	-18.19	63.76	35.10	0.10	10.37	QP
6	0.197	30.07	-23.69	53.76	19.60	0.10	10.37	Average
7	0.205	43.66	-19.74	63.40	33.20	0.10	10.36	QP
8	0.205	27.66	-25.74	53.40	17.20	0.10	10.36	Average
9	0.267	39.32	-21.88	61.20	28.90	0.10	10.32	QP
10	0.267	24.02	-27.18	51.20	13.60	0.10	10.32	Average
11	3.603	33.01	-22.99	56.00	22.60	0.16	10.25	QP
12	3.603	20.71	-25.29	46.00	10.30	0.16	10.25	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



# Appendix B. Radiated Spurious Emission

## 2.4GHz 2400~2483.5MHz

### WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
CDD 1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.56	58.72	-15.28	74	55.6	32.88	7.1	36.86	216	194	P	H
		2389.95	49.9	-4.1	54	46.78	32.88	7.1	36.86	216	194	A	H
		2412	110.43	-	-	107.25	32.9	7.13	36.85	216	194	P	H
		2412	103.7	-	-	100.52	32.9	7.13	36.85	216	194	A	H
		2389.95	64.29	-9.71	74	61.17	32.88	7.1	36.86	311	243	P	V
		2389.95	52.67	-1.33	54	49.55	32.88	7.1	36.86	311	243	A	V
		2412	121.07	-	-	117.89	32.9	7.13	36.85	311	243	P	V
		2412	114.85	-	-	111.67	32.9	7.13	36.85	311	243	A	V
802.11b CH 06 2437MHz		2389.95	54.32	-19.68	74	51.2	32.88	7.1	36.86	121	189	P	H
		2389.95	44.34	-9.66	54	41.22	32.88	7.1	36.86	121	189	A	H
		2438	120.64	-	-	117.35	32.94	7.19	36.84	121	189	P	H
		2436	114.16	-	-	110.9	32.92	7.19	36.85	121	189	A	H
		2483.62	61.43	-12.57	74	58.02	32.98	7.25	36.82	121	189	P	H
		2483.5	50.92	-3.08	54	47.51	32.98	7.25	36.82	121	189	A	H
		2389.82	57.4	-16.6	74	54.28	32.88	7.1	36.86	291	278	P	V
		2389.95	46.82	-7.18	54	43.7	32.88	7.1	36.86	291	278	A	V
		2436	114.19	-	-	110.93	32.92	7.19	36.85	291	278	P	V
		2436	107.97	-	-	104.71	32.92	7.19	36.85	291	278	A	V
	2484.88	61.14	-12.86	74	57.73	32.98	7.25	36.82	291	278	P	V	
	2483.5	49.56	-4.44	54	46.15	32.98	7.25	36.82	291	278	A	V	



<b>802.11b</b> <b>CH 11</b> <b>2462MHz</b>		2483.5	57.17	-16.83	74	53.76	32.98	7.25	36.82	326	300	P	H
		2484.76	49.37	-4.63	54	45.96	32.98	7.25	36.82	326	300	A	H
		2462	110.62	-	-	107.27	32.96	7.22	36.83	326	300	P	H
		2462	107.44	-	-	104.09	32.96	7.22	36.83	326	300	A	H
		2484.28	56.91	-17.09	74	53.5	32.98	7.25	36.82	198	78	P	V
		2483.5	50.64	-3.36	54	47.23	32.98	7.25	36.82	198	78	A	V
		2462	110.6	-	-	107.25	32.96	7.22	36.83	198	78	P	V
		2462	107.47	-	-	104.12	32.96	7.22	36.83	198	78	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. CDD 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. CDD 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		2389.95	65.39	-8.61	74	62.27	32.88	7.1	36.86	304	309	P	H
		2389.95	52.76	-1.24	54	49.64	32.88	7.1	36.86	304	309	A	H
		2414	108.42	-	-	105.24	32.9	7.13	36.85	304	309	P	H
		2414	101.8	-	-	98.62	32.9	7.13	36.85	304	309	A	H
		2389.95	65.59	-8.41	74	62.47	32.88	7.1	36.86	307	103	P	V
		2389.95	52.87	-1.13	54	49.75	32.88	7.1	36.86	307	103	A	V
		2412	110.02	-	-	106.84	32.9	7.13	36.85	307	103	P	V
		2412	103.31	-	-	100.13	32.9	7.13	36.85	307	103	A	V
802.11g CH 02 2417MHz		2389.95	63.66	-10.34	74	60.54	32.88	7.1	36.86	303	310	P	H
		2389.95	49.95	-4.05	54	46.83	32.88	7.1	36.86	303	310	A	H
		2422	110.21	-	-	106.98	32.92	7.16	36.85	303	310	P	H
		2420	103.87	-	-	100.64	32.92	7.16	36.85	303	310	A	H
		2389.95	63.6	-10.4	74	60.48	32.88	7.1	36.86	271	54	P	V
		2389.95	52.35	-1.65	54	49.23	32.88	7.1	36.86	271	54	A	V
		2418	111.16	-	-	107.95	32.9	7.16	36.85	271	54	P	V
		2418	104.77	-	-	101.56	32.9	7.16	36.85	271	54	A	V
802.11g CH 06 2437MHz		2389.82	57.43	-16.57	74	54.31	32.88	7.1	36.86	153	11	P	H
		2389.82	43.77	-10.23	54	40.65	32.88	7.1	36.86	153	11	A	H
		2483.68	63.74	-10.26	74	60.33	32.98	7.25	36.82	153	11	P	H
		2483.5	51.16	-2.84	54	47.75	32.98	7.25	36.82	153	11	A	H
		2438	111.31	-	-	108.02	32.94	7.19	36.84	153	11	P	H
		2438	104.57	-	-	101.28	32.94	7.19	36.84	153	11	A	H
		2389.95	56.52	-17.48	74	53.4	32.88	7.1	36.86	176	101	P	V
		2389.95	43.94	-10.06	54	40.82	32.88	7.1	36.86	176	101	A	V
		2483.56	62.47	-11.53	74	59.06	32.98	7.25	36.82	176	101	P	V
		2483.92	48.94	-5.06	54	45.53	32.98	7.25	36.82	176	101	A	V
		2438	111.42	-	-	108.13	32.94	7.19	36.84	176	101	P	V
		2438	104.7	-	-	101.41	32.94	7.19	36.84	176	101	A	V



802.11g CH 09 2452MHz		2484.1	68.04	-5.96	74	64.63	32.98	7.25	36.82	330	312	P	H
		2483.5	52.45	-1.55	54	49.04	32.98	7.25	36.82	330	312	A	H
		2456	110.29	-	-	106.94	32.96	7.22	36.83	330	312	P	H
		2456	103.37	-	-	100.02	32.96	7.22	36.83	330	312	A	H
		2485	68.72	-5.28	74	65.31	32.98	7.25	36.82	217	64	P	V
		2485.18	52.06	-1.94	54	48.65	32.98	7.25	36.82	217	64	A	V
		2452	111.87	-	-	108.58	32.94	7.19	36.84	217	64	P	V
		2452	105.35	-	-	102.06	32.94	7.19	36.84	217	64	A	V
802.11g CH 10 2457MHz		2483.5	70.54	-3.46	74	67.13	32.98	7.25	36.82	329	309	P	H
		2483.5	52.84	-1.16	54	49.43	32.98	7.25	36.82	329	309	A	H
		2456	108.87	-	-	105.52	32.96	7.22	36.83	329	309	P	H
		2456	102.17	-	-	98.82	32.96	7.22	36.83	329	309	A	H
		2486.2	63.7	-10.3	74	60.29	32.98	7.25	36.82	247	90	P	V
		2485.24	48.74	-5.26	54	45.33	32.98	7.25	36.82	247	90	A	V
		2458	107.51	-	-	104.16	32.96	7.22	36.83	247	90	P	V
		2456	102.02	-	-	98.67	32.96	7.22	36.83	247	90	A	V
802.11g CH 11 2462MHz		2483.62	66.99	-7.01	74	63.58	32.98	7.25	36.82	100	30	P	H
		2483.5	52.63	-1.37	54	49.22	32.98	7.25	36.82	100	30	A	H
		2460	106.89	-	-	103.54	32.96	7.22	36.83	100	30	P	H
		2460	100.26	-	-	96.91	32.96	7.22	36.83	100	30	A	H
		2483.74	67.08	-6.92	74	63.67	32.98	7.25	36.82	322	108	P	V
		2483.62	50.72	-3.28	54	47.31	32.98	7.25	36.82	322	108	A	V
		2462	108.91	-	-	105.56	32.96	7.22	36.83	322	108	P	V
		2462	101.8	-	-	98.45	32.96	7.22	36.83	322	108	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. CDD 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4830	40.29	-33.71	74	61.22	34.2	10.25	65.38	300	0	P	H
		4830	41.11	-32.89	74	62.04	34.2	10.25	65.38	100	0	P	V
802.11g CH 02 2417MHz		4830	40.39	-33.61	74	61.32	34.2	10.25	65.38	300	0	P	H
		7260	47.39	-26.61	74	64.58	35.85	12.72	65.76	300	0	P	H
		4830	40.74	-33.26	74	61.67	34.2	10.25	65.38	100	0	P	V
802.11g CH 06 2437MHz		7245	48.64	-25.36	74	65.77	35.85	12.72	65.7	100	0	P	V
		4875	41.65	-32.35	74	62.55	34.23	10.29	65.42	300	0	P	H
		7305	51.01	-22.99	74	68.34	35.86	12.72	65.91	337	216	P	H
		7305	40.76	-13.24	54	58.09	35.86	12.72	65.91	337	216	A	H
		4875	41.46	-32.54	74	62.36	34.23	10.29	65.42	100	0	P	V
802.11g CH 09 2452MHz		7305	47.82	-26.18	74	65.15	35.86	12.72	65.91	100	0	P	V
		4905	41.38	-32.62	74	62.23	34.25	10.34	65.44	300	0	P	H
		7356	44.33	-29.67	74	61.79	35.87	12.73	66.06	300	0	P	H
		4904	40.41	-33.59	74	61.28	34.25	10.32	65.44	100	0	P	V
802.11g CH 10 2457MHz		7350	46.18	-27.82	74	63.65	35.87	12.72	66.06	100	0	P	V
		4920	40.52	-33.48	74	61.37	34.26	10.34	65.45	300	0	P	H
		7371	42.42	-31.58	74	59.92	35.88	12.73	66.11	300	0	P	H
		4920	41.9	-32.1	74	62.75	34.26	10.34	65.45	100	0	P	V
802.11g CH 11 2462MHz		7371	41.87	-32.13	74	59.37	35.88	12.73	66.11	100	0	P	V
		4920	40.93	-33.07	74	61.78	34.26	10.34	65.45	300	0	P	H
		7380	44.35	-29.65	74	61.85	35.88	12.73	66.11	300	0	P	H
		4920	40.89	-33.11	74	61.74	34.26	10.34	65.45	100	0	P	V
Remark		7380	44.72	-29.28	74	62.22	35.88	12.73	66.11	100	0	P	V
	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Band Edge @ 3m)

WIFI Ant. CDD 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE20 Full CH 01 2412MHz		2389.69	65.95	-8.05	74	62.83	32.88	7.1	36.86	304	310	P	H
		2389.95	52.64	-1.36	54	49.52	32.88	7.1	36.86	304	310	A	H
		2414	111.01	-	-	107.83	32.9	7.13	36.85	304	310	P	H
		2412	100.15	-	-	96.97	32.9	7.13	36.85	304	310	A	H
		2389.82	63.9	-10.1	74	60.78	32.88	7.1	36.86	275	103	P	V
		2389.95	49.66	-4.34	54	46.54	32.88	7.1	36.86	275	103	A	V
		2414	110.98	-	-	107.8	32.9	7.13	36.85	275	103	P	V
		2414	102.15	-	-	98.97	32.9	7.13	36.85	275	103	A	V
802.11ax HE20 Full CH 02 2417MHz		2389.3	64.85	-9.15	74	61.73	32.88	7.1	36.86	301	309	P	H
		2389.3	48.44	-5.56	54	45.32	32.88	7.1	36.86	301	309	A	H
		2418	112.11	-	-	108.9	32.9	7.16	36.85	301	309	P	H
		2420	103.6	-	-	100.37	32.92	7.16	36.85	301	309	A	H
		2389.82	64.64	-9.36	74	61.52	32.88	7.1	36.86	227	98	P	V
		2389.95	52.82	-1.18	54	49.7	32.88	7.1	36.86	227	98	A	V
		2416	113.7	-	-	110.49	32.9	7.16	36.85	227	98	P	V
		2416	103.47	-	-	100.26	32.9	7.16	36.85	227	98	A	V
802.11ax HE20 Full CH 06 2437MHz		2389.82	54.76	-19.24	74	51.64	32.88	7.1	36.86	269	307	P	H
		2389.95	42.55	-11.45	54	39.43	32.88	7.1	36.86	269	307	A	H
		2483.56	62.2	-11.8	74	58.79	32.98	7.25	36.82	269	307	P	H
		2483.5	48.32	-5.68	54	44.91	32.98	7.25	36.82	269	307	A	H
		2438	112.47	-	-	109.18	32.94	7.19	36.84	269	307	P	H
		2436	102.7	-	-	99.44	32.92	7.19	36.85	269	307	A	H
		2389.82	54.73	-19.27	74	51.61	32.88	7.1	36.86	358	87	P	V
		2389.95	41.14	-12.86	54	38.02	32.88	7.1	36.86	358	87	A	V
		2483.86	60.27	-13.73	74	56.86	32.98	7.25	36.82	358	87	P	V
		2483.74	45.46	-8.54	54	42.05	32.98	7.25	36.82	358	87	A	V
		2440	112.22	-	-	108.93	32.94	7.19	36.84	358	87	P	V
		2436	102.84	-	-	99.58	32.92	7.19	36.85	358	87	A	V



<b>802.11ax</b> <b>HE20 Full</b> <b>CH 09</b> <b>2452MHz</b>		2483.62	63.6	-10.4	74	60.19	32.98	7.25	36.82	330	312	P	H
		2483.5	50.92	-3.08	54	47.51	32.98	7.25	36.82	330	312	A	H
		2458	110.61	-	-	107.26	32.96	7.22	36.83	330	312	P	H
		2454	101.92	-	-	98.57	32.96	7.22	36.83	330	312	A	H
		2484.1	64.88	-9.12	74	61.47	32.98	7.25	36.82	245	99	P	V
		2483.98	51.17	-2.83	54	47.76	32.98	7.25	36.82	245	99	A	V
		2452	112.92	-	-	109.63	32.94	7.19	36.84	245	99	P	V
		2452	103.06	-	-	99.77	32.94	7.19	36.84	245	99	A	V
<b>802.11ax</b> <b>HE20 Full</b> <b>CH 10</b> <b>2457MHz</b>		2484.7	68.42	-5.58	74	65.01	32.98	7.25	36.82	331	311	P	H
		2483.5	52.51	-1.49	54	49.1	32.98	7.25	36.82	331	311	A	H
		2458	111.55	-	-	108.2	32.96	7.22	36.83	331	311	P	H
		2456	100.52	-	-	97.17	32.96	7.22	36.83	331	311	A	H
		2484.28	64.76	-9.24	74	61.35	32.98	7.25	36.82	245	96	P	V
		2483.68	47.87	-6.13	54	44.46	32.98	7.25	36.82	245	96	A	V
		2456	109.8	-	-	106.45	32.96	7.22	36.83	245	96	P	V
		2458	100.73	-	-	97.38	32.96	7.22	36.83	245	96	A	V
<b>8802.11ax</b> <b>HE20 Full</b> <b>CH 11</b> <b>2462MHz</b>		2483.56	70.57	-3.43	74	67.16	32.98	7.25	36.82	267	304	P	H
		2483.5	52.15	-1.85	54	48.74	32.98	7.25	36.82	267	304	A	H
		2460	109.66	-	-	106.31	32.96	7.22	36.83	267	304	P	H
		2460	99.58	-	-	96.23	32.96	7.22	36.83	267	304	A	H
		2484.16	64.03	-9.97	74	60.62	32.98	7.25	36.82	250	95	P	V
		2483.74	49.35	-4.65	54	45.94	32.98	7.25	36.82	250	95	A	V
		2460	107.73	-	-	104.38	32.96	7.22	36.83	250	95	P	V
		2460	98.71	-	-	95.36	32.96	7.22	36.83	250	95	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

WIFI Ant. CDD 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE20 Full		4830	40.5	-33.5	74	61.43	34.2	10.25	65.38	300	0	P	H
CH 01		4830	40.34	-33.66	74	61.27	34.2	10.25	65.38	100	0	P	V
2412MHz													
802.11ax HE20 Full		4830	40.26	-33.74	74	61.19	34.2	10.25	65.38	300	0	P	H
CH 02		7251	45.06	-28.94	74	62.25	35.85	12.72	65.76	300	0	P	H
2417MHz		4834	40.07	-33.93	74	61	34.21	10.25	65.39	100	0	P	V
		7251	46.77	-27.23	74	63.96	35.85	12.72	65.76	100	0	P	V
802.11ax HE20 Full		4875	40.76	-33.24	74	61.66	34.23	10.29	65.42	300	0	P	H
CH 06		7305	46.78	-27.22	74	64.11	35.86	12.72	65.91	300	0	P	H
2437MHz		4875	40.47	-33.53	74	61.37	34.23	10.29	65.42	100	0	P	V
		7320	49.12	-24.88	74	66.49	35.87	12.72	65.96	100	0	P	V
802.11ax HE20 Full		4904	40.54	-33.46	74	61.41	34.25	10.32	65.44	300	0	P	H
CH 09		7350	43.27	-30.73	74	60.74	35.87	12.72	66.06	300	0	P	H
2452MHz		4905	41.31	-32.69	74	62.16	34.25	10.34	65.44	100	0	P	V
		7356	43.53	-30.47	74	60.99	35.87	12.73	66.06	100	0	P	V
802.11ax HE20 Full		4920	40.74	-33.26	74	61.59	34.26	10.34	65.45	300	0	P	H
CH 10		7371	43.65	-30.35	74	61.15	35.88	12.73	66.11	300	0	P	H
2457MHz		4920	40.63	-33.37	74	61.48	34.26	10.34	65.45	100	0	P	V
		7371	43.69	-30.31	74	61.19	35.88	12.73	66.11	100	0	P	V
802.11ax HE20 Full		4920	40.78	-33.22	74	61.63	34.26	10.34	65.45	300	0	P	H
CH 11		7380	41.99	-32.01	74	59.49	35.88	12.73	66.11	300	0	P	H
2462MHz		4920	40.64	-33.36	74	61.49	34.26	10.34	65.45	100	0	P	V
		7380	43.16	-30.84	74	60.66	35.88	12.73	66.11	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)**

WIFI Ant. CDD 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE20 Partial 106/53 CH 01 2412MHz		2389.82	56.9	-17.1	74	53.78	32.88	7.1	36.86	308	305	P	H
		2389.95	41.56	-12.44	54	38.44	32.88	7.1	36.86	308	305	A	H
		2404	110.32	-	-	107.14	32.9	7.13	36.85	308	305	P	H
		2404	101.21	-	-	98.03	32.9	7.13	36.85	308	305	A	H
		2389.95	59.97	-14.03	74	56.85	32.88	7.1	36.86	235	89	P	V
		2389.95	43.45	-10.55	54	40.33	32.88	7.1	36.86	235	89	A	V
		2410	110.82	-	-	107.64	32.9	7.13	36.85	235	89	P	V
		2410	102.29	-	-	99.11	32.9	7.13	36.85	235	89	A	V
802.11ax HE20 Partial 106/54 CH 11 2462MHz		2483.92	61.35	-12.65	74	57.94	32.98	7.25	36.82	156	301	P	H
		2483.5	43.69	-10.31	54	40.28	32.98	7.25	36.82	156	301	A	H
		2464	106.28	-	-	102.93	32.96	7.22	36.83	156	301	P	H
		2464	97.96	-	-	94.61	32.96	7.22	36.83	156	301	A	H
		2483.5	57.66	-16.34	74	54.25	32.98	7.25	36.82	196	93	P	V
		2483.5	42.31	-11.69	54	38.9	32.98	7.25	36.82	196	93	A	V
		2472	108.39	-	-	105.01	32.98	7.22	36.82	196	93	P	V
		2464	98.79	-	-	95.44	32.96	7.22	36.83	196	93	A	V





2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 106 (Harmonic @ 3m)

WIFI Ant. CDD 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/53 CH 01 2412MHz		4830	39.82	-34.18	74	60.75	34.2	10.25	65.38	300	0	P	H
		4830	40.29	-33.71	74	61.22	34.2	10.25	65.38	100	0	P	V
802.11ax HE20 Partial 106/54 CH 11 2462MHz		4920	40.5	-33.5	74	61.35	34.26	10.34	65.45	300	0	P	H
		7380	43.24	-30.76	74	60.74	35.88	12.73	66.11	300	0	P	H
		4920	40.45	-33.55	74	61.3	34.26	10.34	65.45	100	0	P	V
		7380	42.48	-31.52	74	59.98	35.88	12.73	66.11	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Band Edge @ 3m)

WIFI Ant. TXBF 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE20 Full CH 01 2412MHz		2389.69	65.66	-8.34	74	62.54	32.88	7.1	36.86	306	314	P	H
	!	2389.95	52.59	-1.41	54	49.47	32.88	7.1	36.86	306	314	A	H
	*	2412	110.52	-	-	107.34	32.9	7.13	36.85	306	314	P	H
	*	2412	96.76	-	-	93.58	32.9	7.13	36.85	306	314	A	H
		2389.3	57.34	-16.66	74	54.22	32.88	7.1	36.86	220	122	P	V
		2389.3	41.23	-12.77	54	38.11	32.88	7.1	36.86	220	122	A	V
	*	2416	111.21	-	-	108	32.9	7.16	36.85	220	122	P	V
802.11ax HE20 Full CH 02 2417MHz	*	2416	97.57	-	-	94.36	32.9	7.16	36.85	220	122	A	V
		2389.95	52.87	-21.13	74	49.75	32.88	7.1	36.86	302	299	P	H
		2389.95	39.12	-14.88	54	36	32.88	7.1	36.86	302	299	A	H
	*	2424	110.1	-	-	106.87	32.92	7.16	36.85	302	299	P	H
	*	2422	91.59	-	-	88.36	32.92	7.16	36.85	302	299	A	H
		2387.09	51.24	-22.76	74	48.12	32.88	7.1	36.86	100	27	P	V
		2383.19	38.83	-15.17	54	35.74	32.86	7.1	36.87	100	27	A	V
802.11ax HE20 Full CH 06 2437MHz	*	2412	105.92	-	-	102.74	32.9	7.13	36.85	100	27	P	V
	*	2414	89.85	-	-	86.67	32.9	7.13	36.85	100	27	A	V
		2389.69	52.24	-21.76	74	49.12	32.88	7.1	36.86	295	314	P	H
		2389.56	39.99	-14.01	54	36.87	32.88	7.1	36.86	295	314	A	H
	*	2436	112.46	-	-	109.2	32.92	7.19	36.85	295	314	P	H
	*	2434	98.64	-	-	95.41	32.92	7.16	36.85	295	314	A	H
		2483.56	57.45	-16.55	74	54.04	32.98	7.25	36.82	295	314	P	H
		2483.8	43.77	-10.23	54	40.36	32.98	7.25	36.82	295	314	A	H
		2384.23	50.12	-23.88	74	47.03	32.86	7.1	36.87	173	124	P	V
		2389.82	39.17	-14.83	54	36.05	32.88	7.1	36.86	173	124	A	V
	*	2436	114.37	-	-	111.11	32.92	7.19	36.85	173	124	P	V
*	2434	98.89	-	-	95.66	32.92	7.16	36.85	173	124	A	V	
	2483.86	55.41	-18.59	74	52	32.98	7.25	36.82	173	124	P	V	
	2483.5	43.28	-10.72	54	39.87	32.98	7.25	36.82	173	124	A	V	



802.11ax HE20 Full CH 10 2457MHz		2483.5	70.66	-3.34	74	67.25	32.98	7.25	36.82	332	311	P	H
		2484.52	49.62	-4.38	54	46.21	32.98	7.25	36.82	332	311	A	H
	*	2460	109.92	-	-	106.57	32.96	7.22	36.83	332	311	P	H
	*	2460	90.14	-	-	86.79	32.96	7.22	36.83	332	311	A	H
		2483.74	69.32	-4.68	74	65.91	32.98	7.25	36.82	100	242	P	V
		2483.74	44.95	-9.05	54	41.54	32.98	7.25	36.82	100	242	A	V
	*	2460	107.87	-	-	104.52	32.96	7.22	36.83	100	242	P	V
8802.11ax HE20 Full CH 11 2462MHz	*	2462	109.04	-	-	105.69	32.96	7.22	36.83	100	22	P	H
	*	2460	96.12	-	-	92.77	32.96	7.22	36.83	100	22	A	H
		2483.62	65.13	-8.87	74	61.72	32.98	7.25	36.82	100	22	P	H
	!	2484.16	50.91	-3.09	54	47.5	32.98	7.25	36.82	100	22	A	H
	*	2462	110.5	-	-	107.15	32.96	7.22	36.83	195	123	P	V
	*	2460	98.41	-	-	95.06	32.96	7.22	36.83	195	123	A	V
		2484.04	65.72	-8.28	74	62.31	32.98	7.25	36.82	195	123	P	V
!	2483.56	51.32	-2.68	54	47.91	32.98	7.25	36.82	195	123	A	V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

WIFI Ant. TXBF 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE20 Full		4830	40.1	-33.9	74	61.03	34.2	10.25	65.38	300	0	P	H
CH 01 2412MHz		4830	40.55	-33.45	74	61.48	34.2	10.25	65.38	100	0	P	V
802.11ax HE20 Full		4834	40.1	-33.9	74	61.03	34.21	10.25	65.39	300	0	P	H
CH 02 2417MHz		4834	40.55	-33.45	74	61.48	34.21	10.25	65.39	100	0	P	V
		7251	41.83	-32.17	74	59.02	35.85	12.72	65.76	300	0	P	H
		7251	42.35	-31.65	74	59.54	35.85	12.72	65.76	100	0	P	V
802.11ax HE20 Full		4875	39.44	-34.56	74	60.34	34.23	10.29	65.42	300	0	P	H
CH 06 2437MHz		4875	40.45	-33.55	74	61.35	34.23	10.29	65.42	100	0	P	V
		7305	42.18	-31.82	74	59.51	35.86	12.72	65.91	300	0	P	H
		7305	41.97	-32.03	74	59.3	35.86	12.72	65.91	100	0	P	V
802.11ax HE20 Full		4914	39.93	-34.07	74	60.78	34.25	10.34	65.44	300	0	P	H
CH 10 2457MHz		4914	41.33	-32.67	74	62.18	34.25	10.34	65.44	100	0	P	V
		7371	42.56	-31.44	74	60.06	35.88	12.73	66.11	300	0	P	H
		7371	42.23	-31.77	74	59.73	35.88	12.73	66.11	100	0	P	V
802.11ax HE20 Full		4920	39.63	-34.37	74	60.48	34.26	10.34	65.45	300	0	P	H
CH 11 2462MHz		4920	40.83	-33.17	74	61.68	34.26	10.34	65.45	100	0	P	V
		7380	42.26	-31.74	74	59.76	35.88	12.73	66.11	300	0	P	H
		7380	41.83	-32.17	74	59.33	35.88	12.73	66.11	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
2.4GHz WIFI 802.11g (LF)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Path, Preamp, Ant, Table, Peak, Pol. It contains 12 rows of test data for 2.4GHz WIFI 802.11g LF and a Remark section at the bottom.



Co-location

2.4GHz 2400~2483.5MHz

WIFI 802.11g&Part 96 LTE B48 CA\_48C (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
CDD 1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.56	63.85	-10.15	74	60.73	32.88	7.1	36.86	203	157	P	H
		2389.95	51.11	-2.89	54	47.99	32.88	7.1	36.86	203	157	A	H
		2410	109.35	-	-	106.17	32.9	7.13	36.85	203	157	P	H
		2416	102.22	-	-	99.01	32.9	7.16	36.85	203	157	A	H
		2389.56	64.8	-9.2	74	61.68	32.88	7.1	36.86	300	89	P	V
		2389.95	51.53	-2.47	54	48.41	32.88	7.1	36.86	300	89	A	V
		2414	107.74	-	-	104.56	32.9	7.13	36.85	300	89	P	V
		2414	100.88	-	-	97.7	32.9	7.13	36.85	300	89	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g&Part 96 LTE B48 CA\_48C (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
CDD 1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11g CH 01 2412MHz		4830	40.57	-33.43	74	61.5	34.2	10.25	65.38	300	0	P	H
		4830	39.62	-34.38	74	60.55	34.2	10.25	65.38	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
CDD 1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





## Appendix C. Radiated Spurious Emission Plots

### Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11b CH01 2412MHz																																																																	
CDD 1+2	Horizontal	Fundamental																																																																
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : RSM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>-58.72</td> <td>-15.28</td> <td>74.00</td> <td>55.60</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>216</td> <td>194 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1	2389.56	-58.72	-15.28	74.00	55.60	32.88	7.10	36.86	216	194 Peak	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : RSM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>110.43</td> <td>36.43</td> <td>74.00</td> <td>107.25</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>216</td> <td>194 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1	2412.00	110.43	36.43	74.00	107.25	32.90	7.13	36.85	216	194 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																									
1	2389.56	-58.72	-15.28	74.00	55.60	32.88	7.10	36.86	216	194 Peak	HORIZONTAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																									
1	2412.00	110.43	36.43	74.00	107.25	32.90	7.13	36.85	216	194 Peak	HORIZONTAL																																																							
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : RSM 1000.000kHz VBR 0.0100kHz SRT Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>49.90</td> <td>-4.10</td> <td>54.00</td> <td>48.78</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>216</td> <td>194 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1	2389.95	49.90	-4.10	54.00	48.78	32.88	7.10	36.86	216	194 Average	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : RSM 1000.000kHz VBR 0.0100kHz SRT Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.70</td> <td>49.70</td> <td>54.00</td> <td>100.52</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>216</td> <td>194 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1	2412.00	103.70	49.70	54.00	100.52	32.90	7.13	36.85	216	194 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																									
1	2389.95	49.90	-4.10	54.00	48.78	32.88	7.10	36.86	216	194 Average	HORIZONTAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																									
1	2412.00	103.70	49.70	54.00	100.52	32.90	7.13	36.85	216	194 Average	HORIZONTAL																																																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
ANT	802.11b CH01 2412MHz																																																																					
CDD 1+2	Vertical	Fundamental																																																																				
Peak	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity            IMEI : #2            Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>64.29</td> <td>-9.71</td> <td>74.00</td> <td>61.17</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>311</td> <td>243 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2389.95	64.29	-9.71	74.00	61.17	32.88	7.10	36.86	311	243 Peak	VERTICAL	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity            IMEI : #2            Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>121.07</td> <td>47.07</td> <td>74.00</td> <td>117.89</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>311</td> <td>243 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2412.00	121.07	47.07	74.00	117.89	32.90	7.13	36.85	311	243 Peak	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																														
1	2389.95	64.29	-9.71	74.00	61.17	32.88	7.10	36.86	311	243 Peak	VERTICAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																														
1	2412.00	121.07	47.07	74.00	117.89	32.90	7.13	36.85	311	243 Peak	VERTICAL																																																											
Avg.	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity            IMEI : #2            Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.67</td> <td>-11.33</td> <td>54.00</td> <td>49.55</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>311</td> <td>243 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2389.95	52.67	-11.33	54.00	49.55	32.88	7.10	36.86	311	243 Average	VERTICAL	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity            IMEI : #2            Powersetting : 78</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>114.85</td> <td>60.85</td> <td>54.00</td> <td>111.67</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>311</td> <td>243 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2412.00	114.85	60.85	54.00	111.67	32.90	7.13	36.85	311	243 Average	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																														
1	2389.95	52.67	-11.33	54.00	49.55	32.88	7.10	36.86	311	243 Average	VERTICAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																														
1	2412.00	114.85	60.85	54.00	111.67	32.90	7.13	36.85	311	243 Average	VERTICAL																																																											

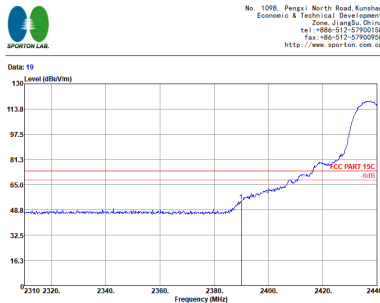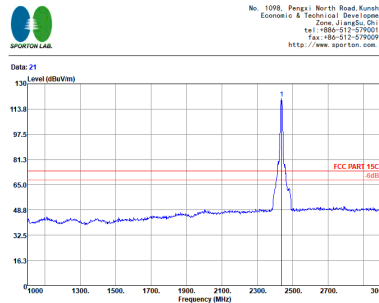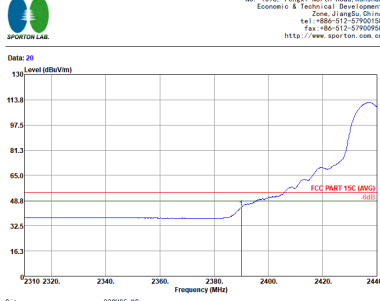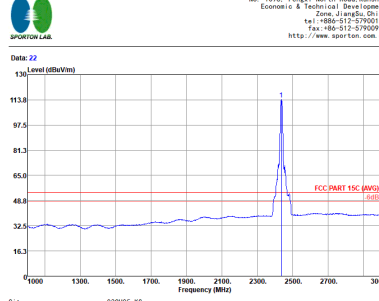

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11b CH06 2437MHz - L																																																																			
CDD 1+2	Horizontal	Fundamental																																																																		
Peak	 <p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL            Project : R88 1000.000kHz VBR-3000.000kHz SRT:Auto            Mode : FR230408C            Plane : 2            Full-directivity            IMEI : 821            Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>54.32</td> <td>-19.68</td> <td>74.00</td> <td>51.20</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>121</td> <td>189 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 2389.95	54.32	-19.68	74.00	51.20	32.88	7.10	36.86	121	189 Peak	HORIZONTAL	 <p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL            Project : R88 1000.000kHz VBR-3000.000kHz SRT:Auto            Mode : FR230408C            Plane : 2            Full-directivity            IMEI : 821            Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2438.00</td> <td>120.64</td> <td>46.64</td> <td>74.00</td> <td>117.35</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>121</td> <td>189 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 2438.00	120.64	46.64	74.00	117.35	32.94	7.19	36.84	121	189 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 2389.95	54.32	-19.68	74.00	51.20	32.88	7.10	36.86	121	189 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 2438.00	120.64	46.64	74.00	117.35	32.94	7.19	36.84	121	189 Peak	HORIZONTAL																																																										
Avg.	 <p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL            Project : R88 1000.000kHz VBR-3000.000kHz SRT:Auto            Mode : FR230408C            Plane : 2            Full-directivity            IMEI : 821            Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>44.34</td> <td>-9.66</td> <td>54.00</td> <td>41.22</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>121</td> <td>189 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 2389.95	44.34	-9.66	54.00	41.22	32.88	7.10	36.86	121	189 Average	HORIZONTAL	 <p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL            Project : R88 1000.000kHz VBR-3000.000kHz SRT:Auto            Mode : FR230408C            Plane : 2            Full-directivity            IMEI : 821            Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2438.00</td> <td>114.16</td> <td>60.16</td> <td>54.00</td> <td>110.90</td> <td>32.92</td> <td>7.19</td> <td>36.85</td> <td>121</td> <td>189 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 2438.00	114.16	60.16	54.00	110.90	32.92	7.19	36.85	121	189 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 2389.95	44.34	-9.66	54.00	41.22	32.88	7.10	36.86	121	189 Average	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 2438.00	114.16	60.16	54.00	110.90	32.92	7.19	36.85	121	189 Average	HORIZONTAL																																																										



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																		
ANT	802.11b CH06 2437MHz - R																																		
CDD 1+2	Horizontal	Fundamental																																	
Peak	<p>Site : 032005-KS          Condition : FCC PART 15C 3e 3317.5M 75957 HORIZONTAL          Project : RBE 1000.000KHz VSW 3000.000KHz SW: Auto          Mode : (FR) 230408          Plane : 2          IMEI : Full-directivity          Powersetting : 86          87</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.02</td> <td>61.43</td> <td>-12.57</td> <td>74.00</td> <td>58.02</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>121</td> <td>189</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2437.02	61.43	-12.57	74.00	58.02	32.98	7.25	36.82	121	189	Peak	HORIZONTAL	Left blank
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																												
1	2437.02	61.43	-12.57	74.00	58.02	32.98	7.25	36.82	121	189	Peak	HORIZONTAL																							
Avg.	<p>Site : 032005-KS          Condition : FCC PART 15C (AVG) 3e 3317.5M 75957 HORIZONTAL          Project : RBE 1000.000KHz VSW 0.01000KHz SW: Auto          Mode : (FR) 230408          Plane : 2          IMEI : Full-directivity          Powersetting : 86          87</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.50</td> <td>50.92</td> <td>-3.08</td> <td>54.00</td> <td>47.51</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>121</td> <td>189</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2437.50	50.92	-3.08	54.00	47.51	32.98	7.25	36.82	121	189	Average	HORIZONTAL	Left blank
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																												
1	2437.50	50.92	-3.08	54.00	47.51	32.98	7.25	36.82	121	189	Average	HORIZONTAL																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																									
ANT	802.11b CH06 2437MHz - L																																																									
CDD 1+2	Vertical	Fundamental																																																								
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408 Plane : 2 JMEI : Full-directivity Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.82</td> <td>57.40</td> <td>-16.40</td> <td>74.00</td> <td>54.28</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>291 278 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg			1 2389.82	57.40	-16.40	74.00	54.28	32.88	7.10	36.86	291 278 Peak	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408 Plane : 2 JMEI : Full-directivity Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2436.00</td> <td>114.19</td> <td>40.19</td> <td>74.00</td> <td>110.93</td> <td>32.92</td> <td>7.19</td> <td>36.85</td> <td>291 278 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg			1 2436.00	114.19	40.19	74.00	110.93	32.92	7.19	36.85	291 278 Peak	VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																	
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																				
1 2389.82	57.40	-16.40	74.00	54.28	32.88	7.10	36.86	291 278 Peak	VERTICAL																																																	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																				
1 2436.00	114.19	40.19	74.00	110.93	32.92	7.19	36.85	291 278 Peak	VERTICAL																																																	
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.0100kHz SRT:Auto Mode : FR230408 Plane : 2 JMEI : Full-directivity Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>46.82</td> <td>-7.18</td> <td>54.00</td> <td>43.70</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>291 278 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg			1 2389.95	46.82	-7.18	54.00	43.70	32.88	7.10	36.86	291 278 Average	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.0100kHz SRT:Auto Mode : FR230408 Plane : 2 JMEI : Full-directivity Powersetting : 84</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2436.00</td> <td>107.97</td> <td>53.97</td> <td>54.00</td> <td>104.71</td> <td>32.92</td> <td>7.19</td> <td>36.85</td> <td>291 278 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg			1 2436.00	107.97	53.97	54.00	104.71	32.92	7.19	36.85	291 278 Average	VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																	
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																				
1 2389.95	46.82	-7.18	54.00	43.70	32.88	7.10	36.86	291 278 Average	VERTICAL																																																	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																				
1 2436.00	107.97	53.97	54.00	104.71	32.92	7.19	36.85	291 278 Average	VERTICAL																																																	



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																						
ANT	802.11b CH06 2437MHz - R																																						
CDD 1+2	Vertical	Fundamental																																					
Peak	<p>Site : 032005-KS          Condition : FCC PART 15C In 3317.5M 75957 VERTICAL          Project : RBE 1000.000KHz VSW 3000.000KHz SW:Auto          Mode : (FR)230408          Plane : V          IMEI : Full-directivity          PowerSetting : 06          06          82</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.88</td> <td>61.14</td> <td>-12.86</td> <td>74.00</td> <td>67.73</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>291</td> <td>278</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2484.88	61.14	-12.86	74.00	67.73	32.98	7.25	36.82	291	278	Peak	VERTICAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level Factor	Loss Factor																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2484.88	61.14	-12.86	74.00	67.73	32.98	7.25	36.82	291	278	Peak	VERTICAL																											
Avg.	<p>Site : 032005-KS          Condition : FCC PART 15C (AVG) In 3317.5M 75957 VERTICAL          Project : RBE 1000.000KHz VSW 0.01000KHz SW:Auto          Mode : (FR)230408          Plane : V          IMEI : Full-directivity          PowerSetting : 06          06          82</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>49.56</td> <td>-4.44</td> <td>54.00</td> <td>46.15</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>291</td> <td>278</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.50	49.56	-4.44	54.00	46.15	32.98	7.25	36.82	291	278	Average	VERTICAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level Factor	Loss Factor																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2483.50	49.56	-4.44	54.00	46.15	32.98	7.25	36.82	291	278	Average	VERTICAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH11 2462MHz																																																													
CDD 1+2	Horizontal	Fundamental																																																												
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>57.17</td> <td>-16.83</td> <td>74.00</td> <td>53.76</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>326</td> <td>300 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2483.50	57.17	-16.83	74.00	53.76	32.98	7.25	36.82	326	300 Peak HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>110.62</td> <td>36.62</td> <td>74.00</td> <td>107.27</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>326</td> <td>300 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2462.00	110.62	36.62	74.00	107.27	32.96	7.22	36.83	326	300 Peak HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 2483.50	57.17	-16.83	74.00	53.76	32.98	7.25	36.82	326	300 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 2462.00	110.62	36.62	74.00	107.27	32.96	7.22	36.83	326	300 Peak HORIZONTAL																																																					
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 0.0100kHz SRT Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2484.76</td> <td>49.37</td> <td>-4.63</td> <td>54.00</td> <td>45.96</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>326</td> <td>300 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2484.76	49.37	-4.63	54.00	45.96	32.98	7.25	36.82	326	300 Average HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 0.0100kHz SRT Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>107.44</td> <td>53.44</td> <td>54.00</td> <td>104.09</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>326</td> <td>300 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1 2462.00	107.44	53.44	54.00	104.09	32.96	7.22	36.83	326	300 Average HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 2484.76	49.37	-4.63	54.00	45.96	32.98	7.25	36.82	326	300 Average HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1 2462.00	107.44	53.44	54.00	104.09	32.96	7.22	36.83	326	300 Average HORIZONTAL																																																					





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11b CH11 2462MHz																																																																	
CDD 1+2	Vertical	Fundamental																																																																
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.28</td> <td>56.91</td> <td>-17.09</td> <td>74.00</td> <td>53.50</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>198</td> <td>78 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2484.28	56.91	-17.09	74.00	53.50	32.98	7.25	36.82	198	78 Peak	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>110.60</td> <td>36.60</td> <td>74.00</td> <td>107.25</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>198</td> <td>78 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2462.00	110.60	36.60	74.00	107.25	32.96	7.22	36.83	198	78 Peak	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2484.28	56.91	-17.09	74.00	53.50	32.98	7.25	36.82	198	78 Peak	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2462.00	110.60	36.60	74.00	107.25	32.96	7.22	36.83	198	78 Peak	VERTICAL																																																							
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.0100kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>50.04</td> <td>-2.36</td> <td>54.00</td> <td>47.23</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>198</td> <td>78 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2483.50	50.04	-2.36	54.00	47.23	32.98	7.25	36.82	198	78 Average	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.0100kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : 7 IMEI : 821 Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>107.47</td> <td>53.47</td> <td>54.00</td> <td>104.12</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>198</td> <td>78 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2462.00	107.47	53.47	54.00	104.12	32.96	7.22	36.83	198	78 Average	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2483.50	50.04	-2.36	54.00	47.23	32.98	7.25	36.82	198	78 Average	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2462.00	107.47	53.47	54.00	104.12	32.96	7.22	36.83	198	78 Average	VERTICAL																																																							



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11g CH01 2412MHz																																																																	
CDD 1+2	Horizontal	Fundamental																																																																
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 13 Plane : T Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>65.39</td> <td>-8.61</td> <td>74.00</td> <td>62.27</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>304</td> <td>309 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg	1	2389.95	65.39	-8.61	74.00	62.27	32.88	7.10	36.86	304	309 Peak	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 13 Plane : T Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>108.42</td> <td>34.42</td> <td>74.00</td> <td>105.34</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>304</td> <td>309 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg	1	2414.00	108.42	34.42	74.00	105.34	32.90	7.13	36.85	304	309 Peak	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg																																																									
1	2389.95	65.39	-8.61	74.00	62.27	32.88	7.10	36.86	304	309 Peak	HORIZONTAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg																																																									
1	2414.00	108.42	34.42	74.00	105.34	32.90	7.13	36.85	304	309 Peak	HORIZONTAL																																																							
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 13 Plane : T Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.76</td> <td>-1.24</td> <td>54.00</td> <td>49.64</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>304</td> <td>309 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg	1	2389.95	52.76	-1.24	54.00	49.64	32.88	7.10	36.86	304	309 Average	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 13 Plane : T Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>101.80</td> <td>47.80</td> <td>54.00</td> <td>98.62</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>304</td> <td>309 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg	1	2414.00	101.80	47.80	54.00	98.62	32.90	7.13	36.85	304	309 Average	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg																																																									
1	2389.95	52.76	-1.24	54.00	49.64	32.88	7.10	36.86	304	309 Average	HORIZONTAL																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	on	deg																																																									
1	2414.00	101.80	47.80	54.00	98.62	32.90	7.13	36.85	304	309 Average	HORIZONTAL																																																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH01 2412MHz																																																													
CDD 1+2	Vertical	Fundamental																																																												
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : #64</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>65.59</td> <td>-8.41</td> <td>74.00</td> <td>62.47</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>307</td> <td>103 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg	1 2389.95	65.59	-8.41	74.00	62.47	32.88	7.10	36.86	307	103 Peak VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : #64</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2412.00</td> <td>110.02</td> <td>36.02</td> <td>74.00</td> <td>106.84</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>307</td> <td>103 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg	1 * 2412.00	110.02	36.02	74.00	106.84	32.90	7.13	36.85	307	103 Peak VERTICAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg																																																					
1 2389.95	65.59	-8.41	74.00	62.47	32.88	7.10	36.86	307	103 Peak VERTICAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg																																																					
1 * 2412.00	110.02	36.02	74.00	106.84	32.90	7.13	36.85	307	103 Peak VERTICAL																																																					
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : #64</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>52.87</td> <td>-1.13</td> <td>54.00</td> <td>49.75</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>307</td> <td>103 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg	1 2389.95	52.87	-1.13	54.00	49.75	32.88	7.10	36.86	307	103 Average VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : #64</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2412.00</td> <td>103.31</td> <td>49.31</td> <td>54.00</td> <td>100.13</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>307</td> <td>103 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg	1 * 2412.00	103.31	49.31	54.00	100.13	32.90	7.13	36.85	307	103 Average VERTICAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg																																																					
1 2389.95	52.87	-1.13	54.00	49.75	32.88	7.10	36.86	307	103 Average VERTICAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	cm	deg																																																					
1 * 2412.00	103.31	49.31	54.00	100.13	32.90	7.13	36.85	307	103 Average VERTICAL																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11g CH02 2417MHz																																																																			
CDD 1+2	Horizontal	Fundamental																																																																		
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : 70</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>63.66</td> <td>-10.34</td> <td>74.00</td> <td>60.54</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>303</td> <td>310 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 2389.95	63.66	-10.34	74.00	60.54	32.88	7.10	36.86	303	310 Peak	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : 70</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2422.00</td> <td>110.21</td> <td>36.21</td> <td>74.00</td> <td>106.98</td> <td>32.92</td> <td>7.16</td> <td>36.85</td> <td>303</td> <td>310 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 * 2422.00	110.21	36.21	74.00	106.98	32.92	7.16	36.85	303	310 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 2389.95	63.66	-10.34	74.00	60.54	32.88	7.10	36.86	303	310 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 * 2422.00	110.21	36.21	74.00	106.98	32.92	7.16	36.85	303	310 Peak	HORIZONTAL																																																										
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 0.510kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : 70</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>49.95</td> <td>-4.05</td> <td>54.00</td> <td>46.83</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>303</td> <td>310 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 2389.95	49.95	-4.05	54.00	46.83	32.88	7.10	36.86	303	310 Average	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 0.510kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity : Y IMEI : #21 Powersetting : 70</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2420.00</td> <td>103.87</td> <td>49.87</td> <td>54.00</td> <td>100.64</td> <td>32.92</td> <td>7.16</td> <td>36.85</td> <td>303</td> <td>310 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 * 2420.00	103.87	49.87	54.00	100.64	32.92	7.16	36.85	303	310 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 2389.95	49.95	-4.05	54.00	46.83	32.88	7.10	36.86	303	310 Average	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																												
1 * 2420.00	103.87	49.87	54.00	100.64	32.92	7.16	36.85	303	310 Average	HORIZONTAL																																																										



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH02 2417MHz																																																													
CDD 1+2	Vertical	Fundamental																																																												
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity IME1 : 70 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>63.60</td> <td>-10.40</td> <td>74.00</td> <td>60.48</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>271</td> <td>54 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg	1	2389.95	63.60	-10.40	74.00	60.48	32.88	7.10	36.86	271	54 Peak	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity IME1 : 70 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2418.00</td> <td>111.16</td> <td>37.16</td> <td>74.00</td> <td>107.95</td> <td>32.90</td> <td>7.16</td> <td>36.85</td> <td>271</td> <td>54 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg	1	2418.00	111.16	37.16	74.00	107.95	32.90	7.16	36.85	271	54 Peak	VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg																																																						
1	2389.95	63.60	-10.40	74.00	60.48	32.88	7.10	36.86	271	54 Peak	VERTICAL																																																			
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg																																																						
1	2418.00	111.16	37.16	74.00	107.95	32.90	7.16	36.85	271	54 Peak	VERTICAL																																																			
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity IME1 : 70 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.35</td> <td>-11.65</td> <td>54.00</td> <td>49.23</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>271</td> <td>54 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg	1	2389.95	52.35	-11.65	54.00	49.23	32.88	7.10	36.86	271	54 Average	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity IME1 : 70 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2418.00</td> <td>104.77</td> <td>50.77</td> <td>54.00</td> <td>101.56</td> <td>32.90</td> <td>7.16</td> <td>36.85</td> <td>271</td> <td>54 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg	1	2418.00	104.77	50.77	54.00	101.56	32.90	7.16	36.85	271	54 Average	VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg																																																						
1	2389.95	52.35	-11.65	54.00	49.23	32.88	7.10	36.86	271	54 Average	VERTICAL																																																			
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg	cm	deg																																																						
1	2418.00	104.77	50.77	54.00	101.56	32.90	7.16	36.85	271	54 Average	VERTICAL																																																			



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																											
ANT	802.11g CH06 2437MHz - L																											
CDD 1+2	Horizontal	Fundamental																										
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 14 Polarization : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.82</th> <th>57.43</th> <th>-16.57</th> <th>74.00</th> <th>54.31</th> <th>32.88</th> <th>7.10</th> <th>36.86</th> <th>153</th> <th>11</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	2389.82	57.43	-16.57	74.00	54.31	32.88	7.10	36.86	153	11	Peak	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 14 Polarization : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>1</th> <th>2438.00</th> <th>111.31</th> <th>37.31</th> <th>74.00</th> <th>108.02</th> <th>32.94</th> <th>7.19</th> <th>36.84</th> <th>153</th> <th>11</th> <th>Peak</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	2438.00	111.31	37.31	74.00	108.02	32.94	7.19	36.84	153	11	Peak	HORIZONTAL
1	2389.82	57.43	-16.57	74.00	54.31	32.88	7.10	36.86	153	11	Peak	HORIZONTAL																
1	2438.00	111.31	37.31	74.00	108.02	32.94	7.19	36.84	153	11	Peak	HORIZONTAL																
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 0.5100kHz SRT Auto Mode : (FR) 230408 Plane : 14 Polarization : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.82</th> <th>43.77</th> <th>-10.23</th> <th>54.00</th> <th>40.65</th> <th>32.88</th> <th>7.10</th> <th>36.86</th> <th>153</th> <th>11</th> <th>Average</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	2389.82	43.77	-10.23	54.00	40.65	32.88	7.10	36.86	153	11	Average	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 0.5100kHz SRT Auto Mode : (FR) 230408 Plane : 14 Polarization : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>1</th> <th>2438.00</th> <th>104.57</th> <th>50.57</th> <th>54.00</th> <th>101.28</th> <th>32.94</th> <th>7.19</th> <th>36.84</th> <th>153</th> <th>11</th> <th>Average</th> <th>HORIZONTAL</th> </tr> </thead> </table>	1	2438.00	104.57	50.57	54.00	101.28	32.94	7.19	36.84	153	11	Average	HORIZONTAL
1	2389.82	43.77	-10.23	54.00	40.65	32.88	7.10	36.86	153	11	Average	HORIZONTAL																
1	2438.00	104.57	50.57	54.00	101.28	32.94	7.19	36.84	153	11	Average	HORIZONTAL																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																						
ANT	802.11g CH06 2437MHz - R																																						
CDD 1+2	Horizontal	Fundamental																																					
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL Project : RRM 1000.000KHz VSW:3000.000KHz SW:Auto FR230408C Mode : 14 Plane : Y Full-directivity IMEI : 73 Powersetting : 23</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>63.74</td> <td>-10.26</td> <td>74.00</td> <td>60.33</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>153</td> <td>11</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.68	63.74	-10.26	74.00	60.33	32.98	7.25	30.82	153	11	Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2483.68	63.74	-10.26	74.00	60.33	32.98	7.25	30.82	153	11	Peak	HORIZONTAL																											
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3317.5M 75957 HORIZONTAL Project : RRM 1000.000KHz VSW:0.01000KHz SW:Auto FR230408C Mode : 14 Plane : Y Full-directivity IMEI : 85 Powersetting : 23</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>51.16</td> <td>-2.84</td> <td>54.00</td> <td>47.75</td> <td>32.98</td> <td>7.25</td> <td>30.82</td> <td>153</td> <td>11</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.50	51.16	-2.84	54.00	47.75	32.98	7.25	30.82	153	11	Average	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2483.50	51.16	-2.84	54.00	47.75	32.98	7.25	30.82	153	11	Average	HORIZONTAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11g CH06 2437MHz - L																																																																	
CDD 1+2	Vertical	Fundamental																																																																
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 14 Polar : Y Full-directivity : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>56.52</td> <td>-17.48</td> <td>74.00</td> <td>53.40</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>176</td> <td>101 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg	1	2389.95	56.52	-17.48	74.00	53.40	32.88	7.10	36.86	176	101 Peak	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 14 Polar : Y Full-directivity : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2438.00</td> <td>111.42</td> <td>37.42</td> <td>74.00</td> <td>108.13</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>176</td> <td>101 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg	1	2438.00	111.42	37.42	74.00	108.13	32.94	7.19	36.84	176	101 Peak	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg																																																									
1	2389.95	56.52	-17.48	74.00	53.40	32.88	7.10	36.86	176	101 Peak	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg																																																									
1	2438.00	111.42	37.42	74.00	108.13	32.94	7.19	36.84	176	101 Peak	VERTICAL																																																							
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR) 230408 Plane : 14 Polar : Y Full-directivity : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>43.94</td> <td>-10.06</td> <td>54.00</td> <td>40.82</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>176</td> <td>101 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg	1	2389.95	43.94	-10.06	54.00	40.82	32.88	7.10	36.86	176	101 Average	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR) 230408 Plane : 14 Polar : Y Full-directivity : Full-directivity IMEI : #21 Powersetting : 73</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2438.00</td> <td>104.70</td> <td>50.70</td> <td>54.00</td> <td>101.41</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>176</td> <td>101 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg	1	2438.00	104.70	50.70	54.00	101.41	32.94	7.19	36.84	176	101 Average	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg																																																									
1	2389.95	43.94	-10.06	54.00	40.82	32.88	7.10	36.86	176	101 Average	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	cm	deg																																																									
1	2438.00	104.70	50.70	54.00	101.41	32.94	7.19	36.84	176	101 Average	VERTICAL																																																							



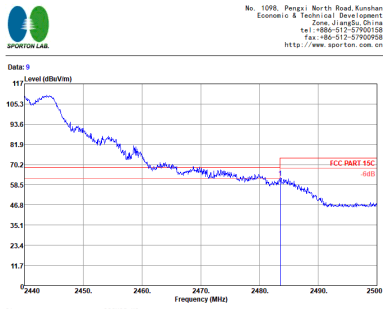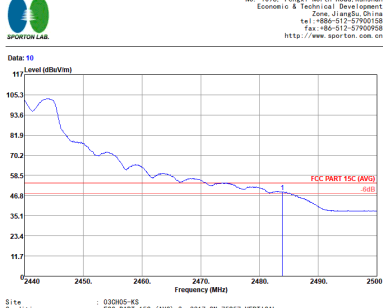

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																						
ANT	802.11g CH06 2437MHz - R																																						
CDD 1+2	Vertical	Fundamental																																					
Peak	 <p>Site : 032005-KS          Condition : FCC PART 15C 3e 3317.5M 75957 VERTICAL          Project : RRE 1000.000KHz VSW 3000.000KHz SRT:Auto          Mode : (FR) 230408          Plane : Y          Full-directivity          Powersetting : 73</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>62.47</td> <td>-11.53</td> <td>74.00</td> <td>69.06</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>176</td> <td>101</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.56	62.47	-11.53	74.00	69.06	32.98	7.25	36.82	176	101	Peak	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level Factor	Loss Factor																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2483.56	62.47	-11.53	74.00	69.06	32.98	7.25	36.82	176	101	Peak	VERTICAL																											
Avg.	 <p>Site : 032005-KS          Condition : FCC PART 15C (AVG) 3e 3317.5M 75957 VERTICAL          Project : RRE 1000.000KHz VSW 0.01000KHz SRT:Auto          Mode : (FR) 230408          Plane : Y          Full-directivity          Powersetting : 65</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.92</td> <td>48.94</td> <td>-5.06</td> <td>54.00</td> <td>45.53</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>176</td> <td>101</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.92	48.94	-5.06	54.00	45.53	32.98	7.25	36.82	176	101	Average	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level Factor	Loss Factor																																			
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2483.92	48.94	-5.06	54.00	45.53	32.98	7.25	36.82	176	101	Average	VERTICAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11g CH09 2452MHz																																																																											
CDD 1+2	Horizontal	Fundamental																																																																										
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 3000.000kHz SRT Auto Mode : FR230408C Plane : 3 Full-directivity : Y Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2484.10</td> <td>68.04</td> <td>-5.96</td> <td>74.00</td> <td>64.63</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>330</td> <td>312</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1 1	2484.10	68.04	-5.96	74.00	64.63	32.98	7.25	36.82	330	312	Peak	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 3000.000kHz SRT Auto Mode : FR230408C Plane : 3 Full-directivity : Y Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2456.00</td> <td>110.29</td> <td>36.29</td> <td>74.00</td> <td>106.94</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>330</td> <td>312</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1 *	2456.00	110.29	36.29	74.00	106.94	32.96	7.22	36.83	330	312	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																																					
1 1	2484.10	68.04	-5.96	74.00	64.63	32.98	7.25	36.82	330	312	Peak	HORIZONTAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																																					
1 *	2456.00	110.29	36.29	74.00	106.94	32.96	7.22	36.83	330	312	Peak	HORIZONTAL																																																																
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 0.5100kHz SRT Auto Mode : FR230408C Plane : 3 Full-directivity : Y Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2483.50</td> <td>52.45</td> <td>-1.55</td> <td>54.00</td> <td>49.04</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>330</td> <td>312</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1 1	2483.50	52.45	-1.55	54.00	49.04	32.98	7.25	36.82	330	312	Average	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBW 1000.000kHz VBR 0.5100kHz SRT Auto Mode : FR230408C Plane : 3 Full-directivity : Y Powersetting : 71</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2456.00</td> <td>103.37</td> <td>49.37</td> <td>54.00</td> <td>100.02</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>330</td> <td>312</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1 *	2456.00	103.37	49.37	54.00	100.02	32.96	7.22	36.83	330	312	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																																					
1 1	2483.50	52.45	-1.55	54.00	49.04	32.98	7.25	36.82	330	312	Average	HORIZONTAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																																					
1 *	2456.00	103.37	49.37	54.00	100.02	32.96	7.22	36.83	330	312	Average	HORIZONTAL																																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH09 2452MHz																																																													
CDD 1+2	Vertical	Fundamental																																																												
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 3 Full-directivity IMEI : 71 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1   2485.00</td> <td>68.72</td> <td>-5.28</td> <td>74.00</td> <td>65.31</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>217</td> <td>64 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1   2485.00	68.72	-5.28	74.00	65.31	32.98	7.25	36.82	217	64 Peak VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 3 Full-directivity IMEI : 71 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1   2452.00</td> <td>111.87</td> <td>37.87</td> <td>74.00</td> <td>108.58</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>217</td> <td>64 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1   2452.00	111.87	37.87	74.00	108.58	32.94	7.19	36.84	217	64 Peak VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1   2485.00	68.72	-5.28	74.00	65.31	32.98	7.25	36.82	217	64 Peak VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1   2452.00	111.87	37.87	74.00	108.58	32.94	7.19	36.84	217	64 Peak VERTICAL																																																					
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR)230408 Plane : 3 Full-directivity IMEI : 71 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1   2485.18</td> <td>52.06</td> <td>-1.94</td> <td>54.00</td> <td>48.65</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>217</td> <td>64 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1   2485.18	52.06	-1.94	54.00	48.65	32.98	7.25	36.82	217	64 Average VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto Mode : (FR)230408 Plane : 3 Full-directivity IMEI : 71 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1   2452.00</td> <td>105.35</td> <td>51.35</td> <td>54.00</td> <td>102.06</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>217</td> <td>64 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1   2452.00	105.35	51.35	54.00	102.06	32.94	7.19	36.84	217	64 Average VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1   2485.18	52.06	-1.94	54.00	48.65	32.98	7.25	36.82	217	64 Average VERTICAL																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																							
1   2452.00	105.35	51.35	54.00	102.06	32.94	7.19	36.84	217	64 Average VERTICAL																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH10 2457MHz																																																											
CDD 1+2	Horizontal	Fundamental																																																										
<b>Peak</b>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 2 Full-directivity IME1 : Full-directivity Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2456.00</td> <td>108.87</td> <td>-3.46</td> <td>74.00</td> <td>67.13</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>329</td> <td>309</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 1	2456.00	108.87	-3.46	74.00	67.13	32.98	7.25	36.82	329	309	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 2 Full-directivity IME1 : Full-directivity Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2456.00</td> <td>108.87</td> <td>34.87</td> <td>74.00</td> <td>105.52</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>329</td> <td>309</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 *	2456.00	108.87	34.87	74.00	105.52	32.96	7.22	36.83	329	309	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																					
1 1	2456.00	108.87	-3.46	74.00	67.13	32.98	7.25	36.82	329	309	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																					
1 *	2456.00	108.87	34.87	74.00	105.52	32.96	7.22	36.83	329	309	Peak	HORIZONTAL																																																
<b>Avg.</b>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 2 Full-directivity IME1 : Full-directivity Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>2456.00</td> <td>52.84</td> <td>-1.16</td> <td>54.00</td> <td>49.43</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>329</td> <td>309</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 1	2456.00	52.84	-1.16	54.00	49.43	32.98	7.25	36.82	329	309	Average	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 2 Full-directivity IME1 : Full-directivity Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2456.00</td> <td>102.17</td> <td>48.17</td> <td>54.00</td> <td>98.82</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>329</td> <td>309</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 *	2456.00	102.17	48.17	54.00	98.82	32.96	7.22	36.83	329	309	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																					
1 1	2456.00	52.84	-1.16	54.00	49.43	32.98	7.25	36.82	329	309	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																					
1 *	2456.00	102.17	48.17	54.00	98.82	32.96	7.22	36.83	329	309	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11g CH10 2457MHz																																																																			
CDD 1+2	Vertical	Fundamental																																																																		
Peak	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : 2            Full-directivity            IE1 : Full-directivity            IE2 :            Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.20</td> <td>63.70</td> <td>-10.30</td> <td>74.00</td> <td>60.29</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>247</td> <td>90 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2486.20	63.70	-10.30	74.00	60.29	32.98	7.25	36.82	247	90 Peak VERTICAL	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : 2            Full-directivity            IE1 : Full-directivity            IE2 :            Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2458.00</td> <td>107.51</td> <td>33.51</td> <td>74.00</td> <td>104.16</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>247</td> <td>90 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2458.00	107.51	33.51	74.00	104.16	32.96	7.22	36.83	247	90 Peak VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1	2486.20	63.70	-10.30	74.00	60.29	32.98	7.25	36.82	247	90 Peak VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1	2458.00	107.51	33.51	74.00	104.16	32.96	7.22	36.83	247	90 Peak VERTICAL																																																										
Avg.	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto            Mode : (FR)230408            Plane : 2            Full-directivity            IE1 : Full-directivity            IE2 :            Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.24</td> <td>48.74</td> <td>-5.26</td> <td>54.00</td> <td>45.33</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>247</td> <td>90 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2485.24	48.74	-5.26	54.00	45.33	32.98	7.25	36.82	247	90 Average VERTICAL	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL            Project : RSM 1000.000kHz VBR 0.5100kHz SRT:Auto            Mode : (FR)230408            Plane : 2            Full-directivity            IE1 : Full-directivity            IE2 :            Powersetting : SP</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2456.00</td> <td>102.02</td> <td>48.02</td> <td>54.00</td> <td>98.67</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>247</td> <td>90 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg			1	2456.00	102.02	48.02	54.00	98.67	32.96	7.22	36.83	247	90 Average VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1	2485.24	48.74	-5.26	54.00	45.33	32.98	7.25	36.82	247	90 Average VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg																																																												
1	2456.00	102.02	48.02	54.00	98.67	32.96	7.22	36.83	247	90 Average VERTICAL																																																										



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11g CH11 2462MHz																																																																			
CDD 1+2	Horizontal	Fundamental																																																																		
	<p style="text-align: right;">No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 15 Polarization : Full-directivity ME1 : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>ME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2463.62</td> <td>66.99</td> <td>-7.01</td> <td>74.00</td> <td>63.58</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>100</td> <td>30</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2463.62	66.99	-7.01	74.00	63.58	32.98	7.25	36.82	100	30	Peak	HORIZONTAL	<p style="text-align: right;">No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 3000.000kHz SRT Auto Mode : (FR) 230408 Plane : 15 Polarization : Full-directivity ME1 : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>ME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2460.00</td> <td>106.89</td> <td>32.89</td> <td>74.00</td> <td>103.54</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>100</td> <td>30</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2460.00	106.89	32.89	74.00	103.54	32.96	7.22	36.83	100	30	Peak	HORIZONTAL
ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2463.62	66.99	-7.01	74.00	63.58	32.98	7.25	36.82	100	30	Peak	HORIZONTAL																																																								
ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2460.00	106.89	32.89	74.00	103.54	32.96	7.22	36.83	100	30	Peak	HORIZONTAL																																																								
Avg.	<p style="text-align: right;">No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 0.5100kHz SRT Auto Mode : (FR) 230408 Plane : 15 Polarization : Full-directivity ME1 : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>ME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2463.50</td> <td>52.63</td> <td>-1.37</td> <td>54.00</td> <td>49.22</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>100</td> <td>30</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2463.50	52.63	-1.37	54.00	49.22	32.98	7.25	36.82	100	30	Average	HORIZONTAL	<p style="text-align: right;">No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RBE 1000.000kHz VBR 0.5100kHz SRT Auto Mode : (FR) 230408 Plane : 15 Polarization : Full-directivity ME1 : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>ME1</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2460.00</td> <td>100.26</td> <td>46.26</td> <td>54.00</td> <td>96.91</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>100</td> <td>30</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2460.00	100.26	46.26	54.00	96.91	32.96	7.22	36.83	100	30	Average	HORIZONTAL
ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2463.50	52.63	-1.37	54.00	49.22	32.98	7.25	36.82	100	30	Average	HORIZONTAL																																																								
ME1	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2460.00	100.26	46.26	54.00	96.91	32.96	7.22	36.83	100	30	Average	HORIZONTAL																																																								



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																									
ANT	802.11g CH11 2462MHz																																																									
CDD 1+2	Vertical	Fundamental																																																								
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China          tel: +86-512-57900958          fax: +86-512-57900958          http://www.sporton.com.cn</p> <p>Site : 030905-KS          Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL          Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto          Mode : (FR)230408          Plane : Y          Full-directivity          IRE1 : Full-directivity          Powersetting : S7</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2463.74</td> <td>67.08</td> <td>+6.92</td> <td>74.00</td> <td>63.67</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>322 108 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg	1 2463.74	67.08	+6.92	74.00	63.67	32.98	7.25	36.82	322 108 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China          tel: +86-512-57900958          fax: +86-512-57900958          http://www.sporton.com.cn</p> <p>Site : 030905-KS          Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL          Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto          Mode : (FR)230408          Plane : Y          Full-directivity          IRE1 : Full-directivity          Powersetting : S7</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>108.91</td> <td>34.91</td> <td>74.00</td> <td>105.56</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>322 108 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg	1 2462.00	108.91	34.91	74.00	105.56	32.96	7.22	36.83	322 108 Peak	VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg																																																		
1 2463.74	67.08	+6.92	74.00	63.67	32.98	7.25	36.82	322 108 Peak	VERTICAL																																																	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg																																																		
1 2462.00	108.91	34.91	74.00	105.56	32.96	7.22	36.83	322 108 Peak	VERTICAL																																																	
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China          tel: +86-512-57900958          fax: +86-512-57900958          http://www.sporton.com.cn</p> <p>Site : 030905-KS          Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL          Project : RRM 1000.000kHz VBR 0.5100kHz SRT:Auto          Mode : (FR)230408          Plane : Y          Full-directivity          IRE1 : Full-directivity          Powersetting : S7</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2463.62</td> <td>50.72</td> <td>-3.28</td> <td>54.00</td> <td>47.31</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>322 108 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg	1 2463.62	50.72	-3.28	54.00	47.31	32.98	7.25	36.82	322 108 Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China          tel: +86-512-57900958          fax: +86-512-57900958          http://www.sporton.com.cn</p> <p>Site : 030905-KS          Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL          Project : RRM 1000.000kHz VBR 0.5100kHz SRT:Auto          Mode : (FR)230408          Plane : Y          Full-directivity          IRE1 : Full-directivity          Powersetting : S7</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00</td> <td>101.80</td> <td>47.80</td> <td>54.00</td> <td>98.45</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>322 108 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg	1 2462.00	101.80	47.80	54.00	98.45	32.96	7.22	36.83	322 108 Average	VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg																																																		
1 2463.62	50.72	-3.28	54.00	47.31	32.98	7.25	36.82	322 108 Average	VERTICAL																																																	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBm	dBm	dBm	dBm	cm	deg	cm	deg																																																		
1 2462.00	101.80	47.80	54.00	98.45	32.96	7.22	36.83	322 108 Average	VERTICAL																																																	







2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Full CH01 2412MHz																																																													
CDD 1+2	Horizontal	Fundamental																																																												
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 16 Plane : Y Full-directivity IMEI : 821 PowerSetting : 07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.49</td> <td>65.95</td> <td>-8.65</td> <td>74.00</td> <td>62.83</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>304</td> <td>310 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg			1 2389.49	65.95	-8.65	74.00	62.83	32.88	7.10	36.86	304	310 Peak HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 16 Plane : Y Full-directivity IMEI : 821 PowerSetting : 07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2414.00</td> <td>111.01</td> <td>37.01</td> <td>74.00</td> <td>107.83</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>304</td> <td>310 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg			1 * 2414.00	111.01	37.01	74.00	107.83	32.90	7.13	36.85	304	310 Peak HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg																																																							
1 2389.49	65.95	-8.65	74.00	62.83	32.88	7.10	36.86	304	310 Peak HORIZONTAL																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg																																																							
1 * 2414.00	111.01	37.01	74.00	107.83	32.90	7.13	36.85	304	310 Peak HORIZONTAL																																																					
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 16 Plane : Y Full-directivity IMEI : 821 PowerSetting : 07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2389.95</td> <td>52.64</td> <td>-1.36</td> <td>54.00</td> <td>49.52</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>304</td> <td>310 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg			1 1 2389.95	52.64	-1.36	54.00	49.52	32.88	7.10	36.86	304	310 Average HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79597 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : 16 Plane : Y Full-directivity IMEI : 821 PowerSetting : 07</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2412.00</td> <td>100.15</td> <td>46.15</td> <td>54.00</td> <td>96.97</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>304</td> <td>310 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg			1 * 2412.00	100.15	46.15	54.00	96.97	32.90	7.13	36.85	304	310 Average HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg																																																							
1 1 2389.95	52.64	-1.36	54.00	49.52	32.88	7.10	36.86	304	310 Average HORIZONTAL																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	on	deg																																																							
1 * 2412.00	100.15	46.15	54.00	96.97	32.90	7.13	36.85	304	310 Average HORIZONTAL																																																					



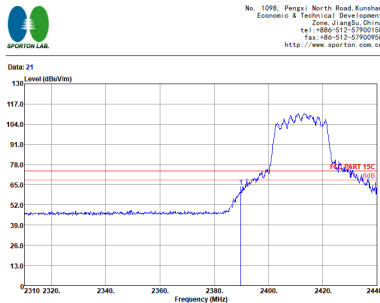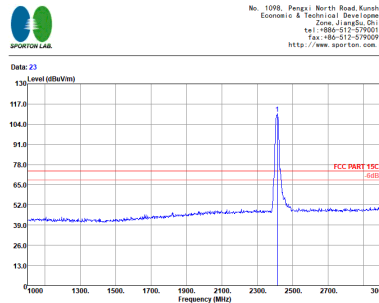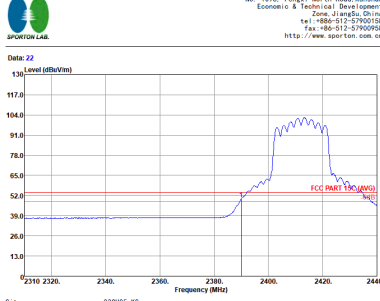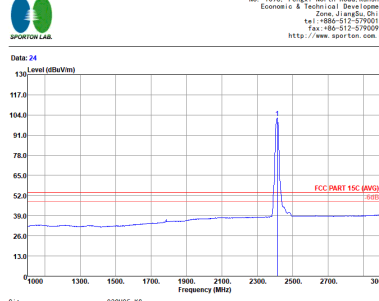

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11ax HE20 Full CH01 2412MHz																																																																	
CDD 1+2	Vertical	Fundamental																																																																
<p><b>Peak</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto FR230408 Mode : 16 Plane : Y Full-directivity IMEI : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>63.90</td> <td>-10.10</td> <td>74.00</td> <td>60.78</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>275</td> <td>103 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2389.82	63.90	-10.10	74.00	60.78	32.88	7.10	36.86	275	103 Peak	VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto FR230408 Mode : 16 Plane : Y Full-directivity IMEI : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>110.98</td> <td>36.98</td> <td>74.00</td> <td>107.80</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>275</td> <td>103 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2414.00	110.98	36.98	74.00	107.80	32.90	7.13	36.85	275	103 Peak	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2389.82	63.90	-10.10	74.00	60.78	32.88	7.10	36.86	275	103 Peak	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2414.00	110.98	36.98	74.00	107.80	32.90	7.13	36.85	275	103 Peak	VERTICAL																																																							
<p><b>Avg.</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.2700kHz SRT:Auto FR230408 Mode : 16 Plane : Y Full-directivity IMEI : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>49.66</td> <td>-4.34</td> <td>54.00</td> <td>46.54</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>275</td> <td>103 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2389.95	49.66	-4.34	54.00	46.54	32.88	7.10	36.86	275	103 Average	VERTICAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.2700kHz SRT:Auto FR230408 Mode : 16 Plane : Y Full-directivity IMEI : #21 Powersetting : #27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>102.15</td> <td>48.15</td> <td>54.00</td> <td>98.97</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>275</td> <td>103 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2414.00	102.15	48.15	54.00	98.97	32.90	7.13	36.85	275	103 Average	VERTICAL
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2389.95	49.66	-4.34	54.00	46.54	32.88	7.10	36.86	275	103 Average	VERTICAL																																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																											
1	2414.00	102.15	48.15	54.00	98.97	32.90	7.13	36.85	275	103 Average	VERTICAL																																																							







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE20 Full CH02 2417MHz																																																																			
CDD 1+2	Horizontal	Fundamental																																																																		
<p><b>Peak</b></p>	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT Auto            Mode : FR230408            Plane : 4            Full-directivity            IRE1 : Full-directivity            Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.30</td> <td>64.85</td> <td>+9.15</td> <td>74.00</td> <td>61.73</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>301</td> <td>309 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2389.30	64.85	+9.15	74.00	61.73	32.88	7.10	36.86	301	309 Peak	HORIZONTAL	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL            Project : RSM 1000.000kHz VBR 3000.000kHz SRT Auto            Mode : FR230408            Plane : 4            Full-directivity            IRE1 : Full-directivity            Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2418.00</td> <td>112.11</td> <td>38.11</td> <td>74.00</td> <td>108.90</td> <td>32.90</td> <td>7.16</td> <td>36.85</td> <td>301</td> <td>309 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2418.00	112.11	38.11	74.00	108.90	32.90	7.16	36.85	301	309 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2389.30	64.85	+9.15	74.00	61.73	32.88	7.10	36.86	301	309 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2418.00	112.11	38.11	74.00	108.90	32.90	7.16	36.85	301	309 Peak	HORIZONTAL																																																										
<p><b>Avg.</b></p>	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL            Project : RSM 1000.000kHz VBR 0.2300kHz SRT Auto            Mode : FR230408            Plane : 4            Full-directivity            IRE1 : Full-directivity            Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.30</td> <td>48.44</td> <td>-5.56</td> <td>54.00</td> <td>45.32</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>301</td> <td>309 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2389.30	48.44	-5.56	54.00	45.32	32.88	7.10	36.86	301	309 Average	HORIZONTAL	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL            Project : RSM 1000.000kHz VBR 0.2300kHz SRT Auto            Mode : FR230408            Plane : 4            Full-directivity            IRE1 : Full-directivity            Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2420.00</td> <td>103.60</td> <td>49.60</td> <td>54.00</td> <td>100.37</td> <td>32.92</td> <td>7.16</td> <td>36.85</td> <td>301</td> <td>309 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2420.00	103.60	49.60	54.00	100.37	32.92	7.16	36.85	301	309 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2389.30	48.44	-5.56	54.00	45.32	32.88	7.10	36.86	301	309 Average	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2420.00	103.60	49.60	54.00	100.37	32.92	7.16	36.85	301	309 Average	HORIZONTAL																																																										



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11ax HE20 Full CH02 2417MHz																																																																											
CDD 1+2	Vertical	Fundamental																																																																										
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408C Plane : 4 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>64.64</td> <td>+9.36</td> <td>74.00</td> <td>61.62</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>227</td> <td>98</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dBm	dB	dB	cm	deg	1	2389.82	64.64	+9.36	74.00	61.62	32.88	7.10	36.86	227	98	Peak	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408C Plane : 4 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2416.00</td> <td>113.70</td> <td>39.70</td> <td>74.00</td> <td>110.49</td> <td>32.90</td> <td>7.16</td> <td>36.85</td> <td>227</td> <td>98</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dBm	dB	dB	cm	deg	1	2416.00	113.70	39.70	74.00	110.49	32.90	7.16	36.85	227	98	Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																																					
1	2389.82	64.64	+9.36	74.00	61.62	32.88	7.10	36.86	227	98	Peak	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																																					
1	2416.00	113.70	39.70	74.00	110.49	32.90	7.16	36.85	227	98	Peak	VERTICAL																																																																
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408C Plane : 4 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>52.82</td> <td>-1.18</td> <td>54.00</td> <td>49.70</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>227</td> <td>98</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dBm	dB	dB	cm	deg	1	2389.95	52.82	-1.18	54.00	49.70	32.88	7.10	36.86	227	98	Average	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408C Plane : 4 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2416.00</td> <td>103.47</td> <td>49.47</td> <td>54.00</td> <td>100.26</td> <td>32.90</td> <td>7.16</td> <td>36.85</td> <td>227</td> <td>98</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dBm	dB	dB	cm	deg	1	2416.00	103.47	49.47	54.00	100.26	32.90	7.16	36.85	227	98	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																																					
1	2389.95	52.82	-1.18	54.00	49.70	32.88	7.10	36.86	227	98	Average	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm	dB	dBm	dB	dB	cm	deg																																																																					
1	2416.00	103.47	49.47	54.00	100.26	32.90	7.16	36.85	227	98	Average	VERTICAL																																																																

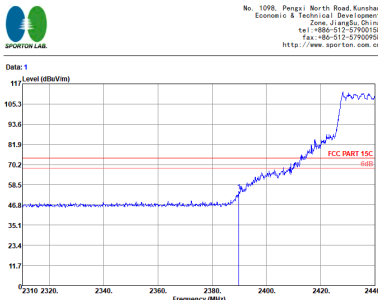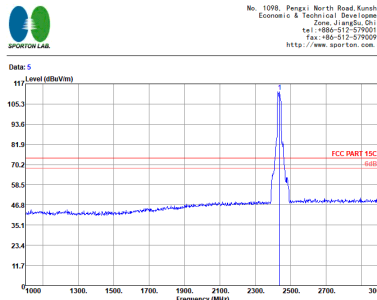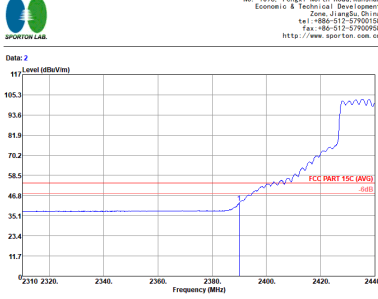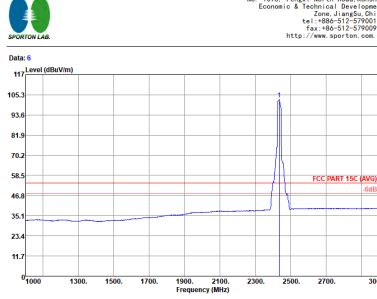

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Full CH06 2437MHz - L																																																													
CDD 1+2	Horizontal	Fundamental																																																												
<p><b>Peak</b></p>	 <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.82</td> <td>54.76</td> <td>-19.24</td> <td>74.00</td> <td>51.64</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>269</td> <td>307 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg	1 2389.82	54.76	-19.24	74.00	51.64	32.88	7.10	36.86	269	307 Peak	 <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2438.00</td> <td>112.47</td> <td>38.47</td> <td>74.00</td> <td>109.18</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>269</td> <td>307 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg	1 2438.00	112.47	38.47	74.00	109.18	32.94	7.19	36.84	269	307 Peak
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg																																																					
1 2389.82	54.76	-19.24	74.00	51.64	32.88	7.10	36.86	269	307 Peak																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg																																																					
1 2438.00	112.47	38.47	74.00	109.18	32.94	7.19	36.84	269	307 Peak																																																					
<p><b>Avg.</b></p>	 <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 0.230408 SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>42.55</td> <td>-11.45</td> <td>54.00</td> <td>39.43</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>269</td> <td>307 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg	1 2389.95	42.55	-11.45	54.00	39.43	32.88	7.10	36.86	269	307 Average	 <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RRM 1000.000kHz VBR 0.230408 SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2438.00</td> <td>102.70</td> <td>48.70</td> <td>54.00</td> <td>99.44</td> <td>32.92</td> <td>7.19</td> <td>36.85</td> <td>269</td> <td>307 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg	1 2438.00	102.70	48.70	54.00	99.44	32.92	7.19	36.85	269	307 Average
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg																																																					
1 2389.95	42.55	-11.45	54.00	39.43	32.88	7.10	36.86	269	307 Average																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg	deg																																																					
1 2438.00	102.70	48.70	54.00	99.44	32.92	7.19	36.85	269	307 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																			
ANT	802.11ax HE20 Full CH06 2437MHz - R																																			
CDD 1+2	Horizontal	Fundamental																																		
Peak	<p>Site : 032005-KS          Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL          Project : RBE 1000.000KHz VSW:3000.000KHz SW:Auto          Mode : (FR)230408          Plane : Y          IMEI : Full-directivity          Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>62.20</td> <td>-11.80</td> <td>74.00</td> <td>58.79</td> <td>32.98</td> <td>7.25 36.82</td> <td>269 307 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg	1	2483.56	62.20	-11.80	74.00	58.79	32.98	7.25 36.82	269 307 Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																													
Freq	Level	Line	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg																													
1	2483.56	62.20	-11.80	74.00	58.79	32.98	7.25 36.82	269 307 Peak	HORIZONTAL																											
Avg.	<p>Site : 032005-KS          Condition : FCC PART 15C (AVG) 3m 3317.5M 75957 HORIZONTAL          Project : RBE 1000.000KHz VSW:0.2100KHz SW:Auto          Mode : (FR)230408          Plane : Y          IMEI : Full-directivity          Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.32</td> <td>-5.68</td> <td>54.00</td> <td>44.91</td> <td>32.98</td> <td>7.25 36.82</td> <td>269 307 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg	1	2483.50	48.32	-5.68	54.00	44.91	32.98	7.25 36.82	269 307 Average	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																													
Freq	Level	Line	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg																													
1	2483.50	48.32	-5.68	54.00	44.91	32.98	7.25 36.82	269 307 Average	HORIZONTAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11ax HE20 Full CH06 2437MHz - L																																																											
CDD 1+2	Vertical	Fundamental																																																										
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : Y IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>54.73</td> <td>-19.27</td> <td>74.00</td> <td>51.61</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>358</td> <td>87</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg	1	2389.82	54.73	-19.27	74.00	51.61	32.88	7.10	36.86	358	87	Peak	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : Y IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>112.22</td> <td>38.22</td> <td>74.00</td> <td>108.93</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>358</td> <td>87</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg	1	2440.00	112.22	38.22	74.00	108.93	32.94	7.19	36.84	358	87	Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg																																																					
1	2389.82	54.73	-19.27	74.00	51.61	32.88	7.10	36.86	358	87	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg																																																					
1	2440.00	112.22	38.22	74.00	108.93	32.94	7.19	36.84	358	87	Peak	VERTICAL																																																
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : Y IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>41.14</td> <td>-12.86</td> <td>54.00</td> <td>38.02</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>358</td> <td>87</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg	1	2389.95	41.14	-12.86	54.00	38.02	32.88	7.10	36.86	358	87	Average	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR)230408 Plane : 17 Full-directivity : Y IMEI : #21 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>102.84</td> <td>48.84</td> <td>54.00</td> <td>99.98</td> <td>32.92</td> <td>7.19</td> <td>36.85</td> <td>358</td> <td>87</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg	1	2436.00	102.84	48.84	54.00	99.98	32.92	7.19	36.85	358	87	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg																																																					
1	2389.95	41.14	-12.86	54.00	38.02	32.88	7.10	36.86	358	87	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	cm	deg																																																					
1	2436.00	102.84	48.84	54.00	99.98	32.92	7.19	36.85	358	87	Average	VERTICAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																	
ANT	802.11ax HE20 Full CH06 2437MHz - R																																	
CDD 1+2	Vertical	Fundamental																																
Peak	<p>Site : 032005-KS          Condition : FCC PART 15C 3m 3317.5M 75957 VERTICAL          Project : RBE 1000.000KHz VSW:3000.000KHz SW:Auto          Mode : (FR)230408          Plane : V          IMEI : Full-directivity          Powersetting : 60</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.86</td> <td>60.27</td> <td>-13.73</td> <td>74.00</td> <td>56.86</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>358</td> <td>87 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1	2483.86	60.27	-13.73	74.00	56.86	32.98	7.25	36.82	358	87 Peak	VERTICAL	Left blank
IMEI	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																									
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																											
1	2483.86	60.27	-13.73	74.00	56.86	32.98	7.25	36.82	358	87 Peak	VERTICAL																							
Avg.	<p>Site : 032005-KS          Condition : FCC PART 15C (AVG) 3m 3317.5M 75957 VERTICAL          Project : RBE 1000.000KHz VSW:0.2100KHz SW:Auto          Mode : (FR)230408          Plane : V          IMEI : Full-directivity          Powersetting : 60</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.74</td> <td>45.46</td> <td>-8.54</td> <td>54.00</td> <td>42.05</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>358</td> <td>87 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	IMEI	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg			1	2483.74	45.46	-8.54	54.00	42.05	32.98	7.25	36.82	358	87 Average	VERTICAL	Left blank
IMEI	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Poi/Phas																									
MHz	dBV/m	dB	dBV/m	dBV	dB	cm	deg																											
1	2483.74	45.46	-8.54	54.00	42.05	32.98	7.25	36.82	358	87 Average	VERTICAL																							







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
ANT	802.11ax HE20 Full CH09 2452MHz																																																																					
CDD 1+2	Horizontal	Fundamental																																																																				
Peak	<p>No. 1098, Pengxi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 1</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : -60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBW/m</th> <th>dB</th> <th>dBW/m</th> <th>dBW</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>63.00</td> <td>-10.40</td> <td>74.00</td> <td>60.19</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>330</td> <td>312 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg			1	2483.62	63.00	-10.40	74.00	60.19	32.98	7.25	36.82	330	312 Peak	HORIZONTAL	<p>No. 1098, Pengxi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 3</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : -60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBW/m</th> <th>dB</th> <th>dBW/m</th> <th>dBW</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2458.00</td> <td>110.61</td> <td>36.61</td> <td>74.00</td> <td>107.26</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>330</td> <td>312 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg			1	2458.00	110.61	36.61	74.00	107.26	32.96	7.22	36.83	330	312 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg																																																														
1	2483.62	63.00	-10.40	74.00	60.19	32.98	7.25	36.82	330	312 Peak	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg																																																														
1	2458.00	110.61	36.61	74.00	107.26	32.96	7.22	36.83	330	312 Peak	HORIZONTAL																																																											
Avg.	<p>No. 1098, Pengxi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 2</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : -60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBW/m</th> <th>dB</th> <th>dBW/m</th> <th>dBW</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>50.92</td> <td>-3.08</td> <td>54.00</td> <td>47.51</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>330</td> <td>312 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg			1	2483.50	50.92	-3.08	54.00	47.51	32.98	7.25	36.82	330	312 Average	HORIZONTAL	<p>No. 1098, Pengxi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 4</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : -60</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBW/m</th> <th>dB</th> <th>dBW/m</th> <th>dBW</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2454.00</td> <td>101.92</td> <td>47.92</td> <td>54.00</td> <td>98.57</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>330</td> <td>312 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg			1	2454.00	101.92	47.92	54.00	98.57	32.96	7.22	36.83	330	312 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg																																																														
1	2483.50	50.92	-3.08	54.00	47.51	32.98	7.25	36.82	330	312 Average	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBW/m	dB	dBW/m	dBW	dB/m	dB	cm	deg																																																														
1	2454.00	101.92	47.92	54.00	98.57	32.96	7.22	36.83	330	312 Average	HORIZONTAL																																																											





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11ax HE20 Full CH09 2452MHz																																																											
CDD 1+2	Vertical	Fundamental																																																										
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408C Plane : 0 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.10</td> <td>64.88</td> <td>+9.12</td> <td>74.00</td> <td>61.47</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>245</td> <td>99</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2484.10	64.88	+9.12	74.00	61.47	32.98	7.25	36.82	245	99	Peak	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : FR230408C Plane : 0 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>112.92</td> <td>38.92</td> <td>74.00</td> <td>109.63</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>245</td> <td>99</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2452.00	112.92	38.92	74.00	109.63	32.94	7.19	36.84	245	99	Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2484.10	64.88	+9.12	74.00	61.47	32.98	7.25	36.82	245	99	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2452.00	112.92	38.92	74.00	109.63	32.94	7.19	36.84	245	99	Peak	VERTICAL																																																
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : FR230408C Plane : 0 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.98</td> <td>51.17</td> <td>-2.83</td> <td>54.00</td> <td>47.76</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>245</td> <td>99</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2483.98	51.17	-2.83	54.00	47.76	32.98	7.25	36.82	245	99	Average	VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RSM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : FR230408C Plane : 0 Full-directivity IMEI : 821 Powersetting : 60</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>103.06</td> <td>49.00</td> <td>54.00</td> <td>99.77</td> <td>32.94</td> <td>7.19</td> <td>36.84</td> <td>245</td> <td>99</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2452.00	103.06	49.00	54.00	99.77	32.94	7.19	36.84	245	99	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2483.98	51.17	-2.83	54.00	47.76	32.98	7.25	36.82	245	99	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2452.00	103.06	49.00	54.00	99.77	32.94	7.19	36.84	245	99	Average	VERTICAL																																																

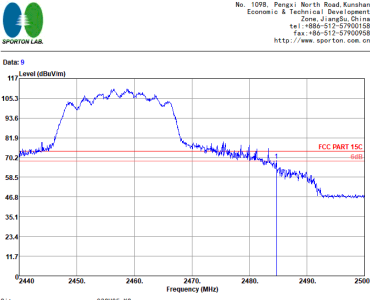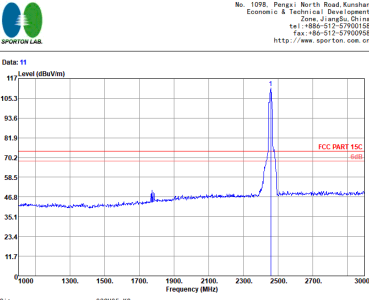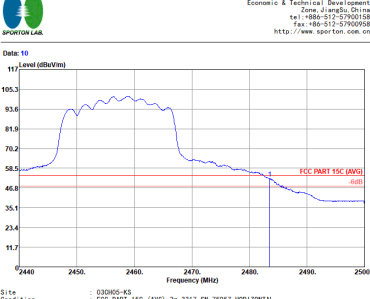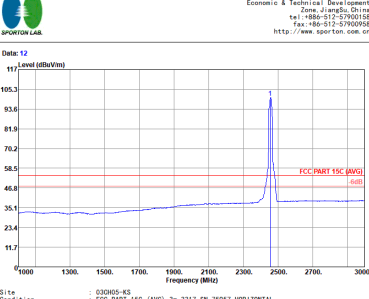

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE20 Full CH10 2457MHz																																																																			
CDD 1+2	Horizontal	Fundamental																																																																		
Peak	 <p>No. 109B, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 9</p> <p>Site : 03065-KS Condition : FCC PART 15C 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : #4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2484.70</td> <td>68.42</td> <td>-5.58</td> <td>74.00</td> <td>65.01</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>331</td> <td>311</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg			1 1 2484.70	68.42	-5.58	74.00	65.01	32.98	7.25	36.82	331	311	Peak HORIZONTAL	 <p>No. 109B, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 11</p> <p>Site : 03065-KS Condition : FCC PART 15C 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : #4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2458.00</td> <td>111.55</td> <td>37.55</td> <td>74.00</td> <td>108.20</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>331</td> <td>311</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg			1 * 2458.00	111.55	37.55	74.00	108.20	32.96	7.22	36.83	331	311	Peak HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg																																																												
1 1 2484.70	68.42	-5.58	74.00	65.01	32.98	7.25	36.82	331	311	Peak HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg																																																												
1 * 2458.00	111.55	37.55	74.00	108.20	32.96	7.22	36.83	331	311	Peak HORIZONTAL																																																										
Avg.	 <p>No. 109B, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 10</p> <p>Site : 03065-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : #4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2483.50</td> <td>52.51</td> <td>-1.49</td> <td>54.00</td> <td>49.10</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>331</td> <td>311</td> <td>Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg			1 1 2483.50	52.51	-1.49	54.00	49.10	32.98	7.25	36.82	331	311	Peak HORIZONTAL	 <p>No. 109B, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 12</p> <p>Site : 03065-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 79957 HORIZONTAL Project : RBM 1000.000MHz YBR 3000.000MHz SRT:Auto FR1230408 Mode : 0 Plane : 0 Full-directivity : 0 IMEI : #21 Powersetting : #4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2458.00</td> <td>100.52</td> <td>48.52</td> <td>54.00</td> <td>97.17</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>331</td> <td>311</td> <td>Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg			1 * 2458.00	100.52	48.52	54.00	97.17	32.96	7.22	36.83	331	311	Average HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg																																																												
1 1 2483.50	52.51	-1.49	54.00	49.10	32.98	7.25	36.82	331	311	Peak HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm	dBm	dBm	dBm	dB	dB	cm	deg																																																												
1 * 2458.00	100.52	48.52	54.00	97.17	32.96	7.22	36.83	331	311	Average HORIZONTAL																																																										



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																							
ANT	802.11ax HE20 Full CH10 2457MHz																																																																							
CDD 1+2	Vertical	Fundamental																																																																						
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 0 Full-directivity Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.28</td> <td>64.76</td> <td>-9.24</td> <td>74.00</td> <td>61.35</td> <td>32.98</td> <td>7.25 36.82</td> <td>245</td> <td>96 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg	1	2484.28	64.76	-9.24	74.00	61.35	32.98	7.25 36.82	245	96 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : 0 Full-directivity Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2456.00</td> <td>109.80</td> <td>35.80</td> <td>74.00</td> <td>106.45</td> <td>32.96</td> <td>7.22 36.83</td> <td>245</td> <td>96 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg	1	2456.00	109.80	35.80	74.00	106.45	32.96	7.22 36.83	245	96 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																
Freq	Level	Line	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg																																																																	
1	2484.28	64.76	-9.24	74.00	61.35	32.98	7.25 36.82	245	96 Peak	VERTICAL																																																														
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg																																																																	
1	2456.00	109.80	35.80	74.00	106.45	32.96	7.22 36.83	245	96 Peak	VERTICAL																																																														
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR)230408 Plane : 0 Full-directivity Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>47.87</td> <td>-6.13</td> <td>54.00</td> <td>44.46</td> <td>32.98</td> <td>7.25 36.82</td> <td>245</td> <td>96 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg	1	2483.68	47.87	-6.13	54.00	44.46	32.98	7.25 36.82	245	96 Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR)230408 Plane : 0 Full-directivity Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2458.00</td> <td>100.73</td> <td>46.73</td> <td>54.00</td> <td>97.38</td> <td>32.96</td> <td>7.22 36.83</td> <td>245</td> <td>96 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg	1	2458.00	100.73	46.73	54.00	97.38	32.96	7.22 36.83	245	96 Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																
Freq	Level	Line	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg																																																																	
1	2483.68	47.87	-6.13	54.00	44.46	32.98	7.25 36.82	245	96 Average	VERTICAL																																																														
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cn deg																																																																	
1	2458.00	100.73	46.73	54.00	97.38	32.96	7.22 36.83	245	96 Average	VERTICAL																																																														



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																									
ANT	802.11ax HE20 Full CH11 2462MHz																																																									
CDD 1+2	Horizontal	Fundamental																																																								
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2483.56</td> <td>70.57</td> <td>-3.43</td> <td>74.00</td> <td>67.16</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>267 304 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	cm	deg			1 1 2483.56	70.57	-3.43	74.00	67.16	32.98	7.25	36.82	267 304 Peak	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2460.00</td> <td>109.66</td> <td>35.66</td> <td>74.00</td> <td>106.31</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>267 304 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	cm	deg			1 * 2460.00	109.66	35.66	74.00	106.31	32.96	7.22	36.83	267 304 Peak	HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBμV/m	dB	dBμV/m	dB	cm	deg																																																				
1 1 2483.56	70.57	-3.43	74.00	67.16	32.98	7.25	36.82	267 304 Peak	HORIZONTAL																																																	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBμV/m	dB	dBμV/m	dB	cm	deg																																																				
1 * 2460.00	109.66	35.66	74.00	106.31	32.96	7.22	36.83	267 304 Peak	HORIZONTAL																																																	
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RSM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 1 2483.50</td> <td>52.15</td> <td>-1.85</td> <td>54.00</td> <td>48.74</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>267 304 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	cm	deg			1 1 2483.50	52.15	-1.85	54.00	48.74	32.98	7.25	36.82	267 304 Average	HORIZONTAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Project : RSM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR) 230408 Plane : Y Full-directivity IMEI : #21 Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2460.00</td> <td>99.58</td> <td>45.58</td> <td>54.00</td> <td>96.23</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>267 304 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	cm	deg			1 * 2460.00	99.58	45.58	54.00	96.23	32.96	7.22	36.83	267 304 Average	HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBμV/m	dB	dBμV/m	dB	cm	deg																																																				
1 1 2483.50	52.15	-1.85	54.00	48.74	32.98	7.25	36.82	267 304 Average	HORIZONTAL																																																	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																		
MHz	dBμV/m	dB	dBμV/m	dB	cm	deg																																																				
1 * 2460.00	99.58	45.58	54.00	96.23	32.96	7.22	36.83	267 304 Average	HORIZONTAL																																																	



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Full CH11 2462MHz																																																													
CDD 1+2	Vertical	Fundamental																																																												
Peak	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2484.16</td> <td>64.03</td> <td>+9.97</td> <td>74.00</td> <td>60.62</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>250</td> <td>95 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg		1 2484.16	64.03	+9.97	74.00	60.62	32.98	7.25	36.82	250	95 Peak VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2460.00</td> <td>107.73</td> <td>33.73</td> <td>74.00</td> <td>104.38</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>250</td> <td>95 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg		1 * 2460.00	107.73	33.73	74.00	104.38	32.96	7.22	36.83	250	95 Peak VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg																																																						
1 2484.16	64.03	+9.97	74.00	60.62	32.98	7.25	36.82	250	95 Peak VERTICAL																																																					
Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg																																																						
1 * 2460.00	107.73	33.73	74.00	104.38	32.96	7.22	36.83	250	95 Peak VERTICAL																																																					
Avg.	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.74</td> <td>49.35</td> <td>-4.65</td> <td>54.00</td> <td>45.94</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>250</td> <td>95 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg		1 2483.74	49.35	-4.65	54.00	45.94	32.98	7.25	36.82	250	95 Average VERTICAL	<p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 0.2300kHz SRT:Auto Mode : (FR)230408 Plane : Y Full-directivity Powersetting : 49</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2460.00</td> <td>98.71</td> <td>44.71</td> <td>54.00</td> <td>95.36</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>250</td> <td>95 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg		1 * 2460.00	98.71	44.71	54.00	95.36	32.96	7.22	36.83	250	95 Average VERTICAL
Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg																																																						
1 2483.74	49.35	-4.65	54.00	45.94	32.98	7.25	36.82	250	95 Average VERTICAL																																																					
Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	deg	deg																																																						
1 * 2460.00	98.71	44.71	54.00	95.36	32.96	7.22	36.83	250	95 Average VERTICAL																																																					



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11ax HE20 Partial 106/53 CH01 2412MHz																																																													
CDD 1+2	Horizontal	Fundamental																																																												
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : Y Plane : Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.82</td> <td>56.90</td> <td>-12.10</td> <td>74.00</td> <td>53.78</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>308</td> <td>305 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg		1 2389.82	56.90	-12.10	74.00	53.78	32.88	7.10	36.86	308	305 Peak HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : Y Plane : Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2404.00</td> <td>110.32</td> <td>36.32</td> <td>74.00</td> <td>107.14</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>308</td> <td>305 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg		1 * 2404.00	110.32	36.32	74.00	107.14	32.90	7.13	36.85	308	305 Peak HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																						
1 2389.82	56.90	-12.10	74.00	53.78	32.88	7.10	36.86	308	305 Peak HORIZONTAL																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																						
1 * 2404.00	110.32	36.32	74.00	107.14	32.90	7.13	36.85	308	305 Peak HORIZONTAL																																																					
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : Y Plane : Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>41.56</td> <td>-12.44</td> <td>54.00</td> <td>38.44</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>308</td> <td>305 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg		1 2389.95	41.56	-12.44	54.00	38.44	32.88	7.10	36.86	308	305 Average HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu, China Project : FR230408 Mode : Y Plane : Full-directivity IMEI : 821 Powersetting : 04</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2404.00</td> <td>101.21</td> <td>47.21</td> <td>54.00</td> <td>98.03</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>308</td> <td>305 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg		1 * 2404.00	101.21	47.21	54.00	98.03	32.90	7.13	36.85	308	305 Average HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																						
1 2389.95	41.56	-12.44	54.00	38.44	32.88	7.10	36.86	308	305 Average HORIZONTAL																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	on	deg																																																						
1 * 2404.00	101.21	47.21	54.00	98.03	32.90	7.13	36.85	308	305 Average HORIZONTAL																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11ax HE20 Partial 106/53 CH01 2412MHz																																																																			
CDD 1+2	Vertical	Fundamental																																																																		
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 1 IMEI : 821 Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>59.97</td> <td>-14.03</td> <td>74.00</td> <td>56.85</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>235</td> <td>89 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2389.95	59.97	-14.03	74.00	56.85	32.88	7.10	36.86	235	89 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 1 IMEI : 821 Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2410.00</td> <td>110.82</td> <td>36.82</td> <td>74.00</td> <td>107.64</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>235</td> <td>89 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2410.00	110.82	36.82	74.00	107.64	32.90	7.13	36.85	235	89 Peak	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2389.95	59.97	-14.03	74.00	56.85	32.88	7.10	36.86	235	89 Peak	VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2410.00	110.82	36.82	74.00	107.64	32.90	7.13	36.85	235	89 Peak	VERTICAL																																																										
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 1 IMEI : 821 Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>43.45</td> <td>-10.55</td> <td>54.00</td> <td>40.33</td> <td>32.88</td> <td>7.10</td> <td>36.86</td> <td>235</td> <td>89 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2389.95	43.45	-10.55	54.00	40.33	32.88	7.10	36.86	235	89 Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030805-KS Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mode : (FR) 230408 Plane : 17 Full-directivity : 1 IMEI : 821 Powersetting : S4</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2410.00</td> <td>102.29</td> <td>48.29</td> <td>54.00</td> <td>99.11</td> <td>32.90</td> <td>7.13</td> <td>36.85</td> <td>235</td> <td>89 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg	1 2410.00	102.29	48.29	54.00	99.11	32.90	7.13	36.85	235	89 Average	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2389.95	43.45	-10.55	54.00	40.33	32.88	7.10	36.86	235	89 Average	VERTICAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	cm	deg																																																										
1 2410.00	102.29	48.29	54.00	99.11	32.90	7.13	36.85	235	89 Average	VERTICAL																																																										



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																	
ANT	802.11ax HE20 Partial 106/54 CH11 2462MHz																																																																	
CDD 1+2	Horizontal	Fundamental																																																																
<p><b>Peak</b></p>	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL            Economic &amp; Technical Development Zone, Jiangsu China            Project : FR230408            Mode : 20            Plane : Y            Full-directivity            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.92</td> <td>61.35</td> <td>-12.65</td> <td>74.00</td> <td>57.94</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>156</td> <td>301 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg			1	2483.92	61.35	-12.65	74.00	57.94	32.98	7.25	36.82	156	301 Peak	HORIZONTAL	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 HORIZONTAL            Economic &amp; Technical Development Zone, Jiangsu China            Project : FR230408            Mode : 20            Plane : Y            Full-directivity            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>106.28</td> <td>32.28</td> <td>74.00</td> <td>102.93</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>156</td> <td>301 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg			1	2464.00	106.28	32.28	74.00	102.93	32.96	7.22	36.83	156	301 Peak	HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																											
1	2483.92	61.35	-12.65	74.00	57.94	32.98	7.25	36.82	156	301 Peak	HORIZONTAL																																																							
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																											
1	2464.00	106.28	32.28	74.00	102.93	32.96	7.22	36.83	156	301 Peak	HORIZONTAL																																																							
<p><b>Avg.</b></p>	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL            Economic &amp; Technical Development Zone, Jiangsu China            Project : FR230408            Mode : 20            Plane : Y            Full-directivity            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>43.69</td> <td>-10.31</td> <td>54.00</td> <td>40.28</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>156</td> <td>301 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg			1	2483.50	43.69	-10.31	54.00	40.28	32.98	7.25	36.82	156	301 Average	HORIZONTAL	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 HORIZONTAL            Economic &amp; Technical Development Zone, Jiangsu China            Project : FR230408            Mode : 20            Plane : Y            Full-directivity            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>97.96</td> <td>43.96</td> <td>54.00</td> <td>94.61</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>156</td> <td>301 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg			1	2464.00	97.96	43.96	54.00	94.61	32.96	7.22	36.83	156	301 Average	HORIZONTAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																											
1	2483.50	43.69	-10.31	54.00	40.28	32.98	7.25	36.82	156	301 Average	HORIZONTAL																																																							
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																											
1	2464.00	97.96	43.96	54.00	94.61	32.96	7.22	36.83	156	301 Average	HORIZONTAL																																																							







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																							
ANT	802.11ax HE20 Partial 106/54 CH11 2462MHz																																																																							
CDD 1+2	Vertical	Fundamental																																																																						
Peak	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL            Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity : Y            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>57.66</td> <td>-16.34</td> <td>74.00</td> <td>94.25</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>196</td> <td>93 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dB	dB	dB	cm	deg	1 2483.50	57.66	-16.34	74.00	94.25	32.98	7.25	36.82	196	93 Peak	VERTICAL	<p>Site : 030805-KS            Condition : FCC PART 15C 3m 3317 SN 75957 VERTICAL            Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity : Y            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2472.00</td> <td>108.39</td> <td>34.39</td> <td>74.00</td> <td>105.01</td> <td>32.98</td> <td>7.22</td> <td>36.82</td> <td>196</td> <td>93 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dB	dB	dB	cm	deg	1 * 2472.00	108.39	34.39	74.00	105.01	32.98	7.22	36.82	196	93 Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Line	Level Factor	Loss Factor																																																																				
MHz	dBm	dB	dB	dB	dB	cm	deg																																																																	
1 2483.50	57.66	-16.34	74.00	94.25	32.98	7.25	36.82	196	93 Peak	VERTICAL																																																														
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Line	Level Factor	Loss Factor																																																																				
MHz	dBm	dB	dB	dB	dB	cm	deg																																																																	
1 * 2472.00	108.39	34.39	74.00	105.01	32.98	7.22	36.82	196	93 Peak	VERTICAL																																																														
Avg.	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL            Project : RRM 1000.000kHz VBR 0.0100kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity : Y            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>42.31</td> <td>-11.69</td> <td>54.00</td> <td>38.90</td> <td>32.98</td> <td>7.25</td> <td>36.82</td> <td>196</td> <td>93 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dB	dB	dB	cm	deg	1 2483.50	42.31	-11.69	54.00	38.90	32.98	7.25	36.82	196	93 Average	VERTICAL	<p>Site : 030805-KS            Condition : FCC PART 15C (AVG) 3m 3317 SN 75957 VERTICAL            Project : RRM 1000.000kHz VBR 0.0100kHz SRT:Auto            Mode : (FR)230408            Plane : Y            Full-directivity : Y            Powersetting : 40</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2464.00</td> <td>98.79</td> <td>44.79</td> <td>54.00</td> <td>95.44</td> <td>32.96</td> <td>7.22</td> <td>36.83</td> <td>196</td> <td>93 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm	dB	dB	dB	dB	cm	deg	1 * 2464.00	98.79	44.79	54.00	95.44	32.96	7.22	36.83	196	93 Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Line	Level Factor	Loss Factor																																																																				
MHz	dBm	dB	dB	dB	dB	cm	deg																																																																	
1 2483.50	42.31	-11.69	54.00	38.90	32.98	7.25	36.82	196	93 Average	VERTICAL																																																														
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Line	Level Factor	Loss Factor																																																																				
MHz	dBm	dB	dB	dB	dB	cm	deg																																																																	
1 * 2464.00	98.79	44.79	54.00	95.44	32.96	7.22	36.83	196	93 Average	VERTICAL																																																														



2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																													
ANT	802.11b CH01 2412MHz																																																													
CDD 1+2	Horizontal	Vertical																																																												
Peak Avg.	<p>No. 1098, Pengji North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D005-KS Condition : FCC PART 15C 3m 3317.0M 75957 HORIZONTAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : FR230408C Plane : Y Polarization : Full-directivity IPEI : 821 Power setting : 78</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>39.96</td> <td>-34.04</td> <td>74.00</td> <td>40.89</td> <td>34.20</td> <td>10.25</td> <td>65.38</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss Factor	dB	dB	dB	deg	1	4830.00	39.96	-34.04	74.00	40.89	34.20	10.25	65.38	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengji North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D005-KS Condition : FCC PART 15C 3m 3317.0M 75957 VERTICAL Project : RSM 1000.000kHz VBR 3000.000kHz SRT Auto Mode : FR230408C Plane : Y Polarization : Full-directivity IPEI : 821 Power setting : 78</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>40.00</td> <td>-34.00</td> <td>74.00</td> <td>40.93</td> <td>34.20</td> <td>10.25</td> <td>65.38</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss Factor	dB	dB	dB	deg	1	4830.00	40.00	-34.00	74.00	40.93	34.20	10.25	65.38	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Level	Line	Level	Factor	Loss Factor	dB	dB	dB	deg																																																						
1	4830.00	39.96	-34.04	74.00	40.89	34.20	10.25	65.38	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Level	Line	Level	Factor	Loss Factor	dB	dB	dB	deg																																																						
1	4830.00	40.00	-34.00	74.00	40.93	34.20	10.25	65.38	100	0 Peak	VERTICAL																																																			

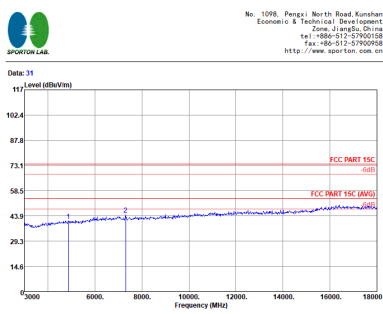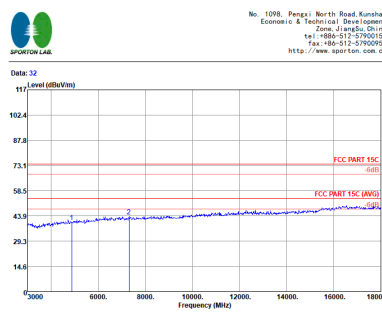

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																	
ANT	802.11b CH06 2437MHz																																																																																	
CDD 1+2	Horizontal	Vertical																																																																																
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 030805-K5            Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL            Project : RBE 1000.000kHz VBR 3000.000kHz SRT:Auto            PRF230408C            Mode : 2            Plane : Y            Full-directivity            IMEI : 82            Powersetting : 06</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4875.00</td> <td>40.94</td> <td>-33.06</td> <td>74.00</td> <td>61.84</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> <tr> <td>2 7305.00</td> <td>44.61</td> <td>-29.39</td> <td>74.00</td> <td>61.94</td> <td>35.86</td> <td>12.72</td> <td>65.91</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	dB	cm	deg			1 4875.00	40.94	-33.06	74.00	61.84	34.23	10.29	65.42	300	0 Peak HORIZONTAL	2 7305.00	44.61	-29.39	74.00	61.94	35.86	12.72	65.91	300	0 Peak HORIZONTAL	 <p>Site : 030805-K5            Condition : FCC PART 15C 3m 3317.5M 75957 VERTICAL            Project : RBE 1000.000kHz VBR 3000.000kHz SRT:Auto            PRF230408C            Mode : 2            Plane : Y            Full-directivity            IMEI : 82            Powersetting : 06</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4875.00</td> <td>40.21</td> <td>-33.49</td> <td>74.00</td> <td>61.21</td> <td>34.23</td> <td>10.29</td> <td>65.42</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> <tr> <td>2 7305.00</td> <td>43.82</td> <td>-30.18</td> <td>74.00</td> <td>61.15</td> <td>35.86</td> <td>12.72</td> <td>65.91</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dB	dB	dB	cm	deg			1 4875.00	40.21	-33.49	74.00	61.21	34.23	10.29	65.42	100	0 Peak VERTICAL	2 7305.00	43.82	-30.18	74.00	61.15	35.86	12.72	65.91	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBm	dBm	dB	dB	dB	cm	deg																																																																											
1 4875.00	40.94	-33.06	74.00	61.84	34.23	10.29	65.42	300	0 Peak HORIZONTAL																																																																									
2 7305.00	44.61	-29.39	74.00	61.94	35.86	12.72	65.91	300	0 Peak HORIZONTAL																																																																									
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																									
MHz	dBm	dBm	dB	dB	dB	cm	deg																																																																											
1 4875.00	40.21	-33.49	74.00	61.21	34.23	10.29	65.42	100	0 Peak VERTICAL																																																																									
2 7305.00	43.82	-30.18	74.00	61.15	35.86	12.72	65.91	100	0 Peak VERTICAL																																																																									



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																													
ANT	802.11b CH11 2462MHz																																																																																																													
CDD 1+2	Horizontal	Vertical																																																																																																												
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-K5 Condition : FCC PART 15C 3m 3317.5M 75957 HORIZONTAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto FCC230408C Mode : 17 Plane : Y Full-directivity IMEI : 821 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>41.18</td> <td>-32.82</td> <td>74.00</td> <td>62.03</td> <td>34.26</td> <td>10.34</td> <td>65.45</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7380.00</td> <td>50.82</td> <td>-32.18</td> <td>74.00</td> <td>68.32</td> <td>35.88</td> <td>12.73</td> <td>66.11</td> <td>302</td> <td>150 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7380.00</td> <td>45.08</td> <td>-38.70</td> <td>54.00</td> <td>62.08</td> <td>35.88</td> <td>12.73</td> <td>66.11</td> <td>302</td> <td>150 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	4920.00	41.18	-32.82	74.00	62.03	34.26	10.34	65.45	300	0 Peak	HORIZONTAL	2	7380.00	50.82	-32.18	74.00	68.32	35.88	12.73	66.11	302	150 Peak	HORIZONTAL	3	7380.00	45.08	-38.70	54.00	62.08	35.88	12.73	66.11	302	150 Average	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-K5 Condition : FCC PART 15C 3m 3317.5M 75957 VERTICAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT:Auto FCC230408C Mode : 17 Plane : Y Full-directivity IMEI : 821 Powersetting : 21</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>41.31</td> <td>-32.49</td> <td>74.00</td> <td>62.16</td> <td>34.26</td> <td>10.34</td> <td>65.45</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7380.00</td> <td>50.48</td> <td>-32.52</td> <td>74.00</td> <td>67.98</td> <td>35.88</td> <td>12.73</td> <td>66.11</td> <td>256</td> <td>305 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>7380.00</td> <td>44.76</td> <td>-37.72</td> <td>54.00</td> <td>61.78</td> <td>35.88</td> <td>12.73</td> <td>66.11</td> <td>256</td> <td>305 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	4920.00	41.31	-32.49	74.00	62.16	34.26	10.34	65.45	100	0 Peak	VERTICAL	2	7380.00	50.48	-32.52	74.00	67.98	35.88	12.73	66.11	256	305 Peak	VERTICAL	3	7380.00	44.76	-37.72	54.00	61.78	35.88	12.73	66.11	256	305 Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																																																																						
1	4920.00	41.18	-32.82	74.00	62.03	34.26	10.34	65.45	300	0 Peak	HORIZONTAL																																																																																																			
2	7380.00	50.82	-32.18	74.00	68.32	35.88	12.73	66.11	302	150 Peak	HORIZONTAL																																																																																																			
3	7380.00	45.08	-38.70	54.00	62.08	35.88	12.73	66.11	302	150 Average	HORIZONTAL																																																																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																																																																						
1	4920.00	41.31	-32.49	74.00	62.16	34.26	10.34	65.45	100	0 Peak	VERTICAL																																																																																																			
2	7380.00	50.48	-32.52	74.00	67.98	35.88	12.73	66.11	256	305 Peak	VERTICAL																																																																																																			
3	7380.00	44.76	-37.72	54.00	61.78	35.88	12.73	66.11	256	305 Average	VERTICAL																																																																																																			