

01_LTE Band 71_20M_QPSK_1RB_0Offset_Edge 4_0mm_Ch133322


Communication System: Band 71, E-UTRA/FDD; Frequency: 683.0
Medium: HSL. Medium parameters used: $f= 683.0$ MHz; $\sigma= 0.897$ S/m; $\epsilon_r = 42.3$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (40.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.481 W/kg; SAR (10g) = 0.265 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.629 W/kg; SAR (10g) = 0.244 W/kg;

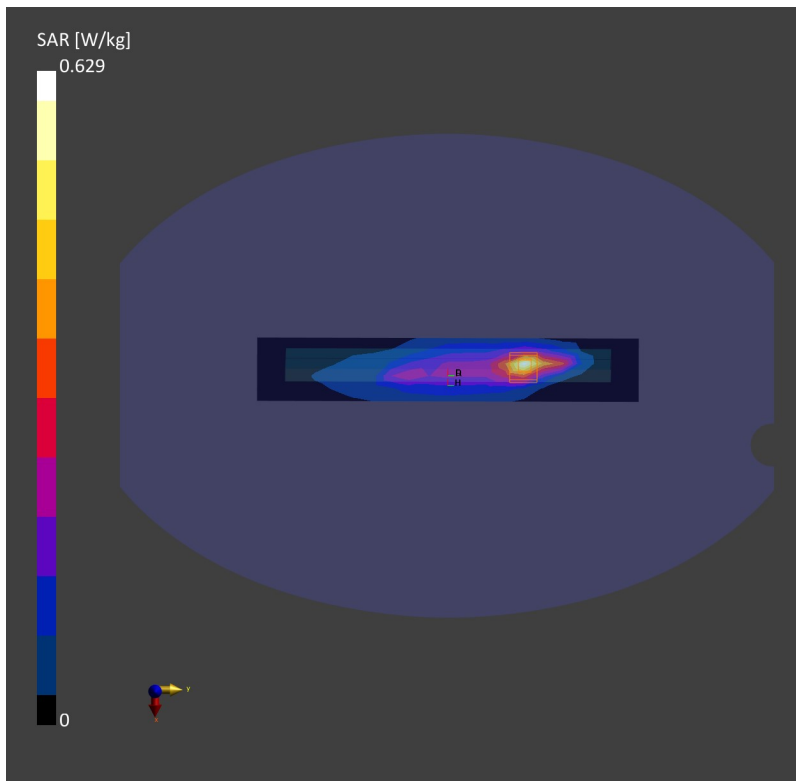

02_FR1 n71_20M_QPSK_1RB_1Offset_Edge 4_0mm_Ch136100

Communication System: Band n71; Frequency: 680.5

Medium: HSL. Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.402 W/kg; SAR (10g) = 0.264 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.481 W/kg; SAR (10g) = 0.262 W/kg;

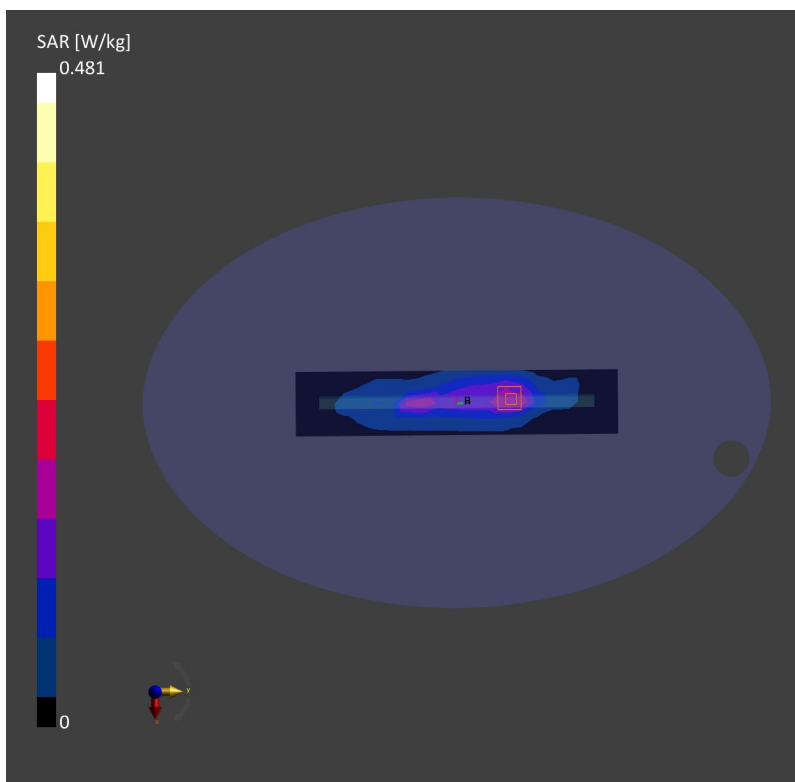

03_LTE Band 12_10M_QPSK_1RB_0Offset_Edge 4_0mm_Ch23095


Communication System: Band 12, E-UTRA/FDD; Frequency: 707.5
Medium: HSL. Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.2$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (40.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.806 W/kg; SAR (10g) = 0.468 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.05 dB
SAR (1g) = 1.00 W/kg; SAR (10g) = 0.405 W/kg;

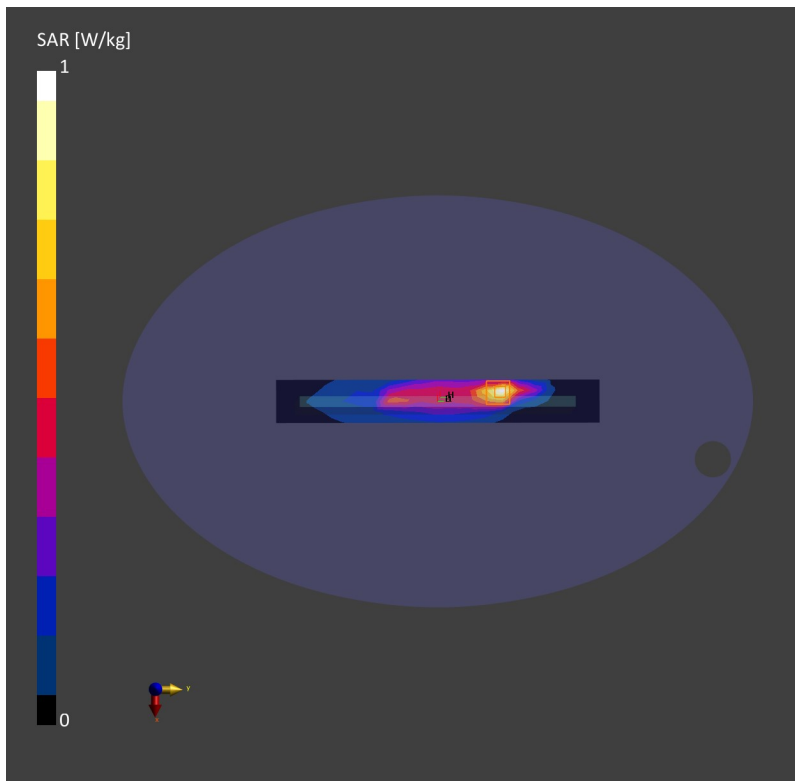

04_FR1 n12_15M_QPSK_1RB_1Offset_Edge 4_0mm_Ch141500

Communication System: Band n12; Frequency: 707.5

Medium: HSL. Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.725 W/kg; SAR (10g) = 0.318 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.741 W/kg; SAR (10g) = 0.336 W/kg;

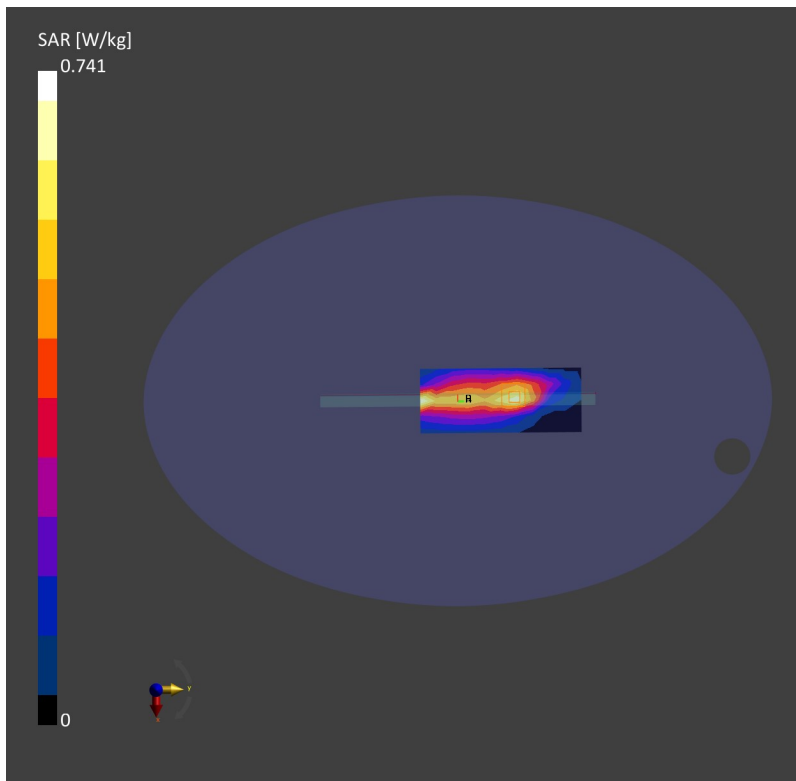

05_LTE Band 13_10M_QPSK_1RB_0Offset_Edge 4_0mm_Ch23230


Communication System: Band 13, E-UTRA/FDD; Frequency: 782.0
Medium: HSL. Medium parameters used: $f= 782.0$ MHz; $\sigma= 0.933$ S/m; $\epsilon_r = 42.0$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.484 W/kg; SAR (10g) = 0.295 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.839 W/kg; SAR (10g) = 0.323 W/kg;

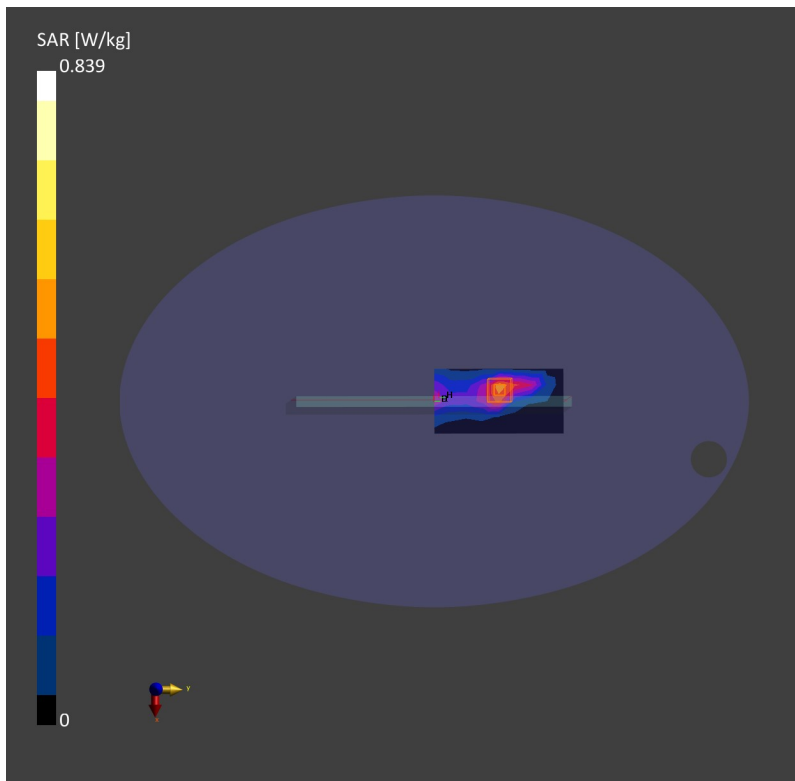

06_FR1 n13_10M_QPSK_25RB_14Offset_Edge 4_0mm_Ch156400

Communication System: Band n13; Frequency: 782.0

Medium: . Medium parameters used: $f= 782.0$ MHz; $\sigma= 0.933$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.884 W/kg; SAR (10g) = 0.315 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 0.892 W/kg; SAR (10g) = 0.343 W/kg;

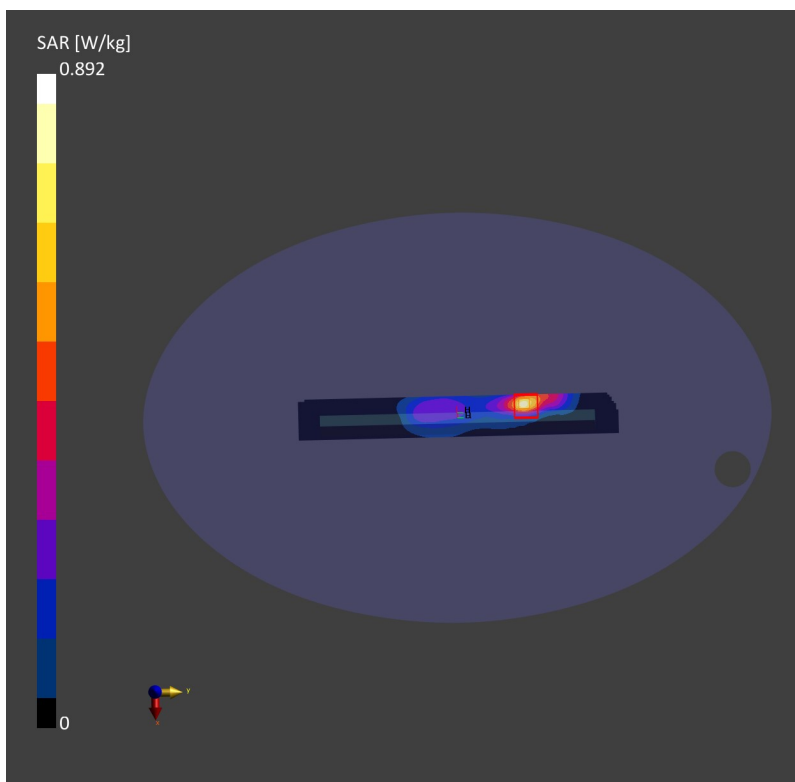

07_LTE Band 14_10M_QPSK_1RB_0Offset_Edge 4_0mm_Ch23330


Communication System: Band 14, E-UTRA/FDD; Frequency: 793.0
Medium: HSL. Medium parameters used: $f=793.0$ MHz; $\sigma=0.937$ S/m; $\epsilon_r=42.0$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (40.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.883 W/kg; SAR (10g) = 0.410 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.06 dB
SAR (1g) = 0.951 W/kg; SAR (10g) = 0.338 W/kg;

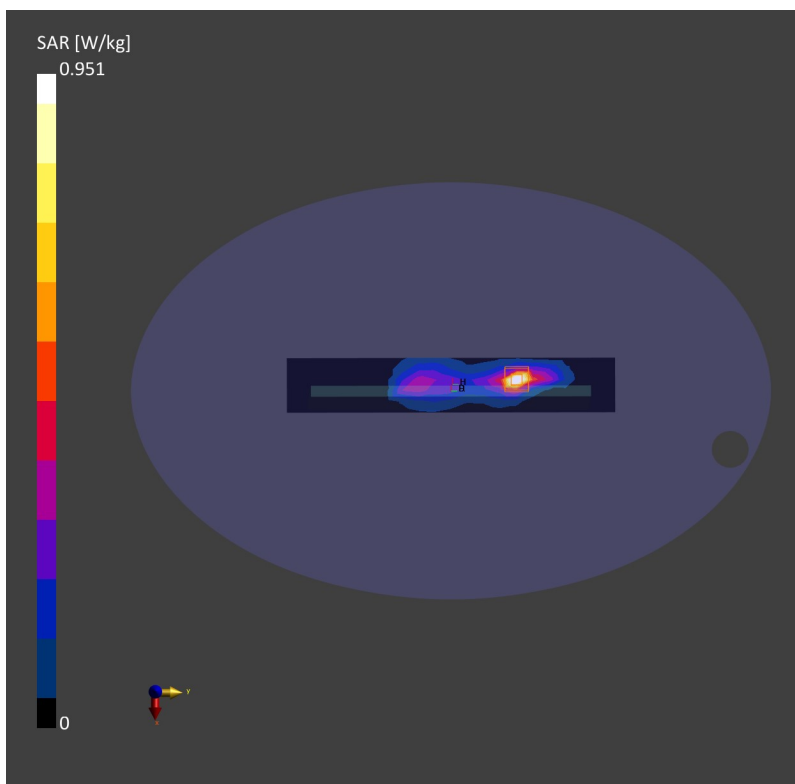

08_FR1 n14_10M_QPSK_25RB_14Offset_Edge 4_0mm_Ch158600

Communication System: Band n14; Frequency: 793.0

Medium: . Medium parameters used: $f= 793.0$ MHz; $\sigma= 0.937$ S/m; $\epsilon_r= 42.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.86, 10.86, 10.86); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.249 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.08 dB

SAR (1g) = 0.987 W/kg; SAR (10g) = 0.329 W/kg;

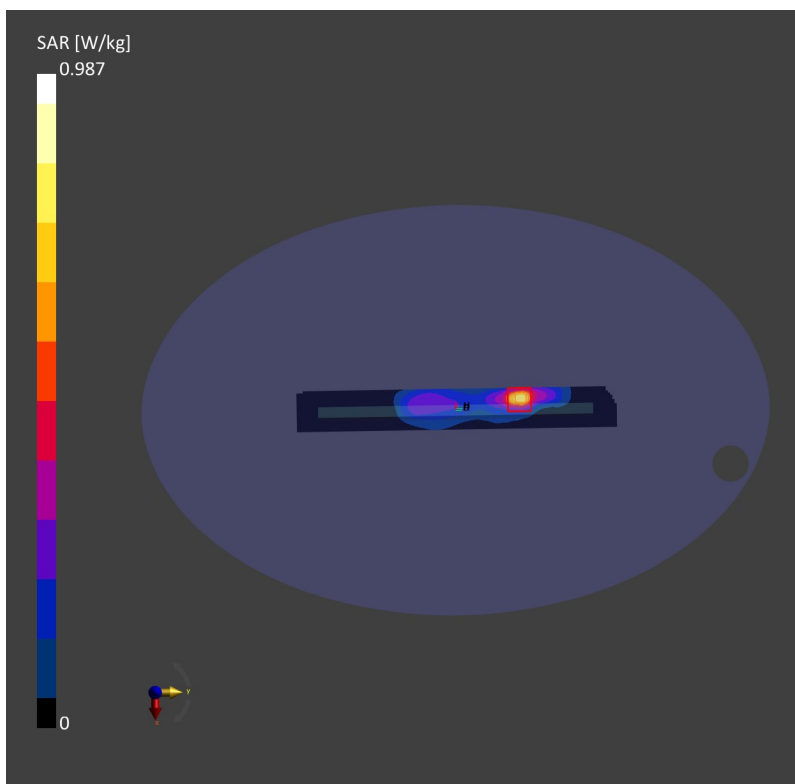

09_LTE Band 5_10M_QPSK_1RB_0Offset_Bottom Face_0mm_Ch20525

Communication System: Band 5, E-UTRA/FDD; Frequency: 836.5

Medium: HSL. Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.779 W/kg; SAR (10g) = 0.453 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.933 W/kg; SAR (10g) = 0.451 W/kg;

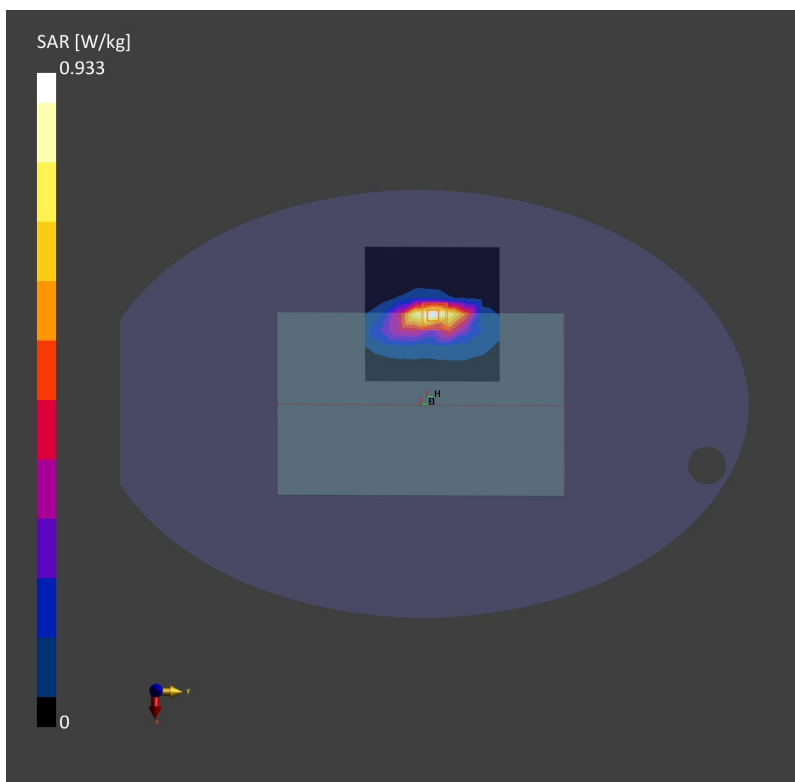

10_FR1 n5_20M_QPSK_50RB_28Offset_Edge 4_0mm_Ch167300

Communication System: Band n5; Frequency: 836.5

Medium: HSL. Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.559 W/kg; SAR (10g) = 0.352 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.385 W/kg;

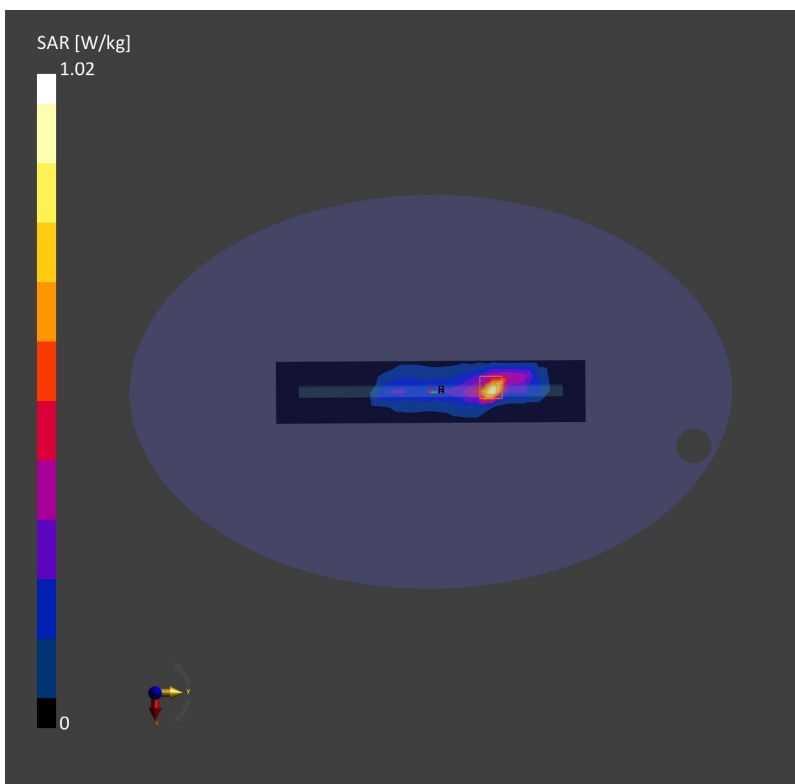

11_LTE Band 26_15M_QPSK_1RB_0Offset_Edge 4_0mm_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5

Medium: HSL. Medium parameters used: $f= 831.5$ MHz; $\sigma= 0.908$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (40.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.342 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.926 W/kg; SAR (10g) = 0.363 W/kg;

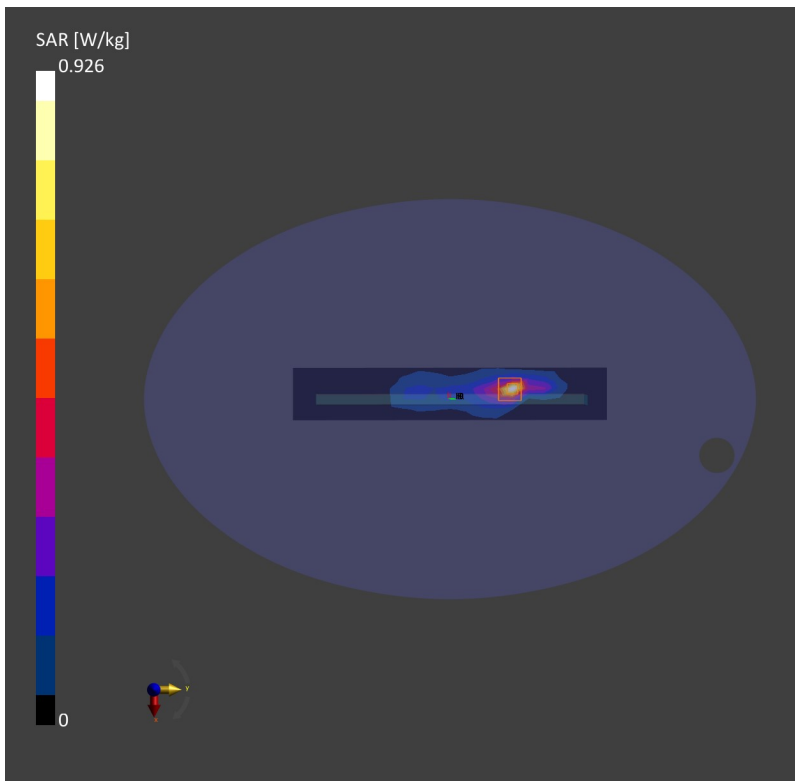

12_LTE Band 66_20M_QPSK_1RB_0Offset_Bottom Face_0mm_Ch132072

Communication System: Band 66, E-UTRA/FDD; Frequency: 1720.0

Medium: HSL. Medium parameters used: $f=1720.0$ MHz; $\sigma=1.31$ S/m; $\epsilon_r=38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.22, 9.22, 9.22); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.975 W/kg; SAR (10g) = 0.425 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.467 W/kg;

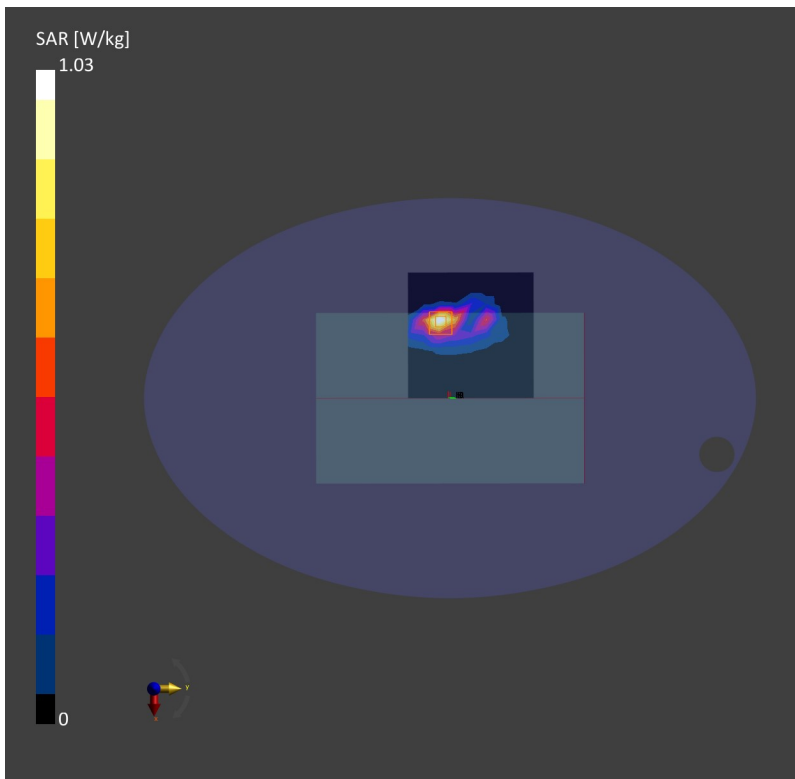

13_FR1 n66_30M_QPSK_1RB_1Offset_Bottom Face_0mm_Ch349000

Communication System: Band n66; Frequency: 1745.0

Medium: HSL. Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.22, 9.22, 9.22); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.925 W/kg; SAR (10g) = 0.501 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.965 W/kg; SAR (10g) = 0.485 W/kg;

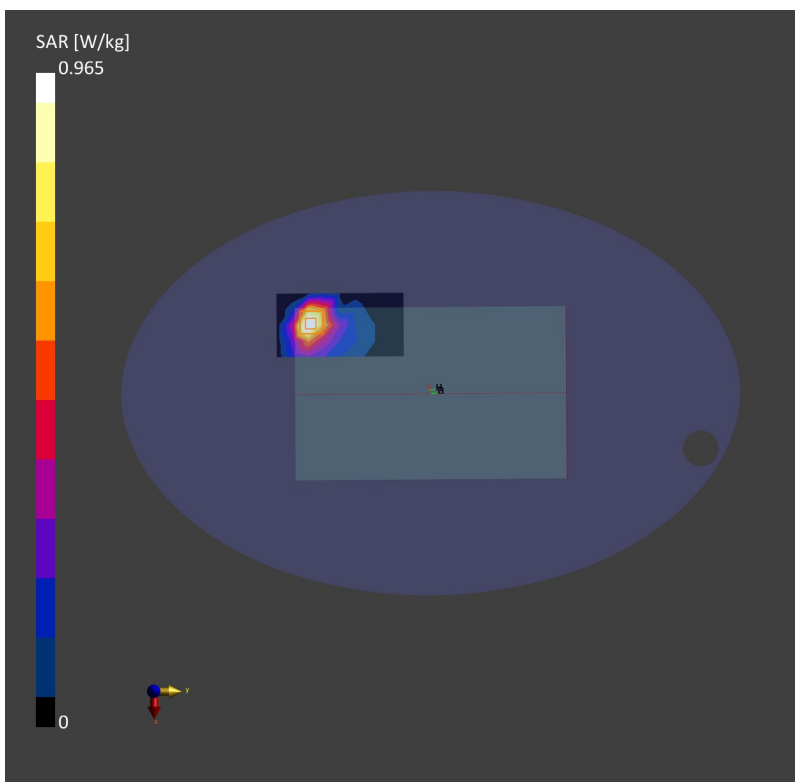

14_LTE Band 25_20M_QPSK_1RB_0Offset_Edge 4_0mm_Ch26590


Communication System: Band 25, E-UTRA/FDD; Frequency: 1905.0
Medium: HSL. Medium parameters used: $f=1905.0$ MHz; $\sigma=1.41$ S/m; $\epsilon_r=41.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (40.0 mm x 300.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.03 W/kg; SAR (10g) = 0.494 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.04 dB
SAR (1g) = 1.05 W/kg; SAR (10g) = 0.498 W/kg;

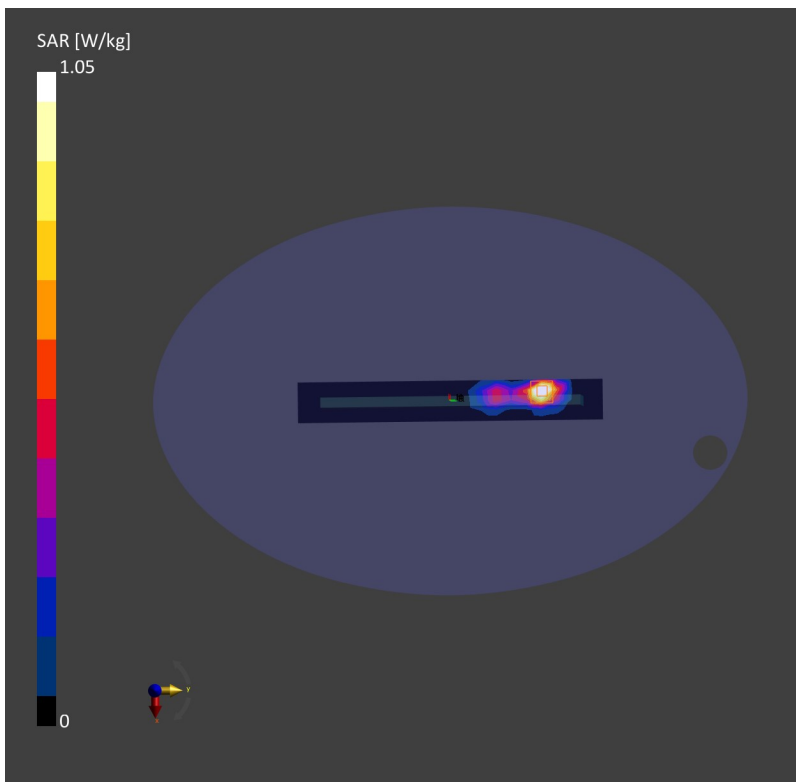

15_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Face_0mm_Ch19100


Communication System: Band 2, E-UTRA/FDD; Frequency: 1900.0
Medium: HSL. Medium parameters used: $f=1900.0$ MHz; $\sigma=1.40$ S/m; $\epsilon_r=41.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.886 W/kg; SAR (10g) = 0.409 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.03 dB
SAR (1g) = 0.967 W/kg; SAR (10g) = 0.415 W/kg;

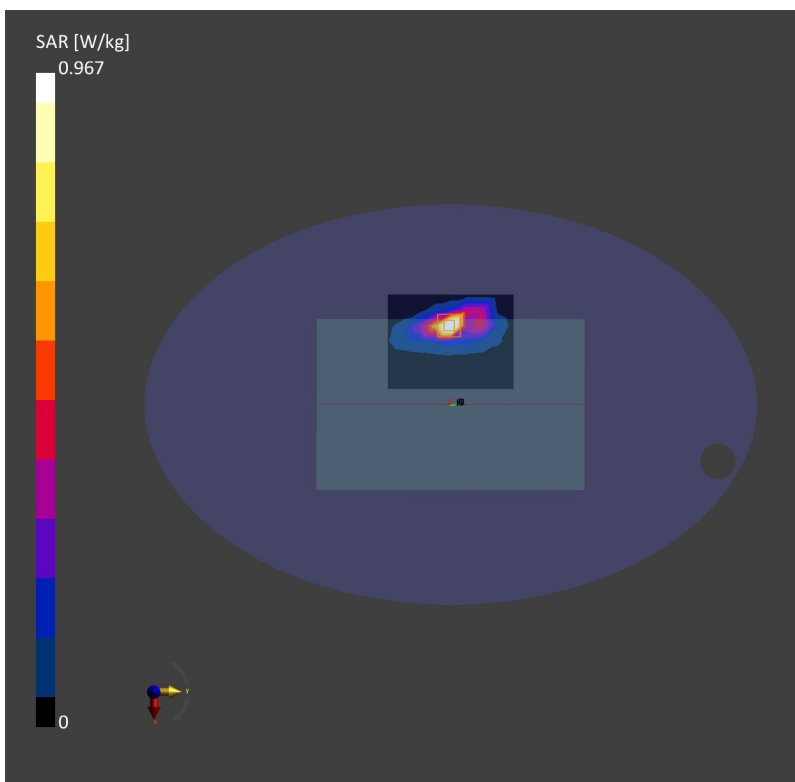

16_FR1 n25_20M_QPSK_50RB_28Offset_Edge 4_0mm_Ch376500

Communication System: Band n25; Frequency: 1882.5

Medium: HSL. Medium parameters used: $f= 1882.5$ MHz; $\sigma= 1.38$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.708 W/kg; SAR (10g) = 0.381 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.467 W/kg;

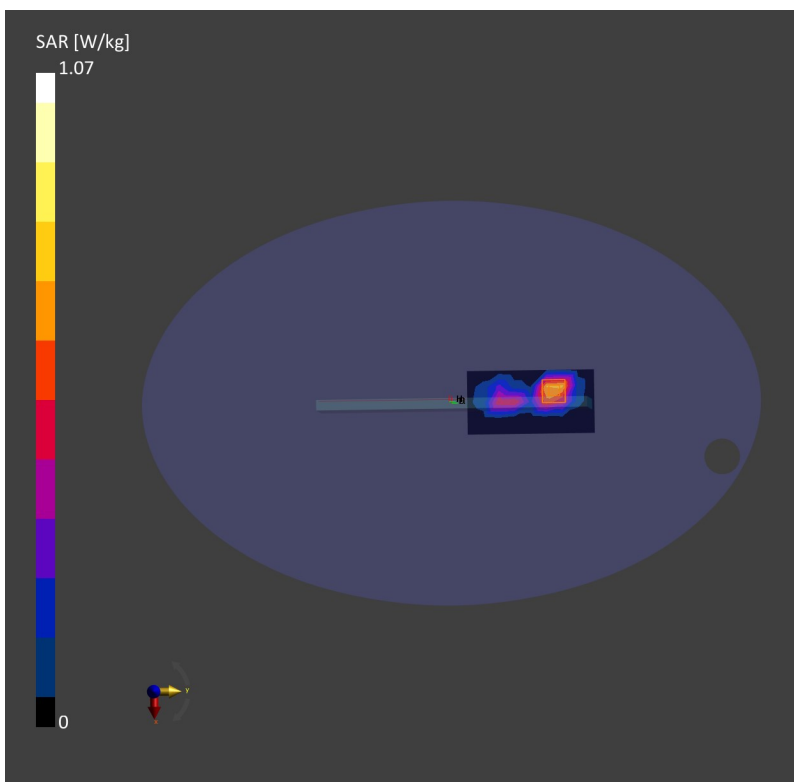

17_LTE Band 7_20M_QPSK_1RB_0Offset_Bottom Face_0mm_Ch21100

Communication System: Band 7, E-UTRA/FDD; Frequency: 2535.0

Medium: HSL. Medium parameters used: $f= 2535.0$ MHz; $\sigma= 1.87$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.416 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.402 W/kg;

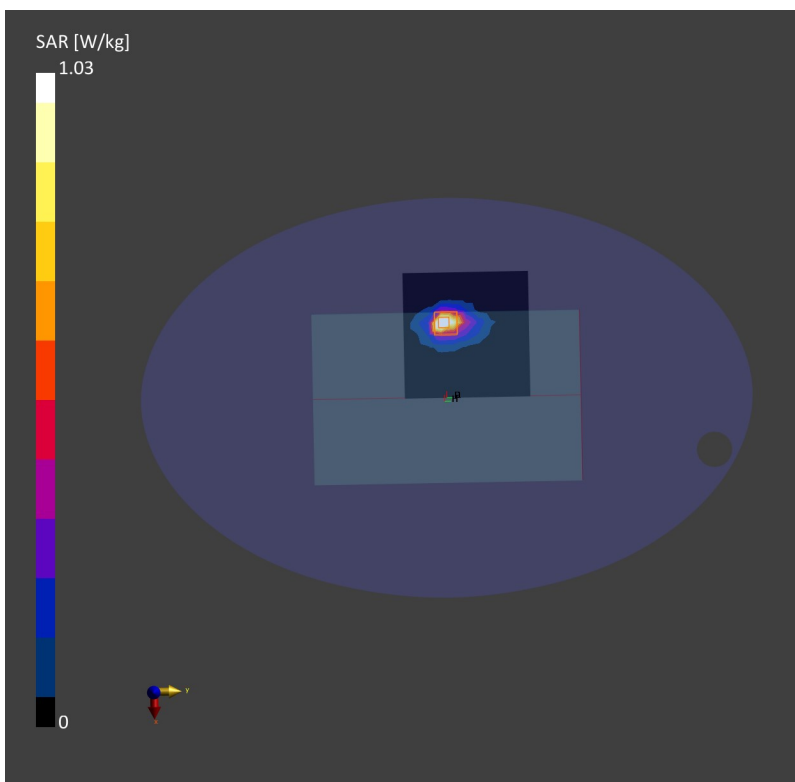

18_LTE Band 38_20M_QPSK_1RB_0Offset_Edge 4_0mm_Ch38150


Communication System: Band 38, E-UTRA/TDD; Frequency: 2610.0
Medium: HSL. Medium parameters used: $f= 2610.0$ MHz; $\sigma= 2.04$ S/m; $\epsilon_r= 37.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (40.0 mm x 288.0 mm): Measurement Grid: 120 mm x 12.0 mm
SAR (1g) = 0.929 W/kg; SAR (10g) = 0.329 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.03B
SAR (1g) = 1.03 W/kg; SAR (10g) = 0.365 W/kg;

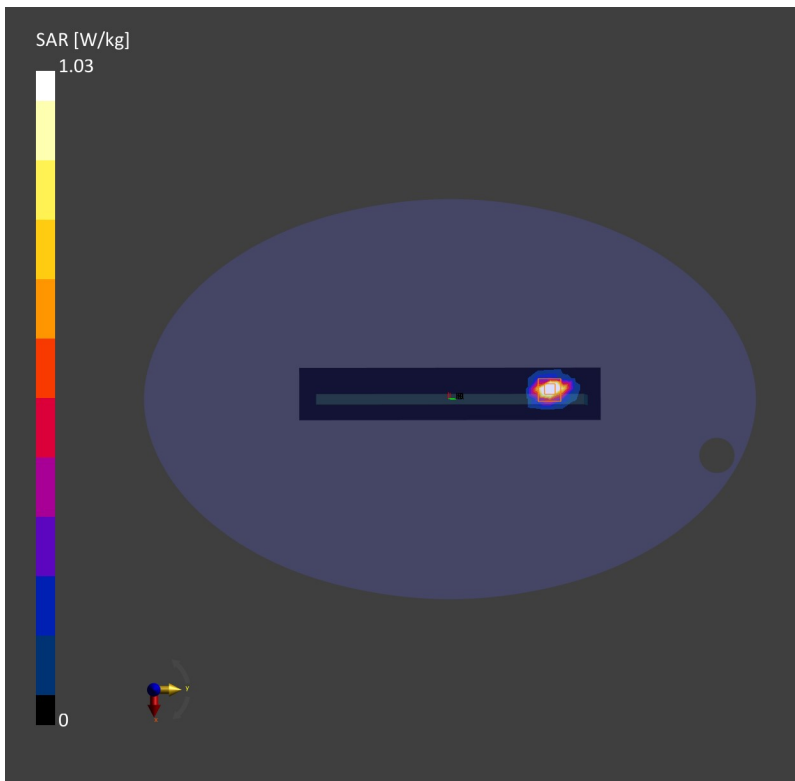

19_FR1 n7_50M_QPSK_135RB_68Offset_Bottom Face_0mm_Ch507000

Communication System: Band n7; Frequency: 2535.0

Medium: HSL. Medium parameters used: $f= 2535.0$ MHz; $\sigma= 1.87$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (72.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.937 W/kg; SAR (10g) = 0.395 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.977 W/kg; SAR (10g) = 0.402 W/kg;

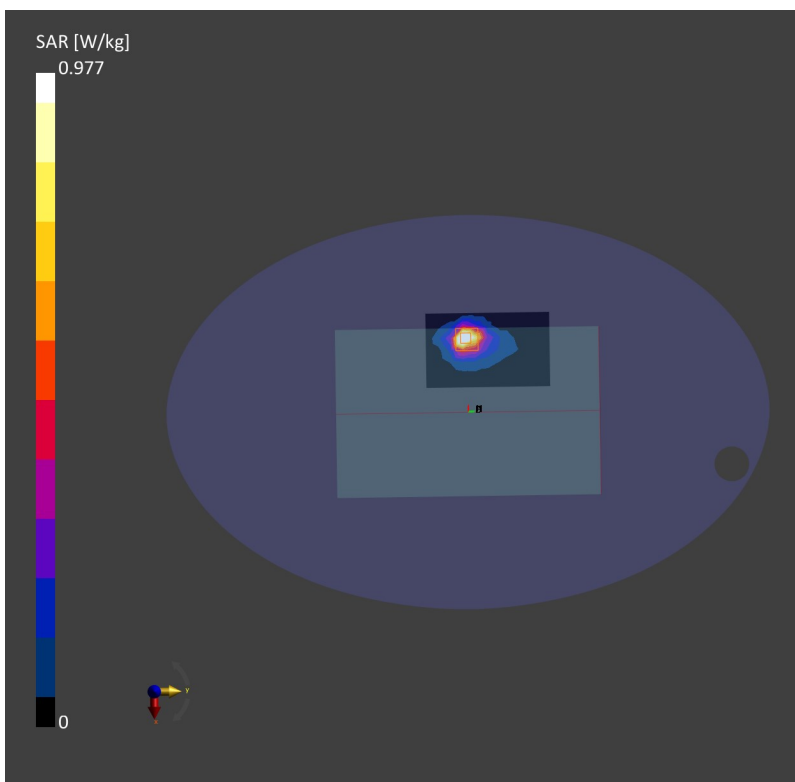

20_LTE Band 41_20M_QPSK_1RB_0Offset_Bottom Face_0mm_Ch40620

Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f= 2593.0$ MHz; $\sigma= 1.92$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.391 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.08 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.393 W/kg;

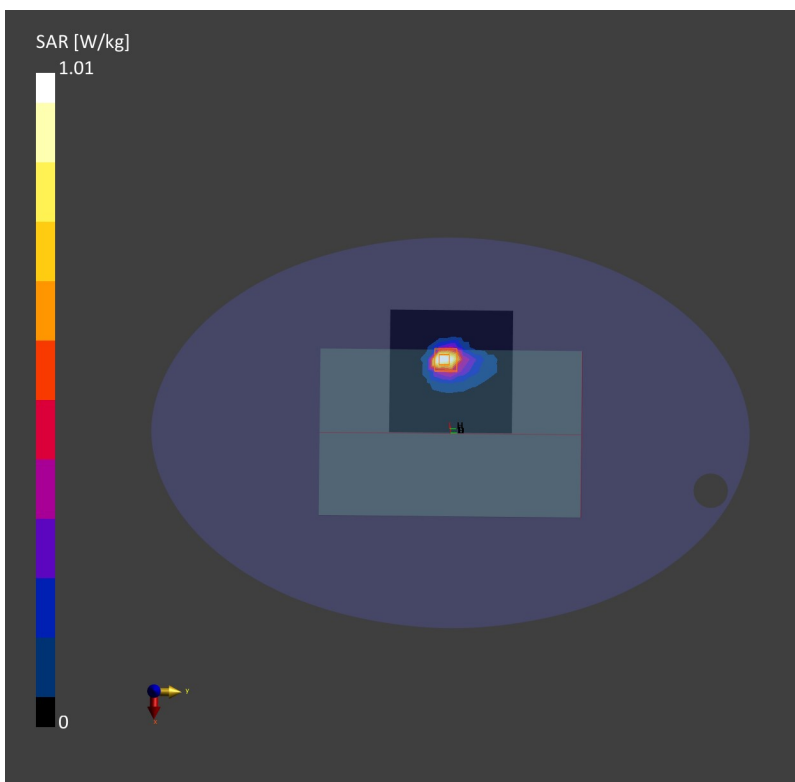

Date: 2022-07-06

21_FR1 n41-HPUE_100M_QPSK_1RB_1Offset_Bottom Face_0mm_Ch518598

Communication System: Band n41; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f= 2593.0$ MHz; $\sigma= 1.92$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.306 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 0.830 W/kg; SAR (10g) = 0.321 W/kg;

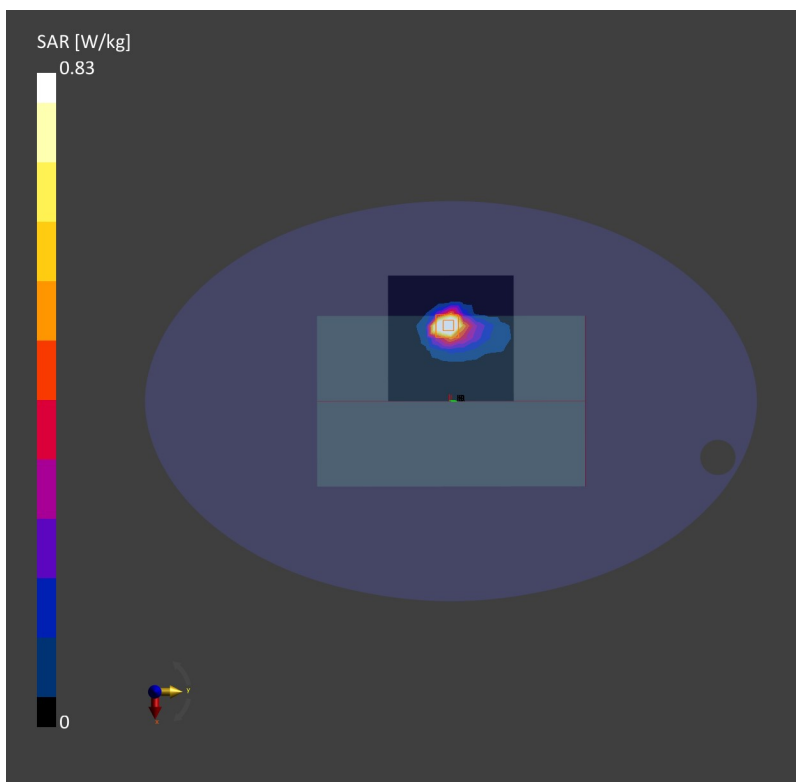

22_LTE Band 48_20M_QPSK_1RB_0Offset_Bottom Face_0mm_Ch55340

Communication System: Band 48, E-UTRA/TDD; Frequency: 3560.0

Medium: HSL. Medium parameters used: $f = 3560.0$ MHz; $\sigma = 2.84$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.55, 7.55, 7.55); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (100.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.929 W/kg; SAR (10g) = 0.380 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.391 W/kg;

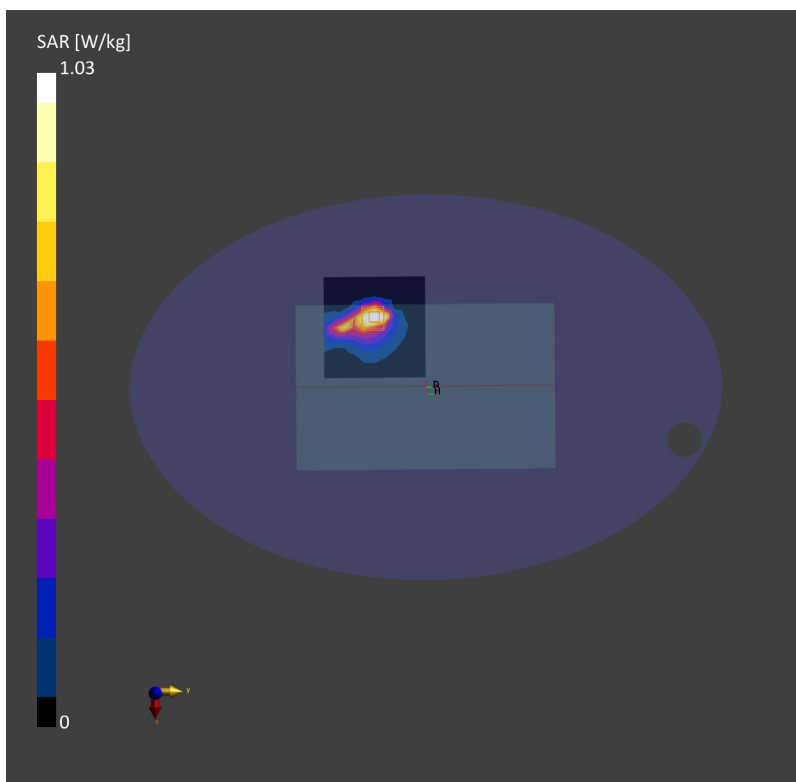

23_FR1 n48_40M_QPSK_50RB_28Offset_Bottom Face_0mm_Ch641666

Communication System: Band n48; Frequency: 3625.0

Medium: HSL. Medium parameters used: $f= 3625.0$ MHz; $\sigma= 3.08$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.5, 7.5, 7.5); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.963 W/kg; SAR (10g) = 0.403 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.399 W/kg;

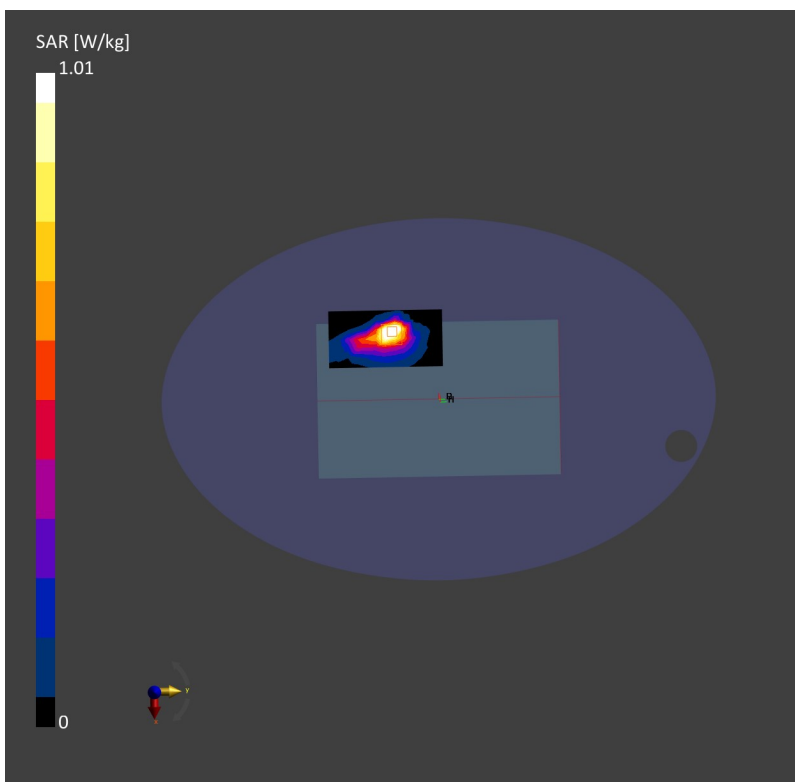

24_Part27O_FR1 n77_100M_QPSK_135RB_69Offset_Bottom Face_0mm_Ch656000

Communication System: Band n77; Frequency: 3840.0

Medium: HSL. Medium parameters used: $f= 3840.0$ MHz; $\sigma= 3.26$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.2, 7.2, 7.2); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.420 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.442 W/kg;

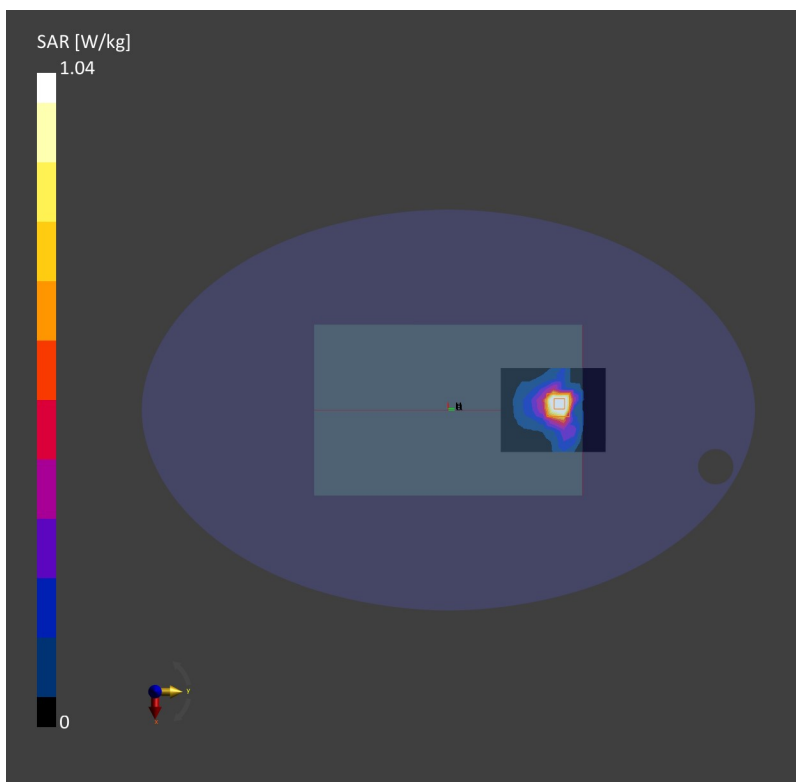

25_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0mm_Ch6


Communication System: WLAN 2.4GHz; Frequency: 2437.0
Medium: HSL. Medium parameters used: $f= 2437.0$ MHz; $\sigma= 1.80$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.754 W/kg; SAR (10g) = 0.341 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.04 dB
SAR (1g) = 0.885 W/kg; SAR (10g) = 0.359 W/kg;

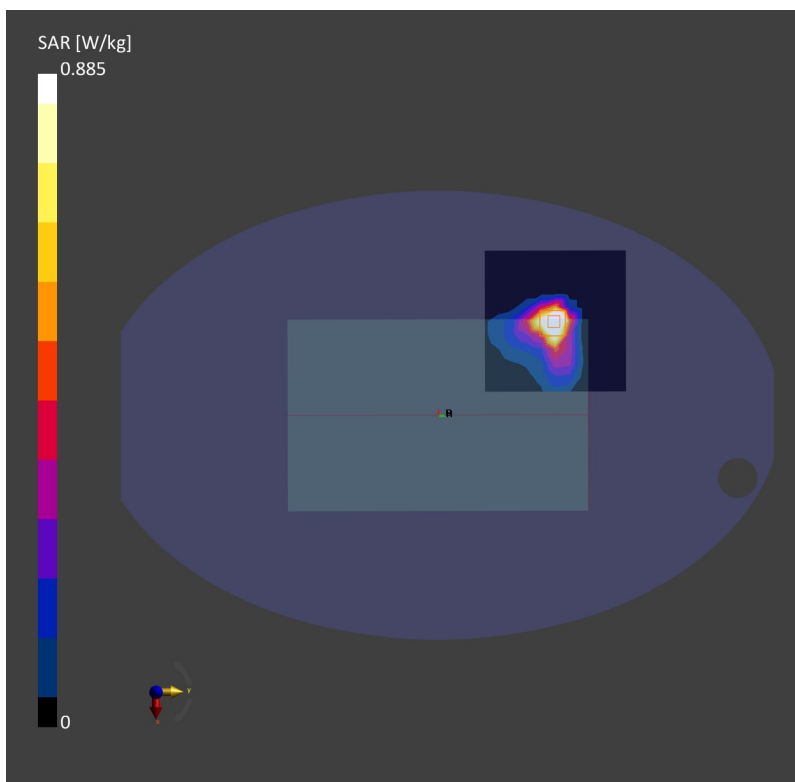

26_Bluetooth_1Mbps_Bottom Face_0mm_Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2480.0

Medium: HSL. Medium parameters used: $f= 2480.0$ MHz; $\sigma= 1.84$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (72.0 mm x 96.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.063 W/kg; SAR (10g) = 0.027 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.077 W/kg; SAR (10g) = 0.032 W/kg;

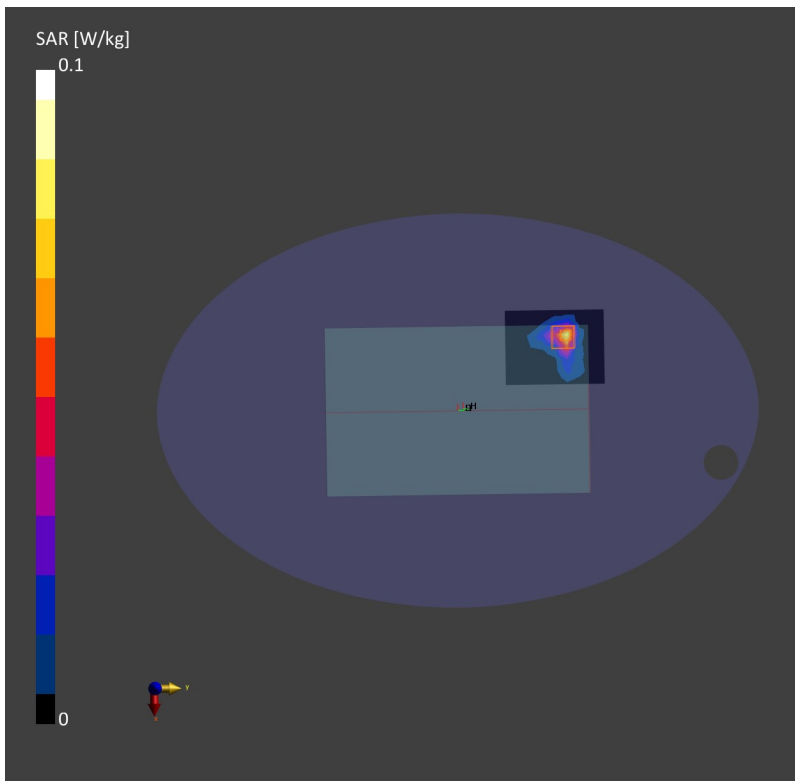

28_WLAN5GHz_802.11n-HT40 MCS0_Bottom Face_0mm_Ch54

Communication System: WLAN 5GHz; Frequency: 5270.0

Medium: HSL. Medium parameters used: $f= 5270.0$ MHz; $\sigma= 4.57$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.07, 6.07, 6.07); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.678 W/kg; SAR (10g) = 0.224 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.731 W/kg; SAR (10g) = 0.244 W/kg;

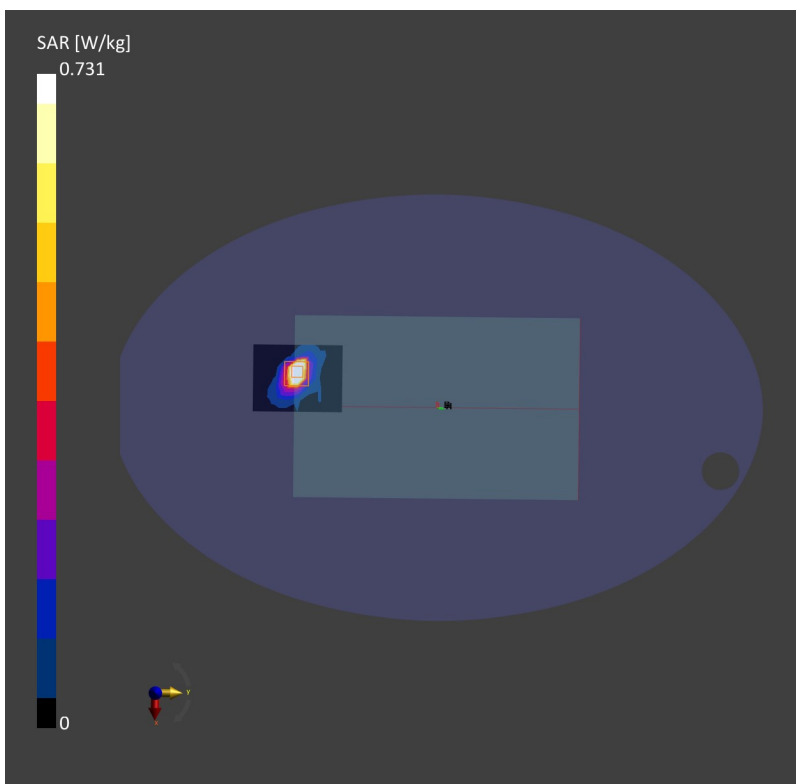

29_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch138

Communication System: WLAN 5GHz; Frequency: 5690.0

Medium: HSL. Medium parameters used: $f= 5690.0$ MHz; $\sigma= 5.03$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.3, 5.3, 5.3); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.782 W/kg; SAR (10g) = 0.268 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.849 W/kg; SAR (10g) = 0.282 W/kg;

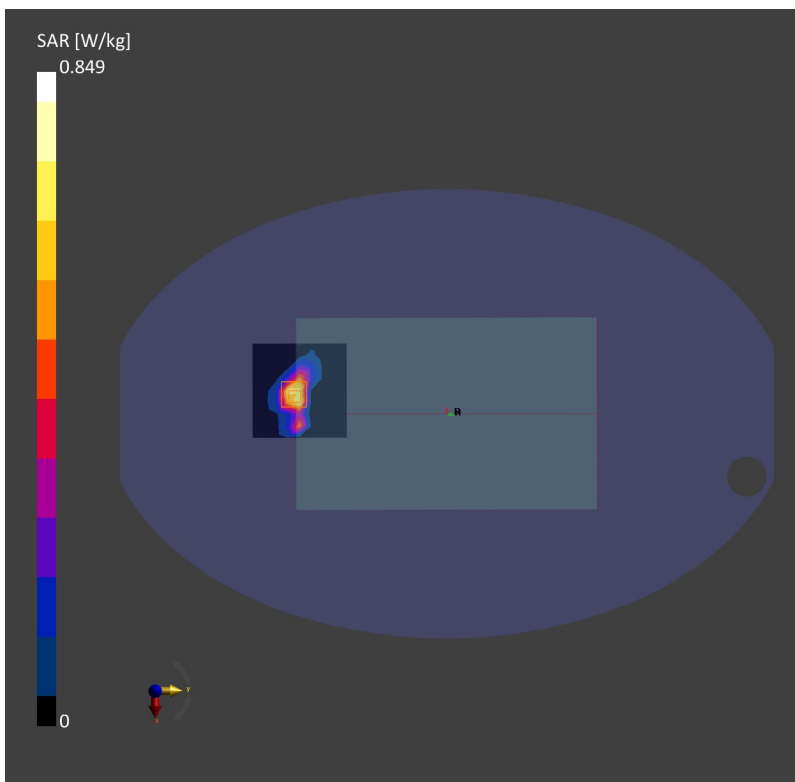

30_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used: $f= 5775.0$ MHz; $\sigma= 5.11$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.49, 5.49, 5.49); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (40.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.772 W/kg; SAR (10g) = 0.188 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.843 W/kg; SAR (10g) = 0.205 W/kg;

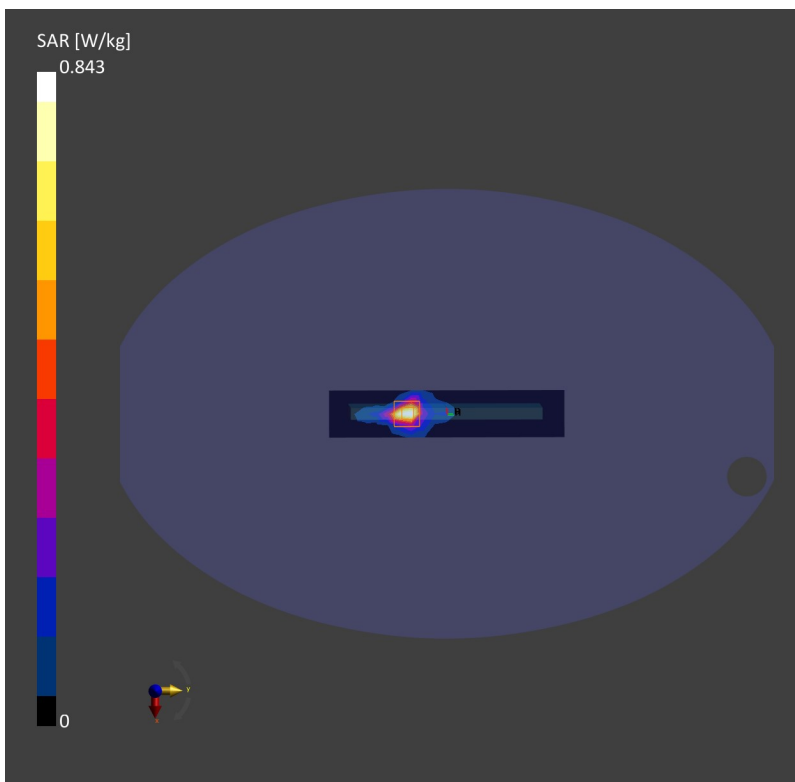

27_NFC_ASK_Bottom Face_0mm

Communication System: Custom Band; Frequency: 13.56

Medium: HSL. Medium parameters used: $f = 13.56$ MHz; $\sigma = 0.748$ S/m; $\epsilon_r = 53.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(19.14, 19.14, 19.14); Calibrated: 2022-04-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2021-12-01
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.056 W/kg; SAR (10g) = 0.038 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.053 W/kg; SAR (10g) = 0.023 W/kg;

