


FCC SAR Test Report


APPLICANT : Zebra Technologies Corporation
EQUIPMENT : Enterprise Tablet
BRAND NAME : Zebra
MODEL NAME : ET55BE
FCC ID : UZ7ET55BE
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4

2. Administration Data 5

3. Guidance Standard 5

4. Equipment Under Test (EUT) Information 6

 4.1 General Information 6

 4.2 General LTE SAR Test and Reporting Considerations 7

5. Proximity Sensor Triggering Test..... 9

6. RF Exposure Limits.....10

 6.1 Uncontrolled Environment10

 6.2 Controlled Environment.....10

7. Specific Absorption Rate (SAR).....11

 7.1 Introduction 11

 7.2 SAR Definition..... 11

8. System Description and Setup12

 8.1 E-Field Probe13

 8.2 Data Acquisition Electronics (DAE)13

 8.3 Phantom.....14

 8.4 Device Holder.....15

9. Measurement Procedures16

 9.1 Spatial Peak SAR Evaluation16

 9.2 Power Reference Measurement.....17

 9.3 Area Scan17

 9.4 Zoom Scan.....18

 9.5 Volume Scan Procedures18

 9.6 Power Drift Monitoring.....18

10. Test Equipment List.....19

 10.1 Tissue Verification20

 10.2 System Performance Check Results.....23

11. RF Exposure Positions23

 11.1 SAR Testing for Tablet23

12. Conducted RF Output Power (Unit: dBm).....24

13. SAR Test Results64

 13.1 Body SAR66

 13.2 Repeated SAR Measurement71

14. Simultaneous Transmission Analysis72

 14.1 Body Exposure Conditions73

 14.2 SPLSR Evaluation and Analysis.....79

15. Uncertainty Assessment108

16. References111

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA650305	Rev. 01	Initial issue of report	Jun. 21, 2016



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Zebra Technologies Corporation, Enterprise Tablet, ET55BE**, are as follows.

Equipment Class		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
		Body		
		1g SAR (W/kg)		
Licensed	GSM850	1.03		1.59
	GSM1900	0.65		
	WCDMA II	1.18		
	WCDMA IV	0.58		
	WCDMA V	0.61		
	CDMA BC0	0.54		
	CDMA BC1	1.13		
	CDMA BC10	0.60		
	LTE Band 2	1.27		
	LTE Band 4	0.58		
	LTE Band 5	0.82		
	LTE Band 13	0.76		
	LTE Band 17	0.42		
LTE Band 25	1.13			
DTS	2.4GHz WLAN	0.87		1.59
NII	5GHz WLAN	1.15		1.59
DSS	Bluetooth	0.21		1.48
Date of Testing:		2016/5/31 ~ 2016/6/8		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Zebra Technologies Corporation
Address	1 Zebra Plaza, Holtsville, NY 11742

Manufacturer	
Company Name	Zebra Technologies Corporation
Address	1 Zebra Plaza, Holtsville, NY 11742

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Enterprise Tablet
Brand Name	Zebra
Model Name	ET55BE
FCC ID	UZ7ET55BE
IMEI Code	352233070055141
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	<ul style="list-style-type: none"> · GSM/GPRS/EGPRS · RMC/AMR 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) · LTE: QPSK, 16QAM · 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 · Bluetooth EDR/LE · NFC: ASK
HW Version	DV1
SW Version	5.1.1
FW Version	7.35.205.4
MFD	23-Mar-16
EUT Stage	Identical Prototype



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																		
FCC ID	UZ7ET55BE																																																	
Equipment Name	Enterprise Tablet																																																	
Operating Frequency Range of each LTE transmission band	LTE Band 02: 1850 MHz ~ 1910 MHz LTE Band 04: 1710 MHz ~ 1755 MHz LTE Band 05: 824 MHz ~ 849 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz																																																	
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																	
uplink modulations used	QPSK, and 16QAM																																																	
LTE Voice / Data requirements	Data only																																																	
LTE MPR permanently built-in by design	<table border="1"> <caption>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</caption> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table>												Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																											
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																												
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																											
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																											
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																											
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																	
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																	
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor.																																																	
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																		
LTE Band 2																																																		
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																						
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																						
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																						
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																						
LTE Band 4																																																		
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																						
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720																																						
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5																																						
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745																																						
LTE Band 5																																																		
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz																																											
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																								
L	20407	824.7	20415	825.5	20425	826.5	20450	829																																										
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5																																										
H	20643	848.3	20635	847.5	20625	846.5	20600	844																																										



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905



5. Proximity Sensor Triggering Test

<Power Reduction by Proximity Sensing>

EUT uses capacitive proximity sensing to reduce the power in the cellular mode. The proximity sensor does not effect to WLAN and Bluetooth bands. Refer operation description for antenna schematics.

<Bottom Face and Side Triggering Distances>

The Proximity sensors are located near the cellular main antenna and trigger on the “Bottom Face (back side)” and on the Edge 1 (Top Edge) of the EUT.

SAR proximity sensor’s detection distance was determined as described in FCC KDB 616217 D04 section6.2.

Back side trigger 3mm steps													
40mm	37mm	34mm	31mm	28mm	25mm	22mm	19mm	16mm	13mm	10mm	7mm	4mm	0mm
OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON

Back side trigger 1mm steps													
18mm	17mm	16mm	15mm	14mm	13mm	12mm	11mm	10mm	9mm	8mm	7mm	6mm	0mm
OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON

Top edge trigger 3mm steps													
40mm	37mm	34mm	31mm	28mm	25mm	22mm	19mm	16mm	13mm	10mm	7mm	4mm	0mm
OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON

Top edge trigger 1mm steps													
15mm	14mm	13mm	12mm	11mm	10mm	9mm	8mm	7mm	6mm	5mm	4mm	3mm	0mm
OFF	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON

Tilt angle test, distance 13mm													
-50°	-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	50°	60°
OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON

The most conservative human proximity detections distances are 13mm for Edge1 and 15mm for bottom face. It is made sure that the tablet can be tilted at least ±45 degrees along the Edge 1 at 13mm distance without restoring full output power.

<SAR test distances and summary>

Exposure Position		Bottom Face	Edge 1	Edge 2	Edge 3	Edge 4
cellular mode	Full Power	Yes 12mm	Yes 14mm	No > 5cm(**)	No > 5cm(**)	Yes 0mm
	Reduced Power	Yes 0mm	Yes 0mm	No > 5cm(**)	No > 5cm(**)	No
WLAN/BT	Full Power	Yes 0mm	No	Yes 0mm	No	No > 5cm(**)

Remark:

**the distance is 0mm to the flat phantom, and SAR evaluation is required for bottom face and the edges with the antenna within 5cm to the user.



6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

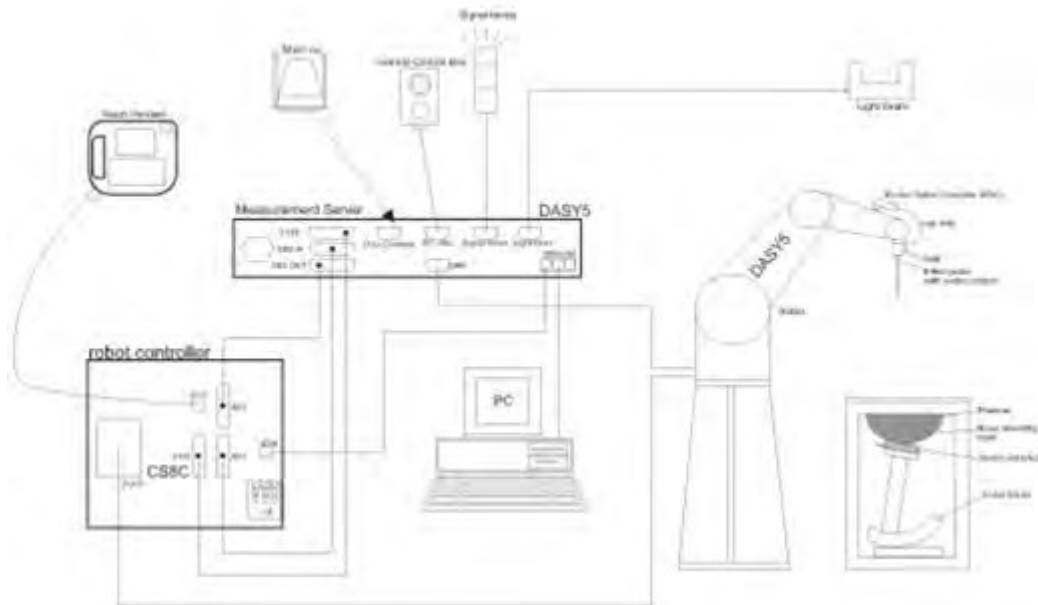


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.





Fig 5.1 Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

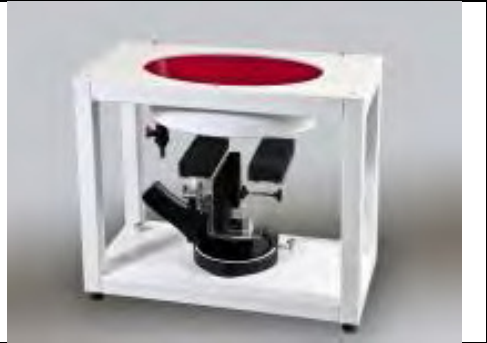Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 18, 2016	May. 17, 2017
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2016	Mar. 20, 2017
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 23, 2015	Nov. 22, 2016
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Oct. 22, 2015	Oct. 21, 2016
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 20, 2015	Aug. 19, 2016
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Jul. 20, 2015	Jul. 19, 2016
SPEAG	Data Acquisition Electronics	DAE4	778	May. 12, 2016	May. 11, 2017
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 24, 2015	Sep. 23, 2016
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 23, 2015	Nov. 22, 2016
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 28, 2015	Sep. 27, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 01, 2015	Sep. 30, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 24, 2015	Nov. 23, 2016
WonDer	Thermometer	WD-5015	TM281	Oct. 16, 2015	Oct. 15, 2016
Wisewind	Thermometer	HTC-1	TM560	Oct. 16, 2015	Oct. 15, 2016
Wisewind	Thermometer	HTC-1	TM225	Oct. 16, 2015	Oct. 15, 2016
Anritsu	Radio Communication Analyzer	MT8820C	6201341950	Dec. 18, 2015	Dec. 17, 2016
Anritsu	Radio Communication Analyzer	MT8820C	6201381760	May. 10, 2016	May. 09, 2017
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 17, 2016	May. 16, 2017
R&S	BT Base Station	CBT	101136	Sep. 17, 2015	Sep. 16, 2016
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	MG3710A	6201502524	Dec. 18, 2015	Dec. 17, 2016
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 12, 2016	Jan. 11, 2017
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 21, 2015	Jul. 20, 2016
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL/90900	Aug. 26, 2015	Aug. 25, 2016
Anritsu	Power Meter	ML2495A	1419002	May. 10, 2016	May. 09, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 10, 2016	May. 09, 2017
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 24, 2015	Aug. 23, 2016
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	MSL	22.4	0.965	55.848	0.96	55.50	0.52	0.63	±5	2016/6/2
835	MSL	22.3	1.011	57.038	0.97	55.20	4.23	3.33	±5	2016/6/1
835	MSL	22.4	0.970	57.239	0.97	55.20	0.00	3.69	±5	2016/6/3
1750	MSL	22.2	1.502	55.061	1.49	53.40	0.81	3.11	±5	2016/5/31
1900	MSL	22.2	1.526	53.842	1.52	53.30	0.39	1.02	±5	2016/5/31
1900	MSL	22.5	1.515	53.915	1.52	53.30	-0.33	1.15	±5	2016/6/1
1900	MSL	22.6	1.524	52.792	1.52	53.30	0.26	-0.95	±5	2016/6/3
1900	MSL	22.4	1.545	54.037	1.52	53.30	1.64	1.38	±5	2016/6/8
2450	MSL	22.6	1.941	53.431	1.95	52.70	-0.46	1.39	±5	2016/6/4
2450	MSL	22.6	1.941	53.431	1.95	52.70	-0.46	1.39	±5	2016/6/4
5250	MSL	22.6	5.520	47.112	5.36	48.95	2.99	-3.75	±5	2016/6/4
5600	MSL	22.6	5.965	46.488	5.77	48.50	3.38	-4.15	±5	2016/6/4
5750	MSL	22.6	6.169	46.200	5.94	48.28	3.86	-4.31	±5	2016/6/4



<Tissue Dielectric Parameter Check for Low / Middle / High Frequencies>

General Note:

The tissue measure results for low / middle / high frequencies list below, the results were used in the Dasy SAR system to perform interpolation to determine the dielectric parameters on the SAR test device. The SAR test plots may slightly difference between the tables below due to the digit rounding in the software calculated.

CH	Frequency (MHz)	Liquid Type	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
9262	1852.4	Body	1.473	54.025	1.52	53.30	-3.08	1.36	±5	May. 31, 2016
9400	1880	Body	1.503	53.928	1.52	53.30	-1.11	1.18	±5	May. 31, 2016
9538	1907.6	Body	1.534	53.815	1.52	53.30	0.93	0.97	±5	May. 31, 2016
1312	1712.4	Body	1.462	55.167	1.47	53.47	-0.57	3.12	±5	May. 31, 2016
1413	1732.6	Body	1.484	55.109	1.48	53.43	0.24	3.20	±5	May. 31, 2016
1513	1752.6	Body	1.505	55.056	1.49	53.39	0.97	3.10	±5	May. 31, 2016
20050	1720	Body	1.469	55.144	1.47	53.46	-0.05	3.07	±5	May. 31, 2016
20175	1732.5	Body	1.483	55.109	1.48	53.43	0.23	3.20	±5	May. 31, 2016
20300	1745	Body	1.496	55.072	1.49	53.41	0.43	3.13	±5	May. 31, 2016
25	1851.25	Body	1.457	54.060	1.52	53.30	-4.15	1.43	±5	Jun. 01, 2016
600	1880	Body	1.490	53.986	1.52	53.30	-1.97	1.29	±5	Jun. 01, 2016
1175	1908.75	Body	1.525	53.883	1.52	53.30	0.36	1.09	±5	Jun. 01, 2016
23230	782	Body	0.996	55.520	0.96	55.68	3.79	-0.32	±5	Jun. 02, 2016
23780	709	Body	0.925	56.310	0.96	55.66	-3.61	1.09	±5	Jun. 02, 2016
23790	710	Body	0.926	56.298	0.96	55.66	-3.52	1.07	±5	Jun. 02, 2016
23800	711	Body	0.927	56.287	0.96	55.66	-3.42	1.05	±5	Jun. 02, 2016
4132	826.4	Body	1.002	57.107	0.97	55.23	3.32	3.46	±5	Jun. 01, 2016
4182	836.4	Body	1.012	57.026	0.97	55.20	4.33	3.31	±5	Jun. 01, 2016
4233	846.6	Body	1.022	56.929	0.98	55.16	4.31	3.13	±5	Jun. 01, 2016
26140	1860	Body	1.459	53.996	1.52	53.30	-4.03	1.31	±5	May. 31, 2016
26340	1880	Body	1.480	53.928	1.52	53.30	-2.63	1.18	±5	May. 31, 2016
26590	1905	Body	1.508	53.825	1.52	53.30	-0.78	0.99	±5	May. 31, 2016
20450	829	Body	1.005	57.086	0.97	55.22	3.60	3.42	±5	Jun. 01, 2016
20525	836.5	Body	1.012	57.025	0.97	55.20	4.34	3.31	±5	Jun. 01, 2016
20600	844	Body	1.020	56.956	0.98	55.17	4.05	3.18	±5	Jun. 01, 2016
1013	824.7	Body	0.961	57.328	0.97	55.24	-0.94	3.85	±5	Jun. 03, 2016
384	836.52	Body	0.971	57.225	0.97	55.20	0.13	3.67	±5	Jun. 03, 2016
777	848.31	Body	0.982	57.147	0.99	55.16	-0.76	3.53	±5	Jun. 03, 2016
476	817.9	Body	0.955	57.388	0.97	55.26	-1.55	3.78	±5	Jun. 03, 2016
580	820.5	Body	0.957	57.363	0.97	55.25	-1.31	3.73	±5	Jun. 03, 2016
684	823.1	Body	0.959	57.339	0.97	55.24	-1.09	3.88	±5	Jun. 03, 2016
26140	1860	Body	1.478	52.950	1.52	53.3	-2.76	-0.66	±5	Jun. 03, 2016
26340	1880	Body	1.501	52.880	1.52	53.3	-1.25	-0.79	±5	Jun. 03, 2016
26590	1905	Body	1.530	52.770	1.52	53.3	0.66	-0.99	±5	Jun. 03, 2016
512	1850.2	Body	1.466	52.970	1.52	53.3	-3.55	-0.62	±5	Jun. 03, 2016
661	1880	Body	1.501	52.880	1.52	53.3	-1.25	-0.79	±5	Jun. 03, 2016
810	1909.8	Body	1.535	52.750	1.52	53.3	0.99	-1.03	±5	Jun. 03, 2016
128	824.2	Body	0.960	57.331	0.97	55.24	-0.99	3.86	±5	Jun. 03, 2016
189	836.4	Body	0.971	57.226	0.97	55.20	0.12	3.67	±5	Jun. 03, 2016
251	848.8	Body	0.983	57.144	0.99	55.16	-0.71	3.52	±5	Jun. 03, 2016
25	1851.25	Body	1.467	52.971	1.52	53.30	-3.46	-0.62	±5	Jun. 03, 2016
600	1880	Body	1.501	52.883	1.52	53.30	-1.27	-0.78	±5	Jun. 03, 2016
1175	1908.75	Body	1.534	52.752	1.52	53.30	0.93	-1.03	±5	Jun. 03, 2016

Table of Low/Middle/High Channel for Liquid Validation



CH	Frequency (MHz)	Liquid Type	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
1	2412	Body	1.889	53.540	1.914	52.75	-1.10	1.40	±5	Jun. 04, 2016
3	2422	Body	1.903	53.510	1.923	52.74	-0.89	1.54	±5	Jun. 04, 2016
6	2437	Body	1.922	53.480	1.938	52.72	-0.93	1.48	±5	Jun. 04, 2016
9	2452	Body	1.944	53.420	1.953	52.7	-0.31	1.37	±5	Jun. 04, 2016
11	2462	Body	1.957	53.390	1.967	52.68	-0.66	1.31	±5	Jun. 04, 2016
36	5180	Body	5.419	47.204	5.276	49.03	2.64	-3.67	±5	Jun. 04, 2016
38	5190	Body	5.428	47.184	5.288	49.01	2.61	-3.71	±5	Jun. 04, 2016
40	5200	Body	5.439	47.152	5.300	49.00	2.62	-3.77	±5	Jun. 04, 2016
42	5210	Body	5.455	47.116	5.312	48.99	2.73	-3.84	±5	Jun. 04, 2016
44	5220	Body	5.477	47.100	5.323	48.98	2.96	-3.88	±5	Jun. 04, 2016
46	5230	Body	5.494	47.119	5.335	48.97	3.07	-3.84	±5	Jun. 04, 2016
48	5240	Body	5.503	47.126	5.346	48.96	2.87	-3.83	±5	Jun. 04, 2016
52	5260	Body	5.529	47.073	5.370	48.94	2.97	-3.74	±5	Jun. 04, 2016
54	5270	Body	5.538	47.066	5.381	48.93	2.93	-3.75	±5	Jun. 04, 2016
56	5280	Body	5.553	47.038	5.393	48.92	3.02	-3.81	±5	Jun. 04, 2016
58	5290	Body	5.566	47.005	5.404	48.91	3.08	-3.87	±5	Jun. 04, 2016
60	5300	Body	5.577	46.985	5.416	48.90	2.90	-3.92	±5	Jun. 04, 2016
62	5310	Body	5.590	46.959	5.428	48.79	2.95	-3.77	±5	Jun. 04, 2016
64	5320	Body	5.606	46.937	5.439	48.67	3.06	-3.62	±5	Jun. 04, 2016
100	5500	Body	5.827	46.655	5.650	48.60	3.14	-4.00	±5	Jun. 04, 2016
102	5510	Body	5.838	46.622	5.661	48.59	3.15	-4.07	±5	Jun. 04, 2016
104	5520	Body	5.851	46.587	5.673	48.58	3.19	-4.14	±5	Jun. 04, 2016
106	5530	Body	5.871	46.563	5.685	48.57	3.36	-4.19	±5	Jun. 04, 2016
108	5540	Body	5.890	46.545	5.696	48.56	3.33	-4.23	±5	Jun. 04, 2016
110	5550	Body	5.909	46.535	5.708	48.55	3.48	-4.25	±5	Jun. 04, 2016
112	5560	Body	5.923	46.545	5.720	48.54	3.55	-4.03	±5	Jun. 04, 2016
116	5580	Body	5.942	46.528	5.743	48.52	3.52	-4.07	±5	Jun. 04, 2016
132	5660	Body	6.058	46.361	5.837	48.41	3.73	-4.21	±5	Jun. 04, 2016
134	5670	Body	6.070	46.366	5.848	48.40	3.76	-4.20	±5	Jun. 04, 2016
136	5680	Body	6.079	46.365	5.860	48.38	3.73	-4.21	±5	Jun. 04, 2016
138	5690	Body	6.090	46.347	5.872	48.37	3.75	-4.24	±5	Jun. 04, 2016
140	5700	Body	6.101	46.335	5.883	48.35	3.76	-4.27	±5	Jun. 04, 2016
142	5710	Body	6.111	46.314	5.895	48.34	3.75	-4.11	±5	Jun. 04, 2016
144	5720	Body	6.123	46.286	5.907	48.32	3.60	-4.17	±5	Jun. 04, 2016
149	5745	Body	6.159	46.210	5.94	48.28	3.69	-4.33	±5	Jun. 04, 2016
151	5755	Body	6.178	46.192	5.95	48.27	3.83	-4.36	±5	Jun. 04, 2016
153	5765	Body	6.198	46.188	5.96	48.25	4.00	-4.37	±5	Jun. 04, 2016
155	5775	Body	6.212	46.198	5.97	48.24	4.05	-4.15	±5	Jun. 04, 2016
157	5785	Body	6.222	46.196	5.98	48.22	4.04	-4.16	±5	Jun. 04, 2016
159	5795	Body	6.232	46.189	5.99	48.21	4.04	-4.17	±5	Jun. 04, 2016
161	5805	Body	6.243	46.180	6.00	48.20	4.06	-4.19	±5	Jun. 04, 2016
165	5825	Body	6.260	46.137	6.00	48.20	4.34	-4.28	±5	Jun. 04, 2016
0	2402	Body	1.877	53.581	1.90	52.76	-1.20	1.48	±5	Jun. 04, 2016
39	2441	Body	1.927	53.470	1.94	52.71	-0.66	1.46	±5	Jun. 04, 2016
78	2480	Body	1.985	53.331	1.95	52.70	1.80	1.20	±5	Jun. 04, 2016
18700	1860	Body	1.497	54.213	1.52	53.3	-1.50	1.71	±5	Jun. 08, 2016
18900	1880	Body	1.520	54.129	1.52	53.3	0.03	1.56	±5	Jun. 08, 2016
19100	1900	Body	1.545	54.037	1.52	53.3	1.62	1.38	±5	Jun. 08, 2016

Table of Low/Middle/High Channel for Liquid Validation

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/6/2	750	MSL	250	D750V3-1012	EX3DV4 - SN3931	DAE3 Sn577	2.24	8.72	8.96	2.75
2016/6/1	835	MSL	250	D835V2-499	EX3DV4 - SN3931	DAE3 Sn577	2.50	9.52	10.00	5.04
2016/6/3	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn1399	2.25	9.52	9.00	-5.46
2016/5/31	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE4 Sn1399	9.17	35.70	36.68	2.75
2016/5/31	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn1399	9.44	40.00	37.76	-5.60
2016/6/1	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn1399	9.71	40.00	38.84	-2.90
2016/6/3	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn1399	10.10	40.00	40.40	1.00
2016/6/8	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3955	DAE4 Sn778	10.20	40.00	40.80	2.00
2016/6/4	2450	MSL	250	D2450V2-736	ES3DV3 - SN3270	DAE4 Sn1399	13.00	51.90	52.00	0.19
2016/6/4	2450	MSL	250	D2450V2-736	EX3DV4 - SN3955	DAE4 Sn778	12.20	51.90	48.80	-5.97
2016/6/4	5250	MSL	100	D5GHzV2-1128-5250	EX3DV4 - SN3955	DAE4 Sn778	8.25	76.20	82.50	8.27
2016/6/4	5600	MSL	100	D5GHzV2-1128-5600	EX3DV4 - SN3955	DAE4 Sn778	8.57	79.30	85.70	8.07
2016/6/4	5750	MSL	100	D5GHzV2-1128-5750	EX3DV4 - SN3955	DAE4 Sn778	8.00	75.90	80.00	5.40

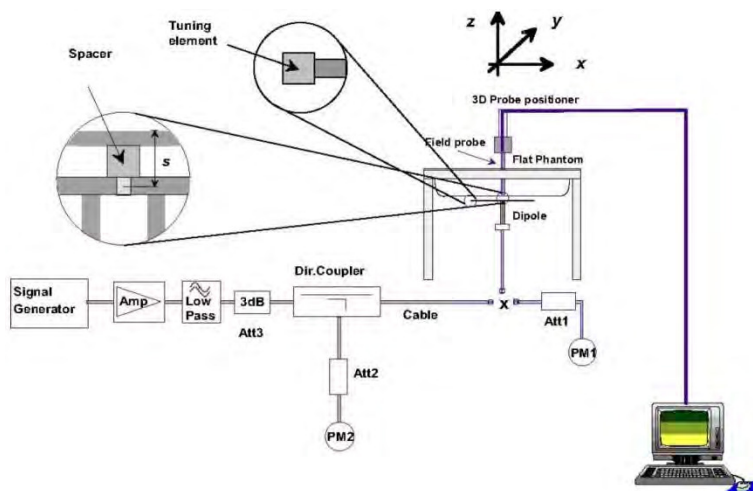


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.



12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EDGE (4Tx slots) for GSM850/GSM1900 is considered as the primary mode when the power reduction is active, the GPRS (2Tx slots) for GSM850, the EDGE (4Tx slots) for GSM1900 is considered as the primary mode when the power reduction is inactive.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

Default Power Mode

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS 1 Tx slot	32.03	31.99	31.92	33.00	23.03	22.99	22.92	24.00
GPRS 2 Tx slots	31.92	31.88	31.84	33.00	25.92	25.88	25.84	27.00
EDGE 1 Tx slot	27.24	27.25	27.25	28.00	18.24	18.25	18.25	19.00
EDGE 2 Tx slots	27.10	27.12	27.15	28.00	21.10	21.12	21.15	22.00
EDGE 3 Tx slots	26.97	26.91	26.93	28.00	22.71	22.65	22.67	23.74
EDGE 4 Tx slots	26.80	26.79	26.81	28.00	23.80	23.79	23.81	25.00

Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS 1 Tx slot	29.79	29.94	29.73	30.00	20.79	20.94	20.73	21.00
GPRS 2 Tx slots	29.70	29.88	29.66	30.00	23.70	23.88	23.66	24.00
EDGE 1 Tx slot	25.73	25.71	25.71	27.00	16.73	16.71	16.71	18.00
EDGE 2 Tx slots	25.64	25.63	25.64	27.00	19.64	19.63	19.64	21.00
EDGE 3 Tx slots	25.57	25.53	25.51	27.00	21.31	21.27	21.25	22.74
EDGE 4 Tx slots	25.50	25.41	25.42	27.00	22.50	22.41	22.42	24.00



Reduced Power Mode

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS 1 Tx slot	26.07	25.95	25.97	26.50	17.07	16.95	16.97	17.50
GPRS 2 Tx slots	23.33	23.26	23.24	23.50	17.33	17.26	17.24	17.50
EDGE 1 Tx slot	27.00	26.89	26.95	27.00	18.00	17.89	17.95	18.00
EDGE 2 Tx slots	23.94	23.90	23.87	24.00	17.94	17.90	17.87	18.00
EDGE 3 Tx slots	21.62	21.63	21.61	22.00	17.36	17.37	17.35	17.74
EDGE 4 Tx slots	20.74	20.73	20.70	21.00	17.74	17.73	17.70	18.00

Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS 1 Tx slot	23.99	24.08	24.15	25.00	14.99	15.08	15.15	16.00
GPRS 2 Tx slots	21.32	21.40	21.43	22.00	15.32	15.40	15.43	16.00
EDGE 1 Tx slot	23.83	23.85	23.87	25.00	14.83	14.85	14.87	16.00
EDGE 2 Tx slots	21.26	21.25	21.30	22.00	15.26	15.25	15.30	16.00
EDGE 3 Tx slots	19.15	19.11	19.20	20.00	14.89	14.85	14.94	15.74
EDGE 4 Tx slots	17.80	17.76	17.73	19.00	14.80	14.76	14.73	16.00

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

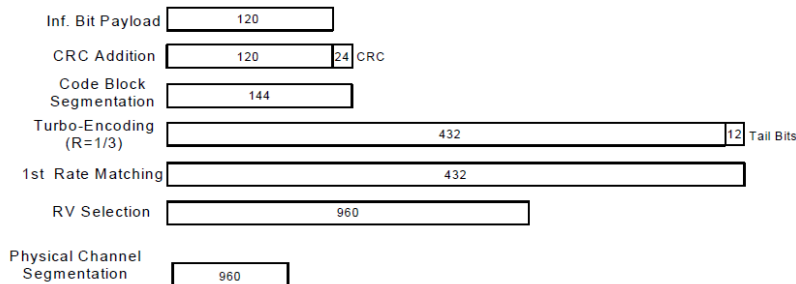


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Default Power Mode

Band		WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel		4357	4407	4458	9662	9800	9938	1537	1638	1738			
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6			
3GPP Rel 99	RMC 12.2Kbps	22.91	22.90	22.80	24.00	22.84	22.92	23.00	24.00	22.96	23.00	22.92	24.00
3GPP Rel 6	HSDPA Subtest-1	22.44	22.30	22.46	24.00	22.68	22.63	22.78	24.00	22.48	22.51	22.45	24.00
3GPP Rel 6	HSDPA Subtest-2	22.52	22.41	22.55	24.00	22.71	22.69	22.81	24.00	22.49	22.53	22.46	24.00
3GPP Rel 6	HSDPA Subtest-3	22.00	21.98	22.02	23.50	22.23	22.20	22.38	23.50	22.03	22.09	22.00	23.50
3GPP Rel 6	HSDPA Subtest-4	22.04	22.03	22.07	23.50	22.27	22.25	22.44	23.50	22.05	22.11	22.04	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.35	22.24	22.40	24.00	22.61	22.53	22.75	24.00	22.40	22.43	22.39	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.44	22.33	22.50	24.00	22.68	22.63	22.71	24.00	22.45	22.46	22.40	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.93	21.89	21.97	23.50	22.16	22.10	22.30	23.50	22.00	22.08	21.95	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.97	22.01	21.97	23.50	22.23	22.23	22.36	23.50	21.97	22.06	22.02	23.50
3GPP Rel 6	HSUPA Subtest-1	22.06	22.03	22.00	24.00	22.53	22.62	22.90	24.00	22.06	22.05	22.03	24.00
3GPP Rel 6	HSUPA Subtest-2	20.91	20.96	21.00	22.00	21.34	21.42	21.33	22.00	20.90	21.00	20.89	22.00
3GPP Rel 6	HSUPA Subtest-3	21.06	21.13	21.44	23.00	21.49	21.68	21.91	23.00	21.08	21.55	21.00	23.00
3GPP Rel 6	HSUPA Subtest-4	21.45	21.22	20.99	22.00	21.62	21.25	21.97	22.00	20.98	21.64	20.75	22.00
3GPP Rel 6	HSUPA Subtest-5	22.44	22.46	22.42	24.00	22.66	22.70	22.88	24.00	22.10	22.00	22.45	24.00

Reduced Power Mode

Band		WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel		4357	4407	4458	9662	9800	9938	1537	1638	1738			
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6			
3GPP Rel 99	RMC 12.2Kbps	17.78	17.67	17.66	18.00	15.27	15.07	15.58	16.00	14.80	14.38	13.73	15.00
3GPP Rel 6	HSDPA Subtest-1	17.30	17.20	17.15	18.00	14.75	14.35	15.37	16.00	13.44	13.66	13.09	15.00
3GPP Rel 6	HSDPA Subtest-2	17.37	17.25	17.19	18.00	14.81	14.39	15.38	16.00	13.45	13.68	13.08	15.00
3GPP Rel 6	HSDPA Subtest-3	16.84	16.66	16.71	17.50	14.56	13.95	15.03	15.50	13.12	13.29	12.74	14.50
3GPP Rel 6	HSDPA Subtest-4	16.89	16.71	16.73	17.50	14.60	13.98	15.04	15.50	13.13	13.31	12.75	14.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.27	17.18	17.10	18.00	14.76	14.39	15.38	16.00	13.46	13.62	13.05	15.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.36	17.23	17.20	18.00	14.37	14.35	15.32	16.00	13.49	13.64	13.09	15.00
3GPP Rel 8	DC-HSDPA Subtest-3	16.81	16.59	16.64	17.50	14.54	13.97	15.01	15.50	13.15	13.22	12.79	14.50
3GPP Rel 8	DC-HSDPA Subtest-4	16.84	16.65	16.68	17.50	14.52	13.99	15.03	15.50	13.15	13.33	12.71	14.50
3GPP Rel 6	HSUPA Subtest-1	16.98	16.82	16.95	18.00	14.37	14.02	14.90	16.00	13.53	13.09	13.21	15.00
3GPP Rel 6	HSUPA Subtest-2	15.67	15.90	15.58	16.00	13.21	12.61	13.35	14.00	12.18	12.27	12.02	13.00
3GPP Rel 6	HSUPA Subtest-3	16.00	15.81	15.93	17.00	13.90	13.06	13.89	15.00	12.30	12.33	12.09	14.00
3GPP Rel 6	HSUPA Subtest-4	15.86	15.73	15.80	16.00	13.79	13.02	13.85	14.00	12.41	12.52	12.33	13.00
3GPP Rel 6	HSUPA Subtest-5	17.32	17.14	17.25	18.00	15.02	14.40	15.50	16.00	13.51	13.68	13.16	15.00



<CDMA2000 Conducted Power>

General Note:

- Per KDB 941225 D01v03r01, when in body SAR testing, the EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.

Default Power Mode

Band	CDMA2000 BC10			Tune-up Limit (dBm)	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)
	TX Channel	476	580		684	1013	384		777	25	600	
Frequency (MHz)	817.9	820.5	823.1		824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	23.59	23.61	23.60	24.50	23.63	23.71	23.49	24.50	23.83	23.90	23.94	24.50
RC3 SO55	23.66	23.67	23.63	24.50	23.64	23.73	23.52	24.50	23.89	23.94	23.95	24.50
RTAP 153.6Kbps	23.60	23.67	23.66	24.50	23.46	23.72	23.54	24.50	23.79	23.82	23.91	24.50
RETAP 4096Bits	23.63	23.65	23.63	24.50	23.66	23.71	23.51	24.50	23.77	23.84	23.90	24.50

Reduced Power Mode

Band	CDMA2000 BC10			Tune-up Limit (dBm)	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)
	TX Channel	476	580		684	1013	384		777	25	600	
Frequency (MHz)	817.9	820.5	823.1		824.7	836.52	848.31		1851.25	1880	1908.75	
RC1 SO55	17.15	17.10	17.12	17.50	17.15	17.32	17.27	17.50	14.57	14.55	14.91	15.50
RC3 SO55	17.38	17.31	17.28	17.50	17.18	17.37	17.31	17.50	14.64	14.58	14.96	15.50
RTAP 153.6Kbps	17.25	17.17	17.09	17.50	17.23	17.31	17.27	17.50	14.53	14.54	14.87	15.50
RETAP 4096Bits	17.17	17.21	17.00	17.50	17.10	17.06	17.05	17.50	14.55	14.49	14.86	15.50

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



Default Power Mode

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.22	23.15	23.26	24	0
20	QPSK	1	49	22.99	23.08	23.14		
20	QPSK	1	99	23.04	23.03	23.12		
20	QPSK	50	0	22.10	22.14	22.20	23	1
20	QPSK	50	24	22.09	22.11	22.18		
20	QPSK	50	50	22.01	22.03	22.15		
20	QPSK	100	0	22.03	22.11	22.24	23	1
20	16QAM	1	0	22.25	22.16	22.16		
20	16QAM	1	49	22.00	22.11	22.15		
20	16QAM	1	99	22.05	22.04	22.24	22	2
20	16QAM	50	0	21.12	21.11	21.18		
20	16QAM	50	24	21.02	21.12	21.17		
20	16QAM	50	50	21.12	21.02	21.23	22	2
20	16QAM	100	0	21.06	21.10	21.26		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	23.23	23.05	23.24	24	0
15	QPSK	1	37	23.00	23.08	23.23		
15	QPSK	1	74	22.89	22.98	23.12		
15	QPSK	36	0	22.08	22.10	22.22	23	1
15	QPSK	36	20	22.01	22.09	22.23		
15	QPSK	36	39	22.04	22.05	22.24		
15	QPSK	75	0	21.94	22.03	22.12	23	1
15	16QAM	1	0	22.21	22.15	22.30		
15	16QAM	1	37	22.02	22.14	22.21		
15	16QAM	1	74	21.97	22.02	22.11	22	2
15	16QAM	36	0	21.15	21.19	21.22		
15	16QAM	36	20	21.05	21.17	21.32		
15	16QAM	36	39	21.02	21.11	21.30	22	2
15	16QAM	75	0	20.98	21.04	21.16		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905	Tune-up limit (dBm)	MPR (dB)
10	QPSK	1	0	23.22	23.10	23.25	24	0
10	QPSK	1	25	23.00	23.07	23.24		
10	QPSK	1	49	22.90	23.02	23.16		
10	QPSK	25	0	22.20	22.10	22.27	23	1
10	QPSK	25	12	22.02	22.20	22.23		
10	QPSK	25	25	22.07	22.18	22.23		
10	QPSK	50	0	22.00	22.07	22.27	23	1
10	16QAM	1	0	22.22	22.16	22.27		
10	16QAM	1	25	22.01	22.16	22.23		
10	16QAM	1	49	21.90	22.08	22.16	22	2
10	16QAM	25	0	21.16	21.18	21.28		
10	16QAM	25	12	21.09	21.18	21.35		
10	16QAM	25	25	21.01	21.08	21.25	22	2
10	16QAM	50	0	21.01	21.07	21.30		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.23	23.07	23.24	24	0
5	QPSK	1	12	23.12	23.05	23.21		
5	QPSK	1	24	22.97	23.07	23.20		
5	QPSK	12	0	22.25	22.15	22.23	23	1
5	QPSK	12	7	22.24	22.17	22.29		
5	QPSK	12	13	22.18	22.16	22.31		
5	QPSK	25	0	22.13	22.16	22.28	23	1
5	16QAM	1	0	22.18	22.11	22.29		
5	16QAM	1	12	22.13	22.15	22.25		
5	16QAM	1	24	21.97	22.13	22.22	22	2
5	16QAM	12	0	21.31	21.24	21.25		
5	16QAM	12	7	21.31	21.18	21.31		
5	16QAM	12	13	21.28	21.18	21.33	22	2
5	16QAM	25	0	21.21	21.15	21.25		
5	16QAM	25	0	21.21	21.15	21.25		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.23	23.09	23.24	24	0
3	QPSK	1	8	23.23	23.05	23.20		
3	QPSK	1	14	23.20	23.08	23.19		
3	QPSK	8	0	22.27	22.20	22.31	23	1
3	QPSK	8	4	22.23	22.15	22.34		
3	QPSK	8	7	22.29	22.21	22.37		
3	QPSK	15	0	22.22	22.15	22.28	23	1
3	16QAM	1	0	22.18	22.16	22.31		
3	16QAM	1	8	22.20	22.13	22.26		
3	16QAM	1	14	22.14	22.13	22.19	22	2
3	16QAM	8	0	21.28	21.13	21.24		
3	16QAM	8	4	21.26	21.10	21.24		
3	16QAM	8	7	21.26	21.12	21.30	22	2
3	16QAM	8	7	21.26	21.12	21.30		
3	16QAM	15	0	21.31	21.22	21.29		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.20	23.10	23.21	24	0
1.4	QPSK	1	3	23.16	23.10	23.17		
1.4	QPSK	1	5	23.11	23.07	23.18		
1.4	QPSK	3	0	23.20	23.07	23.18	24	0
1.4	QPSK	3	1	23.16	23.09	23.18		
1.4	QPSK	3	3	23.20	23.10	23.13		
1.4	QPSK	6	0	22.26	22.17	22.35	23	1
1.4	16QAM	1	0	22.12	22.10	22.35	23	1
1.4	16QAM	1	3	22.17	22.15	22.26		
1.4	16QAM	1	5	22.16	22.13	22.28		
1.4	16QAM	3	0	22.21	22.21	22.33	23	1
1.4	16QAM	3	1	22.17	22.13	22.33		
1.4	16QAM	3	3	22.22	22.15	22.22		
1.4	16QAM	6	0	21.33	21.22	21.44	22	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.03	22.93	23.10	24	0
20	QPSK	1	49	22.84	22.92	22.99		
20	QPSK	1	99	22.92	22.92	22.87		
20	QPSK	50	0	22.01	22.08	22.09	23	1
20	QPSK	50	24	21.84	22.01	22.07		
20	QPSK	50	50	21.96	22.00	21.84		
20	QPSK	100	0	21.99	21.92	21.94		
20	16QAM	1	0	22.06	22.00	21.93	23	1
20	16QAM	1	49	21.93	22.00	22.05		
20	16QAM	1	99	21.97	22.00	21.87		
20	16QAM	50	0	21.01	20.98	21.12	22	2
20	16QAM	50	24	20.90	21.01	21.09		
20	16QAM	50	50	20.94	21.07	20.90		
20	16QAM	100	0	20.99	21.00	20.94		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.02	22.97	23.03	24	0
15	QPSK	1	37	22.96	22.93	22.94		
15	QPSK	1	74	22.93	22.93	22.82		
15	QPSK	36	0	22.03	21.95	22.08	23	1
15	QPSK	36	20	21.98	22.01	22.01		
15	QPSK	36	39	21.91	22.04	21.77		
15	QPSK	75	0	21.93	21.95	21.85		
15	16QAM	1	0	22.05	22.02	22.06	23	1
15	16QAM	1	37	21.90	21.97	21.97		
15	16QAM	1	74	21.94	21.97	21.86		
15	16QAM	36	0	21.05	20.99	21.12	22	2
15	16QAM	36	20	21.04	21.04	21.05		
15	16QAM	36	39	20.95	21.06	20.89		
15	16QAM	75	0	20.89	20.98	20.98		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.02	23.01	23.07	24	0
10	QPSK	1	25	23.01	22.94	22.91		
10	QPSK	1	49	22.90	22.88	22.89		
10	QPSK	25	0	22.09	22.02	22.02	23	1
10	QPSK	25	12	22.09	21.99	21.91		
10	QPSK	25	25	22.08	22.05	21.88		
10	QPSK	50	0	22.03	22.00	21.90		
10	16QAM	1	0	22.07	22.07	22.08	23	1
10	16QAM	1	25	22.01	21.98	21.89		
10	16QAM	1	49	21.92	21.91	21.92		
10	16QAM	25	0	21.05	21.03	21.03	22	2
10	16QAM	25	12	21.06	21.03	20.92		
10	16QAM	25	25	21.06	21.04	20.87		
10	16QAM	50	0	21.01	21.06	20.91		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.04	22.92	23.06	24	0
5	QPSK	1	12	23.01	22.91	22.83		
5	QPSK	1	24	22.95	22.96	22.91		
5	QPSK	12	0	22.08	22.03	21.92	23	1
5	QPSK	12	7	22.09	22.02	21.93		
5	QPSK	12	13	22.10	21.99	21.91		
5	QPSK	25	0	22.03	21.98	21.92	23	1
5	16QAM	1	0	22.03	21.99	22.05		
5	16QAM	1	12	22.02	21.98	21.85		
5	16QAM	1	24	21.97	22.01	21.92	22	2
5	16QAM	12	0	21.11	21.05	20.96		
5	16QAM	12	7	21.10	21.06	20.97		
5	16QAM	12	13	21.11	21.10	21.01	22	2
5	16QAM	12	13	21.11	21.10	21.01		
5	16QAM	25	0	21.03	21.01	20.92		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.02	22.92	23.03	24	0
3	QPSK	1	8	23.01	22.95	22.92		
3	QPSK	1	14	23.01	22.96	22.92		
3	QPSK	8	0	22.10	22.04	21.85	23	1
3	QPSK	8	4	22.02	22.03	21.89		
3	QPSK	8	7	22.04	21.99	21.96		
3	QPSK	15	0	22.02	22.03	21.90	23	1
3	16QAM	1	0	22.03	21.95	22.04		
3	16QAM	1	8	22.03	22.01	22.03		
3	16QAM	1	14	21.98	21.97	21.87	22	2
3	16QAM	8	0	21.00	21.01	20.88		
3	16QAM	8	4	20.97	21.00	20.91		
3	16QAM	8	7	20.98	21.02	21.00	22	2
3	16QAM	8	7	20.98	21.02	21.00		
3	16QAM	15	0	21.12	21.01	20.91		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.03	22.91	23.04	24	0
1.4	QPSK	1	3	23.02	22.94	22.92		
1.4	QPSK	1	5	23.01	22.91	22.93		
1.4	QPSK	3	0	22.99	22.99	22.93	23	1
1.4	QPSK	3	1	23.03	22.99	22.94		
1.4	QPSK	3	3	23.01	22.98	22.94		
1.4	QPSK	6	0	22.07	22.03	21.97	23	1
1.4	16QAM	1	0	22.07	21.94	22.08	23	1
1.4	16QAM	1	3	22.00	21.94	21.93		
1.4	16QAM	1	5	21.97	21.93	21.91		
1.4	16QAM	3	0	21.97	22.00	22.02	23	1
1.4	16QAM	3	0	21.97	22.00	22.02		
1.4	16QAM	3	1	22.03	22.04	21.97		
1.4	16QAM	3	3	22.02	22.05	21.98	22	2
1.4	16QAM	3	3	22.02	22.05	21.98		
1.4	16QAM	6	0	21.13	21.10	21.06		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.64	22.61	22.69	24	0
10	QPSK	1	25	22.55	22.57	22.56		
10	QPSK	1	49	22.53	22.52	22.56		
10	QPSK	25	0	21.66	21.66	21.72	23	1
10	QPSK	25	12	21.65	21.59	21.66		
10	QPSK	25	25	21.65	21.54	21.66		
10	QPSK	50	0	21.56	21.60	21.62		
10	16QAM	1	0	21.61	21.56	21.66	23	1
10	16QAM	1	25	21.56	21.63	21.60		
10	16QAM	1	49	21.56	21.58	21.52		
10	16QAM	25	0	20.55	20.53	20.60	22	2
10	16QAM	25	12	20.57	20.59	20.65		
10	16QAM	25	25	20.62	20.58	20.64		
10	16QAM	50	0	20.51	20.53	20.60		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.56	22.62	22.68	24	0
5	QPSK	1	12	22.53	22.62	22.67		
5	QPSK	1	24	22.62	22.57	22.52		
5	QPSK	12	0	21.61	21.64	21.67	23	1
5	QPSK	12	7	21.59	21.62	21.70		
5	QPSK	12	13	21.67	21.67	21.58		
5	QPSK	25	0	21.61	21.61	21.67		
5	16QAM	1	0	21.55	21.61	21.67	23	1
5	16QAM	1	12	21.64	21.65	21.65		
5	16QAM	1	24	21.59	21.59	21.53		
5	16QAM	12	0	20.63	20.64	20.66	22	2
5	16QAM	12	7	20.58	20.66	20.69		
5	16QAM	12	13	20.61	20.66	20.58		
5	16QAM	25	0	20.55	20.60	20.58		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.53	22.62	22.65	24	0
3	QPSK	1	8	22.54	22.60	22.63		
3	QPSK	1	14	22.58	22.64	22.60		
3	QPSK	8	0	21.61	21.66	21.66	23	1
3	QPSK	8	4	21.60	21.67	21.66		
3	QPSK	8	7	21.58	21.64	21.61		
3	QPSK	15	0	21.59	21.71	21.64		
3	16QAM	1	0	21.56	21.63	21.66	23	1
3	16QAM	1	8	21.56	21.60	21.58		
3	16QAM	1	14	21.57	21.58	21.56		
3	16QAM	8	0	20.53	20.54	20.61	22	2
3	16QAM	8	4	20.53	20.53	20.57		
3	16QAM	8	7	20.50	20.56	20.57		
3	16QAM	8	7	20.50	20.56	20.57		
3	16QAM	15	0	20.59	20.66	20.61		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.55	22.64	22.68	24	0
1.4	QPSK	1	3	22.57	22.66	22.67		
1.4	QPSK	1	5	22.60	22.61	22.62		
1.4	QPSK	3	0	22.61	22.65	22.66		
1.4	QPSK	3	1	22.61	22.64	22.61		
1.4	QPSK	3	3	22.59	22.64	22.60		
1.4	QPSK	6	0	21.61	21.70	21.66	23	1
1.4	16QAM	1	0	21.54	21.72	21.73	23	1
1.4	16QAM	1	3	21.62	21.64	21.57		
1.4	16QAM	1	5	21.59	21.65	21.56		
1.4	16QAM	3	0	21.59	21.66	21.66		
1.4	16QAM	3	1	21.59	21.70	21.66		
1.4	16QAM	3	3	21.64	21.60	21.59		
1.4	16QAM	6	0	20.65	20.69	20.64	22	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	22.76			24	0
10	QPSK	1	25	22.65				
10	QPSK	1	49	22.36				
10	QPSK	25	0	21.74			23	1
10	QPSK	25	12	21.66				
10	QPSK	25	25	21.60				
10	QPSK	50	0	21.69				
10	16QAM	1	0	21.38			23	1
10	16QAM	1	25	21.71				
10	16QAM	1	49	21.67				
10	16QAM	25	0	20.56			22	2
10	16QAM	25	12	20.68				
10	16QAM	25	25	20.70				
10	16QAM	50	0	20.66				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.41	22.75	22.74	24	0
5	QPSK	1	12	22.71	22.72	22.66		
5	QPSK	1	24	22.71	22.66	22.62		
5	QPSK	12	0	21.50	21.70	21.84	23	1
5	QPSK	12	7	21.55	21.74	21.75		
5	QPSK	12	13	21.73	21.87	21.72		
5	QPSK	25	0	21.59	21.70	21.66	23	1
5	16QAM	1	0	21.43	21.74	21.70		
5	16QAM	1	12	21.69	21.73	21.64		
5	16QAM	1	24	21.71	21.64	21.61	22	2
5	16QAM	12	0	20.54	20.72	20.86		
5	16QAM	12	7	20.60	20.79	20.74		
5	16QAM	12	13	20.73	20.82	20.73		
5	16QAM	25	0	20.59	20.68	20.71		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.69	22.73	22.69		
10	QPSK	1	25	22.61	22.60	22.55	24	0
10	QPSK	1	49	22.50	22.46	22.46		
10	QPSK	25	0	21.76	21.77	21.74		
10	QPSK	25	12	21.75	21.73	21.69	23	1
10	QPSK	25	25	21.70	21.73	21.66		
10	QPSK	50	0	21.61	21.65	21.62		
10	16QAM	1	0	21.60	21.79	21.59	23	1
10	16QAM	1	25	21.74	21.75	21.78		
10	16QAM	1	49	21.60	21.60	21.46		
10	16QAM	25	0	20.69	20.66	20.64	22	2
10	16QAM	25	12	20.68	20.71	20.71		
10	16QAM	25	25	20.78	20.75	20.66		
10	16QAM	50	0	20.57	20.60	20.64		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.50	22.70	22.69	24	0
5	QPSK	1	12	22.62	22.65	22.65		
5	QPSK	1	24	22.69	22.65	22.38		
5	QPSK	12	0	21.61	21.77	21.64	23	1
5	QPSK	12	7	21.68	21.81	21.75		
5	QPSK	12	13	21.79	21.77	21.67		
5	QPSK	25	0	21.76	21.80	21.66	23	1
5	16QAM	1	0	21.53	21.74	21.72		
5	16QAM	1	12	21.63	21.69	21.68		
5	16QAM	1	24	21.72	21.73	21.38	22	2
5	16QAM	12	0	20.60	20.79	20.73		
5	16QAM	12	7	20.70	20.82	20.77		
5	16QAM	12	13	20.78	20.81	20.69		
5	16QAM	25	0	20.75	20.74	20.66		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.01	23.02	23.14	24	0
20	QPSK	1	49	23.00	22.99	23.05		
20	QPSK	1	99	22.99	22.94	23.04		
20	QPSK	50	0	22.10	22.07	22.17	23	1
20	QPSK	50	24	22.05	22.04	22.09		
20	QPSK	50	50	21.92	21.95	22.08		
20	QPSK	100	0	21.87	22.01	22.12		
20	16QAM	1	0	21.98	22.01	22.21	23	1
20	16QAM	1	49	21.91	22.08	22.09		
20	16QAM	1	99	21.86	21.98	22.06		
20	16QAM	50	0	21.04	21.03	21.10	22	2
20	16QAM	50	24	21.00	20.98	21.10		
20	16QAM	50	50	20.89	20.92	21.11		
20	16QAM	100	0	20.87	20.99	21.15		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.10	22.98	23.20	24	0
15	QPSK	1	37	22.89	23.00	23.11		
15	QPSK	1	74	22.86	22.87	23.05		
15	QPSK	36	0	22.00	22.02	22.09	23	1
15	QPSK	36	20	21.99	22.03	22.13		
15	QPSK	36	39	21.92	21.96	22.20		
15	QPSK	75	0	21.91	21.93	22.11		
15	16QAM	1	0	22.01	22.00	22.22	23	1
15	16QAM	1	37	21.90	22.07	22.11		
15	16QAM	1	74	21.85	21.97	22.04		
15	16QAM	36	0	20.92	21.03	21.11	22	2
15	16QAM	36	20	20.94	21.02	21.13		
15	16QAM	36	39	20.88	20.96	21.22		
15	16QAM	75	0	20.84	20.93	21.05		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.02	23.03	23.14	24	0
10	QPSK	1	25	22.95	22.99	23.09		
10	QPSK	1	49	22.94	22.92	23.08		
10	QPSK	25	0	21.97	22.04	22.12	23	1
10	QPSK	25	12	22.02	22.06	22.20		
10	QPSK	25	25	21.97	22.04	22.24		
10	QPSK	50	0	21.95	22.02	22.17		
10	16QAM	1	0	22.02	22.03	22.14	23	1
10	16QAM	1	25	21.91	22.03	22.08		
10	16QAM	1	49	21.90	21.95	22.07		
10	16QAM	25	0	20.99	21.03	21.12	22	2
10	16QAM	25	12	20.98	21.04	21.19		
10	16QAM	25	25	20.86	21.02	21.17		
10	16QAM	50	0	20.89	20.99	21.18		



Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.05	23.02	23.22	24	0
5	QPSK	1	12	22.95	23.01	23.17		
5	QPSK	1	24	22.88	22.99	23.12		
5	QPSK	12	0	22.00	22.12	22.20	23	1
5	QPSK	12	7	21.95	22.07	22.23		
5	QPSK	12	13	21.90	22.08	22.21		
5	QPSK	25	0	22.03	22.02	22.23	23	1
5	16QAM	1	0	22.00	22.01	22.23		
5	16QAM	1	12	21.95	22.05	22.16		
5	16QAM	1	24	21.90	22.03	22.14	22	2
5	16QAM	12	0	21.02	21.12	21.20		
5	16QAM	12	7	21.05	21.09	21.24		
5	16QAM	12	13	20.92	21.08	21.22	22	2
5	16QAM	12	13	20.92	21.08	21.22		
5	16QAM	25	0	20.98	21.04	21.24		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.02	23.00	23.20	24	0
3	QPSK	1	8	22.95	23.00	23.17		
3	QPSK	1	14	23.00	22.99	23.14		
3	QPSK	8	0	22.06	22.11	22.17	23	1
3	QPSK	8	4	21.94	22.03	22.28		
3	QPSK	8	7	22.01	22.09	22.28		
3	QPSK	15	0	21.94	22.05	22.22	23	1
3	16QAM	1	0	22.00	22.08	22.19		
3	16QAM	1	8	21.92	22.04	22.18		
3	16QAM	1	14	21.94	21.99	22.14	22	2
3	16QAM	8	0	20.99	21.03	21.12		
3	16QAM	8	4	20.89	21.00	21.19		
3	16QAM	8	7	20.95	20.97	21.22	22	2
3	16QAM	8	7	20.95	20.97	21.22		
3	16QAM	15	0	20.94	21.07	21.21	22	2
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	23.03	22.96	23.20	24	0
1.4	QPSK	1	3	23.00	23.03	23.17		
1.4	QPSK	1	5	22.94	22.99	23.12		
1.4	QPSK	3	0	23.03	23.01	23.09		
1.4	QPSK	3	1	23.05	23.02	23.14		
1.4	QPSK	3	3	23.02	23.03	23.08		
1.4	QPSK	6	0	22.07	22.10	22.24	23	1
1.4	16QAM	1	0	21.94	22.01	22.24	23	1
1.4	16QAM	1	3	21.99	22.01	22.17		
1.4	16QAM	1	5	21.91	21.98	22.13		
1.4	16QAM	3	0	22.05	22.05	22.10		
1.4	16QAM	3	1	22.07	22.07	22.18		
1.4	16QAM	3	3	22.05	22.08	22.18		
1.4	16QAM	6	0	21.13	21.09	21.24	22	2



Reduced Power Mode

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	13.54	13.23	14.34	15	0
20	QPSK	1	49	13.89	13.75	13.02		
20	QPSK	1	99	13.00	14.34	14.47		
20	QPSK	50	0	14.06	13.56	13.98	15	0
20	QPSK	50	24	13.80	13.85	13.30		
20	QPSK	50	50	13.36	14.13	13.24		
20	QPSK	100	0	13.66	13.86	13.64	15	0
20	16QAM	1	0	13.92	13.23	14.64		
20	16QAM	1	49	14.28	13.79	13.30		
20	16QAM	1	99	13.07	14.64	14.58	15	0
20	16QAM	50	0	13.83	13.21	13.74		
20	16QAM	50	24	13.85	13.51	13.27		
20	16QAM	50	50	13.12	13.80	13.26	15	0
20	16QAM	100	0	13.42	13.54	13.60		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	13.17	13.00	13.71	15	0
15	QPSK	1	37	13.85	13.39	13.00		
15	QPSK	1	74	13.00	14.19	14.29		
15	QPSK	36	0	13.77	13.14	13.21	15	0
15	QPSK	36	20	13.71	13.36	13.01		
15	QPSK	36	39	13.51	14.00	13.40		
15	QPSK	75	0	13.71	13.47	13.42	15	0
15	16QAM	1	0	13.57	13.03	14.01		
15	16QAM	1	37	13.96	13.76	13.12		
15	16QAM	1	74	13.14	14.25	14.32	15	0
15	16QAM	36	0	13.57	13.02	13.00		
15	16QAM	36	20	13.51	13.42	13.03		
15	16QAM	36	39	13.31	13.66	13.17	15	0
15	16QAM	75	0	13.48	13.54	13.12		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	13.59	13.45	13.20	15	0
10	QPSK	1	25	14.02	13.46	13.21		
10	QPSK	1	49	14.21	14.01	14.10		
10	QPSK	25	0	13.91	13.51	13.30	15	0
10	QPSK	25	12	14.14	13.55	13.39		
10	QPSK	25	25	14.15	13.81	14.06		
10	QPSK	50	0	14.20	13.71	13.74	15	0
10	16QAM	1	0	13.96	13.60	13.54		
10	16QAM	1	25	14.14	13.83	13.33		
10	16QAM	1	49	14.28	14.46	14.40	15	0
10	16QAM	25	0	13.95	13.27	13.09		
10	16QAM	25	12	13.90	13.57	13.15		
10	16QAM	25	25	13.93	13.88	13.82	15	0
10	16QAM	50	0	14.00	13.53	13.51		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	13.09	13.11	13.12	15	0
5	QPSK	1	12	13.74	13.47	13.70		
5	QPSK	1	24	13.74	13.50	14.84		
5	QPSK	12	0	13.50	13.36	13.34	15	0
5	QPSK	12	7	13.66	13.57	13.86		
5	QPSK	12	13	13.87	13.45	14.33		
5	QPSK	25	0	13.72	13.44	13.91		
5	16QAM	1	0	13.50	13.23	13.22	15	0
5	16QAM	1	12	14.16	13.85	13.83		
5	16QAM	1	24	14.19	13.89	14.95		
5	16QAM	12	0	13.57	13.20	13.12	15	0
5	16QAM	12	7	13.74	13.61	13.64		
5	16QAM	12	13	13.94	13.54	14.11		
5	16QAM	25	0	13.77	13.46	13.69		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	13.13	13.33	13.60	15	0
3	QPSK	1	8	13.66	13.55	14.29		
3	QPSK	1	14	13.73	13.43	14.90		
3	QPSK	8	0	13.39	13.44	13.87	15	0
3	QPSK	8	4	13.71	13.60	14.32		
3	QPSK	8	7	13.80	13.45	14.55		
3	QPSK	15	0	13.61	13.51	14.24		
3	16QAM	1	0	13.50	13.43	13.69	15	0
3	16QAM	1	8	14.04	13.92	14.39		
3	16QAM	1	14	14.09	13.78	14.99		
3	16QAM	8	0	13.49	13.52	13.70	15	0
3	16QAM	8	4	13.81	13.68	14.15		
3	16QAM	8	7	13.89	13.58	14.38		
3	16QAM	15	0	13.66	13.56	14.02		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	13.42	13.54	14.35	15	0
1.4	QPSK	1	3	13.66	13.67	14.78		
1.4	QPSK	1	5	13.65	13.48	14.92		
1.4	QPSK	3	0	13.54	13.64	14.57		
1.4	QPSK	3	1	13.60	13.67	14.70		
1.4	QPSK	3	3	13.69	13.70	14.93		
1.4	QPSK	6	0	13.59	13.66	14.75	15	0
1.4	16QAM	1	0	13.68	13.91	14.43	15	0
1.4	16QAM	1	3	13.93	14.00	14.88		
1.4	16QAM	1	5	13.92	13.86	14.99		
1.4	16QAM	3	0	13.53	13.66	14.35		
1.4	16QAM	3	1	13.60	13.70	14.49		
1.4	16QAM	3	3	13.66	13.69	14.69		
1.4	16QAM	6	0	13.65	13.75	14.59	15	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	14.5	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	13.24	13.94	13.74	14.5	0
20	QPSK	1	49	13.54	13.58	13.24		
20	QPSK	1	99	13.45	12.63	13.43		
20	QPSK	50	0	13.52	13.79	13.53	14.5	0
20	QPSK	50	24	13.52	13.64	13.32		
20	QPSK	50	50	13.69	13.38	13.29		
20	QPSK	100	0	13.54	13.47	13.41		
20	16QAM	1	0	13.12	14.01	14.11	14.5	0
20	16QAM	1	49	13.66	13.67	13.65		
20	16QAM	1	99	13.76	13.40	13.27		
20	16QAM	50	0	13.28	13.53	13.57	14.5	0
20	16QAM	50	24	13.30	13.41	13.39		
20	16QAM	50	50	13.43	12.81	13.30		
20	16QAM	100	0	13.32	13.47	13.46		
Channel				20025	20175	20325	14.5	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	12.93	13.81	13.53	14.5	0
15	QPSK	1	37	13.26	13.54	13.22		
15	QPSK	1	74	13.57	12.64	13.39		
15	QPSK	36	0	13.39	13.77	13.38	14.5	0
15	QPSK	36	20	13.38	13.50	13.31		
15	QPSK	36	39	13.47	13.38	13.27		
15	QPSK	75	0	13.34	13.34	13.29		
15	16QAM	1	0	12.90	13.89	13.27	14.5	0
15	16QAM	1	37	13.40	13.62	13.56		
15	16QAM	1	74	13.65	12.98	13.21		
15	16QAM	36	0	13.14	13.50	13.37	14.5	0
15	16QAM	36	20	13.15	13.27	13.32		
15	16QAM	36	39	13.25	12.82	12.74		
15	16QAM	75	0	13.13	13.35	13.30		
Channel				20000	20175	20350	14.5	0
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	13.29	14.11	13.81	14.5	0
10	QPSK	1	25	13.26	13.61	13.42		
10	QPSK	1	49	13.79	13.15	13.68		
10	QPSK	25	0	13.52	13.96	13.56	14.5	0
10	QPSK	25	12	13.45	13.72	13.55		
10	QPSK	25	25	13.58	13.50	13.54		
10	QPSK	50	0	13.52	13.58	13.53		
10	16QAM	1	0	13.22	14.22	13.55	14.5	0
10	16QAM	1	25	13.42	13.69	13.78		
10	16QAM	1	49	13.90	13.53	13.47		
10	16QAM	25	0	13.29	13.69	12.97	14.5	0
10	16QAM	25	12	13.25	13.48	13.00		
10	16QAM	25	25	13.37	12.95	13.54		
10	16QAM	50	0	13.28	13.59	12.99		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	12.95	13.73	13.50	14.5	0
5	QPSK	1	12	13.28	13.71	13.38		
5	QPSK	1	24	13.33	13.33	13.36		
5	QPSK	12	0	13.29	13.79	13.51	14.5	0
5	QPSK	12	7	13.28	13.78	13.40		
5	QPSK	12	13	13.27	13.43	13.42		
5	QPSK	25	0	13.36	13.48	13.34	14.5	0
5	16QAM	1	0	12.82	13.82	13.26		
5	16QAM	1	12	13.43	13.80	13.80		
5	16QAM	1	24	13.45	13.11	13.78	14.5	0
5	16QAM	12	0	13.08	13.54	13.53		
5	16QAM	12	7	13.06	13.57	13.46		
5	16QAM	12	13	13.05	12.90	13.51	14.5	0
5	16QAM	25	0	13.13	13.54	13.42		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	12.99	13.69	13.39	14.5	0
3	QPSK	1	8	13.33	13.71	13.47		
3	QPSK	1	14	13.29	13.34	13.36		
3	QPSK	8	0	13.30	13.85	13.35	14.5	0
3	QPSK	8	4	13.38	13.81	13.51		
3	QPSK	8	7	13.39	13.44	13.47		
3	QPSK	15	0	13.42	13.57	13.41	14.5	0
3	16QAM	1	0	13.39	13.76	13.70		
3	16QAM	1	8	13.47	13.82	13.87		
3	16QAM	1	14	13.41	13.11	13.77	14.5	0
3	16QAM	8	0	13.15	13.69	13.44		
3	16QAM	8	4	13.22	13.64	13.61		
3	16QAM	8	7	13.22	13.56	13.57	14.5	0
3	16QAM	15	0	13.21	13.65	13.48		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	13.33	13.72	13.97	14.5	0
1.4	QPSK	1	3	13.35	13.79	13.99		
1.4	QPSK	1	5	13.26	13.74	13.97		
1.4	QPSK	3	0	13.36	13.88	13.42	14.5	0
1.4	QPSK	3	1	13.39	13.87	14.00		
1.4	QPSK	3	3	13.38	13.79	13.94		
1.4	QPSK	6	0	13.39	13.85	13.91	14.5	0
1.4	16QAM	1	0	13.44	13.75	13.67	14.5	0
1.4	16QAM	1	3	13.48	13.87	13.72		
1.4	16QAM	1	5	13.36	13.82	13.63		
1.4	16QAM	3	0	13.17	13.68	13.51	14.5	0
1.4	16QAM	3	1	13.19	13.66	13.42		
1.4	16QAM	3	3	13.15	13.57	13.31		
1.4	16QAM	6	0	13.24	13.69	13.36	14.5	0



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	15.68	15.67	16.23	17	0
10	QPSK	1	25	15.68	15.83	15.55		
10	QPSK	1	49	15.79	15.79	15.73		
10	QPSK	25	0	15.74	15.92	16.43	17	0
10	QPSK	25	12	15.79	15.93	15.65		
10	QPSK	25	25	15.89	15.99	15.63		
10	QPSK	50	0	15.75	15.92	15.61		
10	16QAM	1	0	16.01	15.28	15.80	17	0
10	16QAM	1	25	16.06	16.20	15.94		
10	16QAM	1	49	15.37	15.42	15.85		
10	16QAM	25	0	15.80	15.13	15.62	17	0
10	16QAM	25	12	15.80	15.18	15.70		
10	16QAM	25	25	15.13	15.25	15.41		
10	16QAM	50	0	15.00	15.13	15.69		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	15.46	15.52	15.30	17	0
5	QPSK	1	12	15.70	15.93	15.71		
5	QPSK	1	24	15.43	15.57	15.47		
5	QPSK	12	0	15.59	15.77	15.55	17	0
5	QPSK	12	7	15.74	16.00	15.67		
5	QPSK	12	13	15.67	15.83	15.69		
5	QPSK	25	0	15.64	15.81	15.66		
5	16QAM	1	0	15.84	15.13	15.42	17	0
5	16QAM	1	12	16.12	16.30	15.86		
5	16QAM	1	24	15.02	15.17	15.58		
5	16QAM	12	0	15.65	15.03	15.57	17	0
5	16QAM	12	7	15.83	16.05	15.69		
5	16QAM	12	13	15.76	15.09	15.45		
5	16QAM	25	0	15.70	15.06	15.46		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	15.81	15.70	15.60	17	0
3	QPSK	1	8	15.85	15.95	15.80		
3	QPSK	1	14	15.72	15.78	15.68		
3	QPSK	8	0	15.84	15.89	15.78	17	0
3	QPSK	8	4	15.92	16.03	15.86		
3	QPSK	8	7	15.84	15.93	15.72		
3	QPSK	15	0	15.82	15.92	15.75		
3	16QAM	1	0	16.18	15.28	15.67	17	0
3	16QAM	1	8	16.28	16.35	15.94		
3	16QAM	1	14	16.06	15.37	15.82		
3	16QAM	8	0	15.94	15.97	15.63	17	0
3	16QAM	8	4	16.05	16.12	15.71		
3	16QAM	8	7	15.96	16.01	15.58		
3	16QAM	15	0	15.91	15.95	15.57		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	15.81	15.85	15.84	17	0
1.4	QPSK	1	3	15.81	15.98	15.93		
1.4	QPSK	1	5	15.67	15.88	15.80		
1.4	QPSK	3	0	15.88	15.99	15.82		
1.4	QPSK	3	1	15.87	16.01	15.97		
1.4	QPSK	3	3	15.80	16.01	15.82		
1.4	QPSK	6	0	15.85	16.01	15.83	17	0
1.4	16QAM	1	0	16.19	16.26	15.98	17	0
1.4	16QAM	1	3	16.21	16.35	16.04		
1.4	16QAM	1	5	16.05	16.30	15.94		
1.4	16QAM	3	0	15.95	16.05	15.66		
1.4	16QAM	3	1	15.94	16.06	15.76		
1.4	16QAM	3	3	15.85	16.05	15.63		
1.4	16QAM	6	0	15.98	16.11	15.72	17	0



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	17.20			18	0
10	QPSK	1	25	17.30				
10	QPSK	1	49	17.19				
10	QPSK	25	0	17.21			18	0
10	QPSK	25	12	17.36				
10	QPSK	25	25	17.33				
10	QPSK	50	0	17.34			18	0
10	16QAM	1	0	17.16				
10	16QAM	1	25	17.37				
10	16QAM	1	49	17.11			18	0
10	16QAM	25	0	17.18				
10	16QAM	25	12	17.27				
10	16QAM	25	25	17.28			18	0
10	16QAM	50	0	17.28				
Channel				23205	23230	23255		
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	17.24	17.17	17.35	18	0
5	QPSK	1	12	17.18	17.34	17.32		
5	QPSK	1	24	17.47	17.40	17.17		
5	QPSK	12	0	17.17	17.31	17.36	18	0
5	QPSK	12	7	17.21	17.35	17.39		
5	QPSK	12	13	17.32	17.34	17.32		
5	QPSK	25	0	17.25	17.29	17.32	18	0
5	16QAM	1	0	17.16	17.13	17.32		
5	16QAM	1	12	17.18	17.34	17.26		
5	16QAM	1	24	17.44	17.39	17.17	18	0
5	16QAM	12	0	17.27	17.29	17.39		
5	16QAM	12	7	17.25	17.38	17.37		
5	16QAM	12	13	17.40	17.34	17.31	18	0
5	16QAM	25	0	17.23	17.28	17.29		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	15.5	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	14.18	14.17	14.09		
10	QPSK	1	25	14.65	14.65	14.39	15.5	0
10	QPSK	1	49	13.95	14.14	13.68		
10	QPSK	25	0	14.33	14.41	14.45		
10	QPSK	25	12	14.52	14.58	14.51	15.5	0
10	QPSK	25	25	14.49	14.34	14.04		
10	QPSK	50	0	14.42	14.48	14.36		
10	16QAM	1	0	14.56	14.55	14.43	15.5	0
10	16QAM	1	25	14.88	14.90	14.65		
10	16QAM	1	49	14.37	14.54	14.09		
10	16QAM	25	0	14.30	14.40	14.38	15.5	0
10	16QAM	25	12	14.44	14.49	14.41		
10	16QAM	25	25	14.39	14.38	14.08		
10	16QAM	50	0	14.36	14.43	14.30	15.5	0
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	13.99	14.52	14.55	15.5	0
5	QPSK	1	12	13.97	14.81	14.20		
5	QPSK	1	24	14.39	14.32	13.71		
5	QPSK	12	0	14.05	14.71	14.37	15.5	0
5	QPSK	12	7	14.15	14.81	14.20		
5	QPSK	12	13	14.29	14.67	14.14		
5	QPSK	25	0	14.24	14.70	14.18	15.5	0
5	16QAM	1	0	14.37	14.83	14.76		
5	16QAM	1	12	14.36	15.03	14.59		
5	16QAM	1	24	14.84	14.64	14.09	15.5	0
5	16QAM	12	0	14.10	14.65	14.41		
5	16QAM	12	7	14.15	14.72	14.24		
5	16QAM	12	13	14.42	14.59	14.19	15.5	0
5	16QAM	25	0	14.22	14.61	14.21		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	13.34	13.01	13.38	14.5	0
20	QPSK	1	49	13.97	13.40	12.99		
20	QPSK	1	99	12.60	14.31	14.16		
20	QPSK	50	0	13.75	13.37	13.10	14.5	0
20	QPSK	50	24	13.85	13.62	13.39		
20	QPSK	50	50	13.04	13.82	13.88		
20	QPSK	100	0	13.35	13.71	13.50		
20	16QAM	1	0	13.73	13.01	13.75	14.5	0
20	16QAM	1	49	13.92	13.45	13.06		
20	16QAM	1	99	12.65	14.36	14.11		
20	16QAM	50	0	13.54	13.06	13.06	14.5	0
20	16QAM	50	24	13.53	13.30	13.06		
20	16QAM	50	50	12.77	13.80	13.56		
20	16QAM	100	0	13.12	13.68	13.17		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	13.26	12.76	12.53	14.5	0
15	QPSK	1	37	13.72	13.42	13.08		
15	QPSK	1	74	12.73	13.96	14.06		
15	QPSK	36	0	13.70	12.96	12.91	14.5	0
15	QPSK	36	20	13.59	13.53	13.36		
15	QPSK	36	39	13.43	13.79	14.10		
15	QPSK	75	0	13.48	13.61	13.38		
15	16QAM	1	0	13.66	12.87	12.94	14.5	0
15	16QAM	1	37	13.82	13.49	13.23		
15	16QAM	1	74	13.08	14.28	13.99		
15	16QAM	36	0	13.46	13.02	12.66	14.5	0
15	16QAM	36	20	13.37	13.23	13.36		
15	16QAM	36	39	13.17	13.76	13.77		
15	16QAM	75	0	13.27	13.32	13.46		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	13.42	13.00	13.11	14.5	0
10	QPSK	1	25	13.62	13.39	13.64		
10	QPSK	1	49	13.79	13.99	13.81		
10	QPSK	25	0	13.45	13.20	13.11	14.5	0
10	QPSK	25	12	13.77	13.57	13.75		
10	QPSK	25	25	13.80	13.85	14.00		
10	QPSK	50	0	13.76	13.78	13.84		
10	16QAM	1	0	13.86	13.14	13.23	14.5	0
10	16QAM	1	25	13.80	13.45	13.68		
10	16QAM	1	49	13.92	14.00	13.77		
10	16QAM	25	0	13.50	13.27	13.14	14.5	0
10	16QAM	25	12	13.55	13.24	13.45		
10	16QAM	25	25	13.56	13.54	13.94		
10	16QAM	50	0	13.53	13.44	13.49		



Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	13.18	13.00	13.75	14.5	0
5	QPSK	1	12	13.36	13.45	14.39		
5	QPSK	1	24	13.68	13.59	13.41		
5	QPSK	12	0	13.26	13.43	14.25	14.5	0
5	QPSK	12	7	13.67	13.57	14.40		
5	QPSK	12	13	13.80	13.61	14.14		
5	QPSK	25	0	13.35	13.54	14.16		
5	16QAM	1	0	13.61	13.37	13.79	14.5	0
5	16QAM	1	12	13.86	13.51	14.37		
5	16QAM	1	24	13.82	13.65	13.39		
5	16QAM	12	0	13.33	13.13	13.94	14.5	0
5	16QAM	12	7	13.51	13.30	14.07		
5	16QAM	12	13	13.60	13.34	13.81		
5	16QAM	25	0	13.46	13.22	13.84		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	13.03	13.28	14.44	14.5	0
3	QPSK	1	8	13.24	13.52	14.28		
3	QPSK	1	14	13.19	13.59	13.46		
3	QPSK	8	0	13.19	13.40	14.48	14.5	0
3	QPSK	8	4	13.17	13.57	14.38		
3	QPSK	8	7	13.26	13.54	13.92		
3	QPSK	15	0	13.21	13.49	14.26		
3	16QAM	1	0	13.45	13.34	14.40	14.5	0
3	16QAM	1	8	13.67	13.61	14.24		
3	16QAM	1	14	13.64	13.64	13.42		
3	16QAM	8	0	13.31	13.15	14.19	14.5	0
3	16QAM	8	4	13.34	13.35	14.09		
3	16QAM	8	7	13.44	13.31	13.63		
3	16QAM	15	0	13.28	13.22	13.95		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	13.03	13.39	14.06	14.5	0
1.4	QPSK	1	3	13.18	13.52	13.81		
1.4	QPSK	1	5	13.11	13.42	13.50		
1.4	QPSK	3	0	13.23	13.44	14.05		
1.4	QPSK	3	1	13.18	13.50	13.97		
1.4	QPSK	3	3	13.29	13.49	13.72		
1.4	QPSK	6	0	13.21	13.41	13.91	14.5	0
1.4	16QAM	1	0	13.46	13.44	14.28	14.5	0
1.4	16QAM	1	3	13.61	13.59	14.05		
1.4	16QAM	1	5	13.52	13.44	13.72		
1.4	16QAM	3	0	13.33	13.20	14.00		
1.4	16QAM	3	1	13.27	13.25	13.93		
1.4	16QAM	3	3	13.35	13.22	13.66		
1.4	16QAM	6	0	13.35	13.21	13.92	14.5	0

**<WLAN Conducted Power>****General Note:**

1. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6W/kg and SAR peak to location ratio < 0.04, no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<2.4GHz WLAN ANT 1>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN ANT 1	802.11b	CH 1	2412	1Mbps	15.42	15.50	98.62
		CH 6	2437		15.46	15.50	
		CH 11	2462		15.38	15.50	
	802.11g	CH 1	2412	6Mbps	15.38	15.50	92.56
		CH 6	2437		15.32	15.50	
		CH 11	2462		15.37	15.50	
	802.11n-HT20	CH 1	2412	MCS0	15.26	15.50	92.41
		CH 6	2437		15.29	15.50	
		CH 11	2462		15.27	15.50	
	802.11ac-VHT20	CH 1	2412	MCS0	15.22	15.50	92.47
		CH 6	2437		15.39	15.50	
		CH 11	2462		15.35	15.50	
	802.11n-HT40	CH 3	2422	MCS0	15.21	15.50	86.61
		CH 6	2437		15.33	15.50	
		CH 9	2452		15.23	15.50	
802.11ac-VHT40	CH 3	2422	MCS0	15.35	15.50	85.71	
	CH 6	2437		15.34	15.50		
	CH 9	2452		15.23	15.50		

<2.4GHz WLAN ANT 2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN ANT 2	802.11b	CH 1	2412	1Mbps	15.44	15.50	98.62
		CH 6	2437		15.44	15.50	
		CH 11	2462		15.39	15.50	
	802.11g	CH 1	2412	6Mbps	15.30	15.50	92.86
		CH 6	2437		15.25	15.50	
		CH 11	2462		15.35	15.50	
	802.11n-HT20	CH 1	2412	MCS0	15.36	15.50	93.06
		CH 6	2437		15.33	15.50	
		CH 11	2462		15.21	15.50	
	802.11ac-VHT20	CH 1	2412	MCS0	15.23	15.50	93.10
		CH 6	2437		15.33	15.50	
		CH 11	2462		15.31	15.50	
	802.11n-HT40	CH 3	2422	MCS0	15.26	15.50	86.28
		CH 6	2437		15.32	15.50	
		CH 9	2452		15.27	15.50	
802.11ac-VHT40	CH 3	2422	MCS0	15.29	15.50	85.71	
	CH 6	2437		15.34	15.50		
	CH 9	2452		15.37	15.50		



<2.4GHz WLAN ANT 1+2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN ANT 1+2	802.11b	CH 1	2412	1Mbps	18.48	18.50	98.85
		CH 6	2437		18.49	18.50	
		CH 11	2462		18.43	18.50	
	802.11g	CH 1	2412	6Mbps	18.42	18.50	92.86
		CH 6	2437		18.34	18.50	
		CH 11	2462		18.39	18.50	
	802.11n-HT20	CH 1	2412	MCS0	18.45	18.50	92.36
		CH 6	2437		18.39	18.50	
		CH 11	2462		18.40	18.50	
	802.11ac-VHT20	CH 1	2412	MCS0	18.35	18.50	87.50
		CH 6	2437		18.41	18.50	
		CH 11	2462		18.38	18.50	
	802.11n-HT40	CH 3	2422	MCS0	18.30	18.50	85.94
		CH 6	2437		18.40	18.50	
		CH 9	2452		18.32	18.50	
802.11ac-VHT40	CH 3	2422	MCS0	18.37	18.50	85.94	
	CH 6	2437		18.41	18.50		
	CH 9	2452		18.39	18.50		



<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 1	802.11a	CH 36	5180	6Mbps	11.45	11.50	93.58
		CH 40	5200		11.32	11.50	
		CH 44	5220		11.38	11.50	
		CH 48	5240		11.48	11.50	
	802.11n-HT20	CH 36	5180	MCS0	11.46	11.50	93.20
		CH 40	5200		11.42	11.50	
		CH 44	5220		11.45	11.50	
		CH 48	5240		11.37	11.50	
	802.11n-HT40	CH 38	5190	MCS0	11.32	11.50	86.84
		CH 46	5230		11.46	11.50	
	802.11ac-VHT20	CH 36	5180	MCS0	11.47	11.50	92.31
		CH 40	5200		11.42	11.50	
CH 44		5220	11.44		11.50		
CH 48		5240	11.38		11.50		
802.11ac-VHT40	CH 38	5190	MCS0	11.46	11.50	87.01	
	CH 46	5230		11.41	11.50		
802.11ac-VHT80	CH 42	5210	MCS0	10.85	11.00	75.93	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 1	802.11a	CH 52	5260	6Mbps	11.38	11.50	93.58
		CH 56	5280		11.35	11.50	
		CH 60	5300		11.32	11.50	
		CH 64	5320		11.47	11.50	
	802.11n-HT20	CH 52	5260	MCS0	11.44	11.50	93.20
		CH 56	5280		11.42	11.50	
		CH 60	5300		11.45	11.50	
		CH 64	5320		11.43	11.50	
	802.11n-HT40	CH 54	5270	MCS0	11.35	11.50	86.84
		CH 62	5310		11.32	11.50	
	802.11ac-VHT20	CH 52	5260	MCS0	11.44	11.50	92.31
		CH 56	5280		11.45	11.50	
CH 60		5300	11.46		11.50		
CH 64		5320	11.38		11.50		
802.11ac-VHT40	CH 54	5270	MCS0	11.34	11.50	87.01	
	CH 62	5310		11.39	11.50		
802.11ac-VHT80	CH 58	5290	MCS0	10.91	11.00	75.93	



5.5GHz WLAN ANT 1	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a	CH 100	5500	6Mbps	11.86	12.00	93.58
		CH 116	5580		11.84	12.00	
		CH 132	5660		11.89	12.00	
		CH 144	5720		11.82	12.00	
	802.11n-HT20	CH 100	5500	MCS0	11.83	12.00	93.20
		CH 116	5580		11.79	12.00	
		CH 132	5660		11.88	12.00	
		CH 144	5720		11.79	12.00	
	802.11n-HT40	CH 102	5510	MCS0	11.94	12.00	86.84
CH 110		5550	11.83		12.00		
CH 134		5670	11.76		12.00		
CH 142		5710	11.76		12.00		
802.11ac-VHT20	CH 100	5500	MCS0	11.93	12.00	92.31	
	CH 116	5580		11.86	12.00		
	CH 132	5660		11.78	12.00		
	CH 144	5720		11.92	12.00		
802.11ac-VHT40	CH 102	5510	MCS0	11.93	12.00	87.01	
	CH 110	5550		11.95	12.00		
	CH 134	5670		11.77	12.00		
	CH 142	5710		11.83	12.00		
802.11ac-VHT80	CH 106	5530	MCS0	11.46	11.50	75.93	
	CH 138	5690		11.44	11.50		

5.8GHz WLAN ANT 1	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a	CH 149	5745	MCS0	11.75	12.00	93.58
		CH 157	5785		11.96	12.00	
		CH 165	5825		11.90	12.00	
	802.11n-HT20	CH 149	5745	MCS0	11.90	12.00	93.20
		CH 157	5785		11.65	12.00	
		CH 165	5825		11.81	12.00	
	802.11n-HT40	CH 151	5755	MCS0	11.90	12.00	86.84
		CH 159	5795		11.92	12.00	
	802.11ac-VHT20	CH 149	5745	MCS0	11.91	12.00	92.31
CH 157		5785	11.73		12.00		
CH 165		5825	11.76		12.00		
802.11ac-VHT40	CH 151	5755	MCS0	11.94	12.00	87.01	
	CH 159	5795		11.91	12.00		
802.11ac-VHT80	CH 155	5775	MCS0	11.44	11.50	75.93	



<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 2	802.11a	CH 36	5180	6Mbps	14.85	15.00	92.73
		CH 40	5200		14.84	15.00	
		CH 44	5220		14.85	15.00	
		CH 48	5240		14.86	15.00	
	802.11n-HT20	CH 36	5180	MCS0	14.96	15.00	93.20
		CH 40	5200		14.87	15.00	
		CH 44	5220		14.93	15.00	
		CH 48	5240		14.92	15.00	
	802.11n-HT40	CH 38	5190	MCS0	13.58	14.00	87.01
		CH 46	5230		14.94	15.00	
	802.11ac-VHT20	CH 36	5180	MCS0	14.94	15.00	93.20
		CH 40	5200		14.90	15.00	
		CH 44	5220		14.97	15.00	
		CH 48	5240		14.93	15.00	
	802.11ac-VHT40	CH 38	5190	MCS0	13.63	14.00	87.01
		CH 46	5230		14.94	15.00	
802.11ac-VHT80	CH 42	5210	MCS0	12.96	13.00	76.85	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 2	802.11a	CH 52	5260	6Mbps	14.97	15.00	92.73
		CH 56	5280		14.87	15.00	
		CH 60	5300		14.91	15.00	
		CH 64	5320		14.98	15.00	
	802.11n-HT20	CH 52	5260	MCS0	14.86	15.00	93.20
		CH 56	5280		14.84	15.00	
		CH 60	5300		14.98	15.00	
		CH 64	5320		14.93	15.00	
	802.11n-HT40	CH 54	5270	MCS0	14.99	15.00	87.01
		CH 62	5310		13.90	14.00	
	802.11ac-VHT20	CH 52	5260	MCS0	14.96	15.00	93.20
		CH 56	5280		14.84	15.00	
		CH 60	5300		14.92	15.00	
		CH 64	5320		14.99	15.00	
	802.11ac-VHT40	CH 54	5270	MCS0	14.99	15.00	87.01
		CH 62	5310		13.98	14.00	
802.11ac-VHT80	CH 58	5290	MCS0	13.08	13.50	76.85	



5.5GHz WLAN ANT 2	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a	CH 100	5500	6Mbps	13.99	14.00	92.73
		CH 116	5580		13.95		
		CH 132	5660		13.71		
		CH 144	5720		13.79		
	802.11n-HT20	CH 100	5500	MCS0	13.84	14.00	93.20
		CH 116	5580		13.91		
		CH 132	5660		13.89		
		CH 144	5720		13.87		
	802.11n-HT40	CH 102	5510	MCS0	13.69	14.00	87.01
CH 110		5550	13.82				
CH 134		5670	13.93				
CH 142		5710	13.73				
802.11ac-VHT20	CH 100	5500	MCS0	13.92	14.00	93.20	
	CH 116	5580		13.88			
	CH 132	5660		13.90			
	CH 144	5720		13.89			
802.11ac-VHT40	CH 102	5510	MCS0	13.94	14.00	87.01	
	CH 110	5550		13.77			
	CH 134	5670		13.67			
	CH 142	5710		13.70			
802.11ac-VHT80	CH 106	5530	MCS0	13.43	13.50	76.85	
	CH 138	5690		13.33			

5.8GHz WLAN ANT 2	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a	CH 149	5745	MCS0	12.73	13.00	92.73
		CH 157	5785		12.90		
		CH 165	5825		12.92		
	802.11n-HT20	CH 149	5745	MCS0	12.93	13.00	93.20
		CH 157	5785		12.92		
		CH 165	5825		12.94		
	802.11n-HT40	CH 151	5755	MCS0	12.86	13.00	87.01
		CH 159	5795		12.95		
	802.11ac-VHT20	CH 149	5745	MCS0	12.88	13.00	93.20
		CH 157	5785		12.92		
		CH 165	5825		12.94		
	802.11ac-VHT40	CH 151	5755	MCS0	12.86	13.00	87.01
		CH 159	5795		12.96		
802.11ac-VHT80	CH 155	5775	MCS0	12.30	12.50	76.85	



<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 1+2	802.11a	CH 36	5180	6Mbps	14.41	14.50	93.58
		CH 40	5200		14.22	14.50	
		CH 44	5220		14.20	14.50	
		CH 48	5240		14.32	14.50	
	802.11n-HT20	CH 36	5180	MCS0	14.30	14.50	93.20
		CH 40	5200		14.23	14.50	
		CH 44	5220		14.21	14.50	
		CH 48	5240		14.23	14.50	
	802.11n-HT40	CH 38	5190	MCS0	14.20	14.50	85.62
		CH 46	5230		14.15	14.50	
	802.11ac-VHT20	CH 36	5180	MCS0	14.25	14.50	92.23
		CH 40	5200		14.30	14.50	
		CH 44	5220		14.27	14.50	
		CH 48	5240		14.34	14.50	
	802.11ac-VHT40	CH 38	5190	MCS0	14.30	14.50	87.01
		CH 46	5230		14.07	14.50	
802.11ac-VHT80	CH 42	5210	MCS0	13.80	14.00	75.93	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 1+2	802.11a	CH 52	5260	6Mbps	14.39	14.50	93.58
		CH 56	5280		14.23	14.50	
		CH 60	5300		14.45	14.50	
		CH 64	5320		14.34	14.50	
	802.11n-HT20	CH 52	5260	MCS0	14.23	14.50	93.20
		CH 56	5280		14.23	14.50	
		CH 60	5300		14.34	14.50	
		CH 64	5320		14.34	14.50	
	802.11n-HT40	CH 54	5270	MCS0	14.29	14.50	85.62
		CH 62	5310		14.24	14.50	
	802.11ac-VHT20	CH 52	5260	MCS0	14.43	14.50	92.23
		CH 56	5280		14.36	14.50	
		CH 60	5300		14.31	14.50	
		CH 64	5320		14.35	14.50	
	802.11ac-VHT40	CH 54	5270	MCS0	14.38	14.50	87.01
		CH 62	5310		14.31	14.50	
802.11ac-VHT80	CH 58	5290	MCS0	13.91	14.00	75.93	



5.5GHz WLAN ANT 1+2	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a	CH 100	5500	6Mbps	14.71	15.00	93.58
		CH 116	5580		14.69	15.00	
		CH 132	5660		14.66	15.00	
		CH 144	5720		14.68	15.00	
	802.11n-HT20	CH 100	5500	MCS0	14.60	15.00	93.20
		CH 116	5580		14.53	15.00	
		CH 132	5660		14.66	15.00	
		CH 144	5720		14.66	15.00	
	802.11n-HT40	CH 102	5510	MCS0	14.66	15.00	85.62
CH 110		5550	14.31		15.00		
CH 134		5670	14.54		15.00		
CH 142		5710	14.61		15.00		
802.11ac-VHT20	CH 100	5500	MCS0	14.44	15.00	92.23	
	CH 116	5580		14.60	15.00		
	CH 132	5660		14.57	15.00		
	CH 144	5720		14.62	15.00		
802.11ac-VHT40	CH 102	5510	MCS0	14.57	15.00	87.01	
	CH 110	5550		14.67	15.00		
	CH 134	5670		14.57	15.00		
	CH 142	5710		14.65	15.00		
802.11ac-VHT80	CH 106	5530	MCS0	14.09	14.50	75.93	
	CH 138	5690		14.14	14.50		

5.8GHz WLAN ANT 1+2	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a	CH 149	5745	MCS0	14.78	15.00	93.58
		CH 157	5785		14.93	15.00	
		CH 165	5825		14.82	15.00	
	802.11n-HT20	CH 149	5745	MCS0	14.66	15.00	93.20
		CH 157	5785		14.66	15.00	
		CH 165	5825		14.84	15.00	
	802.11n-HT40	CH 151	5755	MCS0	14.86	15.00	86.84
		CH 159	5795		14.65	15.00	
	802.11ac-VHT20	CH 149	5745	MCS0	14.68	15.00	93.20
		CH 157	5785		14.66	15.00	
		CH 165	5825		14.85	15.00	
	802.11ac-VHT40	CH 151	5755	MCS0	14.83	15.00	87.01
		CH 159	5795		14.86	15.00	
802.11ac-VHT80	CH 155	5775	MCS0	14.41	14.50	75.93	



<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The duty factor is selected theoretical 83.3% perform Bluetooth SAR testing.

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
EDR	CH 00	2402	7.16	6.33	6.45
	CH 39	2441	8.99	7.98	8.00
	CH 78	2480	8.31	7.65	7.65
Tune-up Limit			9	8	8

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	1.89
	CH 19	2440	4.18
	CH 39	2480	3.92
Tune-up Limit			4.5



<SAR test exclusion able>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	GSM 850	GSM 1900	WCDMA Band V	WCDMA Band IV	WCDMA Band II	CDMA BC10	CDMA BC0	CDMA BC1	LTE Band 17	LTE Band 13	LTE Band 5	LTE Band 4	LTE Band 2	LTE Band 25
	Calculated Frequency	848MHz	1909MHz	846MHz	1750MHz	1907MHz	846MHz	848MHz	1907MHz	713MHz	784MHz	848MHz	1754MHz	1909MHz	1914MHz
	Maximum power (dBm)	27.0	24.0	24.0	24.0	24.0	24.5	24.5	24.5	24.0	24.0	24.0	24.0	24.0	24.0
	Maximum rated power(mW)	501.0	251.0	251.0	251.0	251.0	282.0	282.0	282.0	251.0	251.0	251.0	251.0	251.0	251.0
Bottom Face	Separation distance(mm)	5.0													
	exclusion threshold	92.3	69.4	46.2	66.4	69.3	51.9	51.9	77.9	42.4	44.5	46.2	66.5	69.4	69.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0													
	exclusion threshold	92.3	69.4	46.2	66.4	69.3	51.9	51.9	77.9	42.4	44.5	46.2	66.5	69.4	69.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	132.0													
	exclusion threshold	626.0	929.0	626.0	933.0	929.0	626.0	626.0	929.0	567.0	598.0	626.0	933.0	929.0	928.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 3	Separation distance(mm)	135.0													
	exclusion threshold	643.0	959.0	642.0	963.0	959.0	642.0	643.0	959.0	582.0	614.0	643.0	963.0	959.0	958.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	42.0													
	exclusion threshold	11.0	8.3	5.5	7.9	8.3	6.2	6.2	9.3	5.1	5.3	5.5	7.9	8.3	8.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes



Exposure Position	Wireless Interface	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
	Calculated Frequency	2462MHz	2462MHz	5825MHz	5825MHz
	Maximum power (dBm)	15.5	15.5	12.0	15.0
	Maximum rated power(mW)	35.0	35.0	16.0	32.0
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	11.0	11.0	7.7	15.5
	Testing required?	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	19.0	101.0	19.0	101.0
	exclusion threshold	2.9	606.0	2.0	572.0
	Testing required?	No	No	No	No
Edge 2	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	11.0	11.0	7.7	15.5
	Testing required?	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	120.0	38.0	120.0	38.0
	exclusion threshold	796.0	1.5	762.0	2.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	222.0	222.0	222.0	222.0
	exclusion threshold	1816.0	1816.0	1782.0	1782.0
	Testing required?	No	No	No	No



13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in normal mode was performed; 12mm for bottom face, 14mm for edge1

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EDGE (4Tx slots) for GSM850/GSM1900 is considered as the primary mode when the power reduction is active, the GPRS (2Tx slots) for GSM850, the EDGE (4Tx slots) for GSM1900 is considered as the primary mode when the power reduction is inactive.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

CMDA Note:

1. Per KDB 941225 D01v03r01, when in Body SAR testing, the EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, for U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio < 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



13.1 Body SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	EDGE (4 Tx slots)	Bottom Face	0mm	ON	128	824.2	20.74	21.00	1.062	-0.15	0.404	0.429
	GSM850	EDGE (4 Tx slots)	Edge 1	0mm	ON	128	824.2	20.74	21.00	1.062	-0.18	0.309	0.328
	GSM850	GPRS (2 Tx slots)	Bottom Face	12mm	OFF	128	824.2	31.92	33.00	1.282	-0.19	0.744	0.954
	GSM850	GPRS (2 Tx slots)	Bottom Face	12mm	OFF	189	836.4	31.88	33.00	1.294	-0.15	0.770	0.997
01	GSM850	GPRS (2 Tx slots)	Bottom Face	12mm	OFF	251	848.8	31.84	33.00	1.306	-0.16	0.788	1.029
	GSM850	GPRS (2 Tx slots)	Edge 1	14mm	OFF	128	824.2	31.92	33.00	1.282	-0.03	0.374	0.480
	GSM850	GPRS (2 Tx slots)	Edge 4	0mm	OFF	128	824.2	31.92	33.00	1.282	0.01	0.606	0.777
	GSM1900	EDGE (4 Tx slots)	Bottom Face	0mm	ON	512	1850.2	17.80	19.00	1.318	-0.1	0.456	0.601
02	GSM1900	EDGE (4 Tx slots)	Bottom Face	0mm	ON	661	1880	17.76	19.00	1.330	-0.11	0.489	0.651
	GSM1900	EDGE (4 Tx slots)	Bottom Face	0mm	ON	810	1909.8	17.73	19.00	1.340	-0.14	0.458	0.614
	GSM1900	EDGE (4 Tx slots)	Edge 1	0mm	ON	512	1850.2	17.80	19.00	1.318	-0.15	0.438	0.577
	GSM1900	EDGE (4 Tx slots)	Bottom Face	12mm	OFF	512	1850.2	25.50	27.00	1.413	-0.18	0.425	0.600
	GSM1900	EDGE (4 Tx slots)	Edge 1	14mm	OFF	512	1850.2	25.50	27.00	1.413	0.1	0.246	0.347
	GSM1900	EDGE (4 Tx slots)	Edge 4	0mm	OFF	512	1850.2	25.50	27.00	1.413	0.04	0.094	0.133

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9538	1907.6	15.58	16.00	1.102	-0.16	1.010	1.113
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9262	1852.4	15.27	16.00	1.183	-0.14	0.821	0.971
03	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9400	1880	15.07	16.00	1.239	-0.16	0.950	1.177
	WCDMA II	RMC 12.2Kbps	Edge 1	0mm	ON	9538	1907.6	15.58	16.00	1.102	0.17	0.699	0.770
	WCDMA II	RMC 12.2Kbps	Bottom Face	12mm	OFF	9538	1907.6	23.00	24.00	1.259	-0.12	0.726	0.914
	WCDMA II	RMC 12.2Kbps	Bottom Face	12mm	OFF	9262	1852.4	22.84	24.00	1.306	-0.1	0.670	0.875
	WCDMA II	RMC 12.2Kbps	Bottom Face	12mm	OFF	9400	1880	22.92	24.00	1.282	-0.01	0.704	0.903
	WCDMA II	RMC 12.2Kbps	Edge 1	14mm	OFF	9538	1907.6	23.00	24.00	1.259	0.11	0.572	0.720
	WCDMA II	RMC 12.2Kbps	Edge 4	0mm	OFF	9538	1907.6	23.00	24.00	1.259	-0.01	0.228	0.287
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	ON	1312	1712.4	14.80	15.00	1.047	-0.1	0.350	0.366
	WCDMA IV	RMC 12.2Kbps	Edge 1	0mm	ON	1312	1712.4	14.80	15.00	1.047	-0.17	0.347	0.363
	WCDMA IV	RMC 12.2Kbps	Bottom Face	12mm	OFF	1413	1732.6	23.00	24.00	1.259	-0.08	0.384	0.483
	WCDMA IV	RMC 12.2Kbps	Bottom Face	12mm	OFF	1312	1712.4	22.96	24.00	1.271	-0.06	0.388	0.493
04	WCDMA IV	RMC 12.2Kbps	Bottom Face	12mm	OFF	1513	1752.6	22.92	24.00	1.282	-0.15	0.449	0.576
	WCDMA IV	RMC 12.2Kbps	Edge 1	14mm	OFF	1413	1732.6	23.00	24.00	1.259	0	0.294	0.370
	WCDMA IV	RMC 12.2Kbps	Edge 4	0mm	OFF	1413	1732.6	23.00	24.00	1.259	0.09	0.138	0.174
05	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4132	826.4	17.78	18.00	1.052	-0.16	0.580	0.610
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4182	836.4	17.67	18.00	1.079	-0.1	0.551	0.594
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	17.66	18.00	1.081	-0.11	0.541	0.585
	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	ON	4132	826.4	17.78	18.00	1.052	0.03	0.485	0.510
	WCDMA V	RMC 12.2Kbps	Bottom Face	12mm	OFF	4132	826.4	22.91	24.00	1.285	-0.17	0.360	0.463
	WCDMA V	RMC 12.2Kbps	Edge 1	14mm	OFF	4132	826.4	22.91	24.00	1.285	0.01	0.206	0.265
	WCDMA V	RMC 12.2Kbps	Edge 4	0mm	OFF	4132	826.4	22.91	24.00	1.285	0.01	0.333	0.428



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	384	836.52	17.31	17.50	1.045	-0.11	0.514	0.537
	CDMA BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	1013	824.7	17.23	17.50	1.064	-0.02	0.448	0.477
06	CDMA BC0	RTAP 153.6Kbps	Bottom Face	0mm	ON	777	848.31	17.27	17.50	1.054	-0.18	0.513	0.541
	CDMA BC0	RTAP 153.6Kbps	Edge 1	0mm	ON	384	836.52	17.31	17.50	1.045	0.03	0.451	0.471
	CDMA BC0	RTAP 153.6Kbps	Bottom Face	12mm	OFF	384	836.52	23.72	24.50	1.197	-0.1	0.397	0.475
	CDMA BC0	RTAP 153.6Kbps	Edge 1	14mm	OFF	384	836.52	23.72	24.50	1.197	0.07	0.267	0.320
	CDMA BC0	RTAP 153.6Kbps	Edge 4	0mm	OFF	384	836.52	23.72	24.50	1.197	-0.1	0.338	0.404
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	0mm	ON	1175	1908.75	14.87	15.50	1.156	-0.12	0.660	0.763
	CDMA BC1	RTAP 153.6Kbps	Edge 1	0mm	ON	1175	1908.75	14.87	15.50	1.156	-0.09	0.575	0.665
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	12mm	OFF	1175	1908.75	23.91	24.50	1.146	-0.06	0.956	1.095
	CDMA BC1	RTAP 153.6Kbps	Bottom Face	12mm	OFF	25	1851.25	23.79	24.50	1.178	-0.09	0.903	1.063
07	CDMA BC1	RTAP 153.6Kbps	Bottom Face	12mm	OFF	600	1880	23.82	24.50	1.169	-0.06	0.962	1.125
	CDMA BC1	RTAP 153.6Kbps	Edge 1	14mm	OFF	1175	1908.75	23.91	24.50	1.146	-0.05	0.622	0.713
	CDMA BC1	RTAP 153.6Kbps	Edge 4	0mm	OFF	1175	1908.75	23.91	24.50	1.146	-0.01	0.253	0.290
08	CDMA BC10	RTAP 153.6Kbps	Bottom Face	0mm	ON	476	817.9	17.25	17.50	1.059	-0.15	0.568	0.602
	CDMA BC10	RTAP 153.6Kbps	Edge 1	0mm	ON	476	817.9	17.25	17.50	1.059	0.04	0.405	0.429
	CDMA BC10	RTAP 153.6Kbps	Bottom Face	12mm	OFF	580	820.5	23.67	24.50	1.211	-0.09	0.419	0.507
	CDMA BC10	RTAP 153.6Kbps	Edge 1	14mm	OFF	580	820.5	23.67	24.50	1.211	0.03	0.241	0.292
	CDMA BC10	RTAP 153.6Kbps	Edge 4	0mm	OFF	580	820.5	23.67	24.50	1.211	-0.07	0.385	0.466



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	99	Bottom Face	0mm	ON	19100	1900	14.47	15.00	1.130	-0.19	1.090	1.231
	LTE Band 2	20M	QPSK	1	49	Bottom Face	0mm	ON	18700	1860	13.89	15.00	1.291	-0.11	0.564	0.728
	LTE Band 2	20M	QPSK	1	99	Bottom Face	0mm	ON	18900	1880	14.34	15.00	1.164	-0.1	0.839	0.977
	LTE Band 2	20M	QPSK	50	50	Bottom Face	0mm	ON	18900	1880	14.13	15.00	1.222	-0.1	1.010	1.234
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0mm	ON	18700	1860	14.06	15.00	1.242	-0.1	0.719	0.893
	LTE Band 2	20M	QPSK	50	0	Bottom Face	0mm	ON	19100	1900	13.98	15.00	1.265	-0.14	0.707	0.894
09	LTE Band 2	20M	QPSK	100	0	Bottom Face	0mm	ON	18900	1880	13.86	15.00	1.300	-0.16	0.979	1.273
	LTE Band 2	20M	QPSK	1	99	Edge 1	0mm	ON	19100	1900	14.47	15.00	1.130	0.07	0.760	0.859
	LTE Band 2	20M	QPSK	1	49	Edge 1	0mm	ON	18700	1860	13.89	15.00	1.291	0.12	0.476	0.615
	LTE Band 2	20M	QPSK	1	99	Edge 1	0mm	ON	18900	1880	14.34	15.00	1.164	0.08	0.621	0.723
	LTE Band 2	20M	QPSK	50	50	Edge 1	0mm	ON	18900	1880	14.13	15.00	1.222	0.13	0.628	0.767
	LTE Band 2	20M	QPSK	100	0	Edge 1	0mm	ON	18900	1880	13.86	15.00	1.300	-0.08	0.596	0.775
	LTE Band 2	20M	QPSK	1	0	Bottom Face	12mm	OFF	19100	1900	23.26	24.00	1.186	-0.15	0.890	1.055
	LTE Band 2	20M	QPSK	1	0	Bottom Face	12mm	OFF	18700	1860	23.22	24.00	1.197	-0.13	0.849	1.016
	LTE Band 2	20M	QPSK	1	0	Bottom Face	12mm	OFF	18900	1880	23.15	24.00	1.216	0.15	0.924	1.124
	LTE Band 2	20M	QPSK	50	0	Bottom Face	12mm	OFF	19100	1900	22.20	23.00	1.202	-0.16	0.680	0.818
	LTE Band 2	20M	QPSK	50	0	Bottom Face	12mm	OFF	18700	1860	22.10	23.00	1.230	-0.16	0.697	0.857
	LTE Band 2	20M	QPSK	50	0	Bottom Face	12mm	OFF	18900	1880	22.14	23.00	1.219	-0.19	0.693	0.845
	LTE Band 2	20M	QPSK	100	0	Bottom Face	12mm	OFF	19100	1900	22.24	23.00	1.191	-0.18	0.688	0.820
	LTE Band 2	20M	QPSK	1	0	Edge 1	14mm	OFF	19100	1900	23.26	24.00	1.186	0.08	0.713	0.845
	LTE Band 2	20M	QPSK	1	0	Edge 1	14mm	OFF	18700	1860	23.22	24.00	1.197	0.11	0.619	0.741
	LTE Band 2	20M	QPSK	1	0	Edge 1	14mm	OFF	18900	1880	23.15	24.00	1.216	0.08	0.690	0.839
	LTE Band 2	20M	QPSK	50	0	Edge 1	14mm	OFF	19100	1900	22.20	23.00	1.202	0.1	0.548	0.659
	LTE Band 2	20M	QPSK	100	0	Edge 1	14mm	OFF	19100	1900	22.24	23.00	1.191	0.14	0.546	0.650
	LTE Band 2	20M	QPSK	1	0	Edge 4	0mm	OFF	19100	1900	23.26	24.00	1.186	-0.07	0.282	0.334
	LTE Band 2	20M	QPSK	50	0	Edge 4	0mm	OFF	19100	1900	22.20	23.00	1.202	0	0.219	0.263
10	LTE Band 4	20M	QPSK	1	0	Bottom Face	0mm	ON	20175	1732.5	13.94	14.50	1.138	-0.17	0.509	0.579
	LTE Band 4	20M	QPSK	50	0	Bottom Face	0mm	ON	20175	1732.5	13.79	14.50	1.178	-0.15	0.426	0.502
	LTE Band 4	20M	QPSK	1	0	Edge 1	0mm	ON	20175	1732.5	13.94	14.50	1.138	0.07	0.474	0.539
	LTE Band 4	20M	QPSK	50	0	Edge 1	0mm	ON	20175	1732.5	13.79	14.50	1.178	-0.04	0.410	0.483
	LTE Band 4	20M	QPSK	1	0	Bottom Face	12mm	OFF	20175	1732.5	22.93	24.00	1.279	-0.07	0.371	0.475
	LTE Band 4	20M	QPSK	50	0	Bottom Face	12mm	OFF	20175	1732.5	22.08	23.00	1.236	-0.11	0.382	0.472
	LTE Band 4	20M	QPSK	1	0	Edge 1	14mm	OFF	20175	1732.5	22.93	24.00	1.279	0.17	0.306	0.391
	LTE Band 4	20M	QPSK	50	0	Edge 1	14mm	OFF	20175	1732.5	22.08	23.00	1.236	-0.01	0.304	0.376
	LTE Band 4	20M	QPSK	1	0	Edge 4	0mm	OFF	20175	1732.5	22.93	24.00	1.279	-0.12	0.169	0.216
	LTE Band 4	20M	QPSK	50	0	Edge 4	0mm	OFF	20175	1732.5	22.08	23.00	1.236	-0.08	0.136	0.168
11	LTE Band 5	10M	QPSK	1	25	Bottom Face	0mm	ON	20525	836.5	15.83	17.00	1.309	-0.11	0.623	0.816
	LTE Band 5	10M	QPSK	25	25	Bottom Face	0mm	ON	20525	836.5	15.99	17.00	1.262	-0.15	0.612	0.772
	LTE Band 5	10M	QPSK	50	0	Bottom Face	0mm	ON	20525	836.5	15.92	17.00	1.282	-0.15	0.601	0.771
	LTE Band 5	10M	QPSK	1	25	Edge 1	0mm	ON	20525	836.5	15.83	17.00	1.309	0.04	0.580	0.759
	LTE Band 5	10M	QPSK	25	25	Edge 1	0mm	ON	20525	836.5	15.99	17.00	1.262	-0.17	0.450	0.568
	LTE Band 5	10M	QPSK	1	0	Bottom Face	12mm	OFF	20525	836.5	22.61	24.00	1.377	-0.13	0.442	0.609
	LTE Band 5	10M	QPSK	25	0	Bottom Face	12mm	OFF	20525	836.5	21.66	23.00	1.361	-0.15	0.346	0.471
	LTE Band 5	10M	QPSK	1	0	Edge 1	14mm	OFF	20525	836.5	22.61	24.00	1.377	0.08	0.263	0.362
	LTE Band 5	10M	QPSK	25	0	Edge 1	14mm	OFF	20525	836.5	21.66	23.00	1.361	0.11	0.209	0.285
	LTE Band 5	10M	QPSK	1	0	Edge 4	0mm	OFF	20525	836.5	22.61	24.00	1.377	-0.08	0.389	0.536
	LTE Band 5	10M	QPSK	25	0	Edge 4	0mm	OFF	20525	836.5	21.66	23.00	1.361	-0.01	0.308	0.419



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	LTE Band 13	10M	QPSK	1	25	Bottom Face	0mm	ON	23230	782	17.30	18.00	1.175	-0.1	0.645	0.758
	LTE Band 13	10M	QPSK	25	12	Bottom Face	0mm	ON	23230	782	17.36	18.00	1.159	-0.11	0.643	0.745
	LTE Band 13	10M	QPSK	1	25	Edge 1	0mm	ON	23230	782	17.30	18.00	1.175	-0.11	0.352	0.414
	LTE Band 13	10M	QPSK	25	12	Edge 1	0mm	ON	23230	782	17.36	18.00	1.159	-0.14	0.353	0.409
	LTE Band 13	10M	QPSK	1	0	Bottom Face	12mm	OFF	23230	782	22.76	24.00	1.330	-0.07	0.392	0.522
	LTE Band 13	10M	QPSK	25	0	Bottom Face	12mm	OFF	23230	782	21.74	23.00	1.337	-0.14	0.414	0.553
	LTE Band 13	10M	QPSK	1	0	Edge 1	14mm	OFF	23230	782	22.76	24.00	1.330	0.03	0.130	0.173
	LTE Band 13	10M	QPSK	25	0	Edge 1	14mm	OFF	23230	782	21.74	23.00	1.337	-0.03	0.119	0.159
	LTE Band 13	10M	QPSK	1	0	Edge 4	0mm	OFF	23230	782	22.76	24.00	1.330	-0.09	0.356	0.474
	LTE Band 13	10M	QPSK	25	0	Edge 4	0mm	OFF	23230	782	21.74	23.00	1.337	-0.14	0.313	0.418
13	LTE Band 17	10M	QPSK	1	25	Bottom Face	0mm	ON	23790	710	14.65	15.50	1.216	0	0.341	0.415
	LTE Band 17	10M	QPSK	25	12	Bottom Face	0mm	ON	23790	710	14.58	15.50	1.236	-0.13	0.335	0.414
	LTE Band 17	10M	QPSK	1	25	Edge 1	0mm	ON	23790	710	14.65	15.50	1.216	-0.19	0.183	0.223
	LTE Band 17	10M	QPSK	25	12	Edge 1	0mm	ON	23790	710	14.58	15.50	1.236	-0.12	0.180	0.222
	LTE Band 17	10M	QPSK	1	0	Bottom Face	12mm	OFF	23790	710	22.73	24.00	1.340	-0.14	0.292	0.391
	LTE Band 17	10M	QPSK	25	0	Bottom Face	12mm	OFF	23790	710	21.77	23.00	1.327	-0.15	0.238	0.316
	LTE Band 17	10M	QPSK	1	0	Edge 1	14mm	OFF	23790	710	22.73	24.00	1.340	-0.11	0.084	0.113
	LTE Band 17	10M	QPSK	25	0	Edge 1	14mm	OFF	23790	710	21.77	23.00	1.327	-0.06	0.068	0.090
	LTE Band 17	10M	QPSK	1	0	Edge 4	0mm	OFF	23790	710	22.73	24.00	1.340	0.05	0.296	0.397
	LTE Band 17	10M	QPSK	25	0	Edge 4	0mm	OFF	23790	710	21.77	23.00	1.327	0.01	0.246	0.327
	LTE Band 25	20M	QPSK	1	99	Bottom Face	0mm	ON	26340	1880	14.31	14.50	1.045	-0.11	0.701	0.732
	LTE Band 25	20M	QPSK	50	50	Bottom Face	0mm	ON	26590	1905	13.88	14.50	1.153	-0.13	0.865	0.998
	LTE Band 25	20M	QPSK	50	24	Bottom Face	0mm	ON	26140	1860	13.85	14.50	1.161	-0.13	0.588	0.683
	LTE Band 25	20M	QPSK	50	50	Bottom Face	0mm	ON	26340	1880	13.82	14.50	1.169	-0.04	0.959	1.122
	LTE Band 25	20M	QPSK	100	0	Bottom Face	0mm	ON	26340	1880	13.71	14.50	1.199	-0.12	0.887	1.064
	LTE Band 25	20M	QPSK	1	99	Edge 1	0mm	ON	26340	1880	14.31	14.50	1.045	0.09	0.607	0.634
	LTE Band 25	20M	QPSK	50	50	Edge 1	0mm	ON	26590	1905	13.88	14.50	1.153	0.12	0.667	0.769
	LTE Band 25	20M	QPSK	1	0	Bottom Face	12mm	OFF	26590	1905	23.14	24.00	1.219	-0.11	0.917	1.118
	LTE Band 25	20M	QPSK	1	0	Bottom Face	12mm	OFF	26140	1860	23.01	24.00	1.256	-0.12	0.835	1.049
14	LTE Band 25	20M	QPSK	1	0	Bottom Face	12mm	OFF	26340	1880	23.02	24.00	1.253	-0.18	0.898	1.125
	LTE Band 25	20M	QPSK	50	0	Bottom Face	12mm	OFF	26590	1905	22.17	23.00	1.211	-0.12	0.692	0.838
	LTE Band 25	20M	QPSK	50	0	Bottom Face	12mm	OFF	26140	1860	22.10	23.00	1.230	-0.16	0.676	0.832
	LTE Band 25	20M	QPSK	50	0	Bottom Face	12mm	OFF	26340	1880	22.07	23.00	1.239	-0.1	0.689	0.854
	LTE Band 25	20M	QPSK	100	0	Bottom Face	12mm	OFF	26590	1905	22.12	23.00	1.225	-0.14	0.703	0.861
	LTE Band 25	20M	QPSK	1	0	Edge 1	14mm	OFF	26590	1905	23.14	24.00	1.219	0.02	0.697	0.850
	LTE Band 25	20M	QPSK	1	0	Edge 1	14mm	OFF	26140	1860	23.01	24.00	1.256	0.07	0.547	0.687
	LTE Band 25	20M	QPSK	1	0	Edge 1	14mm	OFF	26340	1880	23.02	24.00	1.253	0	0.647	0.811
	LTE Band 25	20M	QPSK	50	0	Edge 1	14mm	OFF	26590	1905	22.17	23.00	1.211	0.04	0.540	0.654
	LTE Band 25	20M	QPSK	100	0	Edge 1	14mm	OFF	26590	1905	22.12	23.00	1.225	0.09	0.538	0.659
	LTE Band 25	20M	QPSK	1	0	Edge 4	0mm	OFF	26590	1905	23.14	24.00	1.219	-0.04	0.201	0.245
	LTE Band 25	20M	QPSK	50	0	Edge 4	0mm	OFF	26590	1905	22.17	23.00	1.211	-0.05	0.156	0.189



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Antenna	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	6	Ant 1	2437	15.46	15.50	1.009	98.62	1.014	0.09	0.663	0.679
	WLAN2.4GHz	802.11b 1Mbps	Edge 2	0mm	6	Ant 1	2437	15.46	15.50	1.009	98.62	1.014	-0.09	0.527	0.539
15	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	6	Ant 2	2437	15.44	15.50	1.014	98.62	1.014	0.12	0.843	0.867
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	1	Ant 2	2412	15.44	15.50	1.014	98.62	1.014	0.13	0.657	0.675
	WLAN2.4GHz	802.11b 1Mbps	Edge 2	0mm	6	Ant 2	2437	15.44	15.50	1.014	98.62	1.014	0.16	0.496	0.510
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	54	Ant 1	5270	11.35	11.50	1.034	86.84	1.152	0.01	0.542	0.646
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	54	Ant 1	5270	11.35	11.50	1.034	86.84	1.152	0.1	0.963	1.148
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	62	Ant 1	5310	11.32	11.50	1.042	86.84	1.152	0.03	0.955	1.146
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	54	Ant 2	5270	14.99	15.00	1.001	87.01	1.149	-0.16	0.851	0.979
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	64	Ant 2	5320	14.98	15.00	1.005	92.73	1.078	0.13	0.808	0.875
16	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	54	Ant 2	5270	14.99	15.00	1.001	87.01	1.149	-0.08	1.000	1.151
	WLAN5GHz	802.11a 6Mbps	Edge 2	0mm	64	Ant 2	5320	14.98	15.00	1.005	92.73	1.078	0.07	0.955	1.035
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	102	Ant 1	5510	11.94	12.00	1.014	86.84	1.152	0.07	0.515	0.602
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	102	Ant 1	5510	11.94	12.00	1.014	86.84	1.152	0.09	0.935	1.092
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	110	Ant 1	5550	11.83	12.00	1.040	86.84	1.152	-0.07	0.847	1.015
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	134	Ant 2	5670	13.93	14.00	1.016	87.01	1.149	0.04	0.563	0.657
17	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	134	Ant 2	5670	13.93	14.00	1.016	87.01	1.149	0.13	0.981	1.145
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	110	Ant 2	5550	13.82	14.00	1.042	87.01	1.149	0.14	0.755	0.904
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	159	Ant 1	5795	11.92	12.00	1.018	86.84	1.152	0.04	0.331	0.388
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	159	Ant 1	5795	11.92	12.00	1.018	86.84	1.152	0	0.832	0.976
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	151	Ant 1	5755	11.90	12.00	1.023	86.84	1.152	-0.01	0.971	1.144
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	159	Ant 2	5795	12.95	13.00	1.011	87.01	1.149	-0.01	0.559	0.649
18	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	159	Ant 2	5795	12.95	13.00	1.011	87.01	1.149	-0.18	0.988	1.147
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	151	Ant 2	5755	12.86	13.00	1.032	87.01	1.149	0.01	0.838	0.993

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
19	Bluetooth	1Mbps	Bottom Face	0mm	39	2441	8.99	9.00	1.002	-0.14	0.209	0.209
	Bluetooth	1Mbps	Bottom Face	0mm	0	2402	7.16	9.00	1.528	-0.11	0.131	0.200
	Bluetooth	1Mbps	Bottom Face	0mm	78	2480	8.31	9.00	1.172	-0.1	0.168	0.197
	Bluetooth	1Mbps	Edge 2	0mm	39	2441	8.99	9.00	1.002	-0.11	0.133	0.133



13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9538	1907.6	15.58	16.00	1.102	-	-	-0.16	1.010	-	1.113
2nd	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9538	1907.6	15.58	16.00	1.102	-	-	-0.16	0.979	1.03	1.078
1st	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	-	6	2437	15.44	15.50	1.014	98.62	1.014	0.12	0.843	-	0.867
2nd	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	-	6	2437	15.44	15.50	1.014	98.62	1.014	0.01	0.828	1.02	0.851
1st	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	-	54	5270	14.99	15.00	1.001	87.01	1.149	-0.08	1.000	-	1.151
2nd	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	-	54	5270	14.99	15.00	1.001	87.01	1.149	-0.19	0.995	1.01	1.145
1st	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	-	134	5670	13.93	14.00	1.016	87.01	1.149	0.13	0.981	-	1.145
2nd	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	-	134	5670	13.93	14.00	1.016	87.01	1.149	0.04	0.967	1.01	1.129
1st	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	-	159	5795	12.95	13.00	1.011	87.01	1.149	-0.18	0.988	-	1.147
2nd	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	-	159	5795	12.95	13.00	1.011	87.01	1.149	0.03	0.982	1.01	1.140

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Tablet
		Body
1.	GPRS/EDGE + WLAN2.4GHz	Yes
2.	WCDMA + WLAN2.4GHz	Yes
3.	LTE + WLAN2.4GHz	Yes
4.	GPRS/EDGE + Bluetooth	Yes
5.	WCDMA+ Bluetooth	Yes
6.	LTE + Bluetooth	Yes
7.	GPRS/EDGE + WLAN5GHz	Yes
8.	WCDMA + WLAN5GHz	Yes
9.	LTE + WLAN5GHz	Yes

General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation; therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
3. WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
4. For simultaneous transmission analysis for exposure position of edge1 14mm and bottom face12mm, WLAN SAR tested at 0mm separation is worse and the test data is used for conservative SAR summation.
5. WLAN and Bluetooth cannot transmit simultaneously.
6. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
7. The Scaled SAR summation is calculated based on the same configuration and test position.
8. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 14.2.



14.1 Body Exposure Conditions

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	2+3 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM	GSM850	Bottom Face at 0mm	0.429	0.679	0.867	1.108	1.296	1.546	1.975	0.02	Case 1
		Edge 1 at 0mm	0.328			0.328	0.328	0.000	0.328		
		Bottom Face at 12mm	1.029	0.679	0.867	1.708	1.896	1.546	2.575	0.02	Case 2
		Edge 1 at 14mm	0.480			0.480	0.480	0.000	0.480		
	Edge 4 at 0mm	0.777			0.777	0.777	0.000	0.777			
	GSM1900	Bottom Face at 0mm	0.651	0.679	0.867	1.330	1.518	1.546	2.197	0.02	Case 3
		Edge 1 at 0mm	0.577			0.577	0.577	0.000	0.577		
		Bottom Face at 12mm	0.600	0.679	0.867	1.279	1.467	1.546	2.146	0.02	Case 4
Edge 1 at 14mm		0.347			0.347	0.347	0.000	0.347			
Edge 4 at 0mm	0.133			0.133	0.133	0.000	0.133				
WCDMA	WCDMA II	Bottom Face at 0mm	1.177	0.679	0.867	1.856	2.044	1.546	2.723	0.02	Case 5
		Edge 1 at 0mm	0.770			0.770	0.770	0.000	0.770		
		Bottom Face at 12mm	0.914	0.679	0.867	1.593	1.781	1.546	2.460	0.02	Case 6
		Edge 1 at 14mm	0.720			0.720	0.720	0.000	0.720		
		Edge 4 at 0mm	0.287			0.287	0.287	0.000	0.287		
	WCDMA IV	Bottom Face at 0mm	0.366	0.679	0.867	1.045	1.233	1.546	1.912	0.02	Case 7
		Edge 1 at 0mm	0.363			0.363	0.363	0.000	0.363		
		Bottom Face at 12mm	0.576	0.679	0.867	1.255	1.443	1.546	2.122	0.02	Case 8
		Edge 1 at 14mm	0.370			0.370	0.370	0.000	0.370		
	Edge 4 at 0mm	0.174			0.174	0.174	0.000	0.174			
	WCDMA V	Bottom Face at 0mm	0.610	0.679	0.867	1.289	1.477	1.546	2.156	0.02	Case 9
		Edge 1 at 0mm	0.510			0.510	0.510	0.000	0.510		
Bottom Face at 12mm		0.463	0.679	0.867	1.142	1.330	1.546	2.009	0.02	Case 10	
Edge 1 at 14mm		0.265			0.265	0.265	0.000	0.265			
Edge 4 at 0mm		0.428			0.428	0.428	0.000	0.428			
CDMA	CDMA BC0	Bottom Face at 0mm	0.541	0.679	0.867	1.220	1.408	1.546	2.087	0.02	Case 11
		Edge 1 at 0mm	0.471			0.471	0.471	0.000	0.471		
		Bottom Face at 12mm	0.475	0.679	0.867	1.154	1.342	1.546	2.021	0.02	Case 12
		Edge 1 at 14mm	0.320			0.320	0.320	0.000	0.320		
	Edge 4 at 0mm	0.404			0.404	0.404	0.000	0.404			
	CDMA BC1	Bottom Face at 0mm	0.763	0.679	0.867	1.442	1.630	1.546	2.309	0.02	Case 13
		Edge 1 at 0mm	0.665			0.665	0.665	0.000	0.665		
		Bottom Face at 12mm	1.125	0.679	0.867	1.804	1.992	1.546	2.671	0.02	Case 14
		Edge 1 at 14mm	0.713			0.713	0.713	0.000	0.713		
	Edge 4 at 0mm	0.290			0.290	0.290	0.000	0.290			
	CDMA BC10	Bottom Face at 0mm	0.602	0.679	0.867	1.281	1.469	1.546	2.148	0.02	Case 15
		Edge 1 at 0mm	0.429			0.429	0.429	0.000	0.429		
		Bottom Face at 12mm	0.507	0.679	0.867	1.186	1.374	1.546	2.053	0.02	Case 16
		Edge 1 at 14mm	0.292			0.292	0.292	0.000	0.292		
	Edge 4 at 0mm	0.466			0.466	0.466	0.000	0.466			



WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	2+3 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
LTE	LTE Band 2	Bottom Face at 0mm	1.273	0.679	0.867	1.952	2.140	1.546	2.819	0.02	Case 17
		Edge 1 at 0mm	0.859			0.859	0.859	0.000	0.859		
		Bottom Face at 12mm	1.124	0.679	0.867	1.803	1.991	1.546	2.670	0.02	Case 18
		Edge 1 at 14mm	0.845			0.845	0.845	0.000	0.845		
		Edge 4 at 0mm	0.334			0.334	0.334	0.000	0.334		
	LTE Band 4	Bottom Face at 0mm	0.579	0.679	0.867	1.258	1.446	1.546	2.125	0.02	Case 19
		Edge 1 at 0mm	0.539			0.539	0.539	0.000	0.539		
		Bottom Face at 12mm	0.475	0.679	0.867	1.154	1.342	1.546	2.021	0.02	Case 20
		Edge 1 at 14mm	0.391			0.391	0.391	0.000	0.391		
		Edge 4 at 0mm	0.216			0.216	0.216	0.000	0.216		
	LTE Band 5	Bottom Face at 0mm	0.816	0.679	0.867	1.495	1.683	1.546	2.362	0.02	Case 21
		Edge 1 at 0mm	0.759			0.759	0.759	0.000	0.759		
		Bottom Face at 12mm	0.609	0.679	0.867	1.288	1.476	1.546	2.155	0.02	Case 22
		Edge 1 at 14mm	0.362			0.362	0.362	0.000	0.362		
		Edge 4 at 0mm	0.536			0.536	0.536	0.000	0.536		
	LTE Band 13	Bottom Face at 0mm	0.758	0.679	0.867	1.437	1.625	1.546	2.304	0.02	Case 23
		Edge 1 at 0mm	0.414			0.414	0.414	0.000	0.414		
		Bottom Face at 12mm	0.553	0.679	0.867	1.232	1.420	1.546	2.099	0.02	Case 24
		Edge 1 at 14mm	0.173			0.173	0.173	0.000	0.173		
		Edge 4 at 0mm	0.474			0.474	0.474	0.000	0.474		
LTE Band 17	Bottom Face at 0mm	0.415	0.679	0.867	1.094	1.282	1.546	1.961	0.02	Case 25	
	Edge 1 at 0mm	0.223			0.223	0.223	0.000	0.223			
	Bottom Face at 12mm	0.391	0.679	0.867	1.070	1.258	1.546	1.937	0.02	Case 26	
	Edge 1 at 14mm	0.113			0.113	0.113	0.000	0.113			
	Edge 4 at 0mm	0.397			0.397	0.397	0.000	0.397			
LTE Band 25	Bottom Face at 0mm	1.122	0.679	0.867	1.801	1.989	1.546	2.668	0.02	Case 27	
	Edge 1 at 0mm	0.769			0.769	0.769	0.000	0.769			
	Bottom Face at 12mm	1.125	0.679	0.867	1.804	1.992	1.546	2.671	0.02	Case 28	
	Edge 1 at 14mm	0.850			0.850	0.850	0.000	0.850			
	Edge 4 at 0mm	0.245			0.245	0.245	0.000	0.245			



WWAN Band	Exposure Position	1	4	5	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	5GHz WLAN Ant 1	5GHz WLAN Ant 2							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM	GSM850	Bottom Face at 0mm	0.429	0.646	0.979	1.075	1.408	1.625	2.054	0.02	Case 29
		Edge 1 at 0mm	0.328			0.328	0.328	0.000	0.328		
		Bottom Face at 12mm	1.029	0.646	0.979	1.675	2.008	1.625	2.654	0.02	Case 30
		Edge 1 at 14mm	0.480			0.480	0.480	0.000	0.480		
		Edge 4 at 0mm	0.777			0.777	0.777	0.000	0.777		
	GSM1900	Bottom Face at 0mm	0.651	0.646	0.979	1.297	1.630	1.625	2.276	0.02	Case 31
		Edge 1 at 0mm	0.577			0.577	0.577	0.000	0.577		
		Bottom Face at 12mm	0.600	0.646	0.979	1.246	1.579	1.625	2.225	0.02	Case 32
		Edge 1 at 14mm	0.347			0.347	0.347	0.000	0.347		
		Edge 4 at 0mm	0.133			0.133	0.133	0.000	0.133		
WCDMA	WCDMA II	Bottom Face at 0mm	1.177	0.646	0.979	1.823	2.156	1.625	2.802	0.02	Case 33
		Edge 1 at 0mm	0.770			0.770	0.770	0.000	0.770		
		Bottom Face at 12mm	0.914	0.646	0.979	1.560	1.893	1.625	2.539	0.02	Case 34
		Edge 1 at 14mm	0.720			0.720	0.720	0.000	0.720		
		Edge 4 at 0mm	0.287			0.287	0.287	0.000	0.287		
	WCDMA IV	Bottom Face at 0mm	0.366	0.646	0.979	1.012	1.345	1.625	1.991	0.02	Case 35
		Edge 1 at 0mm	0.363			0.363	0.363	0.000	0.363		
		Bottom Face at 12mm	0.576	0.646	0.979	1.222	1.555	1.625	2.201	0.02	Case 36
		Edge 1 at 14mm	0.370			0.370	0.370	0.000	0.370		
	WCDMA V	Edge 4 at 0mm	0.174			0.174	0.174	0.000	0.174		
		Bottom Face at 0mm	0.610	0.646	0.979	1.256	1.589	1.625	2.235	0.02	Case 37
		Edge 1 at 0mm	0.510			0.510	0.510	0.000	0.510		
		Bottom Face at 12mm	0.463	0.646	0.979	1.109	1.442	1.625	2.088	0.02	Case 38
		Edge 1 at 14mm	0.265			0.265	0.265	0.000	0.265		
	CDMA	CDMA BC0	Edge 4 at 0mm	0.428			0.428	0.428	0.000	0.428	
Bottom Face at 0mm			0.541	0.646	0.979	1.187	1.520	1.625	2.166	0.02	Case 39
Edge 1 at 0mm			0.471			0.471	0.471	0.000	0.471		
Bottom Face at 12mm			0.475	0.646	0.979	1.121	1.454	1.625	2.100	0.02	Case 40
Edge 1 at 14mm			0.320			0.320	0.320	0.000	0.320		
CDMA BC1		Edge 4 at 0mm	0.404			0.404	0.404	0.000	0.404		
		Bottom Face at 0mm	0.763	0.646	0.979	1.409	1.742	1.625	2.388	0.02	Case 41
		Edge 1 at 0mm	0.665			0.665	0.665	0.000	0.665		
		Bottom Face at 12mm	1.125	0.646	0.979	1.771	2.104	1.625	2.750	0.02	Case 42
		Edge 1 at 14mm	0.713			0.713	0.713	0.000	0.713		
CDMA BC10		Edge 4 at 0mm	0.290			0.290	0.290	0.000	0.290		
		Bottom Face at 0mm	0.602	0.646	0.979	1.248	1.581	1.625	2.227	0.02	Case 43
		Edge 1 at 0mm	0.429			0.429	0.429	0.000	0.429		
		Bottom Face at 12mm	0.507	0.646	0.979	1.153	1.486	1.625	2.132	0.02	Case 44
		Edge 1 at 14mm	0.292			0.292	0.292	0.000	0.292		
Edge 4 at 0mm	0.466			0.466	0.466	0.000	0.466				



WWAN Band	Exposure Position	1	4	5	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	5GHz WLAN Ant 1	5GHz WLAN Ant 2							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
LTE	LTE Band 2	Bottom Face at 0mm	1.273	0.646	0.979	1.919	2.252	1.625	2.898	0.02	Case 45
		Edge 1 at 0mm	0.859			0.859	0.859	0.000	0.859		
		Bottom Face at 12mm	1.124	0.646	0.979	1.770	2.103	1.625	2.749	0.02	Case 46
		Edge 1 at 14mm	0.845			0.845	0.845	0.000	0.845		
		Edge 4 at 0mm	0.334			0.334	0.334	0.000	0.334		
	LTE Band 4	Bottom Face at 0mm	0.579	0.646	0.979	1.225	1.558	1.625	2.204	0.02	Case 47
		Edge 1 at 0mm	0.539			0.539	0.539	0.000	0.539		
		Bottom Face at 12mm	0.475	0.646	0.979	1.121	1.454	1.625	2.100	0.02	Case 48
		Edge 1 at 14mm	0.391			0.391	0.391	0.000	0.391		
		Edge 4 at 0mm	0.216			0.216	0.216	0.000	0.216		
	LTE Band 5	Bottom Face at 0mm	0.816	0.646	0.979	1.462	1.795	1.625	2.441	0.02	Case 49
		Edge 1 at 0mm	0.759			0.759	0.759	0.000	0.759		
		Bottom Face at 12mm	0.609	0.646	0.979	1.255	1.588	1.625	2.234	0.02	Case 50
		Edge 1 at 14mm	0.362			0.362	0.362	0.000	0.362		
		Edge 4 at 0mm	0.536			0.536	0.536	0.000	0.536		
	LTE Band 13	Bottom Face at 0mm	0.758	0.646	0.979	1.404	1.737	1.625	2.383	0.02	Case 51
		Edge 1 at 0mm	0.414			0.414	0.414	0.000	0.414		
		Bottom Face at 12mm	0.553	0.646	0.979	1.199	1.532	1.625	2.178	0.02	Case 52
		Edge 1 at 14mm	0.173			0.173	0.173	0.000	0.173		
		Edge 4 at 0mm	0.474			0.474	0.474	0.000	0.474		
LTE Band 17	Bottom Face at 0mm	0.415	0.646	0.979	1.061	1.394	1.625	2.040	0.02	Case 53	
	Edge 1 at 0mm	0.223			0.223	0.223	0.000	0.223			
	Bottom Face at 12mm	0.391	0.646	0.979	1.037	1.370	1.625	2.016	0.02	Case 54	
	Edge 1 at 14mm	0.113			0.113	0.113	0.000	0.113			
	Edge 4 at 0mm	0.397			0.397	0.397	0.000	0.397			
LTE Band 25	Bottom Face at 0mm	1.122	0.646	0.979	1.768	2.101	1.625	2.747	0.02	Case 55	
	Edge 1 at 0mm	0.769			0.769	0.769	0.000	0.769			
	Bottom Face at 12mm	1.125	0.646	0.979	1.771	2.104	1.625	2.750	0.02	Case 56	
	Edge 1 at 14mm	0.850			0.850	0.850	0.000	0.850			
	Edge 4 at 0mm	0.245			0.245	0.245	0.000	0.245			



WWAN Band		Exposure Position	1	6	1+6 Summed 1g SAR (W/kg)R	SPLSR	Case No
			WWAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Bottom Face at 0mm	0.429	0.209	0.638		
		Edge 1 at 0mm	0.328		0.328		
		Bottom Face at 12mm	1.029	0.209	1.238		
		Edge 1 at 14mm	0.480		0.480		
		Edge 4 at 0mm	0.777		0.777		
	GSM1900	Bottom Face at 0mm	0.651	0.209	0.860		
		Edge 1 at 0mm	0.577		0.577		
		Bottom Face at 12mm	0.600	0.209	0.809		
		Edge 1 at 14mm	0.347		0.347		
		Edge 4 at 0mm	0.133		0.133		
WCDMA	WCDMA II	Bottom Face at 0mm	1.177	0.209	1.386		
		Edge 1 at 0mm	0.770		0.770		
		Bottom Face at 12mm	0.914	0.209	1.123		
		Edge 1 at 14mm	0.720		0.720		
		Edge 4 at 0mm	0.287		0.287		
	WCDMA IV	Bottom Face at 0mm	0.366	0.209	0.575		
		Edge 1 at 0mm	0.363		0.363		
		Bottom Face at 12mm	0.576	0.209	0.785		
		Edge 1 at 14mm	0.370		0.370		
	WCDMA V	Edge 4 at 0mm	0.174		0.174		
		Bottom Face at 0mm	0.610	0.209	0.819		
		Edge 1 at 0mm	0.510		0.510		
		Bottom Face at 12mm	0.463	0.209	0.672		
		Edge 1 at 14mm	0.265		0.265		
CDMA	CDMA BC0	Edge 4 at 0mm	0.428		0.428		
		Bottom Face at 0mm	0.541	0.209	0.750		
		Edge 1 at 0mm	0.471		0.471		
		Bottom Face at 12mm	0.475	0.209	0.684		
		Edge 1 at 14mm	0.320		0.320		
	CDMA BC1	Edge 4 at 0mm	0.404		0.404		
		Bottom Face at 0mm	0.763	0.209	0.972		
		Edge 1 at 0mm	0.665		0.665		
		Bottom Face at 12mm	1.125	0.209	1.334		
		Edge 1 at 14mm	0.713		0.713		
	CDMA BC10	Edge 4 at 0mm	0.290		0.290		
		Bottom Face at 0mm	0.602	0.209	0.811		
		Edge 1 at 0mm	0.429		0.429		
Bottom Face at 12mm		0.507	0.209	0.716			
		Edge 1 at 14mm	0.292		0.292		
		Edge 4 at 0mm	0.466		0.466		



WWAN Band	Exposure Position	1	6	1+6 Summed 1g SAR (W/kg)R	SPLSR	Case No	
		WWAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)				
LTE	LTE Band 2	Bottom Face at 0mm	1.273	0.209	1.482		
		Edge 1 at 0mm	0.859		0.859		
		Bottom Face at 12mm	1.124	0.209	1.333		
		Edge 1 at 14mm	0.845		0.845		
		Edge 4 at 0mm	0.334		0.334		
	LTE Band 4	Bottom Face at 0mm	0.579	0.209	0.788		
		Edge 1 at 0mm	0.539		0.539		
		Bottom Face at 12mm	0.475	0.209	0.684		
		Edge 1 at 14mm	0.391		0.391		
		Edge 4 at 0mm	0.216		0.216		
	LTE Band 5	Bottom Face at 0mm	0.816	0.209	1.025		
		Edge 1 at 0mm	0.759		0.759		
		Bottom Face at 12mm	0.609	0.209	0.818		
		Edge 1 at 14mm	0.362		0.362		
		Edge 4 at 0mm	0.536		0.536		
	LTE Band 13	Bottom Face at 0mm	0.758	0.209	0.967		
		Edge 1 at 0mm	0.414		0.414		
		Bottom Face at 12mm	0.553	0.209	0.762		
		Edge 1 at 14mm	0.173		0.173		
		Edge 4 at 0mm	0.474		0.474		
LTE Band 17	Bottom Face at 0mm	0.415	0.209	0.624			
	Edge 1 at 0mm	0.223		0.223			
	Bottom Face at 12mm	0.391	0.209	0.600			
	Edge 1 at 14mm	0.113		0.113			
	Edge 4 at 0mm	0.397		0.397			
LTE Band 25	Bottom Face at 0mm	1.122	0.209	1.331			
	Edge 1 at 0mm	0.769		0.769			
	Bottom Face at 12mm	1.125	0.209	1.334			
	Edge 1 at 14mm	0.850		0.850			
	Edge 4 at 0mm	0.245		0.245			


Exposure Position	2	3	4	5	2+3 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 2 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 2 1g SAR (W/kg)				
Bottom Face at 0mm	0.679	0.867	0.646	0.979	1.546	1.625	0.02	Case 57
Edge 2 at 0mm	0.539	0.510	1.148	1.151	1.049	2.299	0.04	Case 58

14.2 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	GSM850	Bottom Face	0.429	0mm	6.95	-5.05	-0.12	164.2	1.108	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	GSM850		0.429	0mm	6.95	-5.05	-0.12	191.9	1.296	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

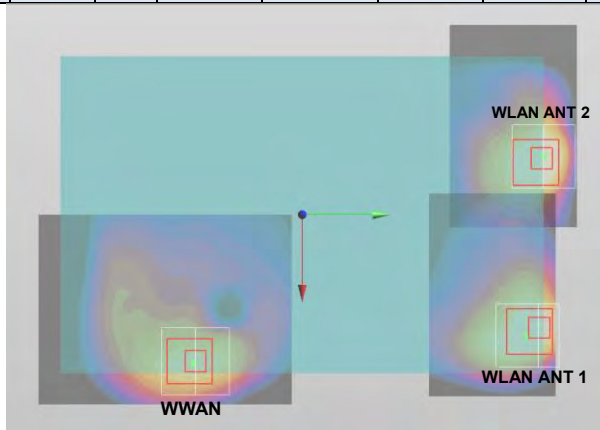


Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 2	GSM850	Bottom Face	1.029	12mm	7.1	-5.98	-0.19	173.6	1.708	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	GSM850		1.029	12mm	7.1	-5.98	-0.19	200.7	1.896	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

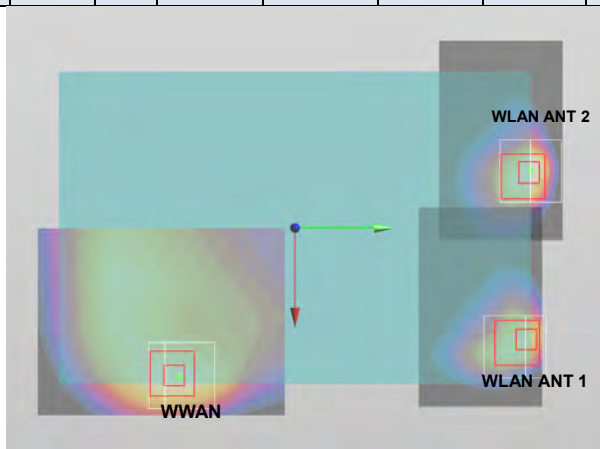


Case 3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 3	GSM1900	Bottom Face	0.651	0mm	7.19	-5.56	-0.03	169.5	1.330	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	GSM1900		0.651	0mm	7.19	-5.56	-0.03	197.5	1.518	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

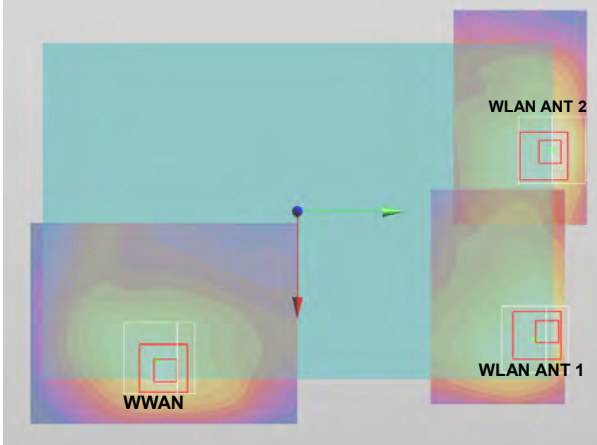


Case 4	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 4	GSM1900	Bottom Face	0.6	12mm	6.86	-6.19	-0.16	175.5	1.279	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	GSM1900		0.6	12mm	6.86	-6.19	-0.16	201.3	1.467	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

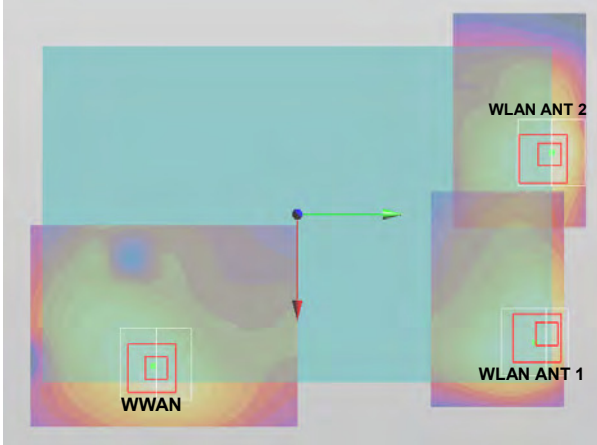


Case 5	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 5	WCDMA II	Bottom Face	1.177	0mm	7.29	-5.5	0.18	169.1	1.856	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	WCDMA II		1.177	0mm	7.29	-5.5	0.18	197.5	2.044	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

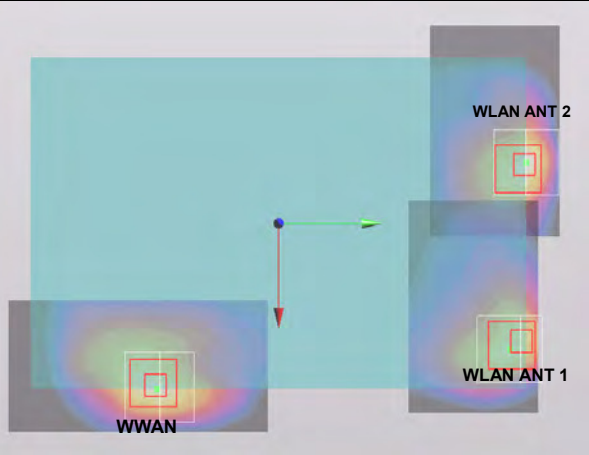


Case 6	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 6	WCDMA II	Bottom Face	0.914	12mm	7.31	-6.08	0.08	174.9	1.593	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	WCDMA II		0.914	12mm	7.31	-6.08	0.08	202.6	1.781	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

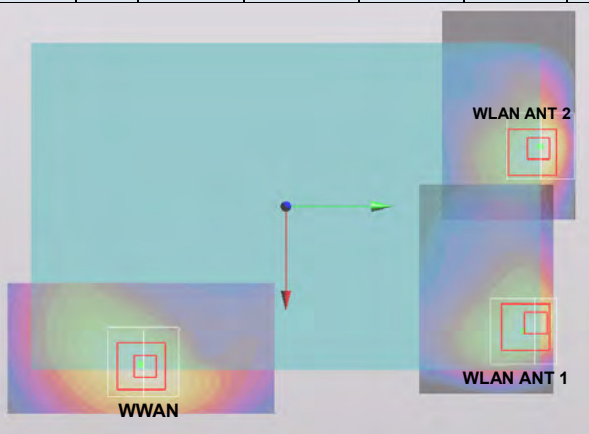


Case 7	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 7	WCDMA IV	Bottom Face	0.366	0mm	7.15	-6.1	0.17	174.9	1.045	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	WCDMA IV		0.366	0mm	7.15	-6.1	0.17	202.0	1.233	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

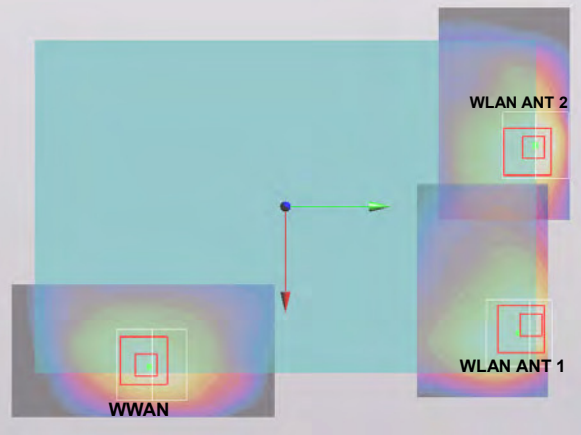


Case 8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 8	WCDMA IV	Bottom Face	0.576	12mm	6.86	-6.54	-0.13	179.0	1.255	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	WCDMA IV		0.576	12mm	6.86	-6.54	-0.13	204.4	1.443	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

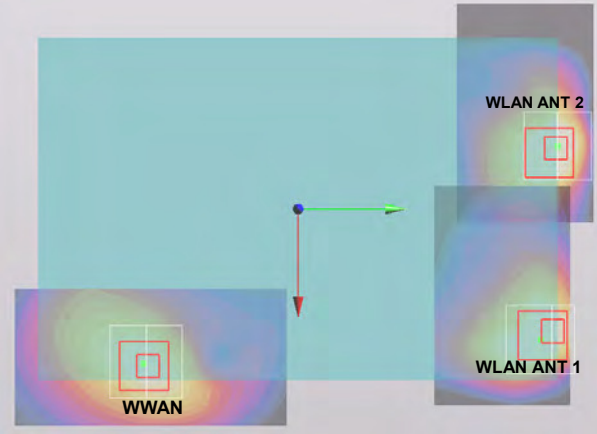


Case 9	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 9	WCDMA V	Bottom Face	0.61	0mm	7.02	-5.05	-0.09	164.3	1.289	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	WCDMA V		0.61	0mm	7.02	-5.05	-0.09	192.2	1.477	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

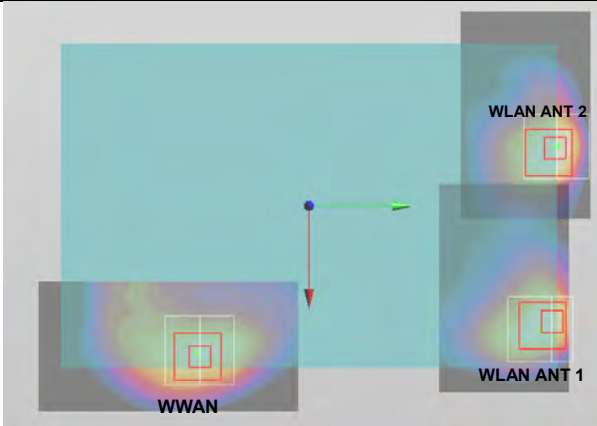


Case 10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 10	WCDMA V	Bottom Face	0.463	12mm	3.14	-8.07	-0.23	194.6	1.142	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	WCDMA V		0.463	12mm	3.14	-8.07	-0.23	204.1	1.330	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

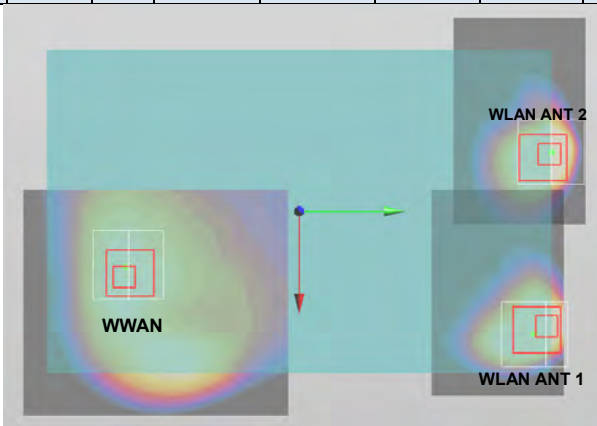


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
11	CDMA BC0	Bottom Face	0.541	0mm	6.94	-5.2	-0.07	165.7	1.220	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	CDMA BC0		0.541	0mm	6.94	-5.2	-0.07	193.1	1.408	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

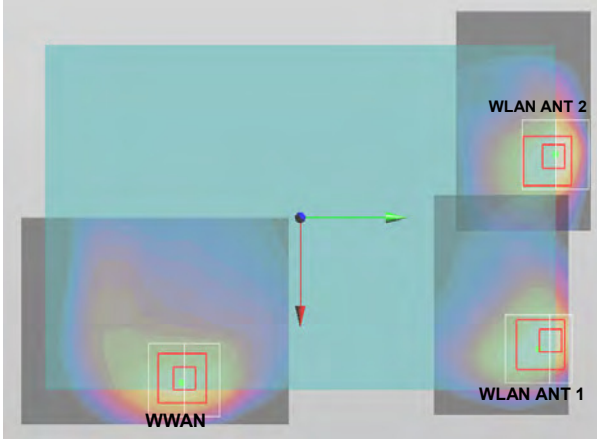


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
12	CDMA BC0	Bottom Face	0.475	12mm	3.37	-7.77	-0.24	191.4	1.154	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	CDMA BC0		0.475	12mm	3.37	-7.77	-0.24	202.0	1.342	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

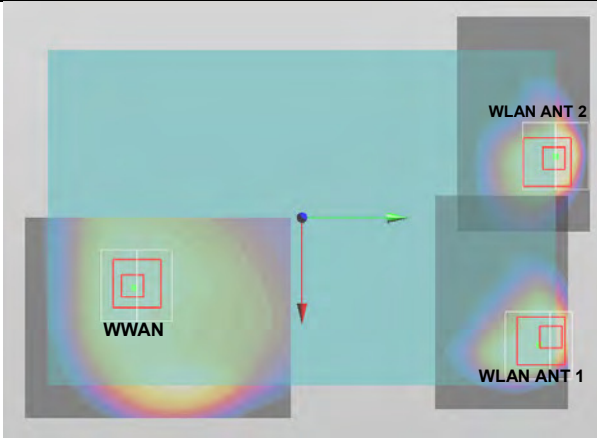


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
13	CDMA BC1	Bottom Face	0.763	0mm	7.3	-5.79	0.18	172.0	1.442	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	CDMA BC1		0.763	0mm	7.3	-5.79	0.18	200.0	1.630	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

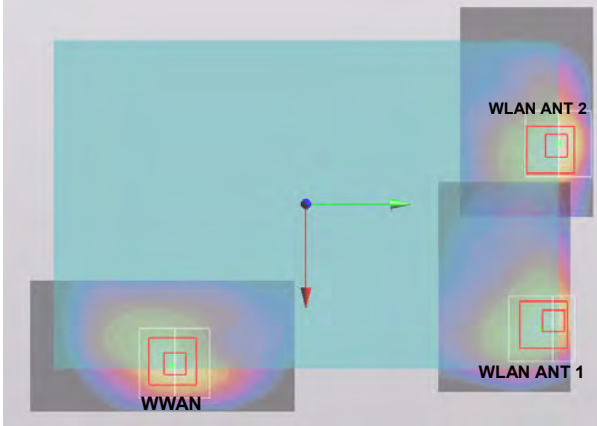


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
14	CDMA BC1	Bottom Face	1.125	12mm	6.96	-6.08	-0.16	174.5	1.804	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	CDMA BC1		1.125	12mm	6.96	-6.08	-0.16	200.8	1.992	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

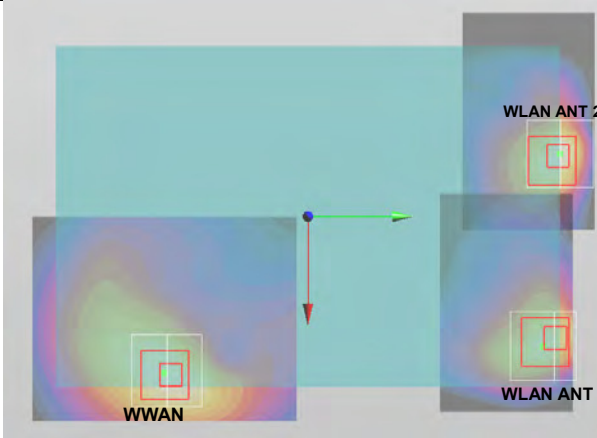


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
15	CDMA BC10	Bottom Face	0.602	0mm	6.94	-5.05	-0.06	164.2	1.281	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	CDMA BC10		0.602	0mm	6.94	-5.05	-0.06	191.8	1.469	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

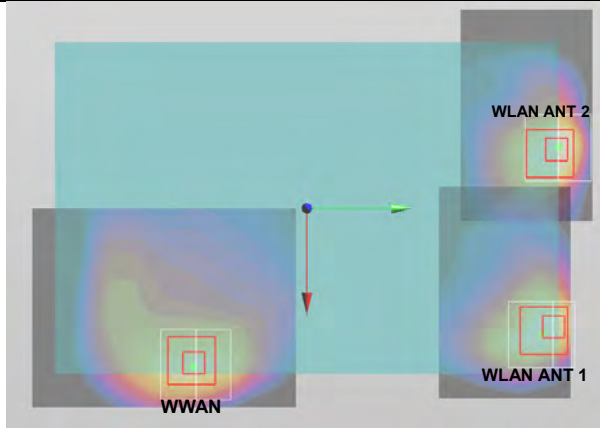


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
16	CDMA BC10	Bottom Face	0.507	12mm	3.37	-7.77	-0.24	191.4	1.186	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	CDMA BC10		0.507	12mm	3.37	-7.77	-0.24	202.0	1.374	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

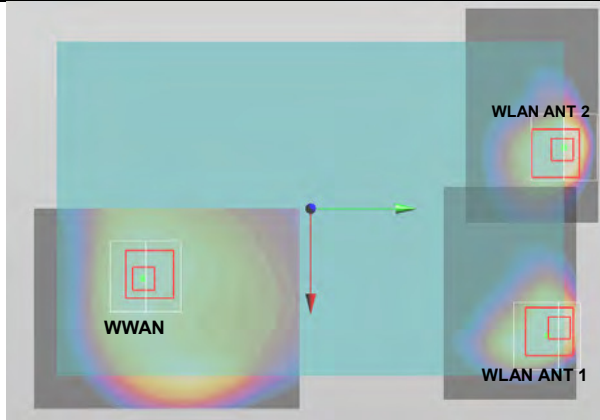


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
17	LTE Band 2	Bottom Face	1.273	0mm	7.2	-5.91	-0.06	173.0	1.952	0.02	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 2		1.273	0mm	7.2	-5.91	-0.06	200.6	2.140	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

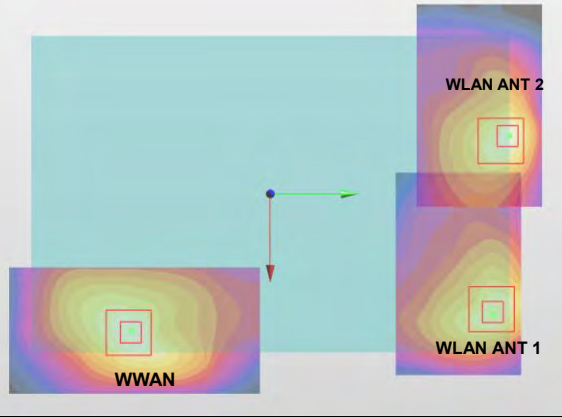


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
18	LTE Band 2	Bottom Face	1.124	12mm	7.16	-6.84	-0.13	182.2	1.803	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 2		1.124	12mm	7.16	-6.84	-0.13	208.5	1.991	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

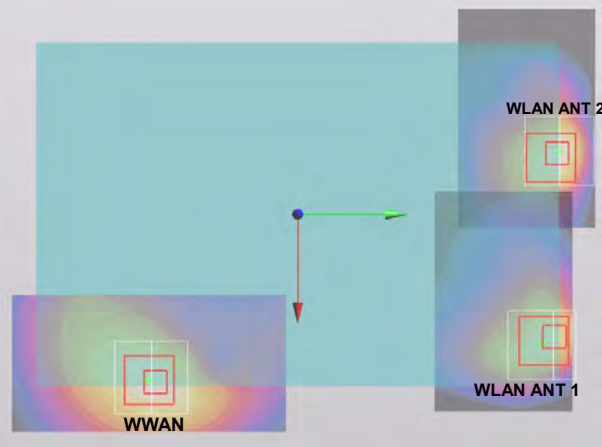


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
19	LTE Band 4	Bottom Face	0.579	0mm	7.19	-5.92	0.2	173.1	1.258	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 4		0.579	0mm	7.19	-5.92	0.2	200.6	1.446	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

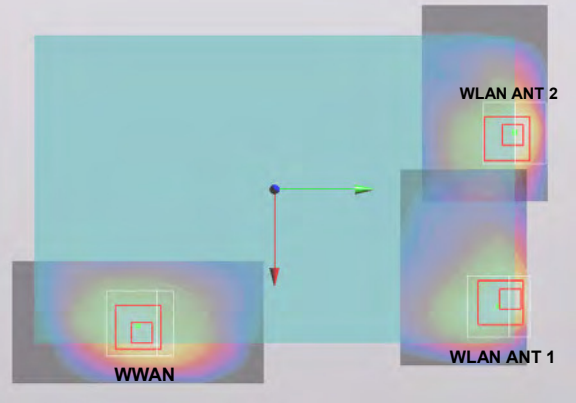


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
20	LTE Band 4	Bottom Face	0.475	12mm	7.31	-6.23	0.08	176.3	1.154	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 4		0.475	12mm	7.31	-6.23	0.08	203.9	1.342	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

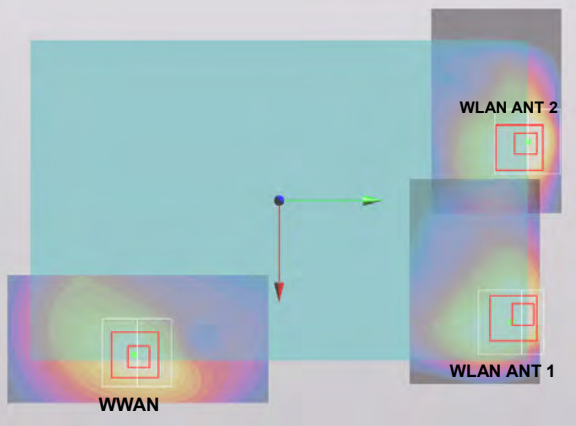


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
21	LTE Band 5	Bottom Face	0.816	0mm	6.95	-5.05	0	164.2	1.495	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 5		0.816	0mm	6.95	-5.05	0	191.9	1.683	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

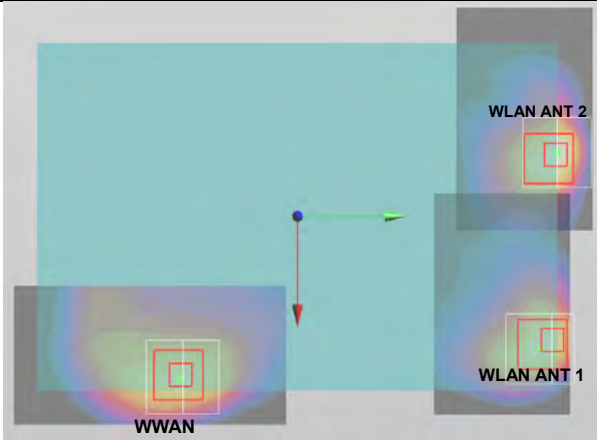


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
22	LTE Band 5	Bottom Face	0.609	12mm	7.1	-5.51	-0.19	169.0	1.288	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 5		0.609	12mm	7.1	-5.51	-0.19	196.6	1.476	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

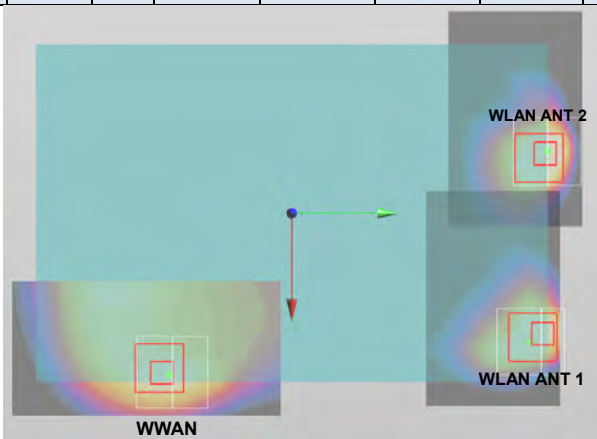


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
23	LTE Band 13	Bottom Face	0.758	0mm	6.79	-5.05	0	164.1	1.437	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 13		0.758	0mm	6.79	-5.05	0	191.1	1.625	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

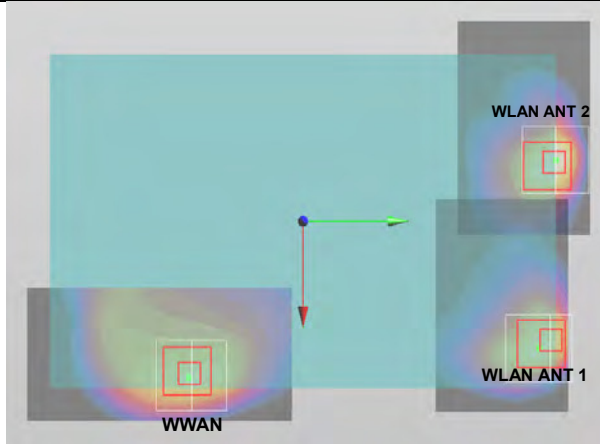


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
24	LTE Band 13	Bottom Face	0.553	12mm	4.26	-7.62	-0.23	189.3	1.232	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 13		0.553	12mm	4.26	-7.62	-0.23	203.5	1.420	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

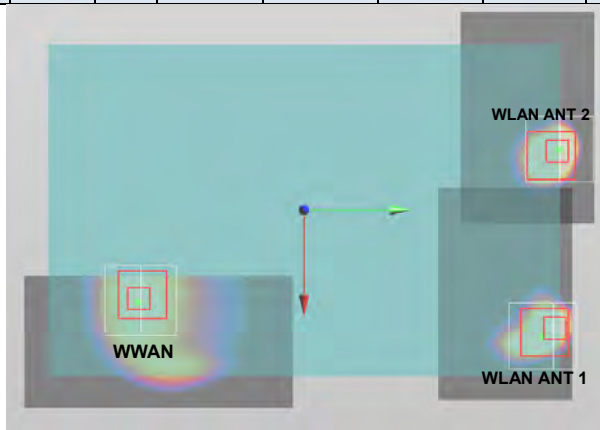


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
25	LTE Band 17	Bottom Face	0.415	0mm	6.79	-4.9	0	162.6	1.094	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 17		0.415	0mm	6.79	-4.9	0	189.8	1.282	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

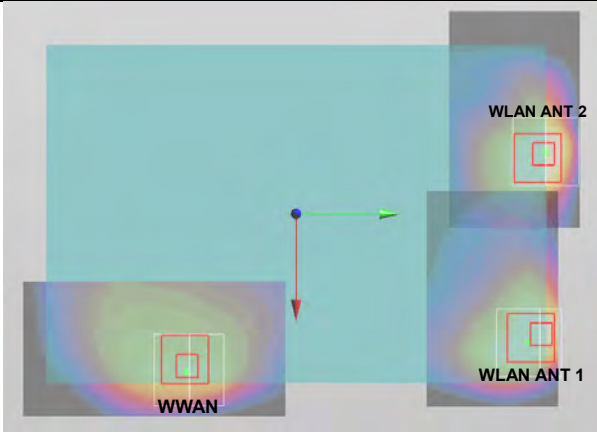


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
26	LTE Band 17	Bottom Face	0.391	12mm	6.79	-6.25	-0.19	176.0	1.070	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 17		0.391	12mm	6.79	-6.25	-0.19	201.5	1.258	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

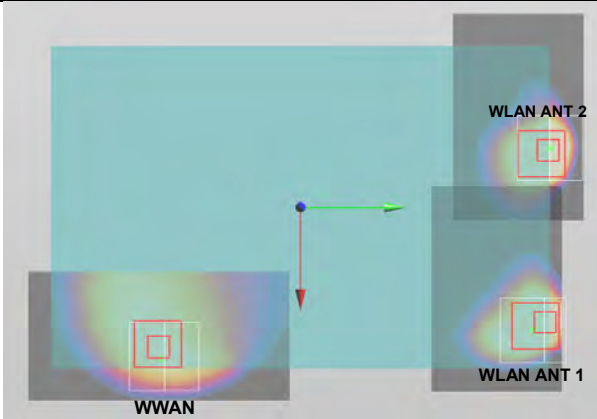


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
27	LTE Band 25	Bottom Face	1.122	0mm	7.03	-5.63	0	170.1	1.801	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 25		1.122	0mm	7.03	-5.63	0	197.3	1.989	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

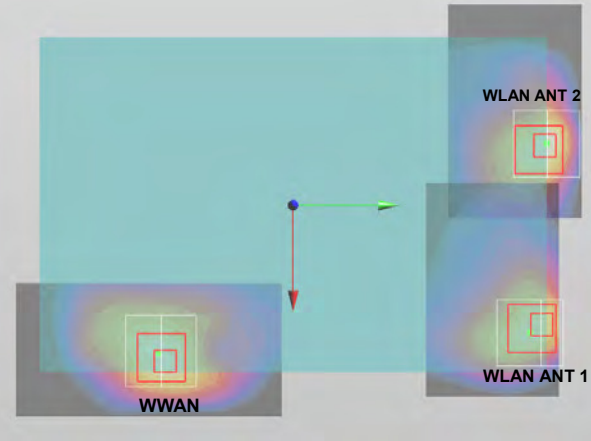


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
28	LTE Band 25	Bottom Face	1.125	12mm	7.31	-6.08	0.08	174.9	1.804	0.01	Not required
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01				
	LTE Band 25		1.125	12mm	7.31	-6.08	0.08	202.6	1.992	0.01	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				
	2.4GHz ANT 1		0.679	0mm	5.22	11.28	-0.01	80.8	1.546	0.02	Not required
	2.4GHz ANT 2		0.867	0mm	-2.86	11.44	-0.01				

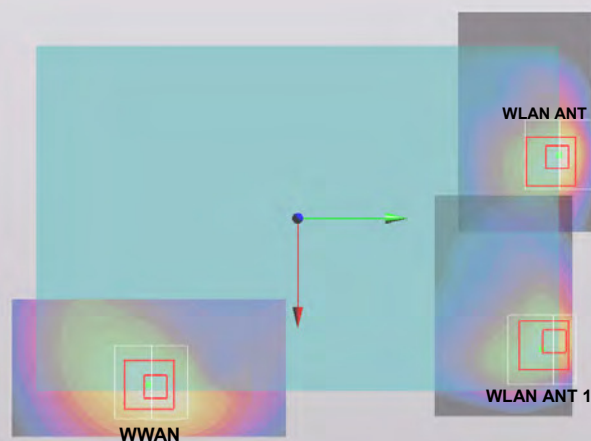


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
29	GSM850	Bottom Face	0.429	0mm	6.95	-5.05	-0.12	163.0	1.075	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	GSM850		0.429	0mm	6.95	-5.05	-0.12	186.7	1.408	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

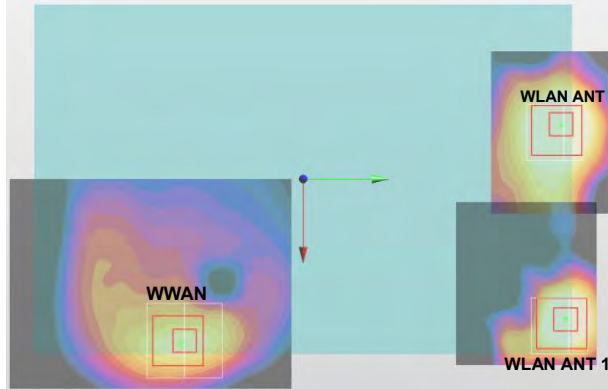


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
30	GSM850	Bottom Face	1.029	12mm	7.1	-5.98	-0.19	172.4	1.675	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	GSM850		1.029	12mm	7.1	-5.98	-0.19	195.5	2.008	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

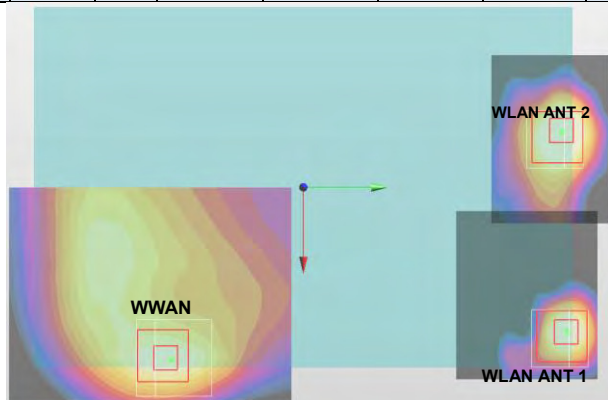


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
31	GSM1900	Bottom Face	0.651	0mm	7.19	-5.56	-0.03	168.2	1.297	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	GSM1900		0.651	0mm	7.19	-5.56	-0.03	192.3	1.630	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

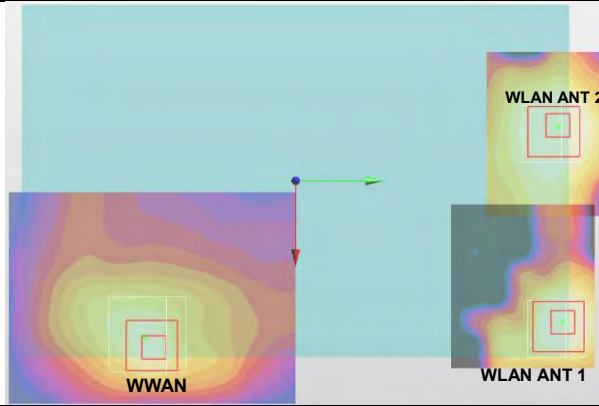

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
32	GSM1900	Bottom Face	0.6	12mm	6.86	-6.19	-0.16	174.3	1.246	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	GSM1900		0.6	12mm	6.86	-6.19	-0.16	196.2	1.579	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

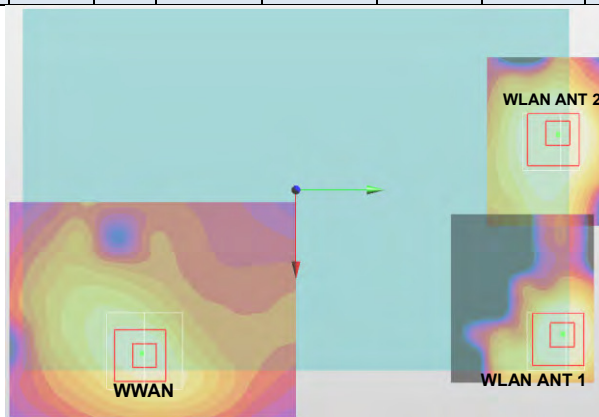


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
33	WCDMA II	Bottom Face	1.177	0mm	7.29	-5.5	0.18	167.7	1.823	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	WCDMA II		1.177	0mm	7.29	-5.5	0.18	192.3	2.156	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

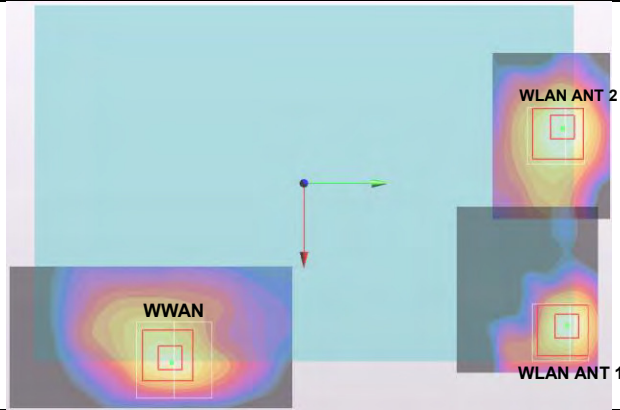

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
34	WCDMA II	Bottom Face	0.914	12mm	7.31	-6.08	0.08	173.5	1.560	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	WCDMA II		0.914	12mm	7.31	-6.08	0.08	197.4	1.893	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				




Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
35	WCDMA IV	Bottom Face	0.366	0mm	7.15	-6.1	0.17	173.6	1.012	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	WCDMA IV		0.366	0mm	7.15	-6.1	0.17	196.8	1.345	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

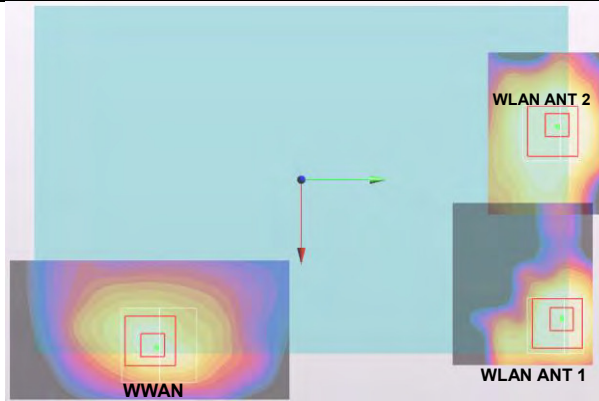


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
36	WCDMA IV	Bottom Face	0.576	12mm	6.86	-6.54	-0.13	177.8	1.222	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	WCDMA IV		0.576	12mm	6.86	-6.54	-0.13	199.3	1.555	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				




Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
37	WCDMA V	Bottom Face	0.61	0mm	7.02	-5.05	-0.09	163.0	1.256	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	WCDMA V		0.61	0mm	7.02	-5.05	-0.09	187.1	1.589	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

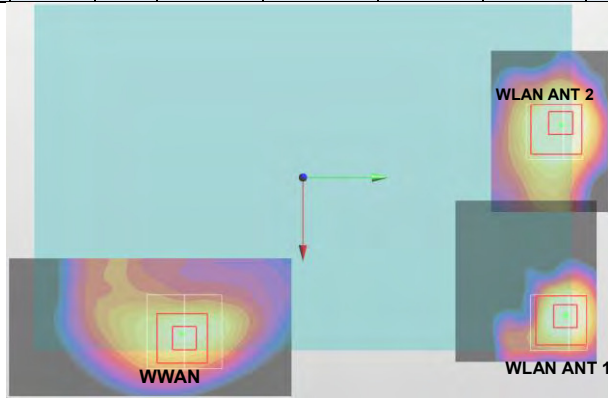

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
38	WCDMA V	Bottom Face	0.463	12mm	3.14	-8.07	-0.23	195.0	1.109	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	WCDMA V		0.463	12mm	3.14	-8.07	-0.23	199.2	1.442	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

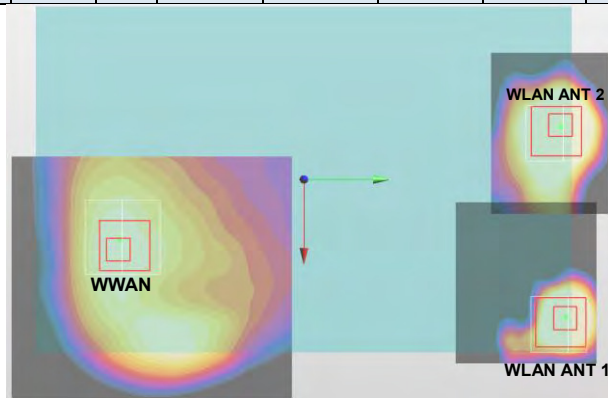


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
39	CDMA BC0	Bottom Face	0.541	0mm	6.94	-5.2	-0.07	164.5	1.187	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	CDMA BC0		0.541	0mm	6.94	-5.2	-0.07	188.0	1.520	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

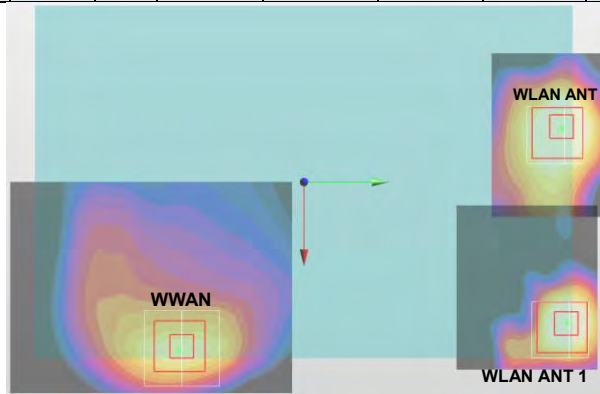

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
40	CDMA BC0	Bottom Face	0.475	12mm	3.37	-7.77	-0.24	191.7	1.121	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	CDMA BC0		0.475	12mm	3.37	-7.77	-0.24	197.1	1.454	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				




Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
41	CDMA BC1	Bottom Face	0.763	0mm	7.3	-5.79	0.18	170.6	1.409	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	CDMA BC1		0.763	0mm	7.3	-5.79	0.18	194.9	1.742	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

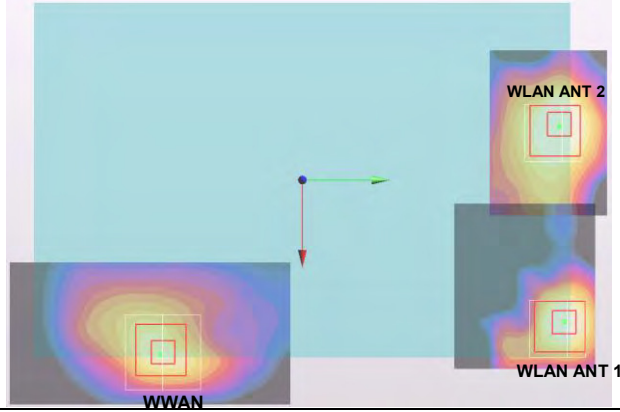

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
42	CDMA BC1	Bottom Face	1.125	12mm	6.96	-6.08	-0.16	173.3	1.771	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	CDMA BC1		1.125	12mm	6.96	-6.08	-0.16	195.7	2.104	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				



Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
43	CDMA BC10	Bottom Face	0.602	0mm	6.94	-5.05	-0.06	163.0	1.248	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	CDMA BC10		0.602	0mm	6.94	-5.05	-0.06	186.7	1.581	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

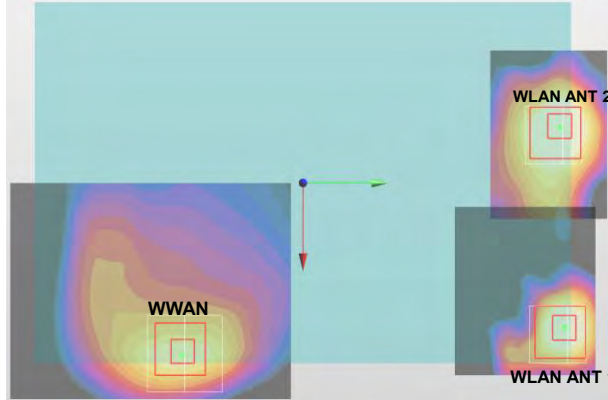


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
44	CDMA BC10	Bottom Face	0.507	12mm	3.37	-7.77	-0.24	191.7	1.153	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	CDMA BC10		0.507	12mm	3.37	-7.77	-0.24	197.1	1.486	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				




Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
45	LTE Band 2	Bottom Face	1.273	0mm	7.2	-5.91	-0.06	171.7	1.919	0.02	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 2		1.273	0mm	7.2	-5.91	-0.06	195.4	2.252	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				




Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
46	LTE Band 2	Bottom Face	1.124	12mm	7.16	-6.84	-0.13	181.0	1.770	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 2		1.124	12mm	7.16	-6.84	-0.13	203.3	2.103	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

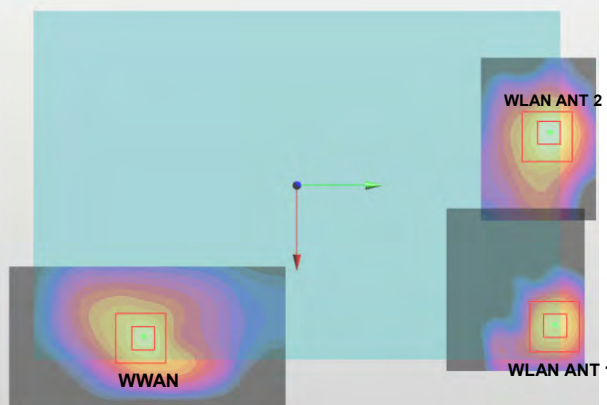


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
47	LTE Band 4	Bottom Face	0.579	0mm	7.19	-5.92	0.2	171.8	1.225	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 4		0.579	0mm	7.19	-5.92	0.2	195.5	1.558	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

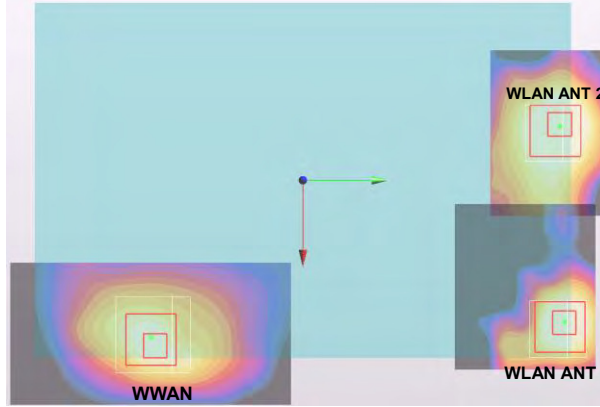


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
48	LTE Band 4	Bottom Face	0.475	12mm	7.31	-6.23	0.08	175.0	1.121	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 4		0.475	12mm	7.31	-6.23	0.08	198.7	1.454	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

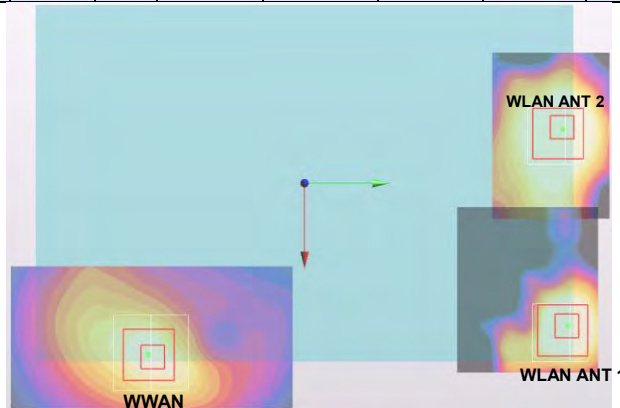


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
49	LTE Band 5	Bottom Face	0.816	0mm	6.95	-5.05	0	163.0	1.462	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 5		0.816	0mm	6.95	-5.05	0	186.7	1.795	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

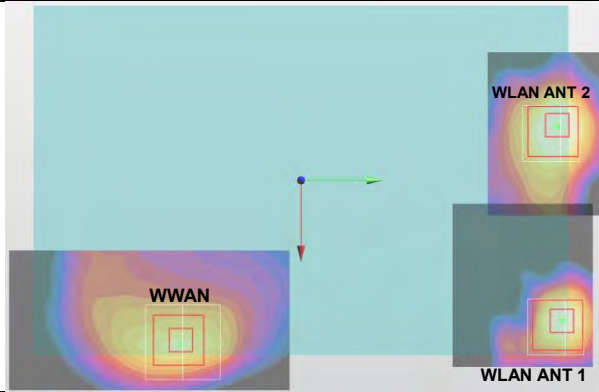


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
50	LTE Band 5	Bottom Face	0.609	12mm	7.1	-5.51	-0.19	167.7	1.255	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 5		0.609	12mm	7.1	-5.51	-0.19	191.5	1.588	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

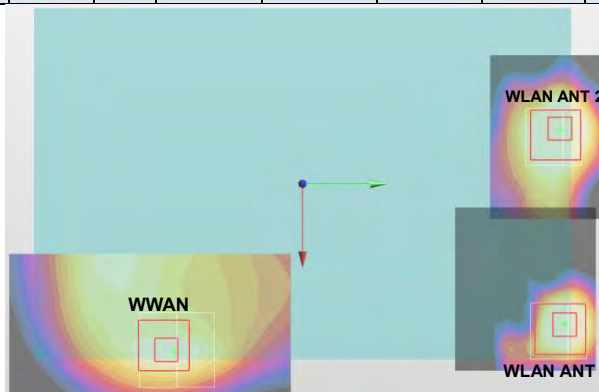


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
51	LTE Band 13	Bottom Face	0.758	0mm	6.79	-5.05	0	162.9	1.404	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 13		0.758	0mm	6.79	-5.05	0	185.9	1.737	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

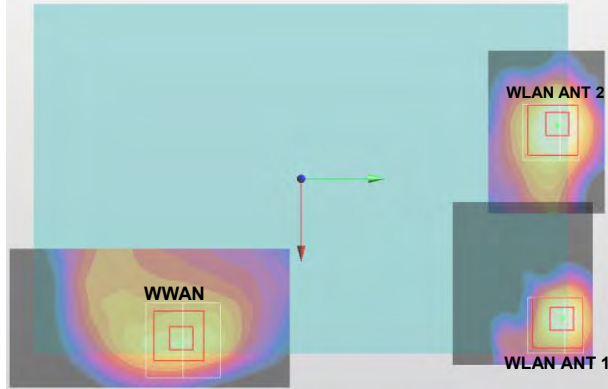


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
52	LTE Band 13	Bottom Face	0.553	12mm	4.26	-7.62	-0.23	189.2	1.199	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 13		0.553	12mm	4.26	-7.62	-0.23	198.5	1.532	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

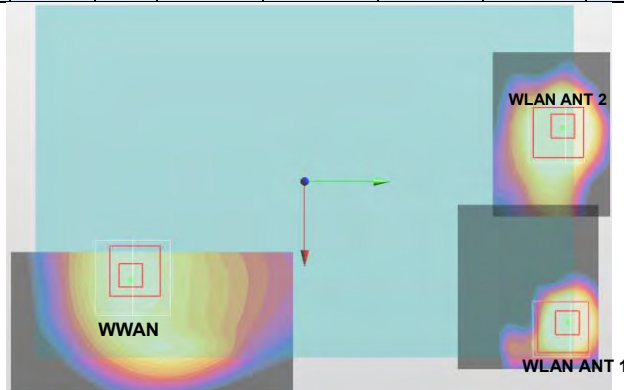


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
53	LTE Band 17	Bottom Face	0.415	0mm	6.79	-4.9	0	161.4	1.061	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 17		0.415	0mm	6.79	-4.9	0	184.6	1.394	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

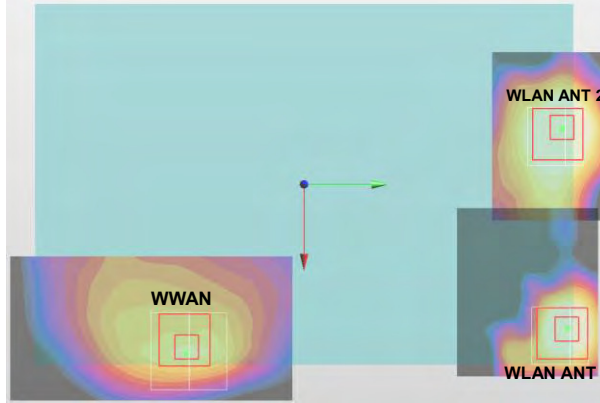

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
54	LTE Band 17	Bottom Face	0.391	12mm	6.79	-6.25	-0.19	174.9	1.037	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 17		0.391	12mm	6.79	-6.25	-0.19	196.4	1.370	0.01	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

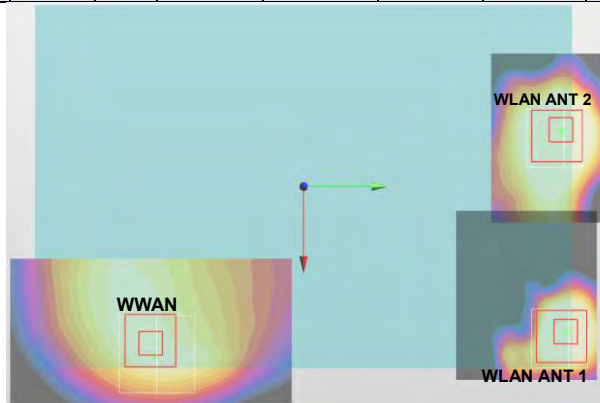


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
55	LTE Band 25	Bottom Face	1.122	0mm	7.03	-5.63	0	168.8	1.768	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 25		1.122	0mm	7.03	-5.63	0	192.1	2.101	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

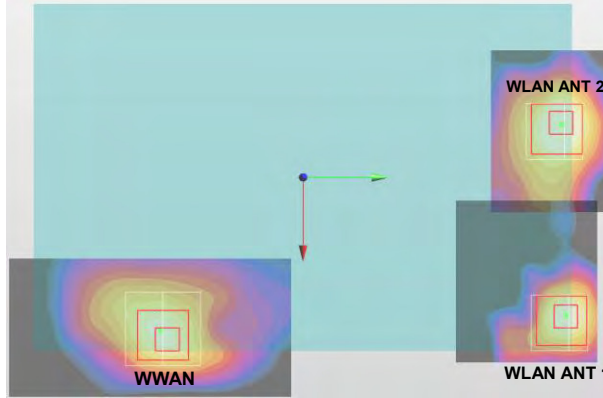


Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
56	LTE Band 25	Bottom Face	1.125	12mm	7.31	-6.08	0.08	173.5	1.771	0.01	Not required
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01				
	LTE Band 25		1.125	12mm	7.31	-6.08	0.08	197.4	2.104	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				
	5GHz ANT 1		0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				



Case 57	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	5GHz ANT 1	Bottom Face	0.646	0mm	5.98	11.22	0.01	85.4	1.625	0.02	Not required
	5GHz ANT 2		0.979	0mm	-2.56	11.02	0.04				

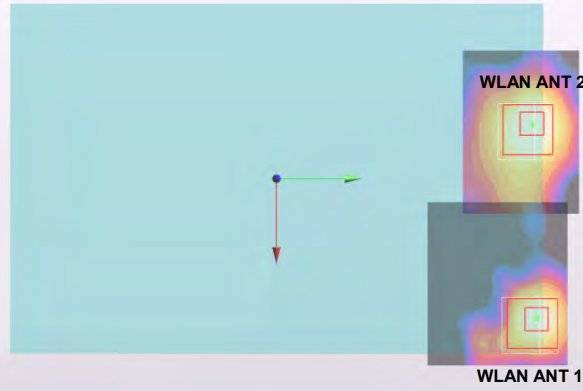

Case 58	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	5GHz ANT 1	Edge 2	1.148	0mm	-0.2	-5.6	-1.81	87.0	2.299	0.04	Not required
	5GHz ANT 2		1.151	0mm	-0.4	3.1	-1.82				

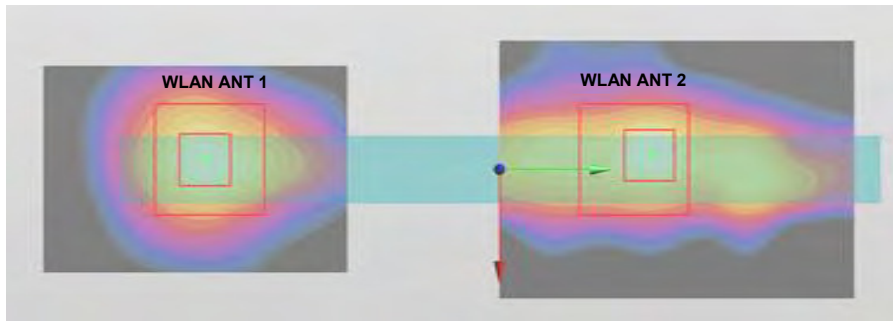

Test Engineer : Galen Chang, Bevis Chang, Tom Jun, Thomas Chen, Kurt Lu, and San Lin

15. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 15.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%

Table 15.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	7.0	N	1	1	1	7.0	7.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.8%	12.7%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.5%	25.4%

Table 15.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Body_750MHz

DUT: D750V3-1078

Communication System: CW ; Frequency: 750 MHz;Duty Cycle: 1:1

Medium: MSL_750_160602 Medium parameters used: $f = 750$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.848$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3931; ConvF(10.29, 10.29, 10.29); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2015/9/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.75 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 2.73 W/kg

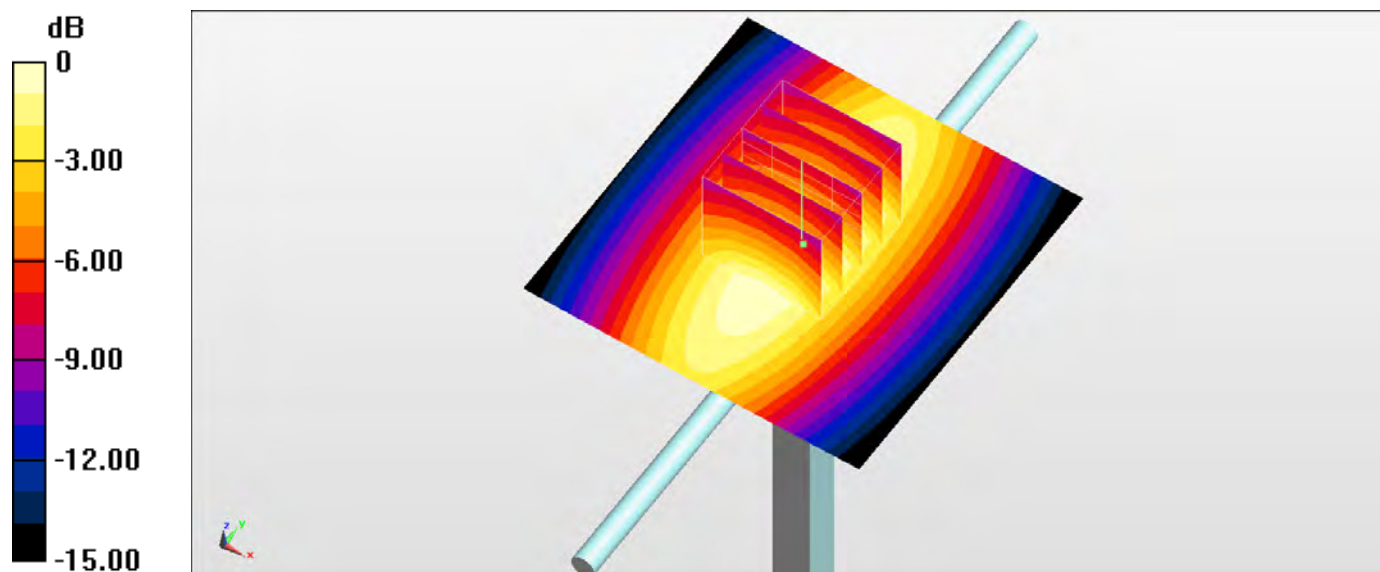

System Check_Body_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_160601 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.011 \text{ S/m}$; $\epsilon_r = 57.038$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration

- Probe: EX3DV4 - SN3931; ConvF(10.13, 10.13, 10.13); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2015/9/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.32 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.40 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.5 W/kg ; SAR(10 g) = 1.67 W/kg

Maximum value of SAR (measured) = 3.27 W/kg

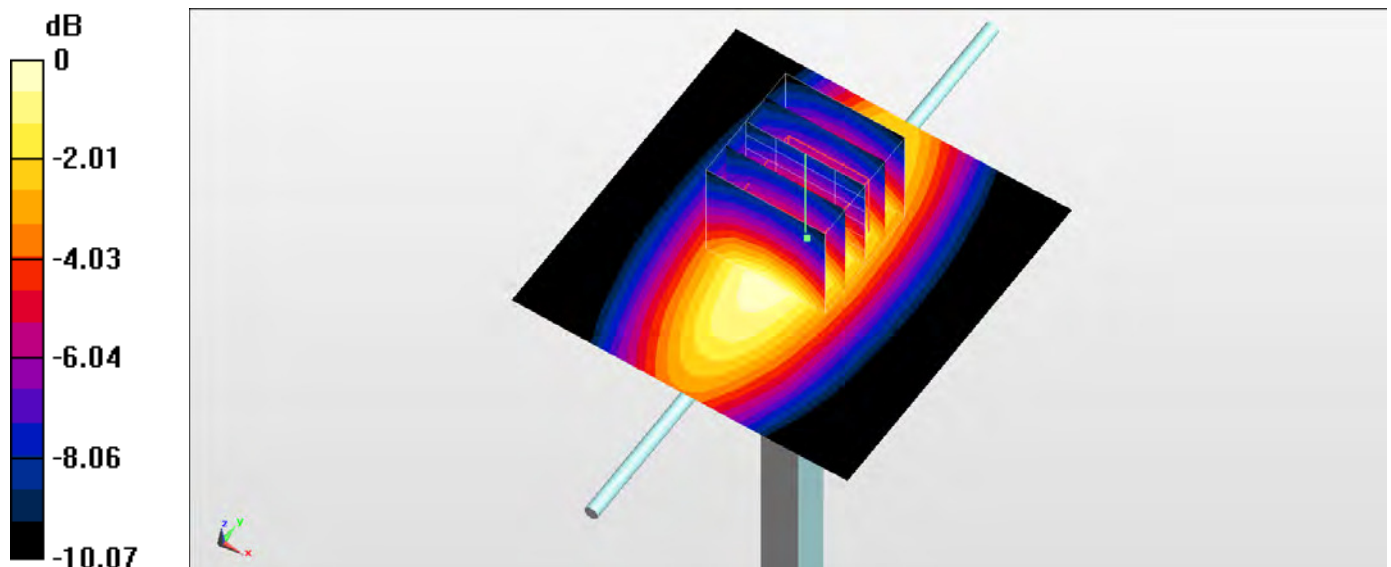

0 dB = $3.27 \text{ W/kg} = 5.15 \text{ dBW/kg}$

System Check_Body_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_160603 Medium parameters used: $f = 835$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 57.239$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(6.24, 6.24, 6.24); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.61 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 53.84 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.5 W/kg

Maximum value of SAR (measured) = 2.60 W/kg

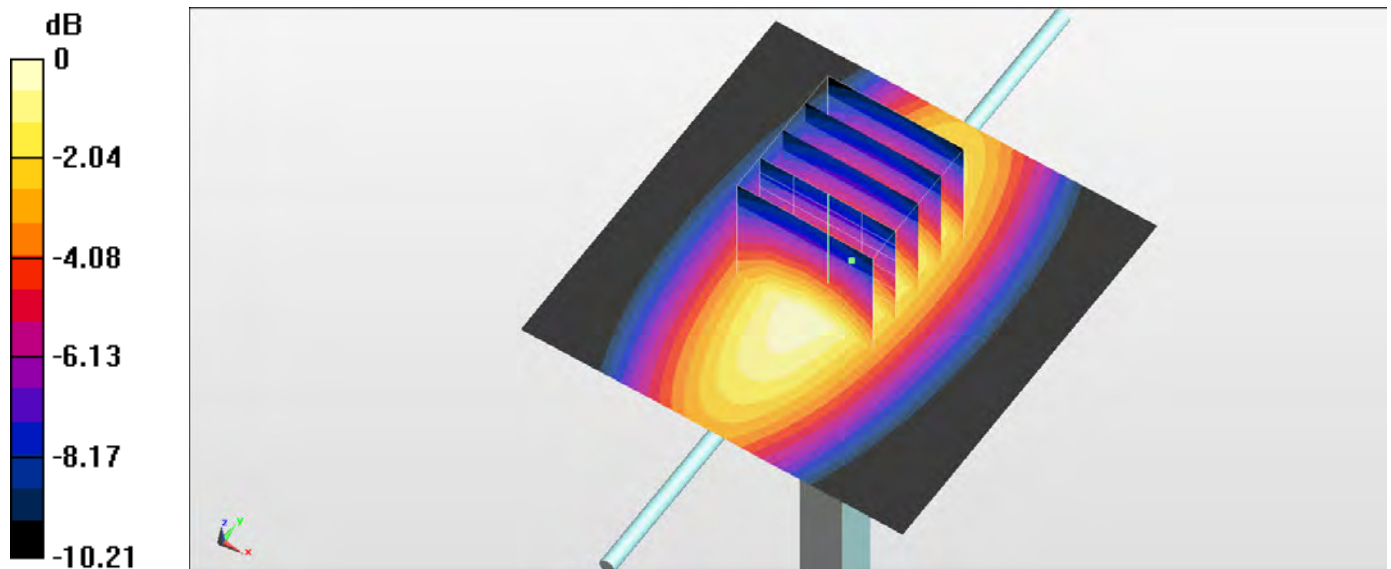

0 dB = 2.60 W/kg = 4.15 dBW/kg

System Check_Body_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1750_160531 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.502$ S/m; $\epsilon_r = 55.061$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.95, 4.95, 4.95); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)


Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 11.3 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 90.150 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 9.17 W/kg; SAR(10 g) = 5.09 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

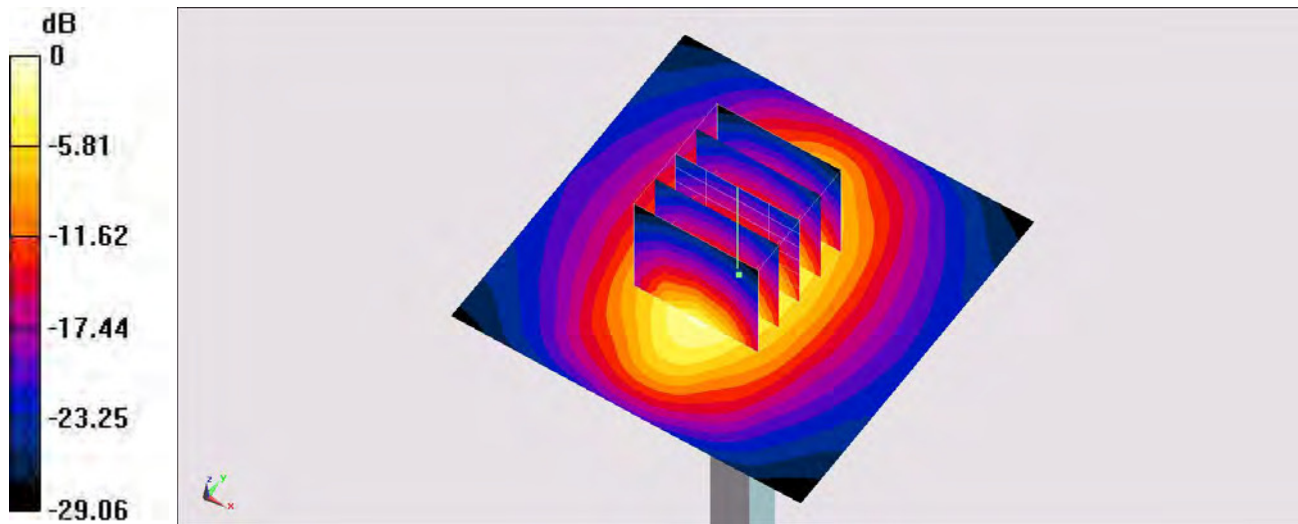

0 dB = 11.3 W/kg = 10.53 dBW/kg

System Check_Body_1900MHz

DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160531 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 53.842$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.78, 4.78, 4.78); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)


Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 11.9 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 91.448 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.44 W/kg; SAR(10 g) = 5.04 W/kg

Maximum value of SAR (measured) = 11.7 W/kg

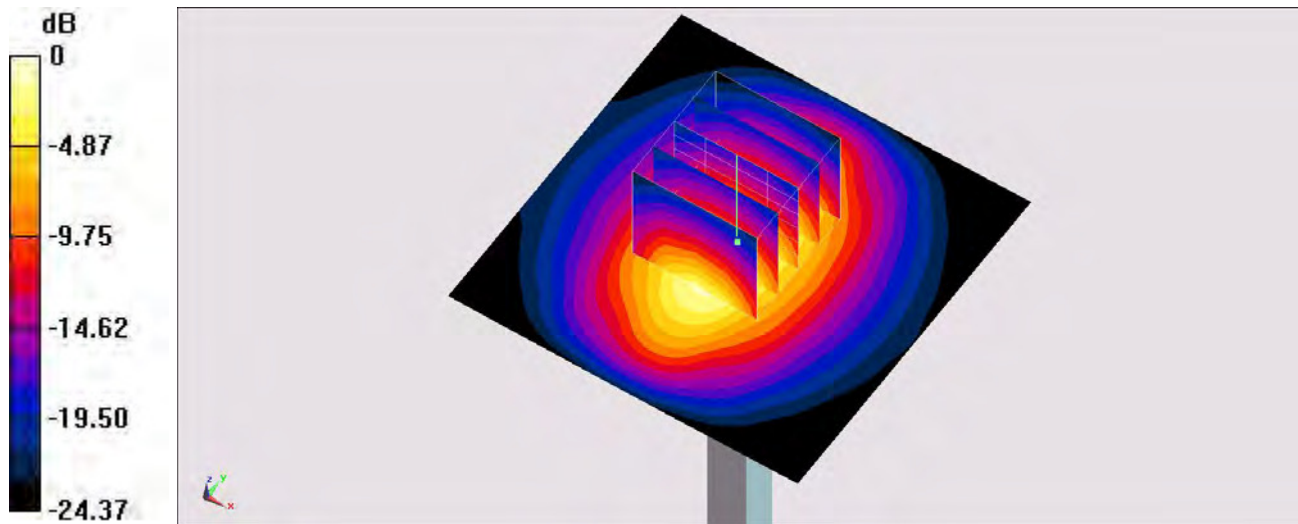

0 dB = 11.9 W/kg = 10.76 dBW/kg

System Check_Body_1900MHz

DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160601 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.915$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.78, 4.78, 4.78); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)


Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 12.2 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 93.424 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.71 W/kg; SAR(10 g) = 5.18 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

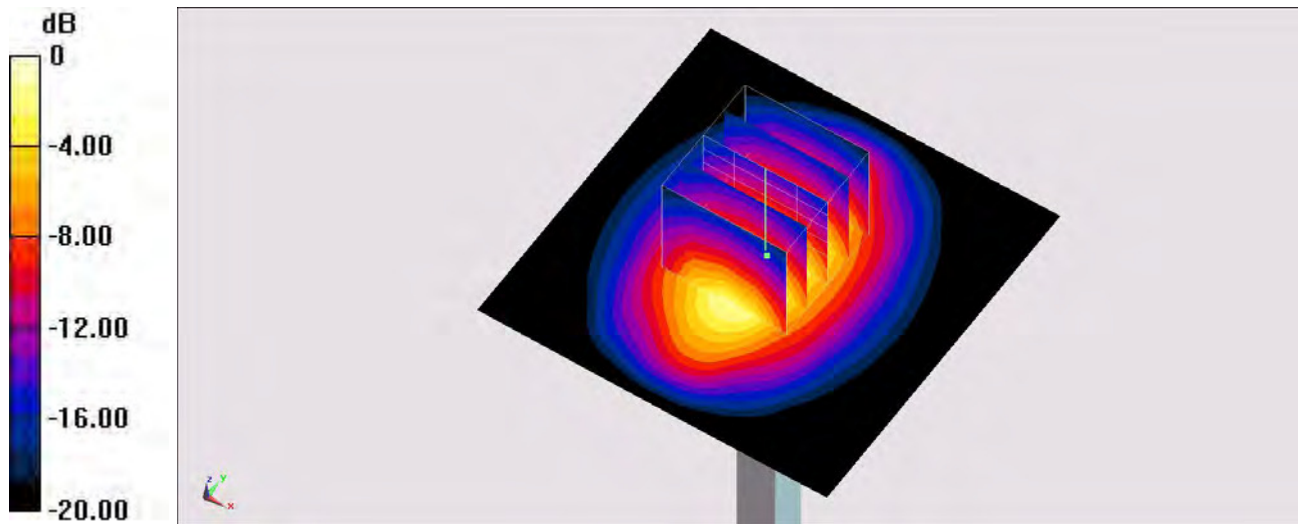

0 dB = 12.2 W/kg = 10.86 dBW/kg

System Check_Body_1900MHz

DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160603 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.792$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.78, 4.78, 4.78); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.2 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 104.3 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.29 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

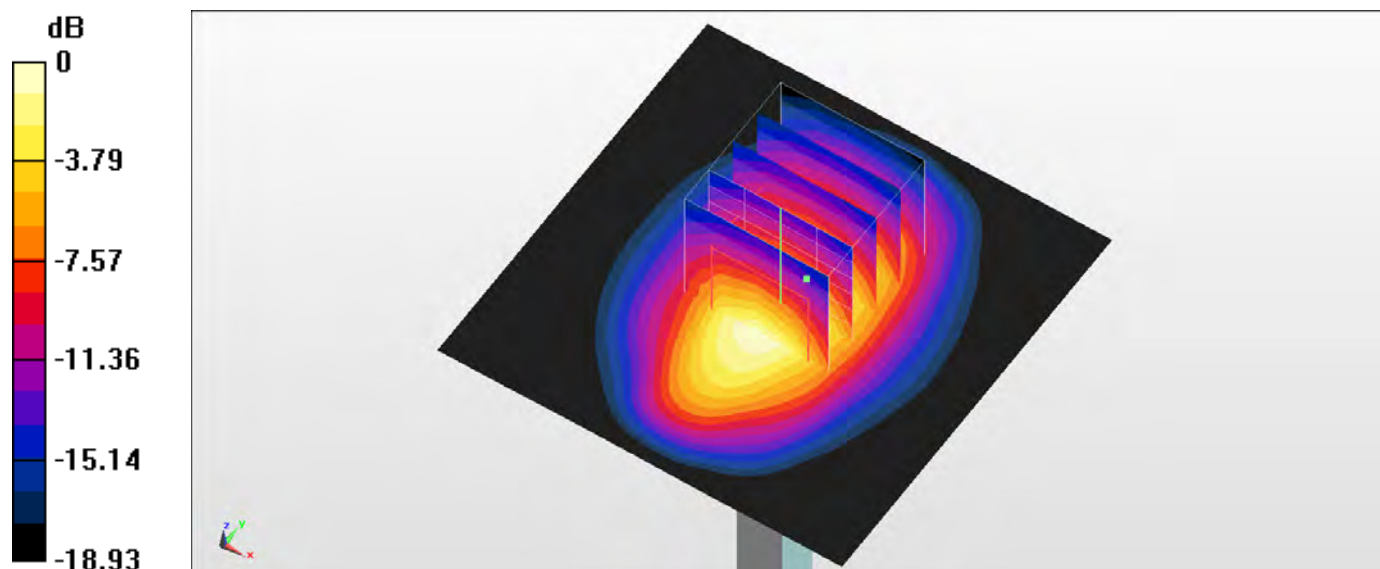

0 dB = 14.3 W/kg = 11.55 dBW/kg

System Check_Body_1900MHz

DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160608 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.545$ S/m; $\epsilon_r = 54.037$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(7.89, 7.89, 7.89); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.4 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 102.8 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.35 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

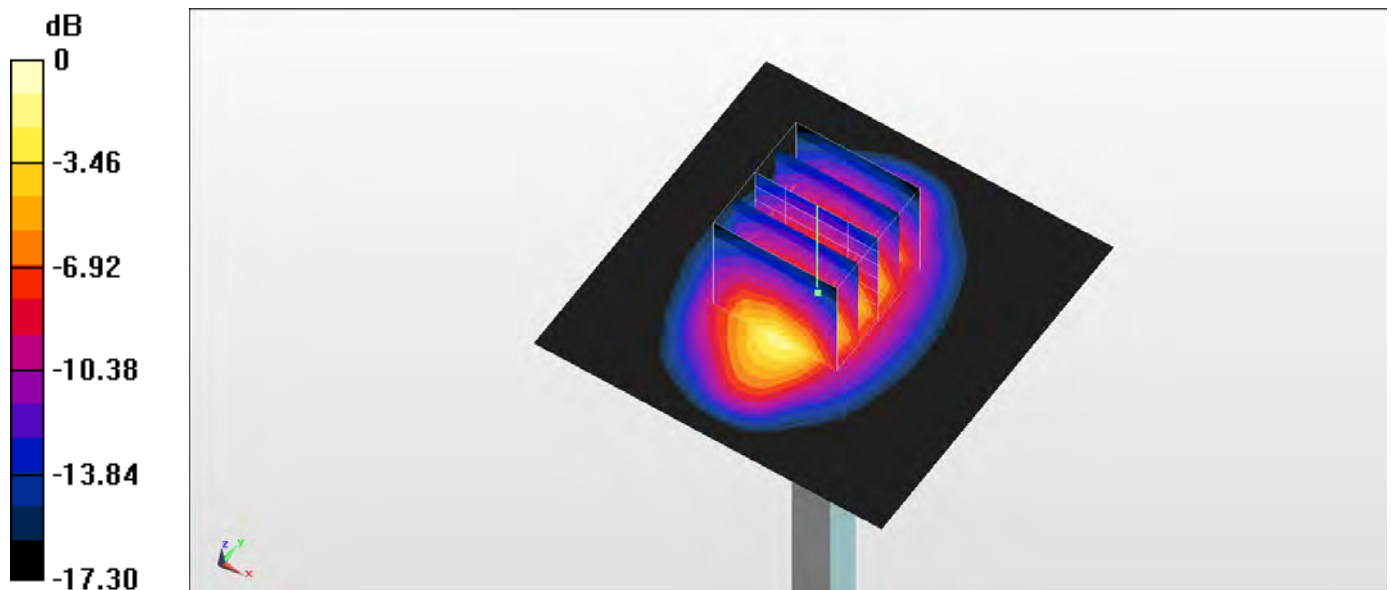

0 dB = 15.7 W/kg = 11.96 dBW/kg

System Check_Body_2450MHz

DUT: D2450V2-736

Communication System: CW ; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: MSL_2450_160604 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 53.431$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.37, 4.37, 4.37); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.8 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

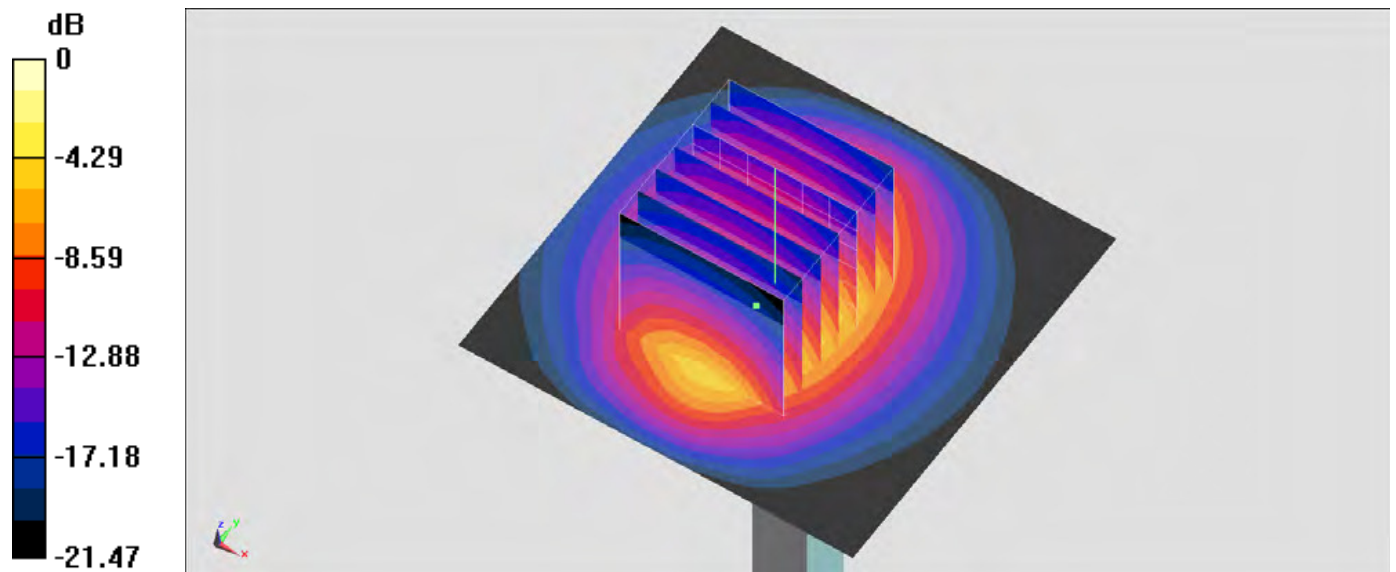

0 dB = 19.8 W/kg = 12.97 dBW/kg

System Check_Body_2450MHz

DUT: D2450V2-736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_160604 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 53.431$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(7.53, 7.53, 7.53); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.5 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.9 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 24.7 W/kg

SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.67 W/kg

Maximum value of SAR (measured) = 20.2 W/kg

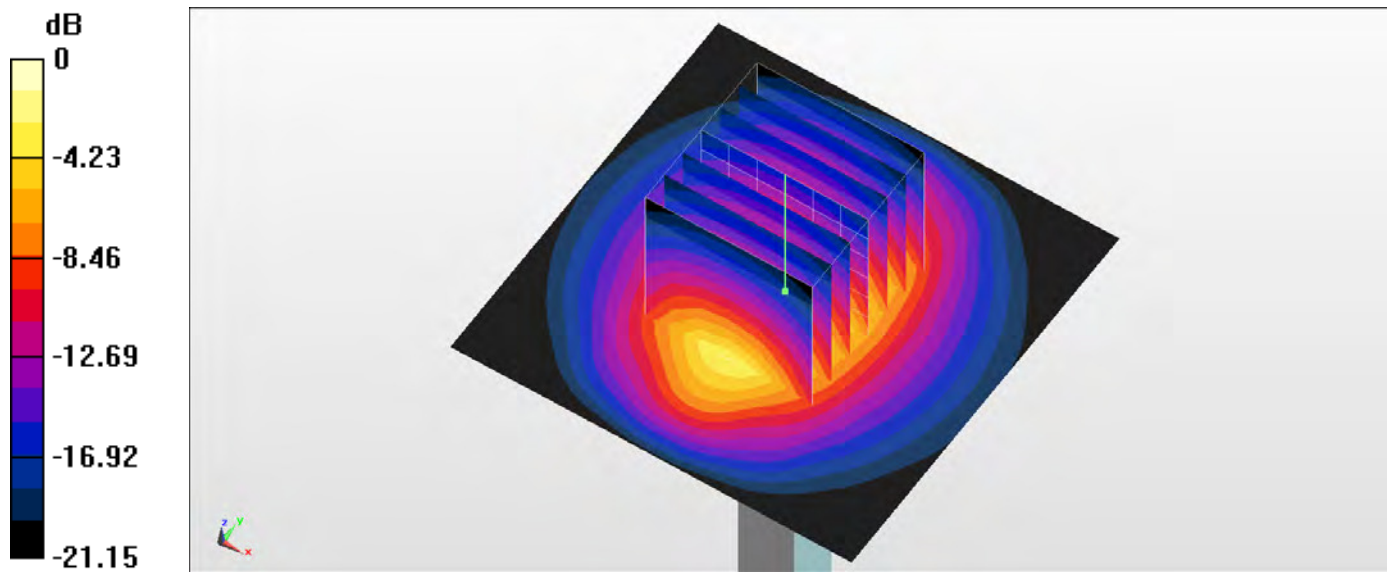

0 dB = 20.2 W/kg = 13.05 dBW/kg

System Check_Body_5250MHz

DUT: D5GHzV2-1128

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: MSL_5G_160604 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.52$ S/m; $\epsilon_r = 47.112$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(4.42, 4.42, 4.42); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.55 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = **8.25 W/kg**; SAR(10 g) = **2.28 W/kg**

Maximum value of SAR (measured) = 20.4 W/kg

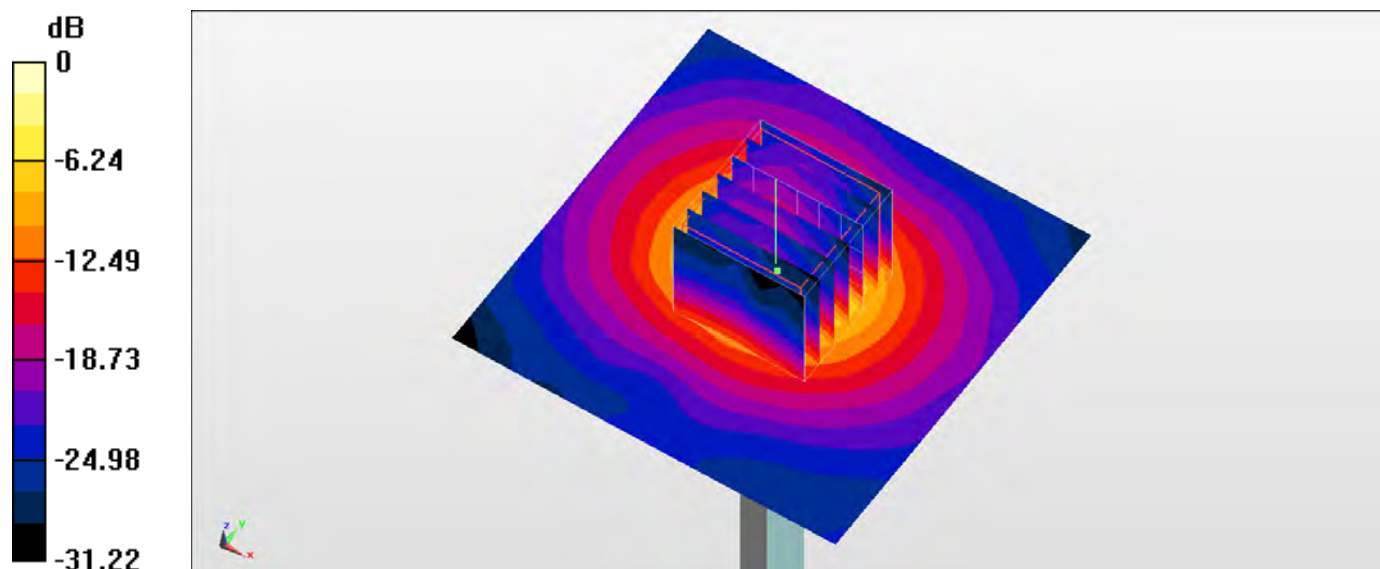

0 dB = 20.4 W/kg = 13.10 dBW/kg

System Check_Body_5600MHz

DUT: D5GHzV2-1128

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: MSL_5G_160604 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.965$ S/m; $\epsilon_r = 46.488$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(3.81, 3.81, 3.81); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 33.9 W/kg

SAR(1 g) = **8.57 W/kg**; SAR(10 g) = **2.35 W/kg**

Maximum value of SAR (measured) = 21.6 W/kg

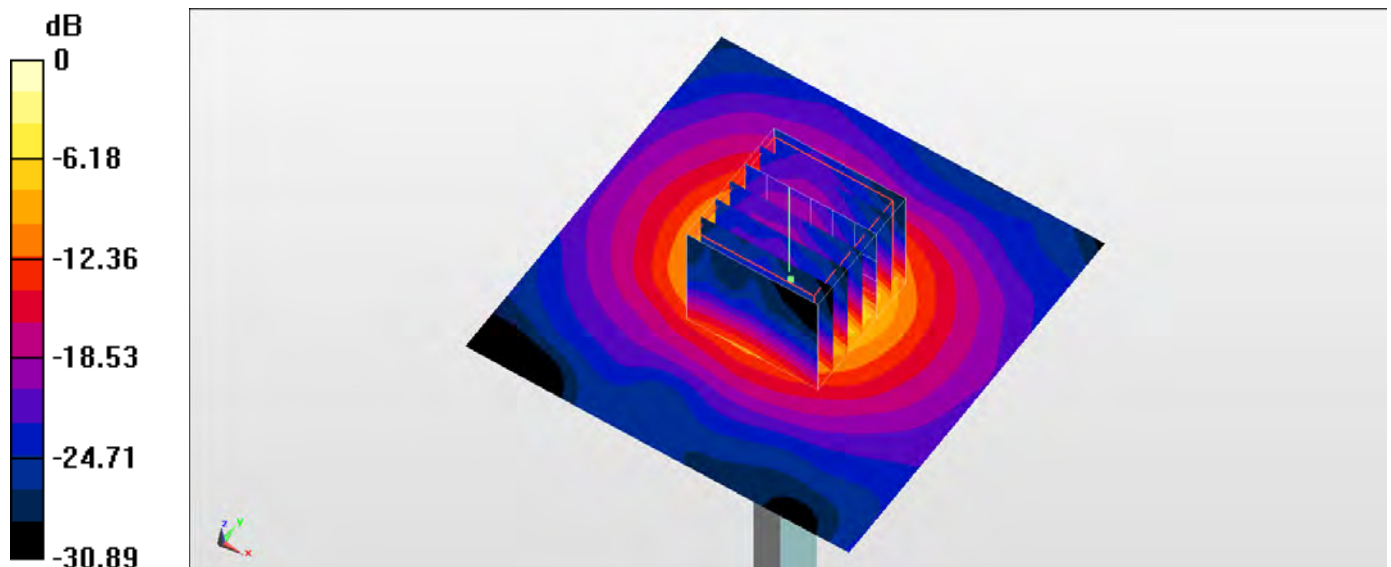

0 dB = 21.6 W/kg = 13.34 dBW/kg

System Check_Body_5750MHz

DUT: D5GHzV2-1128

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: MSL_5G_160604 Medium parameters used: $f = 5750$ MHz; $\sigma = 6.169$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(3.92, 3.92, 3.92); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.49 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 8 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 20.4 W/kg

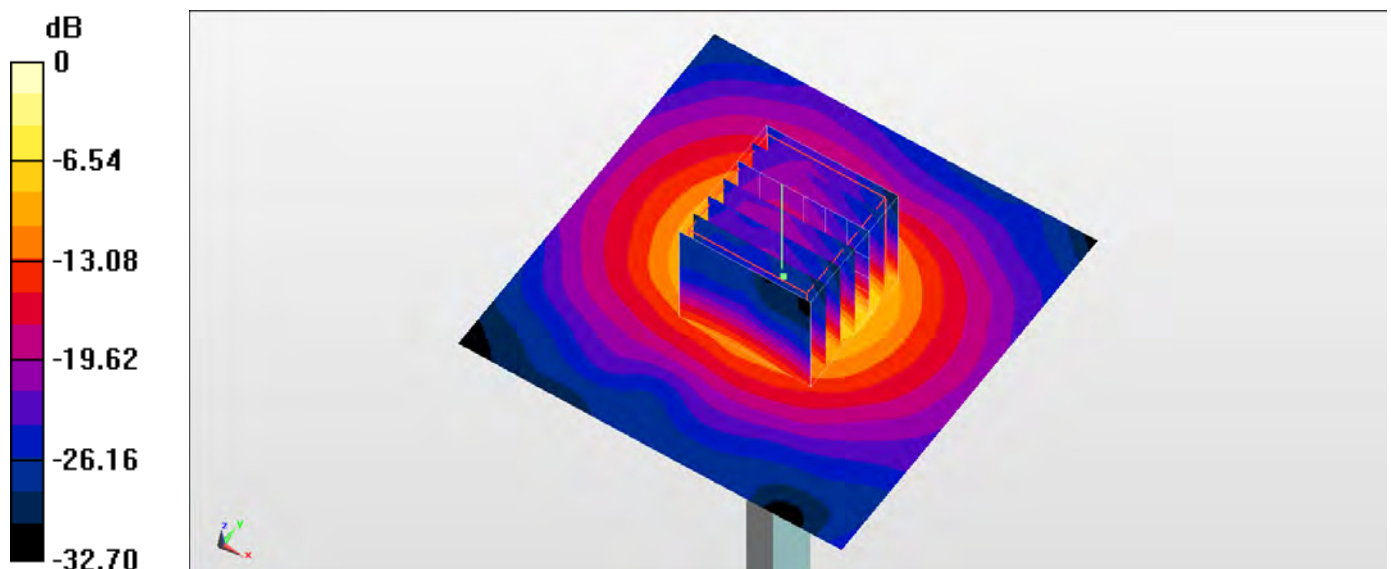

0 dB = 20.4 W/kg = 13.10 dBW/kg



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

#01_GSM850_GPRS (2 Tx slots)_Bottom Face_12mm_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium: MSL_850_160603 Medium parameters used: $f = 849$ MHz; $\sigma = 0.983$ S/m; $\epsilon_r = 57.142$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(6.24, 6.24, 6.24); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.931 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.21 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.493 W/kg

Maximum value of SAR (measured) = 0.934 W/kg

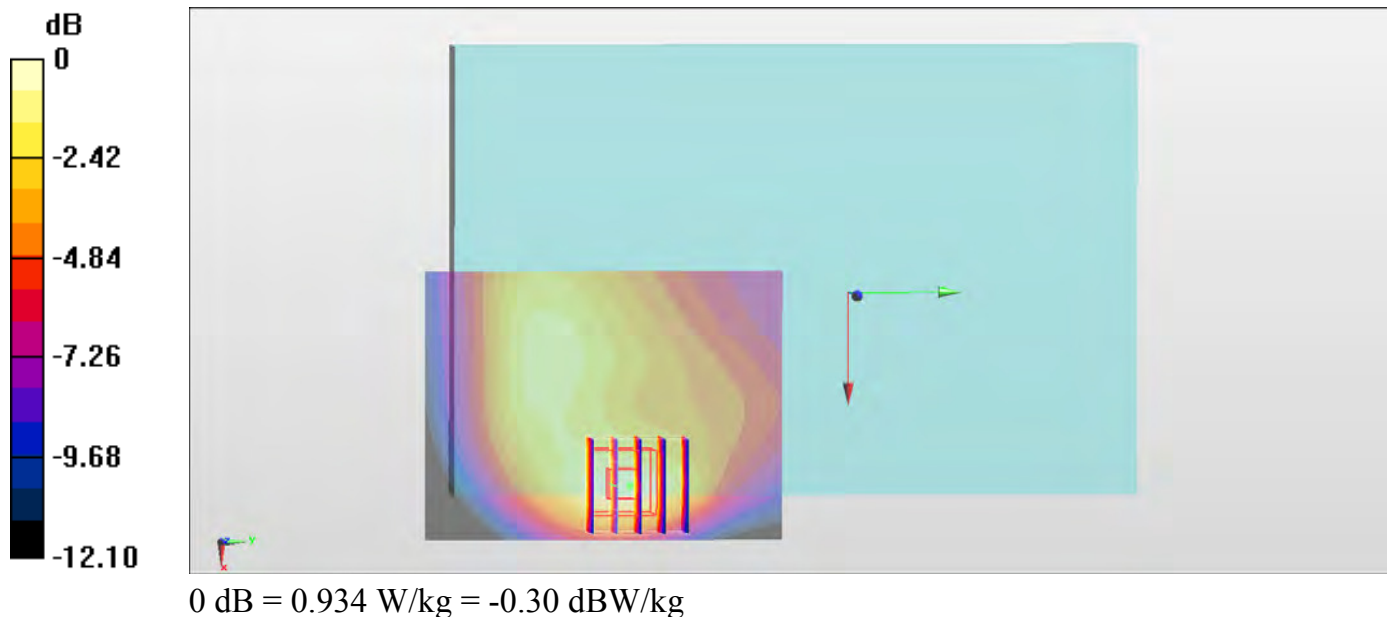

#02_GSM1900_EDGE (4 Tx slots)_Bottom Face_0mm_Ch661

Communication System: PCS ; Frequency: 1880 MHz;Duty Cycle: 1:2.08

Medium: MSL_1900_160603 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.501$ S/m; $\epsilon_r = 52.883$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.78, 4.78, 4.78); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.520 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.48 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.654 W/kg

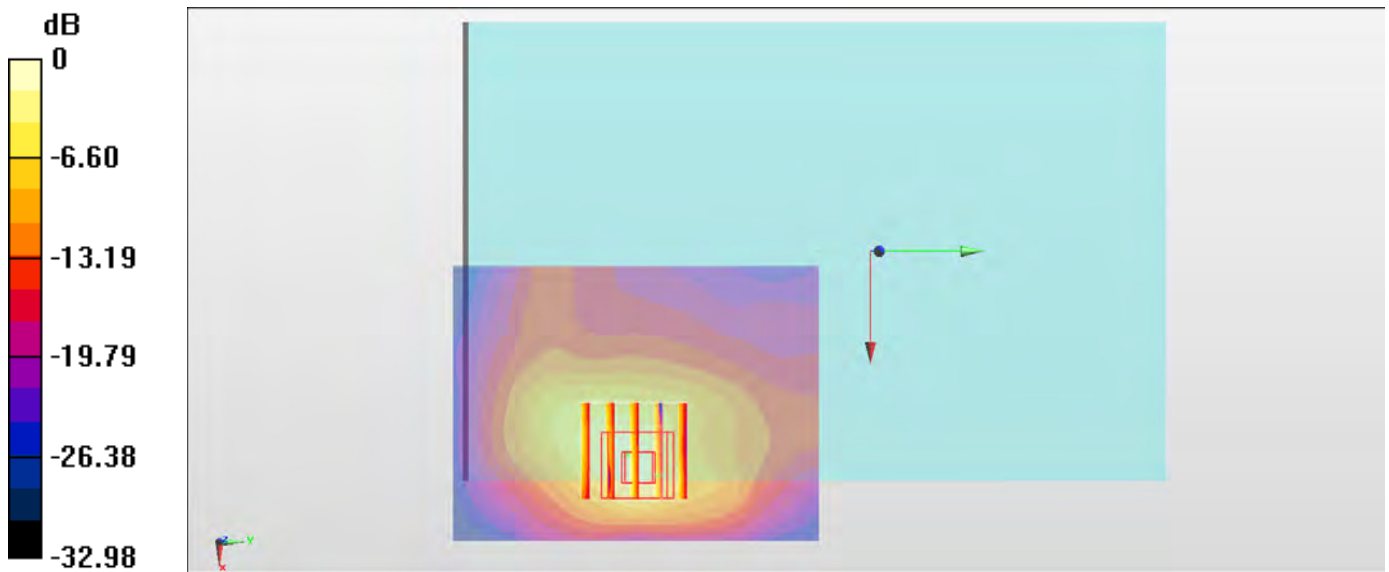

0 dB = 0.654 W/kg = -1.84 dBW/kg

#03_WCDMA II_RMC 12.2Kbps_Bottom Face_0mm_Ch9400


Communication System: WCDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: MSL_1900_160531 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.503$ S/m; $\epsilon_r = 53.928$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.78, 4.78, 4.78); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.590 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 2.00 W/kg
SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.438 W/kg
 Maximum value of SAR (measured) = 1.34 W/kg

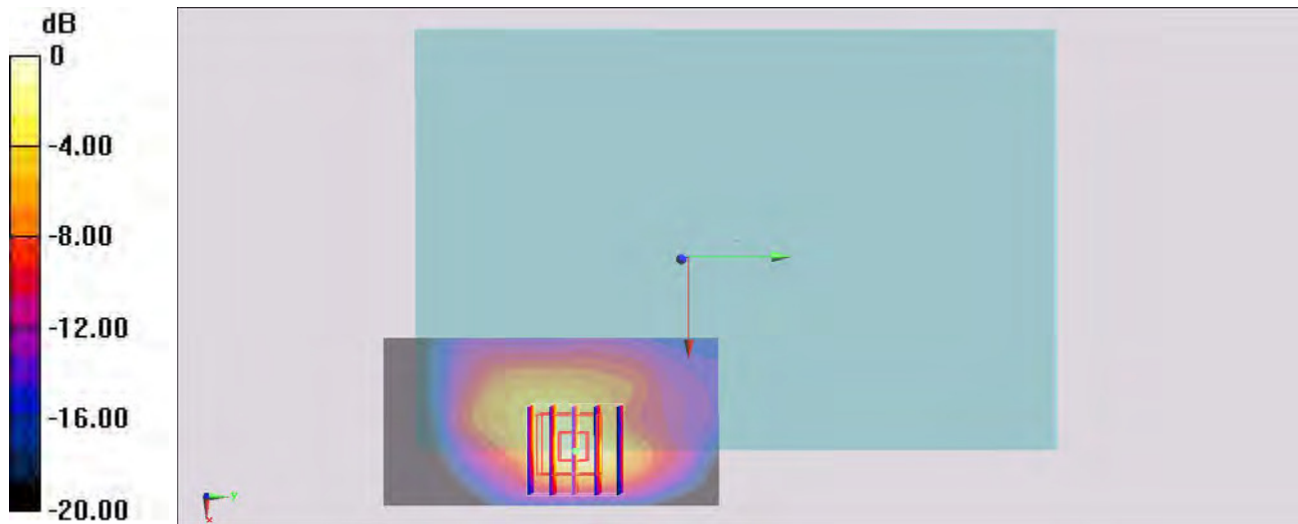

0 dB = 1.08 W/kg = 0.33 dBW/kg

#04_WCDMA IV_RMC 12.2Kbps_Bottom Face_12mm_Ch1513

Communication System: WCDMA ; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL_1750_160531 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.505$ S/m; $\epsilon_r = 55.054$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.95, 4.95, 4.95); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.557 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.67 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

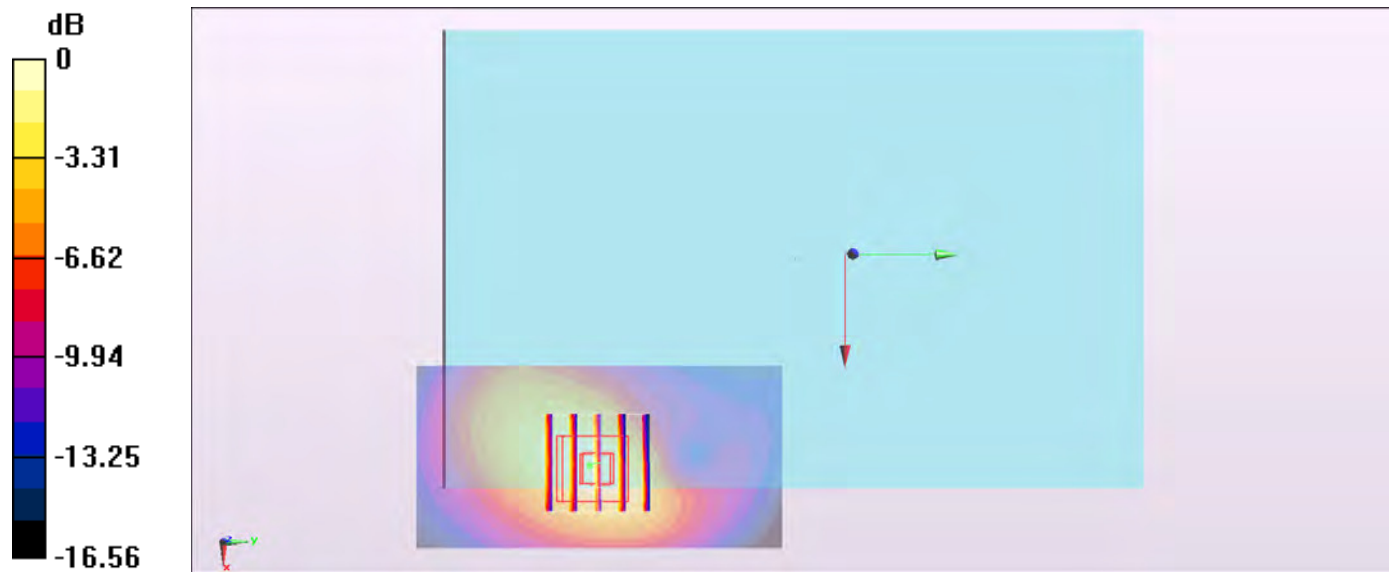

0 dB = 0.537 W/kg = -2.70 dBW/kg

#05_WCDMA V_RMC 12.2Kbps_Bottom Face_0mm_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_160601 Medium parameters used: $f = 826.4$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 57.107$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3931; ConvF(10.13, 10.13, 10.13); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2015/9/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.644 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.44 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.737 W/kg

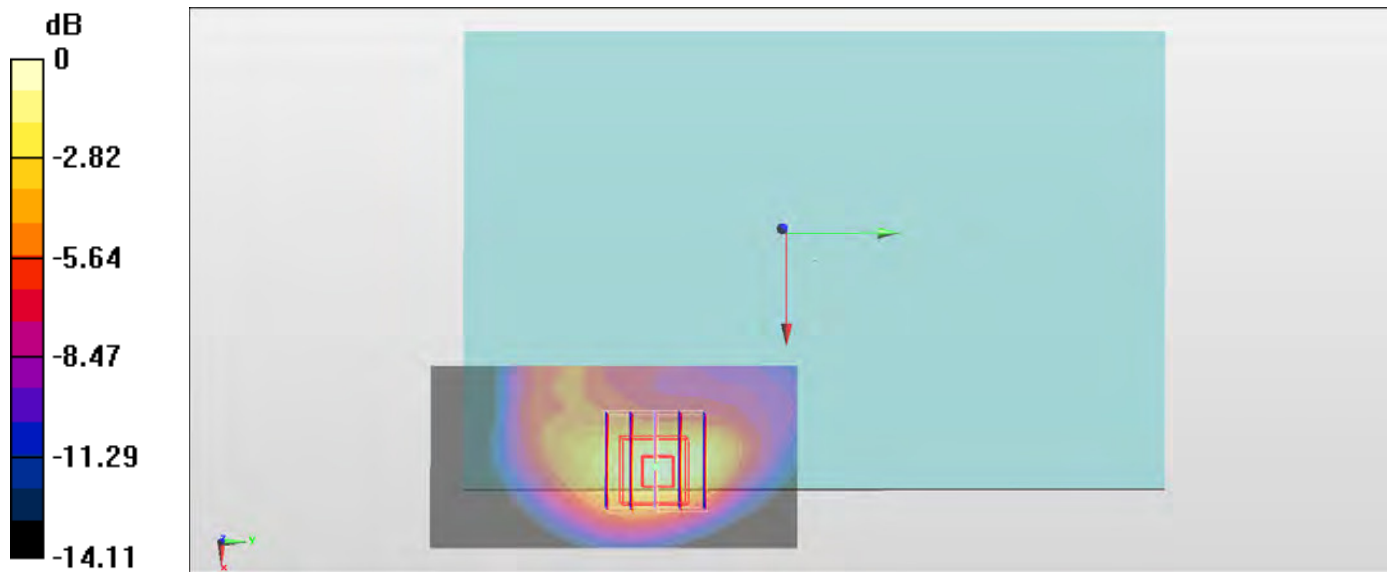

0 dB = 0.737 W/kg = -1.33 dBW/kg

#06_CDMA BC0_RTAP 153.6Kbps_Bottom Face_0mm_Ch777

Communication System: CDMA ; Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium: MSL_850_160603 Medium parameters used : $f = 848.31$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 57.147$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(6.24, 6.24, 6.24); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.33 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.693 W/kg

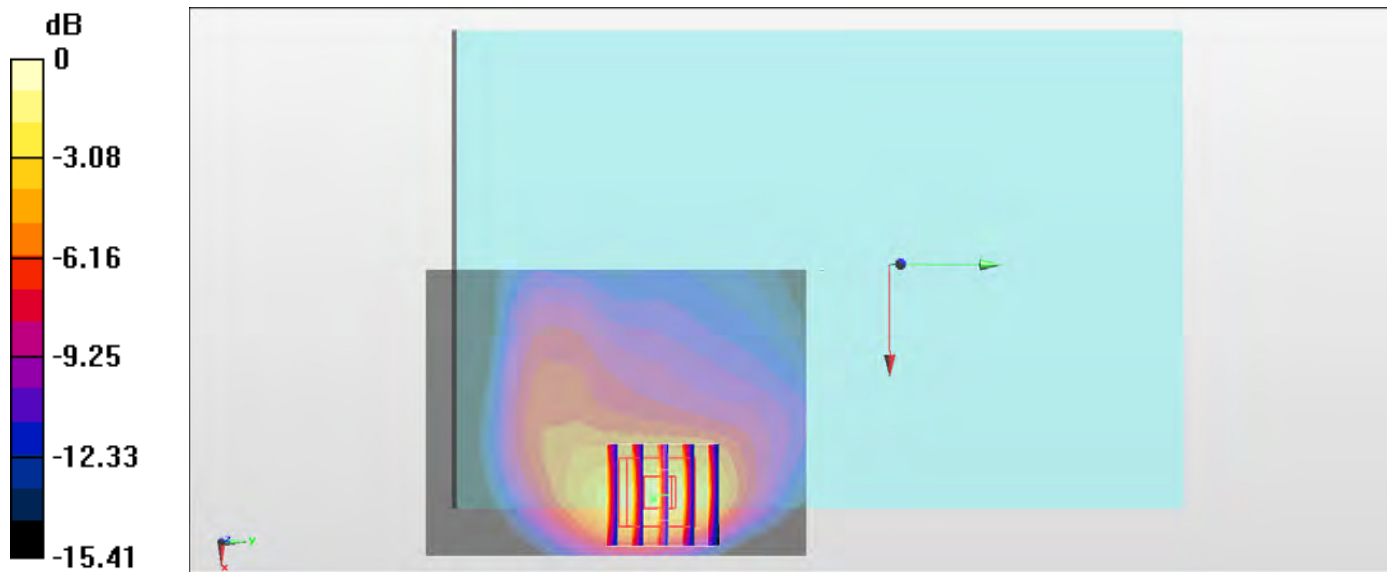

0 dB = 0.693 W/kg = -1.59 dBW/kg

#07_CDMA BC1_RTAP 153.6Kbps_Bottom Face_12mm_Ch600

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160603 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.501$ S/m; $\epsilon_r = 52.883$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.78, 4.78, 4.78); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.28 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.537 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

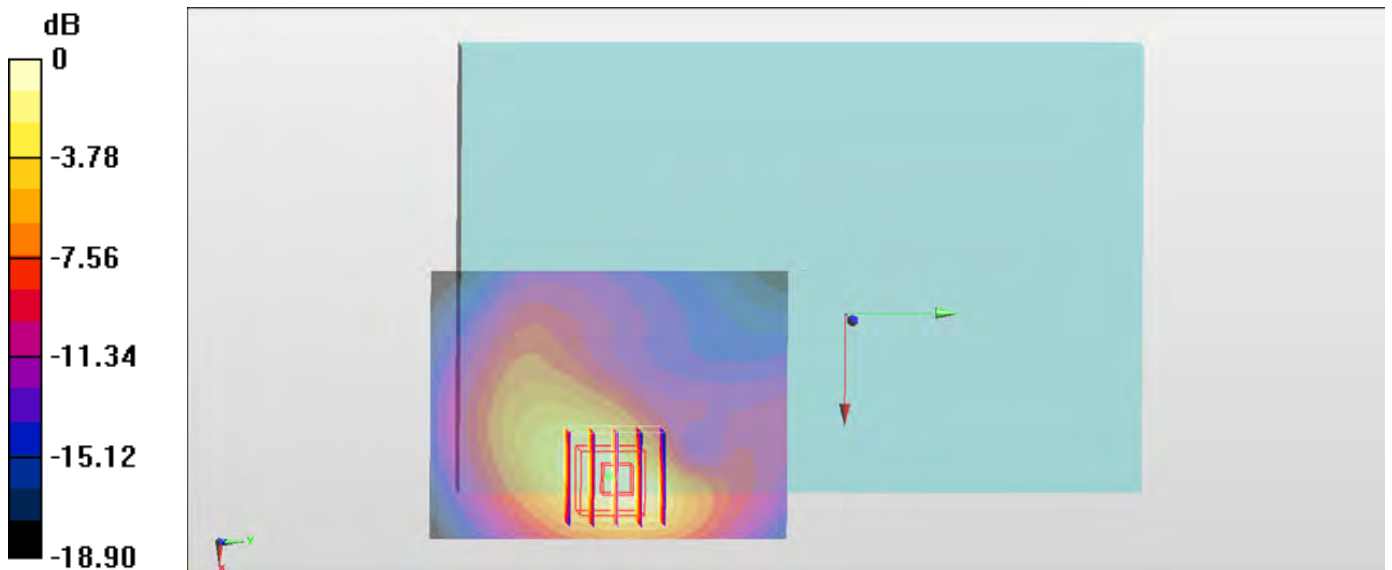

0 dB = 1.17 W/kg = 0.68 dBW/kg

#08_CDMA BC10_RTAP 153.6Kbps_Bottom Face_0mm_Ch476

Communication System: CDMA ; Frequency: 817.9 MHz; Duty Cycle: 1:1

Medium: MSL_850_160603 Medium parameters used: $f = 818 \text{ MHz}$; $\sigma = 0.955 \text{ S/m}$; $\epsilon_r = 57.387$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(6.24, 6.24, 6.24); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.602 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.05 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.568 W/kg ; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.764 W/kg

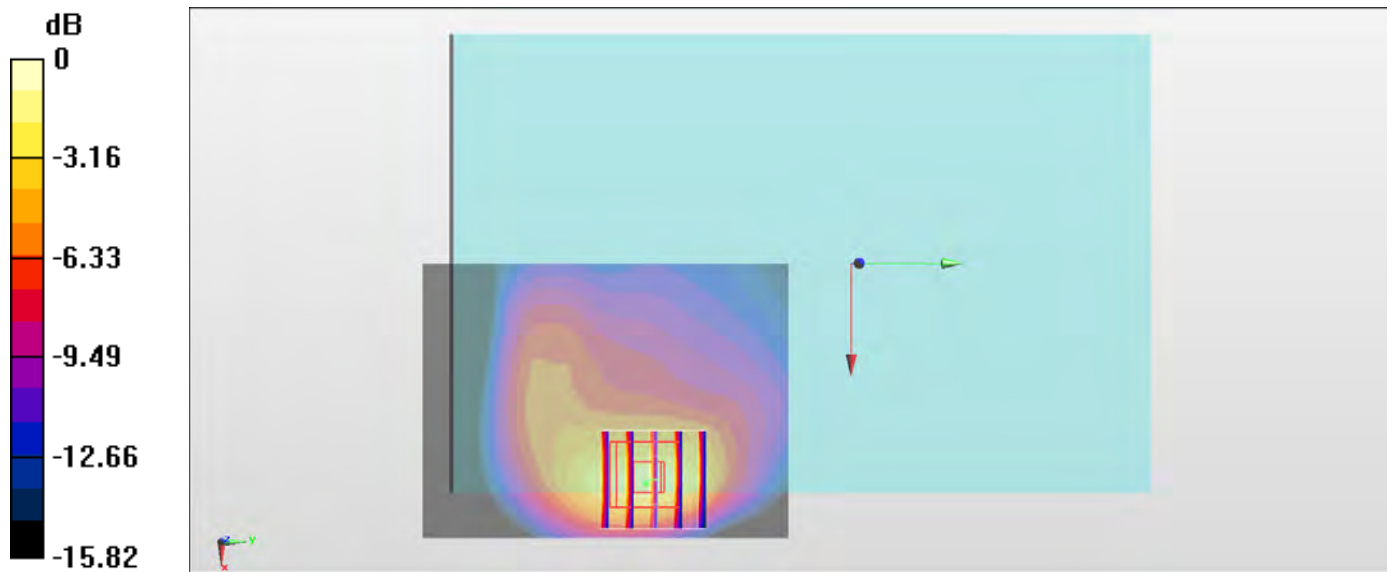

0 dB = 0.764 W/kg = -1.17 dBW/kg

#09_LTE Band 2_20M_QPSK_100_0_Bottom Face_0mm_Ch18900

Communication System: LTE ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: MSL_1900_160608 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 54.129$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(7.89, 7.89, 7.89); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.47 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Reference Value = 23.43 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 1.74 W/kg

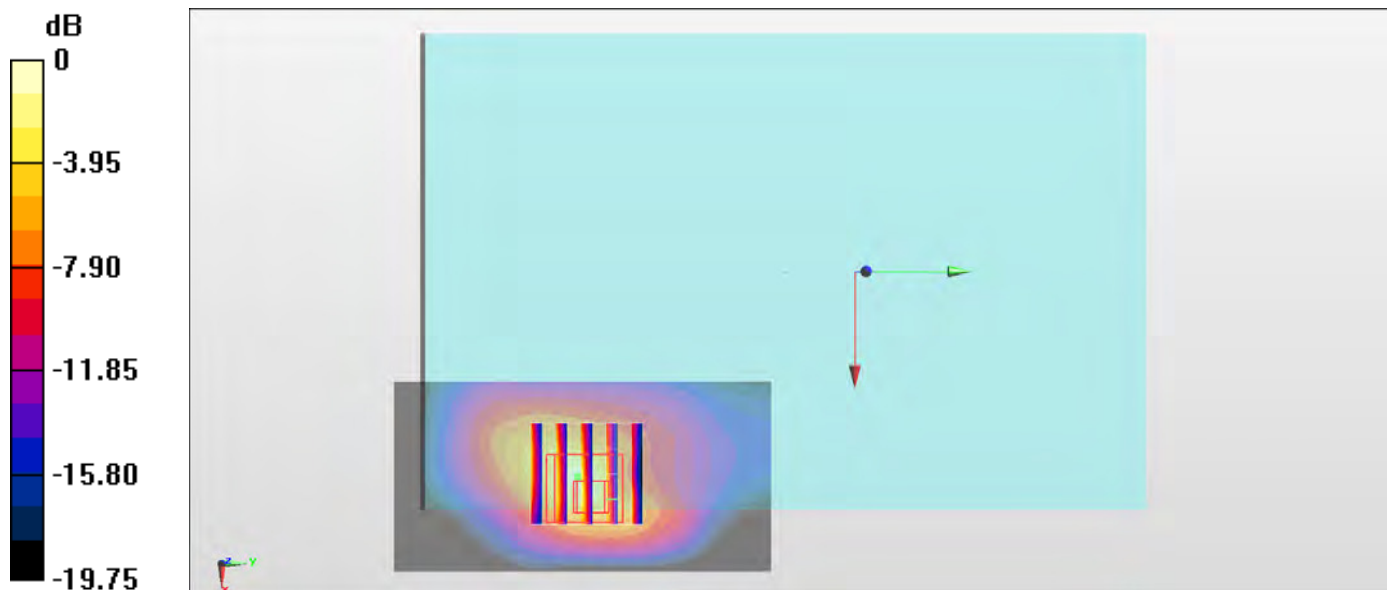

0 dB = 1.74 W/kg = 2.41 dBW/kg

#10_LTE Band 4_20M_QPSK_1_0_Bottom Face_0mm_Ch20175

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL_1750_160531 Medium parameters used : $f = 1732.5$ MHz; $\sigma = 1.483$ S/m; $\epsilon_r = 55.109$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.95, 4.95, 4.95); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.601 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.920 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.629 W/kg

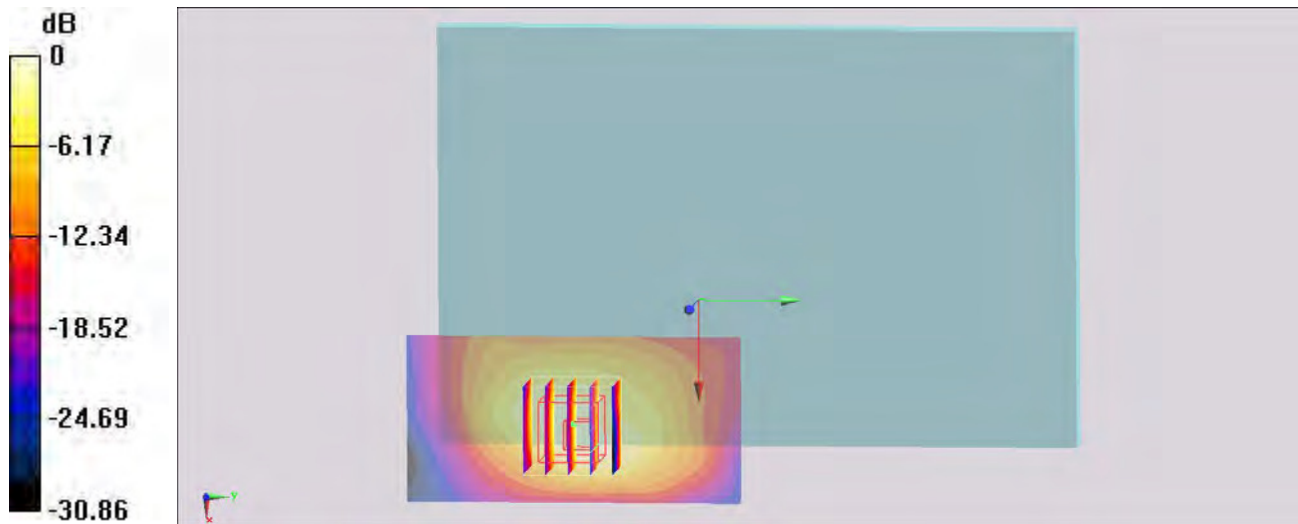

0 dB = 0.601 W/kg = -2.21 dBW/kg

#11_LTE Band 5_10M_QPSK_1_25_Bottom Face_0mm_Ch20525

Communication System: LTE ; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: MSL_850_160601 Medium parameters used: $f = 836.5$ MHz; $\sigma = 1.012$ S/m; $\epsilon_r = 57.025$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3931; ConvF(10.13, 10.13, 10.13); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2015/9/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.717 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Reference Value = 14.76 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

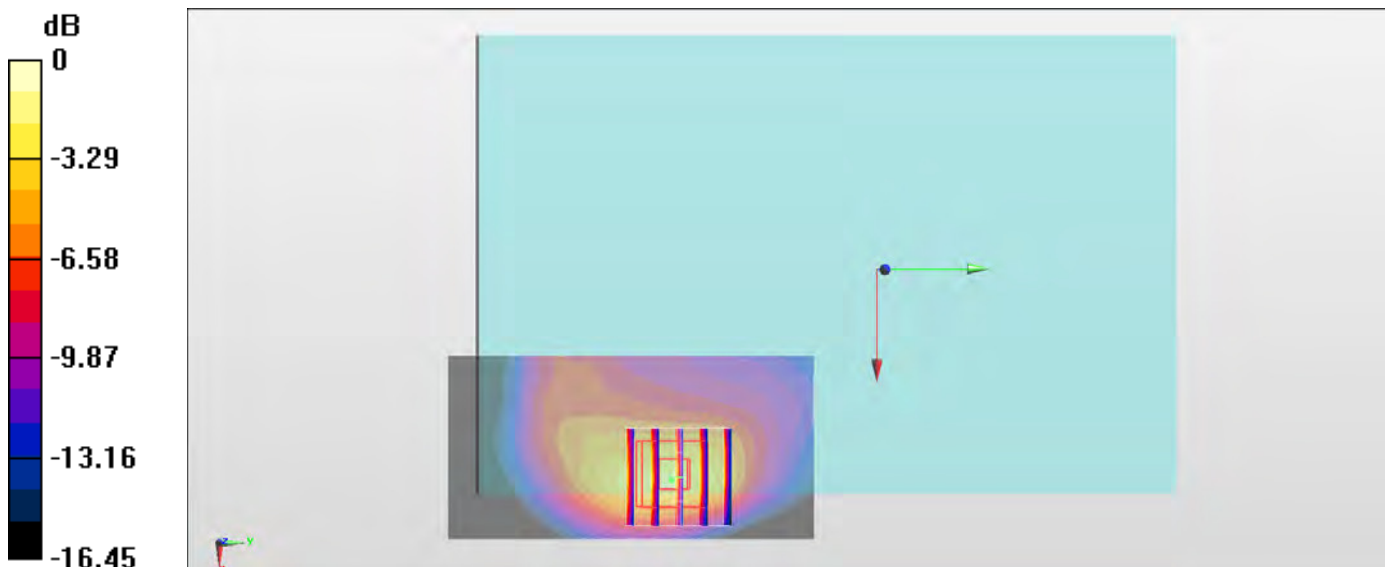

0 dB = 1.10 W/kg = 0.41 dBW/kg

#12_LTE Band 13_10M_QPSK_1_25_Bottom Face_0mm_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: MSL_750_160602 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 55.52$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration

- Probe: EX3DV4 - SN3931; ConvF(10.29, 10.29, 10.29); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2015/9/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.734 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8 \text{ mm}$, $dy=8 \text{ mm}$, $dz=5 \text{ mm}$

Reference Value = 18.40 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.645 W/kg ; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

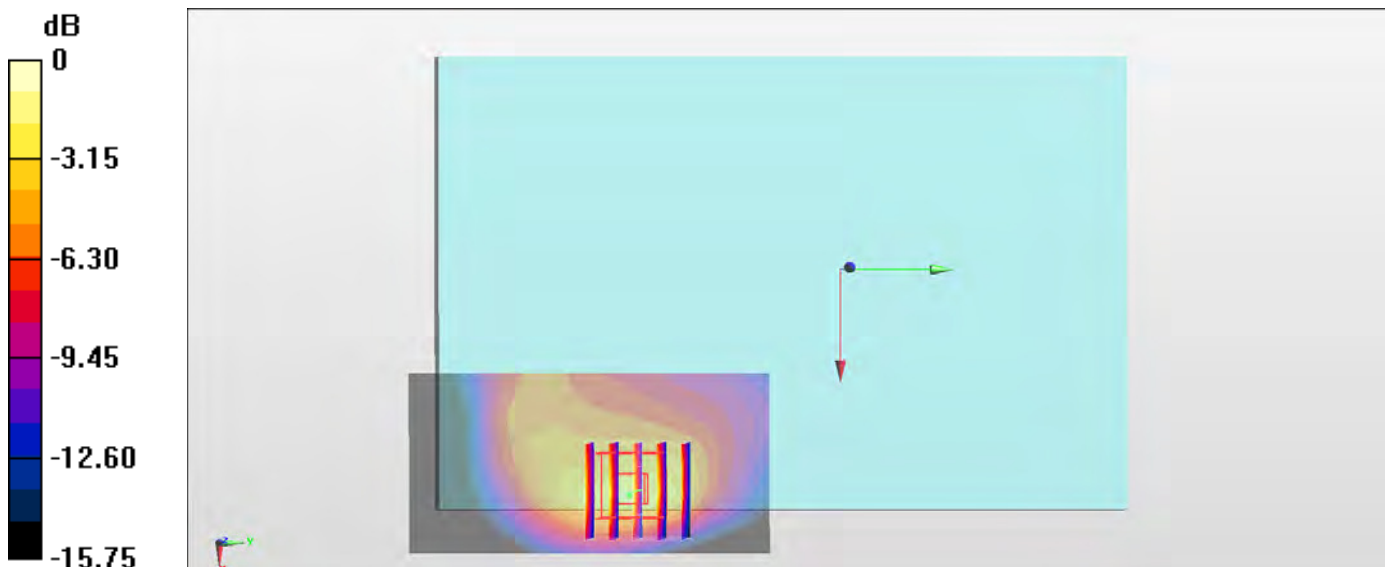

0 dB = 1.12 W/kg = 0.49 dBW/kg

#13_LTE Band 17_10M_QPSK_1_25_Bottom Face_0mm_Ch23790

Communication System: LTE ; Frequency: 710 MHz;Duty Cycle: 1:1

Medium: MSL_750_160602 Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 56.298$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration

- Probe: EX3DV4 - SN3931; ConvF(10.29, 10.29, 10.29); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2015/9/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500\text{mm}$

Maximum value of SAR (interpolated) = 0.396 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.91 V/m ; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.341 W/kg ; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.596 W/kg

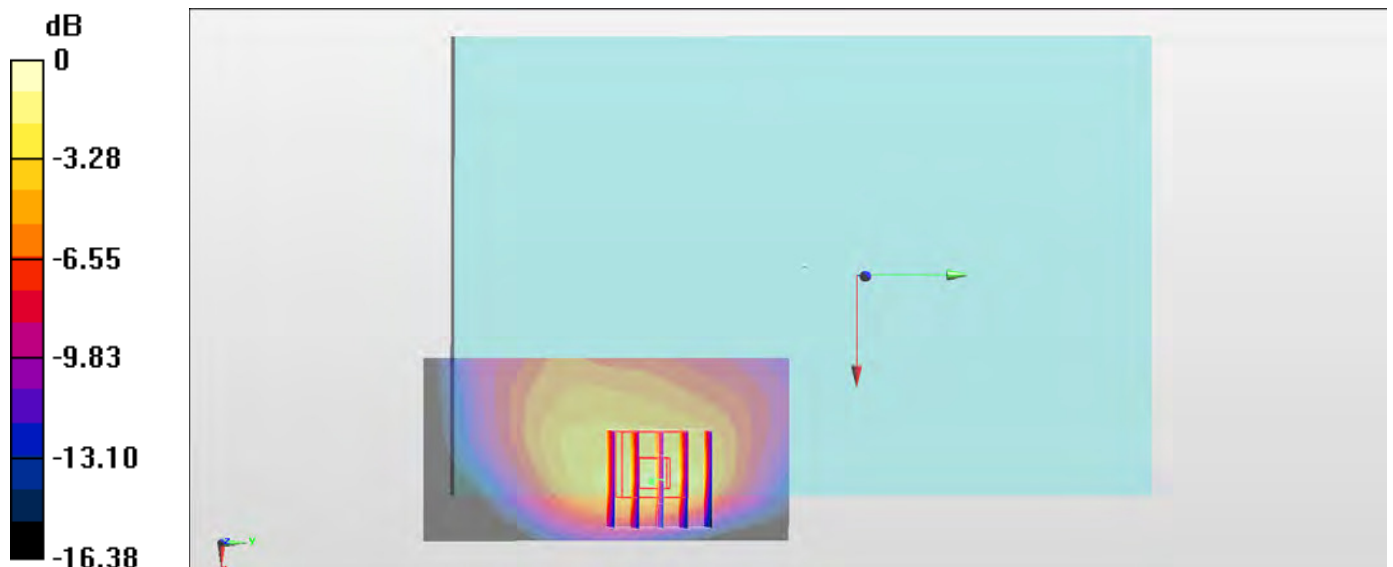

0 dB = $0.596 \text{ W/kg} = -2.25 \text{ dBW/kg}$

#14_LTE Band 25_20M_QPSK_1_0_Bottom Face_12mm_Ch26340

Communication System: LTE ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: MSL_1900_160531 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.503$ S/m; $\epsilon_r = 53.928$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.78, 4.78, 4.78); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.892 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.898 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

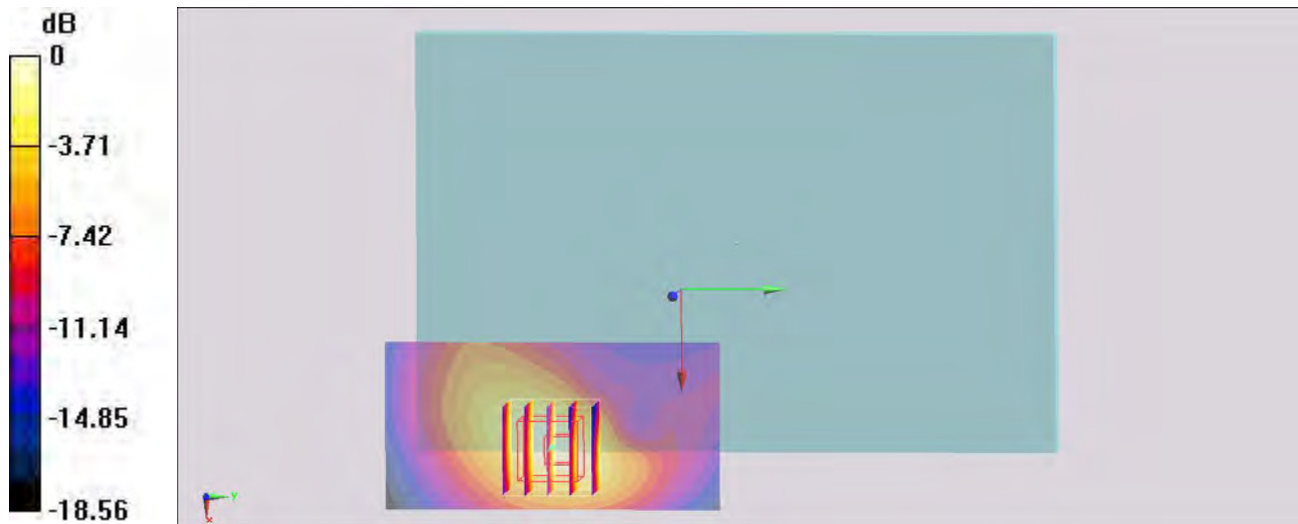

0 dB = 1.08 W/kg = 0.33 dBW/kg

#15_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0mm_Ch6;Ant 2

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1.014

Medium: MSL_2450_160604 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 53.484$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: ES3DV3 - SN3270; ConvF(4.37, 4.37, 4.37); Calibrated: 2015/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2015/11/23
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (81x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.89 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

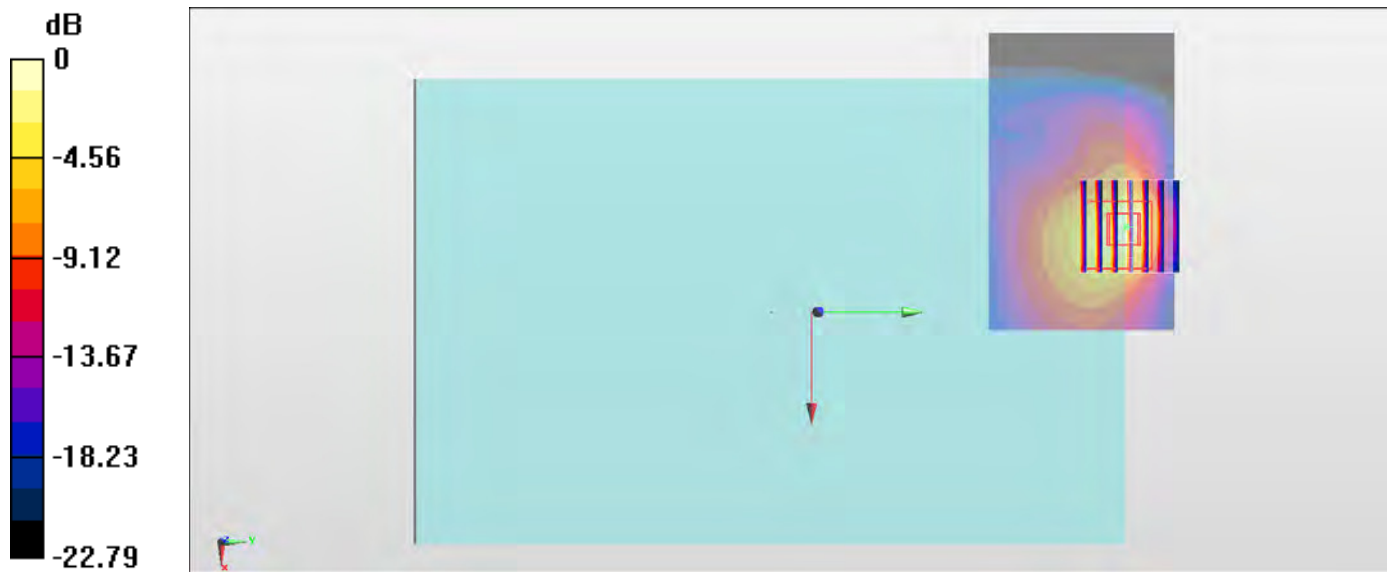

0 dB = 1.26 W/kg = 1.00 dBW/kg

#16_WLAN5GHz_802.11n-HT40 MCS0_Edge 2_0mm_Ch54;Ant 2

Communication System: 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1.149

Medium: MSL_5G_160604 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.538$ S/m; $\epsilon_r = 47.066$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(4.42, 4.42, 4.42); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (51x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.57 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.82 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 4.63 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 2.59 W/kg

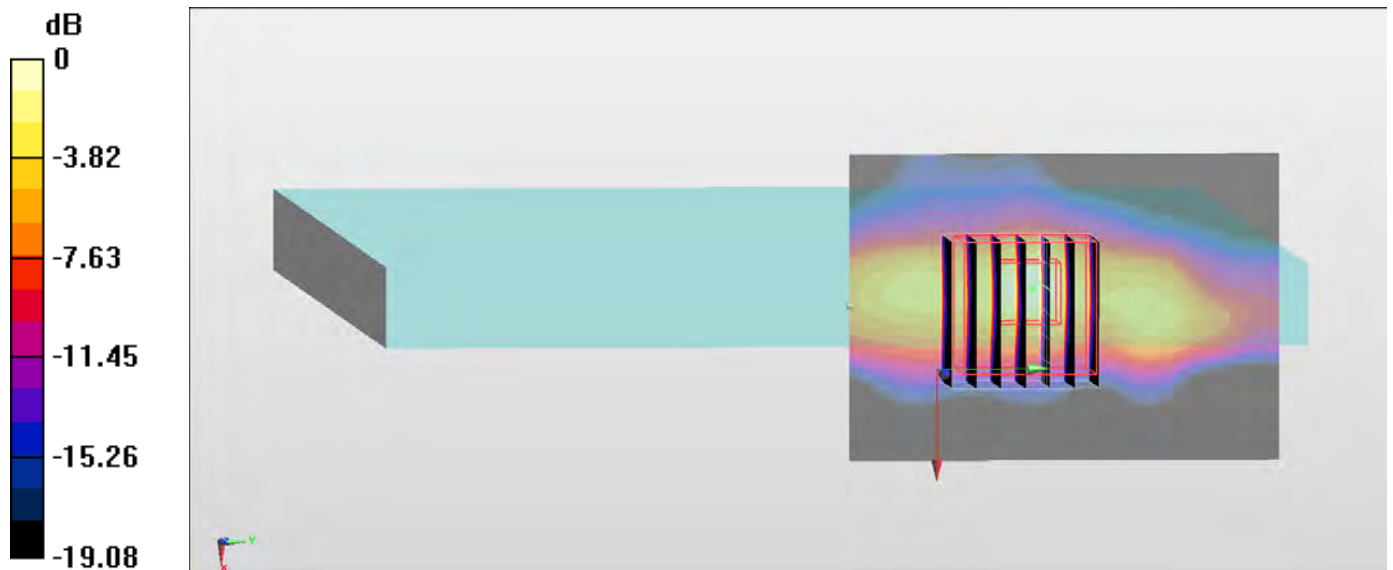

0 dB = 2.59 W/kg = 4.13 dBW/kg

#17_WLAN5GHz_802.11n-HT40 MCS0_Edge 2_0mm_Ch134;Ant 2

Communication System: 802.11n; Frequency: 5670 MHz; Duty Cycle: 1:1.149

Medium: MSL_5G_160604 Medium parameters used: $f = 5670$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 46.366$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(3.81, 3.81, 3.81); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/2/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.60 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.28 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.52 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 2.66 W/kg

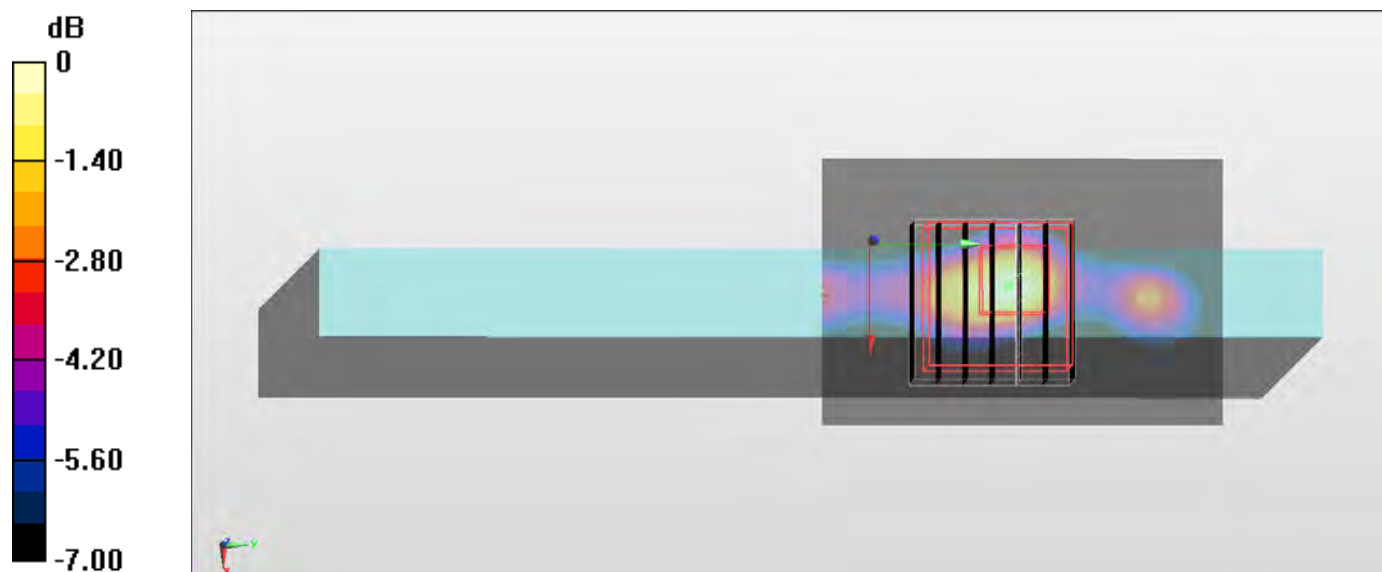

0 dB = 2.66 W/kg = 4.25 dBW/kg

#18_WLAN5GHz_802.11n-HT40 MCS0_Edge 2_0mm_Ch159;Ant 2

Communication System: 802.11n; Frequency: 5795 MHz; Duty Cycle: 1:1.149

Medium: MSL_5G_160604 Medium parameters used: $f = 5795$ MHz; $\sigma = 6.232$ S/m; $\epsilon_r = 46.189$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(3.92, 3.92, 3.92); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (41x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.61 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.61 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 4.59 W/kg

SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 2.58 W/kg

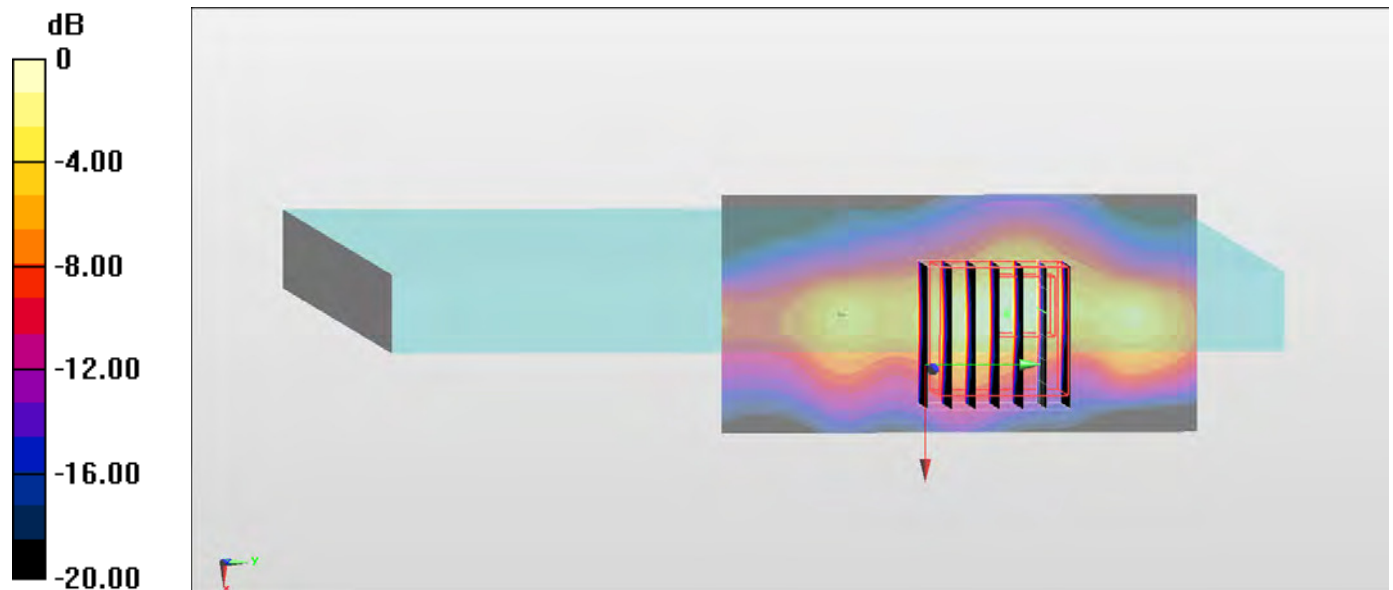

0 dB = 2.58 W/kg = 4.12 dBW/kg

#19_Bluetooth_1Mbps_Bottom Face_0mm_Ch39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.2

Medium: MSL_2450_160604 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 53.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3955; ConvF(7.53, 7.53, 7.53); Calibrated: 2015/11/24;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2016/5/12
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Area Scan (81x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.409 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.096 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.416 W/kg

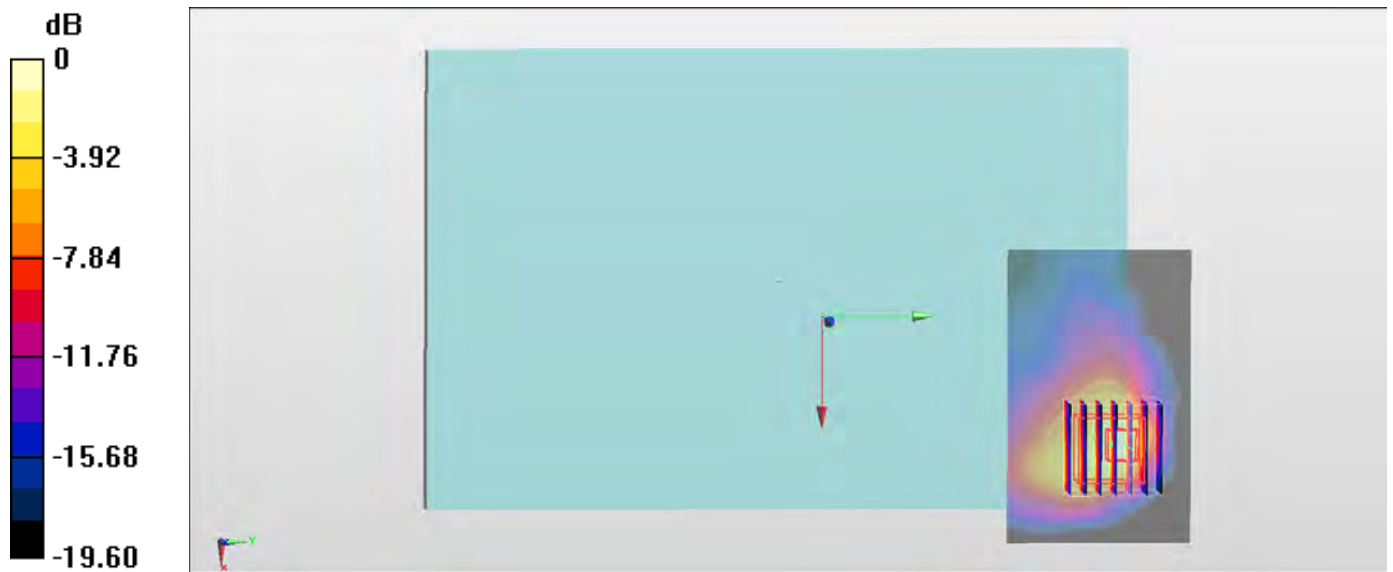

0 dB = 0.416 W/kg = -3.81 dBW/kg



Appendix C. DASYS Calibration Certificate

The DASYS calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton-TW (Auden)**

Certificate No: **D750V3-1012_May16**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1012**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 18, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: May 20, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.6 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.21 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.40 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.4 \pm 6 %	1.00 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.72 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.73 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.0 Ω + 1.1 j Ω
Return Loss	- 28.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.0 Ω - 0.6 j Ω
Return Loss	- 44.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.036 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 29, 2009

DASY5 Validation Report for Head TSL

Date: 18.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1012

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.28, 10.28, 10.28); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.14 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.76 W/kg

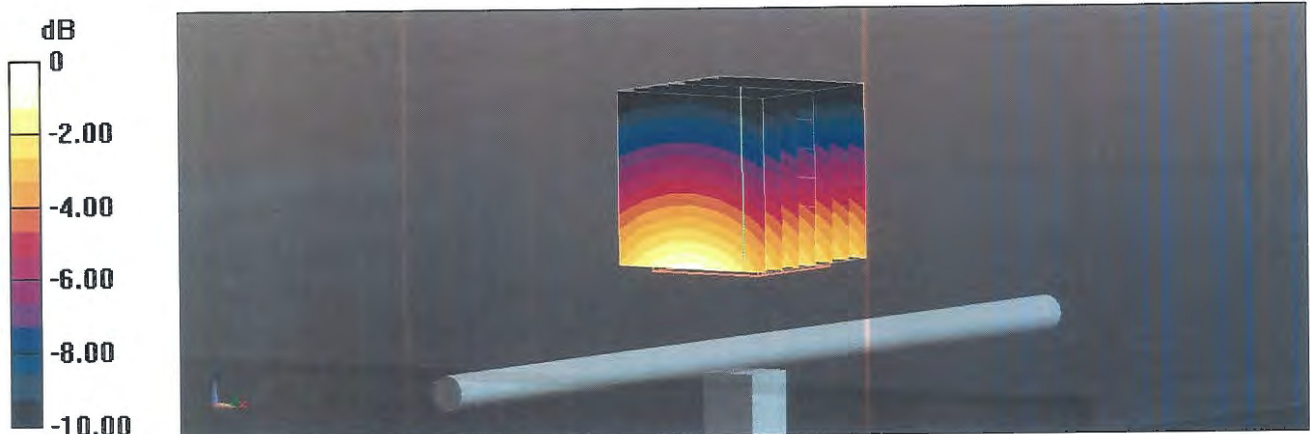

Impedance Measurement Plot for Head TSL

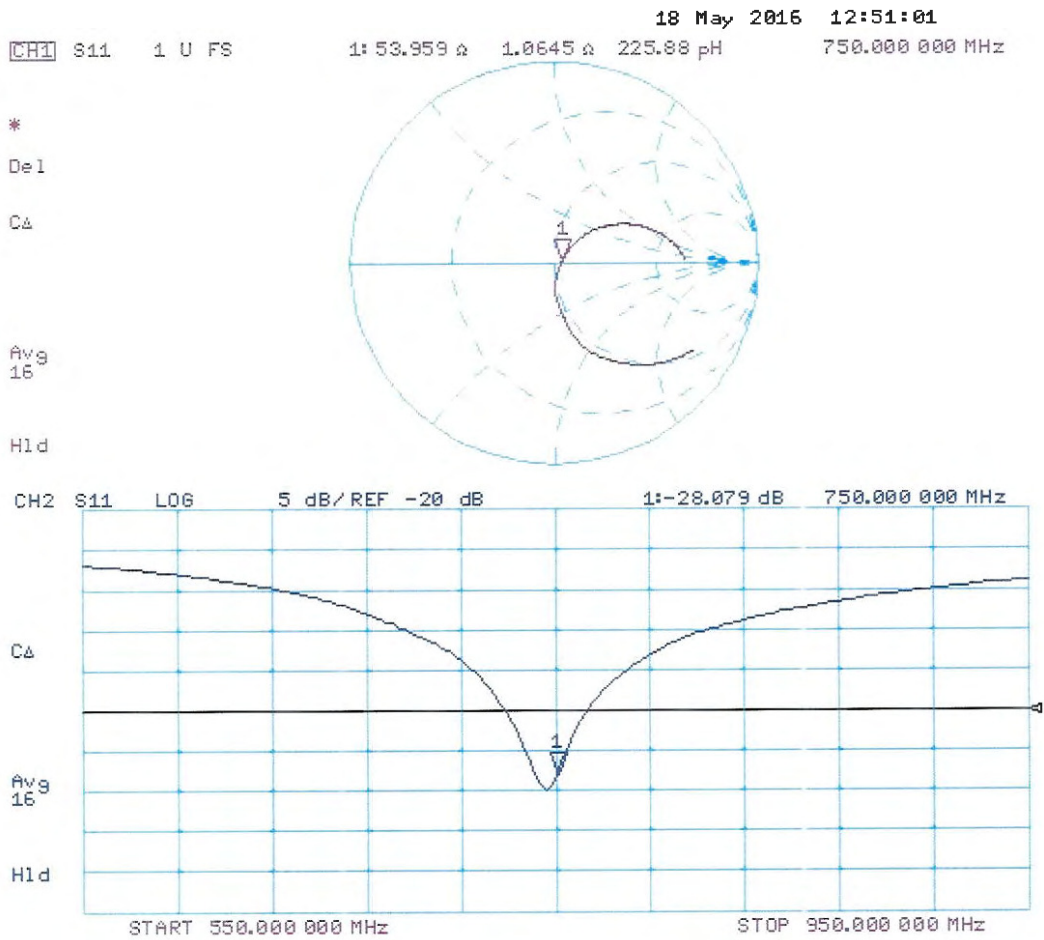

DASY5 Validation Report for Body TSL

Date: 18.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1012

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.15 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.47 W/kg

Maximum value of SAR (measured) = 2.98 W/kg

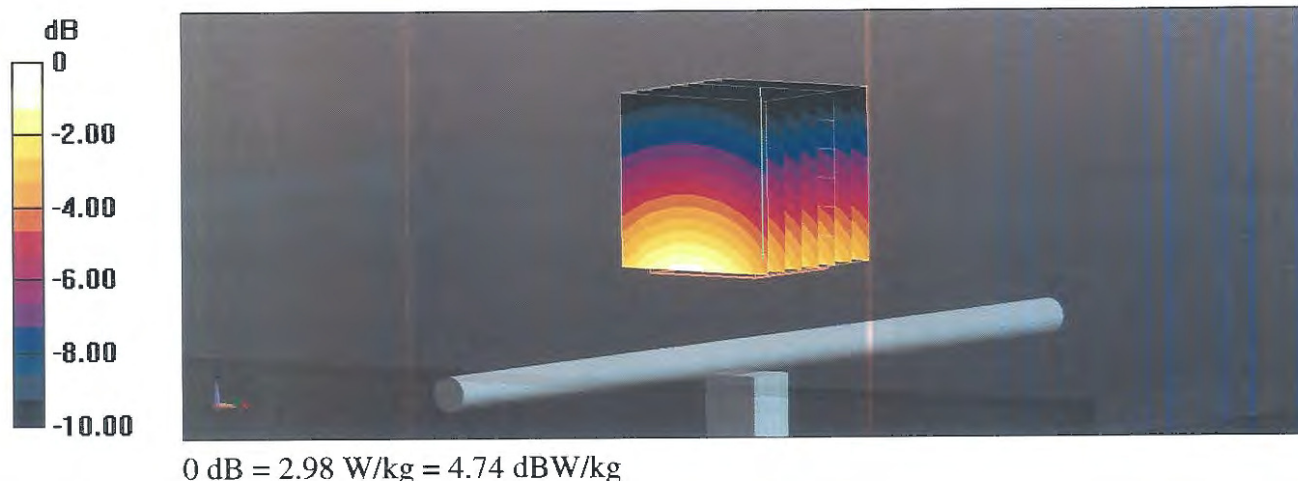

Impedance Measurement Plot for Body TSL

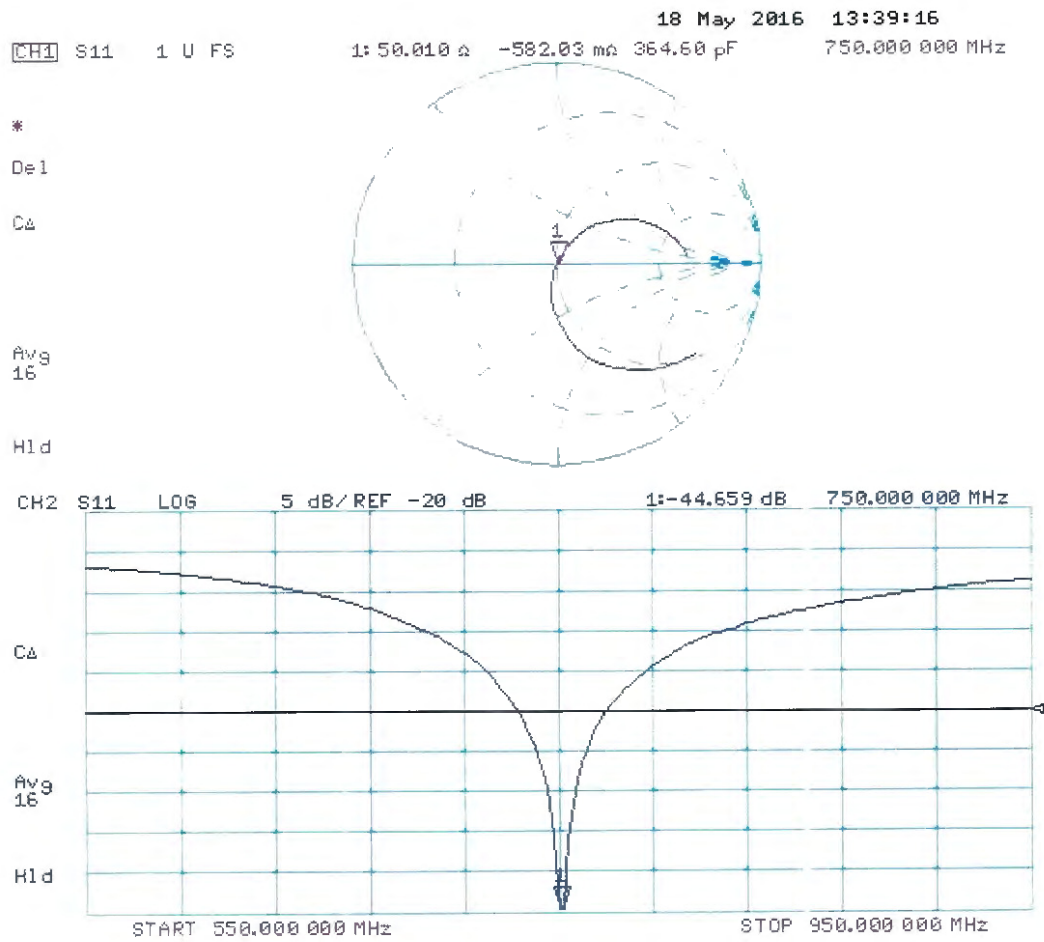



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton-TW (Auden)**

Certificate No: **D835V2-499_Mar16**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 499**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **March 21, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	US37292783	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	MY41092317	07-Oct-15 (No. 217-02223)	Oct-16
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100972	15-Jun-15 (in house check Jun-15)	In house check: Jun-18
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Michael Weber** Name: **Michael Weber** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature

Issued: March 21, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.