



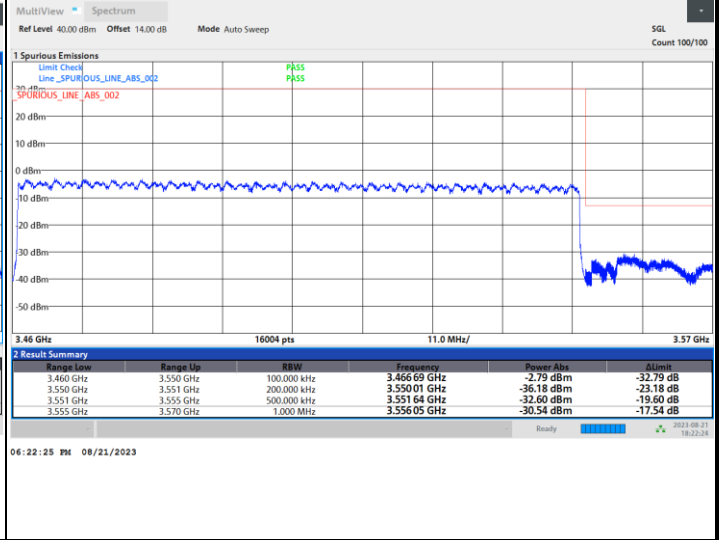

FR1 n77 / 90MHz / CP OFDM / QPSK

Lowest Band Edge / Full RB



Highest Band Edge / Full RB

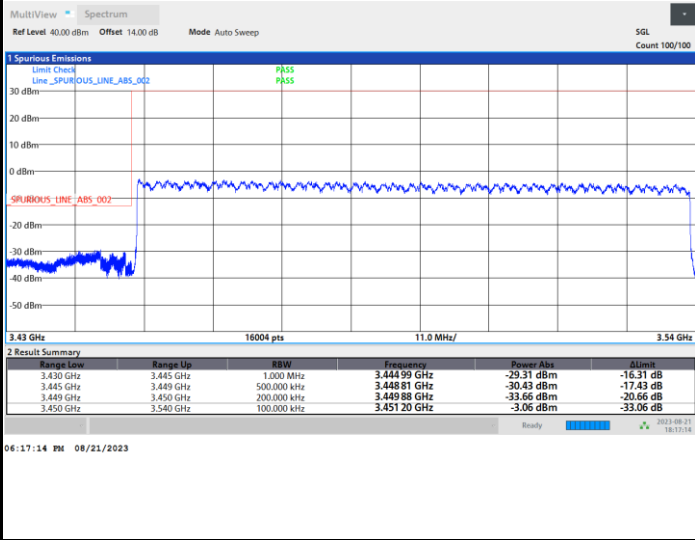

FR1 n77 / 90MHz / CP OFDM / 16QAM

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

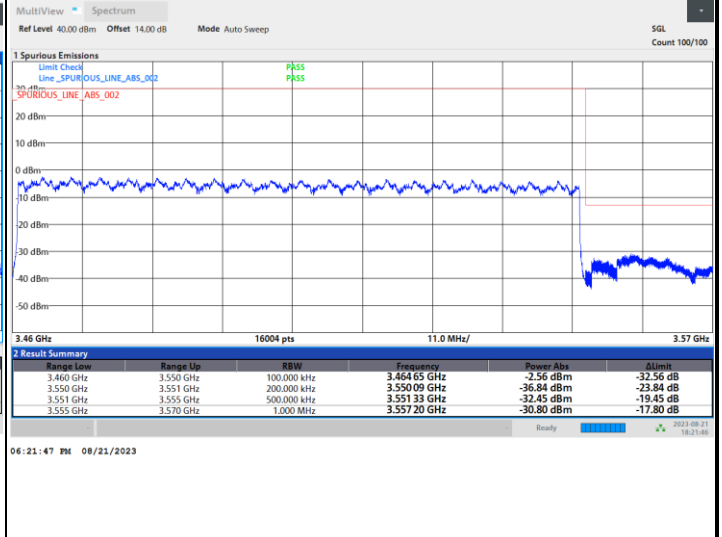
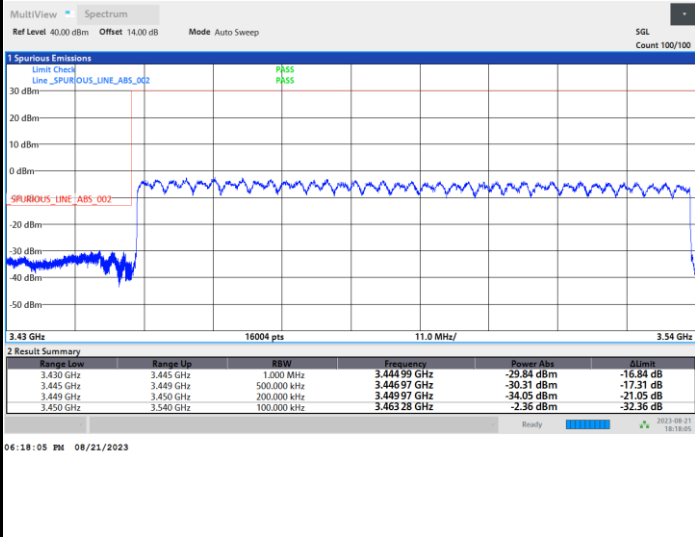




FR1 n77 / 90MHz / CP OFDM / 64QAM

Lowest Band Edge / Full RB



Highest Band Edge / Full RB

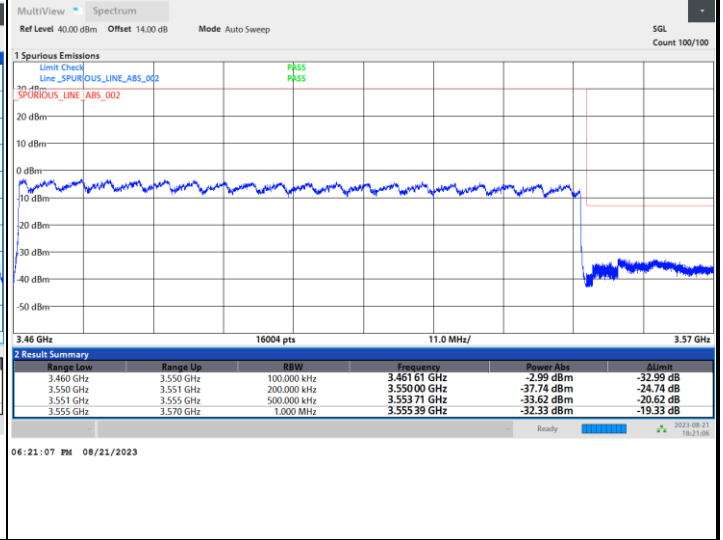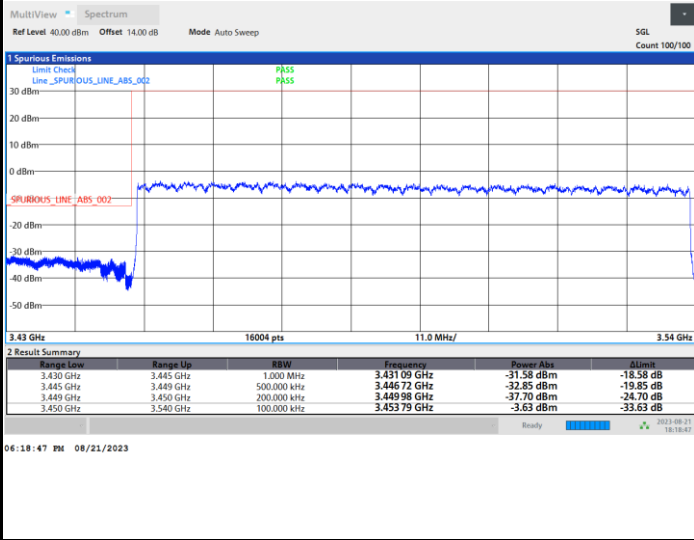

FR1 n77 / 90MHz / CP OFDM / 256QAM

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

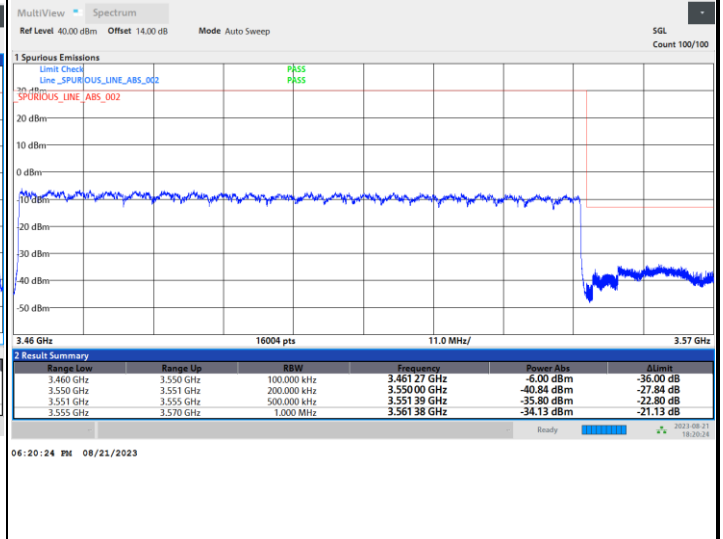
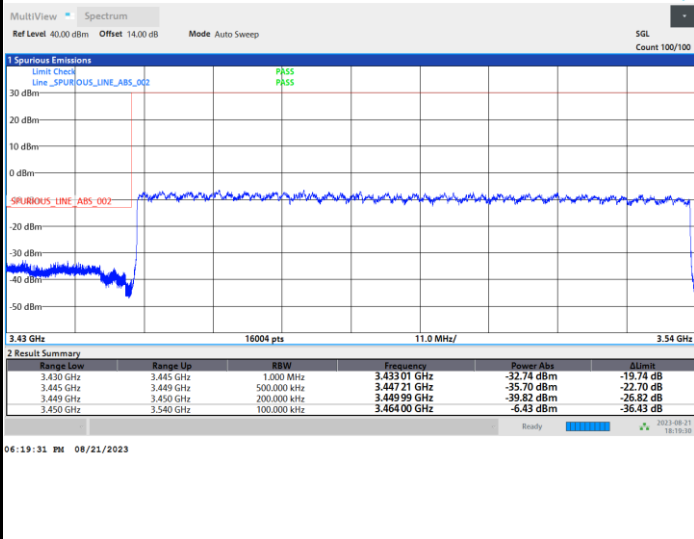




FR1 n77 / 100MHz / CP OFDM / QPSK

Lowest Band Edge / Full RB



Highest Band Edge / Full RB

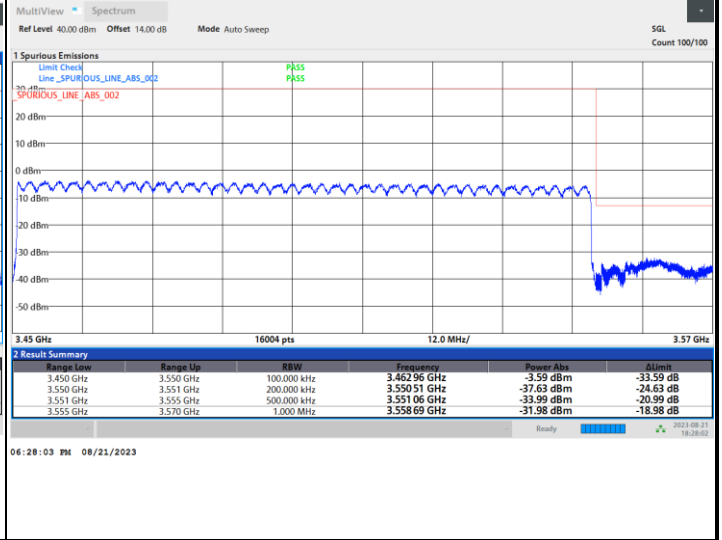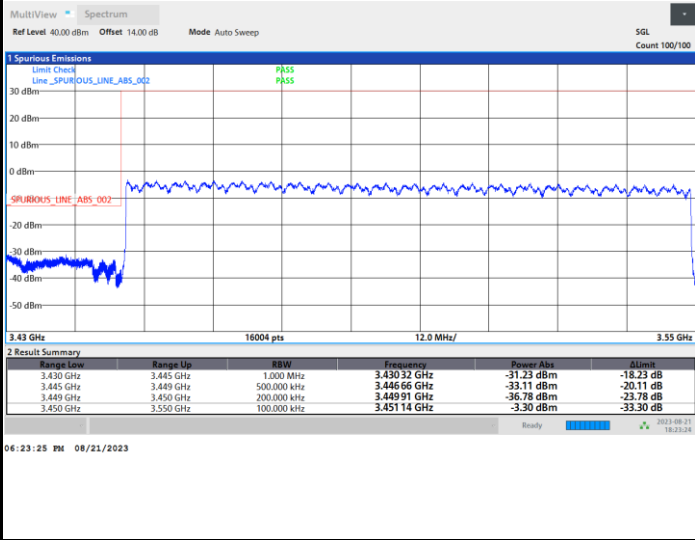

FR1 n77 / 100MHz / CP OFDM / 16QAM

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

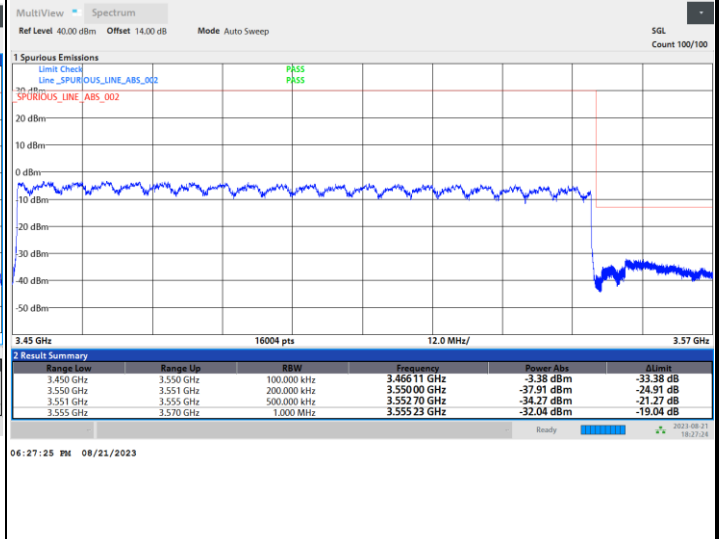
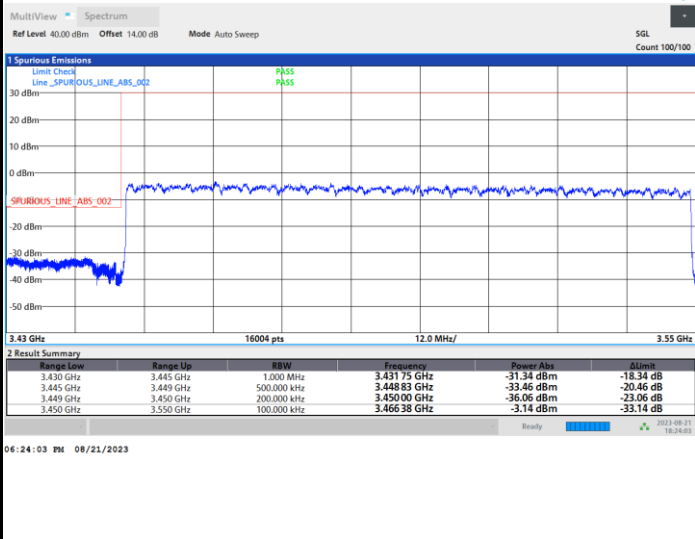




FR1 n77 / 100MHz / CP OFDM / 64QAM

Lowest Band Edge / Full RB



Highest Band Edge / Full RB

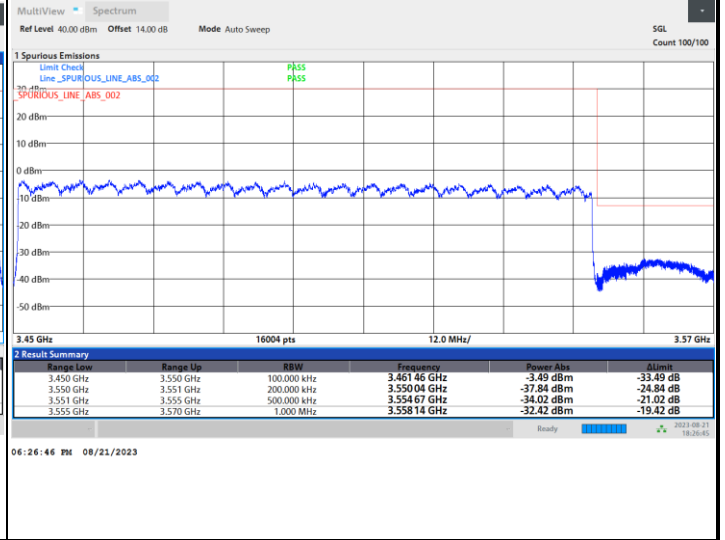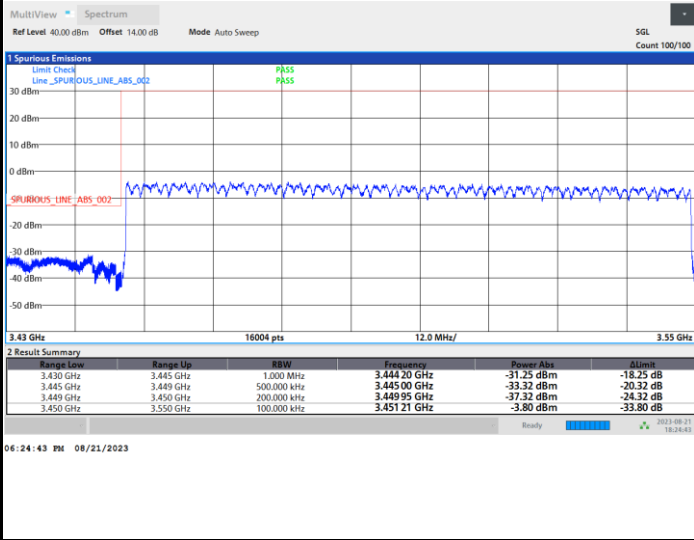

FR1 n77 / 100MHz / CP OFDM / 256QAM

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

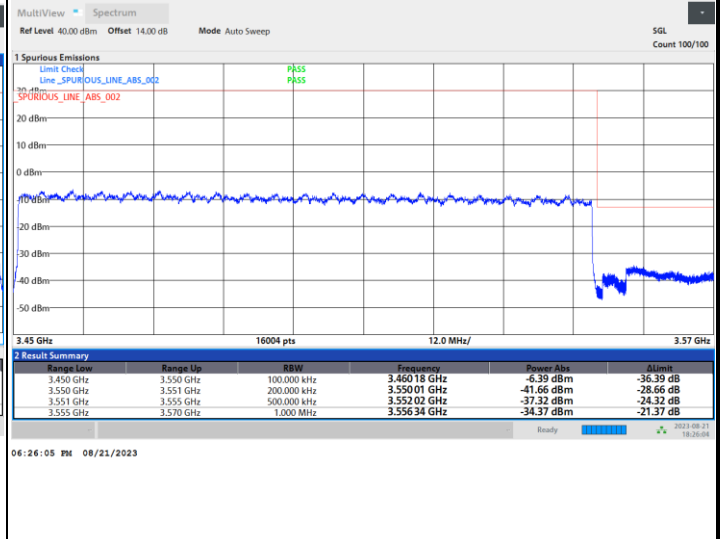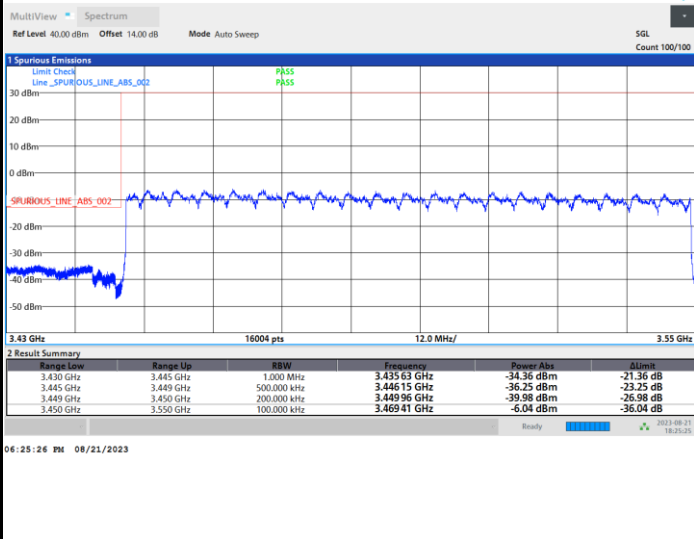





Conducted Spurious Emission


FR1 n77 / 20MHz / CP OFDM / QPSK / 1RB1

Lowest Channel

Middle Channel

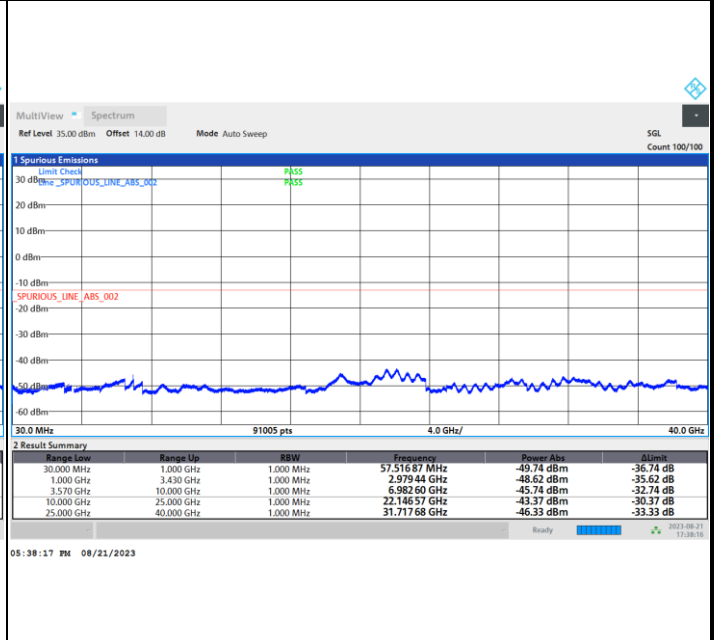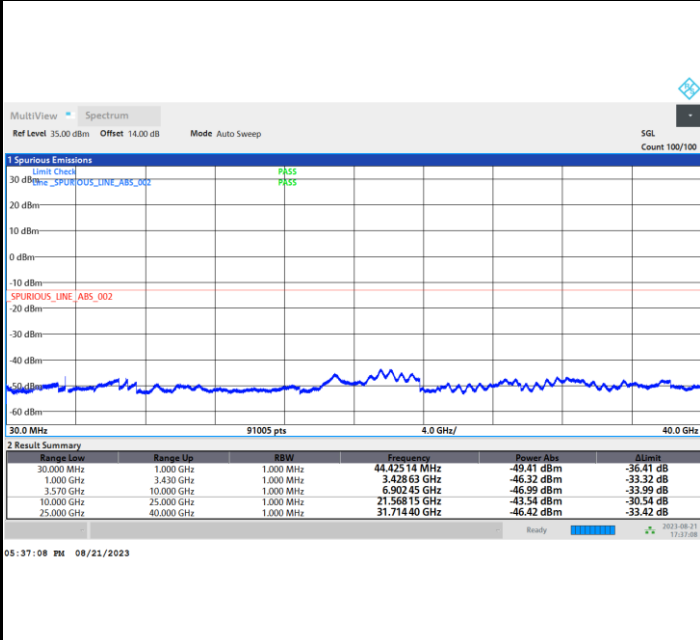

Highest Channel

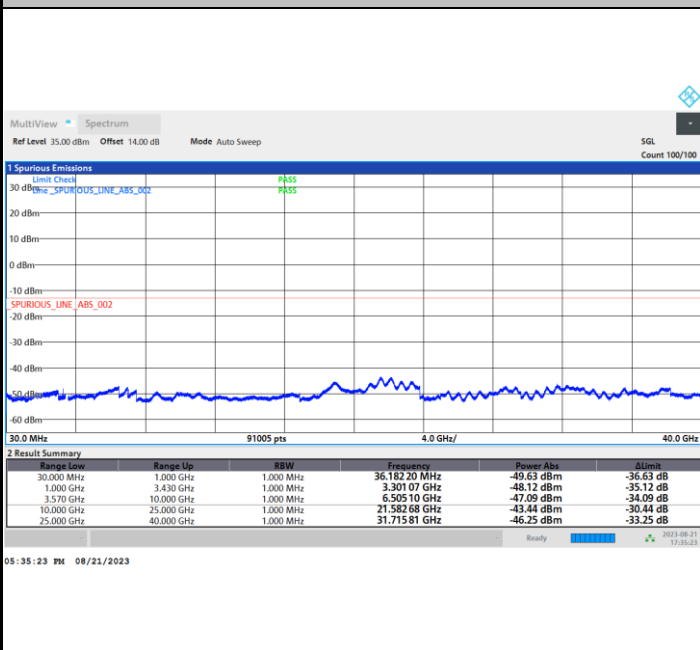



Frequency Stability

Test Conditions		FR1 n77 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0010	PASS
40	Normal Voltage	0.0033	
30	Normal Voltage	0.0025	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0028	
0	Normal Voltage	0.0004	
-10	Normal Voltage	0.0011	
-20	Normal Voltage	0.0015	
-30	Normal Voltage	0.0000	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0028	

Note:

- 1. Normal Voltage = 4.05 V. ; Battery End Point (BEP) = 3.85 V. ; Maximum Voltage = 4.35 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

<Ant. 3>

5G NR n77

5G NR n77 / 90MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6903	-40.84	-13	-27.84	-65.37	-48.36	1.29	10.95	H
	10355	-41.77	-13	-28.77	-71.65	-49.85	1.54	11.77	H
	13807	-38.55	-13	-25.55	-73.19	-47.30	1.88	12.78	H
	20710	-69.75	-13	-56.75	-76.6	-84.12	2.34	18.86	H
	24162	-67.41	-13	-54.41	-77.74	-82.48	2.28	19.50	H
	27614	-66.69	-13	-53.69	-79.1	-81.30	2.70	19.45	H
	6903	-42.62	-13	-29.62	-68.58	-50.14	1.29	10.95	V
	10355	-43.21	-13	-30.21	-71.84	-51.29	1.54	11.77	V
	13807	-38.30	-13	-25.30	-72.85	-47.05	1.88	12.78	V
	20710	-69.37	-13	-56.37	-76.62	-83.74	2.34	18.86	V
	24162	-66.50	-13	-53.50	-77.52	-81.57	2.28	19.50	V
	27614	-66.20	-13	-53.20	-78.95	-80.81	2.70	19.45	V
Middle	6913	-47.67	-13	-34.67	-72.2	-55.20	1.29	10.97	H
	10370	-41.96	-13	-28.96	-71.87	-50.05	1.54	11.77	H
	13827	-37.93	-13	-24.93	-72.51	-46.68	1.87	12.77	H
	20740	-69.90	-13	-56.90	-76.77	-84.24	2.36	18.85	H
	24197	-67.23	-13	-54.23	-77.58	-82.30	2.28	19.50	H
	27654	-65.71	-13	-52.71	-77.99	-80.30	2.69	19.44	H
	6913	-46.45	-13	-33.45	-72.41	-53.98	1.29	10.97	V
	10370	-43.49	-13	-30.49	-72.14	-51.58	1.54	11.77	V
	13827	-38.46	-13	-25.46	-72.97	-47.21	1.87	12.77	V
	20740	-69.34	-13	-56.34	-76.6	-83.68	2.36	18.85	V
	24197	-66.79	-13	-53.79	-77.81	-81.86	2.28	19.50	V
	27654	-65.09	-13	-52.09	-77.72	-79.68	2.69	19.44	V



Highest	6923	-47.93	-13	-34.93	-72.46	-55.48	1.29	10.98	H
	10385	-41.78	-13	-28.78	-71.71	-49.87	1.54	11.78	H
	13847	-38.76	-13	-25.76	-73.3	-47.51	1.87	12.76	H
	20770	-69.97	-13	-56.97	-76.84	-84.28	2.39	18.85	H
	24232	-67.58	-13	-54.58	-77.94	-82.65	2.28	19.50	H
	27694	-66.91	-13	-53.91	-79.08	-81.49	2.69	19.42	H
	6923	-46.45	-13	-33.45	-72.41	-54.00	1.29	10.98	V
	10385	-42.96	-13	-29.96	-71.62	-51.05	1.54	11.78	V
	13847	-38.61	-13	-25.61	-73.09	-47.36	1.87	12.76	V
	20770	-69.38	-13	-56.38	-76.64	-83.69	2.39	18.85	V
	24232	-67.18	-13	-54.18	-78.21	-82.25	2.28	19.50	V
	27694	-66.26	-13	-53.26	-78.79	-80.84	2.69	19.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<SRS Antenna>
<Ant. 2>

5G NR n77

5G NR n77 / 90MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6903	-47.94	-13	-34.94	-72.47	-55.46	1.29	10.95	H
	10355	-41.39	-13	-28.39	-71.27	-49.47	1.54	11.77	H
	13807	-39.26	-13	-26.26	-73.9	-48.01	1.88	12.78	H
	20710	-69.94	-13	-56.94	-76.79	-84.31	2.34	18.86	H
	24162	-67.34	-13	-54.34	-77.67	-82.41	2.28	19.50	H
	27614	-66.62	-13	-53.62	-79.03	-81.23	2.70	19.45	H
	6903	-46.38	-13	-33.38	-72.34	-53.90	1.29	10.95	V
	10355	-43.60	-13	-30.60	-72.23	-51.68	1.54	11.77	V
	13807	-39.33	-13	-26.33	-73.88	-48.08	1.88	12.78	V
	20710	-69.51	-13	-56.51	-76.76	-83.88	2.34	18.86	V
	24162	-66.50	-13	-53.50	-77.52	-81.57	2.28	19.50	V
	27614	-66.14	-13	-53.14	-78.89	-80.75	2.70	19.45	V
Middle	6913	-46.73	-13	-33.73	-71.26	-54.26	1.29	10.97	H
	10370	-41.99	-13	-28.99	-71.9	-50.08	1.54	11.77	H
	13827	-39.42	-13	-26.42	-74	-48.17	1.87	12.77	H
	20740	-69.27	-13	-56.27	-76.14	-83.61	2.36	18.85	H
	24197	-67.81	-13	-54.81	-78.16	-82.88	2.28	19.50	H
	27654	-65.59	-13	-52.59	-77.87	-80.18	2.69	19.44	H
	6913	-46.02	-13	-33.02	-71.98	-53.55	1.29	10.97	V
	10370	-43.58	-13	-30.58	-72.23	-51.67	1.54	11.77	V
	13827	-39.75	-13	-26.75	-74.26	-48.50	1.87	12.77	V
	20740	-69.39	-13	-56.39	-76.65	-83.73	2.36	18.85	V
	24197	-66.97	-13	-53.97	-77.99	-82.04	2.28	19.50	V
	27654	-65.57	-13	-52.57	-78.2	-80.16	2.69	19.44	V



Highest	6923	-47.32	-13	-34.32	-71.85	-54.87	1.29	10.98	H
	10385	-42.07	-13	-29.07	-72	-50.16	1.54	11.78	H
	13847	-39.90	-13	-26.90	-74.44	-48.65	1.87	12.76	H
	20770	-70.39	-13	-57.39	-77.26	-84.70	2.39	18.85	H
	24232	-67.83	-13	-54.83	-78.19	-82.90	2.28	19.50	H
	27694	-66.63	-13	-53.63	-78.8	-81.21	2.69	19.42	H
	6923	-46.05	-13	-33.05	-72.01	-53.60	1.29	10.98	V
	10385	-43.44	-13	-30.44	-72.1	-51.53	1.54	11.78	V
	13847	-39.97	-13	-26.97	-74.45	-48.72	1.87	12.76	V
	20770	-69.67	-13	-56.67	-76.93	-83.98	2.39	18.85	V
	24232	-66.70	-13	-53.70	-77.73	-81.77	2.28	19.50	V
	27694	-66.08	-13	-53.08	-78.61	-80.66	2.69	19.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 5>

5G NR n77

5G NR n77 / 90MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6903	-47.64	-13	-34.64	-72.17	-55.16	1.29	10.95	H
	10355	-41.97	-13	-28.97	-71.85	-50.05	1.54	11.77	H
	13807	-38.92	-13	-25.92	-73.56	-47.67	1.88	12.78	H
	20710	-69.77	-13	-56.77	-76.62	-84.14	2.34	18.86	H
	24162	-67.74	-13	-54.74	-78.07	-82.81	2.28	19.50	H
	27614	-67.10	-13	-54.10	-79.51	-81.71	2.70	19.45	H
	6903	-46.03	-13	-33.03	-71.99	-53.55	1.29	10.95	V
	10355	-42.84	-13	-29.84	-71.47	-50.92	1.54	11.77	V
	13807	-39.04	-13	-26.04	-73.59	-47.79	1.88	12.78	V
	20710	-69.36	-13	-56.36	-76.61	-83.73	2.34	18.86	V
	24162	-67.08	-13	-54.08	-78.1	-82.15	2.28	19.50	V
	27614	-66.50	-13	-53.50	-79.25	-81.11	2.70	19.45	V
Middle	6913	-46.81	-13	-33.81	-71.34	-54.34	1.29	10.97	H
	10370	-41.85	-13	-28.85	-71.76	-49.94	1.54	11.77	H
	13827	-38.92	-13	-25.92	-73.5	-47.67	1.87	12.77	H
	20740	-69.90	-13	-56.90	-76.77	-84.24	2.36	18.85	H
	24197	-67.66	-13	-54.66	-78.01	-82.73	2.28	19.50	H
	27654	-65.90	-13	-52.90	-78.18	-80.49	2.69	19.44	H
	6913	-45.49	-13	-32.49	-71.45	-53.02	1.29	10.97	V
	10370	-43.14	-13	-30.14	-71.79	-51.23	1.54	11.77	V
	13827	-39.35	-13	-26.35	-73.86	-48.10	1.87	12.77	V
	20740	-69.75	-13	-56.75	-77.01	-84.09	2.36	18.85	V
	24197	-67.11	-13	-54.11	-78.13	-82.18	2.28	19.50	V
	27654	-65.07	-13	-52.07	-77.7	-79.66	2.69	19.44	V



Highest	6923	-47.65	-13	-34.65	-72.18	-55.20	1.29	10.98	H
	10385	-41.65	-13	-28.65	-71.58	-49.74	1.54	11.78	H
	13847	-39.42	-13	-26.42	-73.96	-48.17	1.87	12.76	H
	20770	-70.15	-13	-57.15	-77.02	-84.46	2.39	18.85	H
	24232	-67.48	-13	-54.48	-77.84	-82.55	2.28	19.50	H
	27694	-66.35	-13	-53.35	-78.52	-80.93	2.69	19.42	H
	6923	-46.14	-13	-33.14	-72.1	-53.69	1.29	10.98	V
	10385	-43.19	-13	-30.19	-71.85	-51.28	1.54	11.78	V
	13847	-39.53	-13	-26.53	-74.01	-48.28	1.87	12.76	V
	20770	-69.95	-13	-56.95	-77.21	-84.26	2.39	18.85	V
	24232	-67.64	-13	-54.64	-78.67	-82.71	2.28	19.50	V
	27694	-66.04	-13	-53.04	-78.57	-80.62	2.69	19.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 6>

5G NR n77

5G NR n77 / 90MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6903	-47.97	-13	-34.97	-72.5	-55.49	1.29	10.95	H
	10355	-42.59	-13	-29.59	-72.47	-50.67	1.54	11.77	H
	13807	-38.53	-13	-25.53	-73.17	-47.28	1.88	12.78	H
	20710	-70.45	-13	-57.45	-77.3	-84.82	2.34	18.86	H
	24162	-67.79	-13	-54.79	-78.12	-82.86	2.28	19.50	H
	27614	-66.18	-13	-53.18	-78.59	-80.79	2.70	19.45	H
	6903	-46.83	-13	-33.83	-72.79	-54.35	1.29	10.95	V
	10355	-43.66	-13	-30.66	-72.29	-51.74	1.54	11.77	V
	13807	-38.69	-13	-25.69	-73.24	-47.44	1.88	12.78	V
	20710	-69.94	-13	-56.94	-77.19	-84.31	2.34	18.86	V
	24162	-67.09	-13	-54.09	-78.11	-82.16	2.28	19.50	V
	27614	-66.54	-13	-53.54	-79.29	-81.15	2.70	19.45	V
Middle	6913	-46.72	-13	-33.72	-71.25	-54.25	1.29	10.97	H
	10370	-42.03	-13	-29.03	-71.94	-50.12	1.54	11.77	H
	13827	-38.49	-13	-25.49	-73.07	-47.24	1.87	12.77	H
	20740	-70.10	-13	-57.10	-76.97	-84.44	2.36	18.85	H
	24197	-67.63	-13	-54.63	-77.98	-82.70	2.28	19.50	H
	27654	-65.92	-13	-52.92	-78.2	-80.51	2.69	19.44	H
	6913	-46.39	-13	-33.39	-72.35	-53.92	1.29	10.97	V
	10370	-43.65	-13	-30.65	-72.3	-51.74	1.54	11.77	V
	13827	-38.46	-13	-25.46	-72.97	-47.21	1.87	12.77	V
	20740	-69.62	-13	-56.62	-76.88	-83.96	2.36	18.85	V
	24197	-67.00	-13	-54.00	-78.02	-82.07	2.28	19.50	V
	27654	-65.80	-13	-52.80	-78.43	-80.39	2.69	19.44	V



Highest	6923	-47.65	-13	-34.65	-72.18	-55.20	1.29	10.98	H
	10385	-42.24	-13	-29.24	-72.17	-50.33	1.54	11.78	H
	13847	-38.87	-13	-25.87	-73.41	-47.62	1.87	12.76	H
	20770	-70.06	-13	-57.06	-76.93	-84.37	2.39	18.85	H
	24232	-68.34	-13	-55.34	-78.7	-83.41	2.28	19.50	H
	27694	-66.43	-13	-53.43	-78.6	-81.01	2.69	19.42	H
	6923	-46.36	-13	-33.36	-72.32	-53.91	1.29	10.98	V
	10385	-43.50	-13	-30.50	-72.16	-51.59	1.54	11.78	V
	13847	-38.98	-13	-25.98	-73.46	-47.73	1.87	12.76	V
	20770	-69.09	-13	-56.09	-76.35	-83.40	2.39	18.85	V
	24232	-67.29	-13	-54.29	-78.32	-82.36	2.28	19.50	V
	27694	-66.55	-13	-53.55	-79.08	-81.13	2.69	19.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<MIMO Antenna>
MIMO <Ant. 3+2>

5G NR n77

5G NR n77 MIMO / 90MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6903	-47.55	-13	-34.55	-72.08	-55.07	1.29	10.95	H
	10355	-42.16	-13	-29.16	-72.04	-50.24	1.54	11.77	H
	13807	-38.31	-13	-25.31	-72.95	-47.06	1.88	12.78	H
	20710	-70.06	-13	-57.06	-76.91	-84.43	2.34	18.86	H
	24162	-67.08	-13	-54.08	-77.41	-82.15	2.28	19.50	H
	27614	-66.76	-13	-53.76	-79.17	-81.37	2.70	19.45	H
	6903	-46.54	-13	-33.54	-72.5	-54.06	1.29	10.95	V
	10355	-43.10	-13	-30.10	-71.73	-51.18	1.54	11.77	V
	13807	-38.28	-13	-25.28	-72.83	-47.03	1.88	12.78	V
	20710	-69.49	-13	-56.49	-76.74	-83.86	2.34	18.86	V
	24162	-66.45	-13	-53.45	-77.47	-81.52	2.28	19.50	V
	27614	-66.04	-13	-53.04	-78.79	-80.65	2.70	19.45	V
Middle	6913	-47.58	-13	-34.58	-72.11	-55.11	1.29	10.97	H
	10370	-42.03	-13	-29.03	-71.94	-50.12	1.54	11.77	H
	13827	-38.38	-13	-25.38	-72.96	-47.13	1.87	12.77	H
	20740	-69.80	-13	-56.80	-76.67	-84.14	2.36	18.85	H
	24197	-67.38	-13	-54.38	-77.73	-82.45	2.28	19.50	H
	27654	-65.85	-13	-52.85	-78.13	-80.44	2.69	19.44	H
	6913	-46.30	-13	-33.30	-72.26	-53.83	1.29	10.97	V
	10370	-43.10	-13	-30.10	-71.75	-51.19	1.54	11.77	V
	13827	-38.45	-13	-25.45	-72.96	-47.20	1.87	12.77	V
	20740	-69.28	-13	-56.28	-76.54	-83.62	2.36	18.85	V
	24197	-66.95	-13	-53.95	-77.97	-82.02	2.28	19.50	V
	27654	-65.59	-13	-52.59	-78.22	-80.18	2.69	19.44	V



Highest	6923	-47.90	-13	-34.90	-72.43	-55.45	1.29	10.98	H
	10385	-41.88	-13	-28.88	-71.81	-49.97	1.54	11.78	H
	13847	-38.78	-13	-25.78	-73.32	-47.53	1.87	12.76	H
	20770	-69.81	-13	-56.81	-76.68	-84.12	2.39	18.85	H
	24232	-67.67	-13	-54.67	-78.03	-82.74	2.28	19.50	H
	27694	-66.76	-13	-53.76	-78.93	-81.34	2.69	19.42	H
	6923	-46.36	-13	-33.36	-72.32	-53.91	1.29	10.98	V
	10385	-43.39	-13	-30.39	-72.05	-51.48	1.54	11.78	V
	13847	-38.46	-13	-25.46	-72.94	-47.21	1.87	12.76	V
	20770	-69.30	-13	-56.30	-76.56	-83.61	2.39	18.85	V
	24232	-67.27	-13	-54.27	-78.3	-82.34	2.28	19.50	V
	27694	-66.41	-13	-53.41	-78.94	-80.99	2.69	19.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<SRS Antenna>
MIMO <Ant. 5+6>

5G NR n77

5G NR n77 / 90MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6903	-46.27	-13	-33.27	-70.8	-53.79	1.29	10.95	H
	10355	-41.68	-13	-28.68	-71.56	-49.76	1.54	11.77	H
	13807	-37.91	-13	-24.91	-72.55	-46.66	1.88	12.78	H
	20710	-70.39	-13	-57.39	-77.24	-84.76	2.34	18.86	H
	24162	-67.10	-13	-54.10	-77.43	-82.17	2.28	19.50	H
	27614	-66.53	-13	-53.53	-78.94	-81.14	2.70	19.45	H
	6903	-45.43	-13	-32.43	-71.39	-52.95	1.29	10.95	V
	10355	-42.94	-13	-29.94	-71.57	-51.02	1.54	11.77	V
	13807	-38.39	-13	-25.39	-72.94	-47.14	1.88	12.78	V
	20710	-69.91	-13	-56.91	-77.16	-84.28	2.34	18.86	V
	24162	-67.01	-13	-54.01	-78.03	-82.08	2.28	19.50	V
	27614	-66.71	-13	-53.71	-79.46	-81.32	2.70	19.45	V
Middle	6913	-46.73	-13	-33.73	-71.26	-54.26	1.29	10.97	H
	10370	-41.72	-13	-28.72	-71.63	-49.81	1.54	11.77	H
	13827	-37.83	-13	-24.83	-72.41	-46.58	1.87	12.77	H
	20740	-70.56	-13	-57.56	-77.43	-84.90	2.36	18.85	H
	24197	-68.04	-13	-55.04	-78.39	-83.11	2.28	19.50	H
	27654	-65.97	-13	-52.97	-78.25	-80.56	2.69	19.44	H
	6913	-45.97	-13	-32.97	-71.93	-53.50	1.29	10.97	V
	10370	-42.96	-13	-29.96	-71.61	-51.05	1.54	11.77	V
	13827	-38.23	-13	-25.23	-72.74	-46.98	1.87	12.77	V
	20740	-69.78	-13	-56.78	-77.04	-84.12	2.36	18.85	V
	24197	-67.04	-13	-54.04	-78.06	-82.11	2.28	19.50	V
	27654	-65.52	-13	-52.52	-78.15	-80.11	2.69	19.44	V



Highest	6923	-46.84	-13	-33.84	-71.37	-54.39	1.29	10.98	H
	10385	-41.80	-13	-28.80	-71.73	-49.89	1.54	11.78	H
	13847	-38.43	-13	-25.43	-72.97	-47.18	1.87	12.76	H
	20770	-70.78	-13	-57.78	-77.65	-85.09	2.39	18.85	H
	24232	-68.20	-13	-55.20	-78.56	-83.27	2.28	19.50	H
	27694	-67.04	-13	-54.04	-79.21	-81.62	2.69	19.42	H
	6923	-45.78	-13	-32.78	-71.74	-53.33	1.29	10.98	V
	10385	-42.77	-13	-29.77	-71.43	-50.86	1.54	11.78	V
	13847	-38.39	-13	-25.39	-72.87	-47.14	1.87	12.76	V
	20770	-70.50	-13	-57.50	-77.76	-84.81	2.39	18.85	V
	24232	-67.59	-13	-54.59	-78.62	-82.66	2.28	19.50	V
	27694	-66.54	-13	-53.54	-79.07	-81.12	2.69	19.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 1+Ant.3>

EN-DC 26A-n78A

EN-DC 26A-n78A / 10+90MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6903	-42.22	-13	-29.22	-66.75	-49.74	1.29	10.95	H
	10355	-41.91	-13	-28.91	-71.79	-49.99	1.54	11.77	H
	13807	-38.29	-13	-25.29	-72.93	-47.04	1.88	12.78	H
	20710	-70.41	-13	-57.41	-77.26	-84.78	2.34	18.86	H
	24162	-67.56	-13	-54.56	-77.89	-82.63	2.28	19.50	H
	27614	-66.93	-13	-53.93	-79.34	-81.54	2.70	19.45	H
	6903	-43.16	-13	-30.16	-69.12	-50.68	1.29	10.95	V
	10355	-42.68	-13	-29.68	-71.31	-50.76	1.54	11.77	V
	13807	-38.36	-13	-25.36	-72.91	-47.11	1.88	12.78	V
	20710	-69.16	-13	-56.16	-76.41	-83.53	2.34	18.86	V
	24162	-66.38	-13	-53.38	-77.4	-81.45	2.28	19.50	V
	27614	-66.09	-13	-53.09	-78.84	-80.70	2.70	19.45	V
Middle	6913	-42.31	-13	-29.31	-66.84	-49.84	1.29	10.97	H
	10370	-41.88	-13	-28.88	-71.79	-49.97	1.54	11.77	H
	13827	-38.31	-13	-25.31	-72.89	-47.06	1.87	12.77	H
	20740	-70.13	-13	-57.13	-77	-84.47	2.36	18.85	H
	24197	-67.94	-13	-54.94	-78.29	-83.01	2.28	19.50	H
	27654	-65.25	-13	-52.25	-77.53	-79.84	2.69	19.44	H
	6913	-44.67	-13	-31.67	-70.63	-52.20	1.29	10.97	V
	10370	-42.82	-13	-29.82	-71.47	-50.91	1.54	11.77	V
	13827	-38.34	-13	-25.34	-72.85	-47.09	1.87	12.77	V
	20740	-69.71	-13	-56.71	-76.97	-84.05	2.36	18.85	V
	24197	-66.53	-13	-53.53	-77.55	-81.60	2.28	19.50	V
	27654	-65.10	-13	-52.10	-77.73	-79.69	2.69	19.44	V



Highest	6923	-43.53	-13	-30.53	-68.06	-51.08	1.29	10.98	H
	10385	-41.86	-13	-28.86	-71.79	-49.95	1.54	11.78	H
	13847	-38.67	-13	-25.67	-73.21	-47.42	1.87	12.76	H
	20770	-69.84	-13	-56.84	-76.71	-84.15	2.39	18.85	H
	24232	-68.20	-13	-55.20	-78.56	-83.27	2.28	19.50	H
	27694	-66.80	-13	-53.80	-78.94	-81.38	2.69	19.42	H
	6923	-42.67	-13	-29.67	-68.63	-50.22	1.29	10.98	V
	10385	-43.11	-13	-30.11	-71.77	-51.20	1.54	11.78	V
	13847	-38.36	-13	-25.36	-72.84	-47.11	1.87	12.76	V
	20770	-69.30	-13	-56.30	-76.56	-83.61	2.39	18.85	V
	24232	-67.24	-13	-54.24	-78.27	-82.31	2.28	19.50	V
	27694	-65.85	-13	-52.85	-78.38	-80.43	2.69	19.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.