



**FCC & Industry Canada Certification Test Report
For the
Motorola Solutions
FX9500**

**FCC ID: UZ7FX9500
IC: 109AN-FX9500**

**WLL JOB# 12047-01 Rev 0
July 30, 2011**

Prepared for:

**Motorola Solutions
Jays Close
Viables Industrial Estate
Basingstoke
Hampshire
RG22 4PD
United Kingdom**

Prepared By:

**Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879**




Testing Certificate AT-1448

FCC & Industry Canada Certification Test Report
For the
Motorola Solutions
FX9500

FCC ID: UZ7FX9500
IC: 109AN-FX9500

WLL JOB# 12047-01 Rev 0
July 30, 2011

Prepared by:



John P. Repella
Compliance Engineer

Reviewed by:



Steven D. Koster
VP, EMC & Wireless

Abstract

This report has been prepared on behalf of Motorola Solutions to support the attached Application for Equipment Authorization. The test report and application are submitted for a Frequency Hopping Spread Spectrum Transmitter under Part 15.247 (10/2009) of the FCC Rules and Regulations and Spectrum Management and Telecommunications Policy RSS-210 of Industry Canada. This Certification Test Report documents the test configuration and test results for the Motorola Solutions FX9500.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

The Motorola Solutions FX9500 complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247 and Industry Canada RSS-210.

Revision History	Description of Change	Date
Rev 0	Initial Release	July 30, 2011

Table of Contents

Abstract	ii
1 Introduction	1
1.1 Compliance Statement	1
1.2 Test Scope	1
1.3 Contract Information	1
1.4 Test Dates	1
1.5 Test and Support Personnel	1
1.6 Abbreviations	2
2 Equipment Under Test	3
2.1 EUT Identification & Description	3
2.2 Test Configuration	3
2.3 Testing Algorithm	3
2.4 Test Location	3
2.5 Measurements	4
2.5.1 References	4
2.6 Measurement Uncertainty	4
3 Test Equipment	6
4 Test Summary	7
5 Test Results 8	
5.1 Time of Occupancy (15.247 (a)(1)(i) & RSS-210 [A8. 1 (c)])	8
5.2 RF Power Output: (15.247 (b)(2) & RSS-210 [A8.4 (1)])	10
5.3 Occupied Bandwidth: (15.247 (a) (1)(i) & RSS-210 [A8. 1 (c)])	12
5.4 Channel Spacing and Number of Hop Channels (FCC 15. 247(a)(1) & RSS-210 [A8.1 (b)] ..	15
5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)	24
5.6 Radiated Spurious Emissions: (FCC Part 15.205, 15.209 & RSS-210 [A8. 5])	41
5.6.1 Test Procedure	41
5.7 Receiver Radiated Spurious Emissions: (§15.209, RSS-Gen [7.2.3.2])	46
5.7.1 Test Procedure	46
5.7.2 Test Summary	46
5.8 AC Conducted Emissions (FCC Pt.15.207, RSS-Gen [7.2.2])	48
5.8.1 Requirements	48
5.8.2 Test Procedure	48
5.8.3 Test Data	49

List of Tables

Table 1: Device Summary	3
Table 2: Expanded Uncertainty List	5
Table 3: Test Equipment List.....	6
Table 4: Test Summary Table.....	7
Table 5: RF Power Output.....	10
Table 6: Occupied Bandwidth Results.....	12
Table 7: Spectrum Analyzer Settings	41
Table 8: Radiated Emission Test Data, Low Frequency Data (<1GHz)	42
Table 9: Radiated Emission Test Data, High Frequency Data (>1GHz).....	43
Table 10: Receiver Radiated Emission Test Data	47
Table 11: Conducted Emissions Test Data.....	49

List of Figures

Figure 1: Duty Cycle Plot	8
Figure 2: Total on Time	9
Figure 3: RF Peak Power, Low Channel	10
Figure 4: RF Peak Power, Mid Channel	11
Figure 5: RF Peak Power, High Channel.....	12
Figure 6: Occupied Bandwidth, Low Channel	13
Figure 7: Occupied Bandwidth, Mid Channel	14
Figure 8: Occupied Bandwidth, High Channel.....	15
Figure 9: Channel Spacing, Band A	16
Figure 10: Channel Spacing, Band B.....	17
Figure 11: Channel Spacing, Band C.....	18
Figure 12: Channel Spacing, Dense Mode	19
Figure 13: Number of Channels.....	20
Figure 14: Number of Channels, Dense Mode	21
Figure 15: Number of Channels, Band A	22
Figure 16: Number of Channels, Band B.....	23
Figure 17: Number of Channels, Band C.....	24
Figure 18: Conducted Spurious Emissions, Low Channel 30 - 900MHz.....	25
Figure 19: Conducted Spurious Emissions, Low Channel 900MHz – 930MHz.....	26
Figure 20: Band Edge Plot (Hopping), Low Channel TX @902.3MHz	27
Figure 21: Band Edge Plot (Non-Hopping), Low Channel TX @902.3MHz	28
Figure 22: Conducted Spurious Emissions, Low Channel 930MHz – 5GHz	29
Figure 23: Conducted Spurious Emissions, Low Channel 5 - 10GHz	30
Figure 24: Conducted Spurious Emissions, Mid Channel 30 - 900MHz	31
Figure 25: Conducted Spurious Emissions, Mid Channel 900MHz – 930MHz	32
Figure 26: Conducted Spurious Emissions, Mid Channel 930MHz– 5GHz	33
Figure 27: Conducted Spurious Emissions, Mid Channel 5 - 10GHz.....	34
Figure 28: Conducted Spurious Emissions, High Channel 30 - 900MHz.....	35
Figure 29: Conducted Spurious Emissions, High Channel 900MHz – 930MHz.....	36
Figure 30: Band Edge Plot (Hopping), Low Channel TX @927.7MHz	37

Figure 31: Band Edge Plot (Non-Hopping), Low Channel TX @927.7MHz 38
Figure 32: Conducted Spurious Emissions, High Channel 930MHz– 5GHz 39
Figure 33: Conducted Spurious Emissions, High Channel 5 - 10GHz 40

1 Introduction

1.1 Compliance Statement

The Motorola Solutions FX9500 complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247 (10/2009) and Industry Canada RSS-210.

1.2 Test Scope

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.3 Contract Information

Customer:	Motorola Solutions Jays Close Viabes Industrial Estate Basingstoke Hampshire RG22 4PD United Kingdom
Purchase Order Number:	NP5356344
Quotation Number:	65377C
Test Dates	
Testing was performed on the following date(s):	06/12/11 – 07/01/11v& 8/1/2011

1.4 Test and Support Personnel

Washington Laboratories, LTD	John P. Repella
Customer Representative	Alan Parrish

1.5 Abbreviations

A	Ampere
ac	alternating current
AM	Amplitude Modulation
Amps	Amperes
b/s	bits per second
BW	BandWidth
CE	Conducted Emission
cm	centimeter
CW	Continuous Wave
dB	deciBel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for 10⁹ multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for 10³ multiplier
LISN	Line Impedance Stabilization Network
M	Mega - prefix for 10⁶ multiplier
m	meter
μ	micro - prefix for 10⁻⁶ multiplier
NB	Narrowband
QP	Quasi-Peak
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

2 Equipment Under Test

2.1 EUT Identification & Description

The Motorola Solutions FX9500 is a fixed reader for RFID tags.

Table 1: Device Summary

ITEM	DESCRIPTION
Manufacturer:	Motorola Solutions
FCC ID:	UZ7FX9500
IC:	109AN-FX9500
Model:	FX9500
FCC Rule Parts:	§15.247
Industry Canada:	RSS210 Issue 7
Frequency Range:	902.3-927.75MHz
Maximum Output Power:	30.00dBm (Measured at the Input to the Antenna)
Modulation:	DB-ASK, PR-ASK
Occupied Bandwidth:	286.916kHz
Keying:	Automatic, Manual
Type of Information:	Data
Number of Channels:	150
Power Output Level	Fixed
Antenna Connector	Internal
Antenna Type	Dual Polarized Dipole(Horizontal and Vertical Components)
Antenna Gain:	6dBi
Interface Cables:	RS232, USB, LAN
Power Source & Voltage:	AC adapter (100-240VAC, 50-60Hz, 1.5A) DC 12VDC, 3.3A
Receiver spurious	25.8dBuV @69.08MHz
Transmitter spurious	48.17dBuV @ 2783.10MHz
Emissions Designator	287KGXD

2.2 Test Configuration

The FX9500 was configured for test with customer supplied software to exercise functionality. The scanner was tested with two cable configurations: with an RS 232 cable and a USB cable.

2.3 Testing Algorithm

The FX9500 was programmed for FHSS operation via RFIDDemo software provided by the customer. Worst case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers

are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 Methods of Measurement of Radio Noise from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where u_c = standard uncertainty

a, b, c, \dots = individual uncertainty elements

$Div_{a, b, c}$ = the individual uncertainty element divisor based on the probability distribution

Divisor = 1.732 for rectangular distribution

Divisor = 2 for normal distribution

Divisor = 1.414 for trapezoid distribution

Equation 2: Expanded Uncertainty

$$U = ku_c$$

Where

- U = expanded uncertainty
- k = coverage factor
k ≤ 2 for 95% coverage (ANSI/NCSL Z540-2 Annex G)
- u_c = standard uncertainty

The measurement uncertainty complies with the maximum allowed uncertainty from CISPR 16-4-2. Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

Table 2: Expanded Uncertainty List

Scope	Standard(s)	Expanded
Conducted Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	2.63 dB
Radiated Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	4.55 dB

3 Test Equipment

Table 3 shows a list of the test equipment used for measurements along with the calibration information.

Table 3: Test Equipment List

Test Name: Radiated Emissions		Test Date: 7/1/2011	
Asset #	Manufacturer/Model	Description	Cal. Due
69	HP - 85650A	ADAPTER QP	6/28/2012
73	HP - 8568B	ANALYZER SPECTRUM	6/26/2012
71	HP - 85685A	PRESELECTOR RF	6/26/2012
382	SUNOL SCIENCES CORPORATION - JB1	ANTENNA BICONLOG	1/12/2012
00728	AGILENT - 8564EC	SPECTRUM ANALYZER 30HZ - 40GHZ	4/28/2012
00640	MEGAPHASE - TM40-K1K5-36	1G-40GHZ RIGHT ANGLE	1/3/2012
00627	AGILENT - 8449B	AMPLIFIER 1-26GHZ	5/4/2012
00742	PENN ENGINEERING - WR284	2.2-4.15GHZ BANDPASS FILTER	7/19/2012
00337	WLL - 1.2-5GHZ	FILTER BAND PASS	3/24/2012
00280	ITC - 21C-3A1	WAVEGUIDE 3.45-11.0GHZ	3/24/2012
00282	ITC - 21X-3A1	WAVEGUIDE 6.8-15GHZ	3/24/2012

Test Name: Conducted Emissions Voltage		Test Date: 7/01/2011	
Asset #	Manufacturer/Model	Description	Cal. Due
72	HP - 8568B	ANALYZER SPECTRUM	6/22/2012
68	HP - 85650A	ADAPTER QP	6/22/2012
70	HP - 85685A	PRESELECTOR RF W/OPT 8ZE	6/22/2012
125	SOLAR - 8028-50-TS-24-BNC	LISN	7/10/2011
126	SOLAR - 8028-50-TS-24-BNC	LISN	7/10/2011

4 Test Summary

The Table Below shows the results of testing for compliance with a Digital Transmission System in accordance with FCC Part 15.247:2007 and RSS210e issue 7. Full results are shown in section 5.

Table 4: Test Summary Table

TX Test Summary (Frequency Hopping Spread Spectrum)			
FCC Rule Part	IC Rule Part	Description	Result
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	20dB Bandwidth	Pass
15.247 (b)(2)	RSS-210 [A8.4 (1)]	Transmit Output Power	Pass
15.247 (a)(1)	RSS-210 [A8.1 (b)]	Channel Separation	Pass
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	Number of Channels =50 minimum	Pass
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	Time of Occupancy	Pass
15.247 (d)	RSS-210 [A8. 5]	Occupied BW / Out-of-Band Emissions (Band Edge @ 20dB below)	Pass
15.205 15.209	RSS-210 Sect.2.2	General Field Strength Limits (Restricted Bands & RE Limits)	Pass
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions	Pass
RX/Digital Test Summary (Frequency Hopping Spread Spectrum)			
FCC Rule Part	IC Rule Part	Description	Result
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions	Pass
15.209	RSS-210 sect 2.6	General Field Strength Limits	Pass

5 Test Results

5.1 Time of Occupancy (15.247 (a)(1)(i) & RSS-210 [A8. 1 (c)])

247(a) 1(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is greater than 250 kHz, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. Additionally the maximum allowed 20dB bandwidth is 500 kHz for any channel.

From Figures 1 and 2 it is determined that:

Single pulse duration is 290.67ms in a 10 s sweep period 1 pulse occurs, and therefore the total on time is 290.67ms.

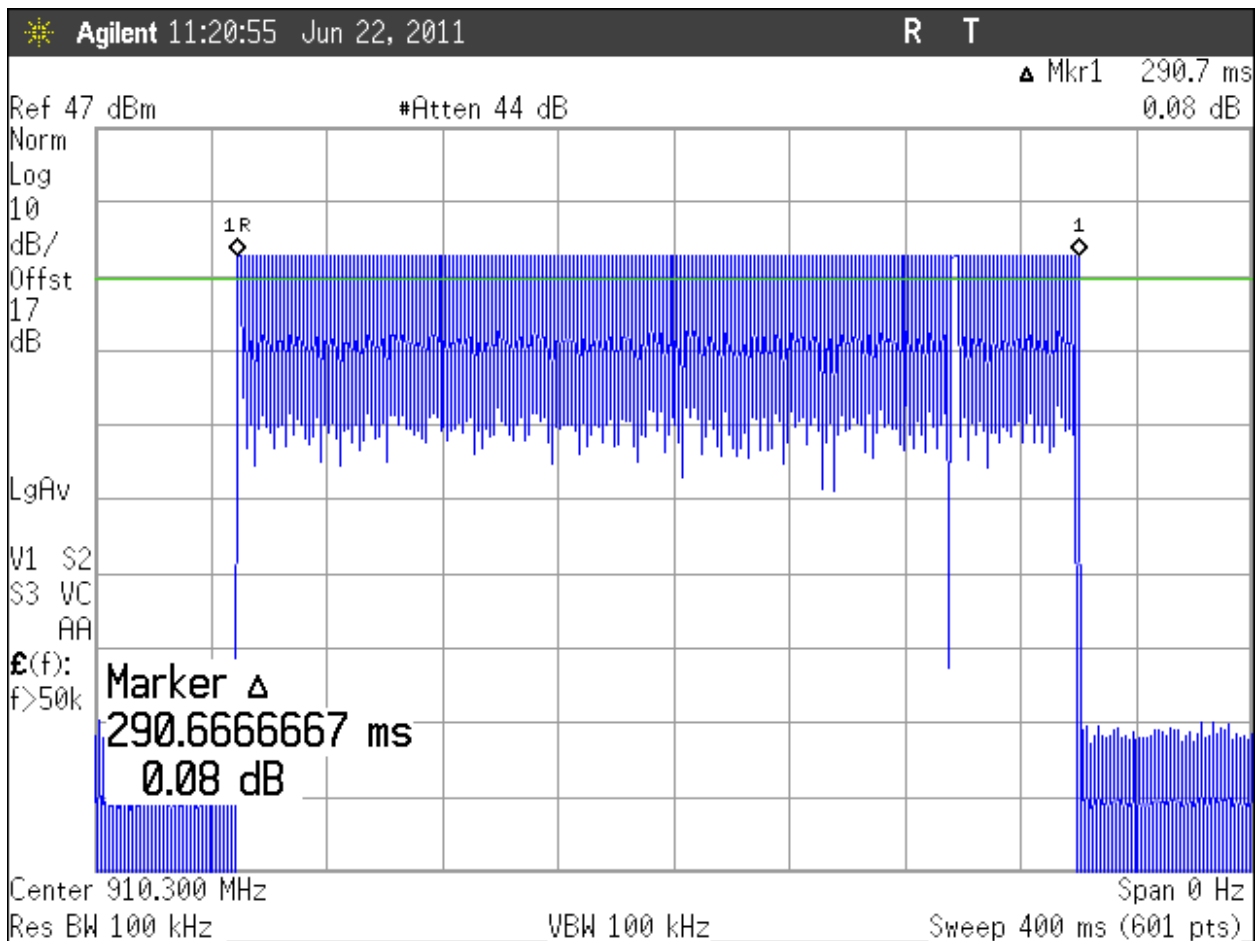


Figure 1: Duty Cycle Plot

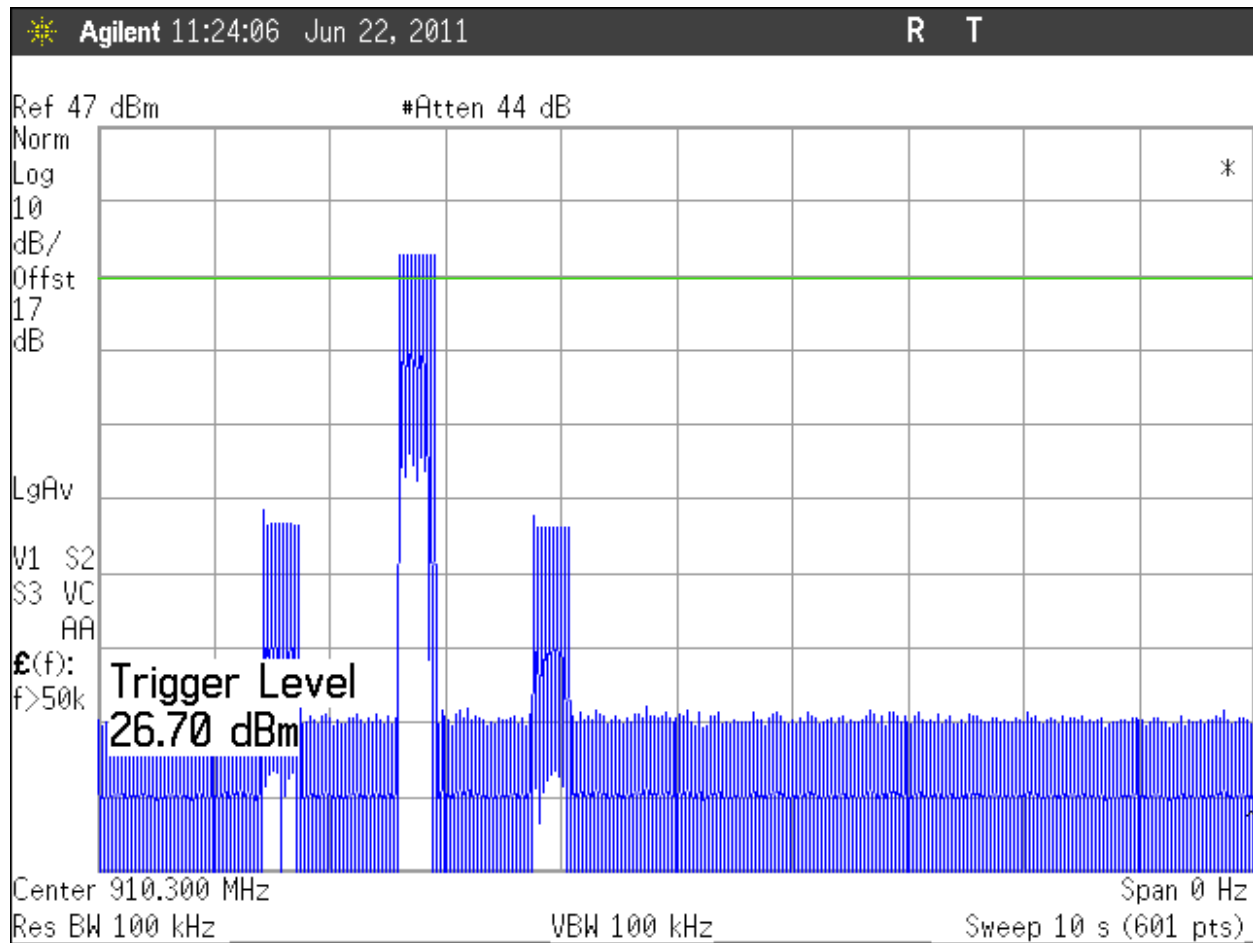


Figure 2: Total on Time

5.2 RF Power Output: (15.247 (b)(2) & RSS-210 [A8.4 (1)])

To measure the output power the hopping sequence was stopped while the frequency dwelled on a low, high and middle channel. The antenna cable was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator and other losses in the system. The RF Power Output recorded in Table 5 is the RF Power fed into the antenna.

Table 5: RF Power Output

Frequency /Input to Antenna Port	Level	Limit	Pass/Fail
Low Channel: 902.3MHz 150CH	29.55dBm	30 dBm	Pass
Mid Channel: 914.5MHz 150CH	29.83dBm	30 dBm	Pass
High Channel: 927.75MHz 150CH	30.00dBm	30 dBm	Pass

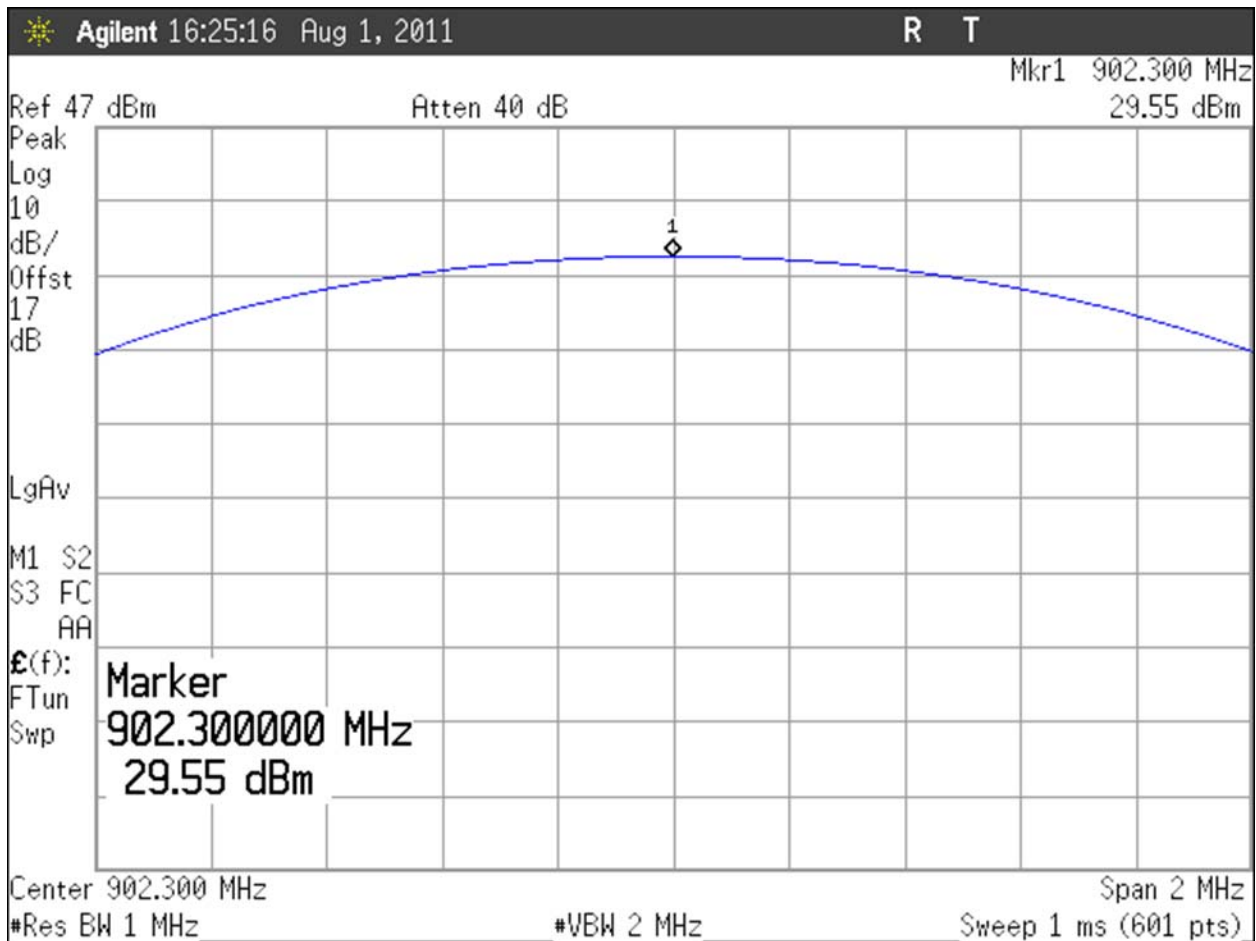


Figure 3: RF Peak Power, Low Channel

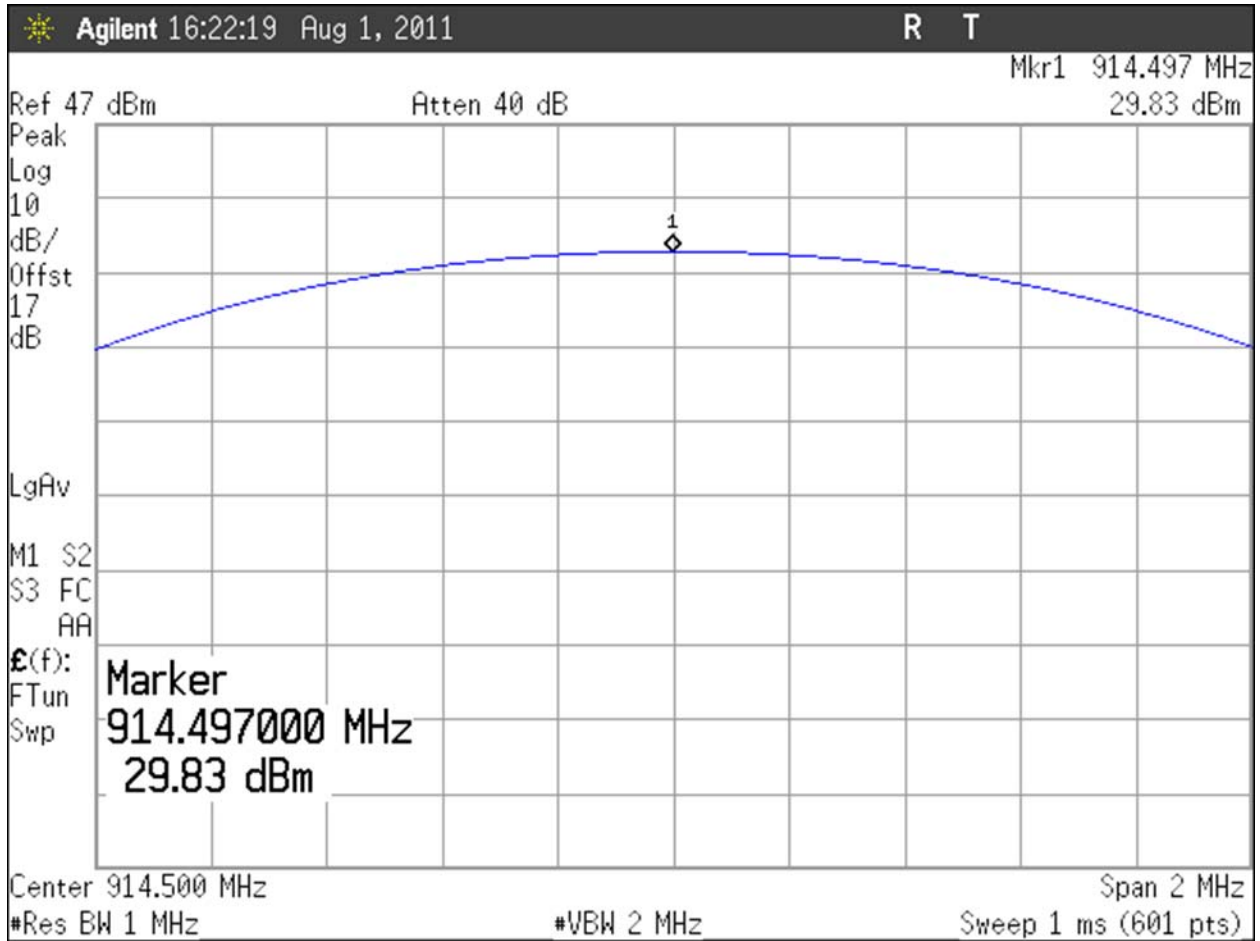


Figure 4: RF Peak Power, Mid Channel

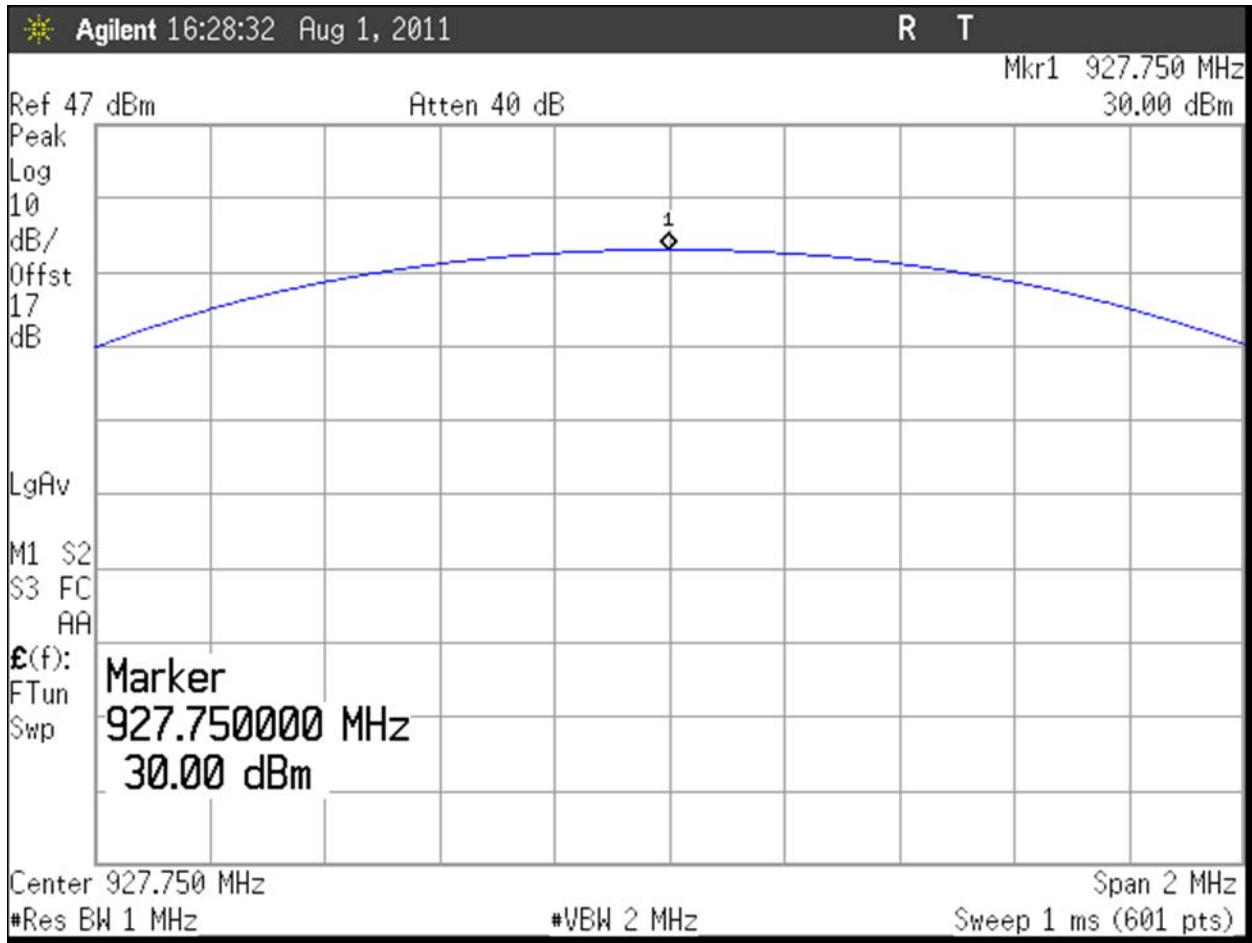


Figure 5: RF Peak Power, High Channel

5.3 Occupied Bandwidth: (15.247 (a) (1)(i) & RSS-210 [A8. 1 (c)])

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer. For Frequency Hopping Spread Spectrum Systems, FCC Part 15.247 requires the maximum 20 dB bandwidth not exceed 500 kHz.

At full modulation, the occupied bandwidth was measured as shown in the plots below. Table 6 provides a summary of the Occupied Bandwidth Results.

Table 6: Occupied Bandwidth Results

Frequency	Bandwidth	Limit	Pass/Fail
Low Channel: 902.30MHz	286.916kHz	500KHz	Pass
Mid Channel: 914.50MHz	283.436kHz	500KHz	Pass
High Channel: 927.75MHz	283.109kHz	500KHz	Pass

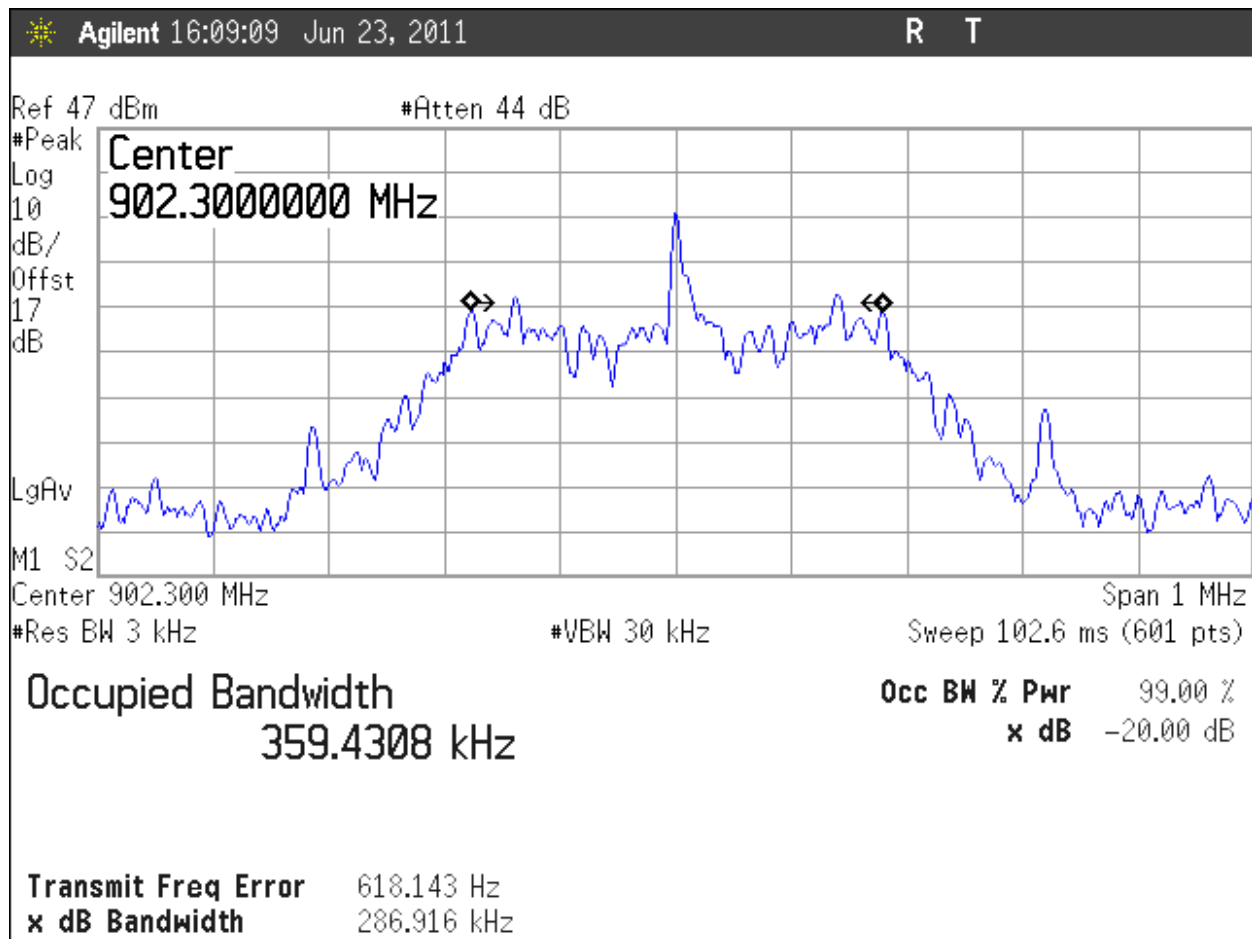


Figure 6: Occupied Bandwidth, Low Channel

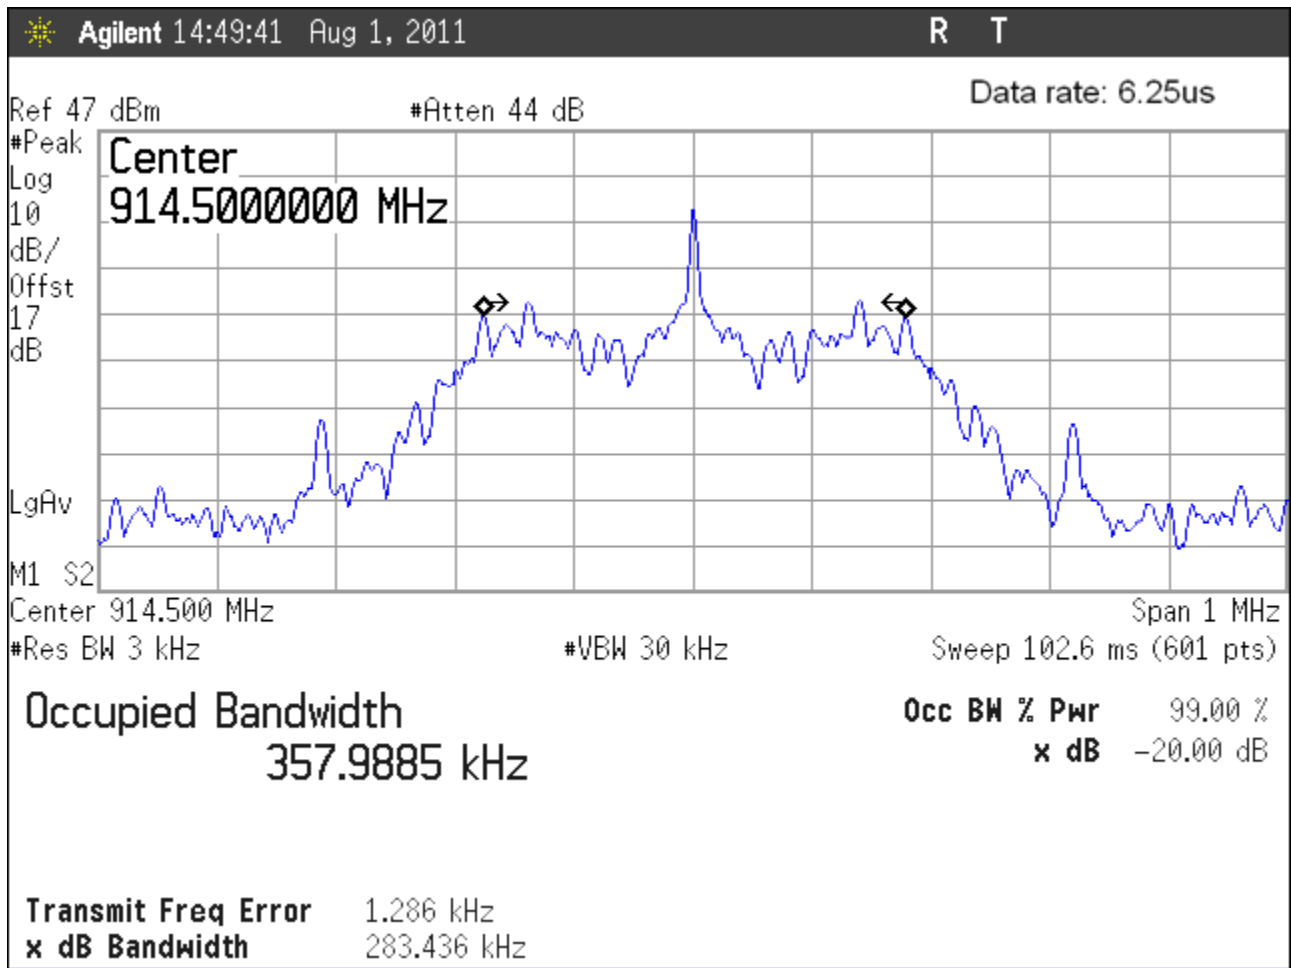


Figure 7: Occupied Bandwidth, Mid Channel

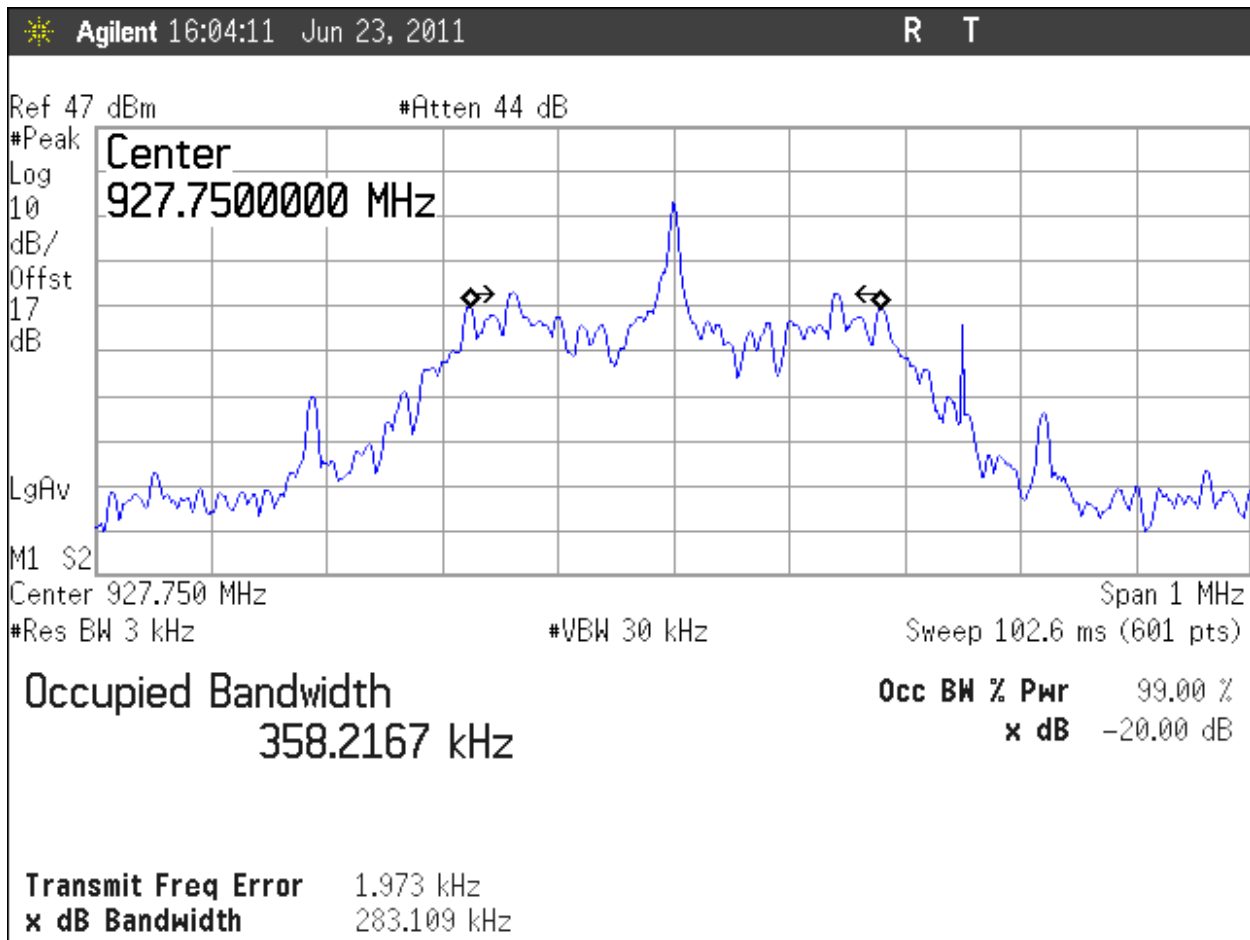


Figure 8: Occupied Bandwidth, High Channel

5.4 Channel Spacing and Number of Hop Channels (FCC 15. 247(a)(1) & RSS-210 [A8.1 (b)])

Per the FCC requirements, frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. The maximum 20dB bandwidth measured is 286.916 kHz. In addition, for a 902-928MHz transmitter the number of hopping channels shall be stated.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 10 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 100 kHz. The channel spacing of 2 adjacent channels was measured using a spectrum analyzer span setting of 500 kHz. Also, the number of hopping channels was measured from 900MHz to 930MHz.

The following are plots of the channel spacing and number of hopping channels data. The channel spacing was measured to be 202.9 kHz and the number of channels used is 150. The dense mode setting utilizes 50 channels and has a channel spacing of 500 kHz.

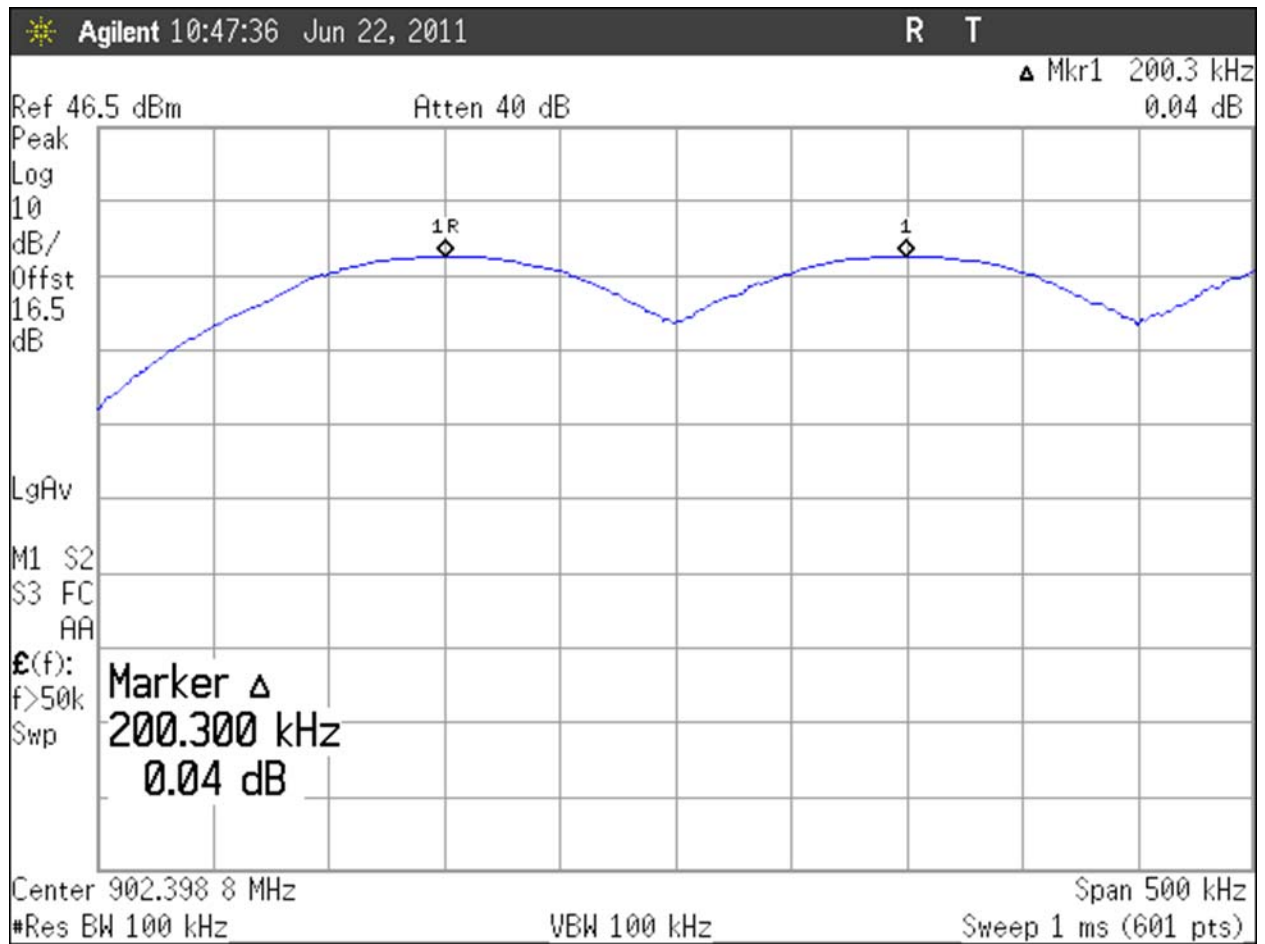


Figure 9: Channel Spacing, Band A

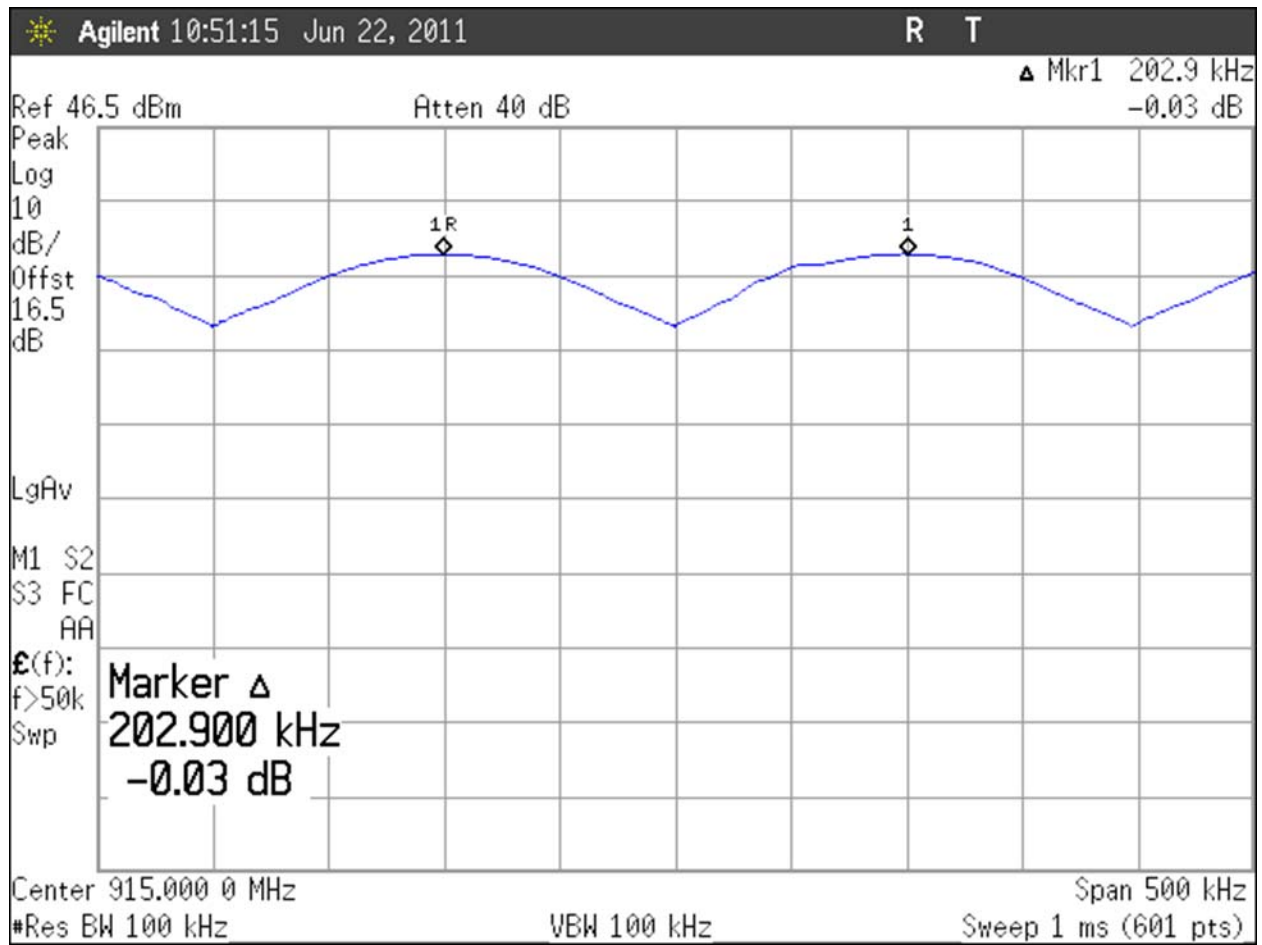


Figure 10: Channel Spacing, Band B

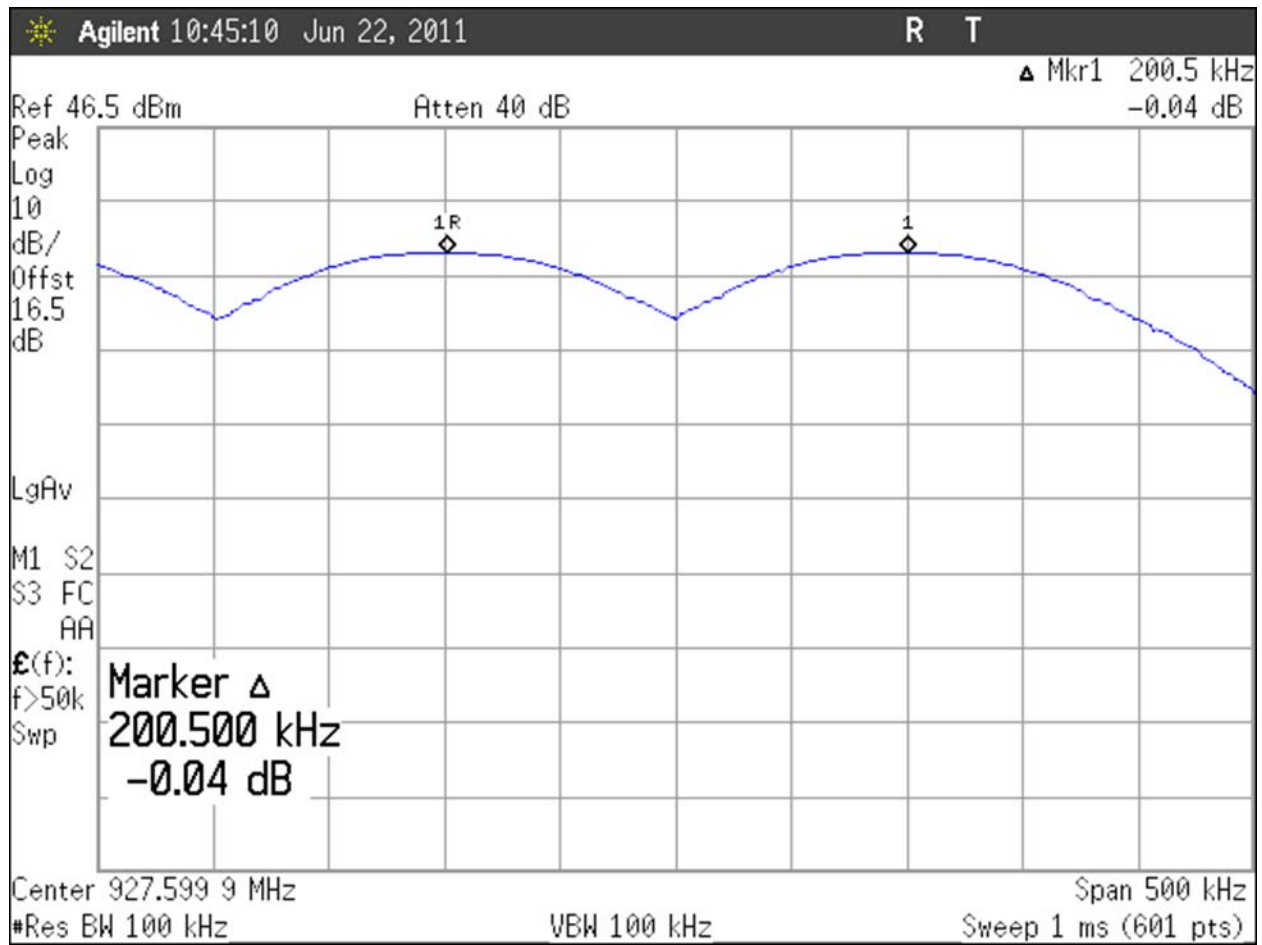


Figure 11: Channel Spacing, Band C

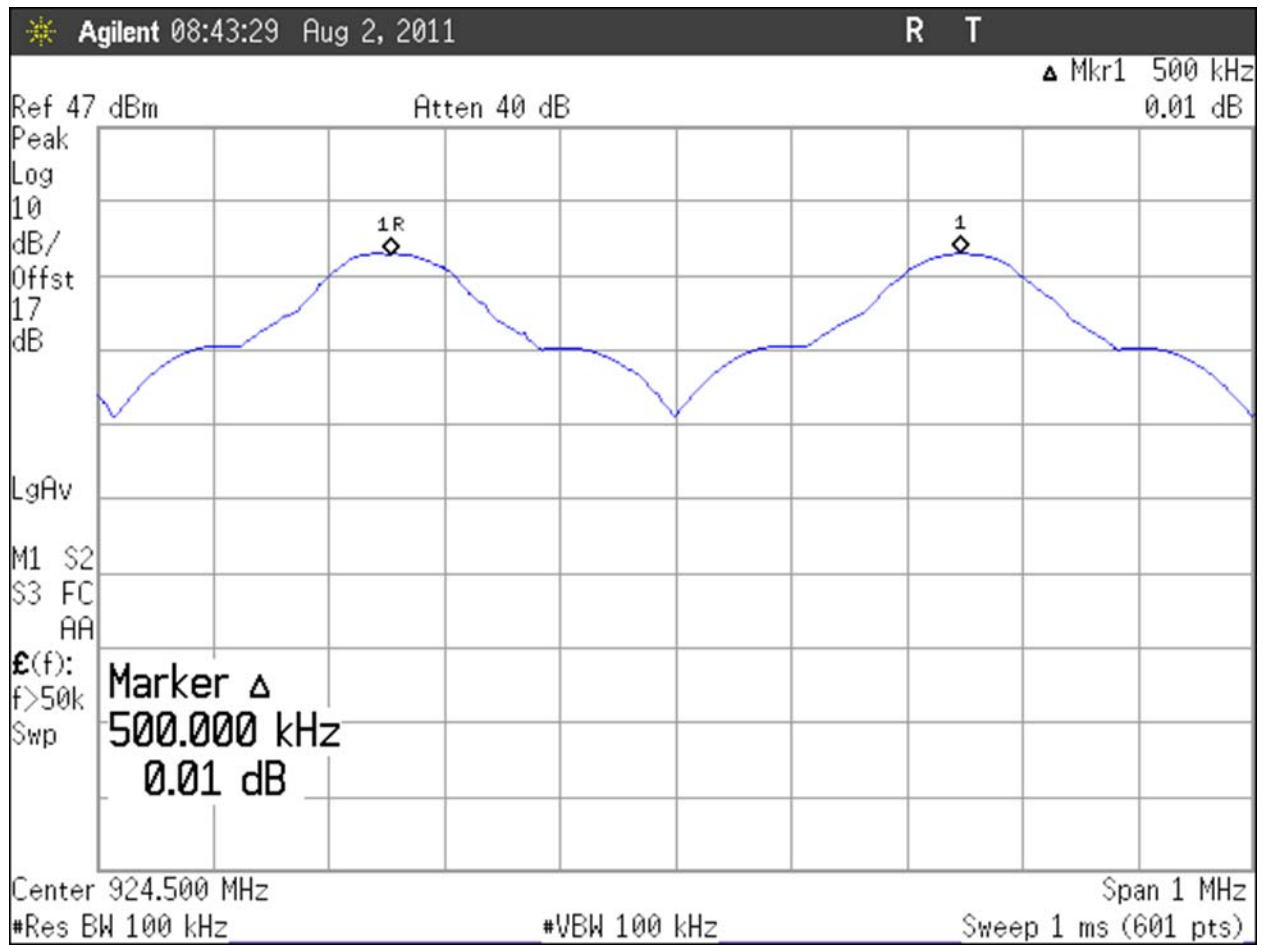


Figure 12: Channel Spacing, Dense Mode

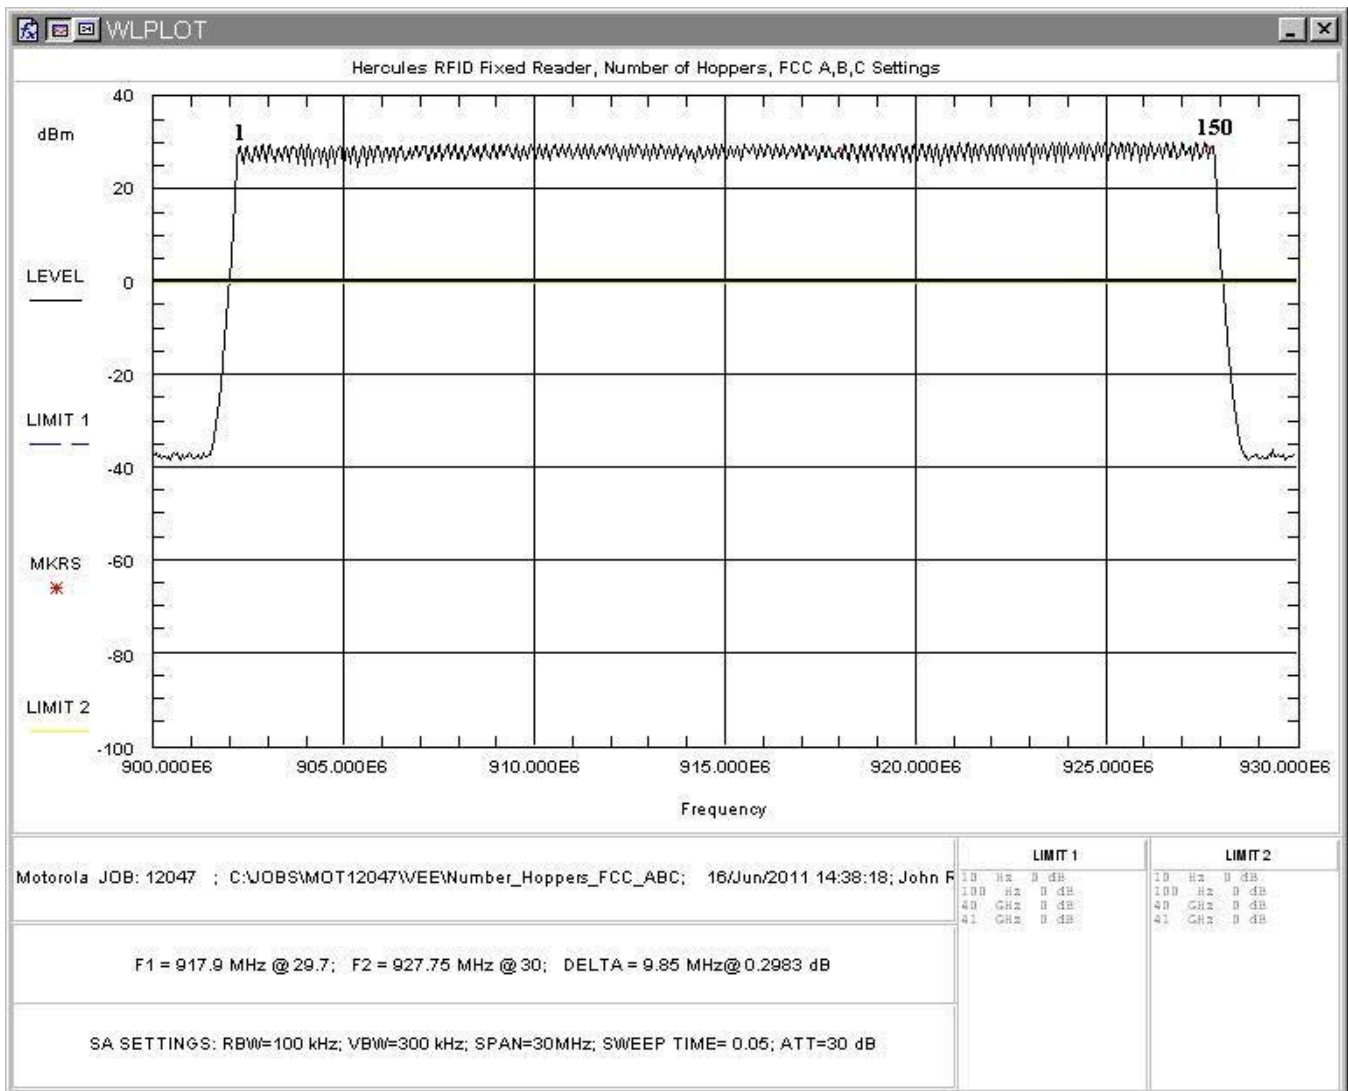


Figure 13: Number of Channels

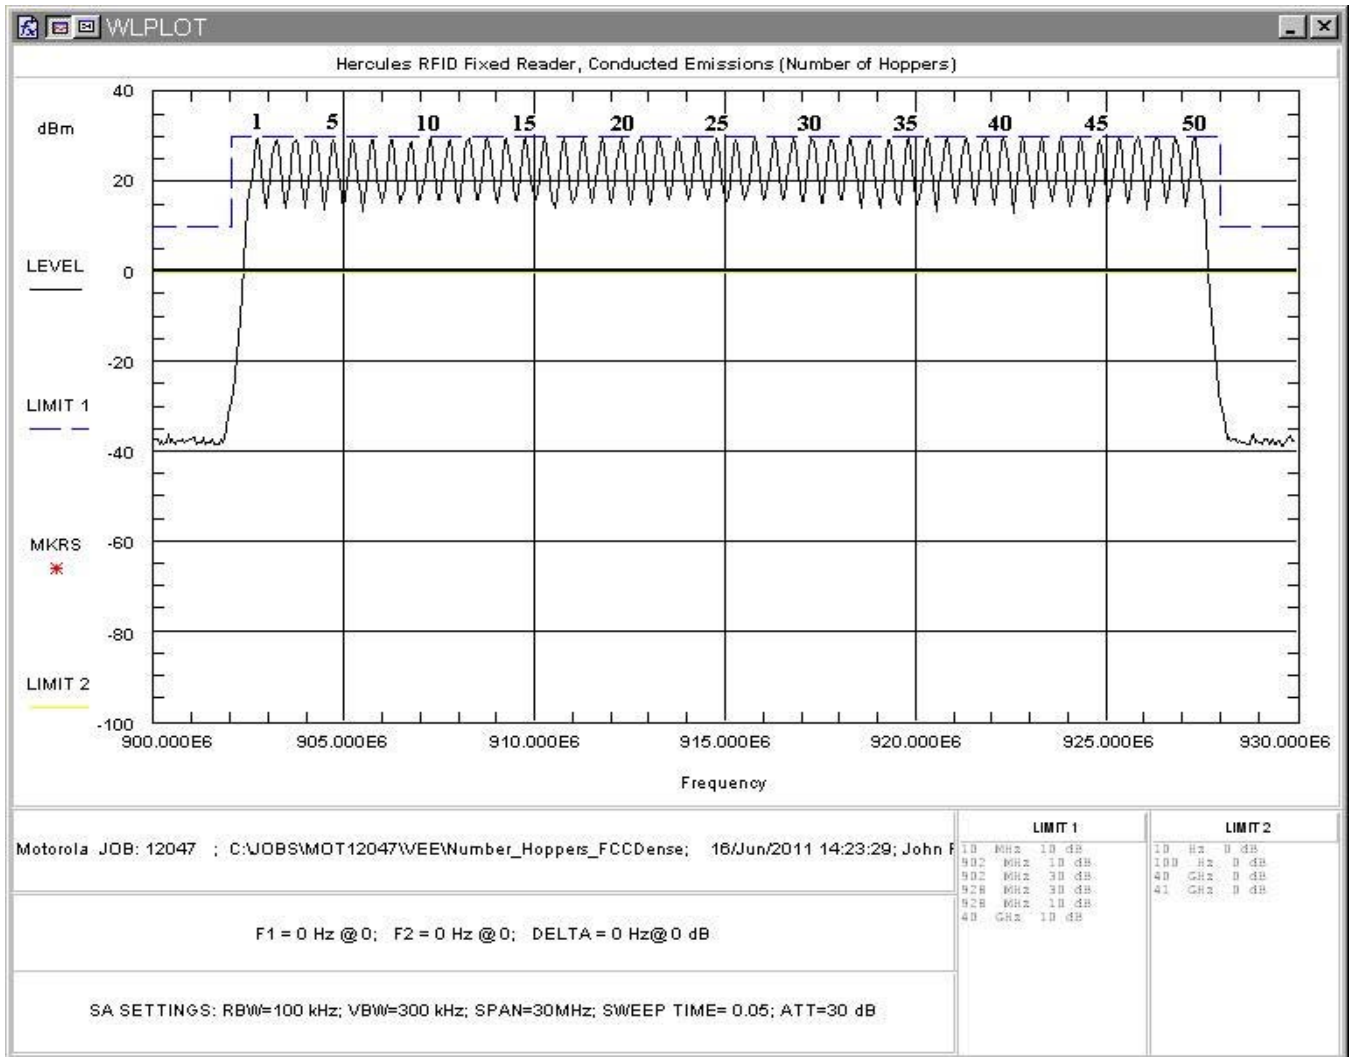


Figure 14: Number of Channels, Dense Mode

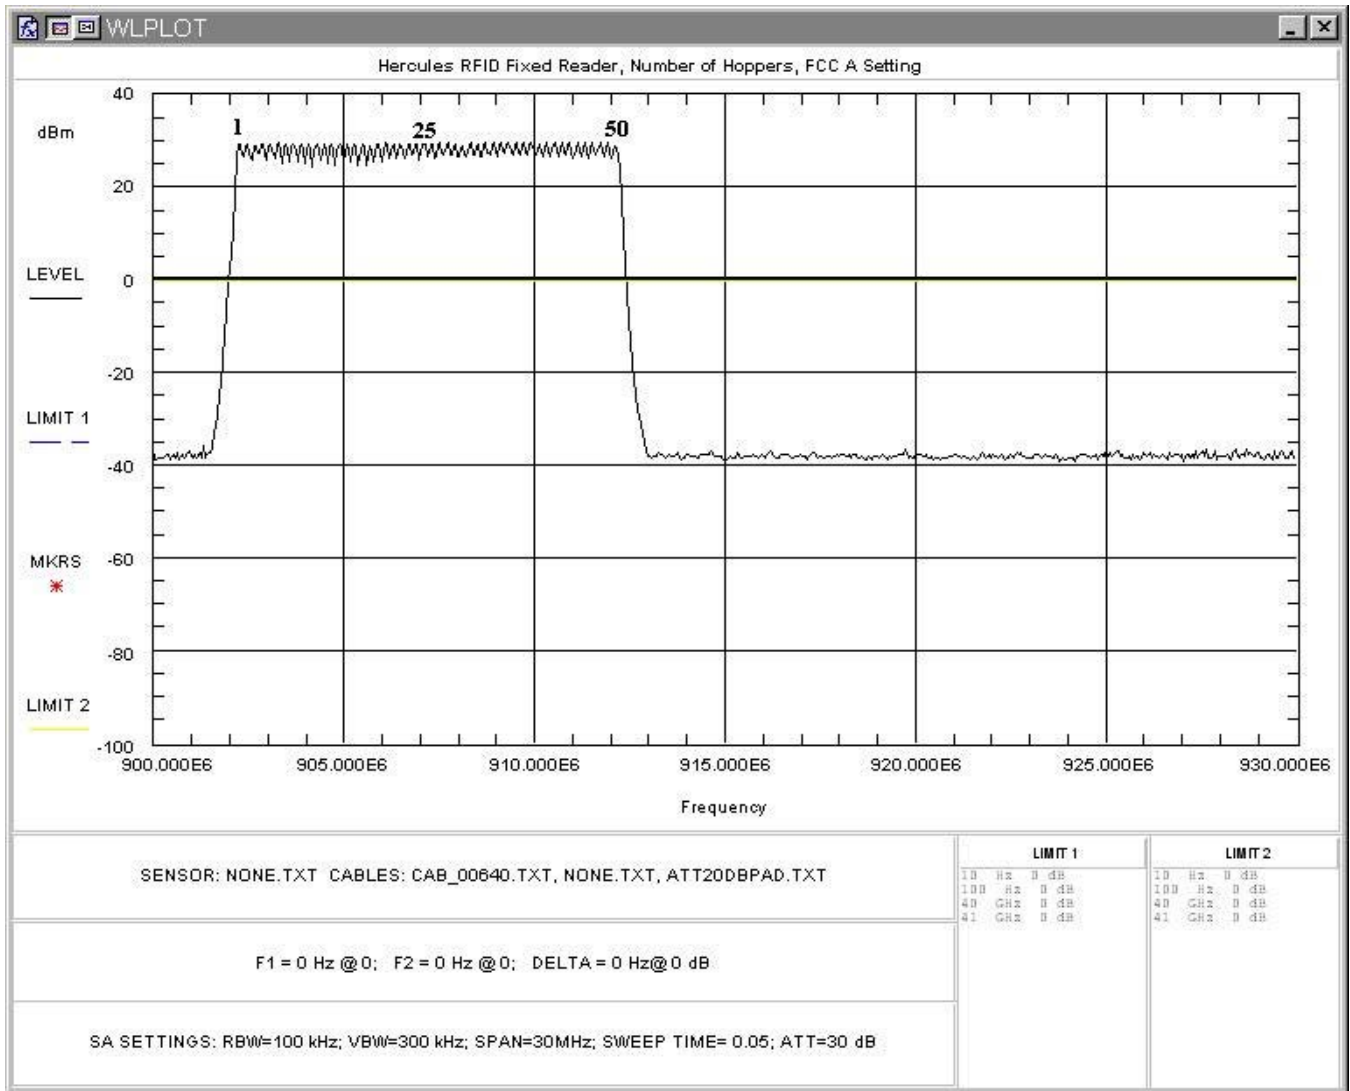


Figure 15: Number of Channels, Band A

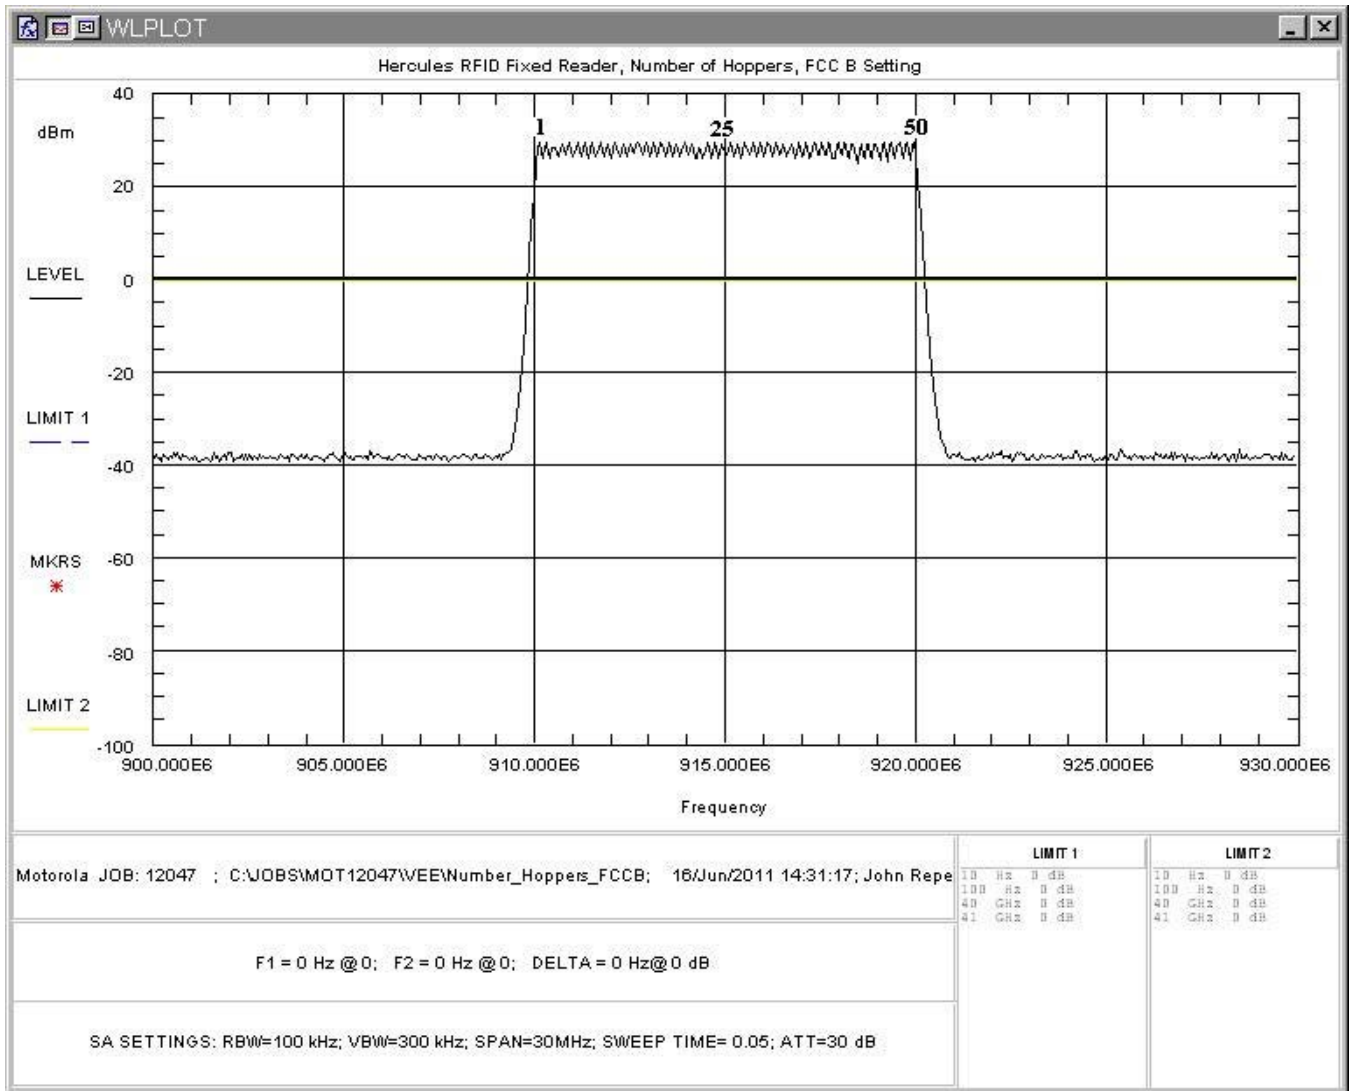


Figure 16: Number of Channels, Band B

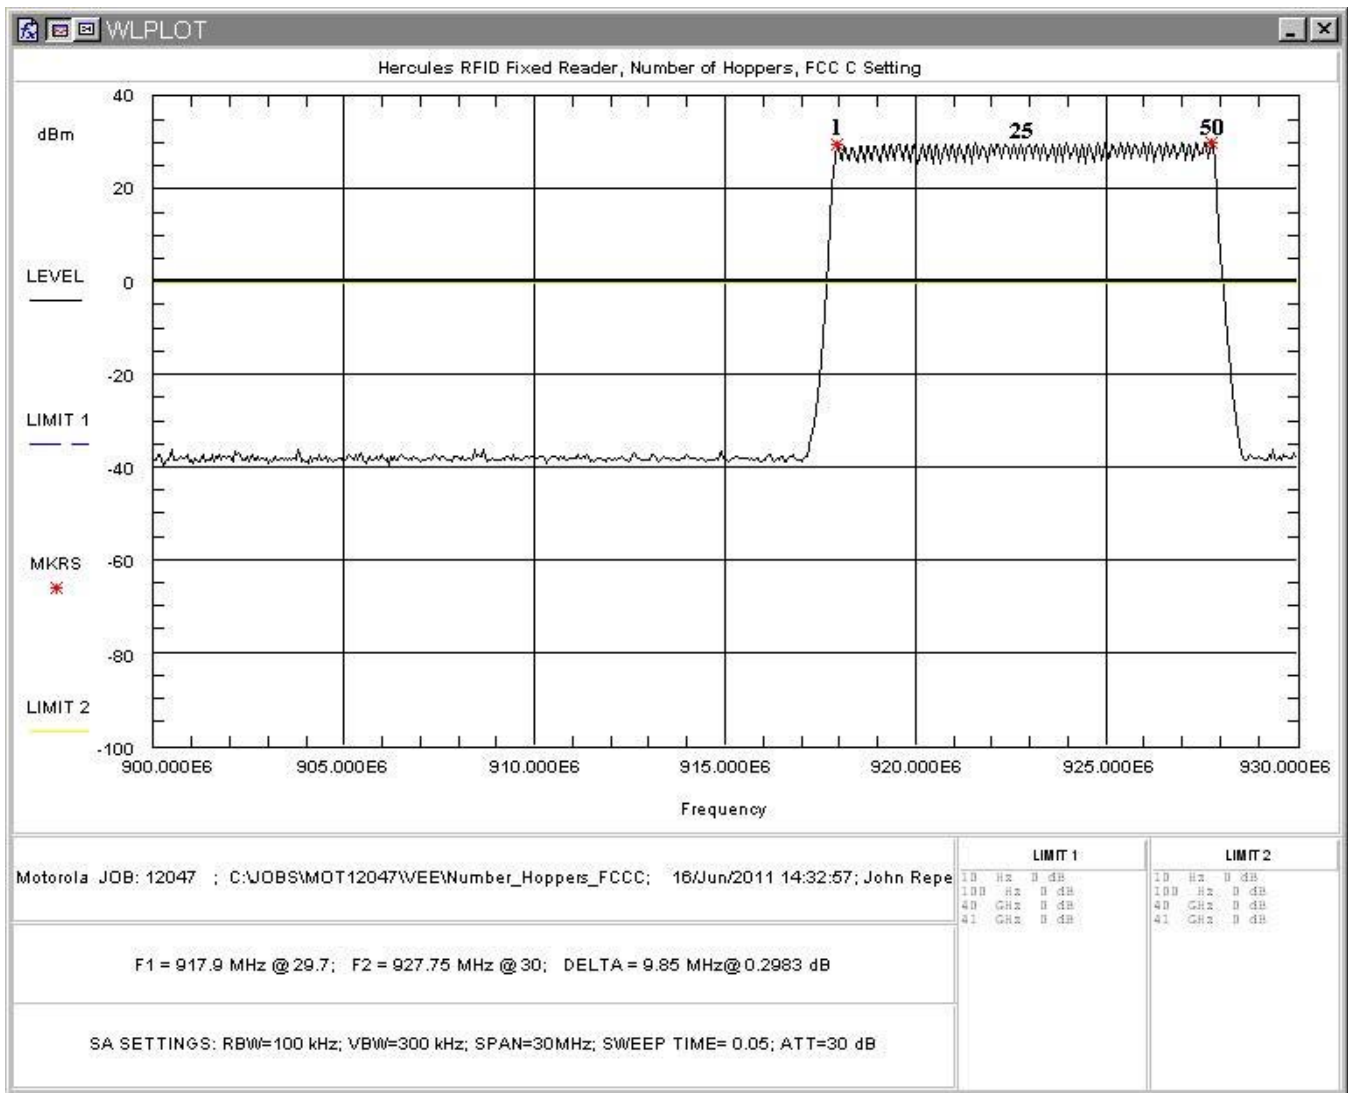


Figure 17: Number of Channels, Band C

5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)

The EUT must comply with requirements for spurious emissions at antenna terminals. Per §15.247(c) all spurious emissions in any 100 kHz bandwidth outside the frequency band in which the spread spectrum device is operating shall be attenuated 20 dB below the highest power level in a 100 kHz bandwidth within the band containing the highest level of the desired power.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 10 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 100 kHz. The amplitude of the EUT carrier frequency was measured to determine the emissions limit (20 dB below the carrier frequency amplitude). The emissions outside of the allocated frequency band were then scanned from 30 MHz up to the tenth harmonic of the carrier.

The following are plots of the conducted spurious emissions data.

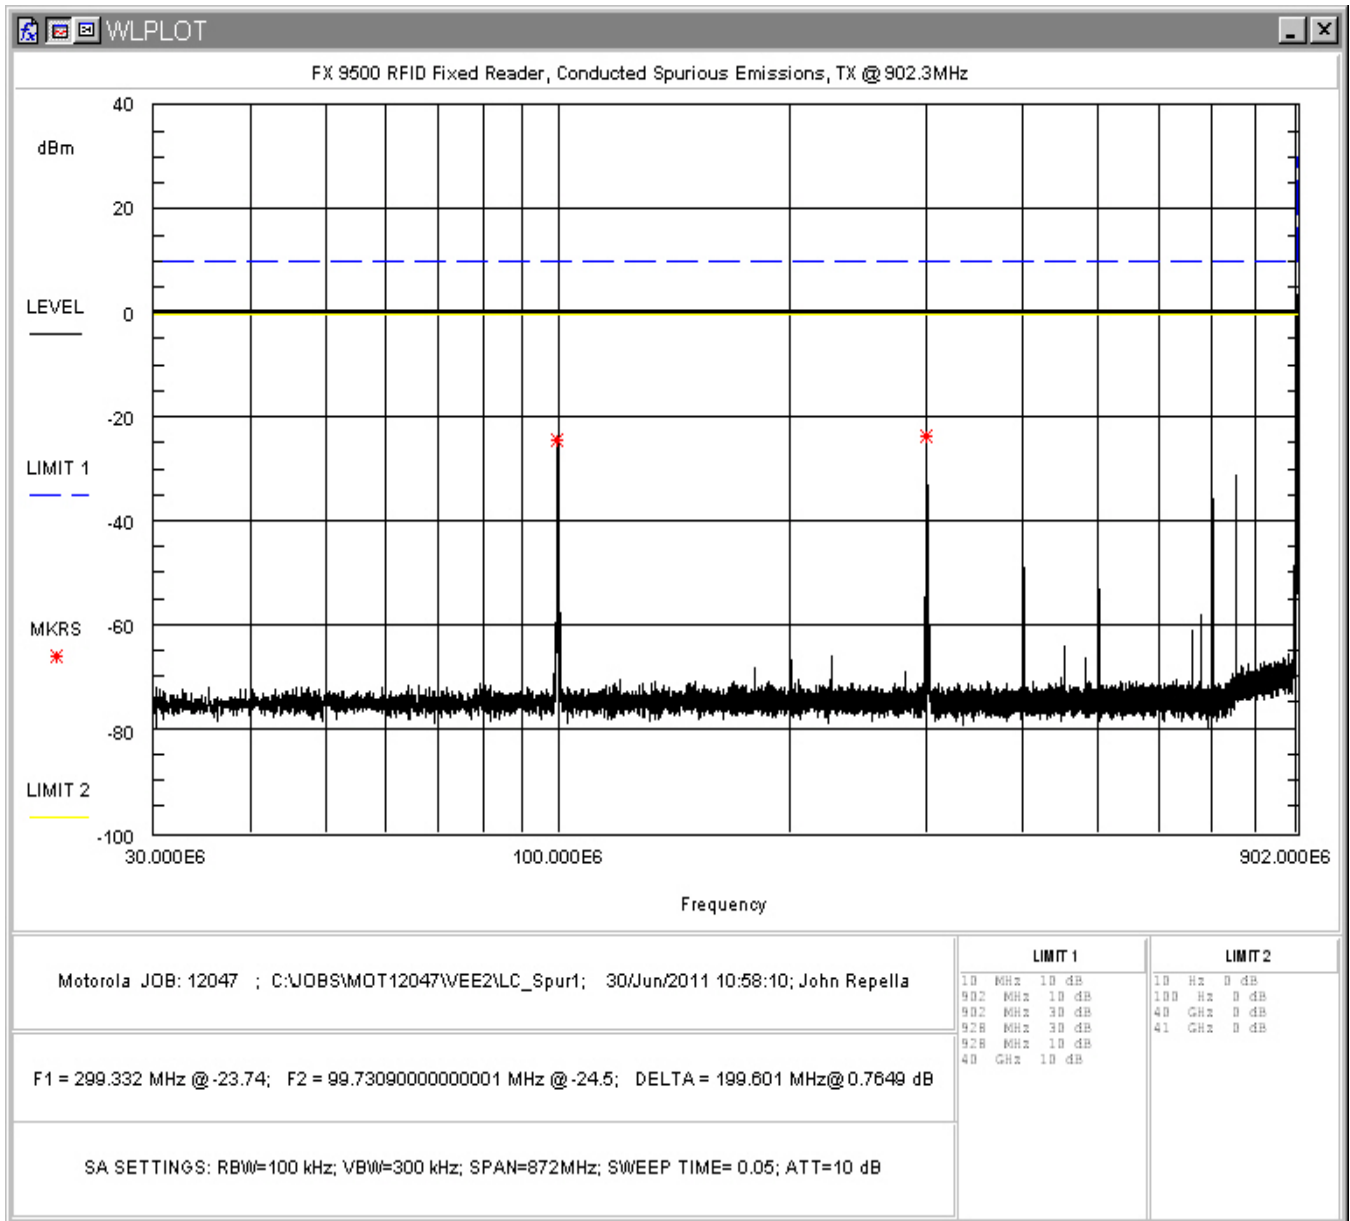


Figure 18: Conducted Spurious Emissions, Low Channel 30 - 900MHz

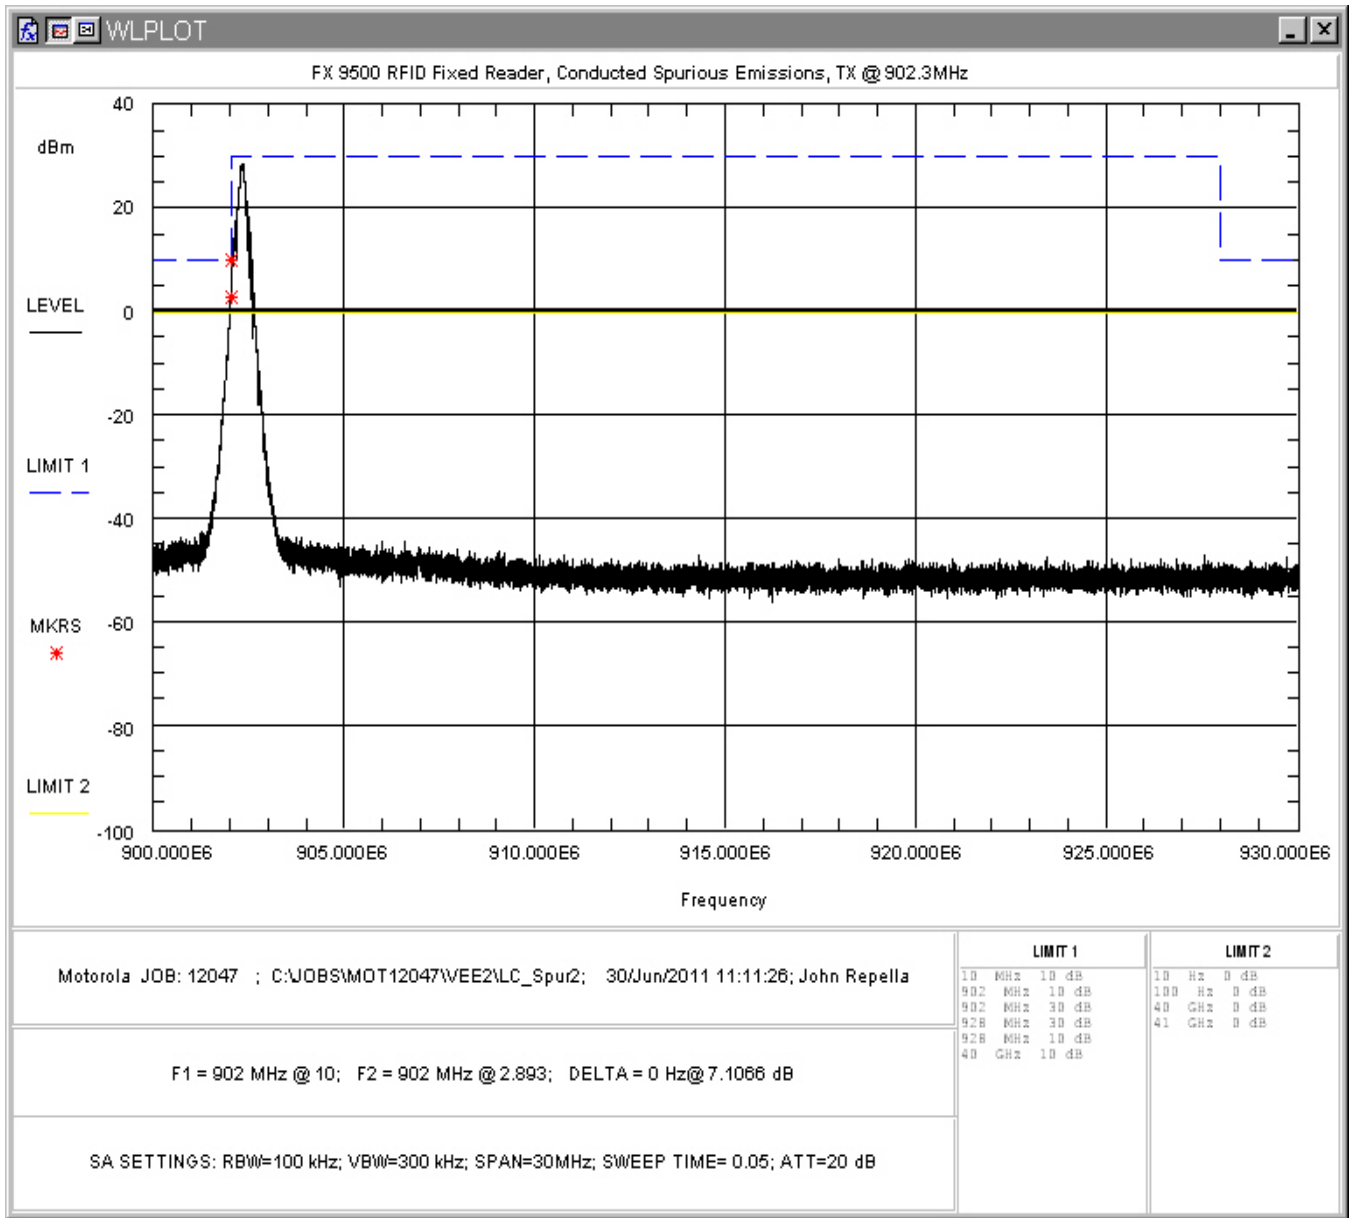


Figure 19: Conducted Spurious Emissions, Low Channel 900MHz – 930MHz

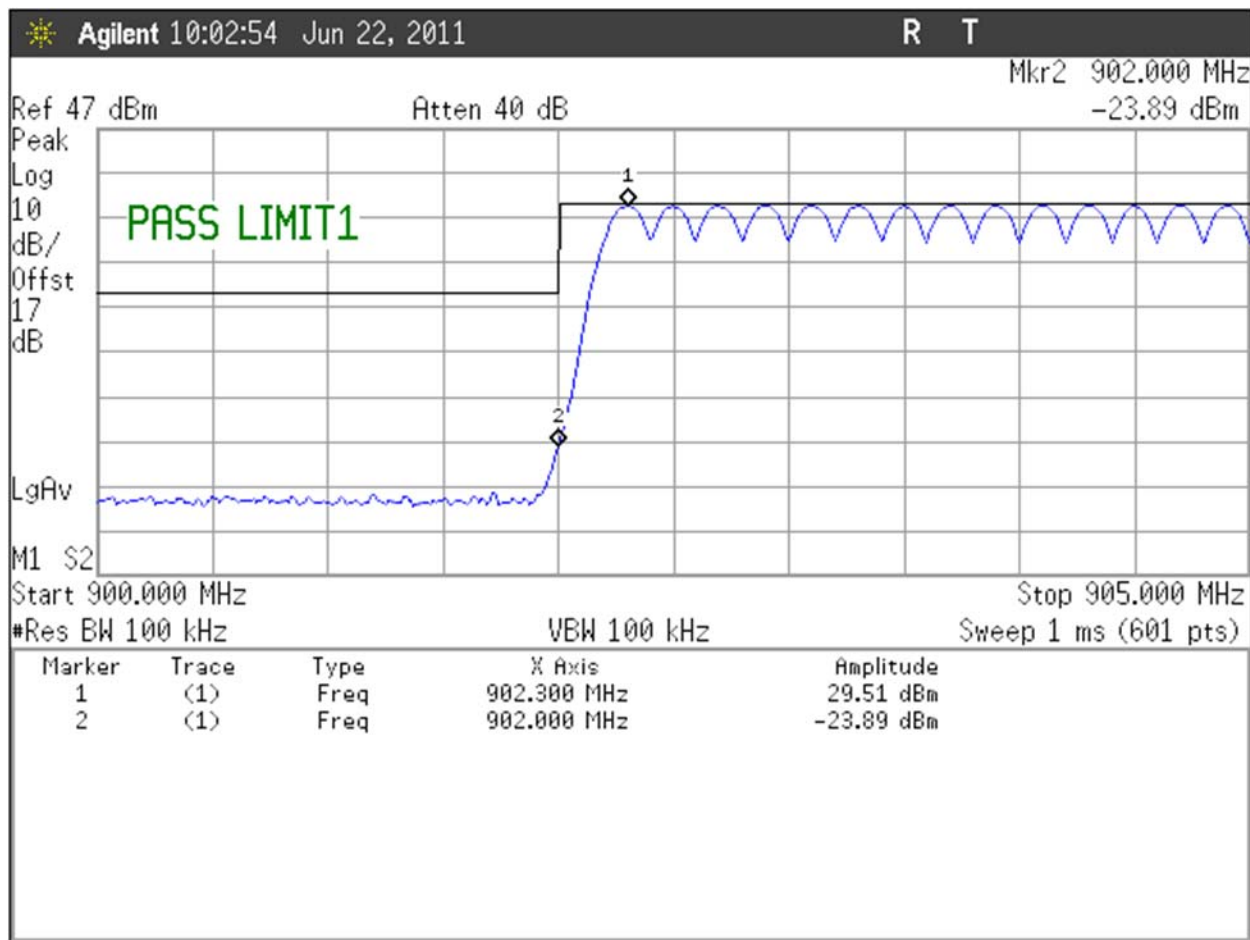


Figure 20: Band Edge Plot (Hopping), Low Channel TX @902.3MHz

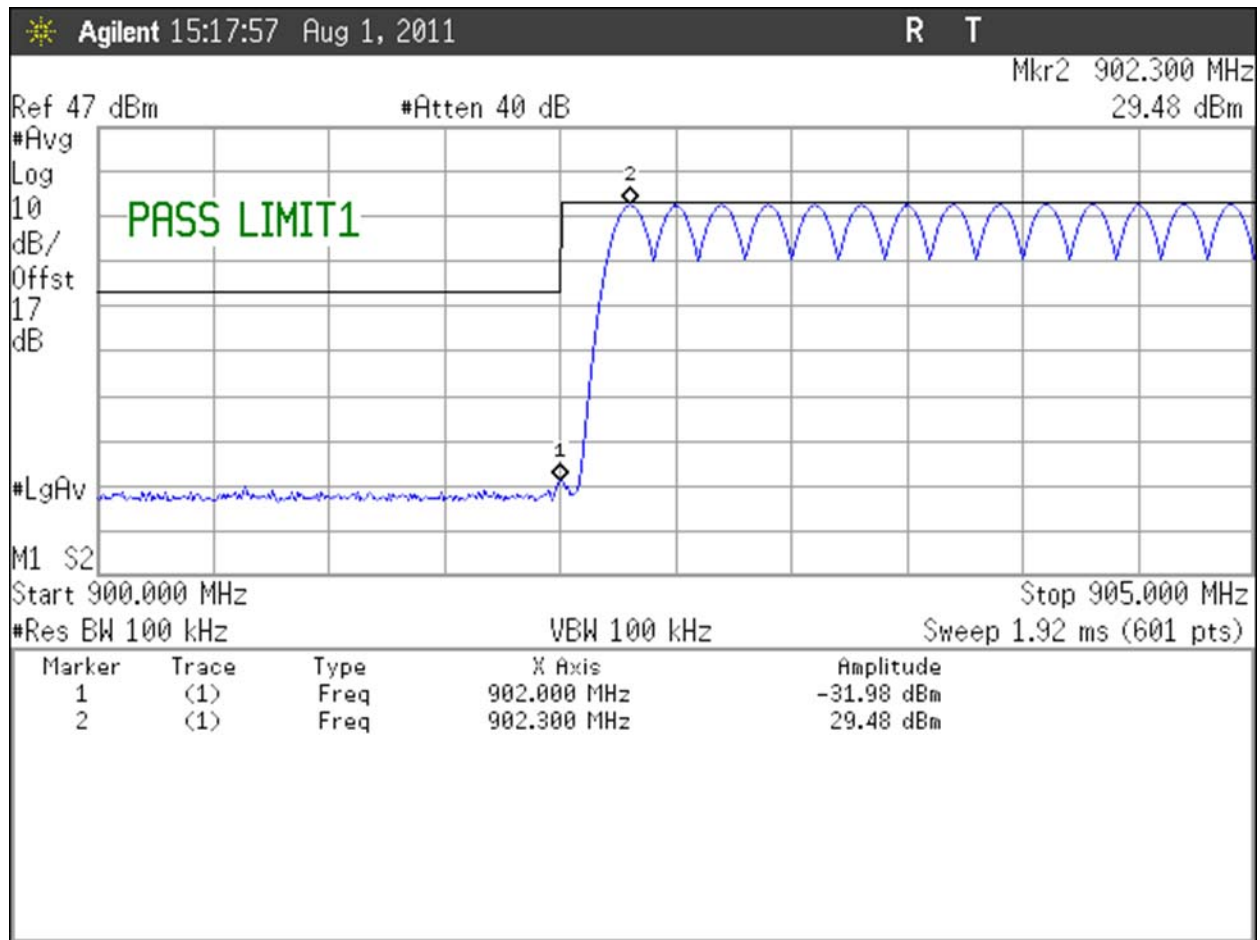


Figure 21: Band Edge Plot (Non-Hopping), Low Channel TX @902.3MHz

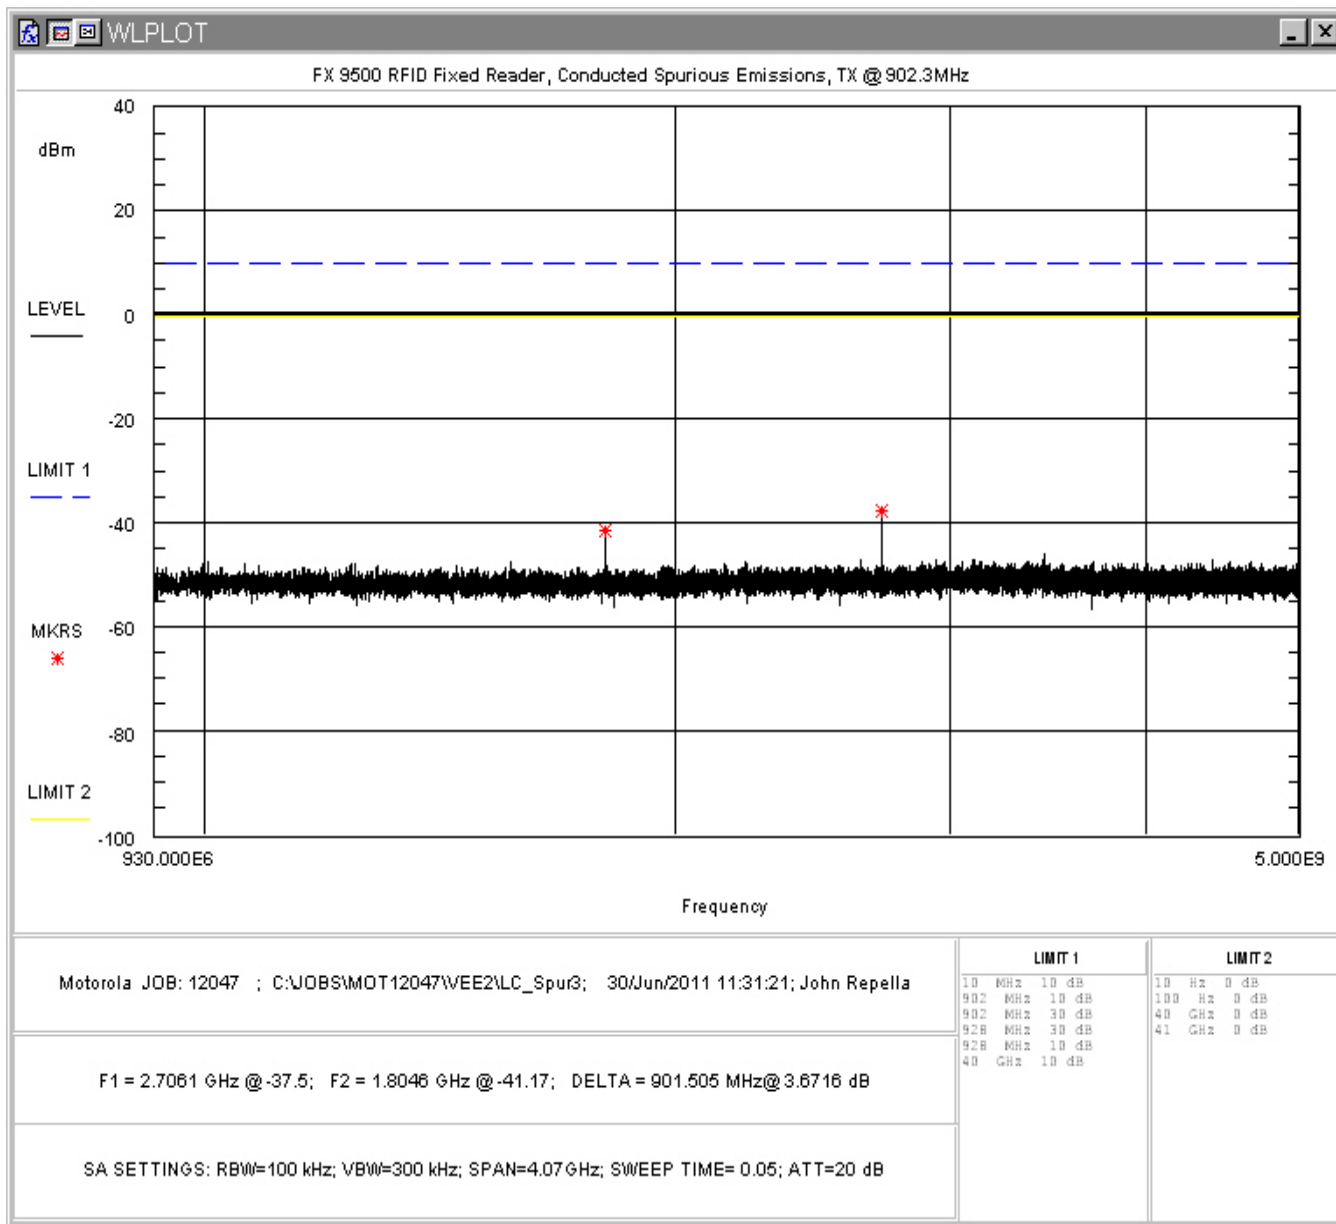


Figure 22: Conducted Spurious Emissions, Low Channel 930MHz – 5GHz

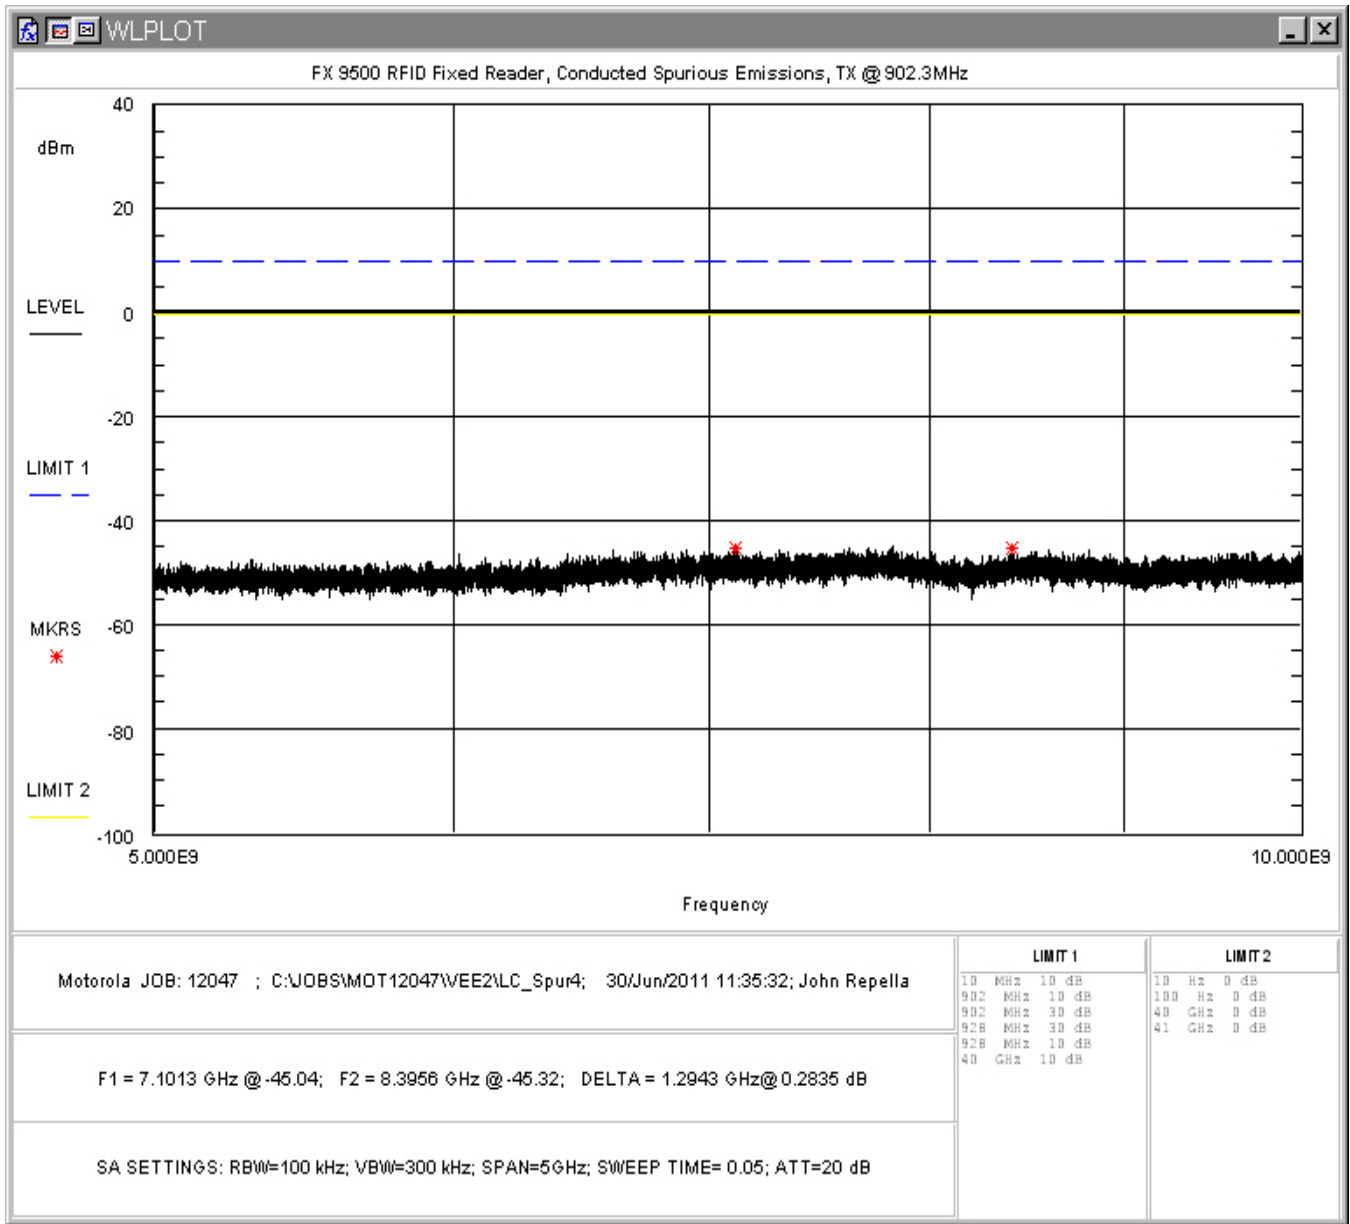


Figure 23: Conducted Spurious Emissions, Low Channel 5 - 10GHz

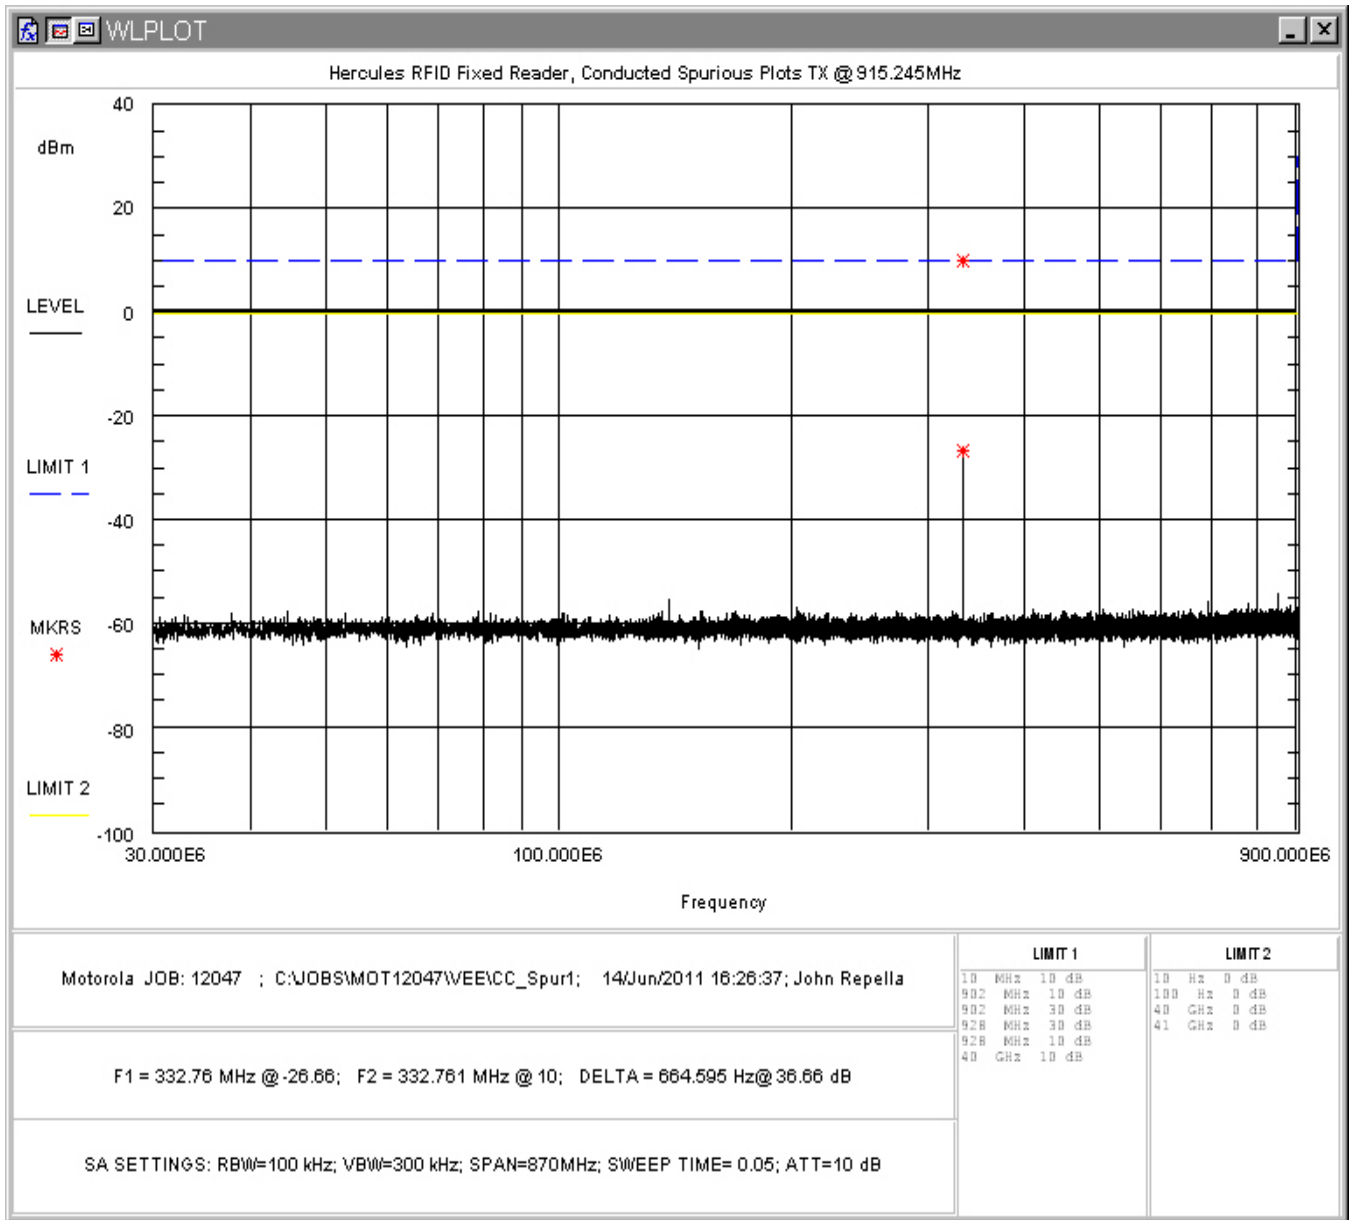


Figure 24: Conducted Spurious Emissions, Mid Channel 30 - 900MHz

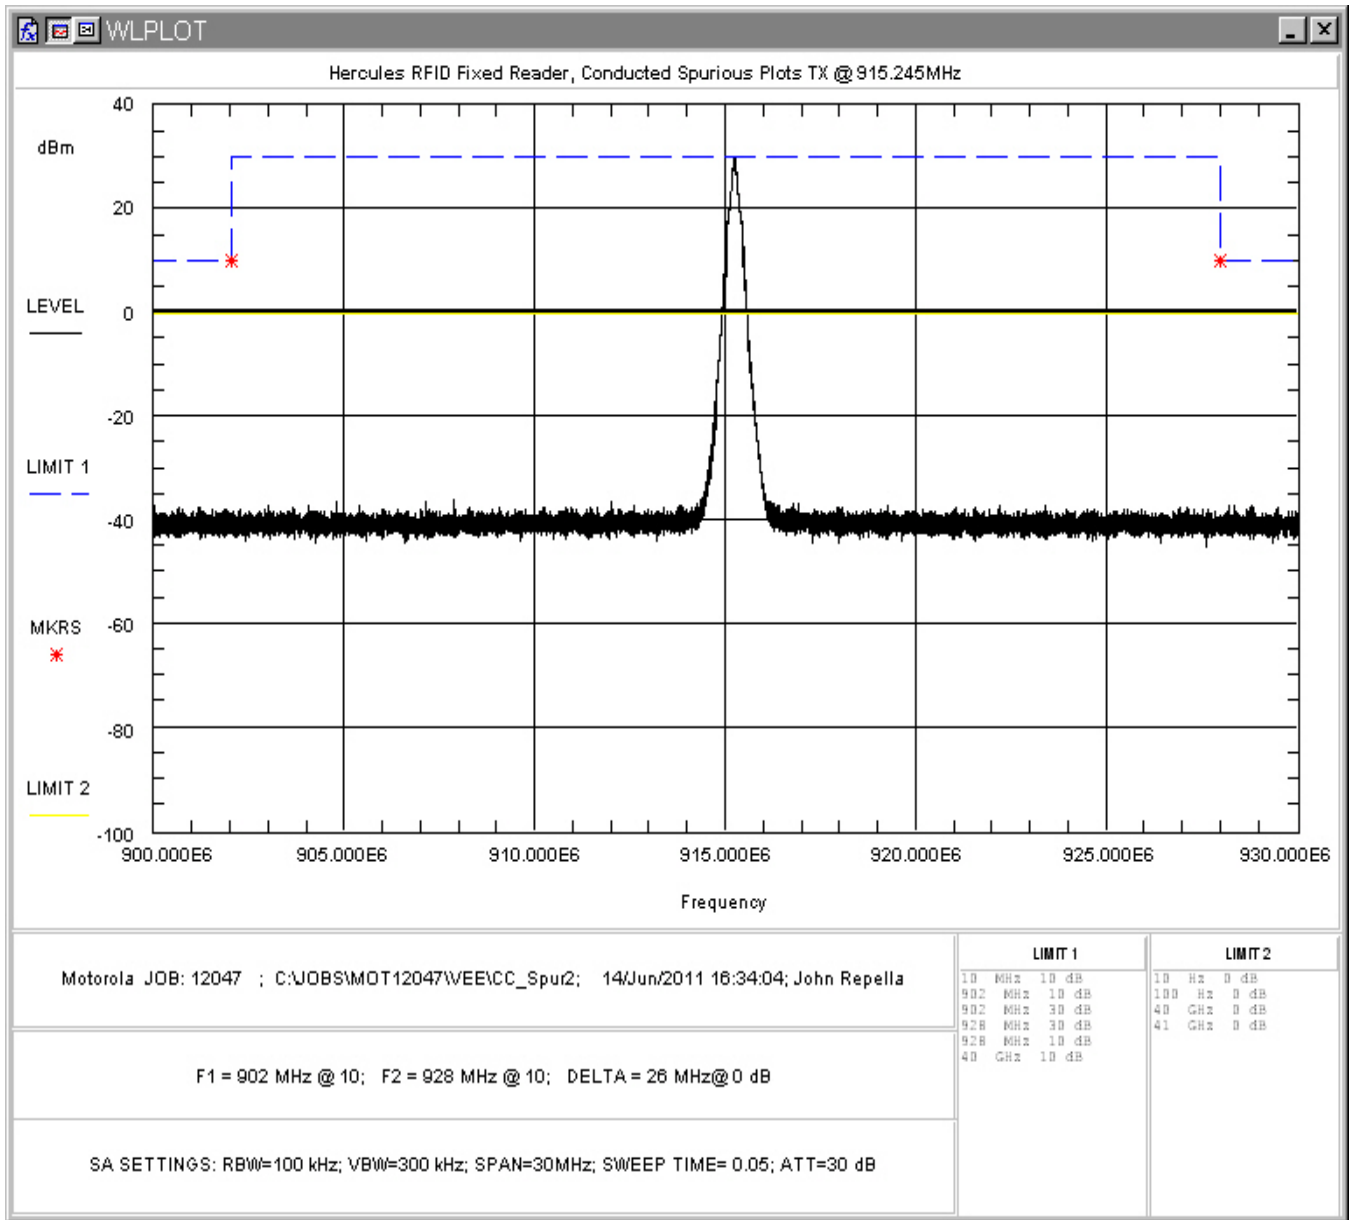


Figure 25: Conducted Spurious Emissions, Mid Channel 900MHz – 930MHz

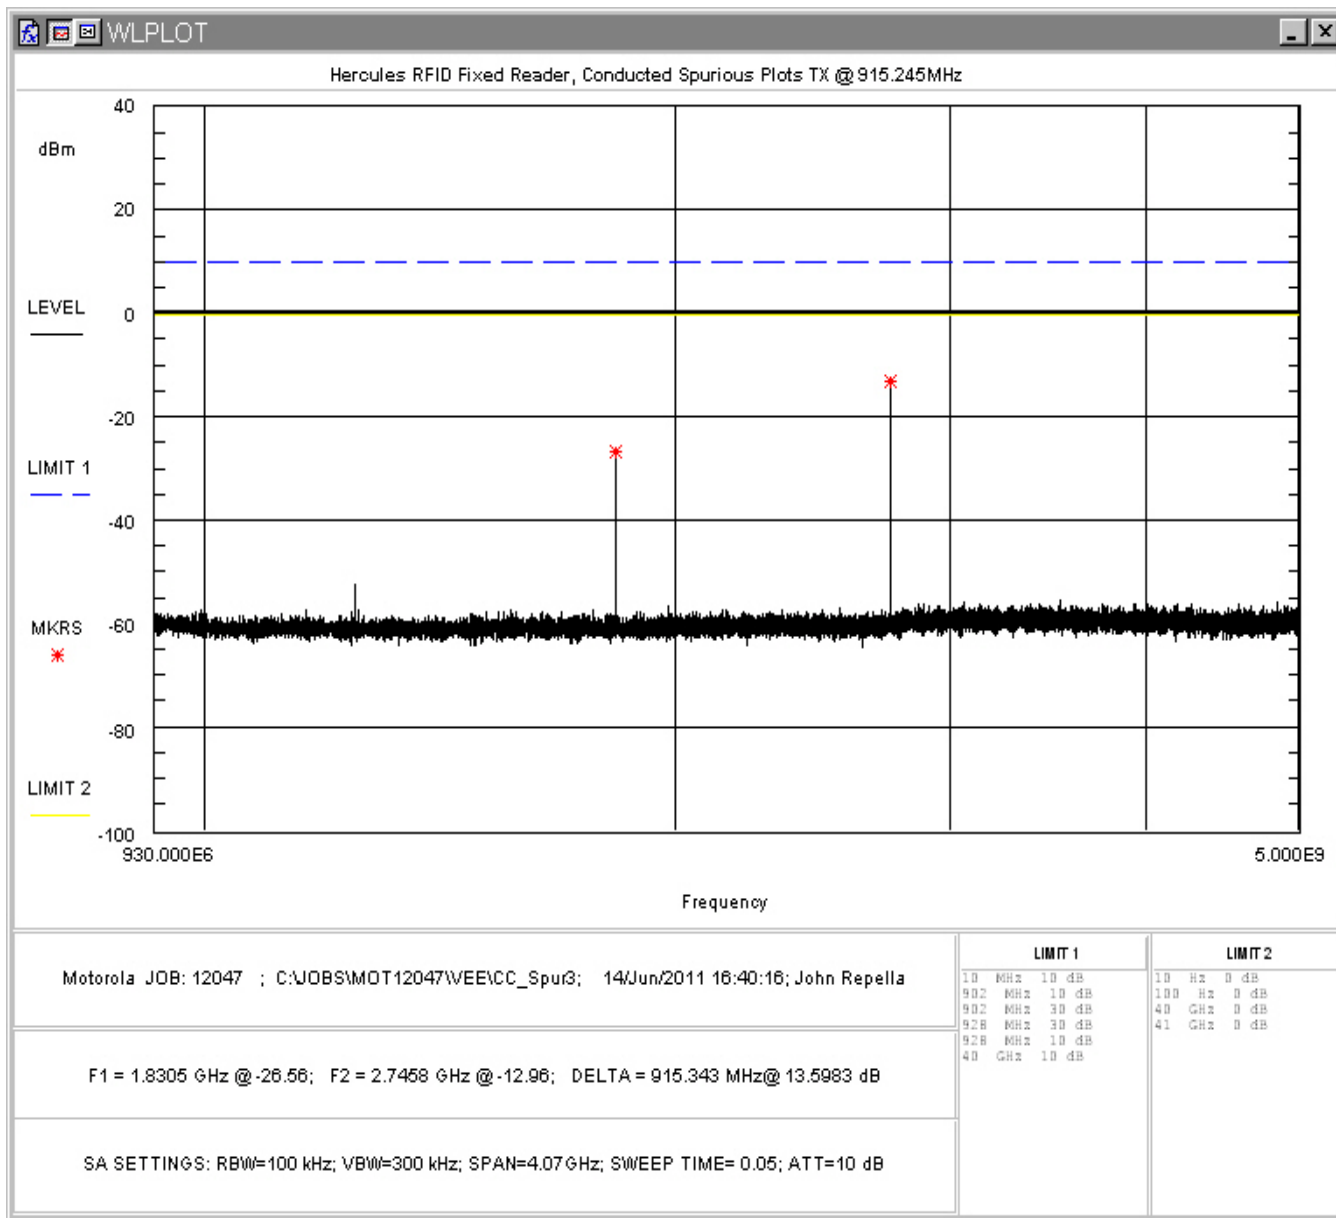


Figure 26: Conducted Spurious Emissions, Mid Channel 930MHz– 5GHz

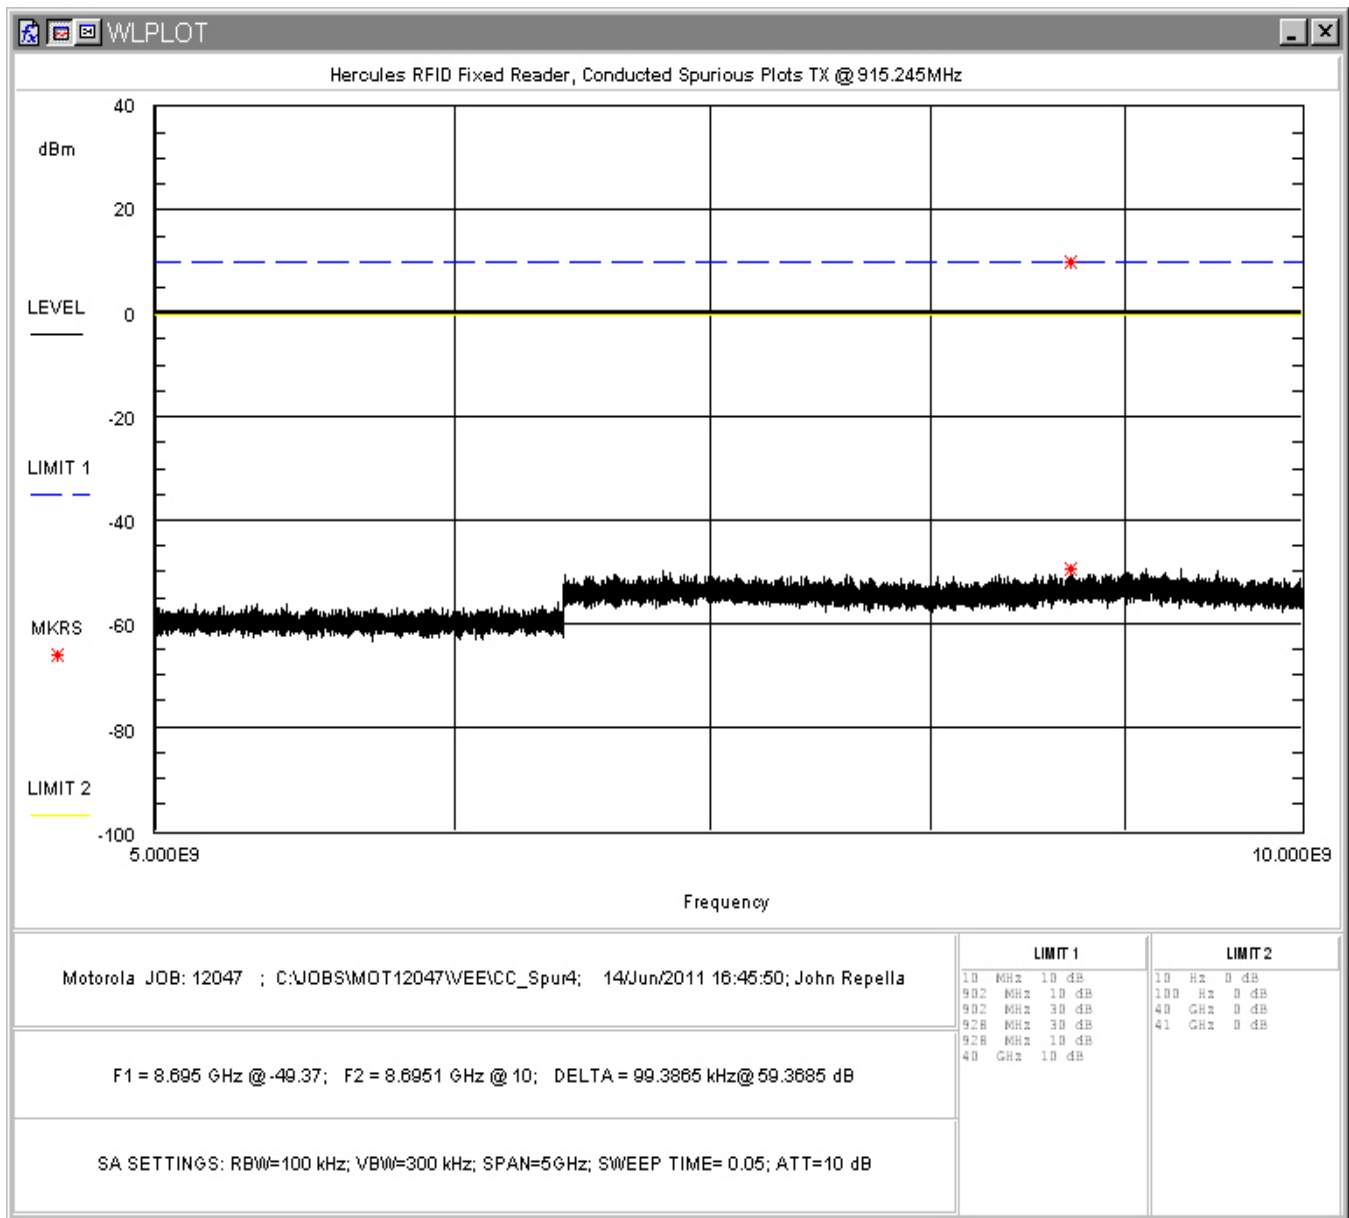


Figure 27: Conducted Spurious Emissions, Mid Channel 5 - 10GHz

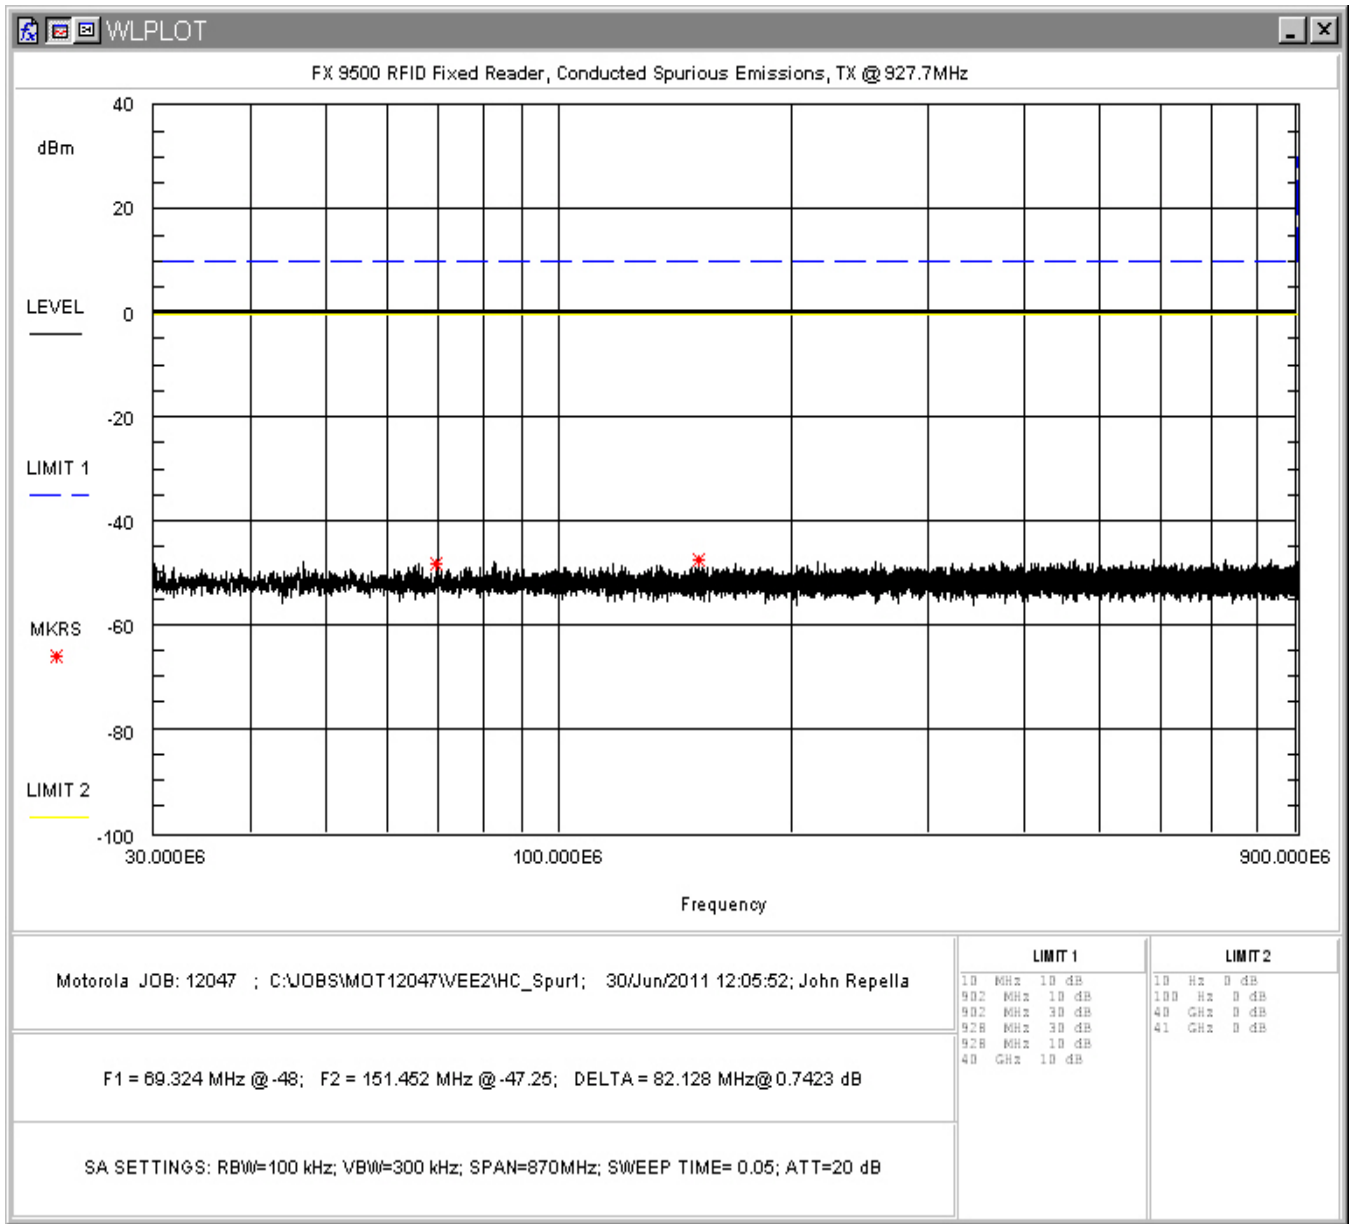


Figure 28: Conducted Spurious Emissions, High Channel 30 - 900MHz

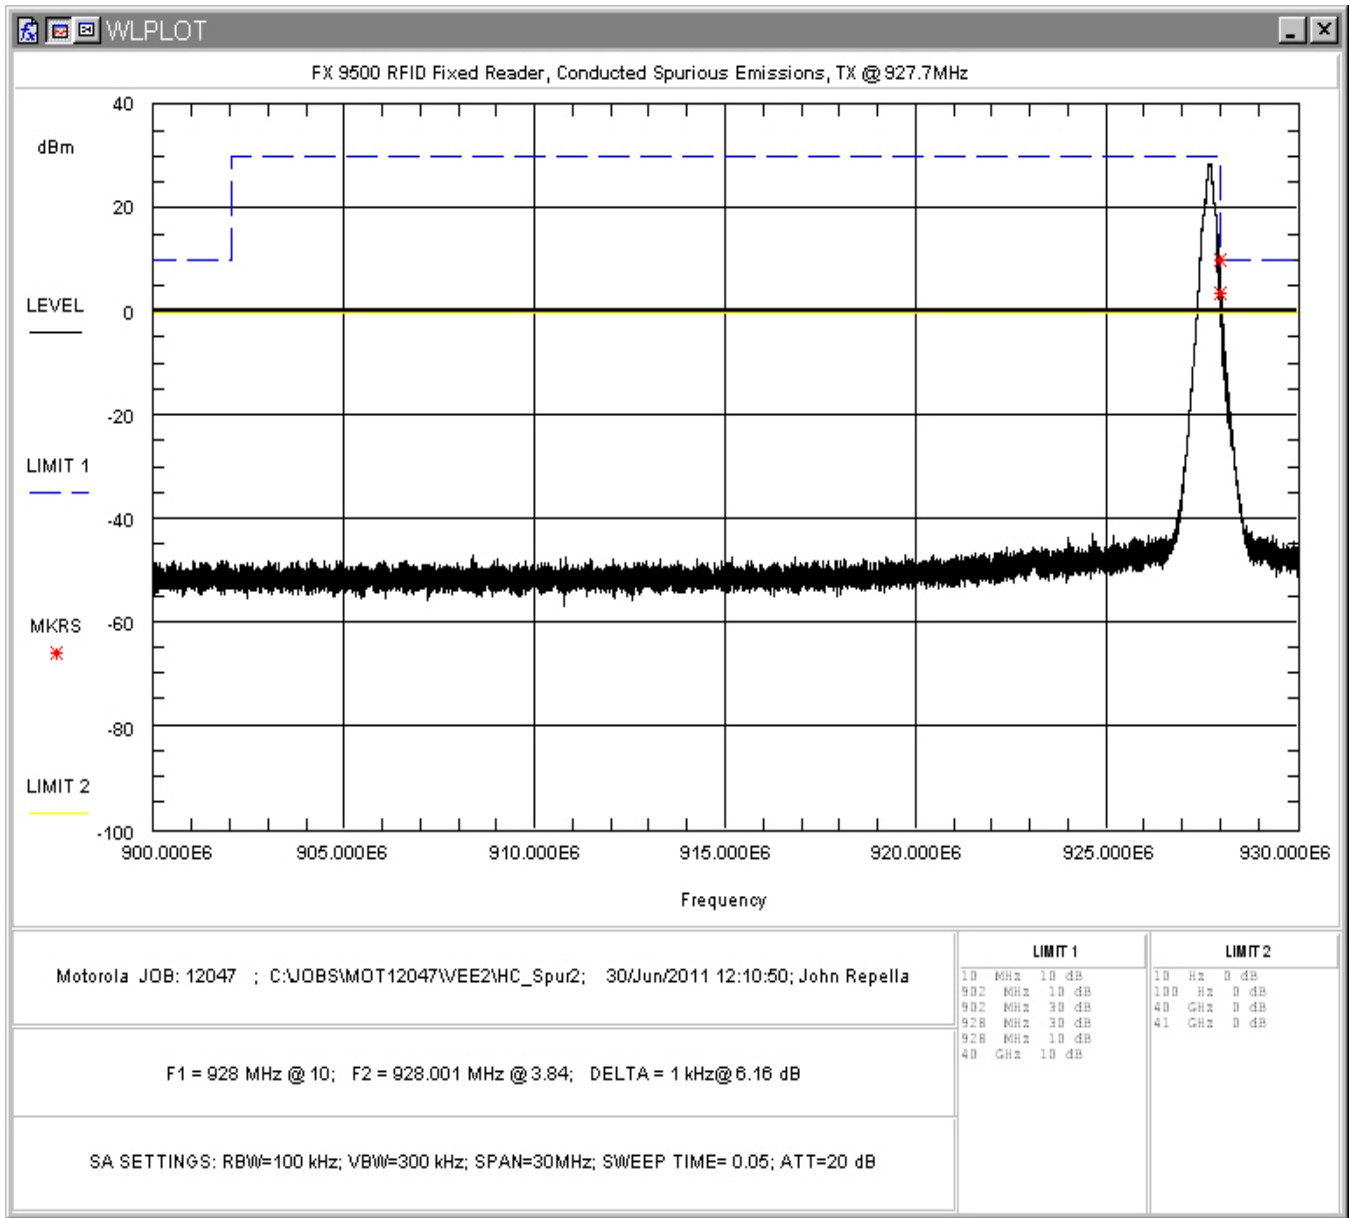


Figure 29: Conducted Spurious Emissions, High Channel 900MHz – 930MHz

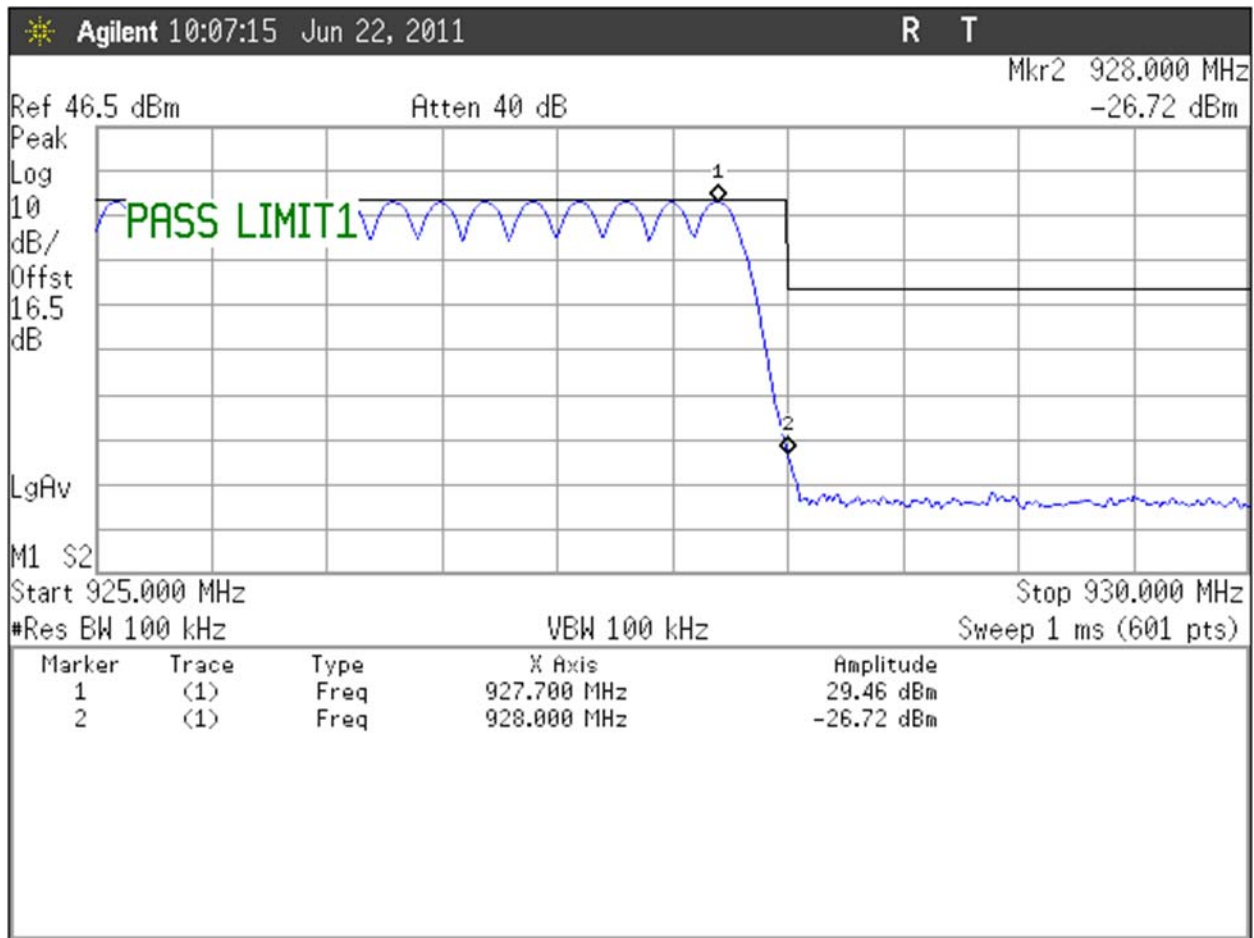


Figure 30: Band Edge Plot (Hopping), Low Channel TX @927.7MHz

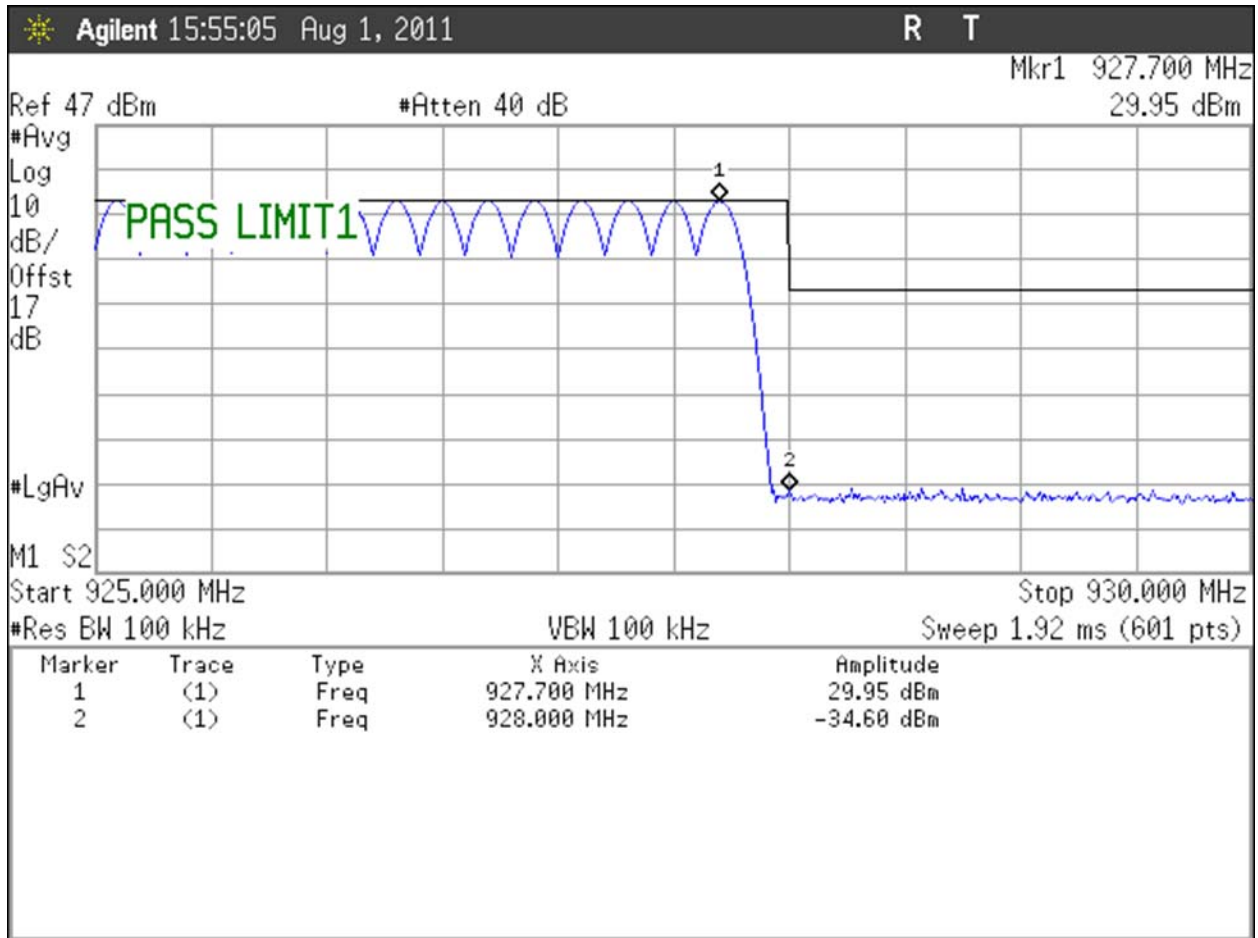


Figure 31: Band Edge Plot (Non-Hopping), Low Channel TX @927.7MHz

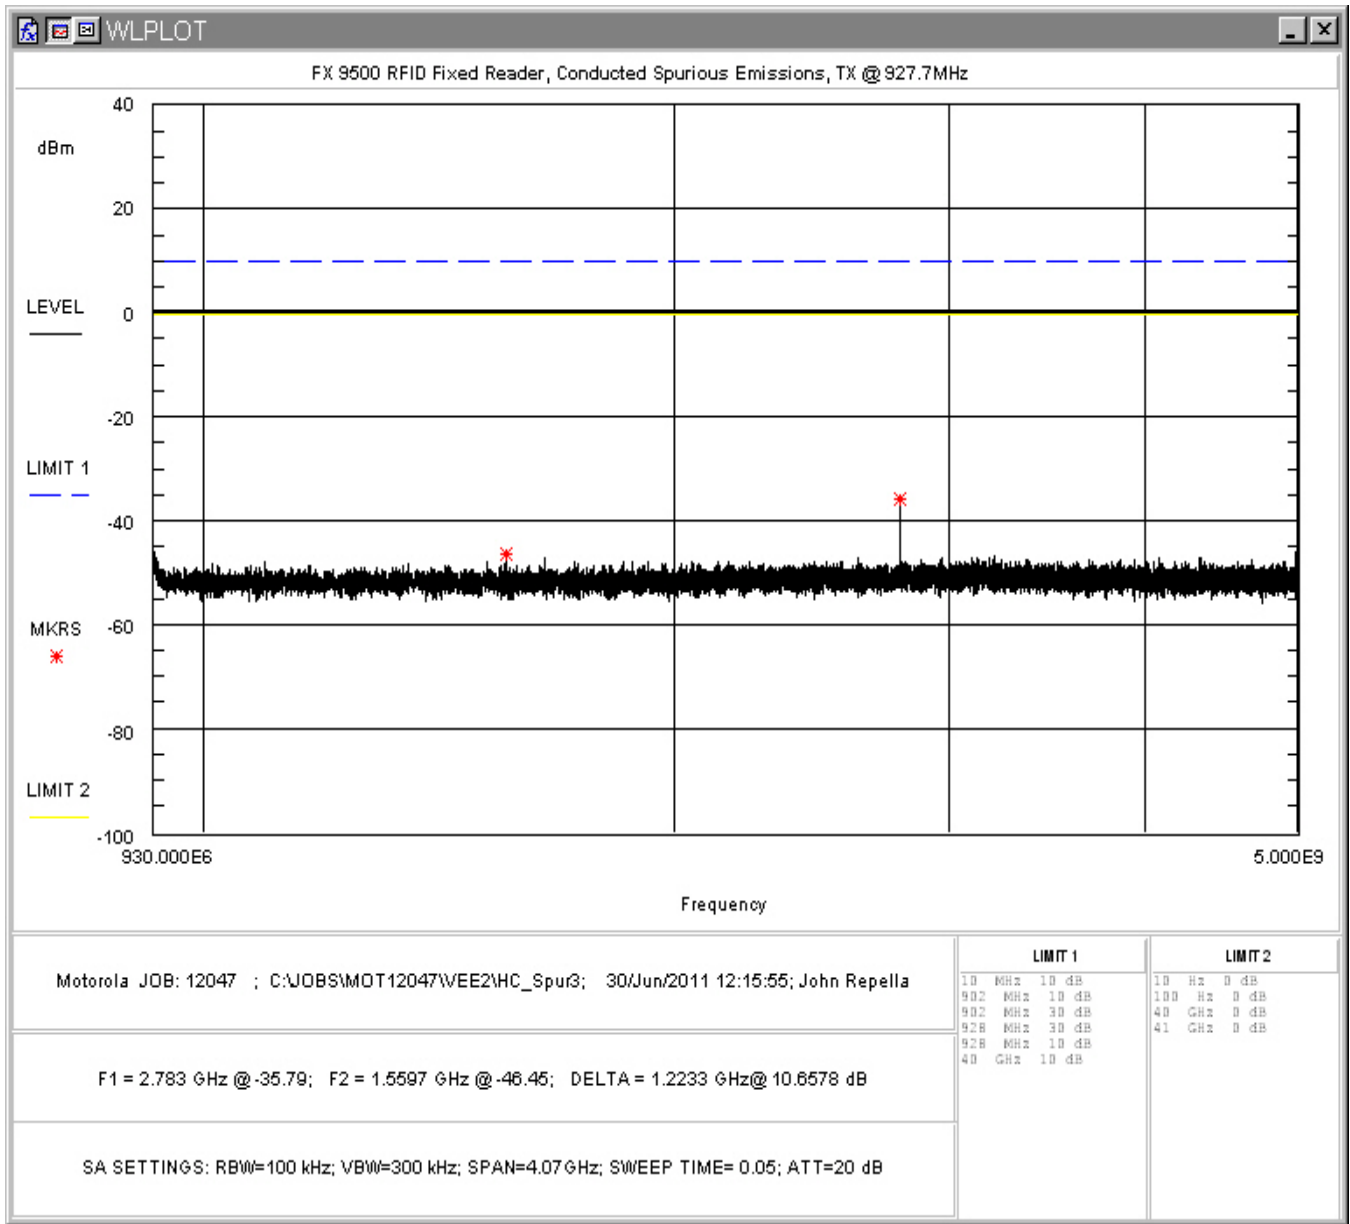


Figure 32: Conducted Spurious Emissions, High Channel 930MHz– 5GHz

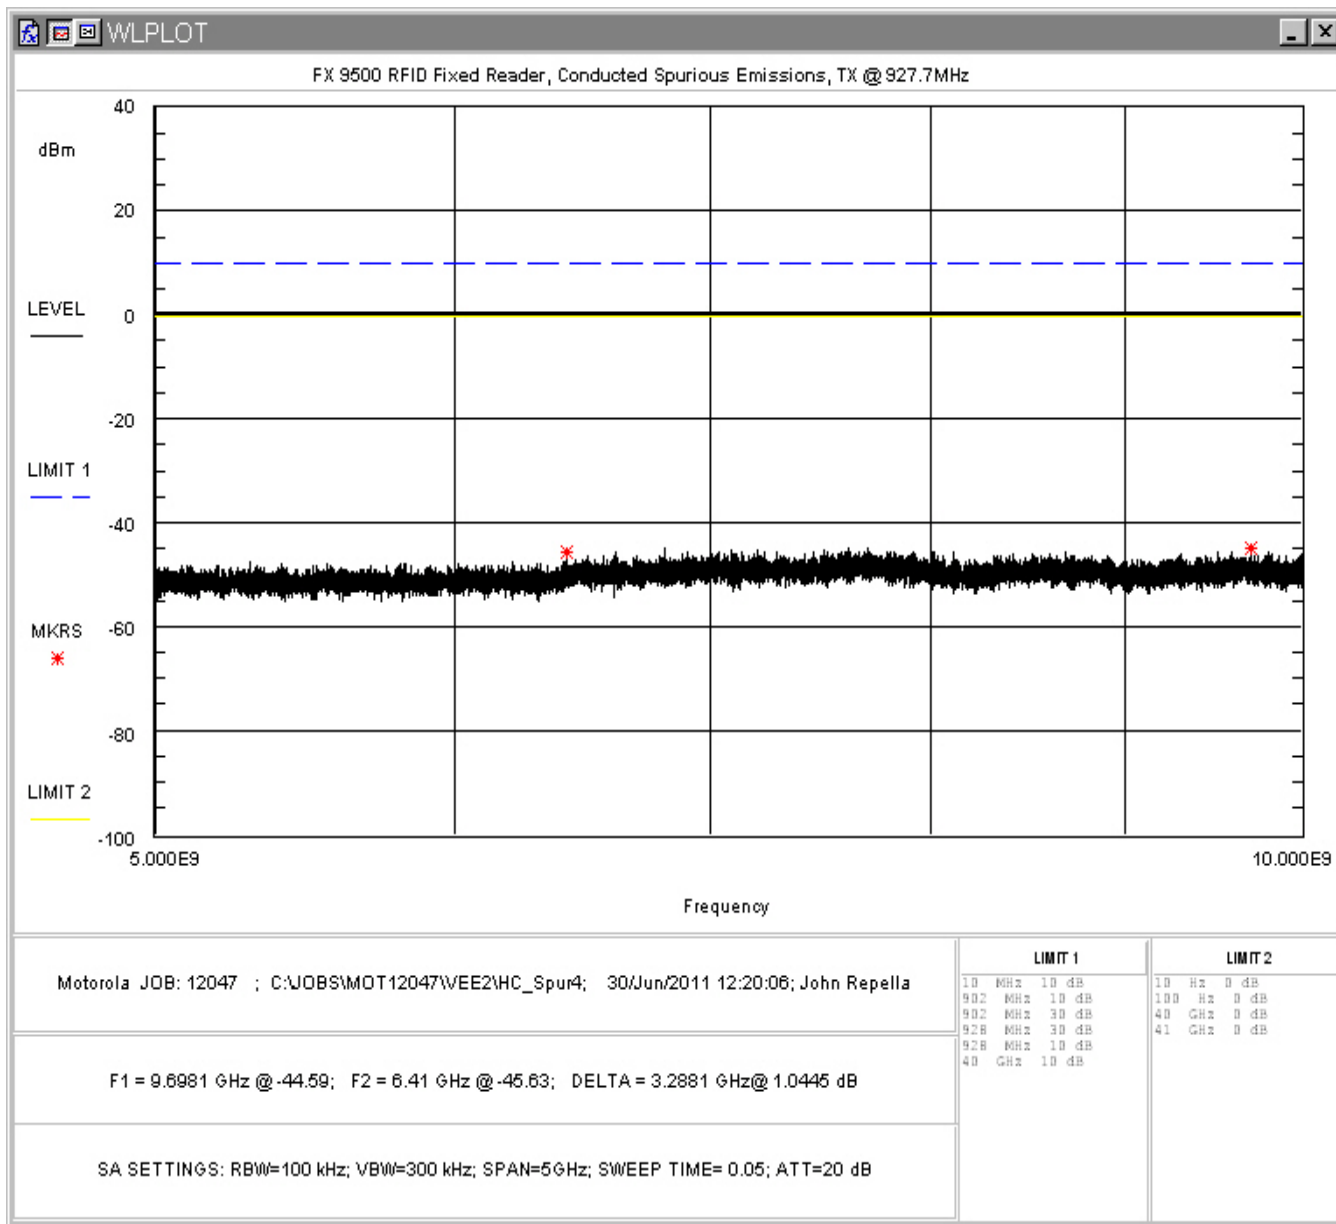


Figure 33: Conducted Spurious Emissions, High Channel 5 - 10GHz

5.6 Radiated Spurious Emissions: (FCC Part 15.205, 15.209 & RSS-210 [A8. 5])

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.205, §15.209, §15.35(b) and RSS 210 Table 1 for peak measurements.

5.6.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The emissions were measured using the following resolution bandwidths:

Table 7: Spectrum Analyzer Settings

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	<30 Hz (Avg.), 1MHz (Peak)

Table 8: Radiated Emission Test Data, Low Frequency Data (<1GHz)

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
34.65	V	190.0	1.3	10.0	17.3	23.1	100.0	-12.7	
43.76	V	270.0	1.2	9.9	11.4	11.6	100.0	-18.7	
49.03	V	45.0	1.6	15.6	8.9	16.9	100.0	-15.5	
54.19	V	45.0	1.3	18.2	8.4	21.5	100.0	-13.4	
58.71	V	180.0	1.5	20.8	8.4	28.7	100.0	-10.8	
62.76	V	90.0	1.4	15.2	8.5	15.2	100.0	-16.3	
69.08	V	180.0	1.7	14.2	8.8	14.2	100.0	-17.0	
79.19	V	220.0	1.5	13.5	9.5	14.2	100.0	-17.0	
114.40	V	180.0	2.3	7.3	14.7	12.7	150.0	-21.5	
124.79	V	10.0	1.5	7.2	15.6	13.8	150.0	-20.7	
250.03	V	10.0	2.0	16.5	15.0	37.7	200.0	-14.5	
275.00	V	180.00	1.00	9.40	17.6	22.4	200.0	-19.0	
300.00	V	225.00	1.75	9.70	17.3	22.3	200.0	-19.0	
325.00	V	315.00	1.30	8.70	18.6	23.2	200.0	-18.7	
350.00	V	315.00	1.30	6.40	19.0	18.7	200.0	-20.6	
375.00	V	315.00	1.30	12.00	19.9	39.5	200.0	-14.1	
500.00	V	180.00	1.00	7.80	23.2	35.3	200.0	-15.1	
34.65	H	90.0	3.6	6.2	17.3	14.9	100.0	-16.5	
43.76	H	200.0	3.7	11.8	11.4	14.5	100.0	-16.8	
49.03	H	90.0	3.7	18.1	8.9	22.5	100.0	-13.0	
54.19	H	90.0	3.8	13.0	8.4	11.8	100.0	-18.6	
58.71	H	90.0	3.3	11.6	8.4	9.9	100.0	-20.0	
62.76	H	90.0	3.7	10.3	8.5	8.7	100.0	-21.2	
69.08	H	180.0	3.7	26.1	8.8	55.7	100.0	-5.1	
79.19	H	180.0	3.6	7.2	9.5	6.9	100.0	-23.3	
114.40	H	90.0	3.7	7.0	14.7	12.2	150.0	-21.8	
124.99	H	0.0	2.8	14.2	15.6	31.0	150.0	-13.7	
250.00	H	220.0	2.4	16.4	15.0	37.2	200.0	-14.6	
275.00	H	0.00	1.00	9.70	17.6	23.2	200.0	-18.7	
300.00	H	45.00	1.40	10.00	17.3	23.1	200.0	-18.7	
325.00	H	45.00	1.40	6.40	18.6	17.8	200.0	-21.0	
350.00	H	90.00	1.80	7.50	19.0	21.2	200.0	-19.5	
375.00	H	90.00	1.80	10.50	19.9	33.2	200.0	-15.6	
500.00	H	315.00	1.80	6.00	23.2	28.7	200.0	-16.9	

Table 9: Radiated Emission Test Data, High Frequency Data (>1GHz)
(Restricted Bands)

TX @ 902.3MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2706.90	V	45.00	1.00	54.33	-2.6	385.7	5000.0	-22.3	
2706.90	V	45.00	1.00	46.00	-2.6	147.8	500.0	-10.6	
3609.20	V	0.00	1.00	48.30	-0.5	245.7	5000.0	-26.2	Amb
3609.20	V	0.00	1.00	37.10	-0.5	67.7	500.0	-17.4	Amb
4511.50	V	0.00	1.00	47.83	0.7	267.2	5000.0	-25.4	Amb
4511.50	V	0.00	1.00	36.67	0.7	73.9	500.0	-16.6	Amb
5413.80	V	0.00	1.00	47.00	3.4	329.7	5000.0	-23.6	Amb
5413.80	V	0.00	1.00	36.33	3.4	96.5	500.0	-14.3	Amb
8120.70	V	0.00	1.00	48.67	7.5	641.7	5000.0	-17.8	Amb
8120.70	V	0.00	1.00	38.00	7.5	187.9	500.0	-8.5	Amb
9023.00	V	0.00	1.00	49.33	9.0	826.5	5000.0	-15.6	Amb
9023.00	V	0.00	1.00	38.33	9.0	232.9	500.0	-6.6	Amb
2706.90	H	45.00	2.03	52.67	-2.6	318.6	5000.0	-23.9	
2706.90	H	45.00	2.03	43.33	-2.6	108.7	500.0	-13.3	
3609.20	H	0.00	2.00	48.17	-0.5	242.0	5000.0	-26.3	Amb
3609.20	H	0.00	2.00	37.00	-0.5	66.9	500.0	-17.5	Amb
4511.50	H	0.00	2.00	47.33	0.7	252.2	5000.0	-25.9	Amb
4511.50	H	0.00	2.00	36.33	0.7	71.1	500.0	-16.9	Amb
5413.80	H	0.00	2.00	48.83	3.4	407.1	5000.0	-21.8	Amb
5413.80	H	0.00	2.00	36.33	3.4	96.5	500.0	-14.3	Amb
8120.70	H	0.00	2.00	49.17	7.5	679.8	5000.0	-17.3	Amb
8120.70	H	0.00	2.00	38.33	7.5	195.1	500.0	-8.2	Amb
9023.00	H	0.00	2.00	50.33	9.0	927.4	5000.0	-14.6	Amb
9023.00	H	0.00	2.00	38.17	9.0	228.7	500.0	-6.8	Amb

TX @ 914.5MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2744.70	V	45.00	1.00	53.17	-2.6	339.1	5000.0	-23.4	
2744.70	V	45.00	1.00	42.83	-2.6	103.1	500.0	-13.7	
3659.60	V	0.00	1.00	48.50	-0.5	251.9	5000.0	-26.0	Amb
3659.60	V	0.00	1.00	37.10	-0.5	67.8	500.0	-17.4	Amb
4574.50	V	0.00	1.00	47.33	0.8	254.0	5000.0	-25.9	Amb
4574.50	V	0.00	1.00	36.50	0.8	73.0	500.0	-16.7	Amb
7319.20	V	0.00	1.00	47.50	7.5	565.0	5000.0	-18.9	Amb
7319.20	V	0.00	1.00	37.83	7.5	185.6	500.0	-8.6	Amb
8234.10	V	0.00	1.00	48.67	7.7	659.4	5000.0	-17.6	Amb
8234.10	V	0.00	1.00	38.00	7.7	193.0	500.0	-8.3	Amb
9149.00	V	0.00	1.00	49.00	9.2	811.7	5000.0	-15.8	Amb
9149.00	V	0.00	1.00	37.83	9.2	224.3	500.0	-7.0	Amb
2744.70	H	45.00	2.03	51.50	-2.6	279.8	5000.0	-25.0	
2744.70	H	45.00	2.03	42.60	-2.6	100.4	500.0	-13.9	
3659.60	H	0.00	2.00	48.50	-0.5	251.9	5000.0	-26.0	Amb
3659.60	H	0.00	2.00	37.00	-0.5	67.0	500.0	-17.5	Amb
4574.50	H	0.00	2.00	48.00	0.8	274.4	5000.0	-25.2	Amb
4574.50	H	0.00	2.00	36.50	0.8	73.0	500.0	-16.7	Amb
7319.20	H	0.00	2.00	48.83	7.5	658.5	5000.0	-17.6	Amb
7319.20	H	0.00	2.00	37.83	7.5	185.6	500.0	-8.6	Amb
8234.10	H	0.00	2.00	49.33	7.7	711.4	5000.0	-16.9	Amb
8234.10	H	0.00	2.00	37.83	7.7	189.3	500.0	-8.4	Amb
9149.00	H	0.00	2.00	49.33	9.2	843.1	5000.0	-15.5	Amb
9149.00	H	0.00	2.00	37.83	9.2	224.3	500.0	-7.0	Amb

TX @927.7MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2783.10	V	45.00	1.00	56.67	-2.5	509.8	5000.0	-19.8	
2783.10	V	45.00	1.00	48.17	-2.5	191.6	500.0	-8.3	
3710.80	V	0.00	1.00	49.50	-0.4	283.6	5000.0	-24.9	
3710.80	V	0.00	1.00	37.83	-0.4	74.0	500.0	-16.6	
4638.50	V	0.00	1.00	48.50	0.8	292.4	5000.0	-24.7	Amb
4638.50	V	0.00	1.00	36.00	0.8	69.3	500.0	-17.2	Amb
7421.60	V	0.00	1.00	48.83	7.2	632.8	5000.0	-18.0	Amb
7421.60	V	0.00	1.00	37.83	7.2	178.3	500.0	-9.0	Amb
8349.30	V	0.00	1.00	48.83	8.1	698.8	5000.0	-17.1	Amb
8349.30	V	0.00	1.00	37.67	8.1	193.3	500.0	-8.3	Amb
2783.10	H	45.00	2.20	53.33	-2.5	347.1	5000.0	-23.2	
2783.10	H	45.00	2.20	44.50	-2.5	125.6	500.0	-12.0	
3710.80	H	0.00	2.00	49.83	-0.4	294.5	5000.0	-24.6	
3710.80	H	0.00	2.00	38.67	-0.4	81.5	500.0	-15.8	
4638.50	H	0.00	2.00	47.83	0.8	270.7	5000.0	-25.3	Amb
4638.50	H	0.00	2.00	36.17	0.8	70.7	500.0	-17.0	Amb
7421.60	H	0.00	2.00	48.50	7.2	609.2	5000.0	-18.3	Amb
7421.60	H	0.00	2.00	37.83	7.2	178.3	500.0	-9.0	Amb
8349.30	H	0.00	2.00	49.17	8.1	726.7	5000.0	-16.8	Amb
8349.30	H	0.00	2.00	37.50	8.1	189.6	500.0	-8.4	Amb

5.7 Receiver Radiated Spurious Emissions: (§15.209, RSS-Gen [7.2.3.2] & RSS-210 sect 2.6)

The EUT must comply with the requirements for radiated spurious emissions from the receiver. These emissions must meet the limits specified in §15.209 and RSS-Gen.

5.7.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The emissions were measured using the following resolution bandwidths:

The Unit was tested with the RS232 and USB cable options.

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	> 100 kHz
>1000 MHz	1 MHz	10 Hz (Avg)

5.7.2 Test Summary

The EUT complied with the requirements for receiver radiated emissions FCC 15.209 IC RSS-Gen. Receiver Radiated Spurious Test Data.

Table 10: Receiver Radiated Emission Test Data

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
34.65	V	180.0	1.3	9.9	17.3	22.8	100.0	-12.8	
43.76	V	270.0	1.2	9.6	11.4	11.2	100.0	-19.0	
49.03	V	90.0	1.6	14.8	8.9	15.4	100.0	-16.3	
54.19	V	90.0	1.3	17.6	8.4	20.0	100.0	-14.0	
58.71	V	170.0	1.5	20.6	8.4	28.0	100.0	-11.0	
62.76	V	45.0	1.4	14.9	8.5	14.7	100.0	-16.6	
69.08	V	180.0	1.7	13.6	8.8	13.2	100.0	-17.6	
79.19	V	200.0	1.5	12.6	9.5	12.8	100.0	-17.9	
114.40	V	170.0	2.3	7.3	14.7	12.7	150.0	-21.5	
124.79	V	270.0	2.2	13.2	15.6	27.6	150.0	-14.7	
250.03	V	180.0	2.3	16.4	15.0	37.2	200.0	-14.6	
275.00	V	180.00	1.00	9.40	17.6	22.4	200.0	-19.0	
300.00	V	225.00	1.75	9.70	17.3	22.3	200.0	-19.0	
325.00	V	315.00	1.30	8.70	18.6	23.2	200.0	-18.7	
350.00	V	315.00	1.30	6.40	19.0	18.7	200.0	-20.6	
375.00	V	315.00	1.30	12.00	19.9	39.5	200.0	-14.1	
500.00	V	180.00	1.00	7.80	23.2	35.3	200.0	-15.1	
34.65	H	90.0	3.6	5.7	17.3	14.1	100.0	-17.0	
43.76	H	220.0	3.7	10.2	11.4	12.0	100.0	-18.4	
49.03	H	90.0	3.7	17.7	8.9	21.5	100.0	-13.4	
54.19	H	90.0	3.8	12.3	8.4	10.9	100.0	-19.3	
58.71	H	100.0	3.3	11.7	8.4	10.1	100.0	-19.9	
62.76	H	90.0	3.7	9.8	8.5	8.2	100.0	-21.7	
69.08	H	180.0	3.7	25.8	8.8	53.9	100.0	-5.4	
79.19	H	90.0	3.6	6.9	9.5	6.6	100.0	-23.6	
114.40	H	270.0	3.7	6.9	14.7	12.1	150.0	-21.9	
124.79	H	90.0	3.6	13.5	15.6	28.6	150.0	-14.4	
250.03	H	45.0	2.8	16.3	15.0	36.8	200.0	-14.7	
275.00	H	0.00	1.00	9.70	17.6	23.2	200.0	-18.7	
300.00	H	45.00	1.40	10.00	17.3	23.1	200.0	-18.7	
325.00	H	45.00	1.40	6.40	18.6	17.8	200.0	-21.0	
350.00	H	90.00	1.80	7.50	19.0	21.2	200.0	-19.5	
375.00	H	90.00	1.80	10.50	19.9	33.2	200.0	-15.6	
500.00	H	315.00	1.80	6.00	23.2	28.7	200.0	-16.9	

5.8 AC Conducted Emissions (FCC Pt.15.207, RSS-Gen [7.2.2])

5.8.1 Requirements

Test Arrangement: Table Top

Compliance Standard: FCC Class B

FCC Compliance Limits		
Frequency	Quasi-peak	Average
0.15 - 0.5MHz	66 to 56dB μ V	56 to 46dB μ V
0.5 - 5MHz	56dB μ V	46dB μ V
5 - 30MHz	60dB μ V	50dB μ V

5.8.2 Test Procedure

The EUT was placed on an 80 cm high 1 X 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50 Ω /50 μ H Line Impedance Stabilization Network bonded to a 3 X 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power was supplied to the peripherals through a second LISN. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Power and data cables were moved about to obtain maximum emissions.

The 50 Ω output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak, peak, or average as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth. For average measurements the post-detector filter was set to 10 Hz.

At frequencies where quasi-peak or peak measurements comply with the average limit, no average measurements need be performed.

At frequencies where quasi-peak or peak measurements comply with the average limit, no average measurements need be performed. The Conducted emissions level to be compared to the FCC limit is calculated as shown in the following example.

Example:

Spectrum Analyzer Voltage: VdB μ V

LISN Correction Factor: LISN dB

Cable Correction Factor: CF dB

Electric Field: EdB μ V = V dB μ V + LISN dB + CF dB

5.8.3 Test Data

The EUT complied with the Class B Conducted Emissions requirements. This system runs off of 120VAC. The below table provides the test results for phase and neutral line power line conducted emissions.

Table 11: Conducted Emissions Test Data

NEUTRAL

Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.1690	40.5	23.6	10.2	0.2	50.9	34.0	65.0	55.0	-14.1	-21.0
0.2470	38.3	17.0	10.2	0.1	48.5	27.2	61.9	51.9	-13.3	-24.6
0.4410	32.3	12.1	10.2	0.1	42.6	22.4	57.0	47.0	-14.5	-24.7
2.9970	24.4	5.7	10.3	0.5	35.2	16.5	56.0	46.0	-20.8	-29.5
10.7500	26.8	23.0	11.1	0.6	38.5	34.7	60.0	50.0	-21.5	-15.3
23.9100	17.8	5.0	11.6	0.9	30.3	17.5	60.0	50.0	-29.7	-32.5

PHASE

Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.1690	40.3	21.3	10.2	0.0	50.5	31.5	65.0	55.0	-14.6	-23.6
0.2520	36.3	15.2	10.2	0.0	46.4	25.3	61.7	51.7	-15.3	-26.4
0.4310	32.3	11.1	10.2	0.7	43.2	22.0	57.2	47.2	-14.1	-25.3
7.4000	26.7	8.7	11.0	1.1	38.7	20.7	60.0	50.0	-21.3	-29.3
10.5400	24.8	19.2	11.1	1.3	37.3	31.7	60.0	50.0	-22.7	-18.3
13.4600	20.6	15.0	11.3	1.3	33.2	27.6	60.0	50.0	-26.8	-22.4