



# FCC RADIO TEST REPORT

**FCC ID** : UZ7FXR9001  
**Equipment** : Industrial Fixed RFID Reader  
**Brand Name** : ZEBRA  
**Model Name** : FXR9001  
**Applicant** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Manufacturer** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Aug. 21, 2023 and testing was started from Sep. 14, 2023 to Oct. 14, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	8
1.3 Modification of EUT .....	8
1.4 Testing Location .....	9
1.5 Applicable Standards.....	9
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>10</b>
2.1 Carrier Frequency Channel .....	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system .....	14
2.5 EUT Operation Test Setup .....	14
2.6 Measurement Results Explanation Example.....	15
<b>3 Test Result.....</b>	<b>16</b>
3.1 Number of Channel Measurement .....	16
3.2 Hopping Channel Separation Measurement .....	19
3.3 Dwell Time Measurement.....	22
3.4 20dB and 99% Bandwidth Measurement .....	25
3.5 Output Power Measurement.....	30
3.6 Conducted Band Edges Measurement.....	33
3.7 Conducted Spurious Emission Measurement .....	36
3.8 Radiated Band Edges and Spurious Emission Measurement .....	39
3.9 AC Power Line Conducted Emissions Measurement.....	43
3.10 Antenna Requirements.....	45
<b>4 List of Measuring Equipment .....</b>	<b>46</b>
<b>5 Measurement Uncertainty .....</b>	<b>47</b>
<b>Appendix A. AC Conducted Emission Test Result</b>	
<b>Appendix B. Radiated Spurious Emission</b>	
<b>Appendix C. Radiated Spurious Emission Plots</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR381616D	01	Initial issue of report	Nov. 23, 2023



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.5	15.247(b)(1)	Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	4.29 dB under the limit at 30.00 MHz
3.9	15.207	AC Conducted Emission	Pass	23.96 dB under the limit at 0.18 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Wei Chen****Report Producer: Michelle Chen**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Industrial Fixed RFID Reader
Brand Name	ZEBRA
Model Name	FXR9001
Sample 1	FXR90011-400000-WR 4+1 Port & Bolt-on: BT, WLAN
Sample 2	FXR90010-800000-WR 8-Port: BT, WLAN
Sample 3	FXR90010-400000-WR 4-Port: BT, WLAN
FCC ID	UZ7FXR9001
EUT supports Radios application	RFID WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE
HW Version	EV2
SW Version	0.4.11
MFD	01AUG23
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Supported Unit Used in Test Configuration and System			
Cable, 3-way USB Splitter	Brand Name	ZEBRA	Model Name ADP-USB0010-M12
Cable, USB-C Host, 5ft.	Brand Name	ZEBRA	Model Name CBL-USBCHST015-M12
Cable, USB-C Host, 15ft.	Brand Name	ZEBRA	Model Name CBL-USBCHST035-M12
Cable, USB-C Client, 5ft.	Brand Name	ZEBRA	Model Name CBL-USBCCLT015-M12
Cable, USB-C Client, 15ft.	Brand Name	ZEBRA	Model Name CBL-USBCCLT035-M12
Cable, USB-A Client, 5ft.	Brand Name	ZEBRA	Model Name CBL-USBACL015-M12
Cable, USB-A Client, 15ft.	Brand Name	ZEBRA	Model Name CBL-USBACL035-M12
Cable, GPIO	Brand Name	ZEBRA	Model Name CBL-GP0050-M12M12A
Cable, 12V (Cigarette Lighter) Power Adapter, 3.5 meter	Brand Name	ZEBRA	Model Name CBL-PWRD035-M12CL
Cable, DC Power Cord (Flying Leads), 3.5m	Brand Name	ZEBRA	Model Name CBL-PWRD035-M1200
Cable, DC Power Cord (Flying Leads), 10m	Brand Name	ZEBRA	Model Name CBL-PWRD100-M1200
Cable, Power Supply Output Adapter, 3.5m	Brand Name	ZEBRA	Model Name CBL-PWRD035-M12M12
Cable, Power Supply Output Adapter, 10m	Brand Name	ZEBRA	Model Name CBL-PWRD100-M12M12



<b>Supported Unit Used in Test Configuration and System</b>				
<b>Cable, DC-DC Power Supply Input</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBL-PWRD150-M12M00
<b>Cable, AC-DC Power Supply Input (Flying Leads)</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBL-PWRA150-M1200
<b>Cable, AC-DC Power Supply Input (IEC plug)</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBL-PWRA035-M12IEC
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 68", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-3B4000680R
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 180", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-3B4001800R
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 240", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-3B4002400R
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 360", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-3B4003600R
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 68", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-1B4000680R
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 180", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-1B4001800R
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 240", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-1B4002400R
<b>CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 360", IP67 Sealed</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBLRD-1B4003600R
<b>CHIMERA ETHERNET CABLE 5M</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBL-ENT00500-M1200
<b>CHIMERA ETHERNET CABLE 15M</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	CBL-ENT01500-M1200
<b>Outdoor AC-DC PSU</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	PWR-BGA24V90W0WW (Spec PD-007875-01)
<b>Forklift DC-DC PSU</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	PWR-BGA24V90W1WW (Spec PD-007876-01)
<b>Indoor AC-DC PSU</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	PWR-BGA24V78W3WW (Spec PD-007877-01)
<b>PoE adaptor</b>	<b>Brand Name</b>	ZEBRA	<b>Model Name</b>	PD-9001GR/AT/AC



Supported Unit Used in Test Configuration and System				
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN480
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN650
External RFID Antenna	Brand Name	ZEBRA	Model Name	SR5502
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN510
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN520
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN610
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN620
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN720
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN440
External RFID Antenna	Brand Name	ZEBRA	Model Name	SP5504
BT/WLAN_ External Antenna	Brand Name	Amphenol	Model Name	ST0228-30-502-A
BT/WLAN_ External Antenna	Brand Name	Amphenol	Model Name	ZB511A-02-001-C
AN650 Antenna cable(5ft/1524mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4000600R
AN650 Antenna cable(20ft/6096mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4002400R
AN650 Antenna cable(15ft/4572mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4001800R
AN650 Antenna cable(30ft/9144mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4003600R
AN650 Antenna cable(10ft/3048mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4001200R



### 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
<b>Tx/Rx Frequency Range</b>	902.75 MHz ~ 927.25 MHz
<b>Number of Channels</b>	50
<b>Maximum Output Power to Antenna</b>	<Internal Antenna> 28.79 dBm (0.7568 W) <External Antenna 3> 28.99 dBm (0.7925 W)
<b>20dB Bandwidth</b>	<Internal Antenna> 0.096 MHz <External Antenna 3> 0.096 MHz
<b>99% Occupied Bandwidth</b>	<Internal Antenna> 0.082 MHz <External Antenna 3> 0.082 MHz
<b>Antenna Type / Gain</b>	<Internal Antenna> Patch Antenna with gain 7.20 dBi <External Antenna 1> Patch Antenna with gain 6.00 dBi <External Antenna 2> Patch Antenna with gain 6.00 dBi <External Antenna 3> Patch Antenna with gain 6.70 dBi
<b>Type of Modulation</b>	ASK

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

### 1.3 Modification of EUT

No modifications are made to the EUT during all test items.





### 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> CO05-HY, 03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY (TAF Code: 3786)
<b>Remark</b>	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902.75-927.25 MHz	1	902.75	28	916.25
	2	903.25	29	916.75
	3	903.75	30	917.25
	4	904.25	31	917.75
	5	904.75	32	918.25
	6	905.25	33	918.75
	7	905.75	34	919.25
	8	906.25	35	919.75
	9	906.75	36	920.25
	10	907.25	37	920.75
	11	907.75	38	921.25
	12	908.25	39	921.75
	13	908.75	40	922.25
	14	909.25	41	922.75
	15	909.75	42	923.25
	16	910.25	43	923.75
	17	910.75	44	924.25
	18	911.25	45	924.75
	19	911.75	46	925.25
	20	912.25	47	925.75
	21	912.75	48	926.25
	22	913.25	49	926.75
	23	913.75	50	927.25
	24	914.25		
	25	914.75		
	26	915.25		
	27	915.75		



## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	UHF RFID
Conducted Test Cases	<b>&lt;Internal Antenna and External Antenna 3&gt;</b>
	Mode 1: UHF RFID Tx 902.75 MHz
	Mode 2: UHF RFID Tx 914.75 MHz
Radiated Test Cases	Mode 3: UHF RFID Tx 927.25 MHz
	<b>&lt;Internal Antenna&gt;</b>
	Mode 1: UHF RFID Tx 902.75 MHz for Sample 1
	Mode 2: UHF RFID Tx 914.75 MHz for Sample 1
	Mode 3: UHF RFID Tx 927.25 MHz for Sample 1
	<b>&lt;External Antenna 3&gt;</b>
Mode 1: UHF RFID Tx 902.75 MHz for Sample 2	
Mode 2: UHF RFID Tx 914.75 MHz for Sample 2	
Mode 3: UHF RFID Tx 927.25 MHz for Sample 2	


Summary table of Test Cases	
<b>AC Conducted Emission</b>	<p>Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + RFID Link + ADP-USB0010-M12 (3-way USB Splitter) (2) + CBL-GP0050-M12M12A, 5m (GPIO Extension) (7) + CBL-PWRD035-M12M12, 3.5 meter (16) + PWR-BGA24V90W0WW (Outdoor AC-DC PSU) (28) + CBL-PWRA035-M12IEC (22) +CBL-USBCHST015-M12, 1.5m (3) load with USB dongle + CBL-ENT01500-M1200,15M (27) (Data Link with Notebook) + CBL-USBCHST035-M12, 3.5m (23) load with USB Flash Drive + CBL-USBACLT035-M12, 3.5m (24) load with Notebook for Sample 1</p> <p>Mode 2: WLAN Idle + Bluetooth Idle + RFID Idle + ADP-USB0010-M12 (3-way USB Splitter) (2) + CBL-GP0050-M12M12A, 5m (GPIO Extension) (7) + CBL-PWRD100-M12M12, 10 meter (17) + PWR-BGA24V90W0WW (Outdoor AC-DC PSU) (28) + CBL-PWRA150-M1200 (21) + CBL-USBCHST015-M12, 1.5m (3) load with USB dongle + CBL-ENT01500-M1200,15M (27) (Data Link with Notebook) + CBL-USBCHST035-M12, 3.5m (23) load with USB Flash Drive + CBL-USBCCLT035-M12, 3.5m (25) load with Notebook for Sample 2</p>
<b>Remark:</b> Data Link with Notebook means data application transferred mode between EUT and Notebook.	

### 2.3 Connection Diagram of Test System


<AC Conducted Emission Mode 1>

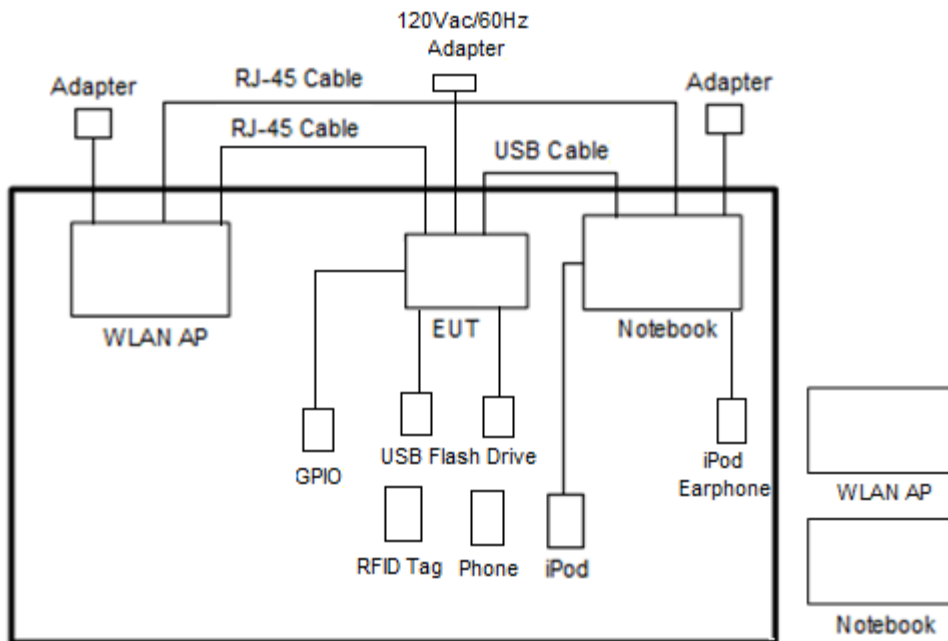


<AC Conducted Emission Mode 2>

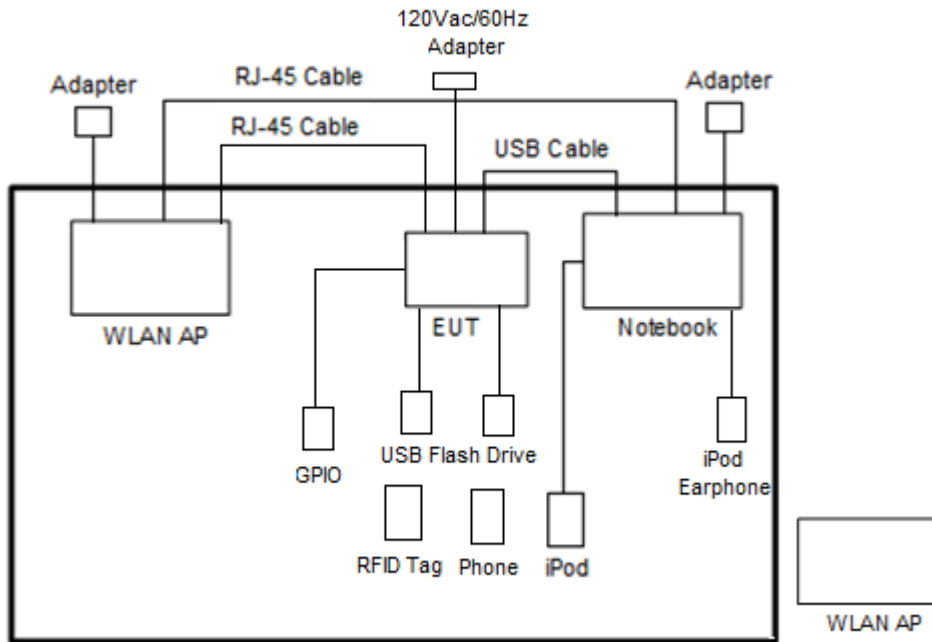

<Radiated Spurious Emission Mode for Internal Antenna>

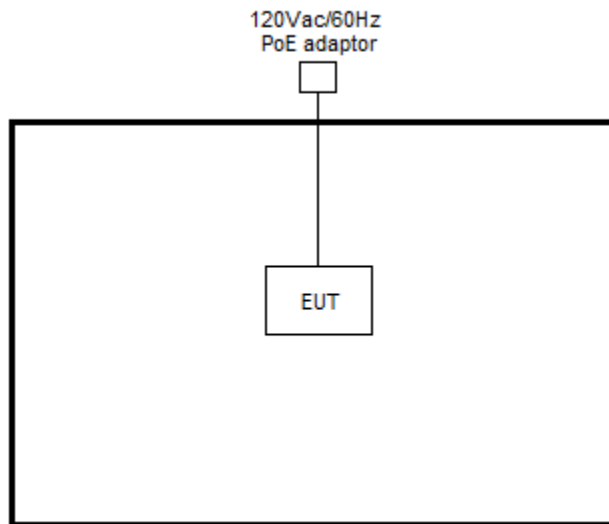

<Radiated Spurious Emission Mode for External Antenna>

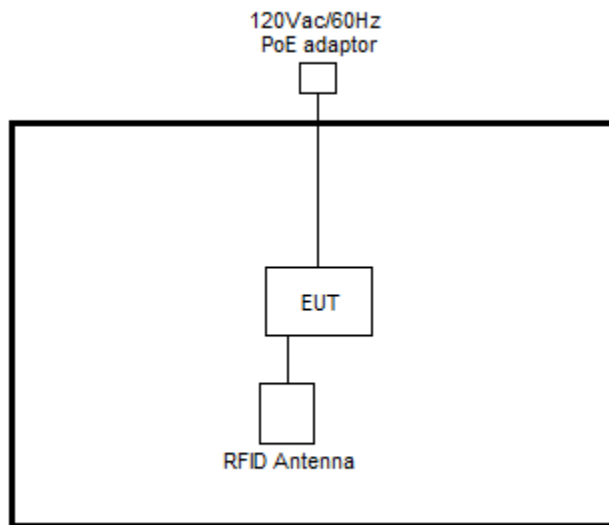

**2.4 Support Unit used in test configuration and system**

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	iPod	Apple	A1285	DoC	Shielded, 1.0m	N/A
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
5.	Phone	ZEBRA	TC26	N/A	N/A	N/A
6.	USB Flash Drive	SanDisk	E8BOC	N/A	N/A	N/A

**2.5 EUT Operation Test Setup**

The RF test items, utility “Tera Term Version 4.95 / Tera Term Version 4.105” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

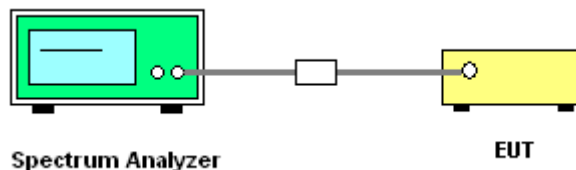






### 3.1.5 Test Result of Number of Hopping Frequency

<Internal Antenna>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%
Number of Hopping (Channel)	Limits (Channel)	Pass/Fail	
50	≥ 50	Pass	

Number of Hopping Channel Plot on Channel 00 - 49

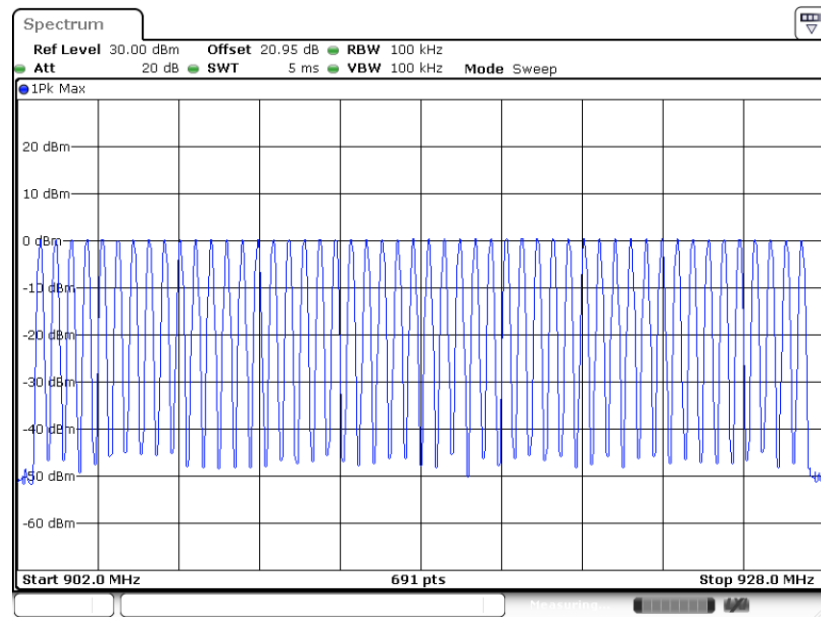

Date: 14.OCT.2023 01:03:35




<External Antenna 3>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu and Willy Chang	Relative Humidity :	50~56%

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
50	≥ 50	Pass

Number of Hopping Channel Plot on Channel 00 - 49

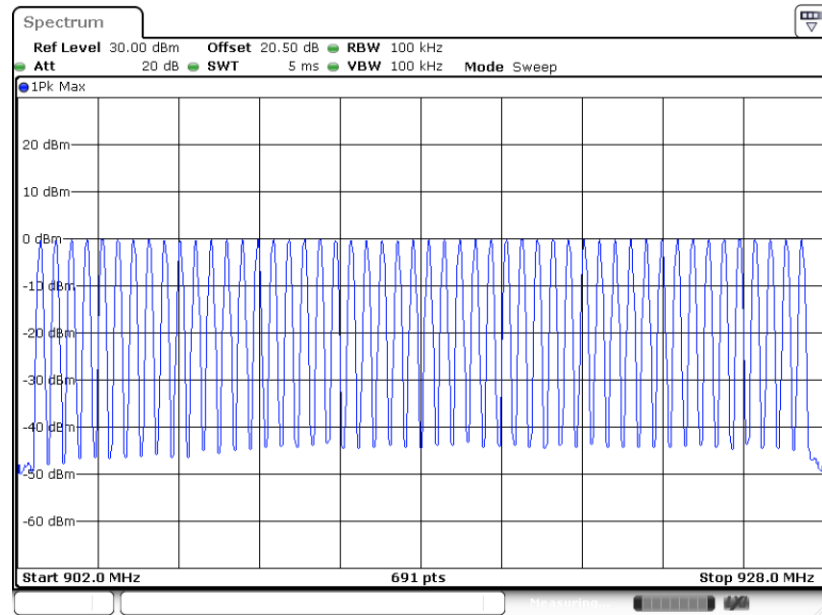

Date: 11.OCT.2023 19:21:06

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 902.75-927.25 MHz band may have hopping channel carrier frequencies that are 20 dB bandwidth of the hopping channel.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 100 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

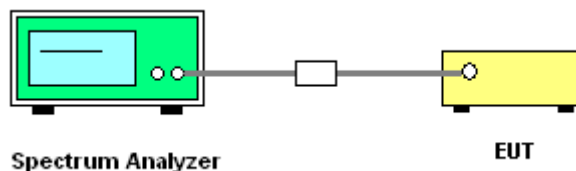




### 3.2.5 Test Result of Hopping Channel Separation

<Internal Antenna>


Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

Mod.	NTX	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	902.75	0.501	0.0957	Pass
UHF RFID	1	914.75	0.499	0.0942	Pass
UHF RFID	1	927.25	0.499	0.0942	Pass


Channel Separation Plot on 902.75 MHz

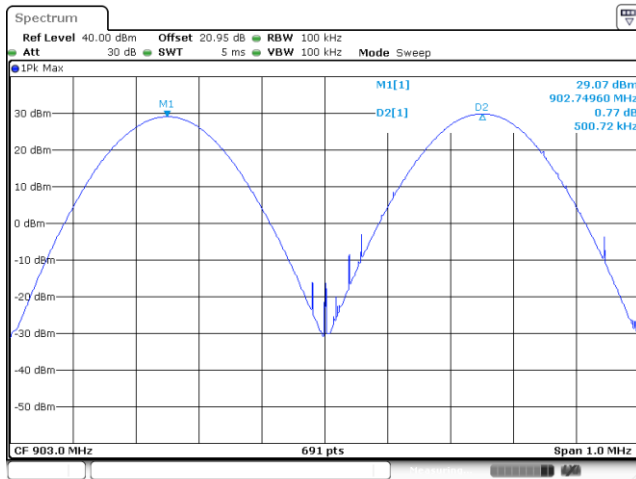

Channel Separation Plot on 914.75 MHz

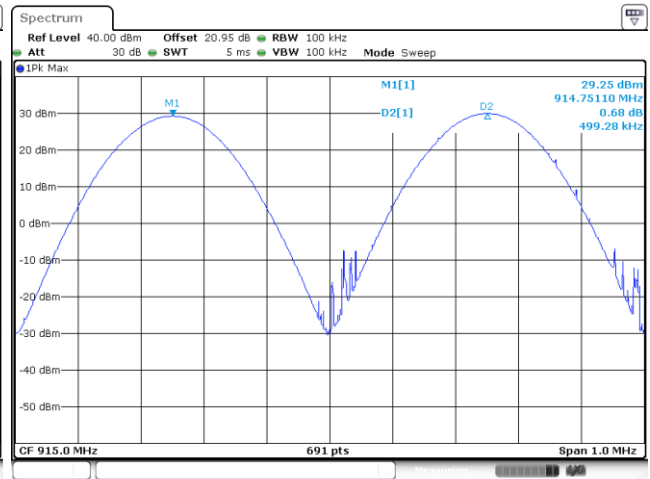

Channel Separation Plot on 927.25 MHz

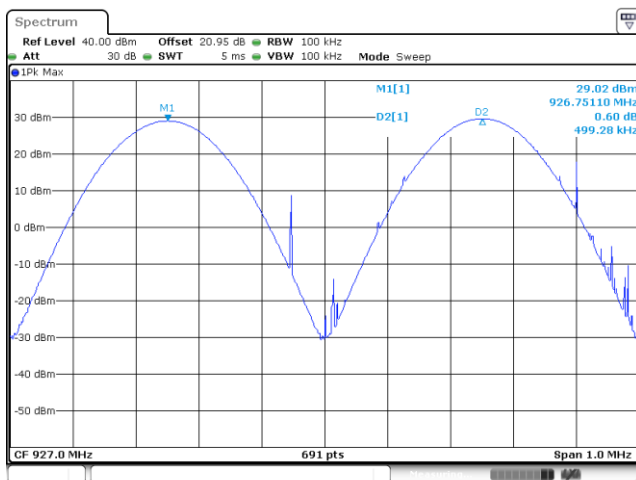




<External Antenna 3>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu and Willy Chang	Relative Humidity :	50~56%


Mod.	NTX	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	902.75	0.501	0.0957	Pass
UHF RFID	1	914.75	0.499	0.0942	Pass
UHF RFID	1	927.25	0.501	0.0942	Pass

Channel Separation Plot on 902.75 MHz

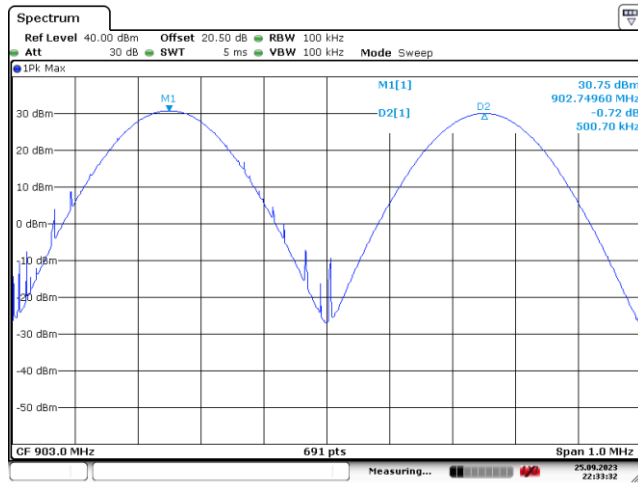


Date: 25 SEP 2023 22:33:33

Channel Separation Plot on 914.75 MHz

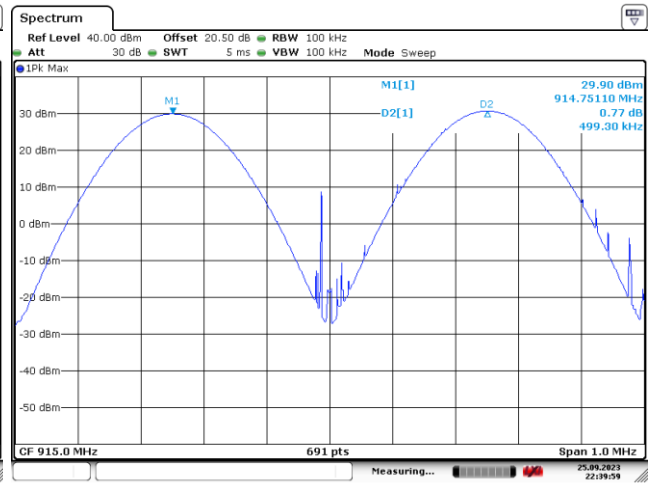

Date: 25 SEP 2023 22:39:59

Channel Separation Plot on 927.25 MHz

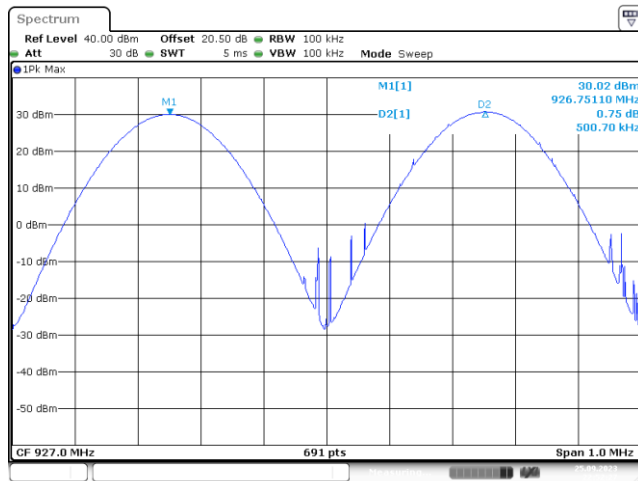

Date: 25 SEP 2023 22:52:27

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 20 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

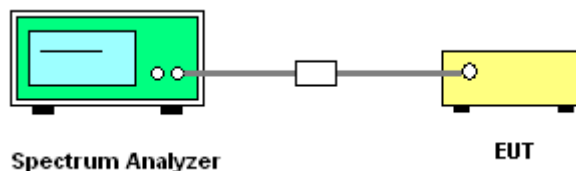




### 3.3.5 Test Result of Dwell Time

<Internal Antenna>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	3.41	1	0.272	0.4	Pass

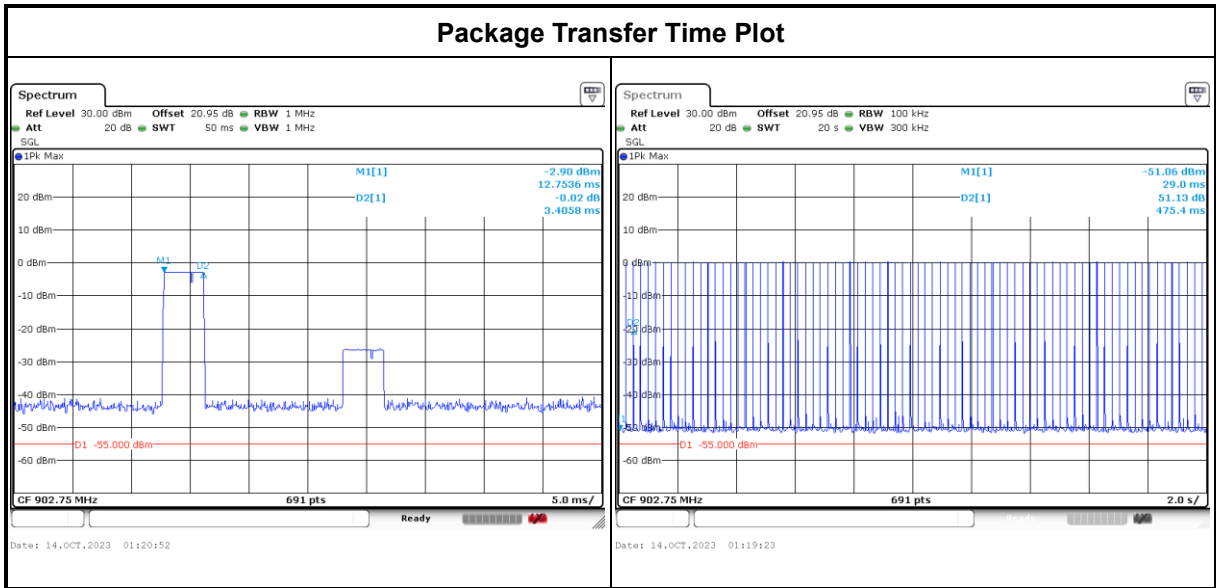


**Remark:** Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



<External Antenna 3>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu and Willy Chang	Relative Humidity :	50~56%

Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	3.33	1	0.260	0.4	Pass

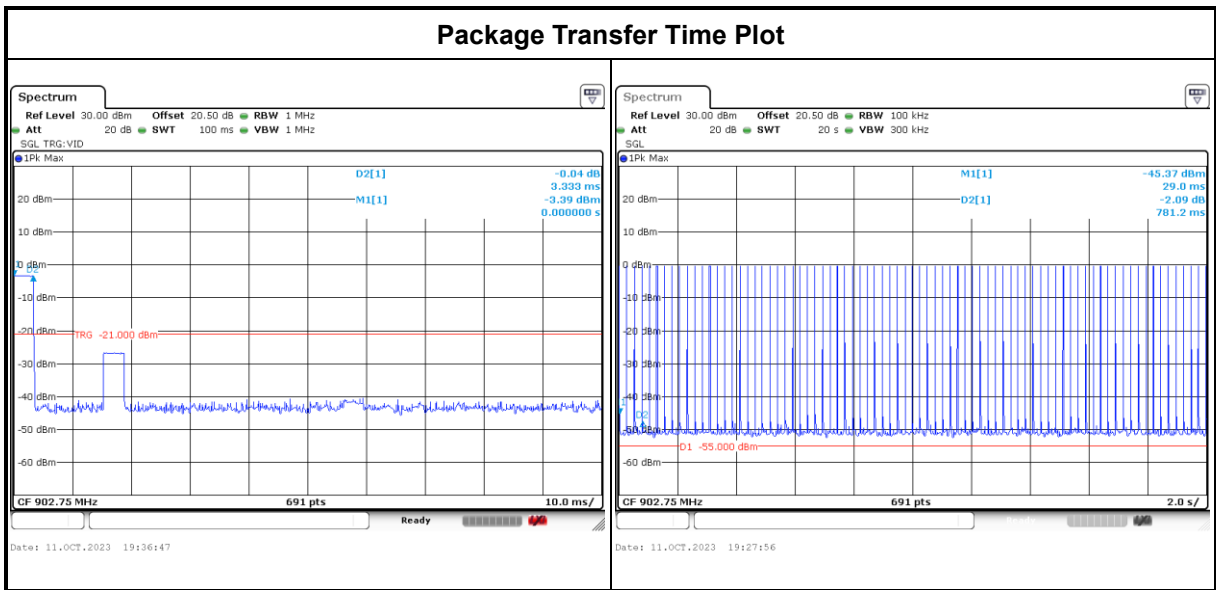

**Remark:** Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



## 3.4 20dB and 99% Bandwidth Measurement

### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1-5% of the 99% bandwidth; VBW  $\geq$  3 \* RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

### 3.4.4 Test Setup

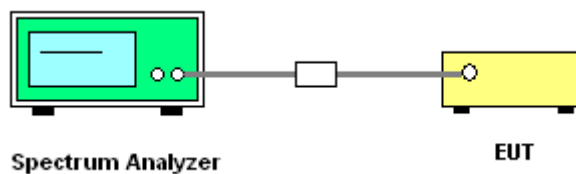




### 3.4.5 Test Result of 20dB Bandwidth

<Internal Antenna>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%


Mod.	NTX	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	902.75	0.096	Pass
UHF RFID	1	914.75	0.094	Pass
UHF RFID	1	927.25	0.094	Pass

20 dB Bandwidth Plot on 902.75 MHz

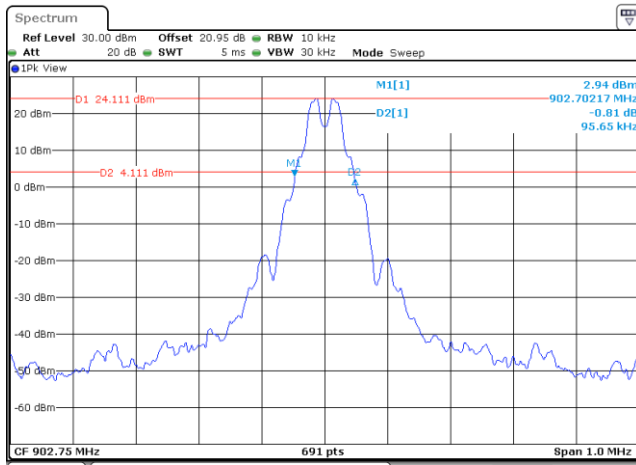


Date: 14.OCT.2023 00:47:17

20 dB Bandwidth Plot on 914.75 MHz

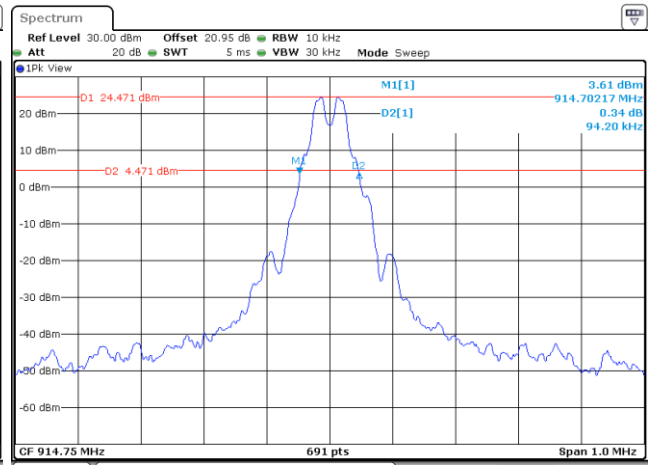

Date: 14.OCT.2023 00:49:13

20 dB Bandwidth Plot on 927.25 MHz

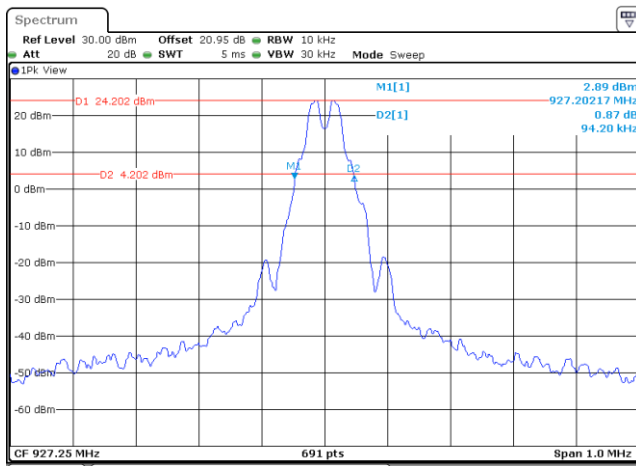

Date: 14.OCT.2023 00:51:01




<External Antenna 3>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu and Willy Chang	Relative Humidity :	50~56%


Mod.	NTX	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	902.75	0.096	Pass
UHF RFID	1	914.75	0.094	Pass
UHF RFID	1	927.25	0.094	Pass

20 dB Bandwidth Plot on 902.75 MHz

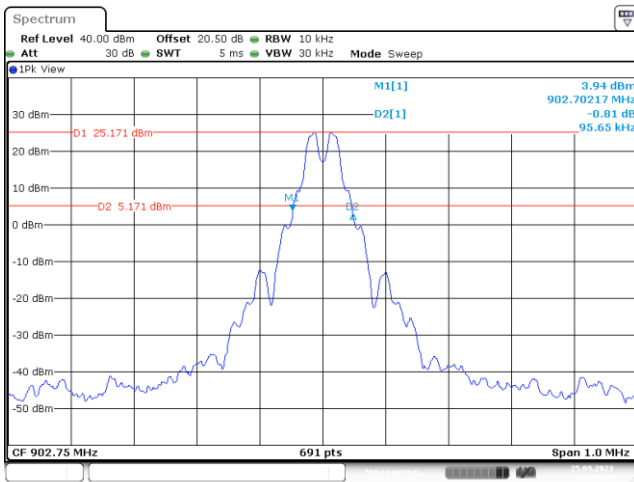


Date: 25 SEP 2023 21:39:49

20 dB Bandwidth Plot on 914.75 MHz

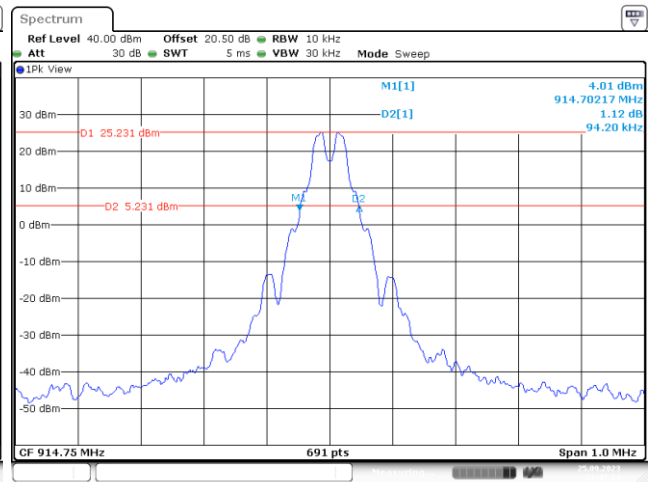

Date: 25 SEP 2023 21:47:24

20 dB Bandwidth Plot on 927.25 MHz

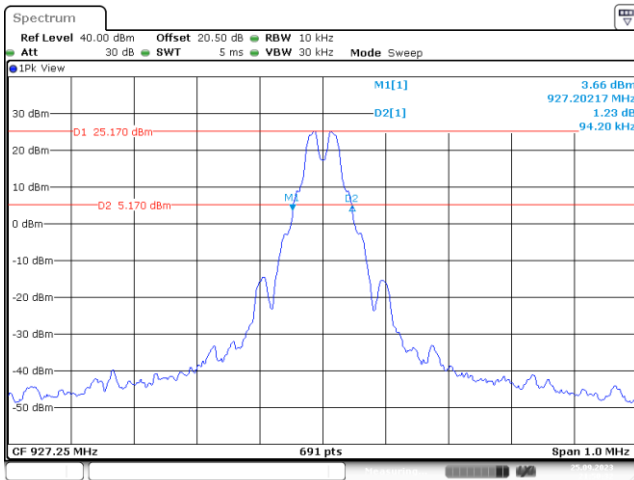

Date: 25 SEP 2023 21:50:32




### 3.4.6 Test Result of 99% Occupied Bandwidth

<Internal Antenna>

<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Willy Chang	<b>Relative Humidity :</b>	50~56%


Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	902.75	0.082	Reporting Only
UHF RFID	1	914.75	0.080	Reporting Only
UHF RFID	1	927.25	0.079	Reporting Only

99% Occupied Bandwidth Plot on 902.75 MHz

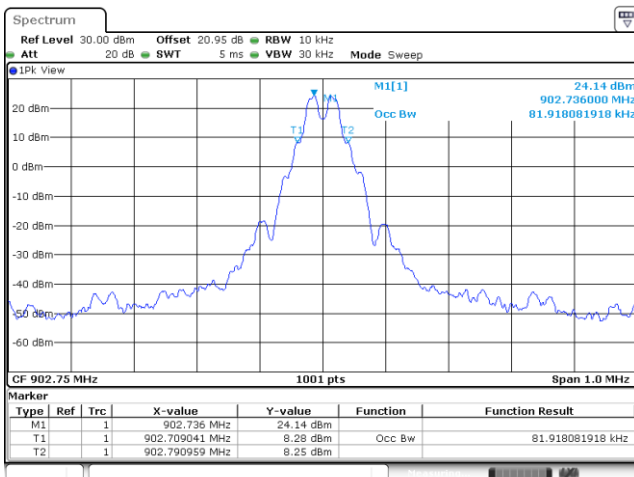


Date: 14.OCT.2023 00:46:10

99% Occupied Bandwidth Plot on 914.75 MHz

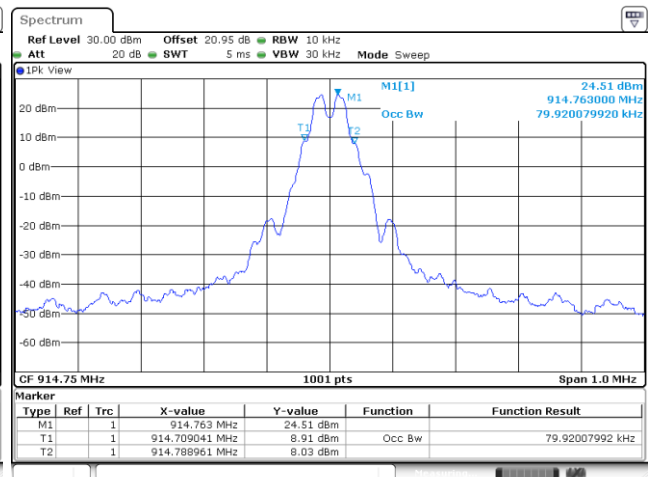

Date: 14.OCT.2023 00:48:58

99% Occupied Bandwidth Plot on 927.25 MHz

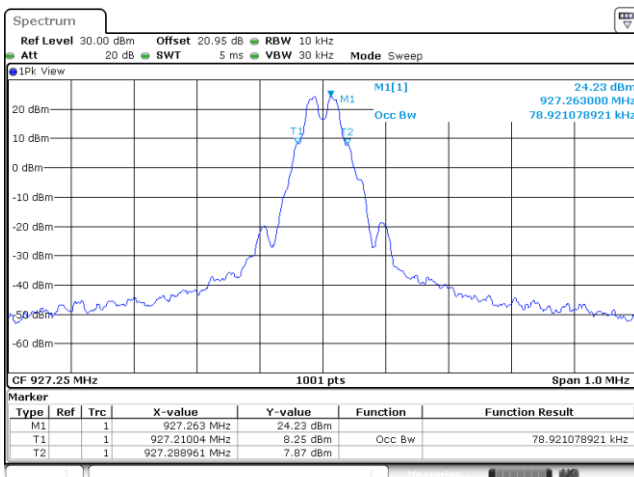

Date: 14.OCT.2023 00:50:25

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<External Antenna 3>

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Shiming Liu and Willy Chang	Relative Humidity :	50~56%


Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	902.75	0.082	Reporting Only
UHF RFID	1	914.75	0.081	Reporting Only
UHF RFID	1	927.25	0.080	Reporting Only

99% Occupied Bandwidth Plot on 902.75 MHz

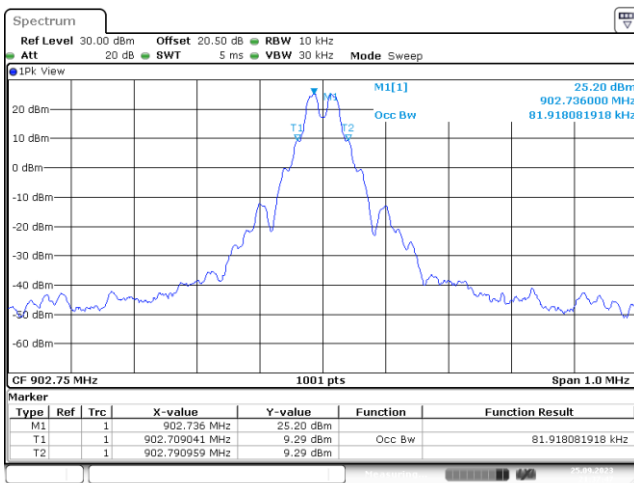


Date: 25 SEP 2023 21:37:47

99% Occupied Bandwidth Plot on 914.75 MHz

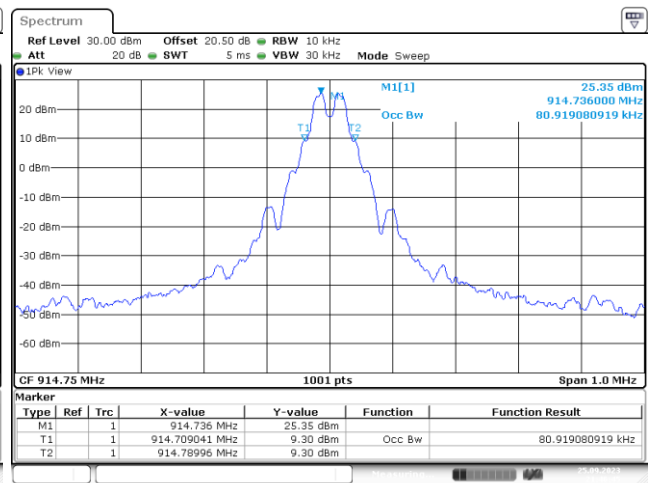

Date: 25 SEP 2023 21:46:46

99% Occupied Bandwidth Plot on 927.25 MHz

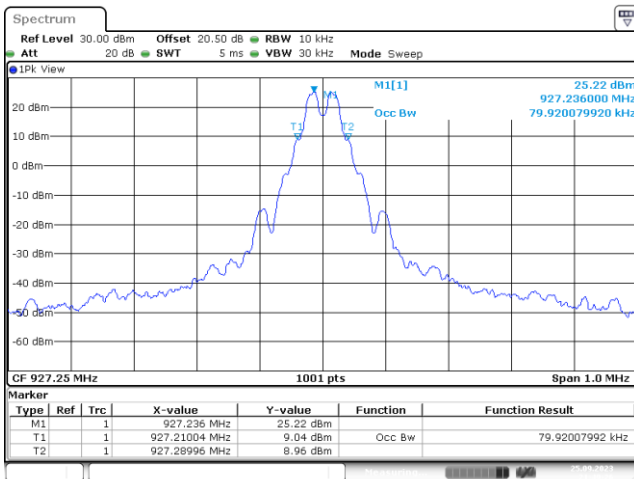

Date: 25 SEP 2023 21:49:26

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

Section 15.247 (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

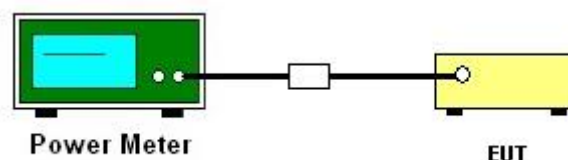



### 3.5.5 Test Result of Output Power

<Internal Antenna>

<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Willy Chang	<b>Relative Humidity :</b>	50~56%

Frequency (MHz)	RF Power (dBm)		
	UHF	Max. Limits (dBm)	Pass/Fail
902.75	28.77	30.00	Pass
914.75	28.79	30.00	Pass
927.25	28.59	30.00	Pass

<External Antenna 3>

<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Shiming Liu and Willy Chang	<b>Relative Humidity :</b>	50~56%

Frequency (MHz)	RF Power (dBm)		
	UHF	Max. Limits (dBm)	Pass/Fail
902.75	28.88	30.00	Pass
914.75	28.85	30.00	Pass
927.25	28.99	30.00	Pass



3.5.6 Test Result of Average Power (Reporting Only)

<Internal Antenna>

<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Willy Chang	<b>Relative Humidity :</b>	50~56%

Frequency (MHz)	RF Power (dBm)
	UHF
902.75	26.70
914.75	26.68
927.25	26.44

<External Antenna 3>

<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Shiming Liu and Willy Chang	<b>Relative Humidity :</b>	50~56%

Frequency (MHz)	RF Power (dBm)
	UHF
902.75	26.87
914.75	26.81
927.25	26.89



## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

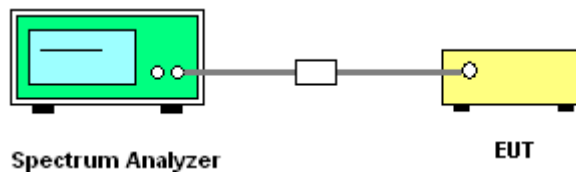




### 3.6.5 Test Result of Conducted Band Edges

<Internal Antenna>


<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Willy Chang	<b>Relative Humidity :</b>	50~56%

Low Band Edge Plot on 902.75 MHz

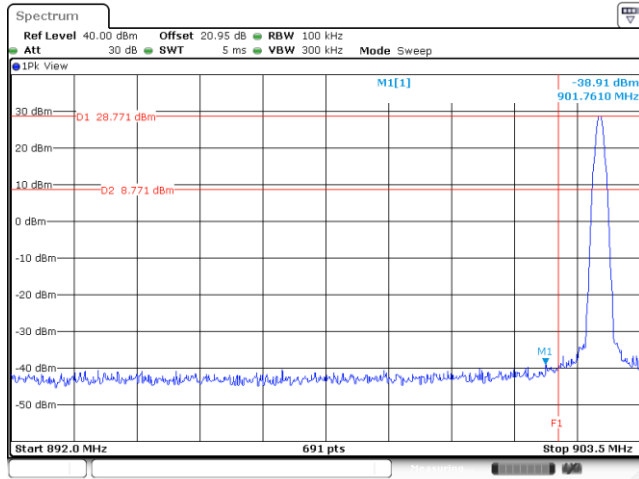

Date: 14.OCT.2023 00:47:03

High Band Edge Plot on 927.25 MHz

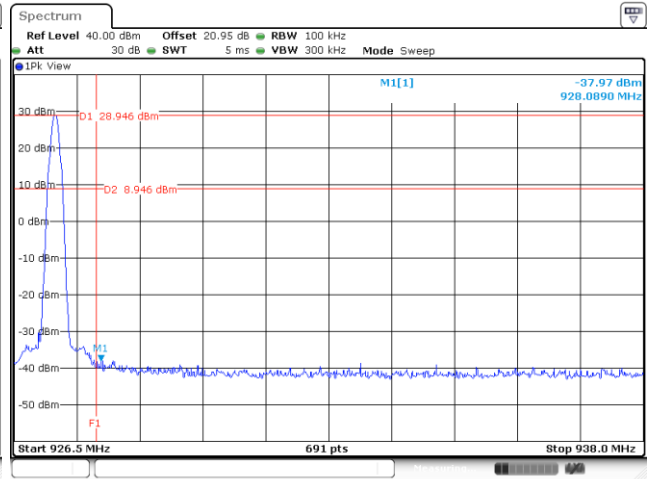


Date: 14.OCT.2023 00:50:48

<External Antenna 3>


<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Shiming Liu and Willy Chang	<b>Relative Humidity :</b>	50~56%

Low Band Edge Plot on 902.75 MHz

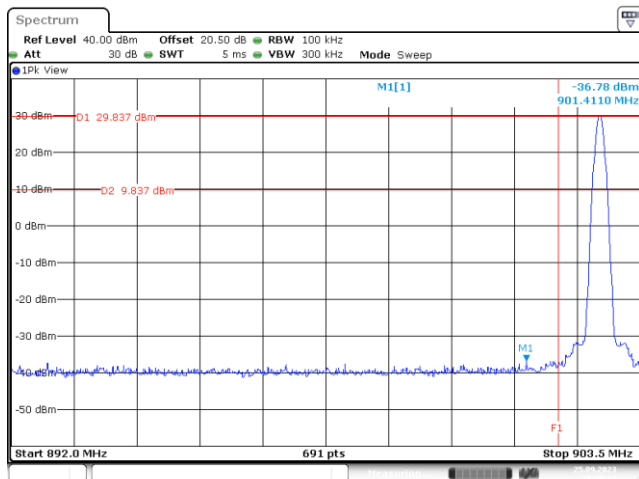

Date: 25.SEP.2023 21:39:12

High Band Edge Plot on 927.25 MHz

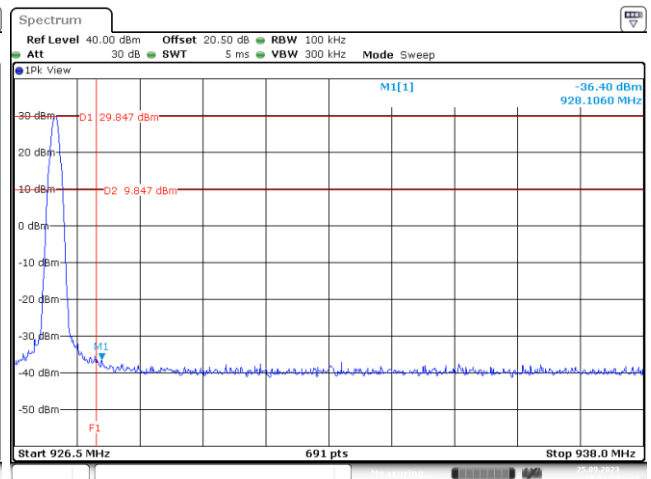

Date: 25.SEP.2023 21:51:34




### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

<Internal Antenna>


<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Willy Chang	<b>Relative Humidity :</b>	50~56%

Hopping Mode Low Band Edge Plot on 902.75 MHz

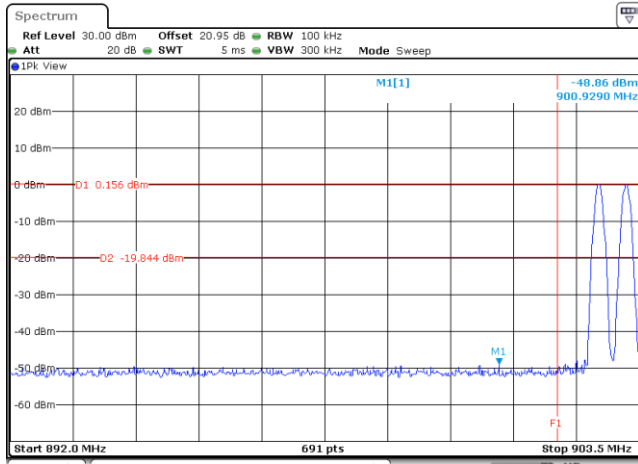

Date: 14.OCT.2023 01:03:58

Hopping Mode Low Band Edge Plot on 927.25 MHz

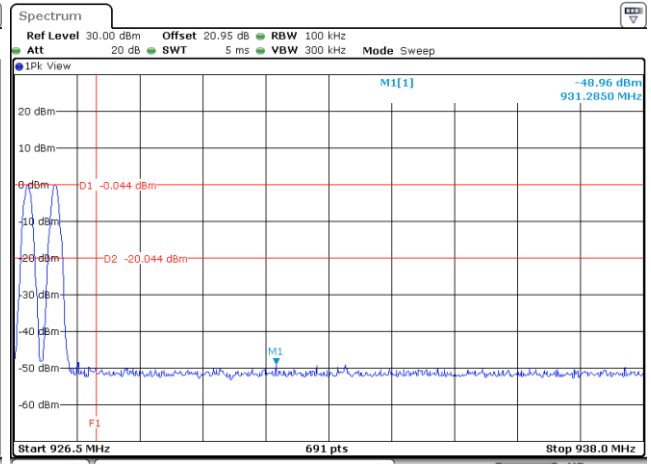


Date: 14.OCT.2023 01:09:28

<External Antenna 3>


<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Shiming Liu and Willy Chang	<b>Relative Humidity :</b>	50~56%

Hopping Mode Low Band Edge Plot on 902.75 MHz

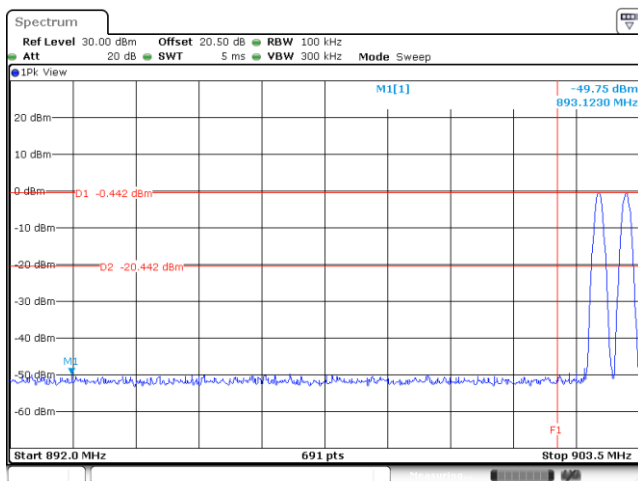

Date: 11.OCT.2023 19:22:37

Hopping Mode Low Band Edge Plot on 927.25 MHz

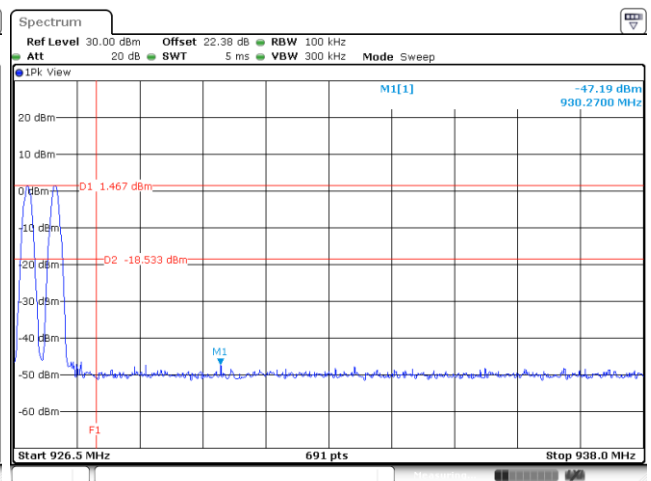

Date: 11.OCT.2023 19:38:57

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup






### 3.7.5 Test Result of Conducted Spurious Emission


<Internal Antenna>

<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Willy Chang	<b>Relative Humidity :</b>	50~56%

CSE Plot on 902.75 MHz between 30MHz ~ 10 GHz CSE Plot on 914.75 MHz between 30MHz ~ 10 GHz

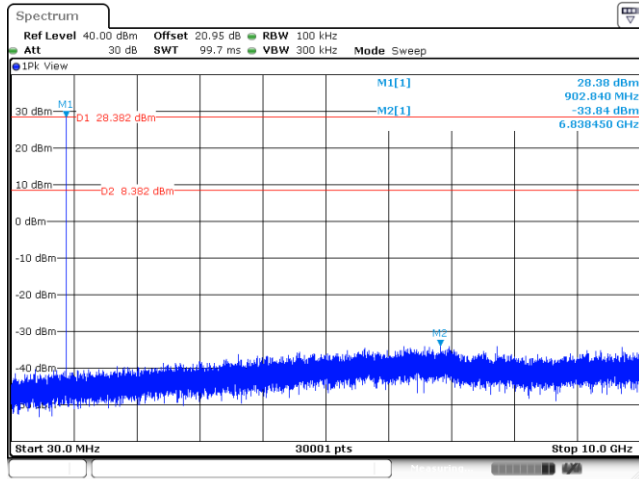


Date: 14.OCT.2023 00:47:47

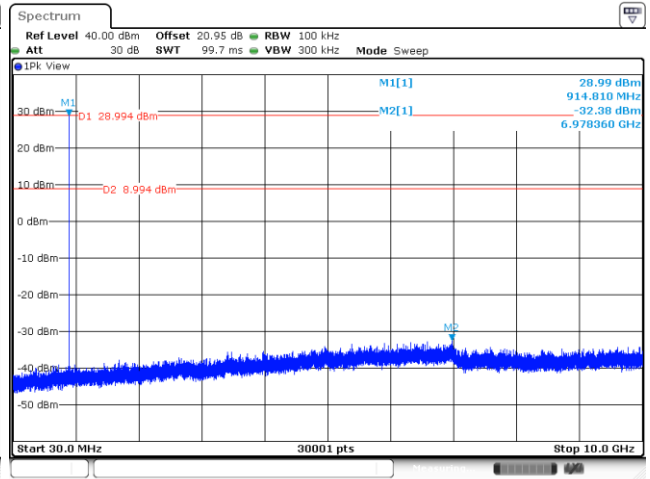

Date: 14.OCT.2023 00:49:46

CSE Plot on 927.25 MHz between 30MHz ~ 10 GHz

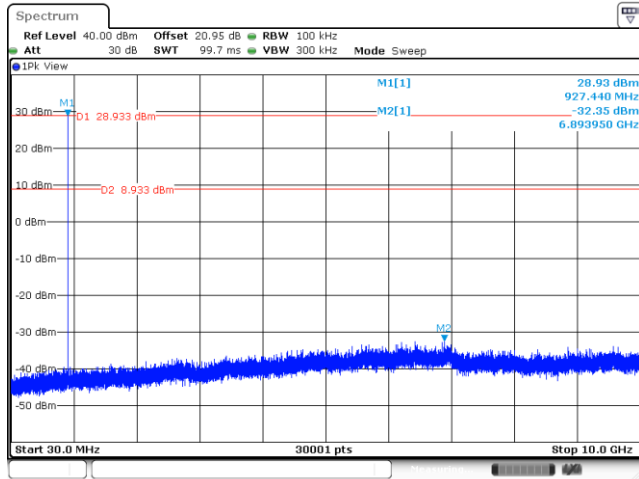


Date: 14.OCT.2023 00:51:30




<External Antenna 3>

<b>Test Mode :</b>	UHF RFID	<b>Temperature :</b>	20~25°C
<b>Test Engineer :</b>	Shiming Liu and Willy Chang	<b>Relative Humidity :</b>	50~56%

CSE Plot on 902.75 MHz between 30MHz ~ 10 GHz CSE Plot on 914.75 MHz between 30MHz ~ 10 GHz

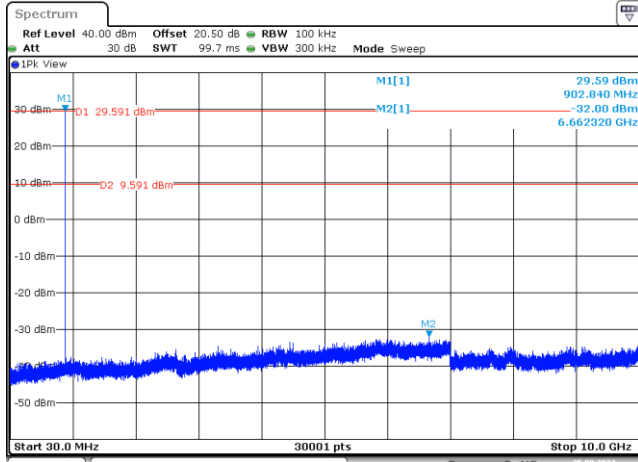


Date: 25.SEP.2023 21:40:25

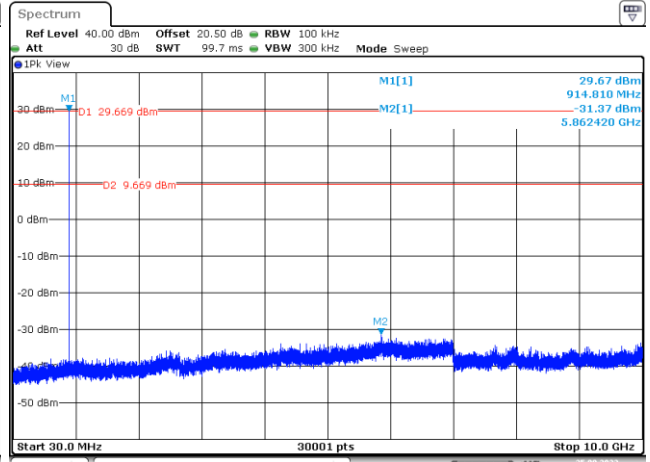

Date: 25.SEP.2023 21:48:28

CSE Plot on 927.25 MHz between 30MHz ~ 10 GHz

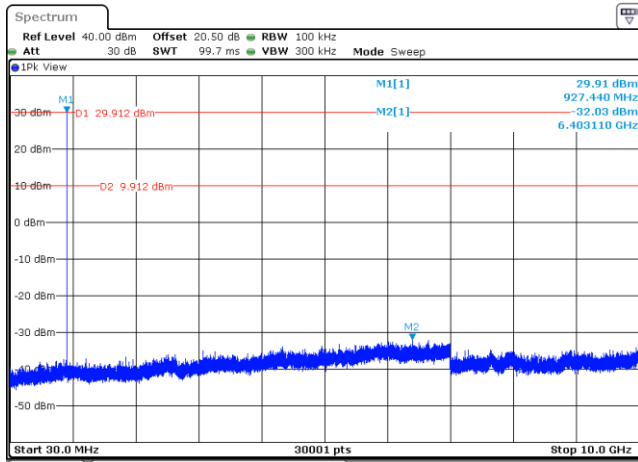

Date: 25.SEP.2023 21:52:25



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




### 3.8.3 Test Procedures

1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz, RBW = 1 MHz for  $f > 1$  GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log$  (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.




### 3.8.4 Test Setup


For radiated emissions below 30MHz

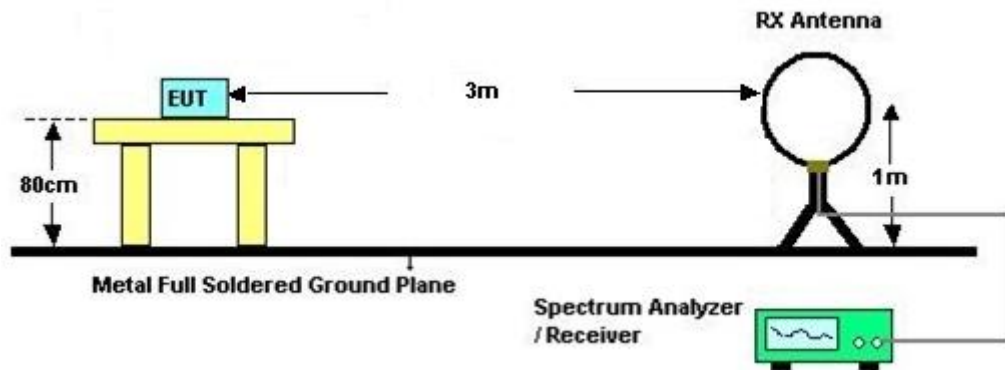

For radiated emissions from 30MHz to 1GHz

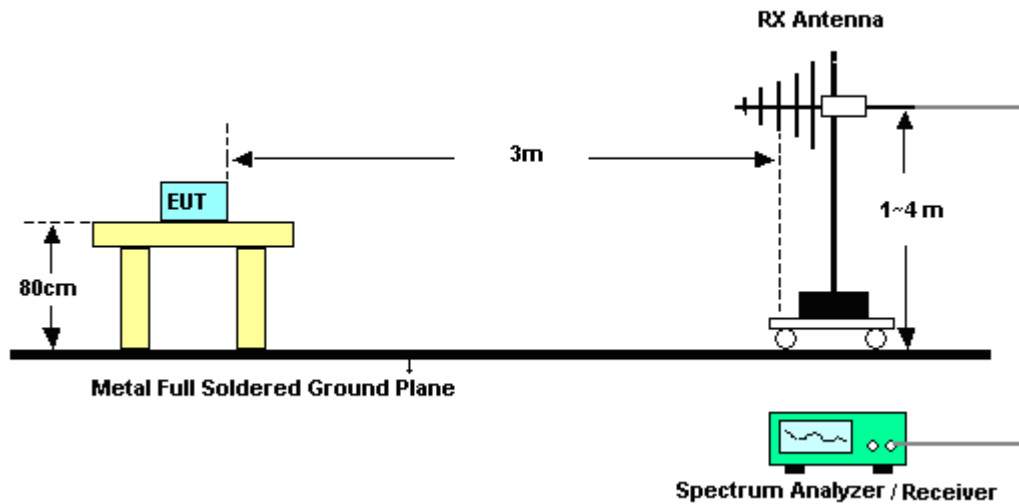

For radiated emissions above 1GHz

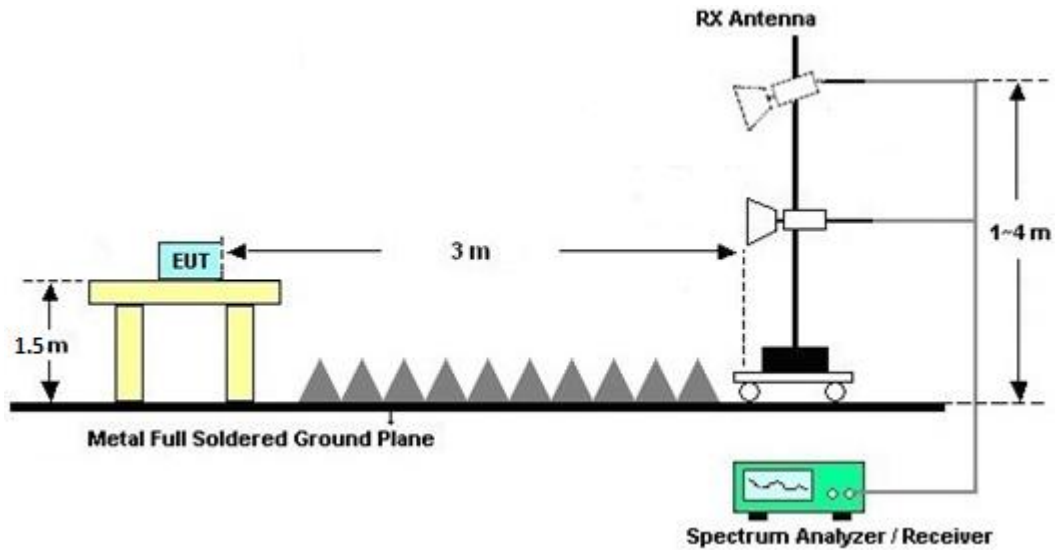

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.8.7 Duty Cycle

Please refer to Appendix D.

### 3.8.8 Test Result of Radiated Spurious Emission

Please refer to Appendix B and C.



### 3.9 AC Power Line Conducted Emissions Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test setup

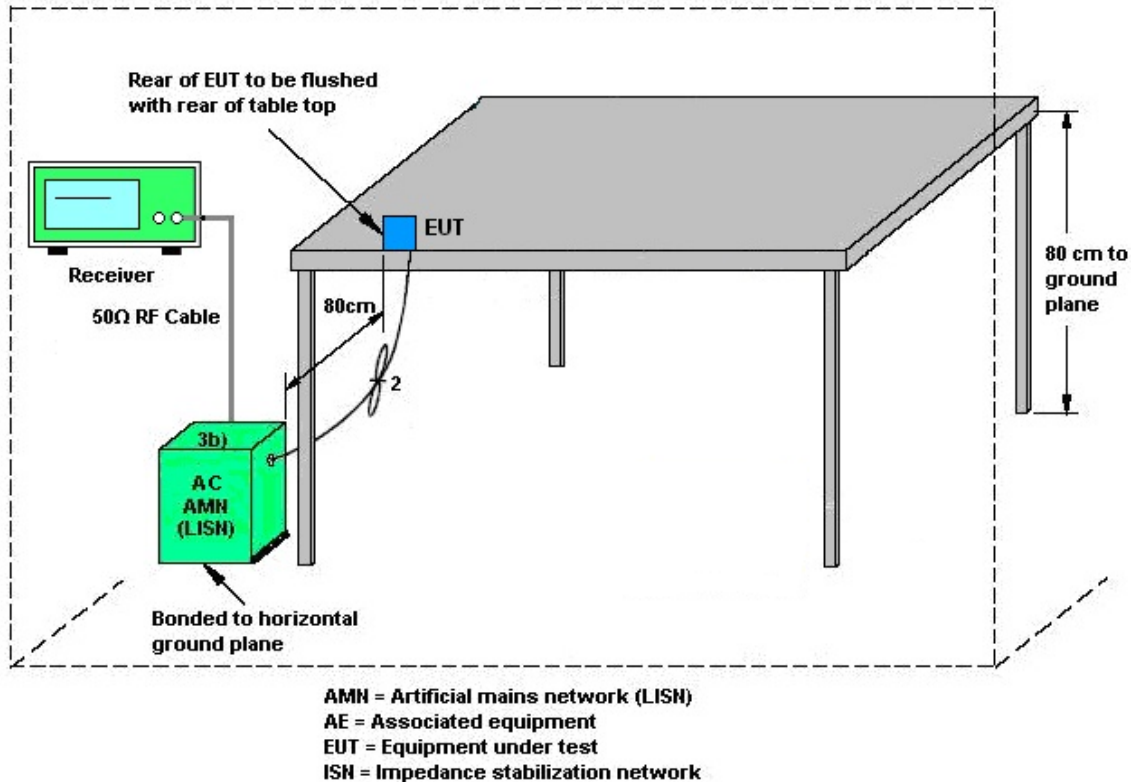

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Sep. 15, 2023~ Oct. 14, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 13, 2022	Sep. 15, 2023~ Oct. 14, 2023	Dec. 12, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101565	10Hz ~ 40GHz	Dec. 26, 2022	Sep. 15, 2023~ Oct. 14, 2023	Dec. 25, 2023	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 08, 2023	Sep. 15, 2023~ Oct. 14, 2023	Sep. 07, 2024	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 08, 2023	Sep. 15, 2023~ Oct. 14, 2023	Sep. 07, 2024	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 14, 2023	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2022	Sep. 14, 2023	Nov. 30, 2023	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2022	Sep. 14, 2023	Nov. 16, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2022	Sep. 14, 2023	Nov. 30, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 17, 2022	Sep. 14, 2023	Nov. 16, 2023	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Sep. 14, 2023	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	9kHz-200MHz	Jul. 28, 2023	Sep. 14, 2023	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 29, 2022	Sep. 14, 2023	Dec. 28, 2023	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 13, 2023	Sep. 21, 2023	Feb. 12, 2024	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	35419 & 03	30MHz~1GHz	Apr. 23, 2023	Sep. 21, 2023	Apr. 22, 2024	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2022	Sep. 21, 2023	Nov. 30, 2023	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 28, 2023	Sep. 21, 2023	Feb. 27, 2024	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 20, 2023	Sep. 21, 2023	Apr. 19, 2024	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 03, 2022	Sep. 21, 2023	Oct. 02, 2023	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 28, 2023	Sep. 21, 2023	Mar. 27, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682/4	30MHz to 18GHz	Feb. 22, 2023	Sep. 21, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4	9kHz to 18GHz	Feb. 22, 2023	Sep. 21, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4	9kHz to 18GHz	Feb. 22, 2023	Sep. 21, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 20, 2023	Sep. 21, 2023	Apr. 19, 2024	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Sep. 21, 2023	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Sep. 21, 2023	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Sep. 21, 2023	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Sep. 21, 2023	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Sep. 21, 2023	N/A	Radiation (03CH07-HY)
USB Data Logger	TECEPEL	TR-32	HE17XB2495	N/A	Mar. 14, 2023	Sep. 21, 2023	Mar. 13, 2024	Radiation (03CH07-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3 dB
---	--------



## Appendix A. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%



## EUT Information

Report NO : 381616  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

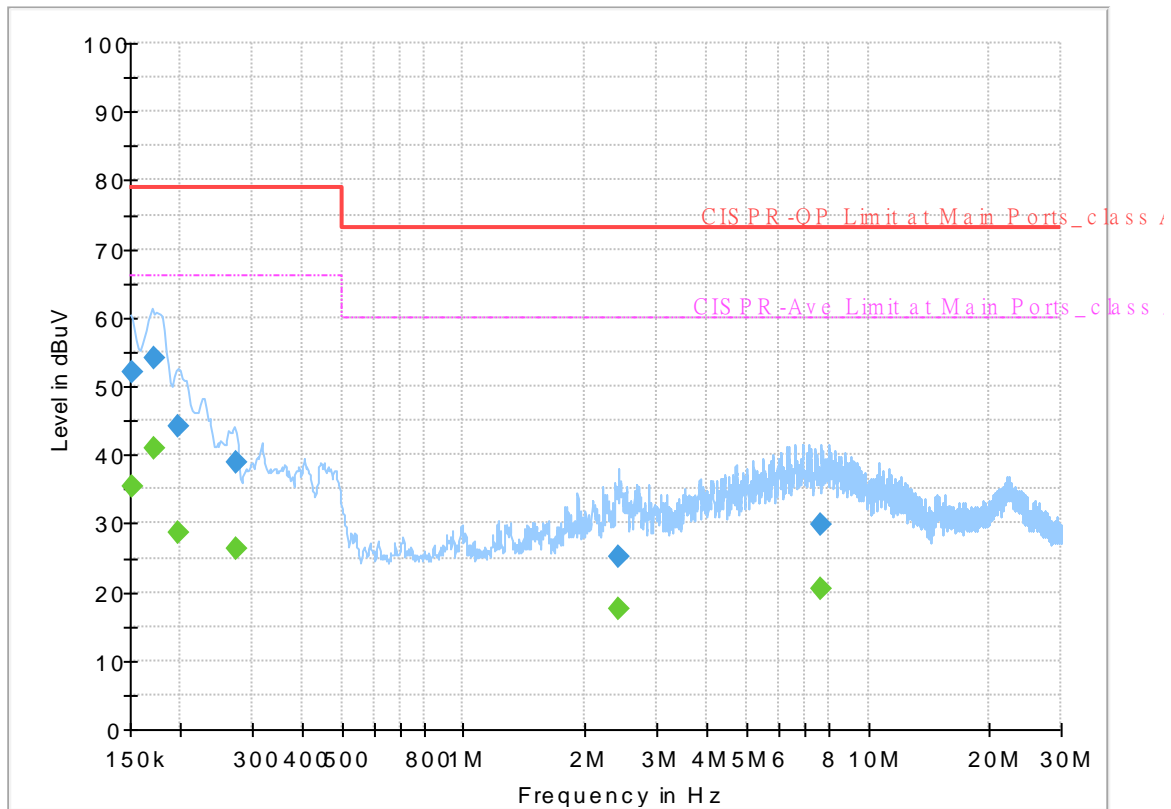


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.31	66.00	30.69	L1	OFF	19.8
0.152250	52.01	---	79.00	26.99	L1	OFF	19.8
0.172500	---	40.79	66.00	25.21	L1	OFF	19.8
0.172500	53.95	---	79.00	25.05	L1	OFF	19.8
0.197250	---	28.66	66.00	37.34	L1	OFF	19.8
0.197250	44.05	---	79.00	34.95	L1	OFF	19.8
0.273750	---	26.38	66.00	39.62	L1	OFF	19.8
0.273750	38.87	---	79.00	40.13	L1	OFF	19.8
2.413500	---	17.45	60.00	42.55	L1	OFF	19.9
2.413500	25.25	---	73.00	47.75	L1	OFF	19.9
7.669500	---	20.40	60.00	39.60	L1	OFF	19.9
7.669500	29.72	---	73.00	43.28	L1	OFF	19.9

# EUT Information

Report NO : 381616  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

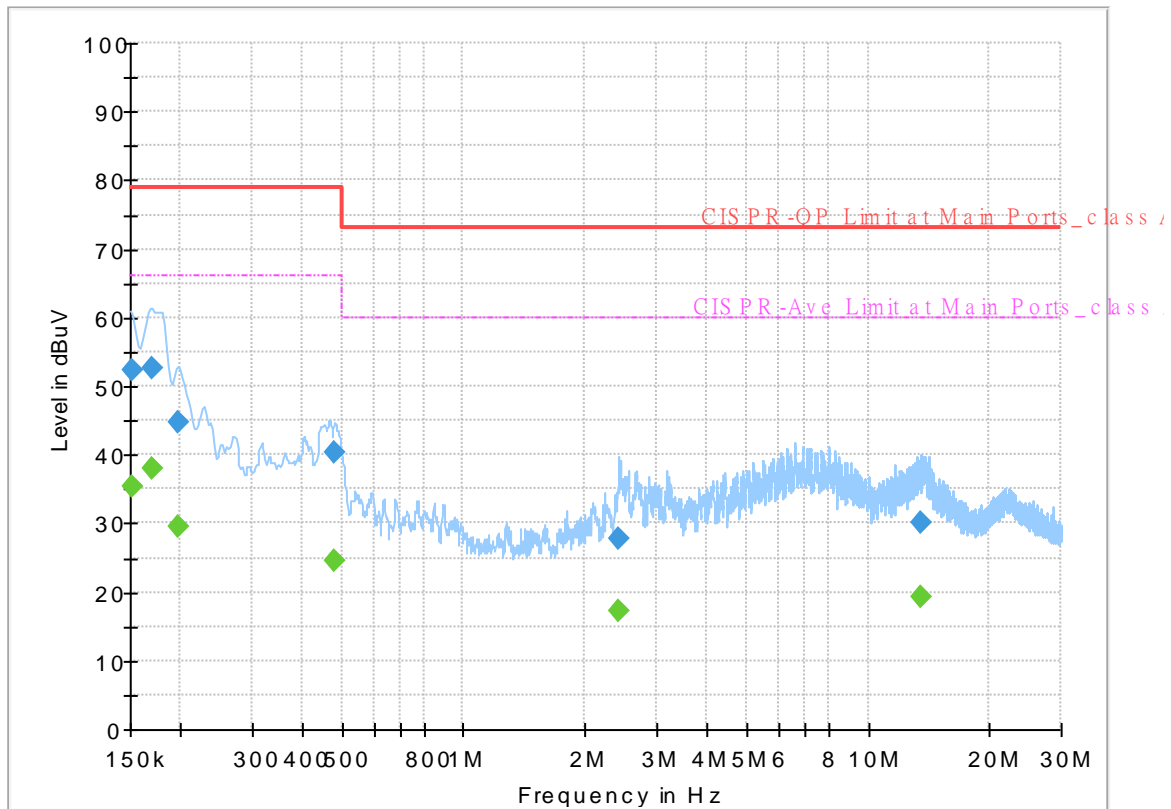


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.33	66.00	30.67	N	OFF	19.8
0.152250	52.40	---	79.00	26.60	N	OFF	19.8
0.170250	---	37.87	66.00	28.13	N	OFF	19.8
0.170250	52.76	---	79.00	26.24	N	OFF	19.8
0.197250	---	29.56	66.00	36.44	N	OFF	19.8
0.197250	44.67	---	79.00	34.33	N	OFF	19.8
0.478500	---	24.64	66.00	41.36	N	OFF	19.8
0.478500	40.34	---	79.00	38.66	N	OFF	19.8
2.413500	---	17.26	60.00	42.74	N	OFF	19.8
2.413500	27.92	---	73.00	45.08	N	OFF	19.8
13.506000	---	19.26	60.00	40.74	N	OFF	20.0
13.506000	30.12	---	73.00	42.88	N	OFF	20.0

## EUT Information

Report NO : 381616  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

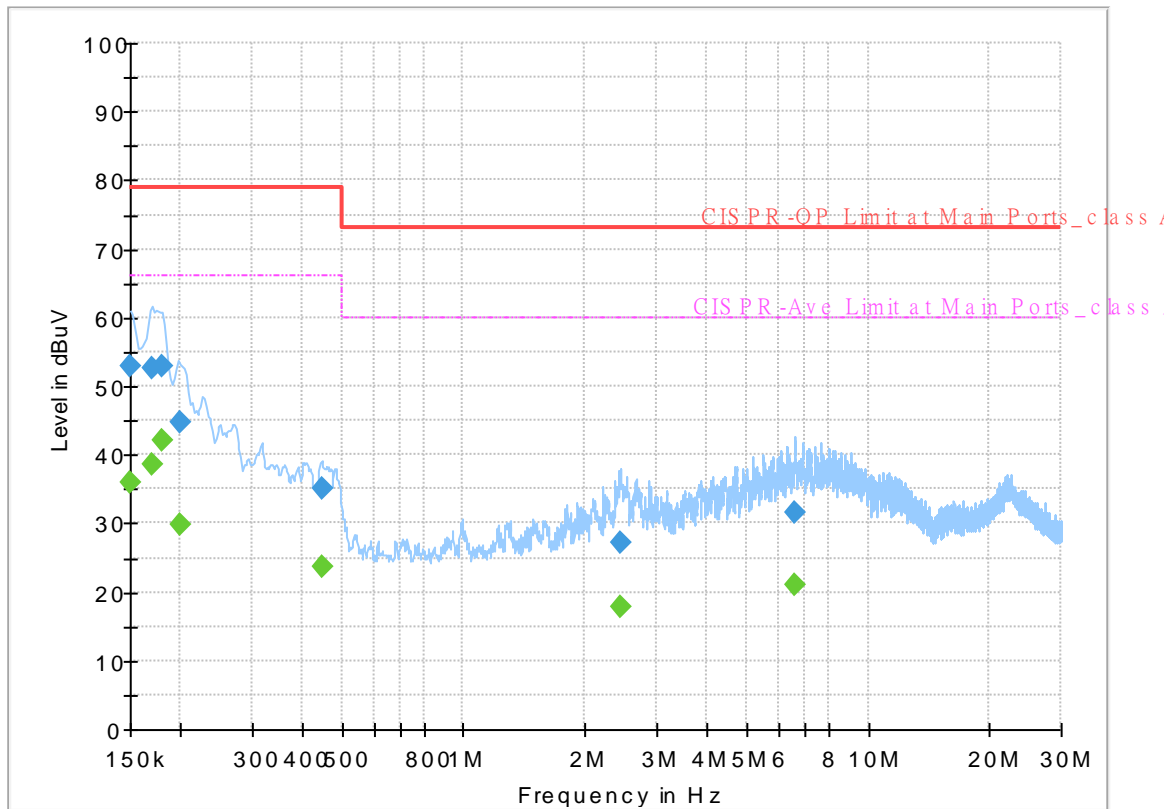


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	36.05	66.00	29.95	L1	OFF	19.8
0.150000	53.03	---	79.00	25.97	L1	OFF	19.8
0.170250	---	38.52	66.00	27.48	L1	OFF	19.8
0.170250	52.78	---	79.00	26.22	L1	OFF	19.8
0.179250	---	42.04	66.00	23.96	L1	OFF	19.8
0.179250	52.79	---	79.00	26.21	L1	OFF	19.8
0.199500	---	29.75	66.00	36.25	L1	OFF	19.8
0.199500	44.62	---	79.00	34.38	L1	OFF	19.8
0.447000	---	23.72	66.00	42.28	L1	OFF	19.8
0.447000	35.01	---	79.00	43.99	L1	OFF	19.8
2.445000	---	17.85	60.00	42.15	L1	OFF	19.9
2.445000	27.10	---	73.00	45.90	L1	OFF	19.9
6.576000	---	21.06	60.00	38.94	L1	OFF	19.9
6.576000	31.65	---	73.00	41.35	L1	OFF	19.9

## EUT Information

Report NO : 381616  
 Test Mode : Mode 2  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

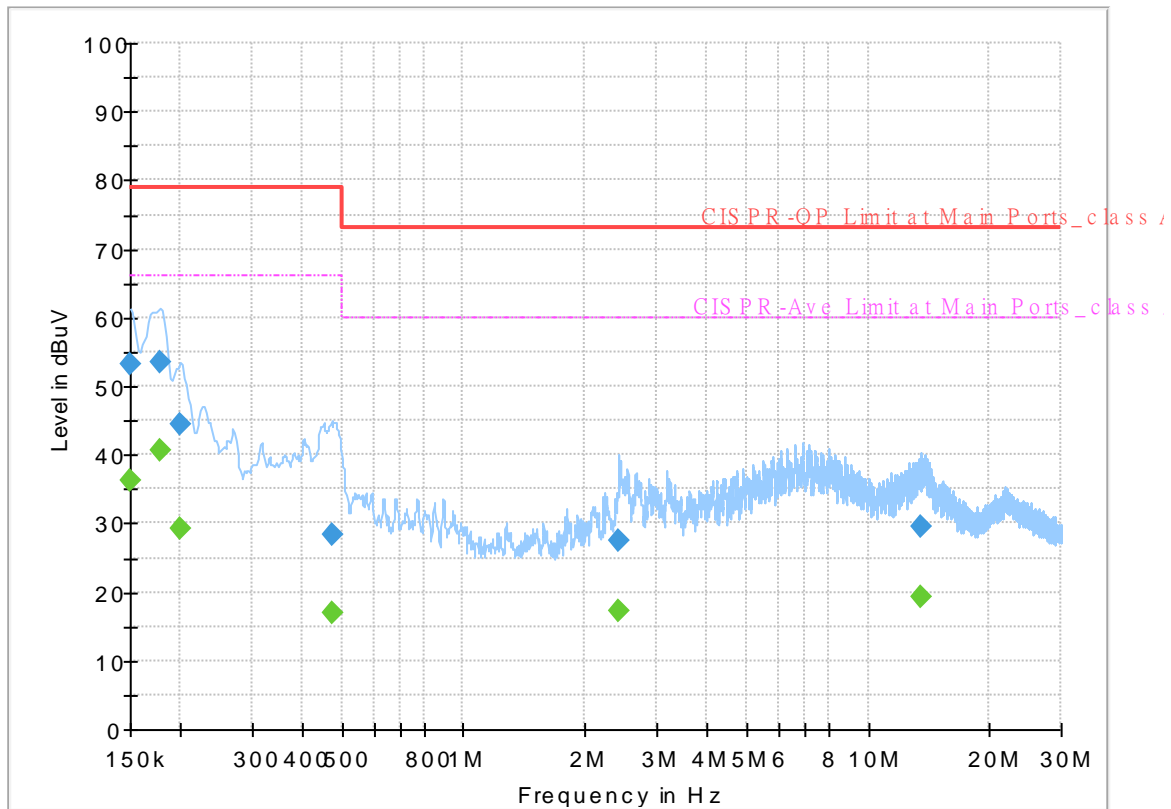

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	36.24	66.00	29.76	N	OFF	19.8
0.150000	53.22	---	79.00	25.78	N	OFF	19.8
0.177000	---	40.71	66.00	25.29	N	OFF	19.8
0.177000	53.44	---	79.00	25.56	N	OFF	19.8
0.199500	---	29.15	66.00	36.85	N	OFF	19.8
0.199500	44.46	---	79.00	34.54	N	OFF	19.8
0.471750	---	16.88	66.00	49.12	N	OFF	19.8
0.471750	28.22	---	79.00	50.78	N	OFF	19.8
2.413500	---	17.19	60.00	42.81	N	OFF	19.8
2.413500	27.51	---	73.00	45.49	N	OFF	19.8
13.503750	---	19.43	60.00	40.57	N	OFF	20.0
13.503750	29.65	---	73.00	43.35	N	OFF	20.0



## Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	24.6~25.9°C
		Relative Humidity :	46.7~50.8%

<Internal Antenna>

<Sample 1>

### UHF RFID

#### UHF RFID (Band Edge @ 3m)

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
RFID 902.75MHz		31.35	29.07	-10.93	40	34.42	23.67	1.04	30.06	-	-	P	H	
		46.2	25.99	-14.01	40	38.51	16.25	1.24	30.01	-	-	P	H	
		196.86	33.49	-10.01	43.5	46.26	15.01	2.26	30.04	-	-	P	H	
		559.7	26.9	-19.1	46	27.14	25.89	3.88	30.01	-	-	P	H	
		708.8	31.52	-14.48	46	30.44	26.28	4.44	29.64	-	-	P	H	
	*	902.75	117.23	-	-	112.61	28.59	5.04	29.01	100	38	P	H	
		974.1	33.62	-20.38	54	26.32	30.8	5.21	28.71	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30	34.15	-5.85	40	39.11	24.11	1.01	30.08	100	161	Q	V
			71.85	25.31	-14.69	40	41.4	12.35	1.48	29.92	-	-	P	V
			203.88	29.67	-13.83	43.5	42.21	15.2	2.3	30.04	-	-	P	V
			696.9	30.99	-15.01	46	29.93	26.3	4.4	29.64	-	-	P	V
			830.6	33.99	-12.01	46	30.52	28.06	4.81	29.4	-	-	P	V
*		902.75	117.37	-	-	112.75	28.59	5.04	29.01	100	343	P	V	
		974.8	37.48	-16.52	54	30.22	30.76	5.21	28.71	-	-	P	V	
													V	
													V	
													V	
													V	
													V	







UHF RFID

UHF RFID (Harmonic @ 3m)

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
RFID 902.75MHz		2708.25	41.45	-32.55	74	58.55	32.62	9.24	58.96	-	-	P	H
		3611	40.84	-33.16	74	54.94	32.92	12.41	59.43	-	-	P	H
		4513.75	47.76	-26.24	74	61.22	34.06	12.01	59.53	316	61	P	H
		4513.75	40.78	-13.22	54	54.24	34.06	12.01	59.53	316	61	A	H
		5416.5	38.43	-35.57	74	48.23	34.5	12.9	57.2	-	-	P	H
		8124.75	40.07	-33.93	74	46.17	35.8	15.59	57.49	-	-	P	H
		9027.5	41.13	-32.87	74	47.29	35.94	16.53	58.63	-	-	P	H
		2708.25	40.47	-33.53	74	57.57	32.62	9.24	58.96	-	-	P	V
		3611	39.91	-34.09	74	54.01	32.92	12.41	59.43	-	-	P	V
		4513.75	41.65	-32.35	74	55.11	34.06	12.01	59.53	-	-	P	V
		5416.5	38.99	-35.01	74	48.79	34.5	12.9	57.2	-	-	P	V
		8124.75	39.52	-34.48	74	45.62	35.8	15.59	57.49	-	-	P	V
		9027.5	41.38	-32.62	74	47.54	35.94	16.53	58.63	-	-	P	V
	RFID 914.75MHz		2744.25	40.58	-33.42	74	57.53	32.69	9.31	58.95	-	-	P
		3659	41.58	-32.42	74	55.74	33.02	12.27	59.45	-	-	P	H
		4573.75	47.14	-26.86	74	60.35	34.15	12.07	59.43	400	64	P	H
		4573.75	39.47	-14.53	54	52.68	34.15	12.07	59.43	400	64	A	H
		7318	41.53	-32.47	74	48.19	35.7	15.21	57.57	-	-	P	H
		8232.75	40.31	-33.69	74	46.37	35.83	15.62	57.51	-	-	P	H
		9147.5	42.58	-31.42	74	48.84	36.09	16.49	58.84	-	-	P	H
		2744.25	43.06	-30.94	74	60.01	32.69	9.31	58.95	-	-	P	V
		3659	41.46	-32.54	74	55.62	33.02	12.27	59.45	-	-	P	V
		4573.75	41.31	-32.69	74	54.52	34.15	12.07	59.43	-	-	P	V
		7318	42.19	-31.81	74	48.85	35.7	15.21	57.57	-	-	P	V
		8232.75	40.35	-33.65	74	46.41	35.83	15.62	57.51	-	-	P	V
		9147.5	41.48	-32.52	74	47.74	36.09	16.49	58.84	-	-	P	V





UHF RFID	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
RFID 927.25MHz		2781.75	43.1	-30.9	74	59.95	32.7	9.39	58.94	-	-	P	H	
		3709	41.75	-32.25	74	56.02	33.1	12.1	59.47	-	-	P	H	
		4636.25	42.13	-31.87	74	55.16	34.17	12.12	59.32	-	-	P	H	
		7418	40.84	-33.16	74	47.55	35.6	15.36	57.67	-	-	P	H	
		8345.25	41.58	-32.42	74	47.58	35.7	15.83	57.53	-	-	P	H	
			2781.75	42.43	-31.57	74	59.28	32.7	9.39	58.94	-	-	P	V
			3709	42.4	-31.6	74	56.67	33.1	12.1	59.47	-	-	P	V
			4636.25	40.3	-33.7	74	53.33	34.17	12.12	59.32	-	-	P	V
			7418	40.92	-33.08	74	47.63	35.6	15.36	57.67	-	-	P	V
			8345.25	41.27	-32.73	74	47.27	35.7	15.83	57.53	-	-	P	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>Non restricted band limit is radio frequency level down 20db.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													







UHF RFID	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
RFID 927.25MHz		54.57	23.6	-16.4	40	39.89	12.52	1.31	30.12	-	-	P	H	
		190.11	31.33	-12.17	43.5	44.25	14.88	2.23	30.03	-	-	P	H	
		209.01	32.06	-11.44	43.5	44.62	15.13	2.33	30.02	-	-	P	H	
		498.1	33.94	-12.06	46	36.45	23.81	3.64	29.96	-	-	P	H	
		737.5	32.53	-13.47	46	30.32	27.41	4.52	29.72	-	-	P	H	
	*	927.25	119.58	-	-	114.21	29.2	5.09	28.92	200	73	P	H	
		988.1	33.43	-20.57	54	26.34	30.48	5.25	28.64	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30	33.44	-6.56	40	38.4	24.11	1.01	30.08	-	-	P	V
			58.62	29.47	-10.53	40	46.35	11.71	1.35	29.94	-	-	P	V
			212.25	28.55	-14.95	43.5	41.18	15.05	2.34	30.02	-	-	P	V
			499.5	34.31	-11.69	46	36.78	23.84	3.65	29.96	-	-	P	V
			531	33.36	-12.64	46	35.82	23.75	3.77	29.98	-	-	P	V
	*		927.25	119.57	-	-	114.2	29.2	5.09	28.92	100	74	P	V
			986	38.68	-15.32	54	31.57	30.51	5.25	28.65	-	-	P	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db.</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



UHF RFID

UHF RFID (Harmonic @ 3m)

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
RFID 902.75MHz		2708.25	39.21	-34.79	74	56.31	32.62	9.24	58.96	-	-	P	H	
		3611	41.27	-32.73	74	55.37	32.92	12.41	59.43	-	-	P	H	
		4513.75	40.83	-33.17	74	54.29	34.06	12.01	59.53	-	-	P	H	
		5416.5	39.43	-34.57	74	49.23	34.5	12.9	57.2	-	-	P	H	
		8124.75	40.36	-33.64	74	46.46	35.8	15.59	57.49	-	-	P	H	
		9027.5	41.04	-32.96	74	47.2	35.94	16.53	58.63	-	-	P	H	
		2708.25	38.71	-35.29	74	55.81	32.62	9.24	58.96	-	-	P	V	
		3611	40.77	-33.23	74	54.87	32.92	12.41	59.43	-	-	P	V	
		4513.75	40.09	-33.91	74	53.55	34.06	12.01	59.53	-	-	P	V	
		5416.5	40.04	-33.96	74	49.84	34.5	12.9	57.2	-	-	P	V	
		8124.75	40.65	-33.35	74	46.75	35.8	15.59	57.49	-	-	P	V	
		9027.5	41.28	-32.72	74	47.44	35.94	16.53	58.63	-	-	P	V	
RFID 914.75MHz		2744.25	39.64	-34.36	74	56.59	32.69	9.31	58.95	-	-	P	H	
		3659	41.07	-32.93	74	55.23	33.02	12.27	59.45	-	-	P	H	
		4573.75	41.29	-32.71	74	54.5	34.15	12.07	59.43	-	-	P	H	
		7318	41.88	-32.12	74	48.54	35.7	15.21	57.57	-	-	P	H	
		8232.75	40.54	-33.46	74	46.6	35.83	15.62	57.51	-	-	P	H	
		9147.5	42.81	-31.19	74	49.07	36.09	16.49	58.84	-	-	P	H	
		2744.25	39.93	-34.07	74	56.88	32.69	9.31	58.95	-	-	P	V	
		3659	41.61	-32.39	74	55.77	33.02	12.27	59.45	-	-	P	V	
		4573.75	42.48	-31.52	74	55.69	34.15	12.07	59.43	-	-	P	V	
		7318	41.95	-32.05	74	48.61	35.7	15.21	57.57	-	-	P	V	
		8232.75	40.63	-33.37	74	46.69	35.83	15.62	57.51	-	-	P	V	
		9147.5	41.89	-32.11	74	48.15	36.09	16.49	58.84	-	-	P	V	



UHF RFID	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
RFID 927.25MHz		2781.75	40.63	-33.37	74	57.48	32.7	9.39	58.94	-	-	P	H	
		3709	41.18	-32.82	74	55.45	33.1	12.1	59.47	-	-	P	H	
		4636.25	40.36	-33.64	74	53.39	34.17	12.12	59.32	-	-	P	H	
		7418	41.3	-32.7	74	48.01	35.6	15.36	57.67	-	-	P	H	
		8345.25	42.26	-31.74	74	48.26	35.7	15.83	57.53	-	-	P	H	
			2781.75	39.99	-34.01	74	56.84	32.7	9.39	58.94	-	-	P	V
			3709	42.75	-31.25	74	57.02	33.1	12.1	59.47	-	-	P	V
			4636.25	39.48	-34.52	74	52.51	34.17	12.12	59.32	-	-	P	V
			7418	42.07	-31.93	74	48.78	35.6	15.36	57.67	-	-	P	V
			8345.25	41.86	-32.14	74	47.86	35.7	15.83	57.53	-	-	P	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>Non restricted band limit is radio frequency level down 20db.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
UHF RFID 913.25MHz		2739.75	38.54	-35.46	74	55.12	32.46	9.82	58.86	103	308	P	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2739.75MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.46(dB/m) + 9.82(dB) + 55.12(dBμV) – 58.86 (dB)  
= 38.54 (dBμV/m)
2. Margin(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 38.54(dBμV/m) – 74(dBμV/m)  
= -35.46(dB)

**Peak measured complies with the limit line, so test result is “PASS”.**





## Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	24.6~25.9°C
		Relative Humidity :	46.7~50.8%



<Internal Antenna>

<Sample 1>



### RFID (Band Edge @ 3m)

RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6)_H VERTICAL</p>

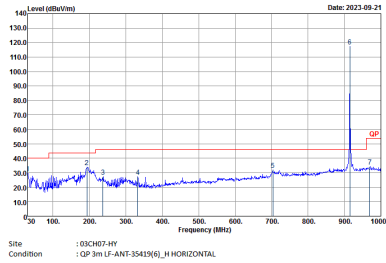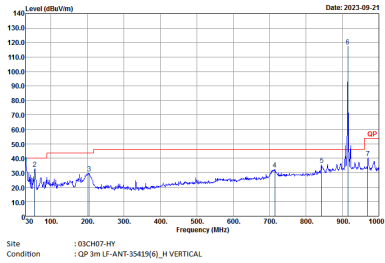

RFID	RFID	
	RFID 914.75MHz	
	Horizontal	Vertical
QP / Peak	 <p>Horizontal spectrum plot showing Level (dBm/100m) vs Frequency (MHz). The plot displays a significant peak at 914.75 MHz, marked with a red 'QP' label. The y-axis ranges from 10.0 to 140.0 dBm/100m, and the x-axis ranges from 50 to 1000 MHz. The date is 2023-09-21. Site: 03CH07-HY, Condition: QP 3m LF-ANT-35415(6)_H HORIZONTAL.</p>	 <p>Vertical spectrum plot showing Level (dBm/100m) vs Frequency (MHz). The plot displays a significant peak at 914.75 MHz, marked with a red 'QP' label. The y-axis ranges from 10.0 to 140.0 dBm/100m, and the x-axis ranges from 50 to 1000 MHz. The date is 2023-09-21. Site: 03CH07-HY, Condition: QP 3m LF-ANT-35415(6)_H VERTICAL.</p>

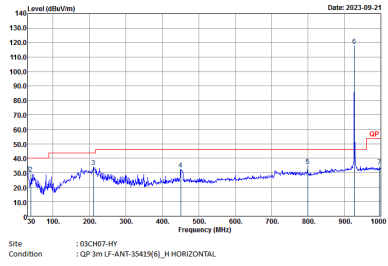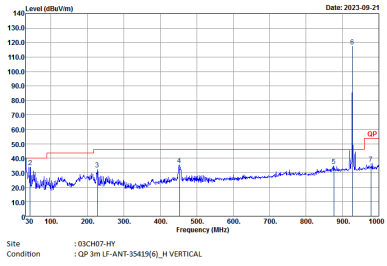

RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH07-HY Condition : GP 3m LF-ANT-35419(6)_H HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : GP 3m LF-ANT-35419(6)_H VERTICAL</p>



RFID (Harmonic @ 3m)

RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CM07-4Y Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CM07-4Y Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



RFID	RFID	
	RFID 914.75MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>





<External Antenna>

<Sample 2>

RFID (Band Edge @ 3m)

RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CM07-4Y Condition : QP 3m LF-ANT-35419(6)_H HORIZONTAL</p>	<p>Site : 03CM07-4Y Condition : QP 3m LF-ANT-35419(6)_H VERTICAL</p>

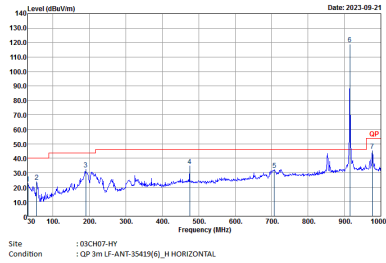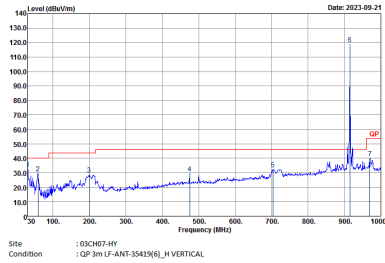

RFID	RFID	
	RFID 914.75MHz	
	Horizontal	Vertical
QP / Peak	 <p>Horizontal spectrum plot showing Level (dBm/100m) vs Frequency (MHz). The plot displays a prominent peak at 914.75 MHz, marked with a red 'QP' label. The y-axis ranges from 10.0 to 140.0 dBm/100m, and the x-axis ranges from 50 to 1000 MHz. The plot is dated 2023-09-21. Site: 03CH07-HY, Condition: QP 3m LF-ANT-35419(6)_H HORIZONTAL.</p>	 <p>Vertical spectrum plot showing Level (dBm/100m) vs Frequency (MHz). The plot displays a prominent peak at 914.75 MHz, marked with a red 'QP' label. The y-axis ranges from 10.0 to 140.0 dBm/100m, and the x-axis ranges from 50 to 1000 MHz. The plot is dated 2023-09-21. Site: 03CH07-HY, Condition: QP 3m LF-ANT-35419(6)_H VERTICAL.</p>







RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Horizontal spectrum plot showing Level (dBm/100kHz) vs Frequency (MHz). The plot displays a blue signal trace with a prominent peak at 927.25 MHz. A red horizontal line indicates the noise floor. The x-axis ranges from 50 to 1000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz. The date is 2023-09-21. Site: 03CH07-HY, Condition: GP 3m LF-ANT-35419(6)_H HORIZONTAL.</p>	<p>Vertical spectrum plot showing Level (dBm/100kHz) vs Frequency (MHz). The plot displays a blue signal trace with a prominent peak at 927.25 MHz. A red horizontal line indicates the noise floor. The x-axis ranges from 50 to 1000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz. The date is 2023-09-21. Site: 03CH07-HY, Condition: GP 3m LF-ANT-35419(6)_H VERTICAL.</p>



RFID (Harmonic @ 3m)

RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03C107-111 Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03C107-111 Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>

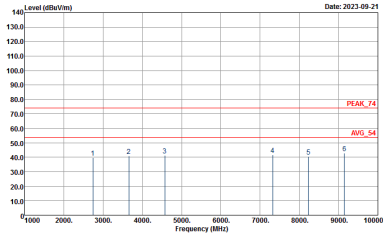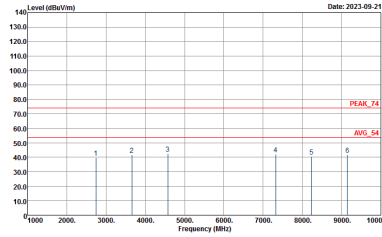

RFID	RFID	
	RFID 914.75MHz	
	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p style="text-align: right;">Date: 2023-09-21</p>  <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p style="text-align: right;">Date: 2023-09-21</p>  <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



# Appendix D. Duty Cycle Plots

<Internal Antenna and External Antenna 3>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
UHF RFID	100	-	-	10Hz

