

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (2TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.54	54.00	-1.46	22.15	2.22	28.17	0.00	Average	100	185	HORIZONTAL
2	2390.00	68.38	74.00	-5.62	37.99	2.22	28.17	0.00	Peak	100	185	HORIZONTAL
3	2413.40	101.76				2.22	28.21	0.00	Average	100	185	HORIZONTAL
4	2414.20	112.66				2.22	28.21	0.00	Peak	100	185	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	72.90	74.00	-1.10	42.51	2.22	28.17	0.00	Peak	100	175	HORIZONTAL
2	2390.00	50.83	54.00	-3.17	20.44	2.22	28.17	0.00	Average	100	175	HORIZONTAL
3	2429.40	117.69				2.23	28.25	0.00	Peak	100	175	HORIZONTAL
4	2429.60	107.34				2.23	28.25	0.00	Average	100	175	HORIZONTAL
5	2485.10	49.68	54.00	-4.32	19.00	2.26	28.42	0.00	Average	100	175	HORIZONTAL
6	2486.10	67.81	74.00	-6.19	37.13	2.26	28.42	0.00	Peak	100	175	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2464.20	111.43				2.24	28.33	0.00	Peak	117	183	HORIZONTAL
2	2465.20	100.77				2.24	28.33	0.00	Average	117	183	HORIZONTAL
3	2483.50	52.94	54.00	-1.06	22.30	2.26	28.38	0.00	Average	117	183	HORIZONTAL
4	2484.50	67.97	74.00	-6.03	37.33	2.26	28.38	0.00	Peak	117	183	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS8 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (2TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.69	54.00	-1.31	22.30	2.22	28.17	0.00	Average	100	184	HORIZONTAL
2	2390.00	65.77	74.00	-8.23	35.38	2.22	28.17	0.00	Peak	100	184	HORIZONTAL
3	2417.00	98.69				2.23	28.25	0.00	Average	100	184	HORIZONTAL
4	2417.60	110.44				2.23	28.25	0.00	Peak	100	184	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	69.61	74.00	-4.39	39.22	2.22	28.17	0.00	Peak	100	176	HORIZONTAL
2	2390.00	52.65	54.00	-1.35	22.26	2.22	28.17	0.00	Average	100	176	HORIZONTAL
3	2430.40	103.65				2.23	28.25	0.00	Average	100	176	HORIZONTAL
4	2432.60	115.01				2.23	28.25	0.00	Peak	100	176	HORIZONTAL
5	2483.50	51.01	54.00	-2.99	20.37	2.26	28.38	0.00	Average	100	176	HORIZONTAL
6	2484.30	65.27	74.00	-8.73	34.63	2.26	28.38	0.00	Peak	100	176	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2466.40	110.71				2.26	28.33	0.00	Peak	100	340	VERTICAL
2	2467.00	98.65				2.26	28.33	0.00	Average	100	340	VERTICAL
3	2483.50	52.77	54.00	-1.23	22.14	2.26	28.37	0.00	Average	100	340	VERTICAL
4	2483.50	69.15	74.00	-4.85	38.52	2.26	28.37	0.00	Peak	100	340	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (3TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.85	54.00	-1.15	22.46	2.22	28.17	0.00	Average	100	29	VERTICAL
2	2390.00	65.52	74.00	-8.48	35.13	2.22	28.17	0.00	Peak	100	29	VERTICAL
3	2409.60	110.57				2.22	28.21	0.00	Peak	100	29	VERTICAL
4	2410.00	100.94				2.22	28.21	0.00	Average	100	29	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.12	54.00	-1.88	21.73	2.22	28.17	0.00	Average	100	175	HORIZONTAL
2	2390.00	71.70	74.00	-2.30	41.31	2.22	28.17	0.00	Peak	100	175	HORIZONTAL
3	2429.00	115.62				2.23	28.25	0.00	Peak	100	175	HORIZONTAL
4	2429.80	106.65				2.23	28.25	0.00	Average	100	175	HORIZONTAL
5	2483.90	63.54	74.00	-10.46	32.90	2.26	28.38	0.00	Peak	100	175	HORIZONTAL
6	2486.50	48.53	54.00	-5.47	17.85	2.26	28.42	0.00	Average	100	175	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2461.00	99.47				2.24	28.33	0.00	Average	100	151	VERTICAL
2	2463.20	109.31				2.24	28.33	0.00	Peak	100	151	VERTICAL
3	2483.50	52.26	54.00	-1.74	21.63	2.26	28.37	0.00	Average	100	151	VERTICAL
4	2483.70	67.57	74.00	-6.43	36.94	2.26	28.37	0.00	Peak	100	151	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS8 20MHz Ch 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (3TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.73	54.00	-1.27	22.34	2.22	28.17	0.00	Average	100	153	VERTICAL
2	2390.00	66.28	74.00	-7.72	35.89	2.22	28.17	0.00	Peak	100	153	VERTICAL
3	2418.60	100.71				2.23	28.25	0.00	Average	100	153	VERTICAL
4	2419.00	112.09				2.23	28.25	0.00	Peak	100	153	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	51.63	54.00	-2.37	21.24	2.22	28.17	0.00	Average	100	154	VERTICAL
2	2390.00	66.35	74.00	-7.65	35.96	2.22	28.17	0.00	Peak	100	154	VERTICAL
3	2443.80	118.33				2.24	28.29	0.00	Peak	100	154	VERTICAL
4	2444.80	106.91				2.24	28.29	0.00	Average	100	154	VERTICAL
5	2483.50	52.12	54.00	-1.88	21.49	2.26	28.37	0.00	Average	100	154	VERTICAL
6	2484.30	69.79	74.00	-4.21	39.16	2.26	28.37	0.00	Peak	100	154	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2454.60	111.54				2.24	28.33	0.00	Peak	100	151	VERTICAL
2	2466.60	99.49				2.26	28.33	0.00	Average	100	151	VERTICAL
3	2483.50	52.41	54.00	-1.59	21.78	2.26	28.37	0.00	Average	100	151	VERTICAL
4	2483.90	66.88	74.00	-7.12	36.25	2.26	28.37	0.00	Peak	100	151	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (1TX)		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.96	54.00	-1.04	22.57	2.22	28.17	0.00	Average	105	117	HORIZONTAL
2	2390.00	66.67	74.00	-7.33	36.28	2.22	28.17	0.00	Peak	105	117	HORIZONTAL
3	2405.65	93.37				2.22	28.21	0.00	Average	105	117	HORIZONTAL
4	2412.71	103.73				2.22	28.21	0.00	Peak	105	117	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	67.12	74.00	-6.88	36.74	2.21	28.17	0.00	Peak	102	100	HORIZONTAL
2	2390.00	52.24	54.00	-1.76	21.85	2.22	28.17	0.00	Average	102	100	HORIZONTAL
3	2452.06	105.55				2.24	28.33	0.00	Peak	102	100	HORIZONTAL
4	2453.67	95.33				2.24	28.33	0.00	Average	102	100	HORIZONTAL
5	2483.50	52.02	54.00	-1.98	21.38	2.26	28.38	0.00	Average	102	100	HORIZONTAL
6	2483.50	69.44	74.00	-4.56	38.80	2.26	28.38	0.00	Peak	102	100	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2443.60	93.93				2.24	28.29	0.00	Average	100	155	VERTICAL
2	2444.40	104.58				2.24	28.29	0.00	Peak	100	155	VERTICAL
3	2483.50	52.45	54.00	-1.55	21.82	2.26	28.37	0.00	Average	100	155	VERTICAL
4	2483.50	69.54	74.00	-4.46	38.91	2.26	28.37	0.00	Peak	100	155	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (2TX)		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.48	54.00	-1.52	22.09	2.22	28.17	0.00	Average	100	181	HORIZONTAL
2	2390.00	65.83	74.00	-8.17	35.44	2.22	28.17	0.00	Peak	100	181	HORIZONTAL
3	2412.00	104.62				2.22	28.21	0.00	Peak	100	181	HORIZONTAL
4	2412.40	94.42				2.22	28.21	0.00	Average	100	181	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.78	54.00	-1.22	22.39	2.22	28.17	0.00	Average	100	175	HORIZONTAL
2	2390.00	71.31	74.00	-2.69	40.92	2.22	28.17	0.00	Peak	100	175	HORIZONTAL
3	2428.20	97.66				2.23	28.25	0.00	Average	100	175	HORIZONTAL
4	2451.00	107.53				2.24	28.33	0.00	Peak	100	175	HORIZONTAL
5	2487.90	47.24	54.00	-6.76	16.56	2.26	28.42	0.00	Average	100	175	HORIZONTAL
6	2491.10	64.86	74.00	-9.14	34.18	2.26	28.42	0.00	Peak	100	175	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2466.80	106.25				2.26	28.33	0.00	Peak	100	15	VERTICAL
2	2467.60	96.19				2.26	28.33	0.00	Average	100	15	VERTICAL
3	2483.50	52.94	54.00	-1.06	22.31	2.26	28.37	0.00	Average	100	15	VERTICAL
4	2483.50	69.27	74.00	-4.73	38.64	2.26	28.37	0.00	Peak	100	15	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (2TX)		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.46	54.00	-1.54	22.07	2.22	28.17	0.00	Average	100	181	HORIZONTAL
2	2390.00	66.71	74.00	-7.29	36.32	2.22	28.17	0.00	Peak	100	181	HORIZONTAL
3	2406.00	105.16				2.22	28.21	0.00	Peak	100	181	HORIZONTAL
4	2409.60	92.46				2.22	28.21	0.00	Average	100	181	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.38	54.00	-1.62	21.99	2.22	28.17	0.00	Average	100	184	HORIZONTAL
2	2390.00	67.63	74.00	-6.37	37.24	2.22	28.17	0.00	Peak	100	184	HORIZONTAL
3	2420.60	96.01				2.23	28.25	0.00	Average	100	184	HORIZONTAL
4	2452.20	107.25				2.24	28.33	0.00	Peak	100	184	HORIZONTAL
5	2483.50	48.17	54.00	-5.83	17.53	2.26	28.38	0.00	Average	100	184	HORIZONTAL
6	2485.50	62.75	74.00	-11.25	32.07	2.26	28.42	0.00	Peak	100	184	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2468.80	105.78				2.26	28.38	0.00	Peak	116	172	HORIZONTAL
2	2469.60	94.52				2.26	28.38	0.00	Average	116	172	HORIZONTAL
3	2483.50	52.88	54.00	-1.12	22.24	2.26	28.38	0.00	Average	116	172	HORIZONTAL
4	2483.50	68.05	74.00	-5.95	37.41	2.26	28.38	0.00	Peak	116	172	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (3TX)		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.60	69.61	74.00	-4.39	39.23	2.21	28.17	0.00	Peak	102	0	VERTICAL
2	2390.00	52.56	54.00	-1.44	22.17	2.22	28.17	0.00	Average	102	0	VERTICAL
3	2408.00	94.15				2.22	28.21	0.00	Average	102	0	VERTICAL
4	2429.60	104.41				2.23	28.25	0.00	Peak	102	0	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.40	66.92	74.00	-7.08	36.54	2.21	28.17	0.00	Peak	100	155	VERTICAL
2	2390.00	52.79	54.00	-1.21	22.40	2.22	28.17	0.00	Average	100	155	VERTICAL
3	2446.60	110.19				2.24	28.29	0.00	Peak	100	155	VERTICAL
4	2447.40	101.23				2.24	28.29	0.00	Average	100	155	VERTICAL
5	2487.10	67.94	74.00	-6.06	37.27	2.26	28.41	0.00	Peak	100	155	VERTICAL
6	2487.90	50.74	54.00	-3.26	20.07	2.26	28.41	0.00	Average	100	155	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2455.60	96.16				2.24	28.33	0.00	Average	101	150	VERTICAL
2	2456.80	105.49				2.24	28.33	0.00	Peak	101	150	VERTICAL
3	2483.50	52.09	54.00	-1.91	21.46	2.26	28.37	0.00	Average	101	150	VERTICAL
4	2484.70	70.03	74.00	-3.97	39.40	2.26	28.37	0.00	Peak	101	150	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11n MCS8 40MHz Ch 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (3TX)		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.30	54.00	-1.70	21.91	2.22	28.17	0.00	Average	100	154	VERTICAL
2	2390.00	66.85	74.00	-7.15	36.46	2.22	28.17	0.00	Peak	100	154	VERTICAL
3	2408.40	105.67				2.22	28.21	0.00	Peak	100	154	VERTICAL
4	2429.60	94.67				2.23	28.25	0.00	Average	100	154	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.20	68.19	74.00	-5.81	37.81	2.21	28.17	0.00	Peak	100	152	VERTICAL
2	2390.00	52.14	54.00	-1.86	21.75	2.22	28.17	0.00	Average	100	152	VERTICAL
3	2430.60	109.51				2.23	28.25	0.00	Peak	100	152	VERTICAL
4	2451.00	99.04				2.24	28.33	0.00	Average	100	152	VERTICAL
5	2483.50	50.68	54.00	-3.32	20.05	2.26	28.37	0.00	Average	100	152	VERTICAL
6	2485.90	66.89	74.00	-7.11	36.22	2.26	28.41	0.00	Peak	100	152	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2468.80	106.15				2.26	28.37	0.00	Peak	100	149	VERTICAL
2	2469.20	95.53				2.26	28.37	0.00	Average	100	149	VERTICAL
3	2483.50	52.83	54.00	-1.17	22.20	2.26	28.37	0.00	Average	100	149	VERTICAL
4	2483.50	72.04	74.00	-1.96	41.41	2.26	28.37	0.00	Peak	100	149	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (1TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.00	59.25	74.00	-14.75	28.87	2.21	28.17	0.00	Peak	100	186	HORIZONTAL
2	2386.20	52.36	54.00	-1.64	21.98	2.21	28.17	0.00	Average	100	186	HORIZONTAL
3	2409.40	109.28				2.22	28.21	0.00	Peak	100	186	HORIZONTAL
4	2410.20	105.77				2.22	28.21	0.00	Average	100	186	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.00	58.64	74.00	-15.36	28.26	2.21	28.17	0.00	Peak	100	187	HORIZONTAL
2	2389.20	50.67	54.00	-3.33	20.29	2.21	28.17	0.00	Average	100	187	HORIZONTAL
3	2435.40	108.49				2.23	28.29	0.00	Average	100	187	HORIZONTAL
4	2435.60	111.66				2.23	28.29	0.00	Peak	100	187	HORIZONTAL
5	2483.90	48.78	54.00	-5.22	18.14	2.26	28.38	0.00	Average	100	187	HORIZONTAL
6	2483.90	57.11	74.00	-16.89	26.47	2.26	28.38	0.00	Peak	100	187	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2461.20	106.86				2.24	28.33	0.00	Peak	100	188	HORIZONTAL
2	2463.00	103.16				2.24	28.33	0.00	Average	100	188	HORIZONTAL
3	2487.50	59.73	74.00	-14.27	29.05	2.26	28.42	0.00	Peak	100	188	HORIZONTAL
4	2487.70	52.92	54.00	-1.08	22.24	2.26	28.42	0.00	Average	100	188	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (2TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.00	61.67	74.00	-12.33	31.29	2.21	28.17	0.00	Peak	100	32	VERTICAL
2	2386.80	51.37	54.00	-2.63	20.99	2.21	28.17	0.00	Average	100	32	VERTICAL
3	2410.80	114.06				2.22	28.21	0.00	Peak	100	32	VERTICAL
4	2411.20	109.69				2.22	28.21	0.00	Average	100	32	VERTICAL
5	2495.90	61.59	74.00	-12.41	30.91	2.27	28.41	0.00	Peak	100	32	VERTICAL
6	2497.10	52.70	54.00	-1.30	22.02	2.27	28.41	0.00	Average	100	32	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	49.85	54.00	-4.15	19.46	2.22	28.17	0.00	Average	100	177	HORIZONTAL
2	2390.00	60.27	74.00	-13.73	29.88	2.22	28.17	0.00	Peak	100	177	HORIZONTAL
3	2435.80	115.40				2.23	28.29	0.00	Peak	100	177	HORIZONTAL
4	2436.20	110.85				2.23	28.29	0.00	Average	100	177	HORIZONTAL
5	2483.50	47.59	54.00	-6.41	16.95	2.26	28.38	0.00	Average	100	177	HORIZONTAL
6	2486.70	59.11	74.00	-14.89	28.43	2.26	28.42	0.00	Peak	100	177	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2462.80	106.30				2.24	28.33	0.00	Average	100	338	VERTICAL
2	2463.60	111.09				2.24	28.33	0.00	Peak	100	338	VERTICAL
3	2483.50	52.93	54.00	-1.07	22.30	2.26	28.37	0.00	Average	100	338	VERTICAL
4	2483.50	60.99	74.00	-13.01	30.36	2.26	28.37	0.00	Peak	100	338	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Mode	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (3TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.80	52.44	54.00	-1.56	22.06	2.21	28.17	0.00	Average	100	0	VERTICAL
2	2387.60	59.49	74.00	-14.51	29.11	2.21	28.17	0.00	Peak	100	0	VERTICAL
3	2410.20	109.40				2.22	28.21	0.00	Average	100	0	VERTICAL
4	2410.60	112.34				2.22	28.21	0.00	Peak	100	0	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	46.28	54.00	-7.72	15.89	2.22	28.17	0.00	Average	100	181	HORIZONTAL
2	2390.00	56.40	74.00	-17.60	26.01	2.22	28.17	0.00	Peak	100	181	HORIZONTAL
3	2435.40	106.86				2.23	28.29	0.00	Average	100	181	HORIZONTAL
4	2436.20	110.44				2.23	28.29	0.00	Peak	100	181	HORIZONTAL
5	2483.50	44.79	54.00	-9.21	14.15	2.26	28.38	0.00	Average	100	181	HORIZONTAL
6	2483.50	55.05	74.00	-18.95	24.41	2.26	28.38	0.00	Peak	100	181	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2460.20	107.13				2.24	28.33	0.00	Average	162	256	HORIZONTAL
2	2461.20	110.92				2.24	28.33	0.00	Peak	162	256	HORIZONTAL
3	2483.50	52.68	54.00	-1.32	22.04	2.26	28.38	0.00	Average	162	256	HORIZONTAL
4	2483.50	60.30	74.00	-13.70	29.66	2.26	28.38	0.00	Peak	162	256	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1
Test Moe	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (1TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.40	72.25	74.00	-1.75	41.87	2.21	28.17	0.00	Peak	100	186	HORIZONTAL
2	2390.00	51.75	54.00	-2.25	21.36	2.22	28.17	0.00	Average	100	186	HORIZONTAL
3	2405.60	98.57				2.22	28.21	0.00	Average	100	186	HORIZONTAL
4	2406.80	108.93				2.22	28.21	0.00	Peak	100	186	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.80	72.87	74.00	-1.13	42.48	2.22	28.17	0.00	Peak	100	187	HORIZONTAL
2	2390.00	52.35	54.00	-1.65	21.96	2.22	28.17	0.00	Average	100	187	HORIZONTAL
3	2430.00	112.36				2.23	28.25	0.00	Peak	100	187	HORIZONTAL
4	2430.80	102.03				2.23	28.25	0.00	Average	100	187	HORIZONTAL
5	2483.50	49.96	54.00	-4.04	19.32	2.26	28.38	0.00	Average	100	187	HORIZONTAL
6	2484.50	70.49	74.00	-3.51	39.85	2.26	28.38	0.00	Peak	100	187	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2466.80	108.61				2.26	28.33	0.00	Peak	100	99	HORIZONTAL
2	2467.80	97.71				2.26	28.33	0.00	Average	100	99	HORIZONTAL
3	2483.50	52.65	54.00	-1.35	22.01	2.26	28.38	0.00	Average	100	99	HORIZONTAL
4	2491.30	72.86	74.00	-1.14	42.18	2.26	28.42	0.00	Peak	100	99	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2
Test Moe	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (2TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.55	54.00	-1.45	22.16	2.22	28.17	0.00	Average	100	182	HORIZONTAL
2	2390.00	71.14	74.00	-2.86	40.75	2.22	28.17	0.00	Peak	100	182	HORIZONTAL
3	2414.80	102.04				2.22	28.21	0.00	Average	100	182	HORIZONTAL
4	2415.00	112.31				2.22	28.21	0.00	Peak	100	182	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.20	70.89	74.00	-3.11	40.51	2.21	28.17	0.00	Peak	100	36	VERTICAL
2	2389.60	51.51	54.00	-2.49	21.13	2.21	28.17	0.00	Average	100	36	VERTICAL
3	2444.20	119.19				2.24	28.29	0.00	Peak	100	36	VERTICAL
4	2444.60	109.24				2.24	28.29	0.00	Average	100	36	VERTICAL
5	2484.30	72.05	74.00	-1.95	41.42	2.26	28.37	0.00	Peak	100	36	VERTICAL
6	2484.50	51.46	54.00	-2.54	20.83	2.26	28.37	0.00	Average	100	36	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2467.60	112.69				2.26	28.33	0.00	Peak	116	173	HORIZONTAL
2	2467.80	102.40				2.26	28.33	0.00	Average	116	173	HORIZONTAL
3	2483.50	52.95	54.00	-1.05	22.31	2.26	28.38	0.00	Average	116	173	HORIZONTAL
4	2483.50	67.18	74.00	-6.82	36.54	2.26	28.38	0.00	Peak	116	173	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	65%
Test Engineer	Serway Lee	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Moe	Mode 5 (Ant. 5 Facade antenna / 2.5dBi) (3TX)		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.57	54.00	-1.43	22.18	2.22	28.17	0.00	Average	100	155	VERTICAL
2	2390.00	68.07	74.00	-5.93	37.68	2.22	28.17	0.00	Peak	100	155	VERTICAL
3	2409.40	102.16				2.22	28.21	0.00	Average	100	155	VERTICAL
4	2409.40	112.80				2.22	28.21	0.00	Peak	100	155	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.00	70.46	74.00	-3.54	40.08	2.21	28.17	0.00	Peak	100	156	VERTICAL
2	2390.00	52.33	54.00	-1.67	21.94	2.22	28.17	0.00	Average	100	156	VERTICAL
3	2440.00	108.19				2.23	28.29	0.00	Average	100	156	VERTICAL
4	2440.00	117.30				2.23	28.29	0.00	Peak	100	156	VERTICAL
5	2484.90	51.82	54.00	-2.18	21.19	2.26	28.37	0.00	Average	100	156	VERTICAL
6	2484.90	66.34	74.00	-7.66	35.71	2.26	28.37	0.00	Peak	100	156	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.


Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2463.00	98.65				2.24	28.33	0.00	Average	100	174	VERTICAL
2	2463.80	109.87				2.24	28.33	0.00	Peak	100	174	VERTICAL
3	2483.50	52.41	54.00	-1.59	21.78	2.26	28.37	0.00	Average	100	174	VERTICAL
4	2483.70	66.02	74.00	-7.98	35.39	2.26	28.37	0.00	Peak	100	174	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 2412 MHz (1TX)

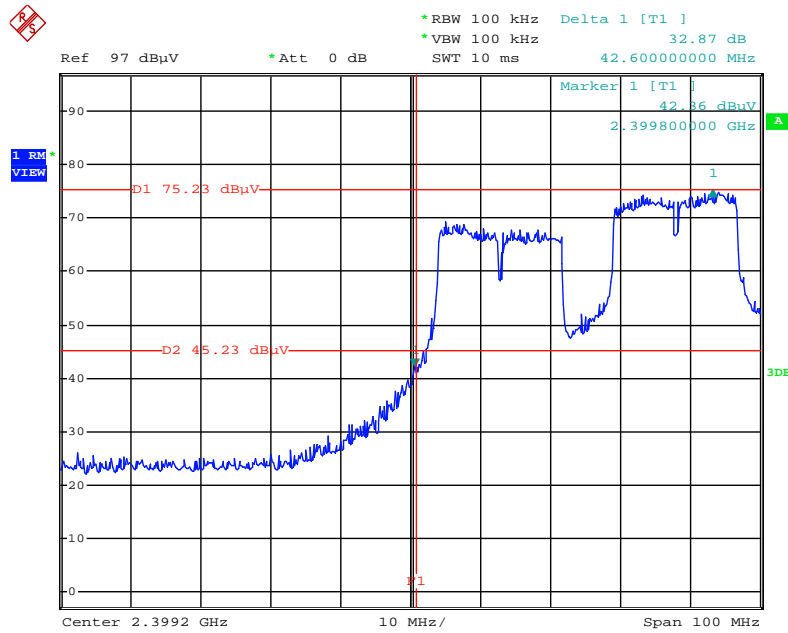


Date: 5.MAY.2012 09:53:56

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 2462 MHz (1TX)

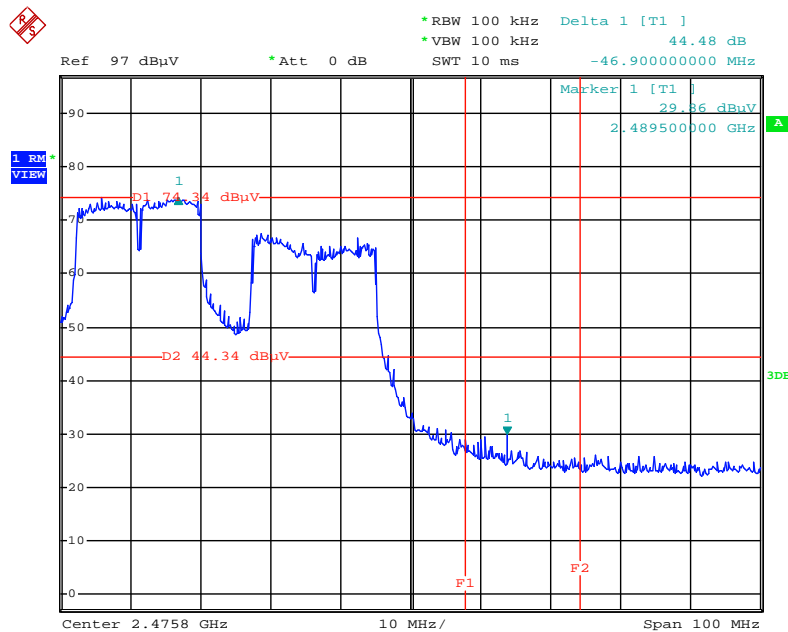


Date: 5.MAY.2012 09:48:27

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 2412 MHz (2TX)

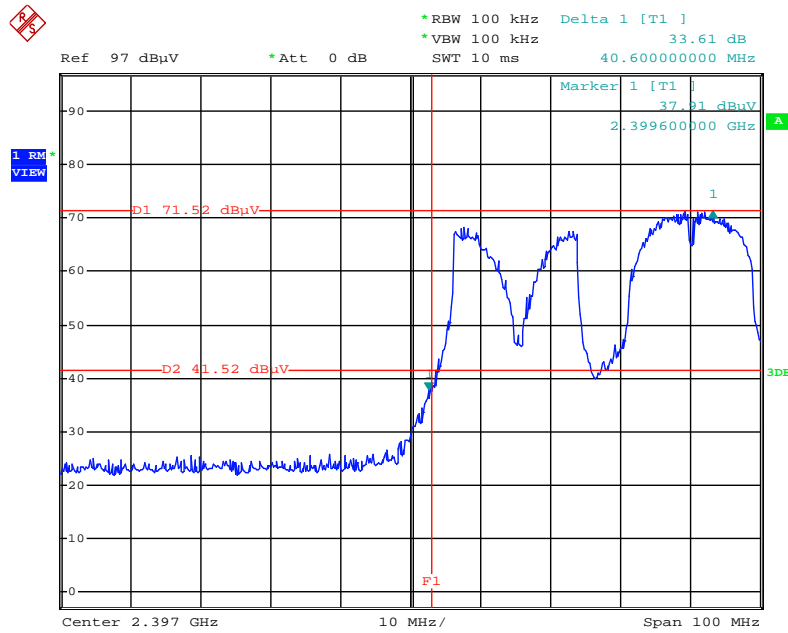


Date: 5.MAY.2012 13:13:12

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1+ Chain 2/ 2462 MHz (2TX)

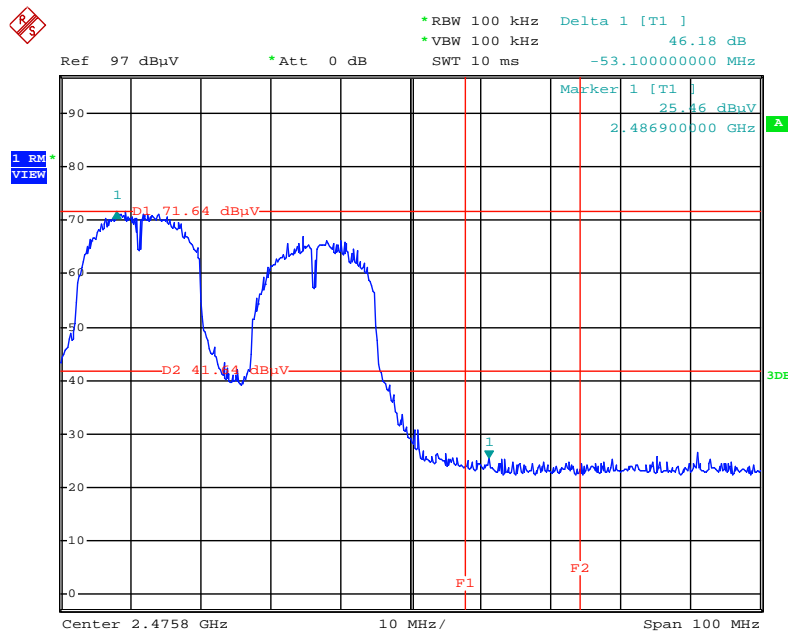


Date: 5.MAY.2012 13:05:21

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2/ 2412 MHz (2TX)

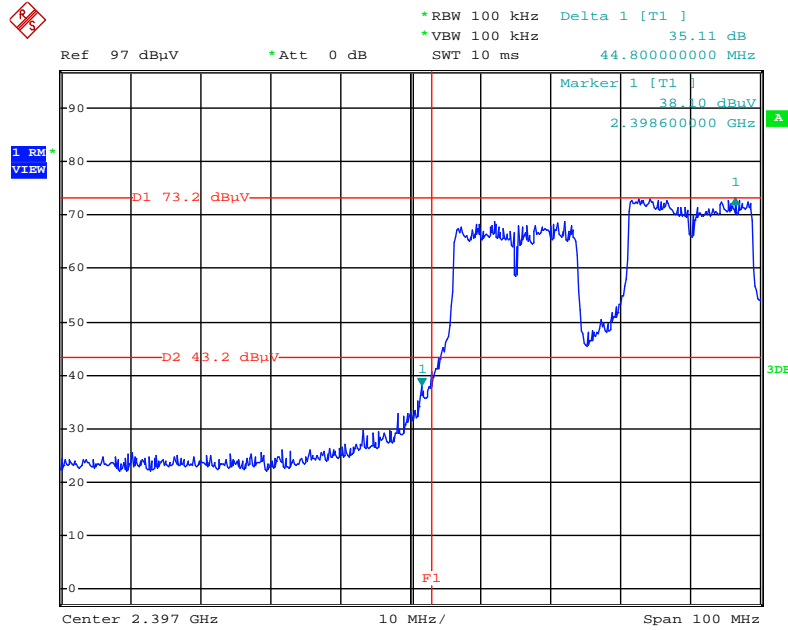


Date: 5.MAY.2012 13:15:12

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1+ Chain 2/ 2462 MHz (2TX)

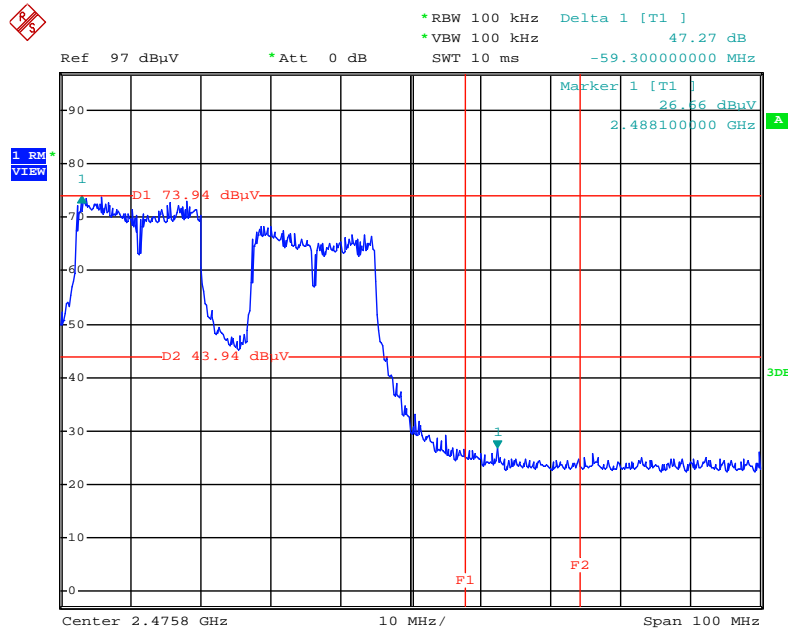


Date: 5.MAY.2012 13:06:35

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 2412 MHz (3TX)

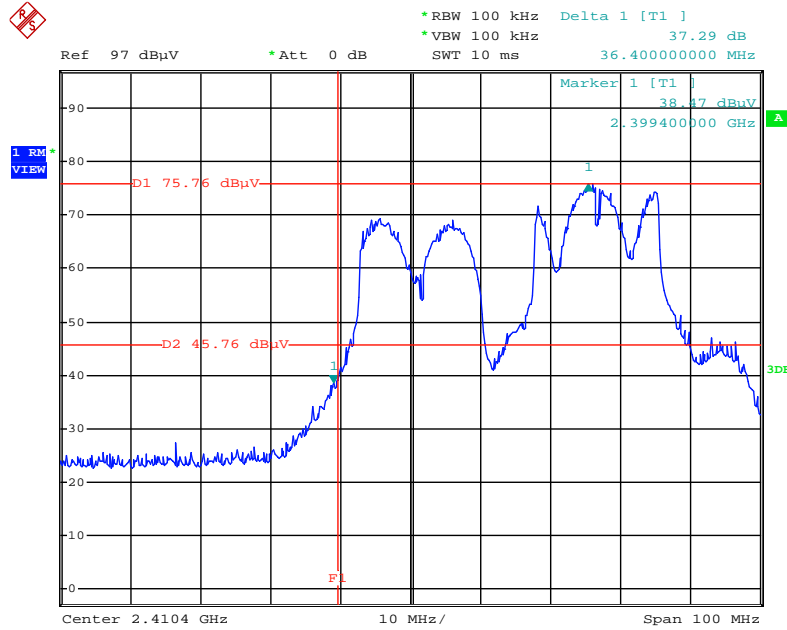


Date: 7.MAY.2012 13:15:18

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 2462 MHz (3TX)

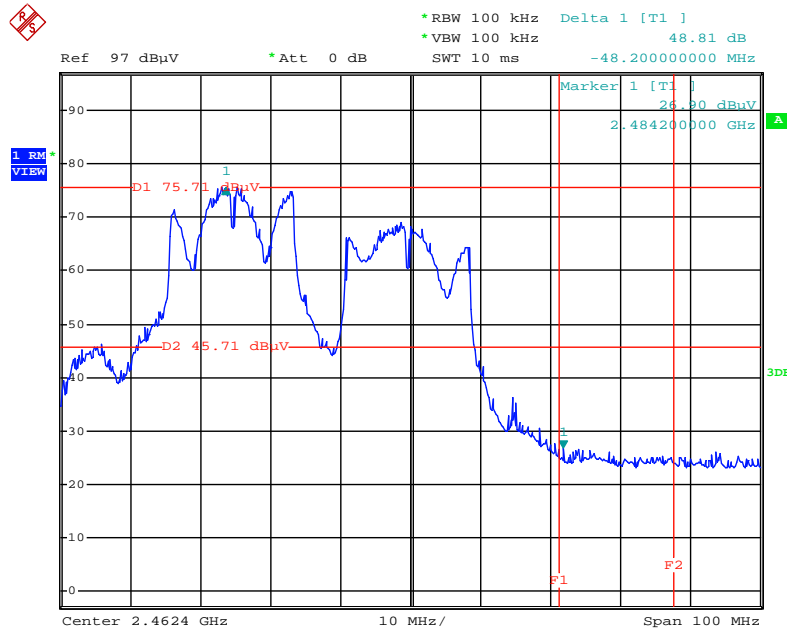


Date: 7.MAY.2012 13:17:44

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 2412 MHz (3TX)

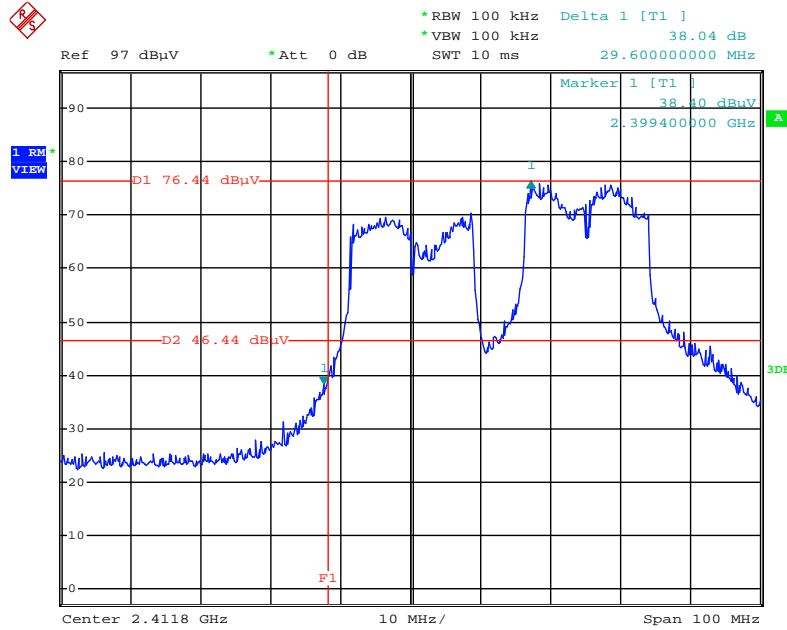


Date: 7.MAY.2012 13:22:05

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 2462 MHz (3TX)

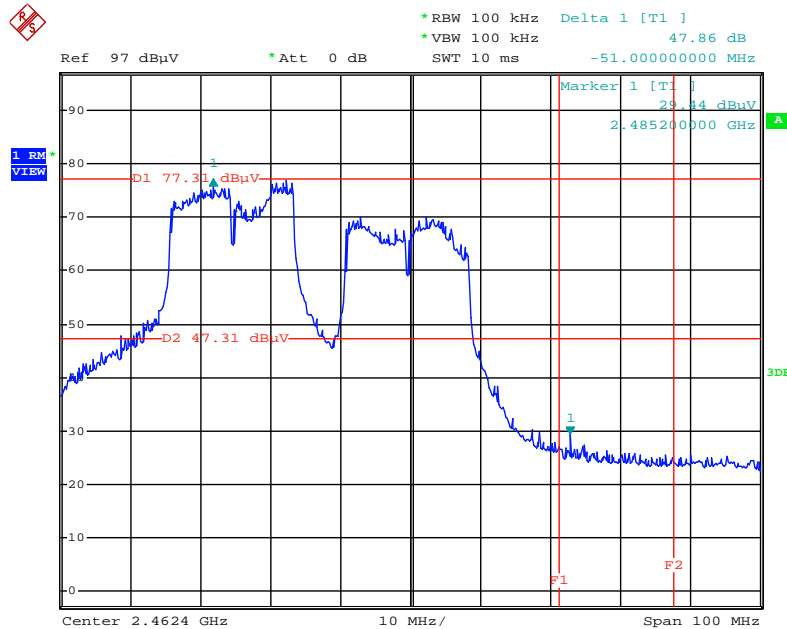


Date: 7.MAY.2012 13:20:00

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 2422 MHz (1TX)

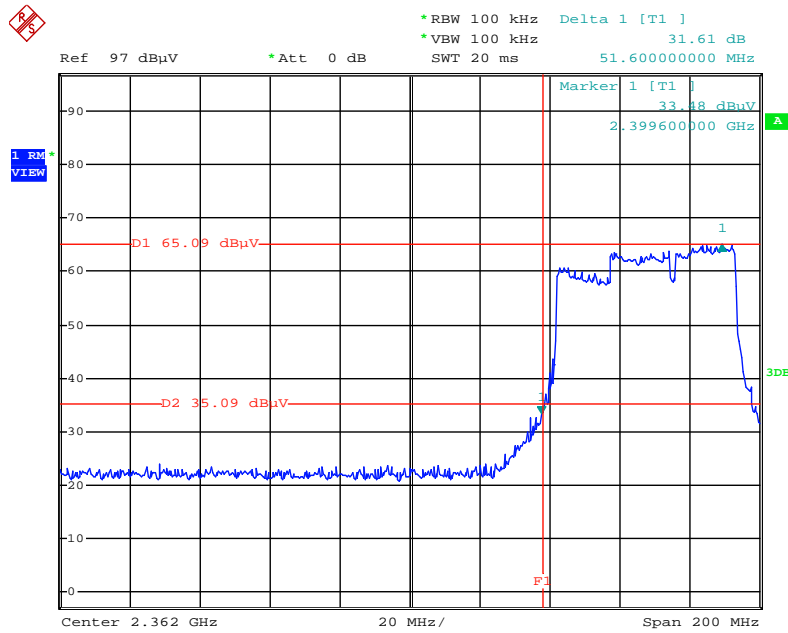


Date: 5.MAY.2012 09:52:09

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 2452 MHz (1TX)

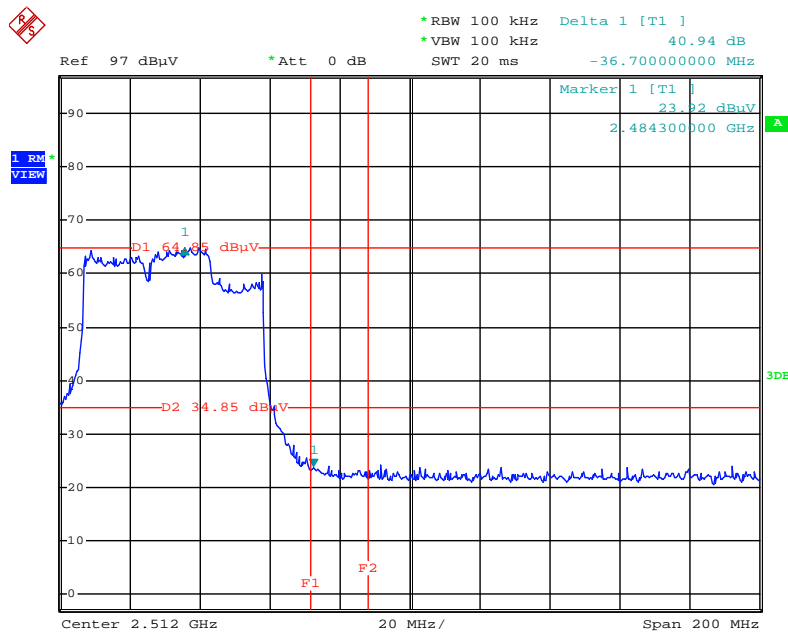


Date: 5.MAY.2012 09:50:31

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 2422 MHz (2TX)

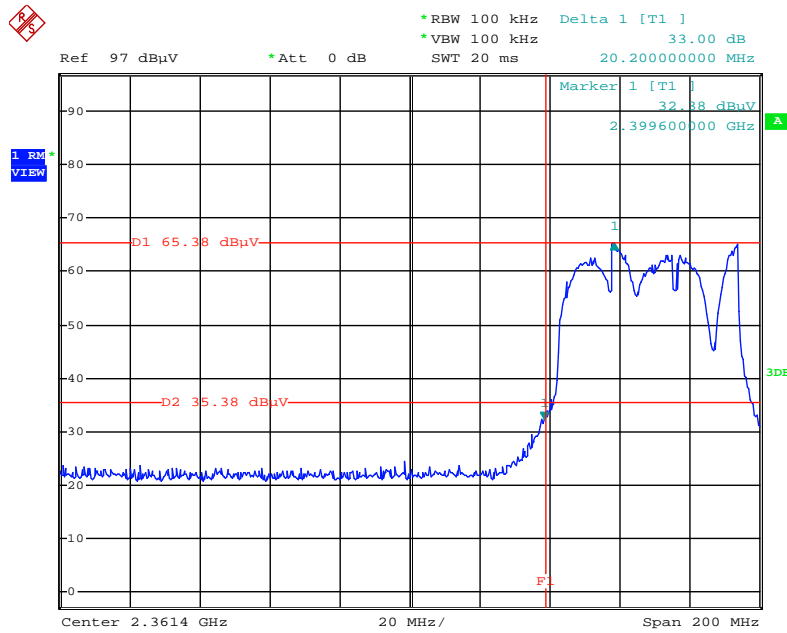


Date: 5.MAY.2012 13:16:46

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 2452 MHz (2TX)

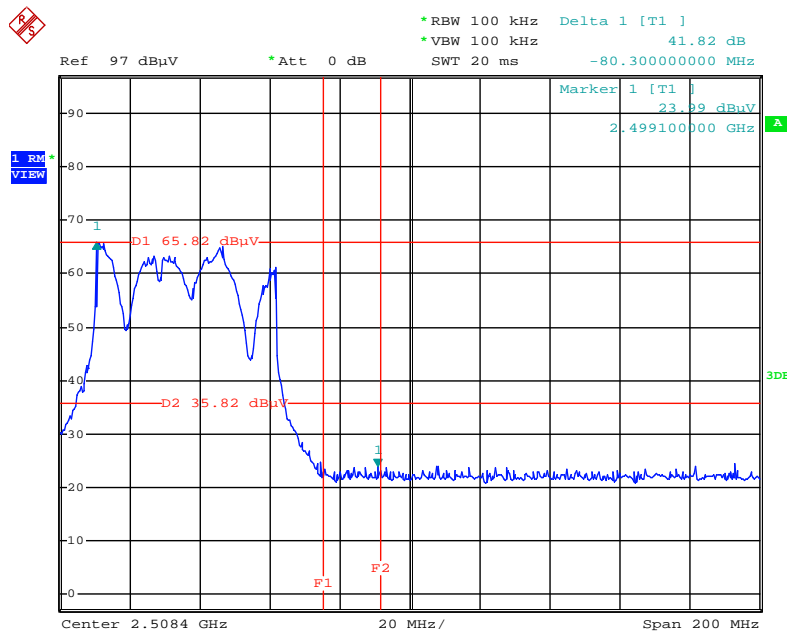


Date: 5.MAY.2012 13:03:42

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 2422 MHz (2TX)

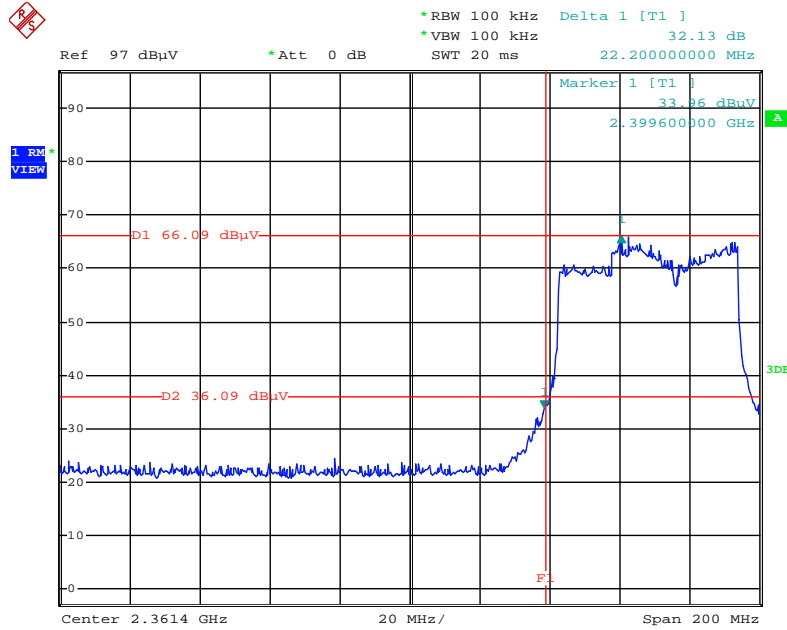


Date: 5.MAY.2012 13:18:20

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 2452 MHz (2TX)

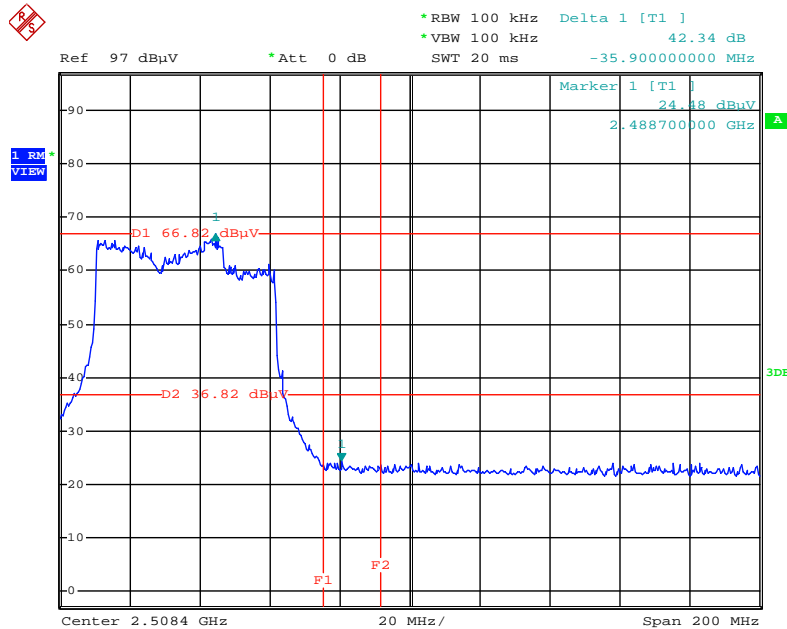


Date: 5.MAY.2012 13:02:03

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 2422 MHz (3TX)

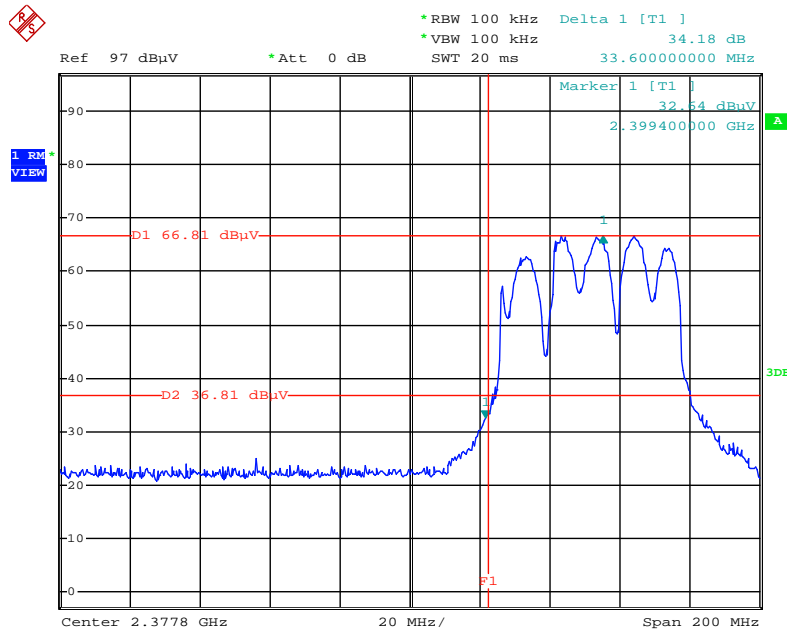


Date: 7.MAY.2012 13:24:32

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 2452 MHz (3TX)

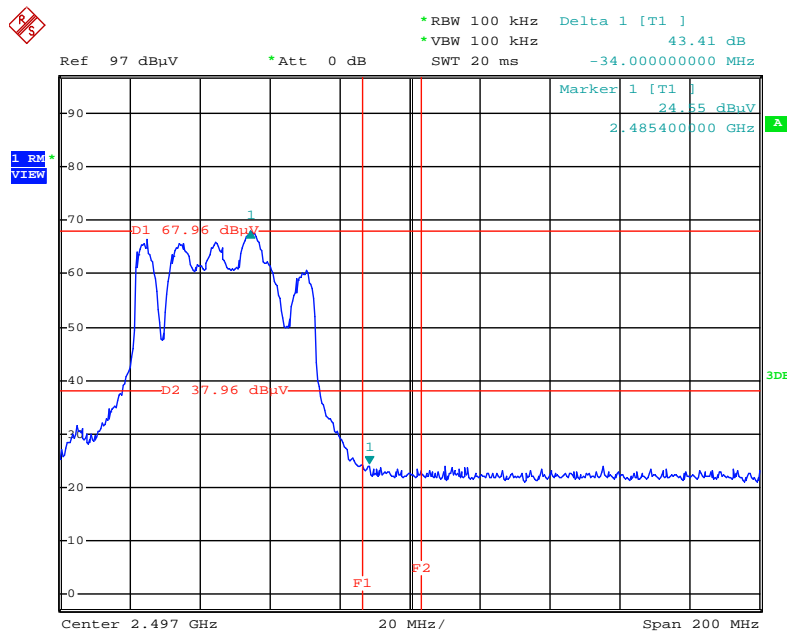


Date: 7.MAY.2012 13:26:39

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 2422 MHz (3TX)

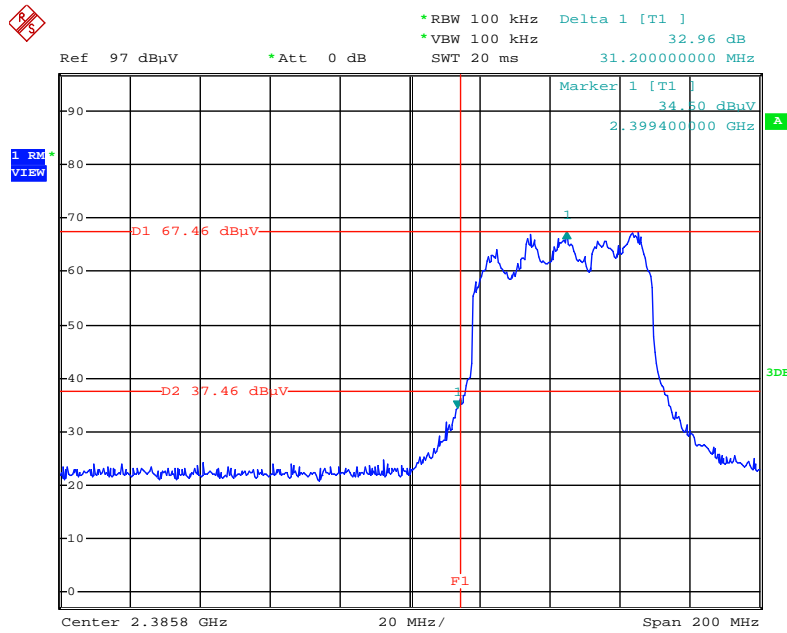


Date: 7.MAY.2012 13:32:53

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 2452 MHz (3TX)

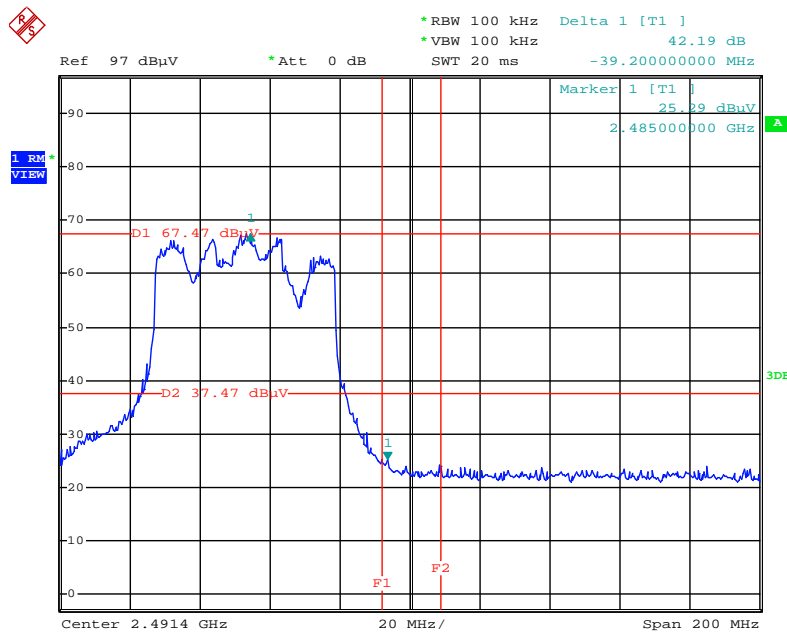


Date: 7.MAY.2012 13:28:52

Plot on Configuration IEEE 802.11b / Chain 1 / 2412 MHz (1TX)

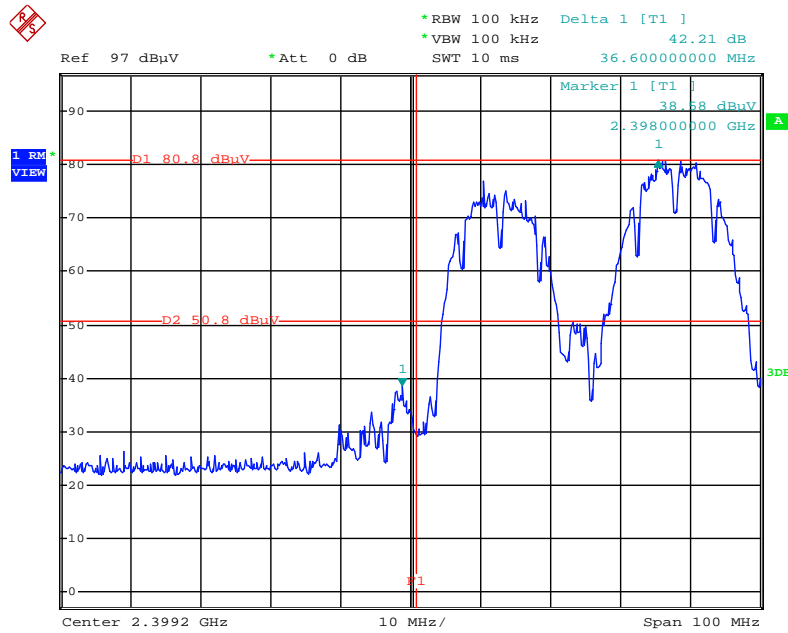


Date: 5.MAY.2012 09:57:04

Plot on Configuration IEEE 802.11b / Chain 1 / 2462 MHz (1TX)

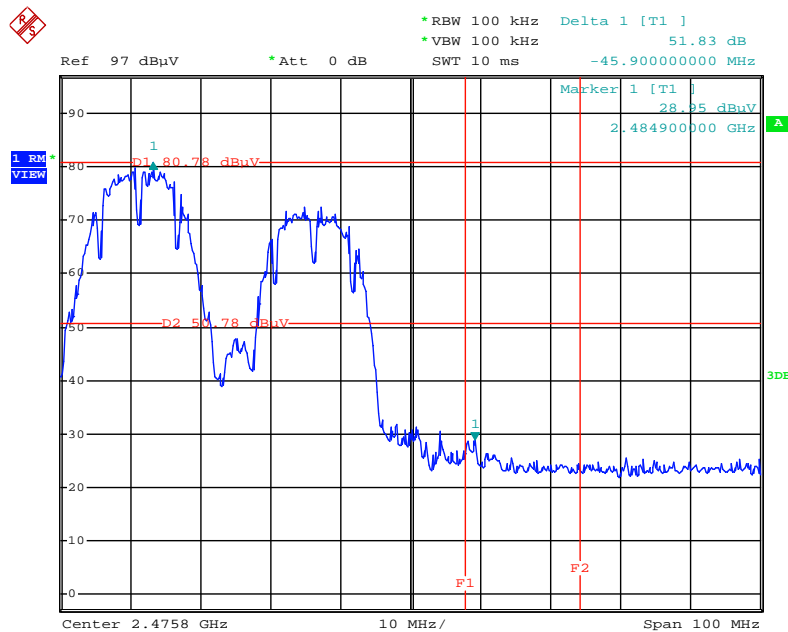


Date: 5.MAY.2012 09:44:27

Plot on Configuration IEEE 802.11b / Chain 1 + Chain 2 / 2412 MHz (2TX)

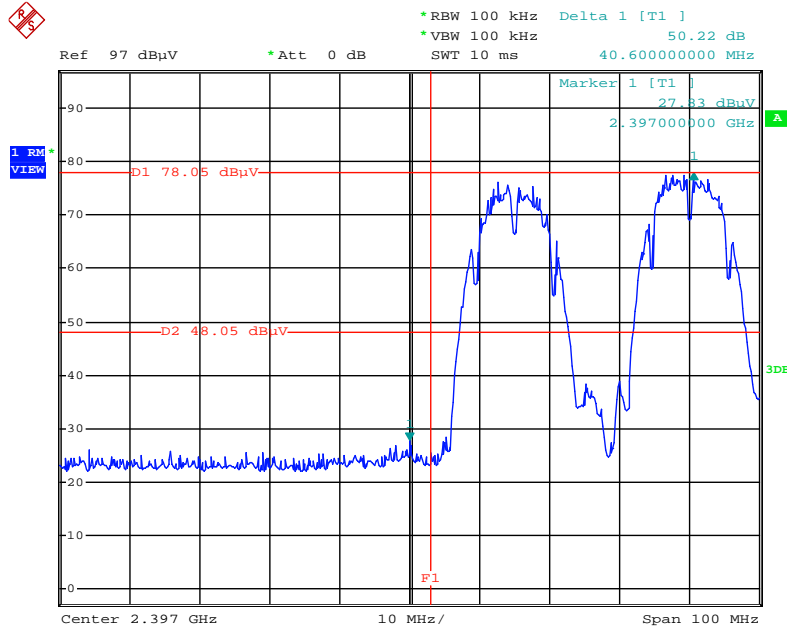


Date: 5.MAY.2012 13:10:43

Plot on Configuration IEEE 802.11b / Chain 1 + Chain 2 / 2462 MHz (2TX)

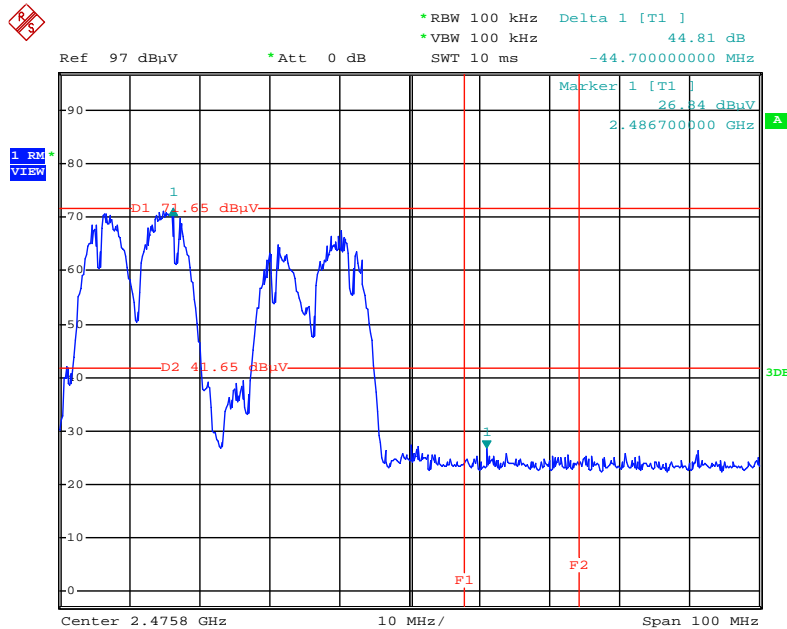


Date: 5.MAY.2012 13:09:10

Plot on Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3 / 2412 MHz (3TX)

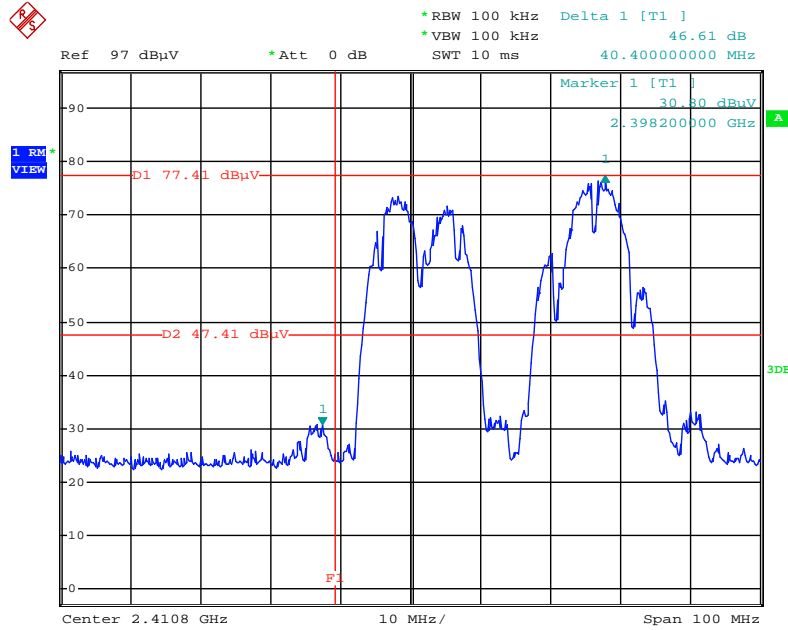


Date: 7.MAY.2012 13:06:52

Plot on Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3 / 2462 MHz (3TX)

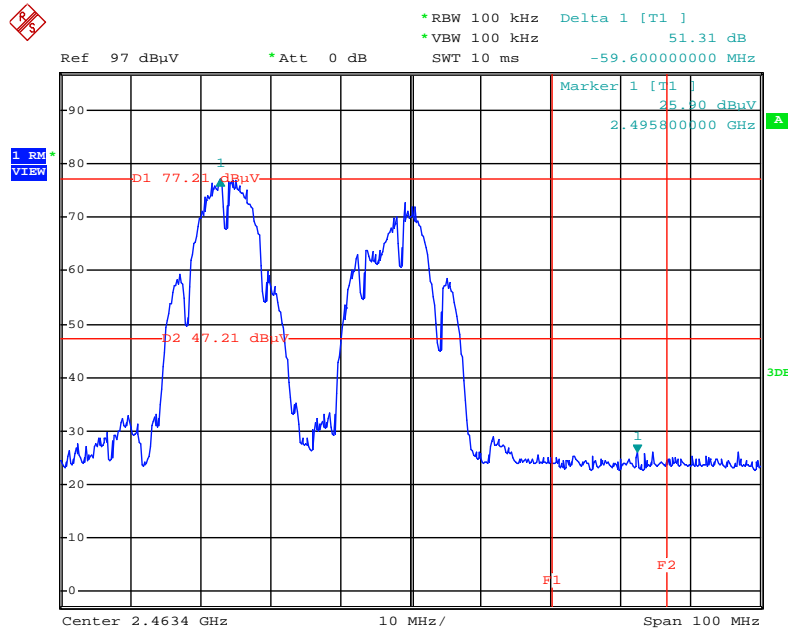


Date: 7.MAY.2012 13:09:13

Plot on Configuration IEEE 802.11g / Chain 1 / 2412 MHz (1TX)

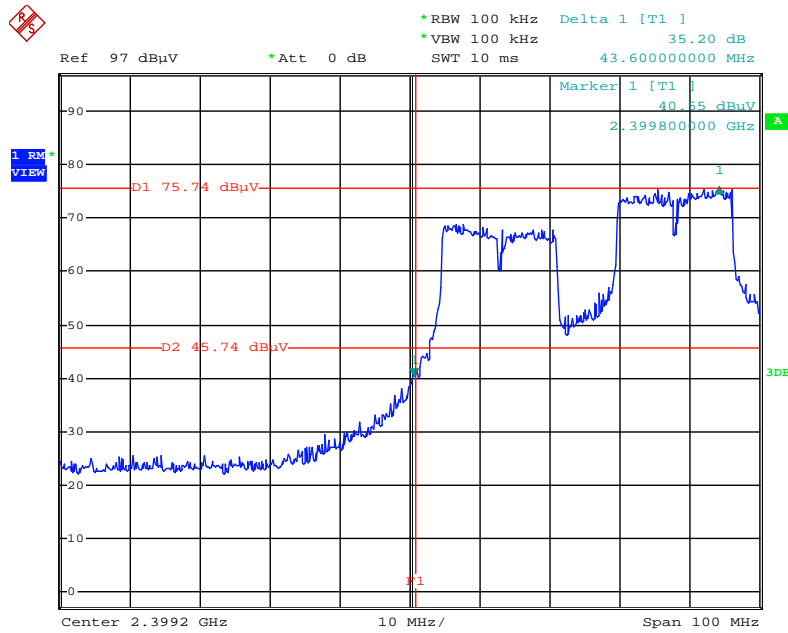


Date: 5.MAY.2012 09:55:28

Plot on Configuration IEEE 802.11g / Chain 1 / 2462 MHz (1TX)

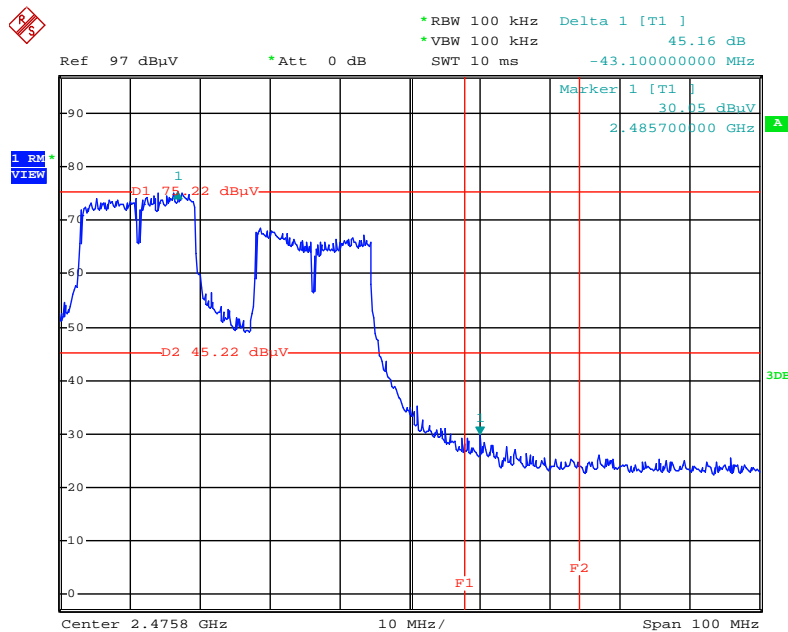


Date: 5.MAY.2012 09:47:02

Plot on Configuration IEEE 802.11g / Chain 1 + Chain 2 / 2412 MHz (2TX)

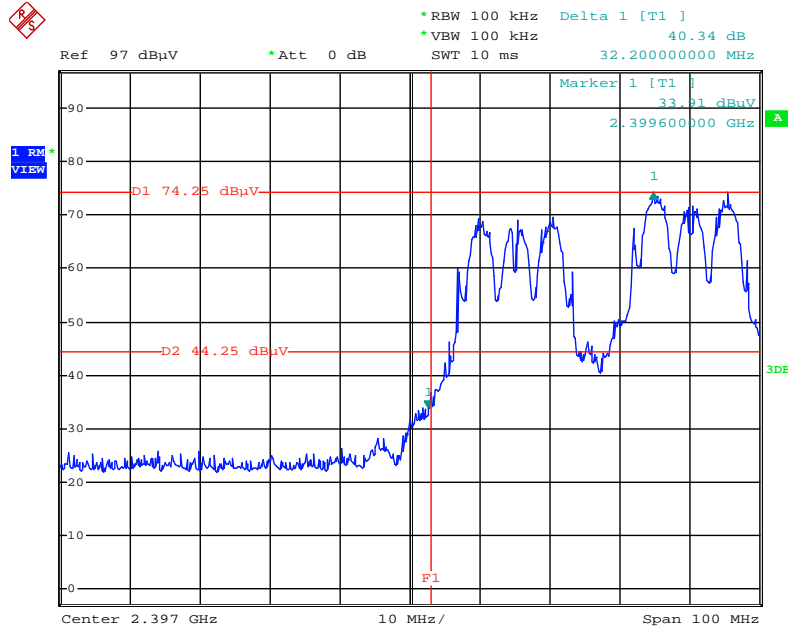


Date: 5.MAY.2012 13:11:49

Plot on Configuration IEEE 802.11g / Chain 1 + Chain 2 / 2462 MHz (2TX)

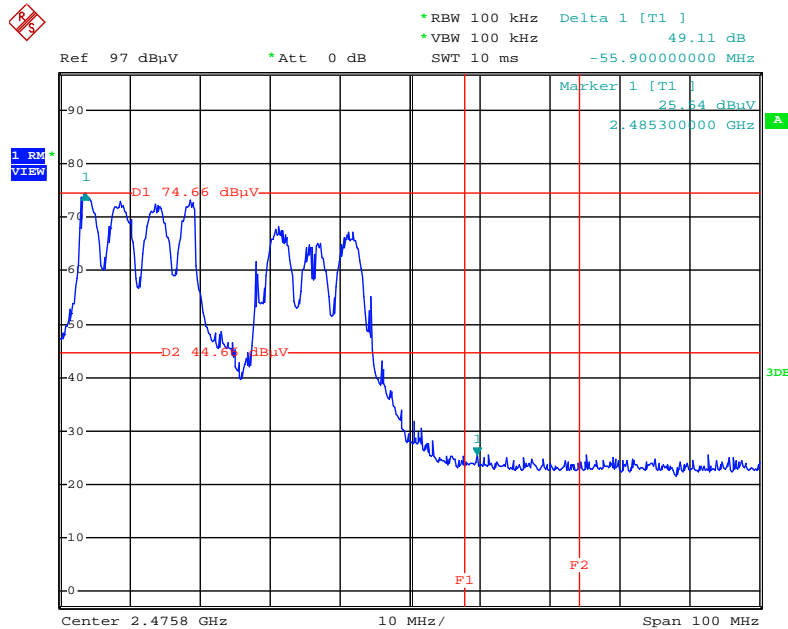


Date: 5.MAY.2012 13:07:56

Plot on Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3 / 2412 MHz (3TX)

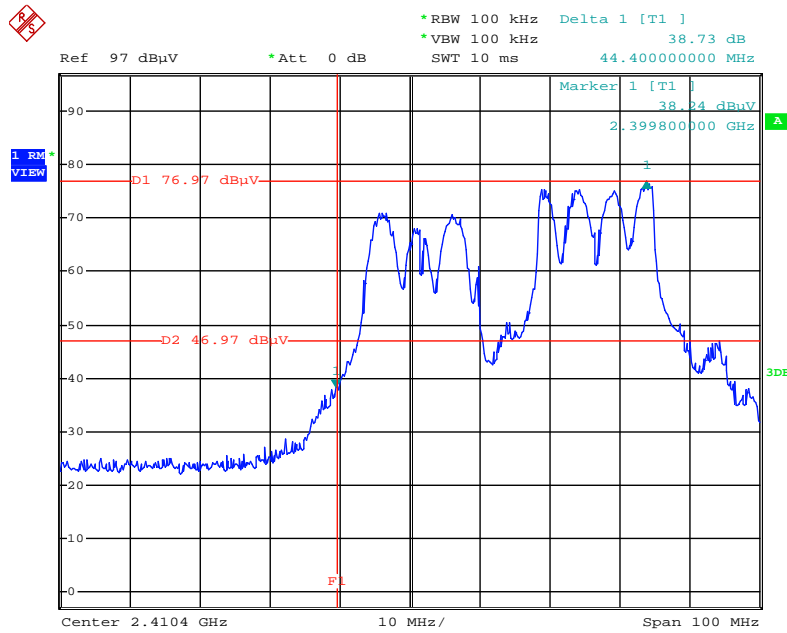

Date: 7.MAY.2012 13:13:01

Plot on Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3 / 2462 MHz (3TX)

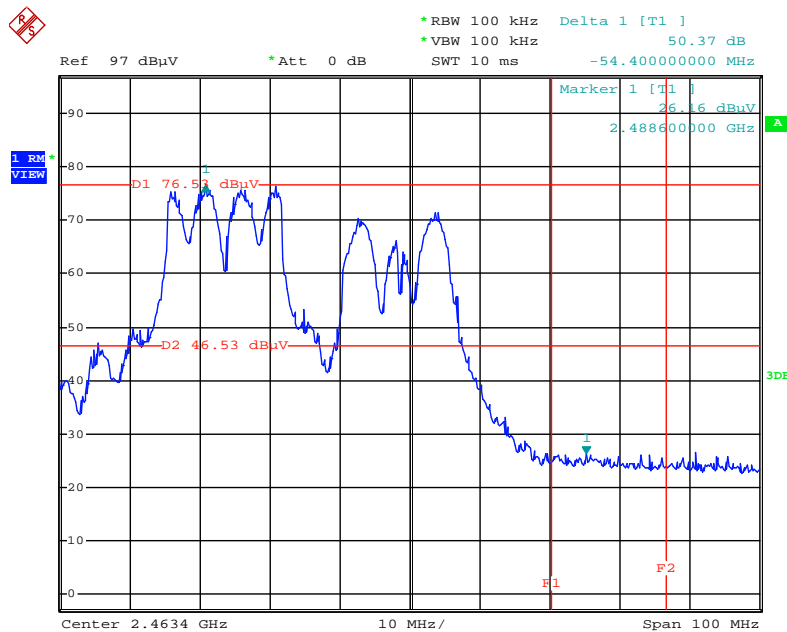


Date: 7.MAY.2012 13:11:14

Test Mode : Mode 6 (Ant. 6 Dipole antenna / 8dBi)


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 5745 MHz (1TX)

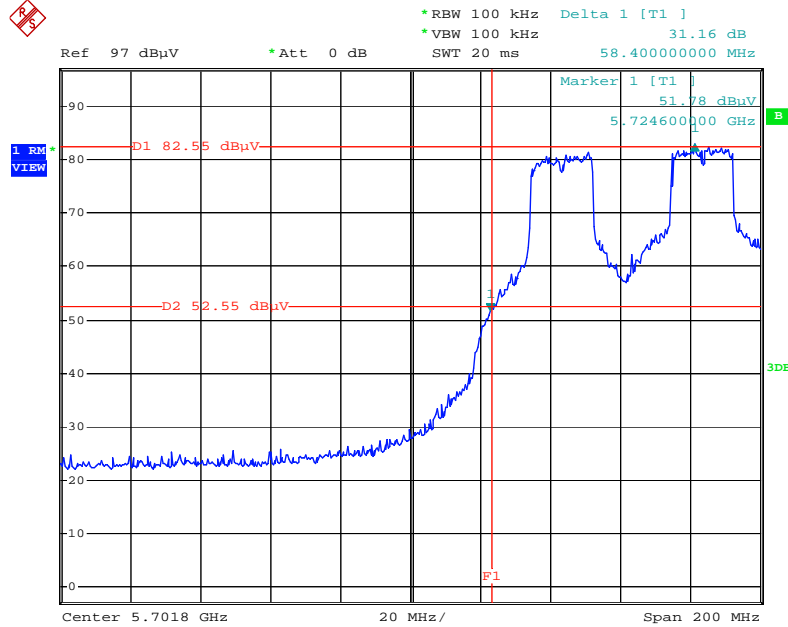


Date: 27.APR.2012 09:24:05

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1/ 5825 MHz (1TX)

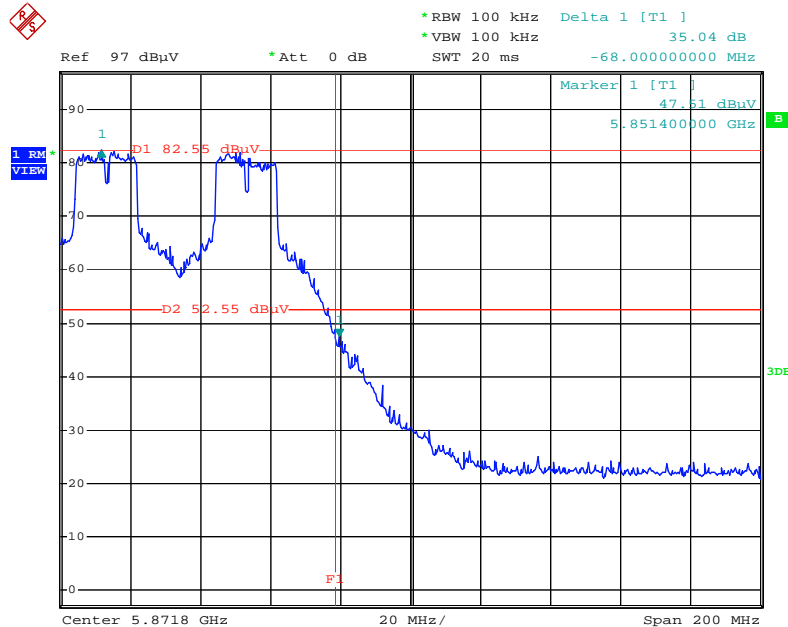


Date: 27.APR.2012 09:18:21

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 5745 MHz (2TX)

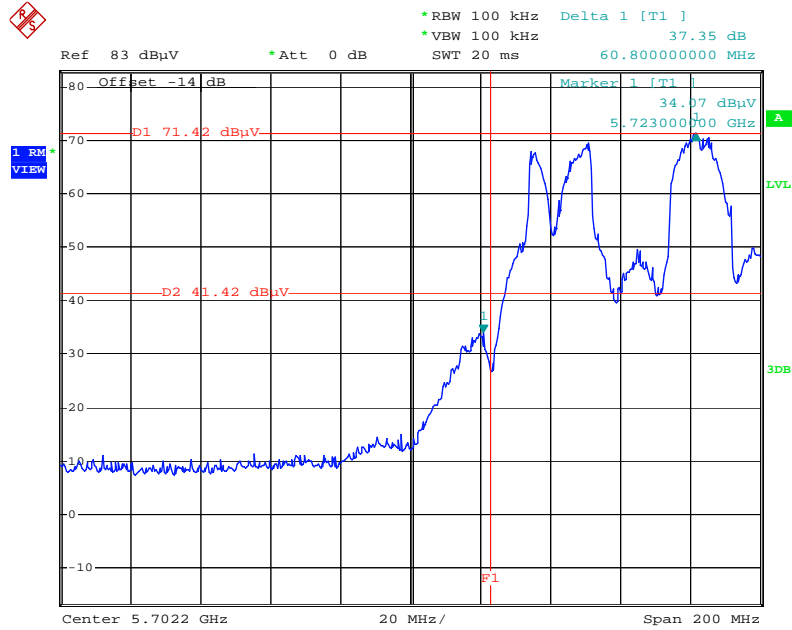


Date: 27.APR.2012 21:27:15

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1+ Chain 2/ 5785 MHz (2TX)

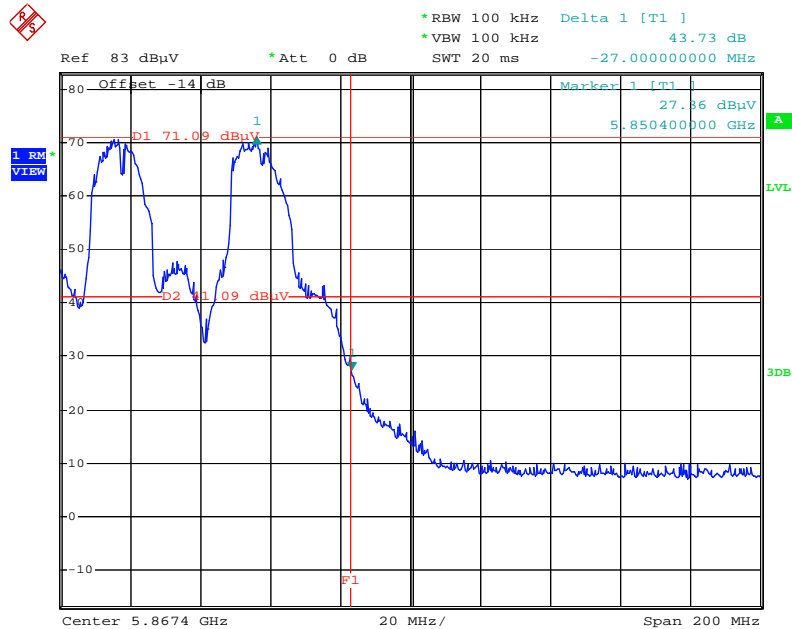


Date: 27.APR.2012 21:33:21

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2/ 5745MHz (2TX)

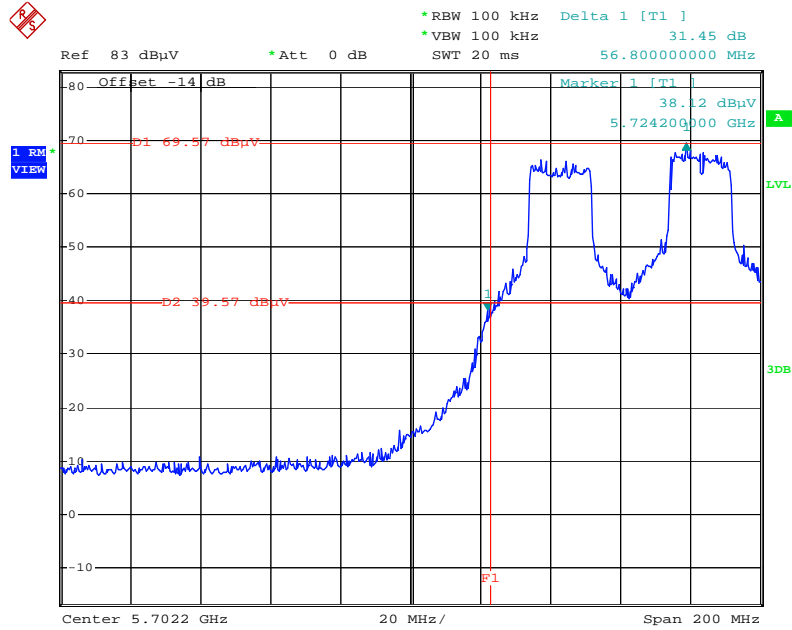


Date: 27.APR.2012 21:14:08

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2/ 5785 MHz (2TX)

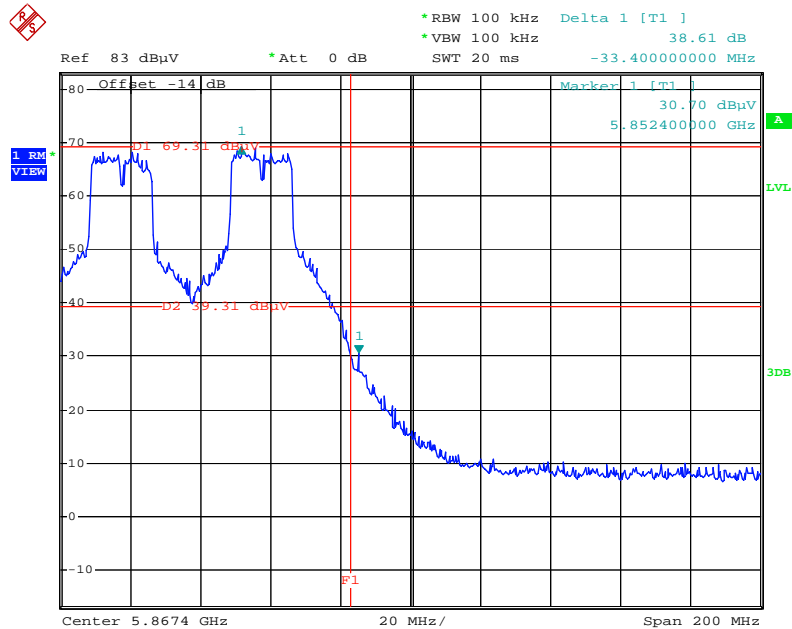


Date: 27.APR.2012 21:35:22

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)

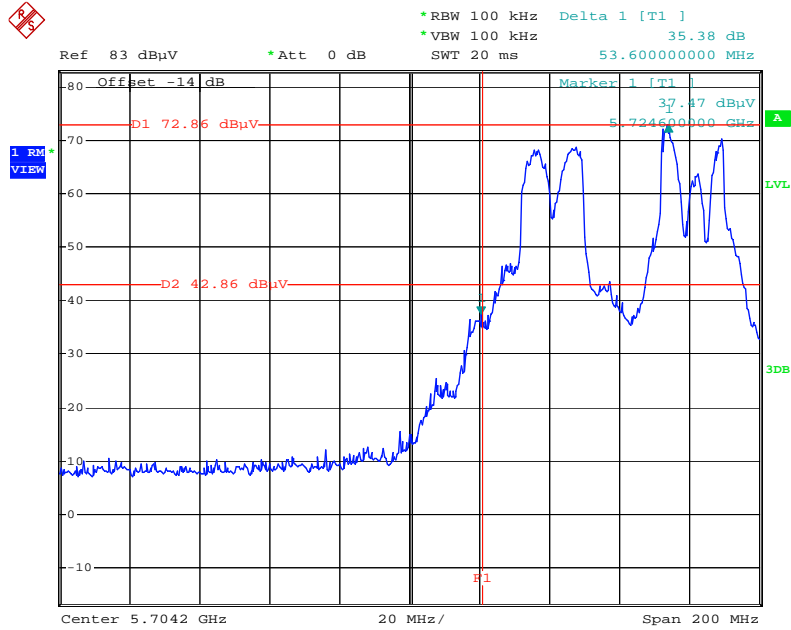


Date: 28.APR.2012 01:29:09

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

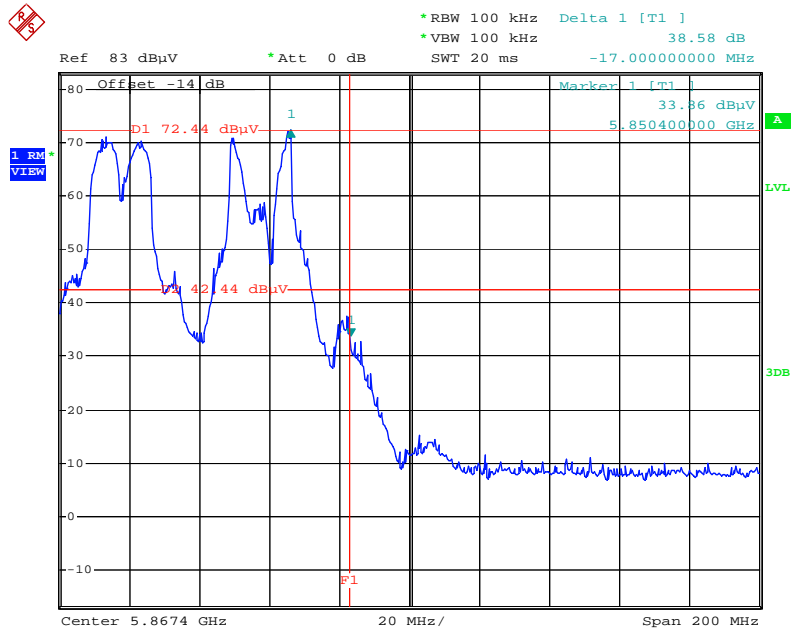


Date: 28.APR.2012 01:30:39

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)

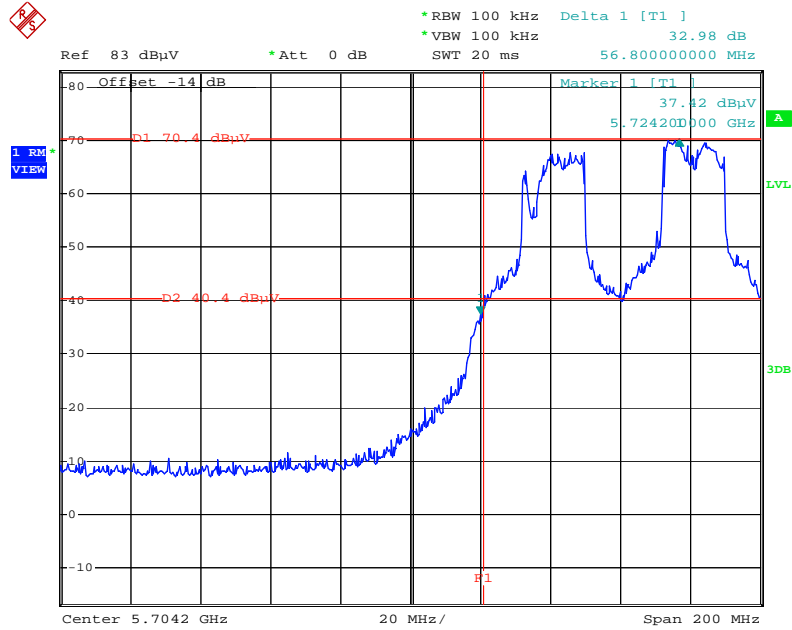


Date: 28.APR.2012 01:27:58

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

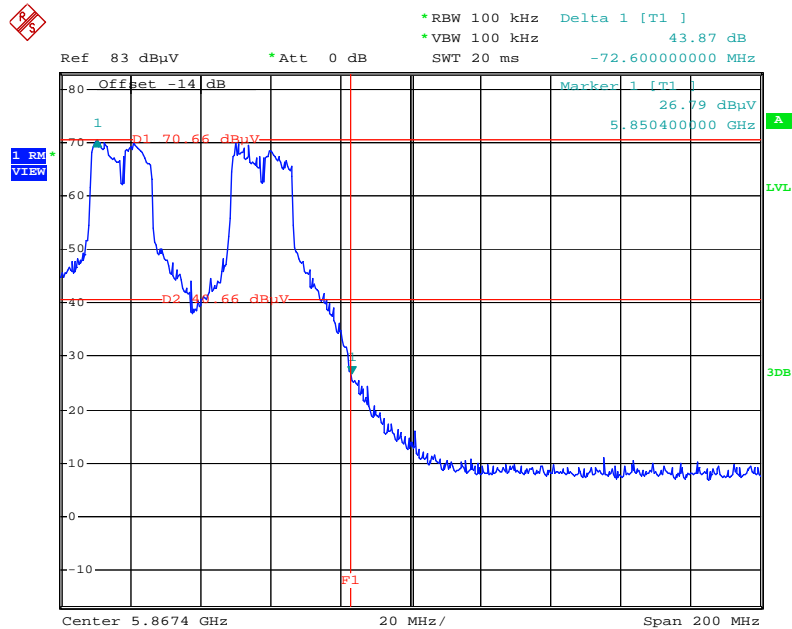


Date: 28.APR.2012 01:32:20

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5755 MHz (1TX)

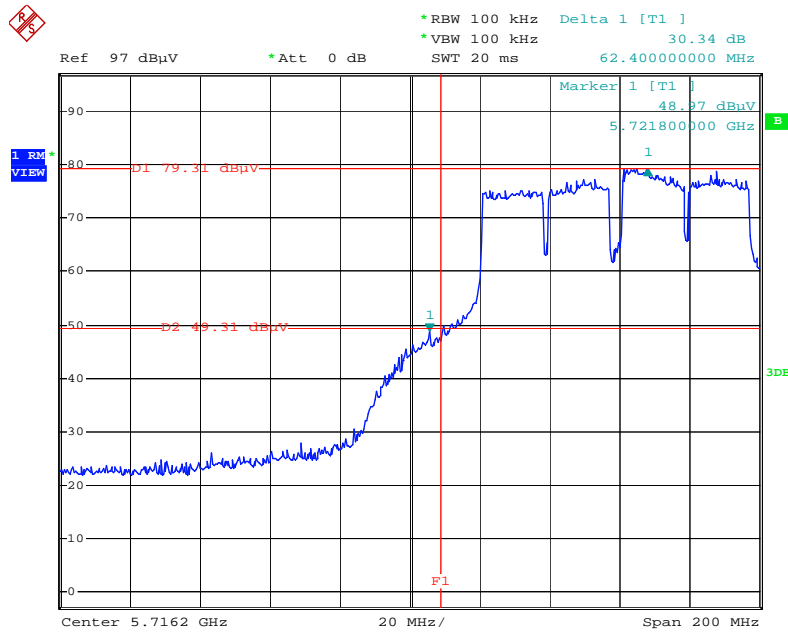


Date: 27.APR.2012 09:52:30

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5795 MHz (1TX)

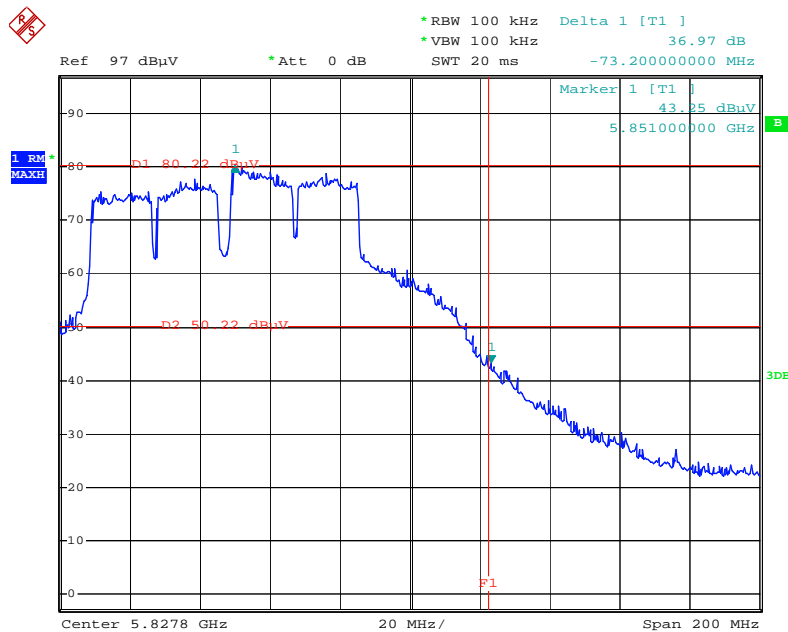


Date: 27.APR.2012 09:54:11

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

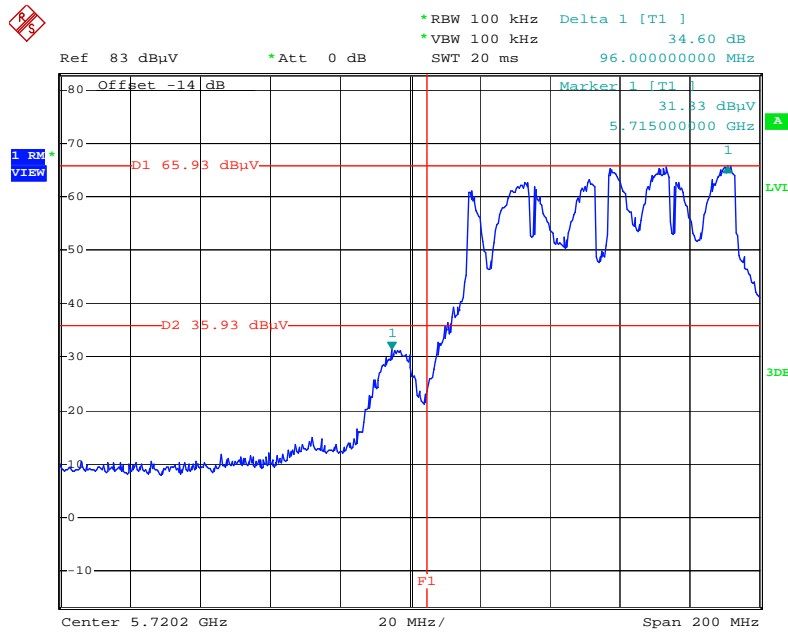


Date: 27.APR.2012 21:07:42

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

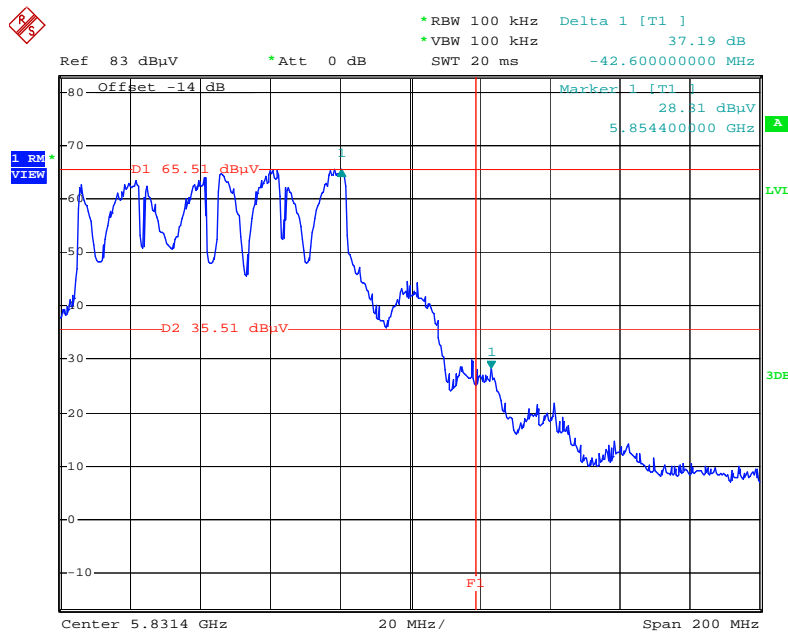


Date: 27.APR.2012 21:37:19

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

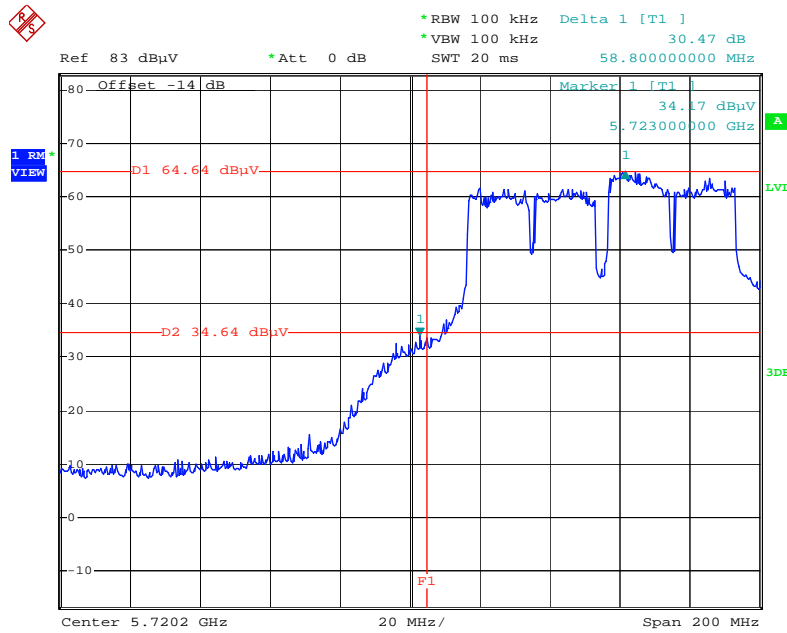


Date: 27.APR.2012 21:04:09

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

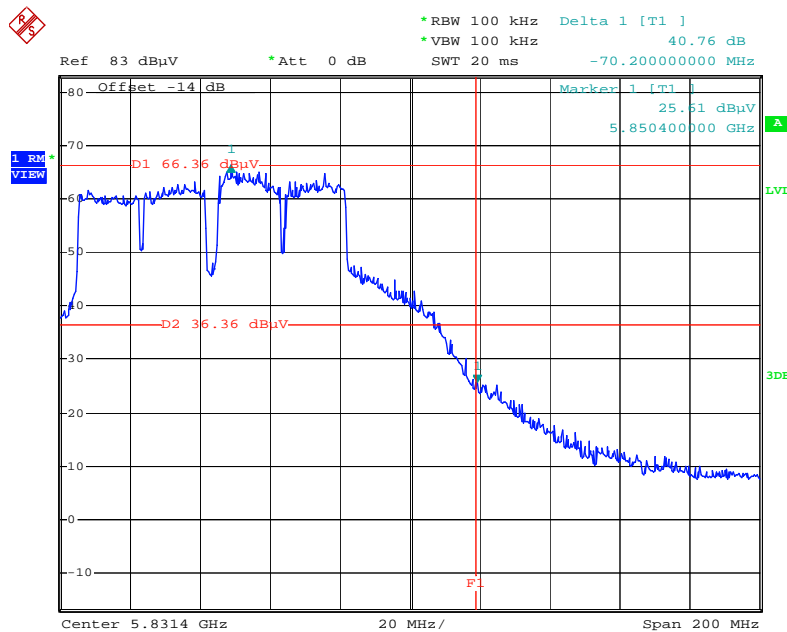


Date: 27.APR.2012 21:38:45

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

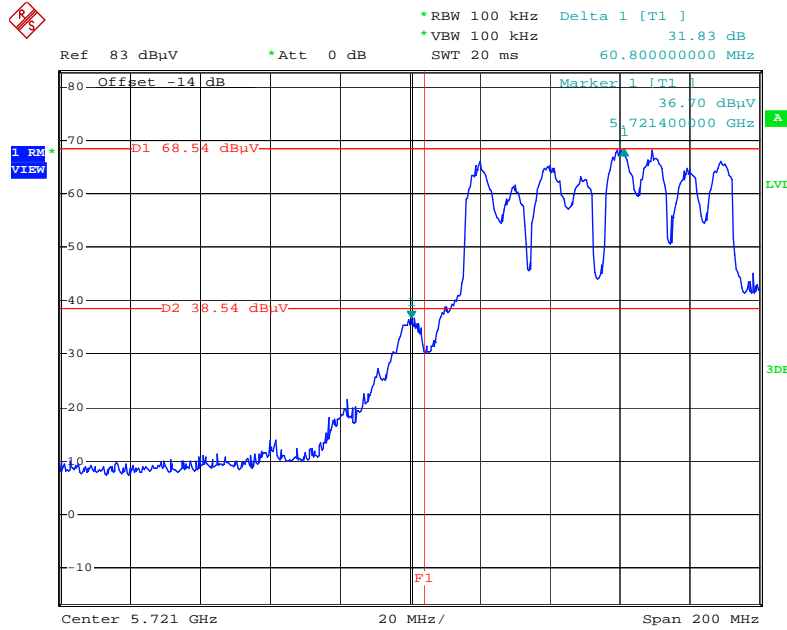


Date: 28.APR.2012 01:26:13

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

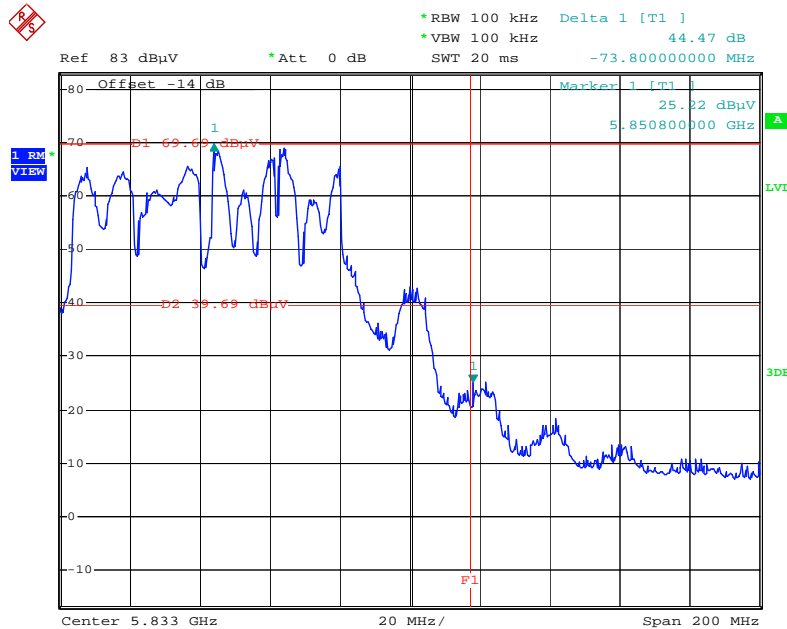


Date: 28.APR.2012 01:34:29

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

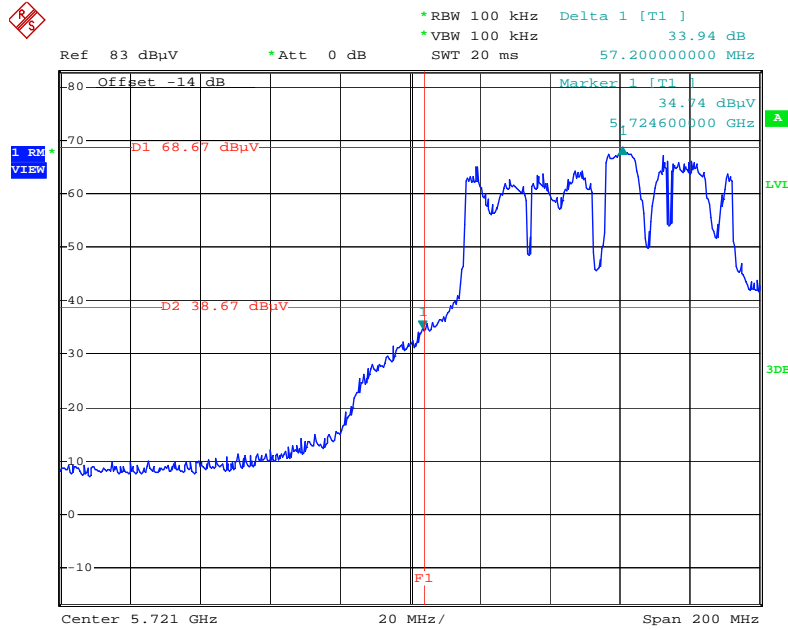

Date: 28.APR.2012 01:24:33

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

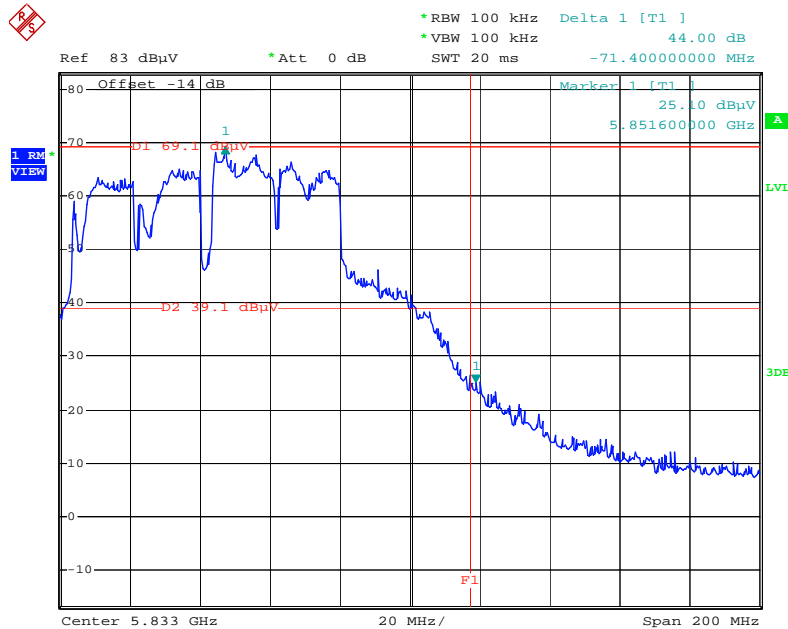


Date: 28.APR.2012 01:35:50

Test Mode : Mode 7 (Ant. 7 Patch antenna / 2.3dBi)


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 5745 MHz (1TX)

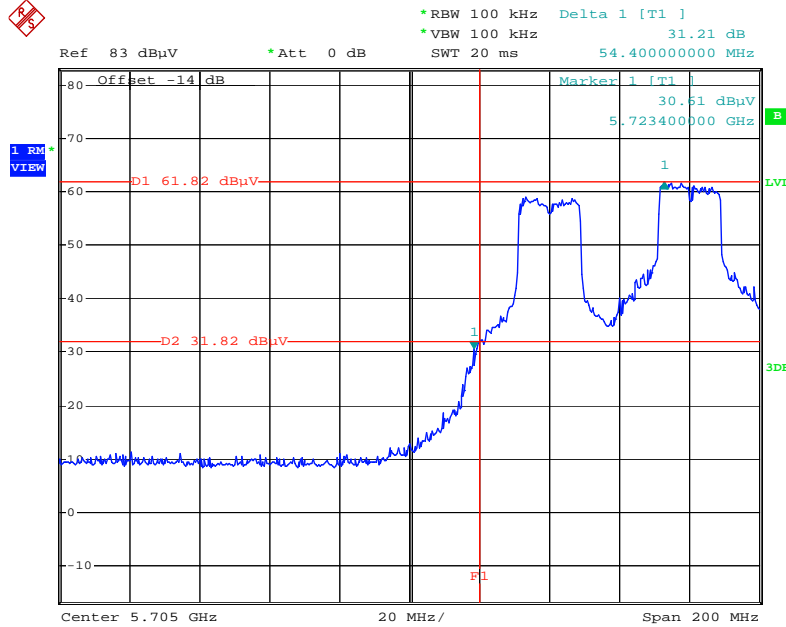


Date: 21.APR.2012 16:54:02

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1/ 5825 MHz (1TX)

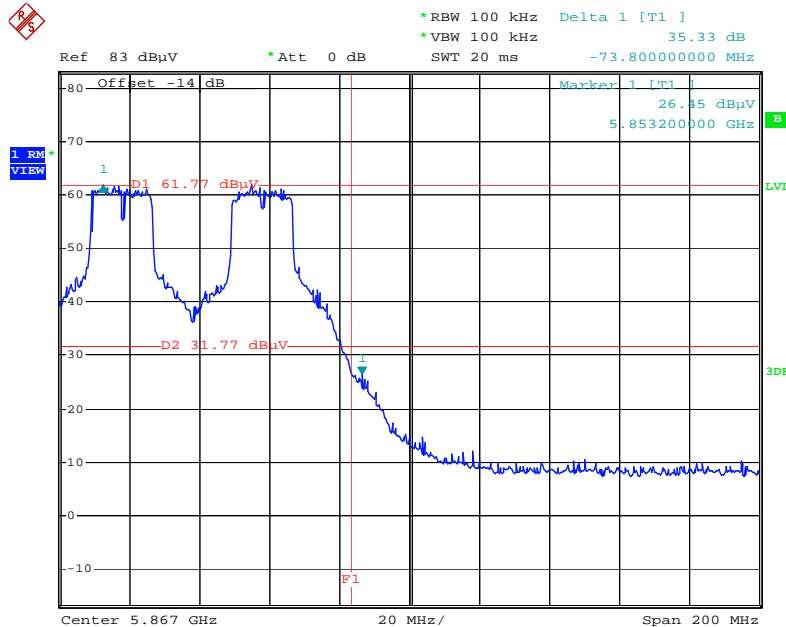


Date: 21.APR.2012 16:50:41

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 5745 MHz (2TX)

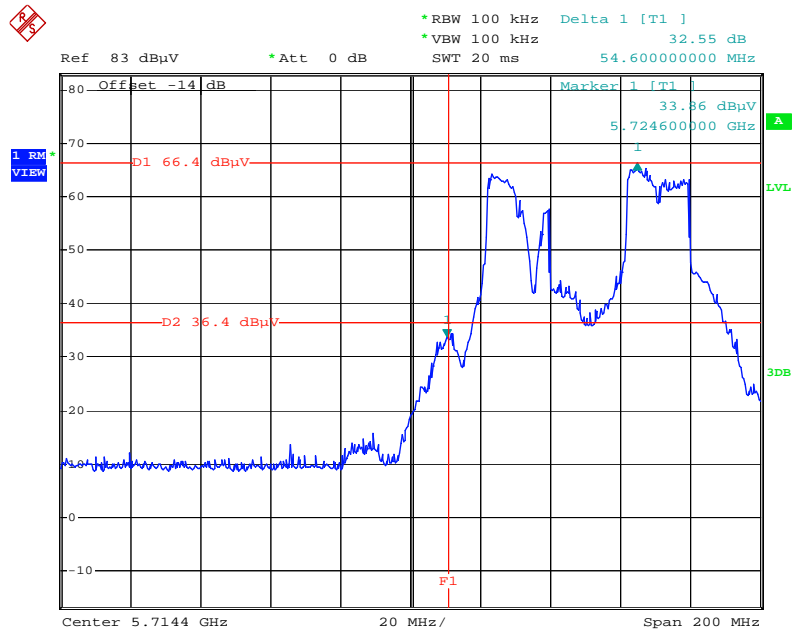


Date: 23.APR.2012 23:08:46

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1+ Chain 2/ 5785 MHz (2TX)

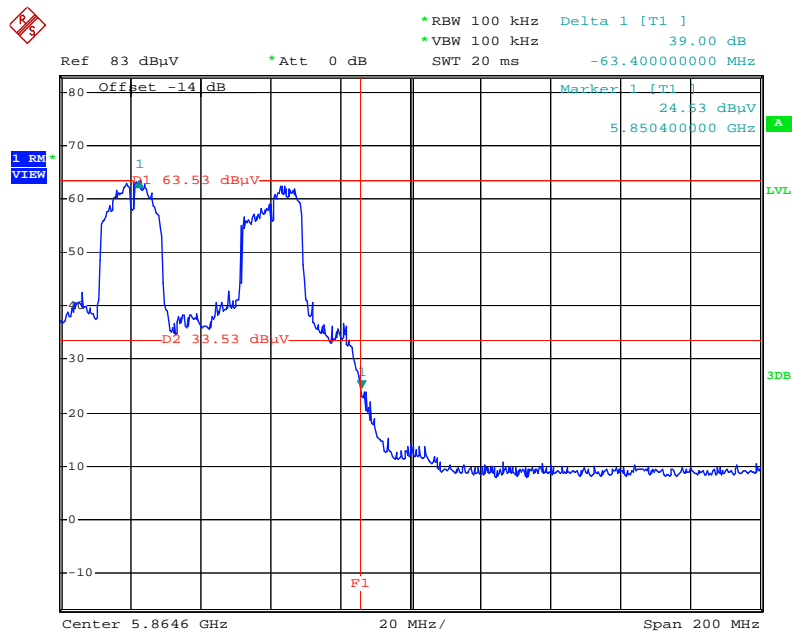


Date: 24.APR.2012 00:12:24

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2/ 5745MHz (2TX)

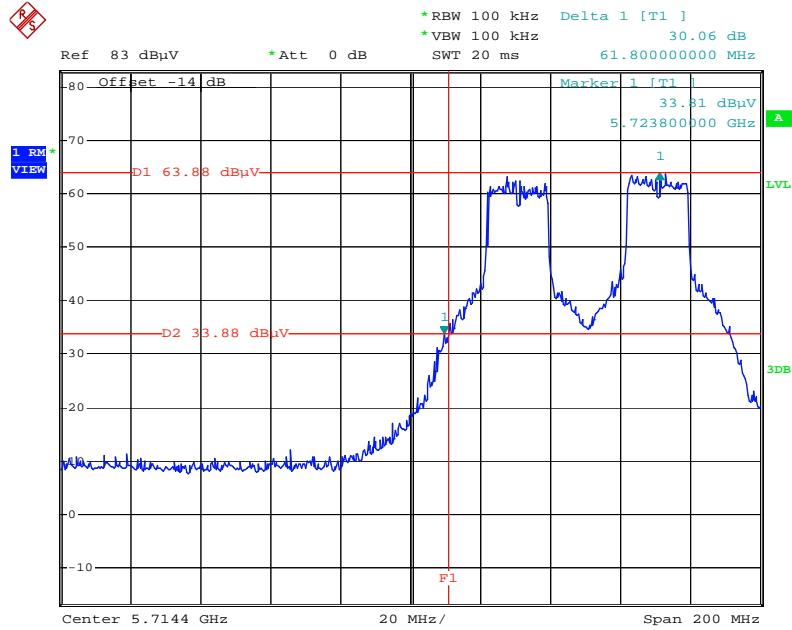


Date: 23.APR.2012 23:10:49

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1+ Chain 2/ 5785 MHz (2TX)

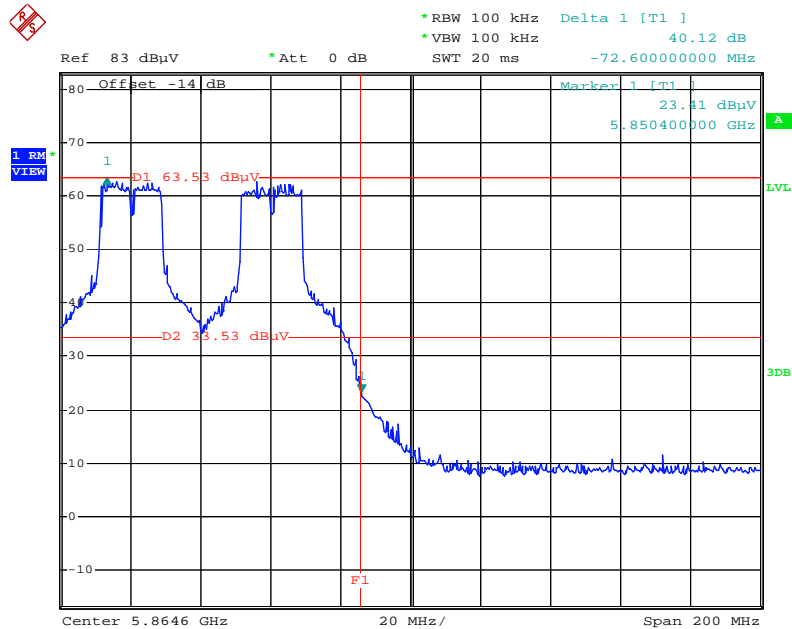


Date: 24.APR.2012 00:16:27

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5755 MHz (1TX)

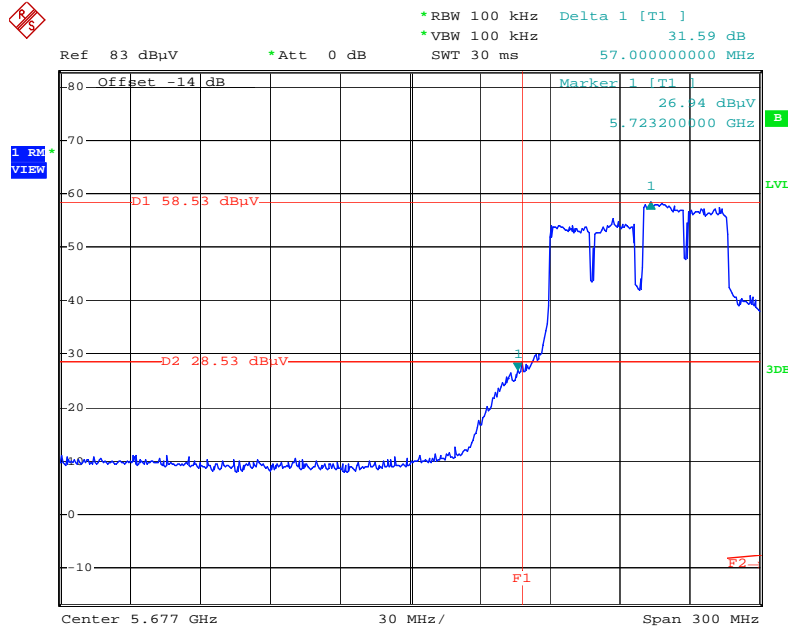


Date: 21.APR.2012 17:14:04

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5795 MHz (1TX)

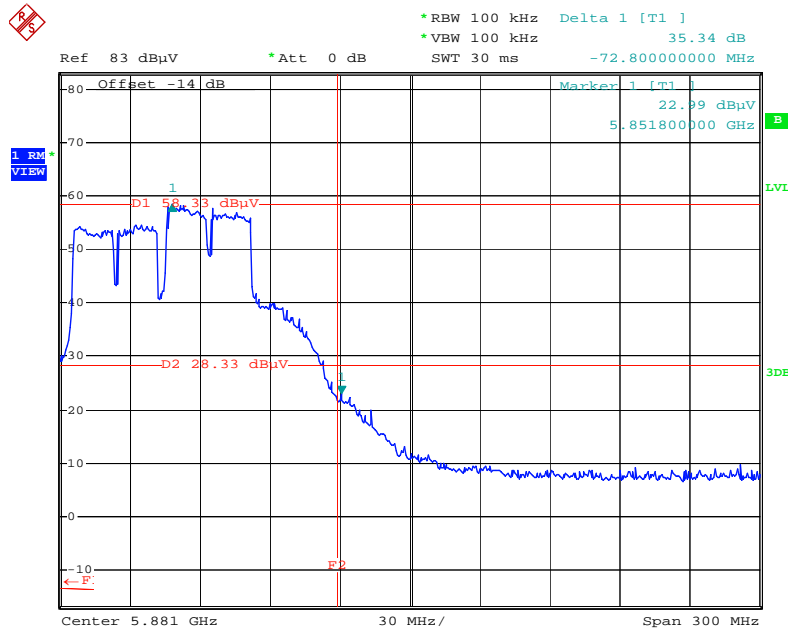


Date: 21.APR.2012 17:16:00

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

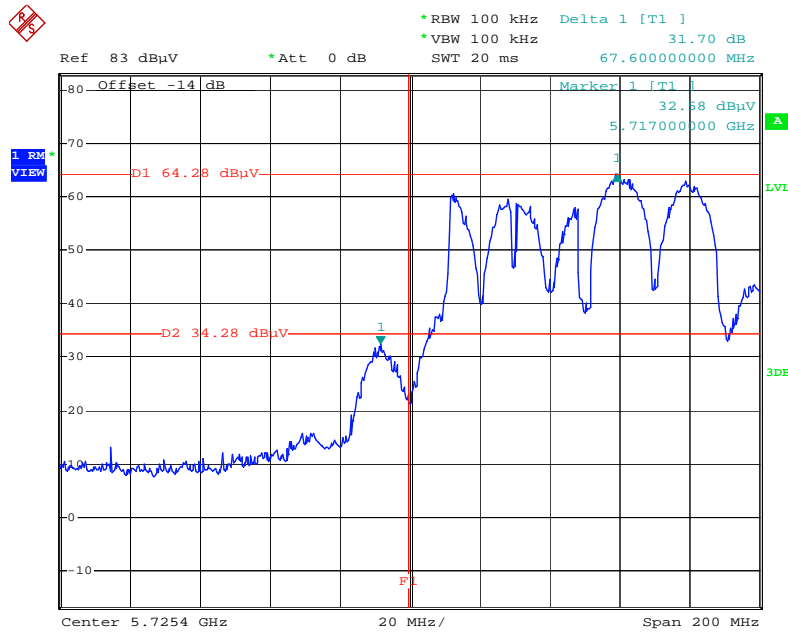


Date: 23.APR.2012 23:52:33

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

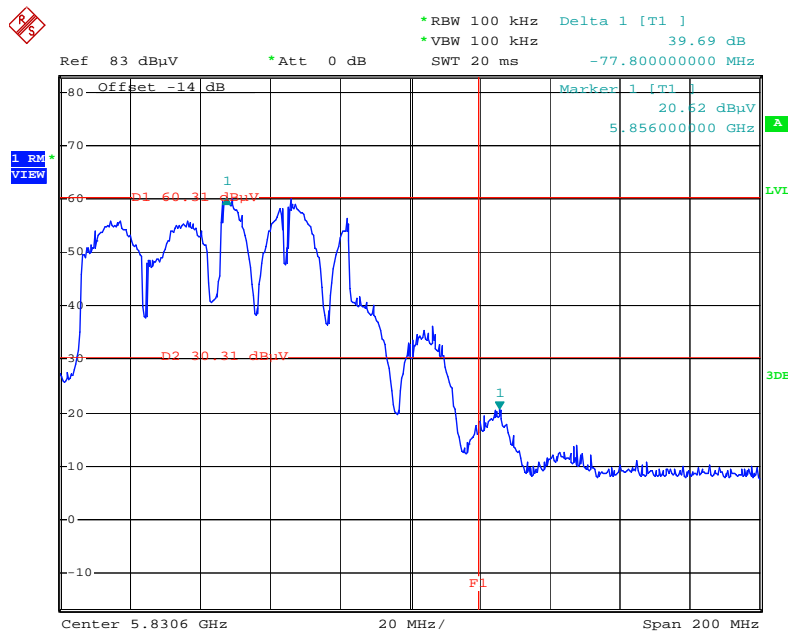


Date: 24.APR.2012 00:20:19

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

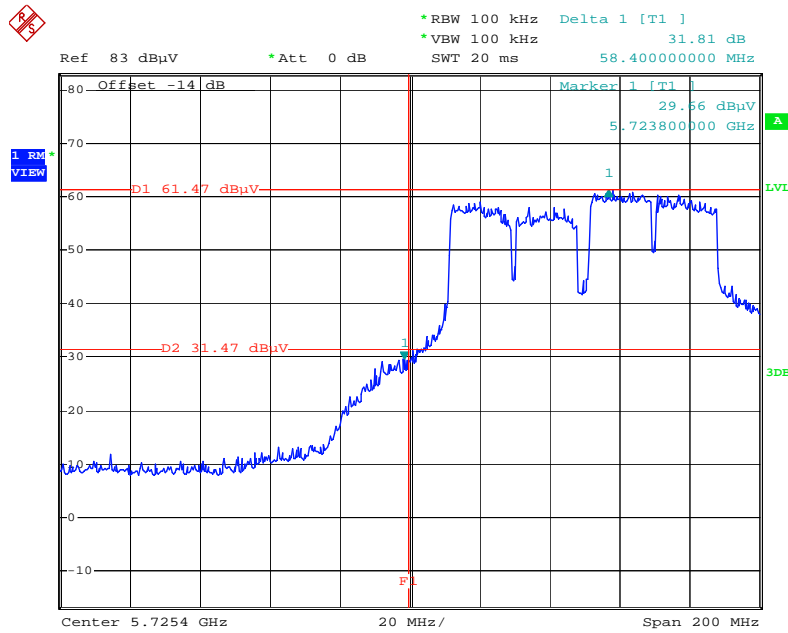


Date: 23.APR.2012 23:54:46

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

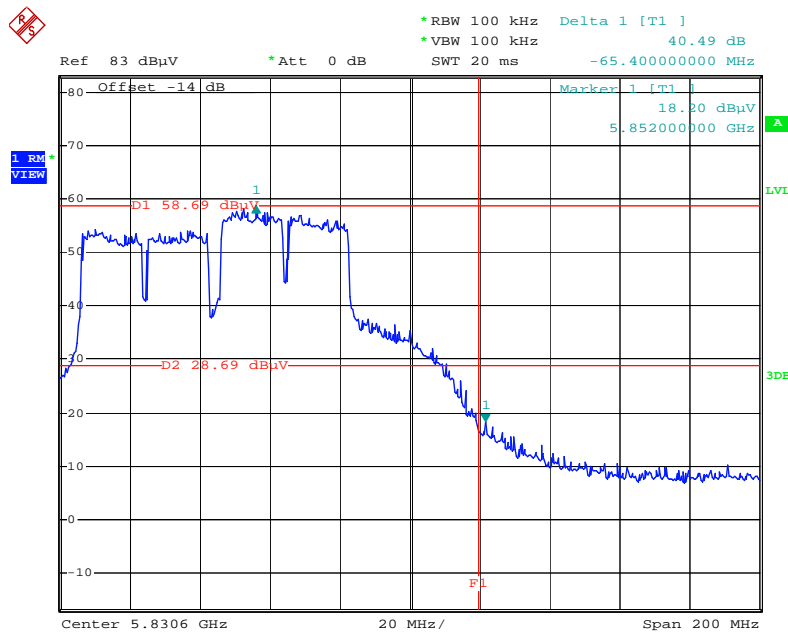


Date: 24.APR.2012 00:23:21

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

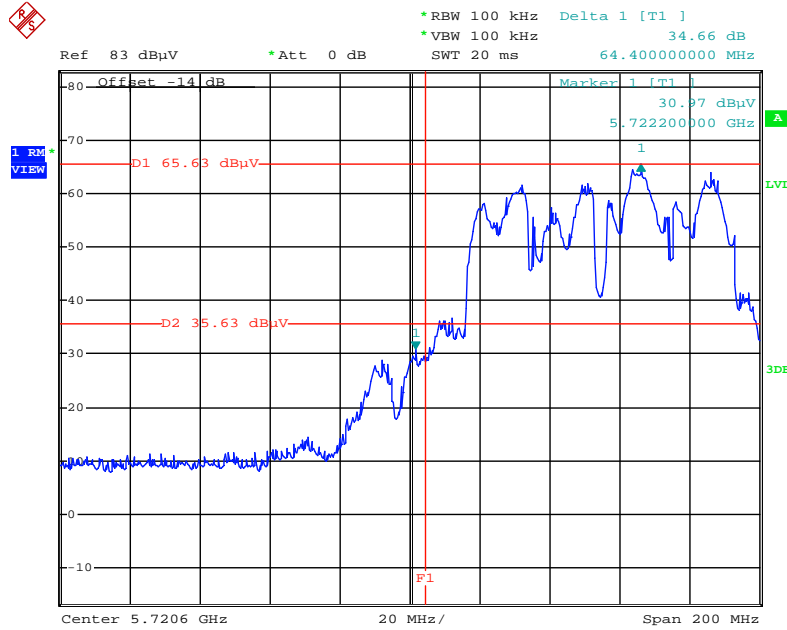


Date: 25.APR.2012 04:11:23

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

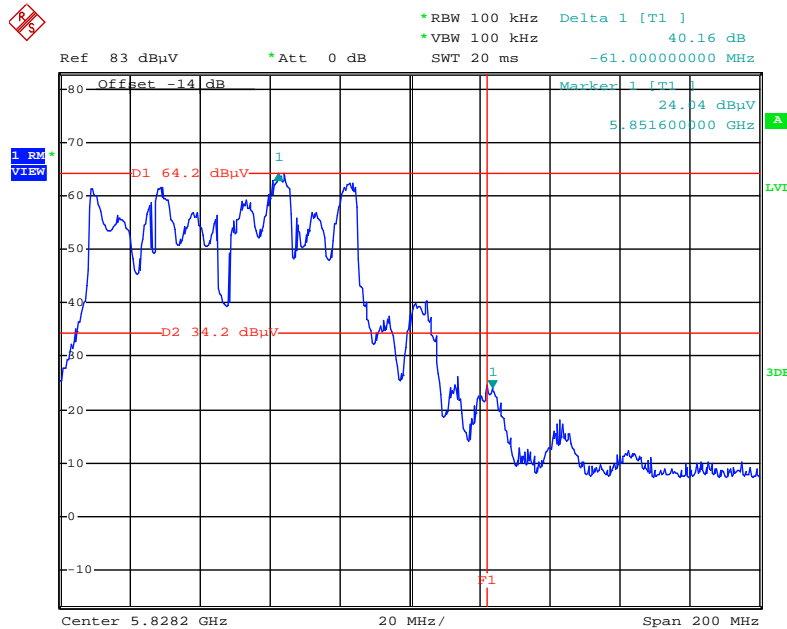


Date: 25.APR.2012 04:17:23

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

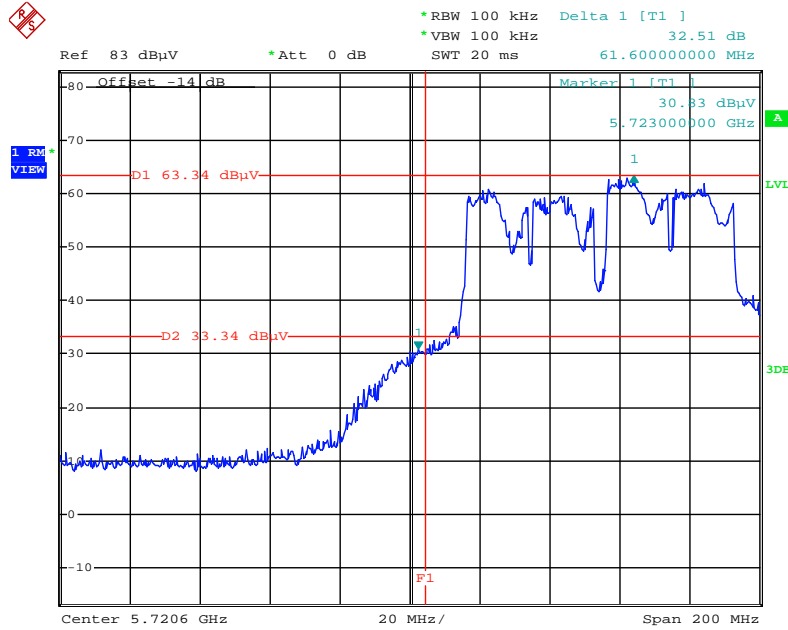

Date: 25.APR.2012 04:13:37

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

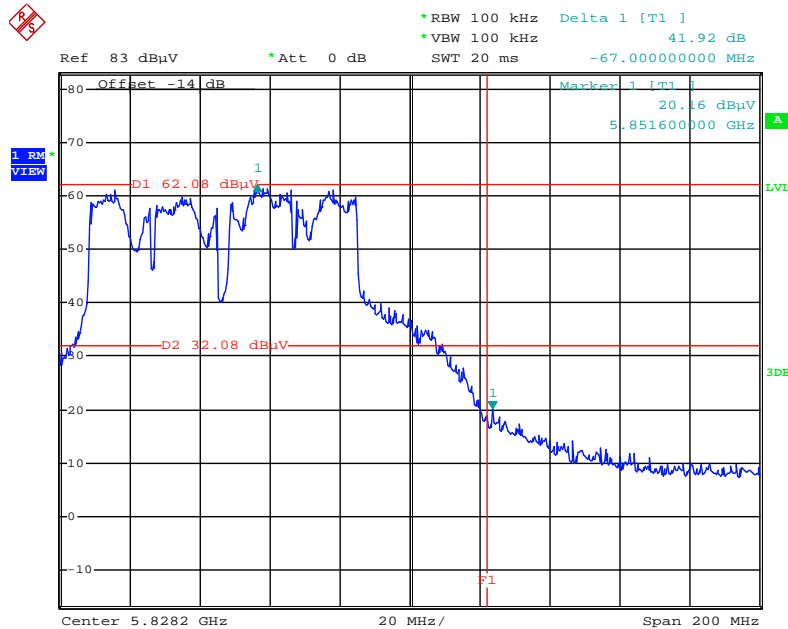


Date: 25.APR.2012 04:15:28


Test Mode : Mode 8 (Ant. 8 Panel antenna / 10.5dBi)

For Emission not in Restricted Band


Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 5745 MHz (1TX)

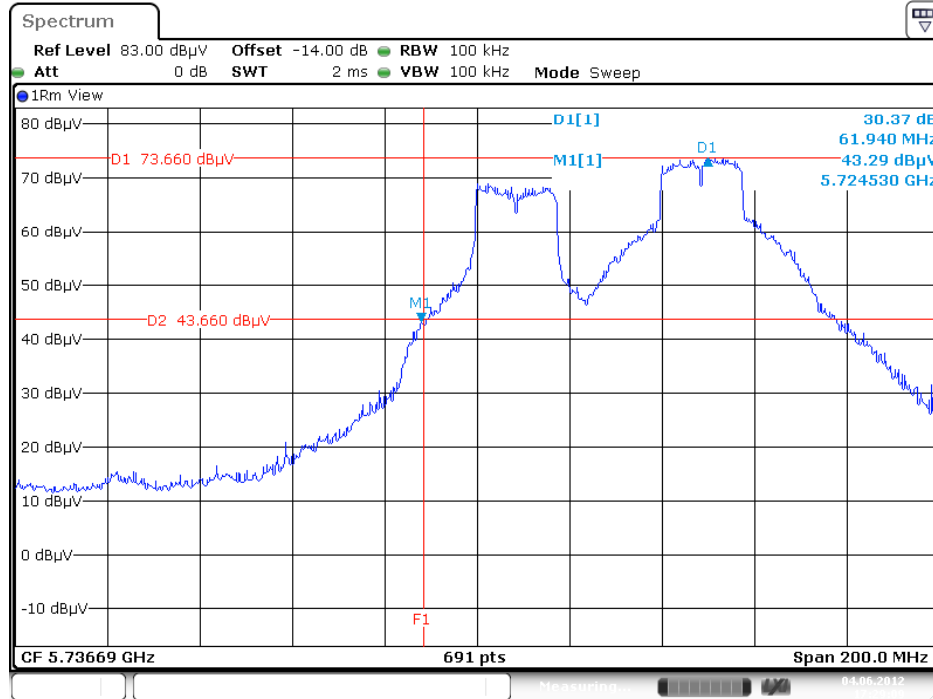


Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 5825 MHz (1TX)

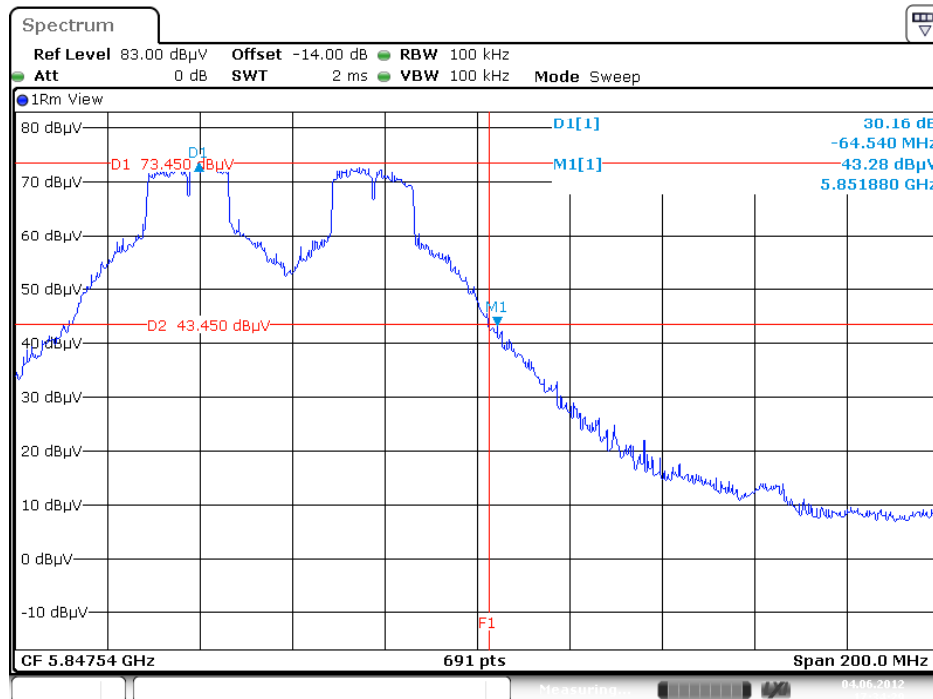


Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 5745 MHz (2TX)

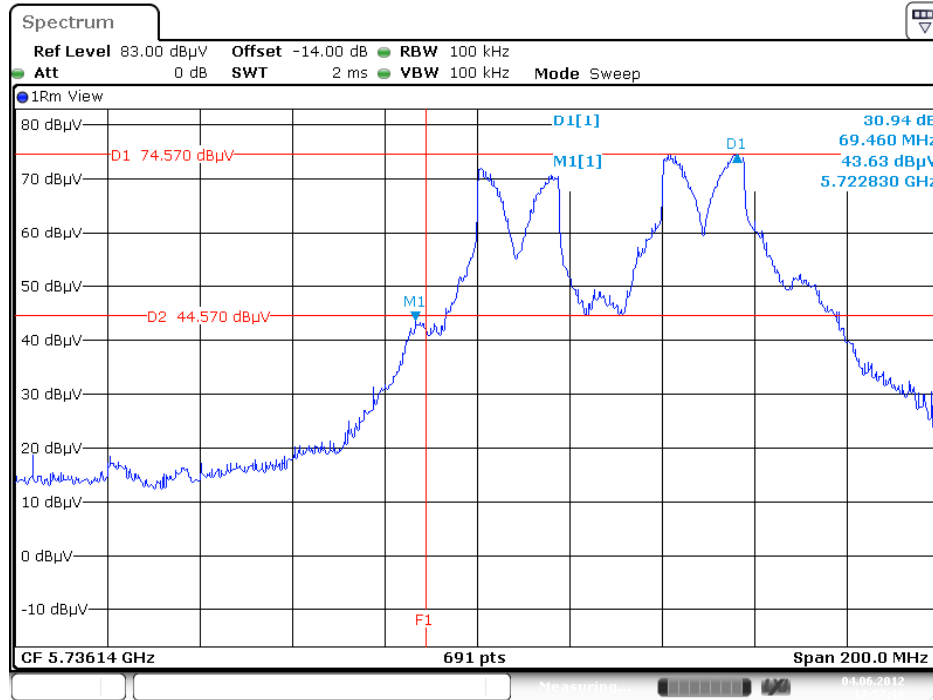


Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 5785 MHz (2TX)

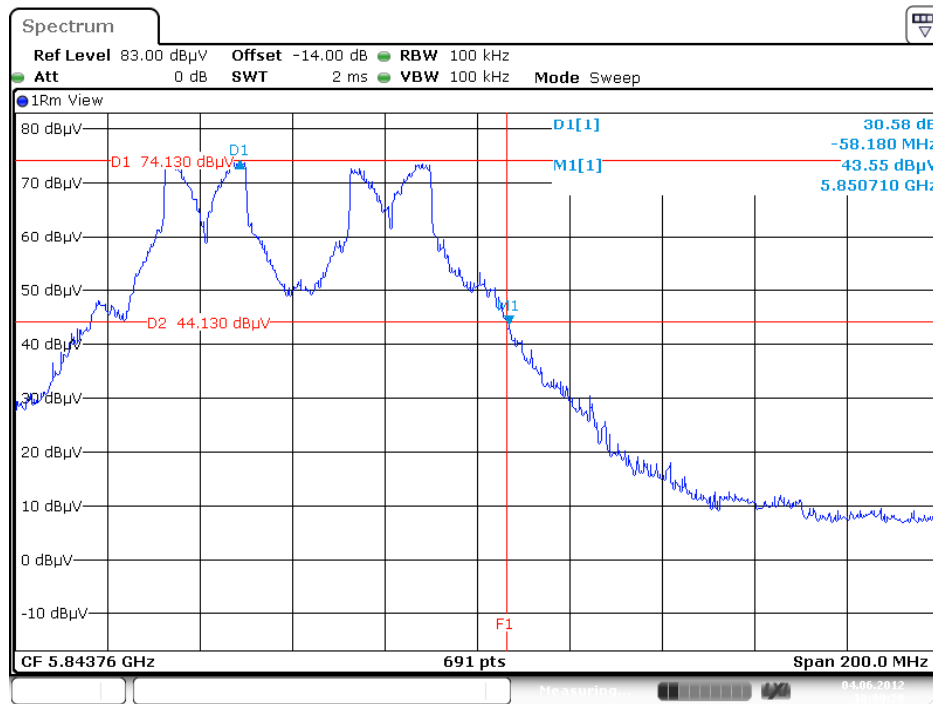

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 / 5745MHz (2TX)

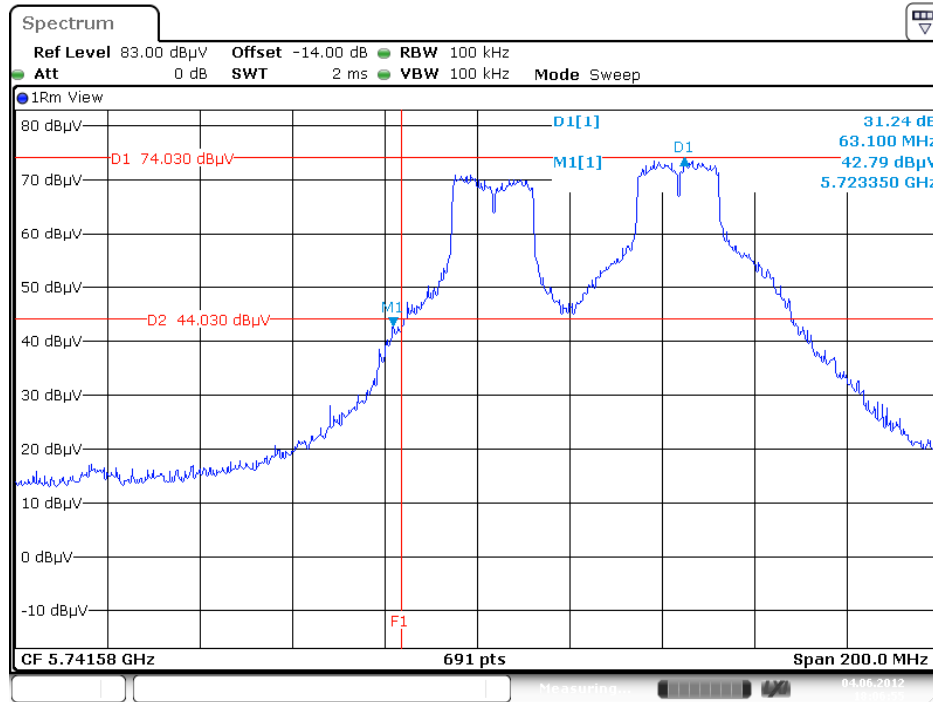


Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 / 5785 MHz (2TX)

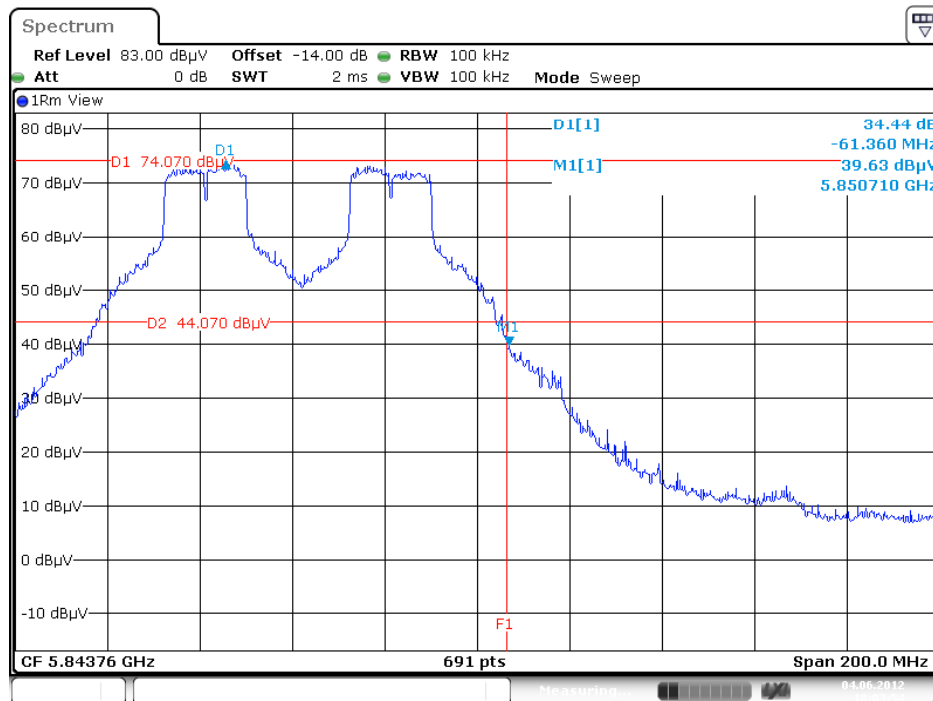


Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)




Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

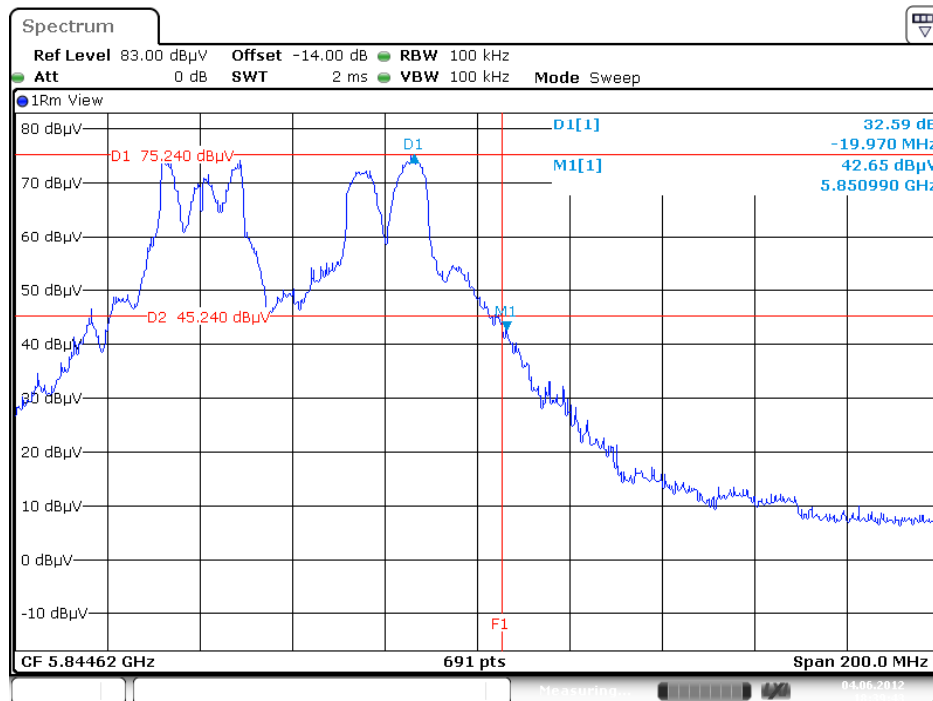


Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)

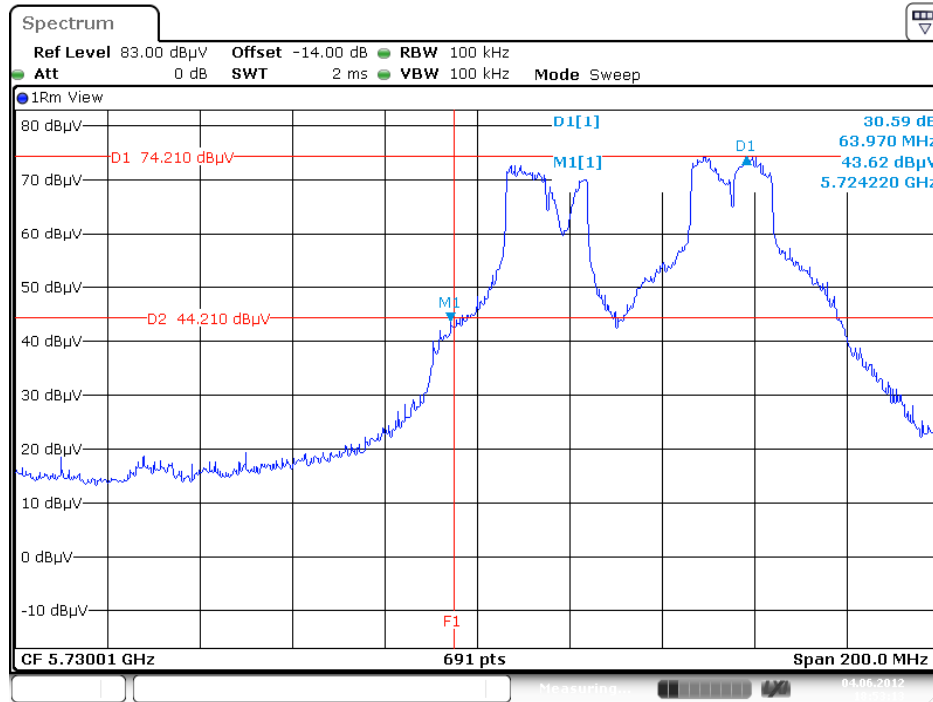


Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

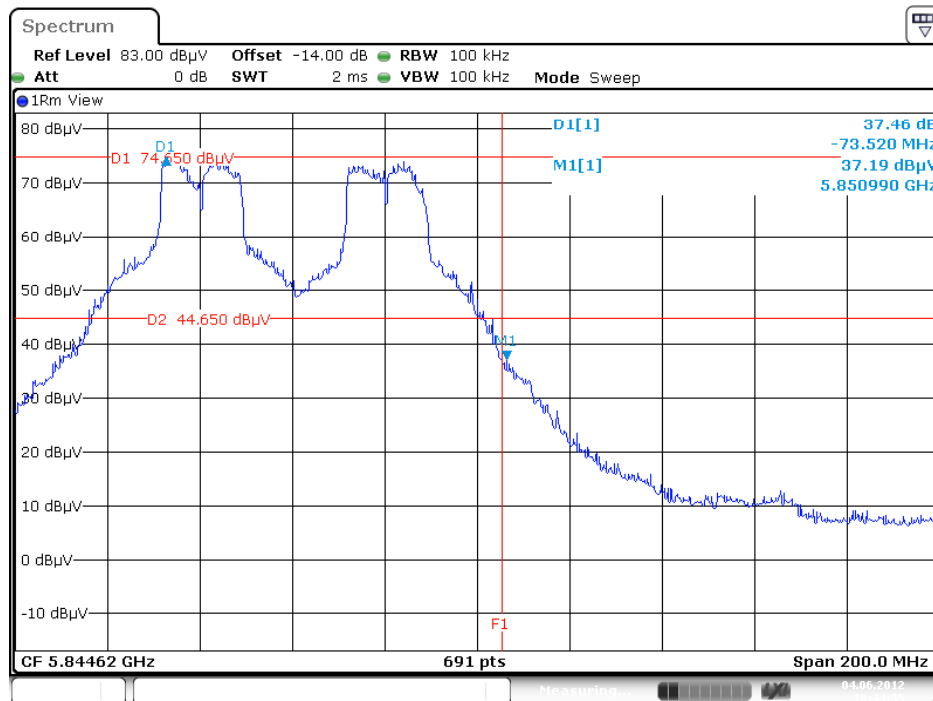


Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5755 MHz (1TX)

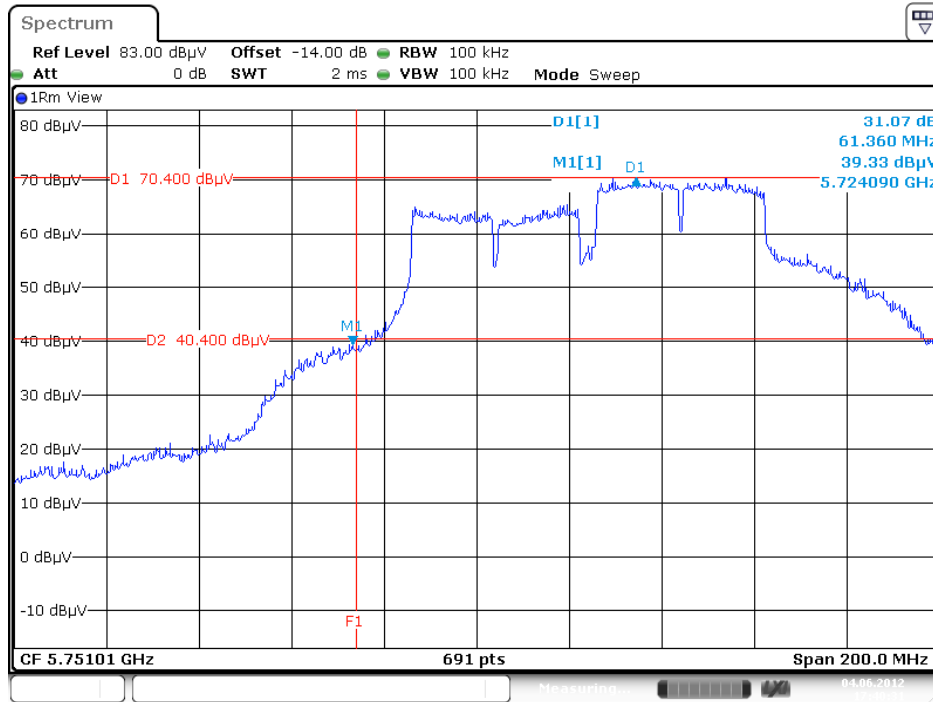


Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5795 MHz (1TX)

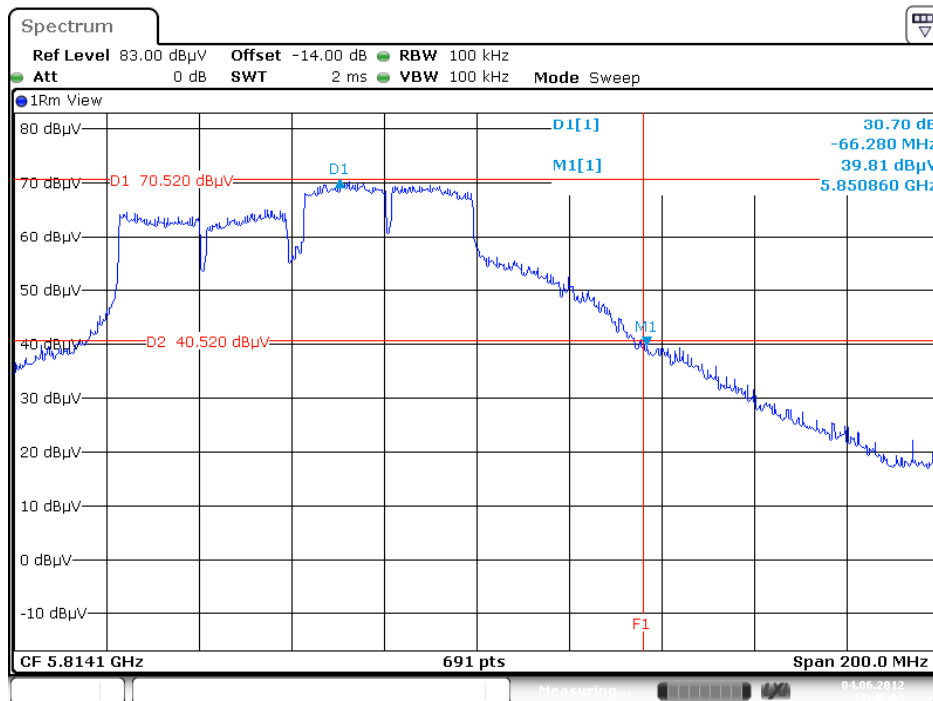


Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5755 MHz (2TX)

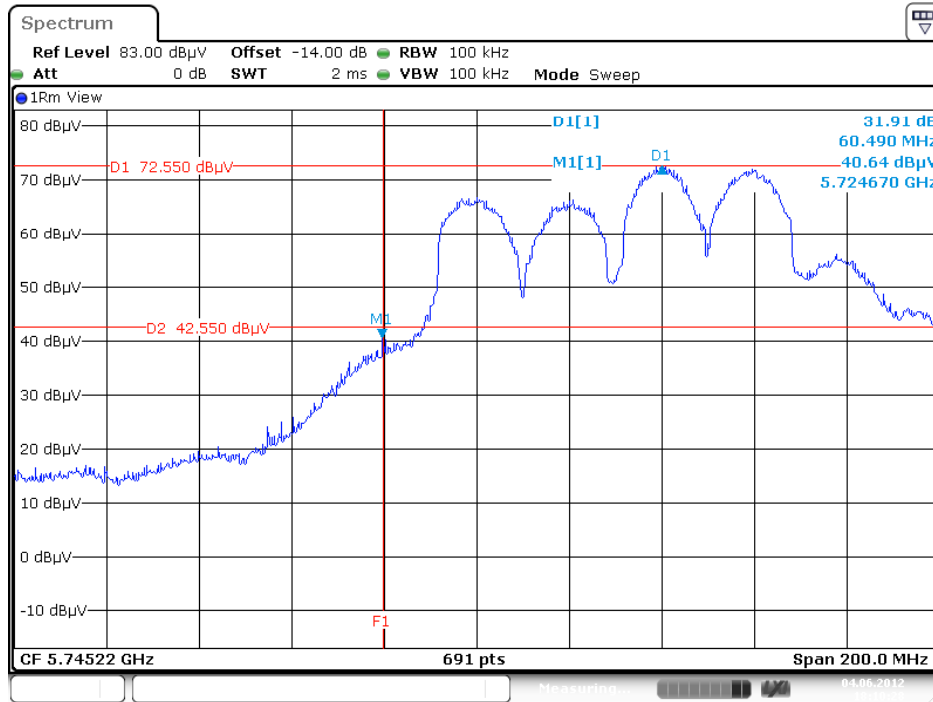


Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 / 5795 MHz (2TX)

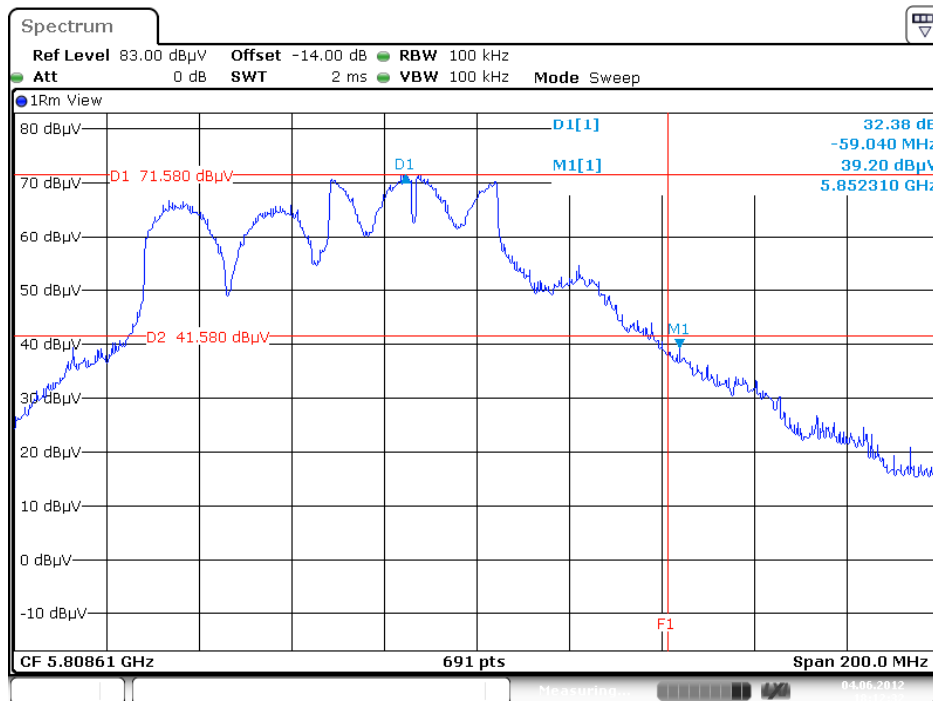


Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

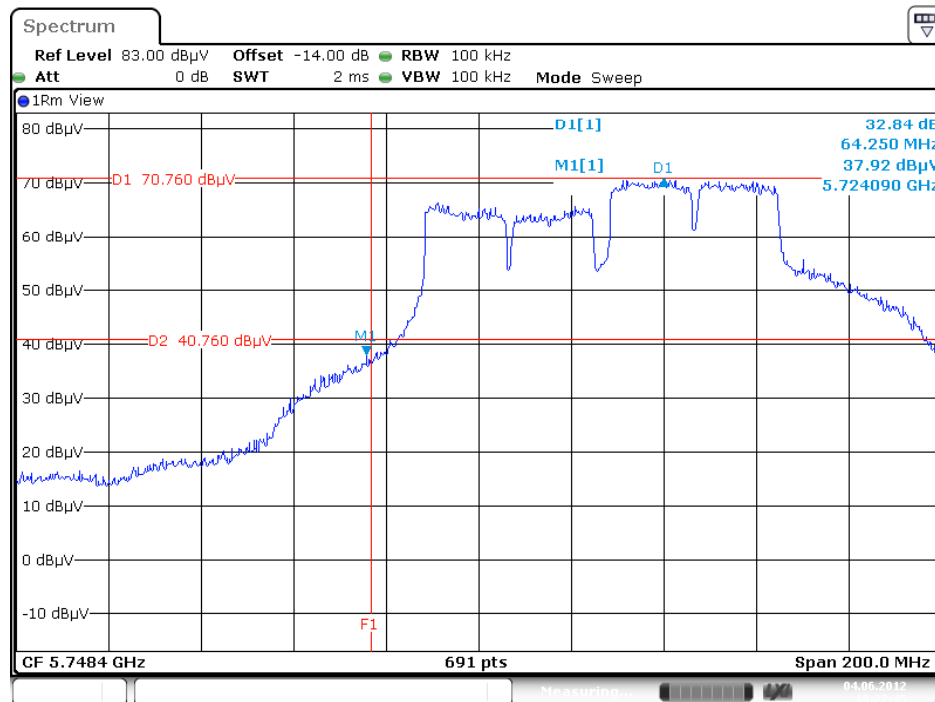

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

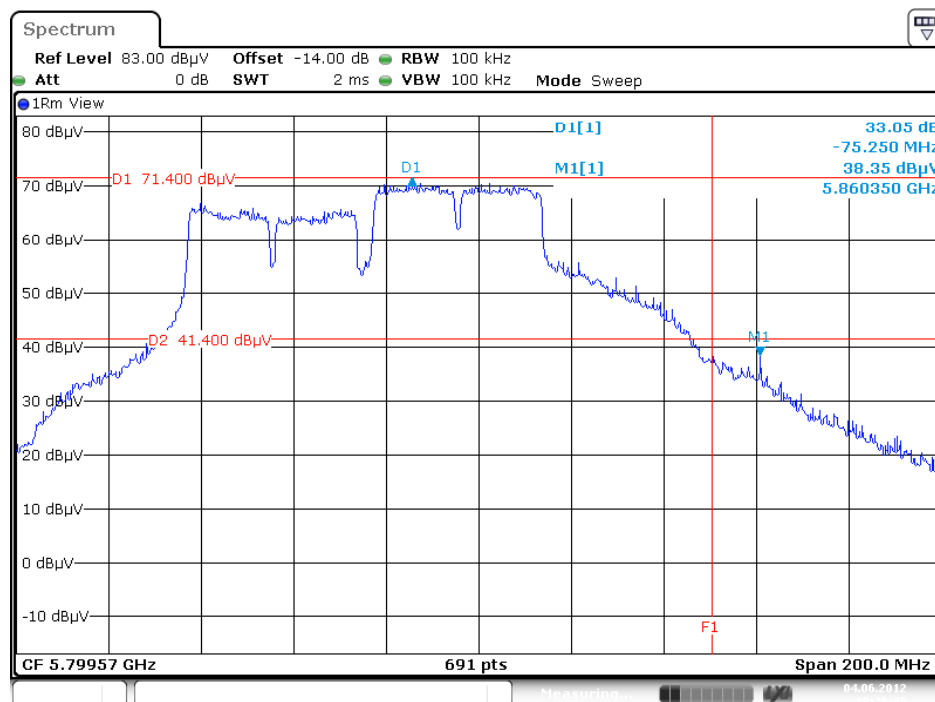


Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

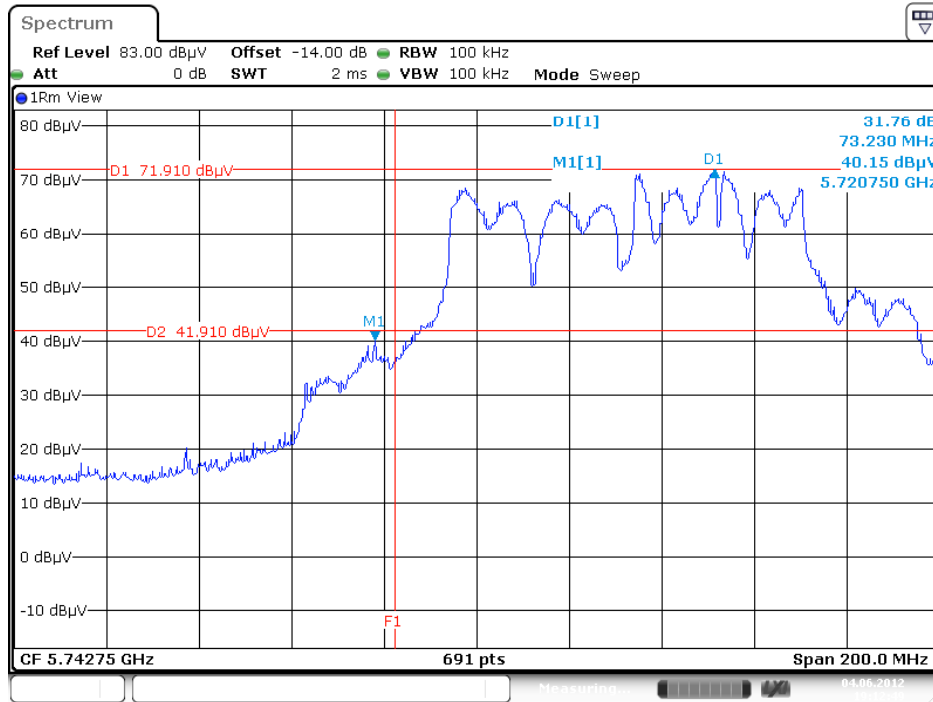


Date: 4.JUN.2012 19:12:49

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

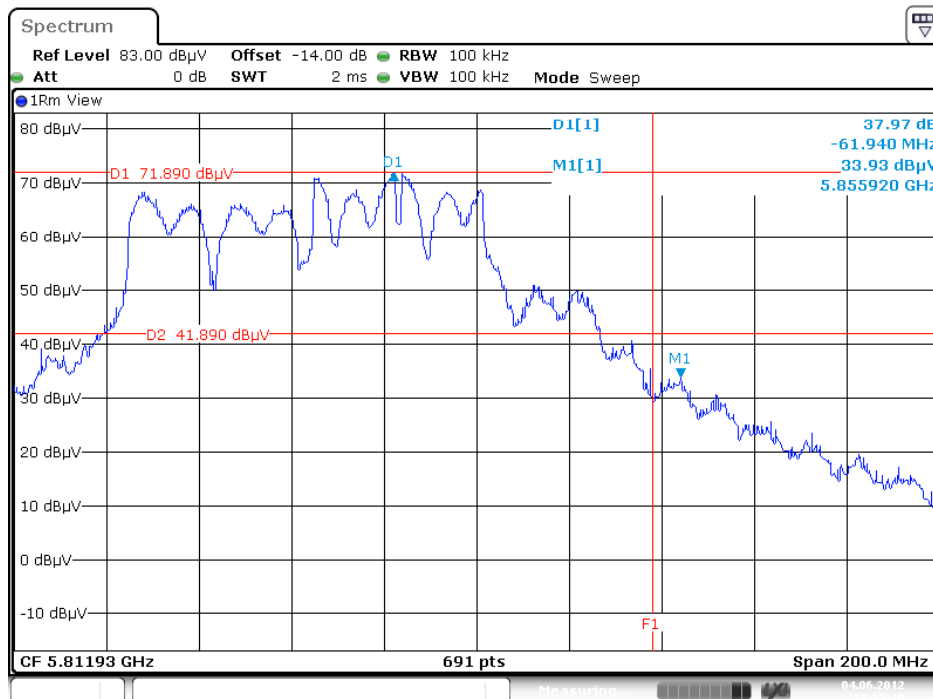


Date: 4.JUN.2012 19:15:11

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

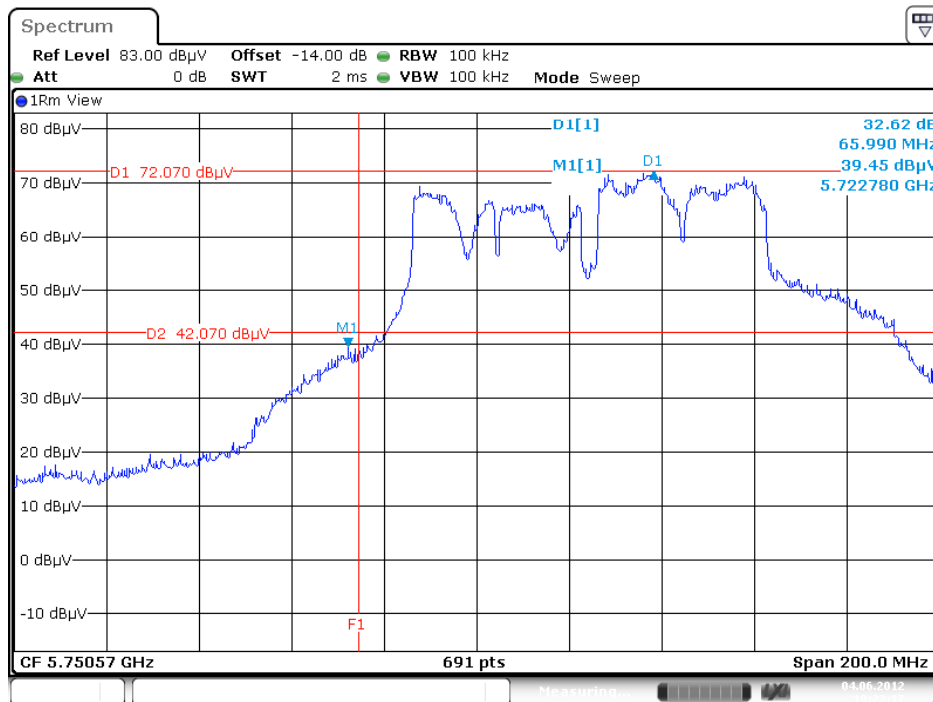


Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

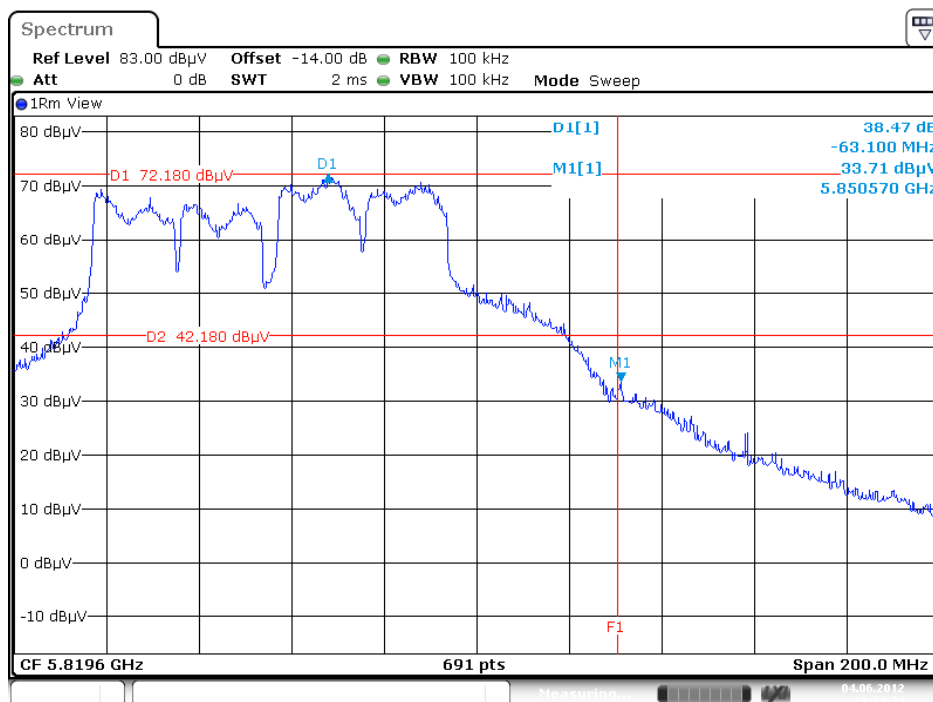

Test Mode : Mode 9 (Ant. 9 Yagi antenna / 8dBi)


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 5745 MHz (1TX)

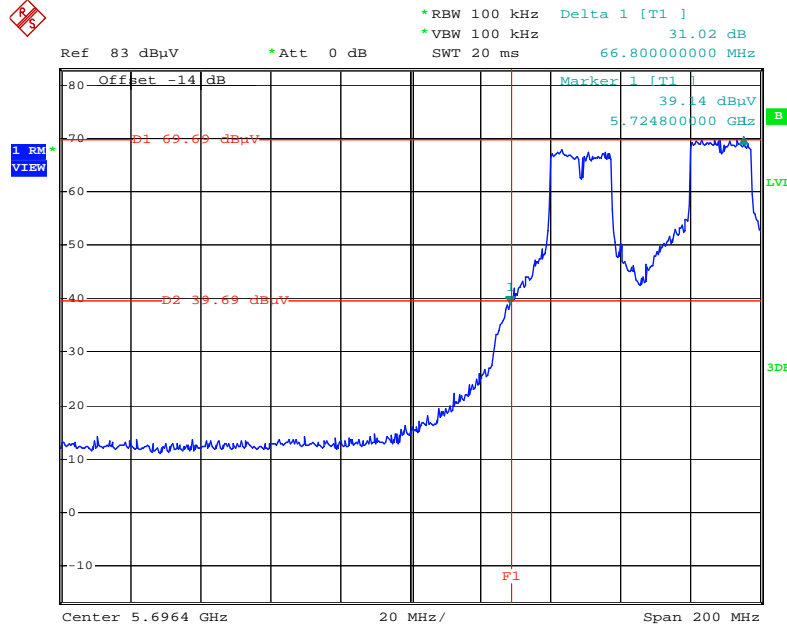


Date: 30.APR.2012 19:47:36

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1/ 5825 MHz (1TX)

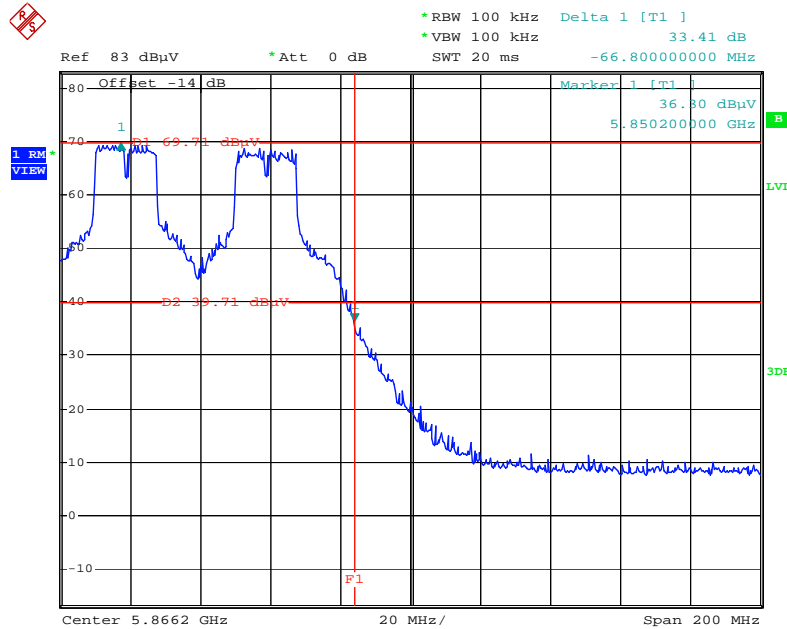


Date: 30.APR.2012 19:49:41

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 5745 MHz (2TX)

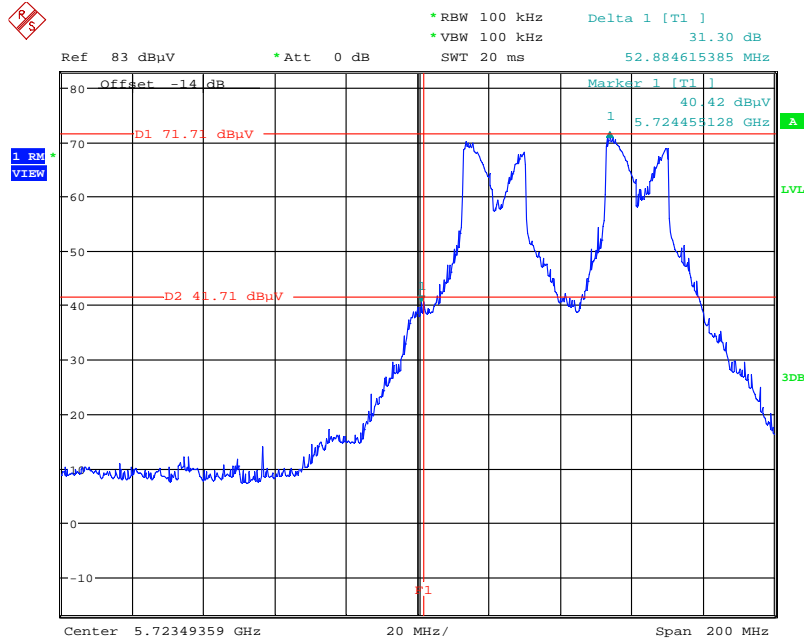


Date: 4.MAY.2012 14:05:48

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 5785 MHz (2TX)

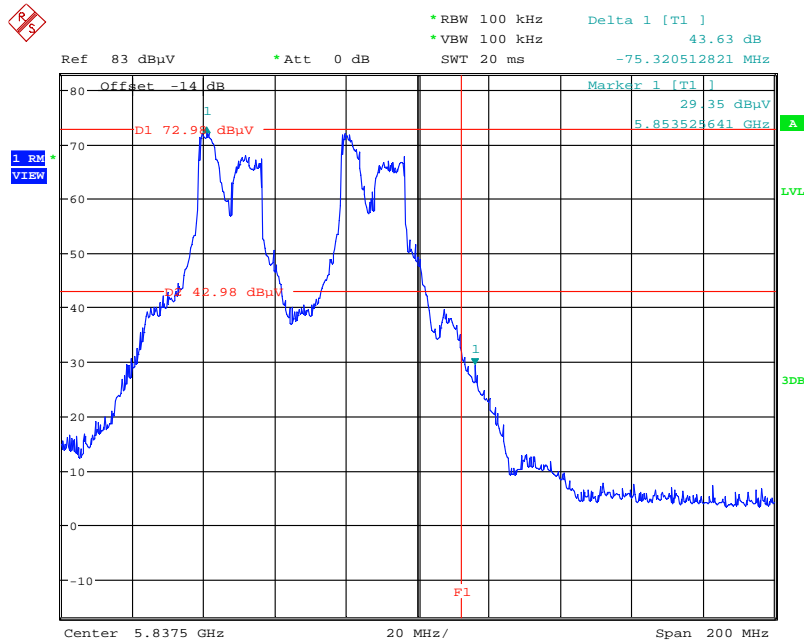


Date: 4.MAY.2012 15:22:18

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2/ 5745MHz (2TX)

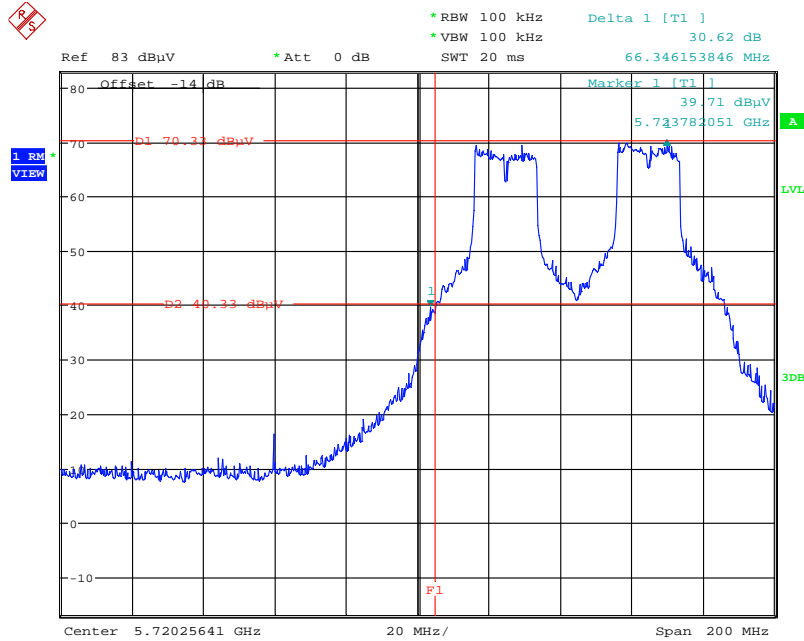


Date: 4.MAY.2012 14:20:10

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2/ 5785 MHz (2TX)

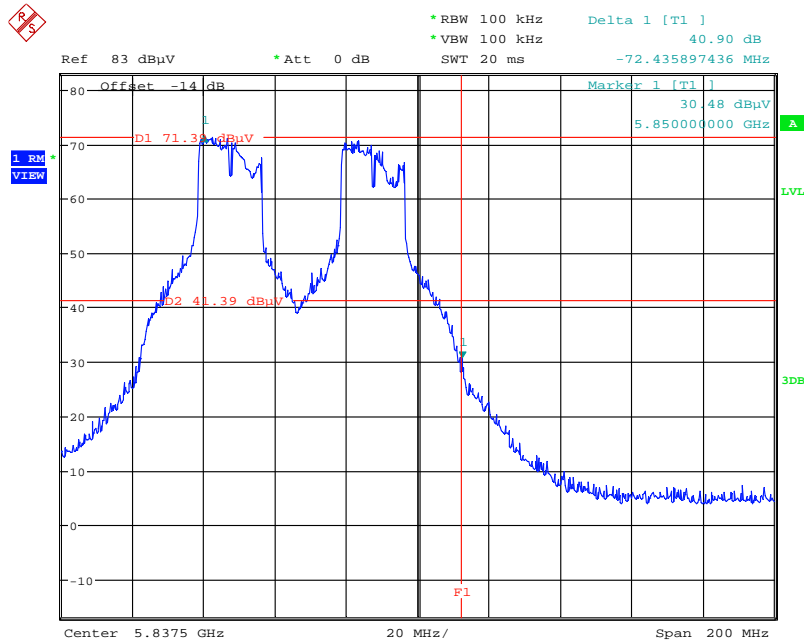


Date: 4.MAY.2012 15:28:29

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)

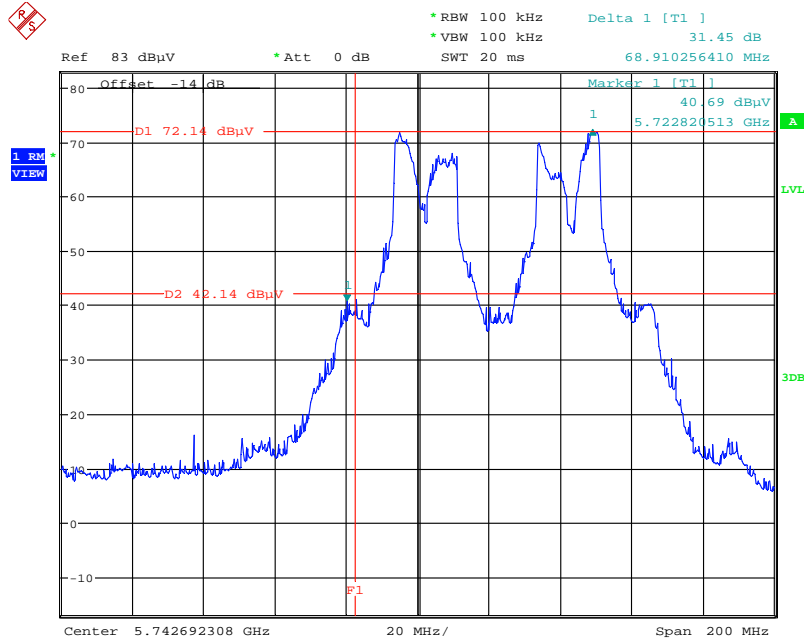


Date: 4.MAY.2012 15:42:29

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

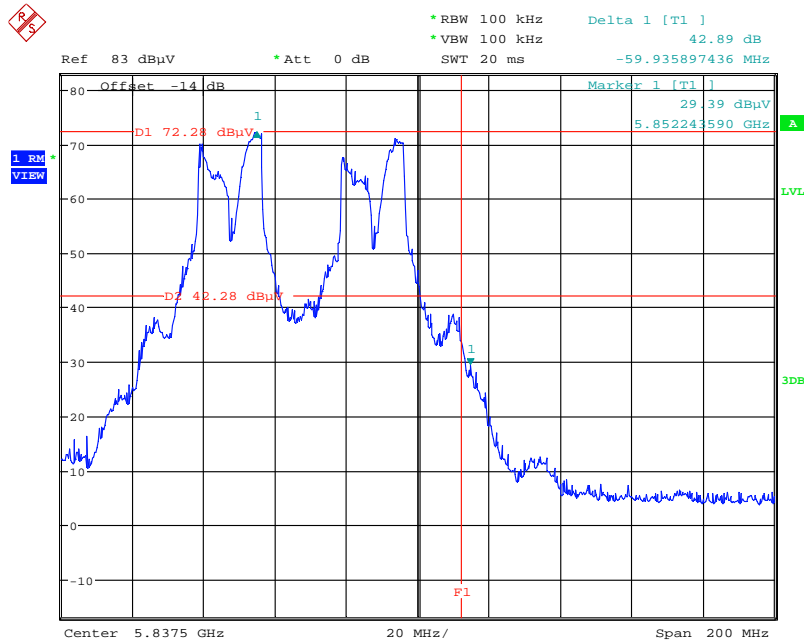


Date: 4.MAY.2012 15:40:10

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)

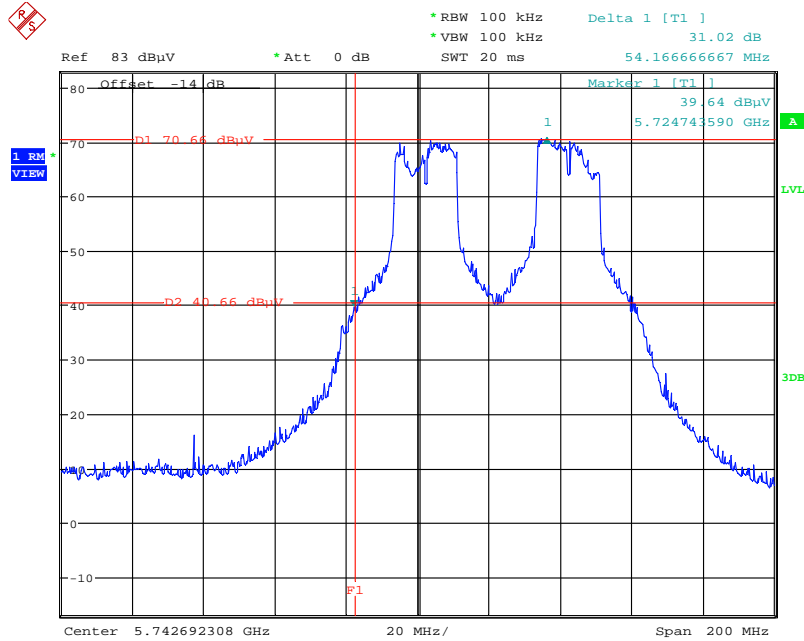


Date: 4.MAY.2012 15:45:30

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

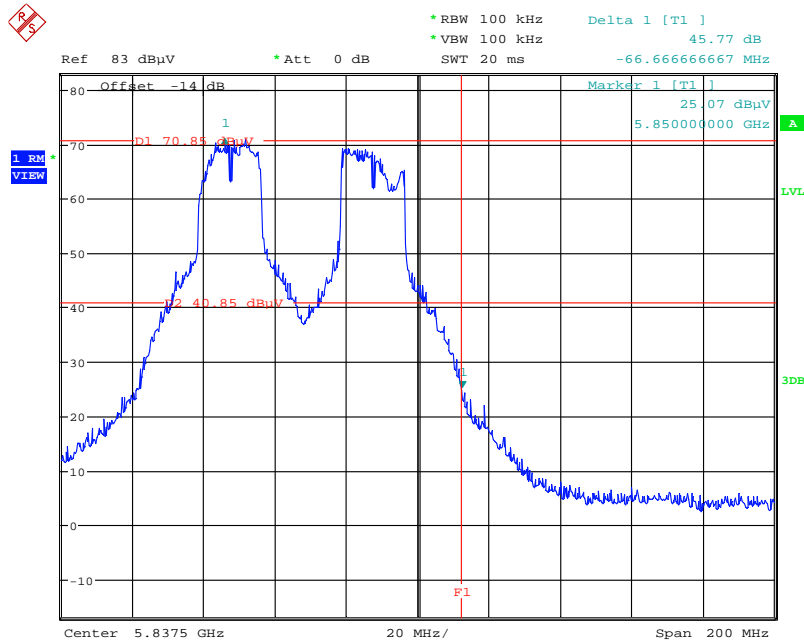


Date: 4.MAY.2012 15:37:29

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5755 MHz (1TX)

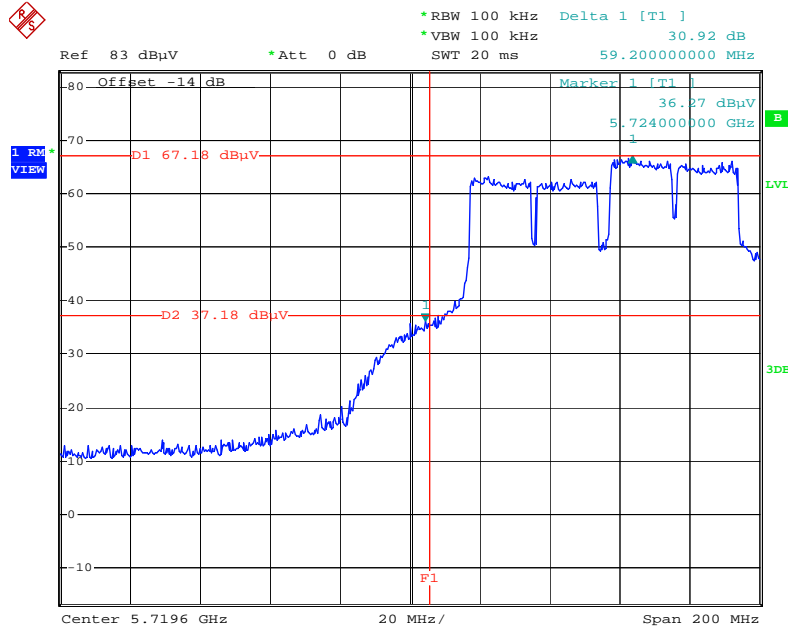


Date: 30.APR.2012 19:43:19

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5795 MHz (1TX)

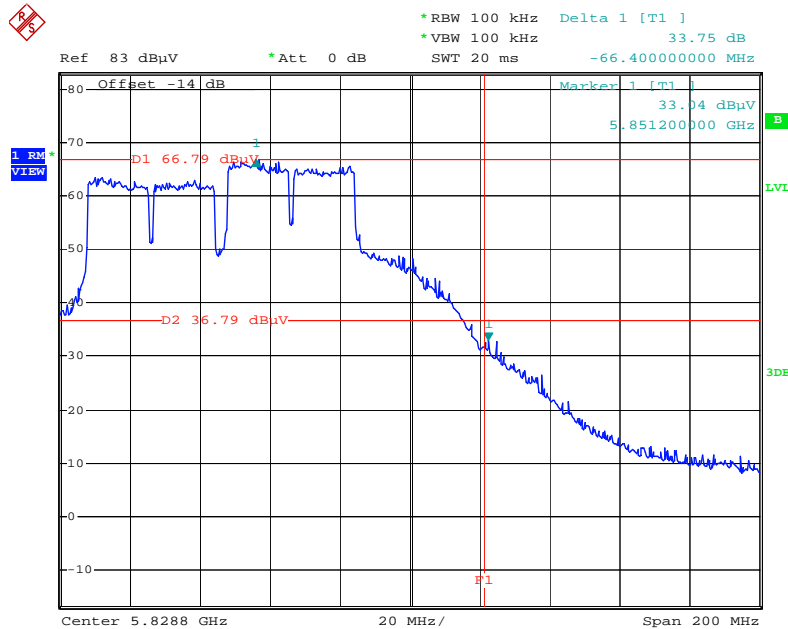


Date: 30.APR.2012 19:41:32

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

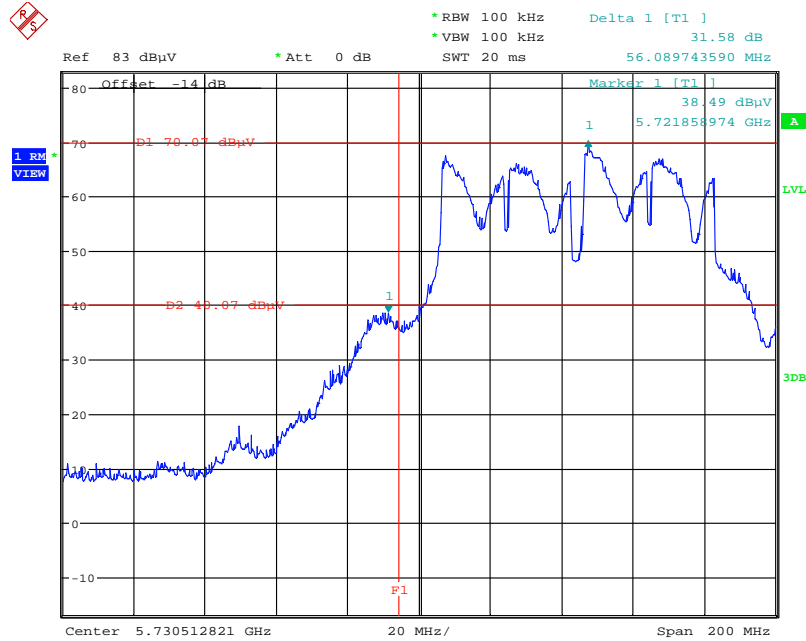


Date: 4.MAY.2012 14:41:33

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

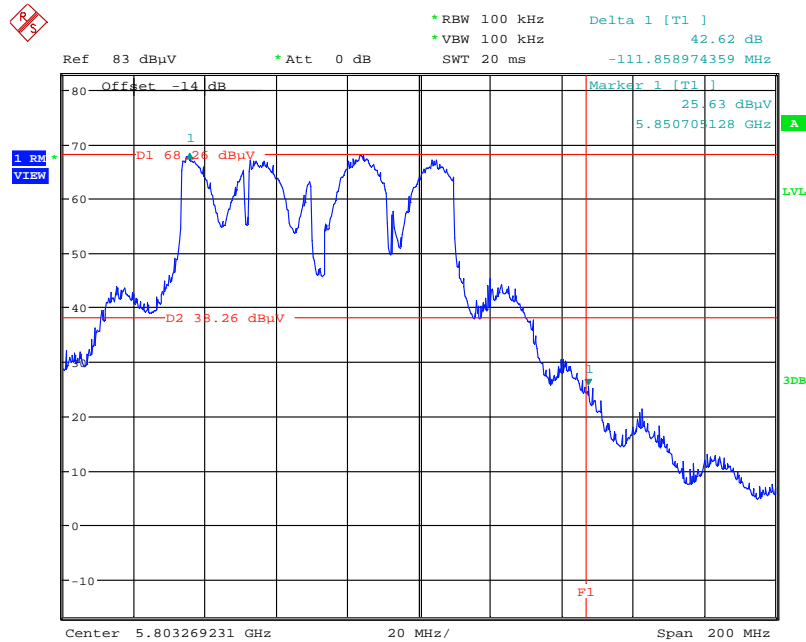


Date: 4.MAY.2012 14:27:54

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 / 5755 MHz (2TX)

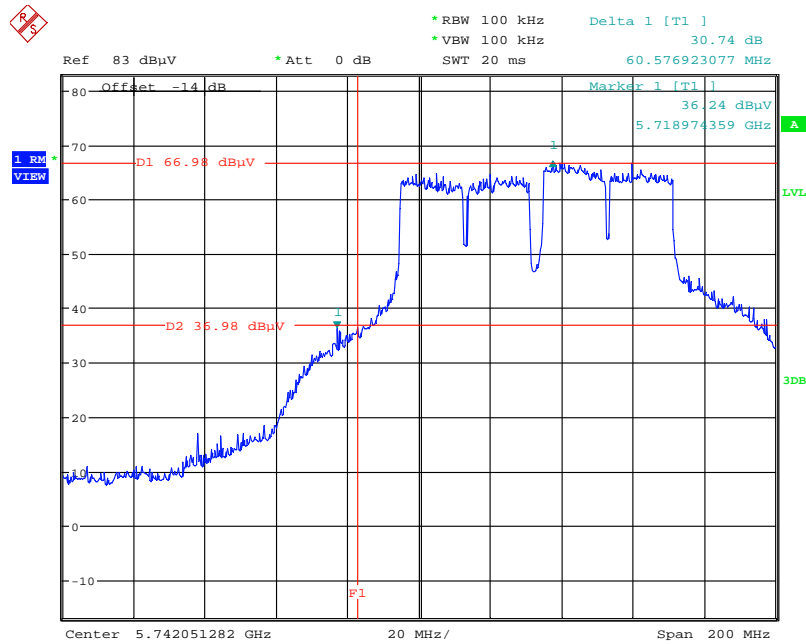


Date: 4.MAY.2012 14:49:15

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 / 5795 MHz (2TX)

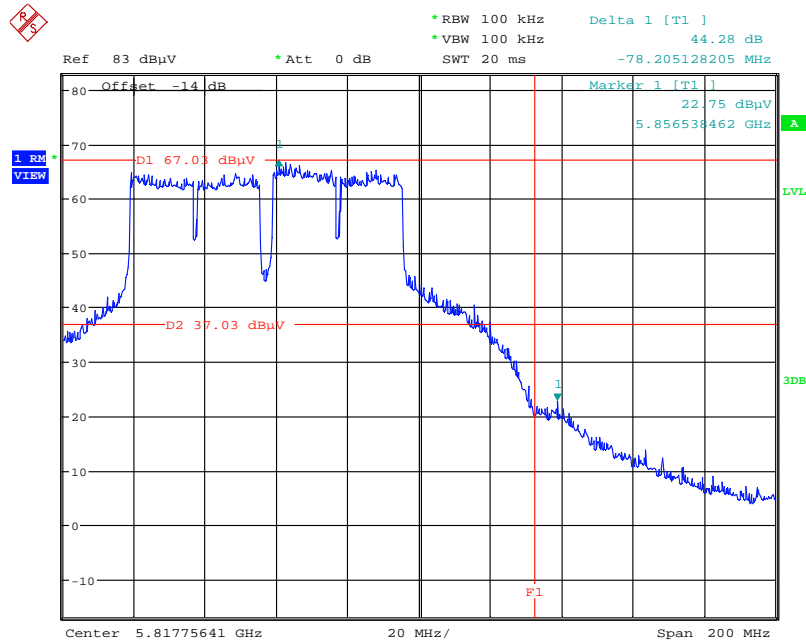


Date: 4.MAY.2012 14:51:30

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

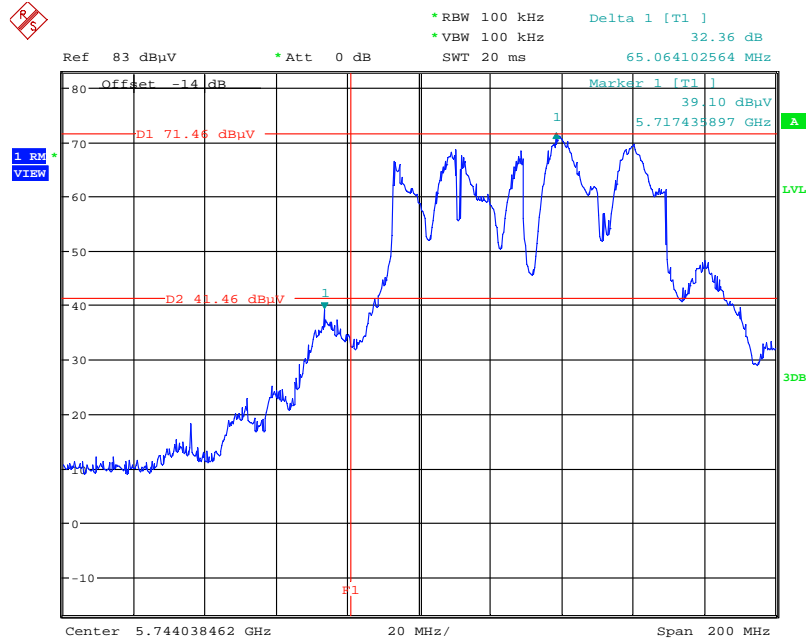


Date: 4.MAY.2012 15:59:08

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

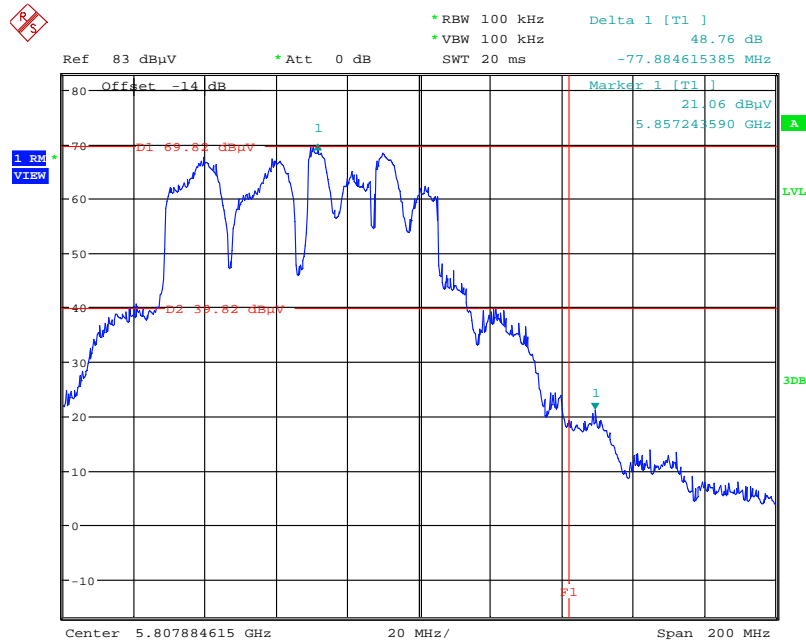


Date: 4.MAY.2012 15:48:50

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

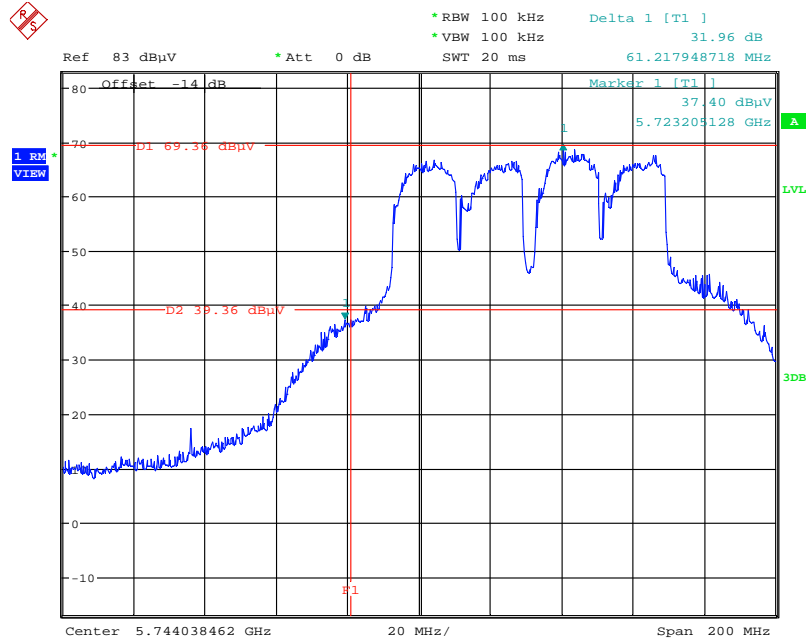

Date: 4.MAY.2012 15:55:51

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

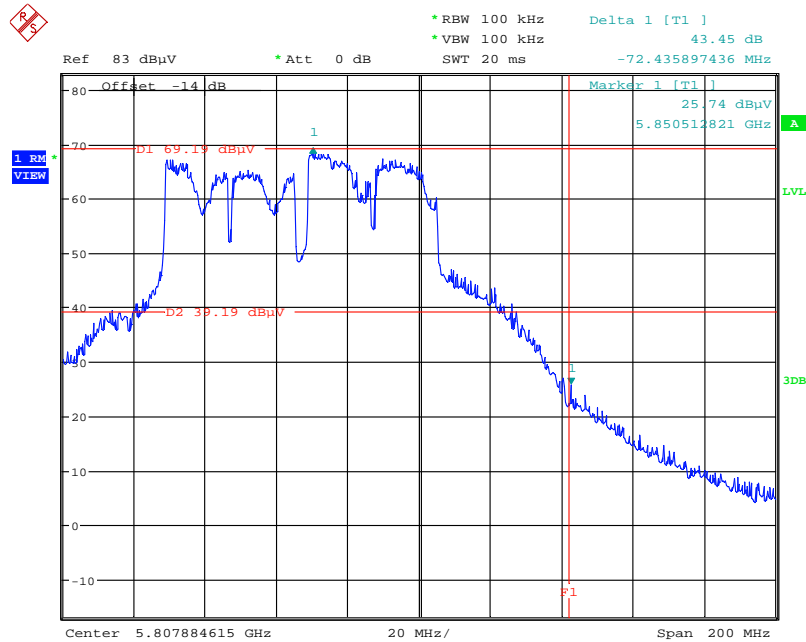


Date: 4.MAY.2012 15:52:37

Test Mode : Mode 10 (Ant. 10 Facade antenna / 2.5dBi)


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 / 5745 MHz (1TX)

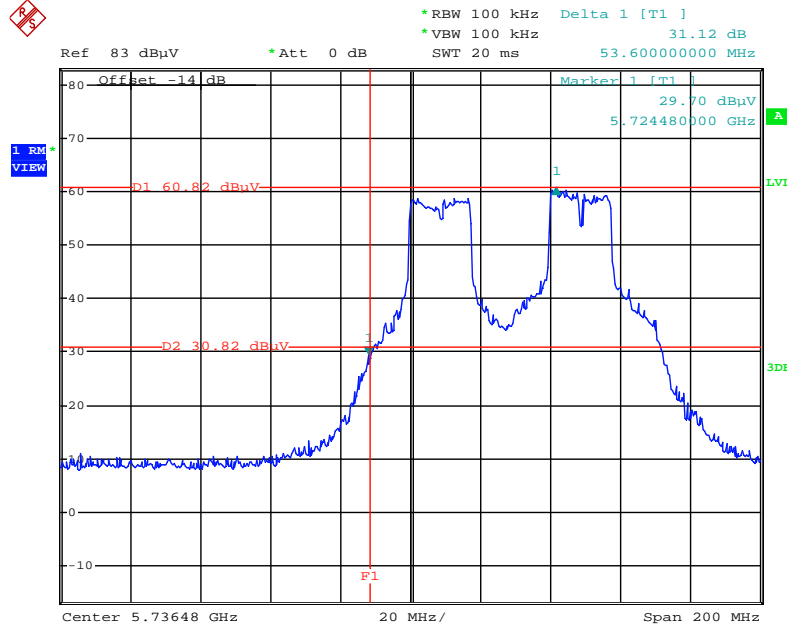


Date: 7.MAY.2012 15:19:29

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1/ 5825 MHz (1TX)

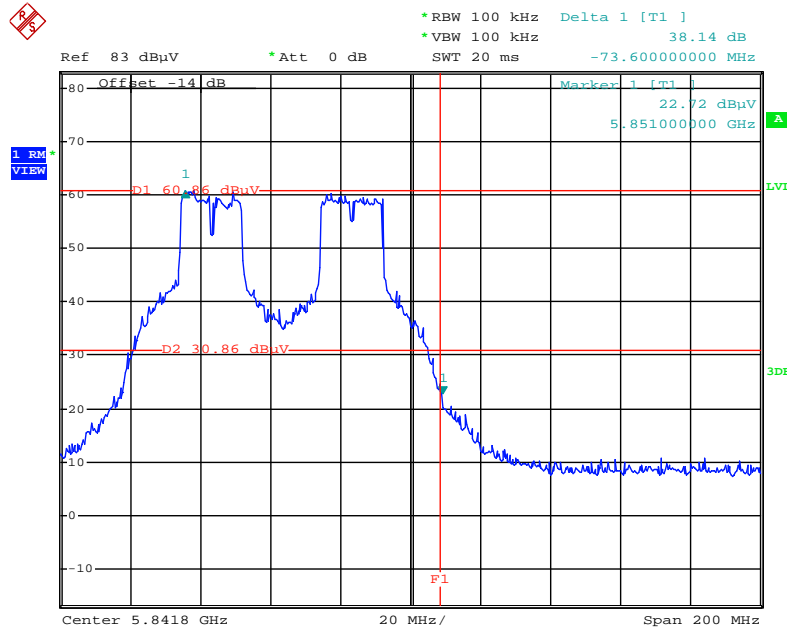


Date: 7.MAY.2012 15:22:10

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2/ 5745 MHz (2TX)

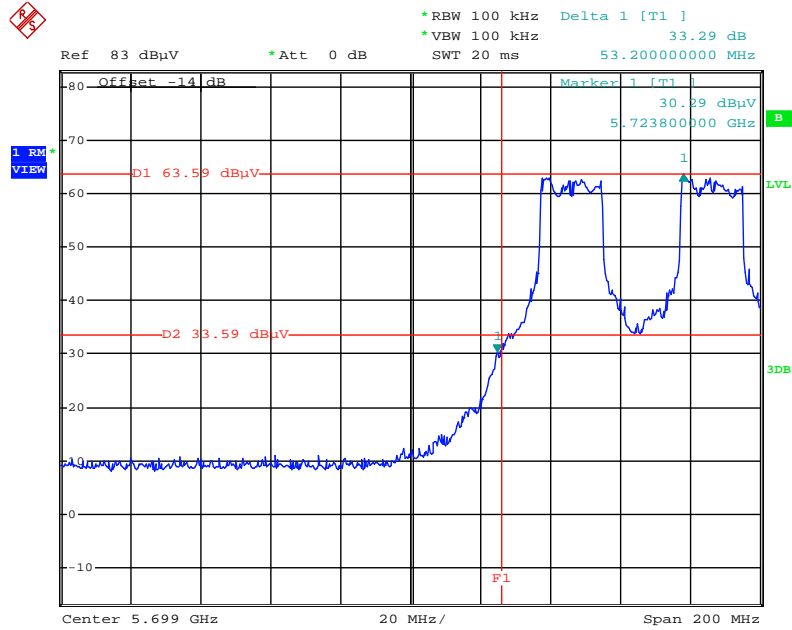


Date: 7.MAY.2012 21:29:36

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1+ Chain 2/ 5785 MHz (2TX)

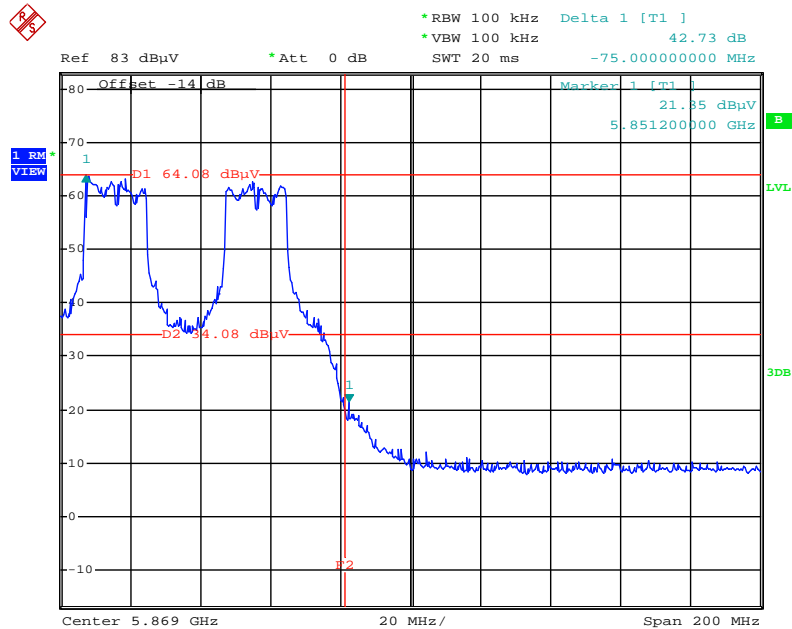


Date: 7.MAY.2012 21:24:46

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2/ 5745MHz (2TX)

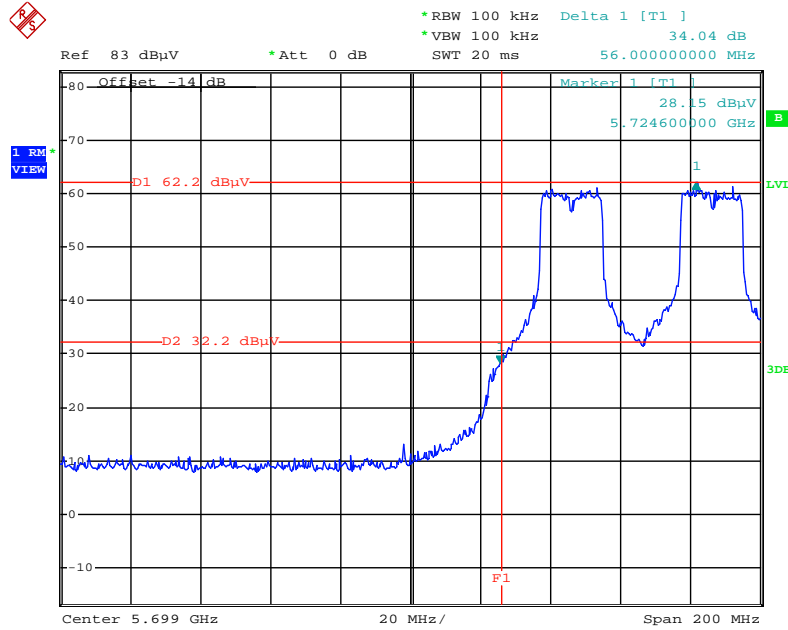


Date: 7.MAY.2012 21:35:59

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1+ Chain 2/ 5785 MHz (2TX)

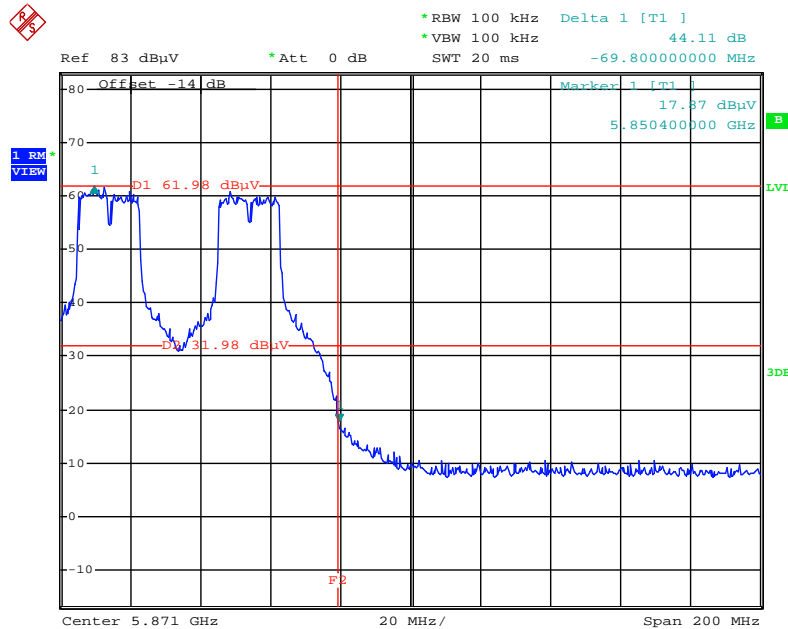


Date: 7.MAY.2012 21:37:45

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)

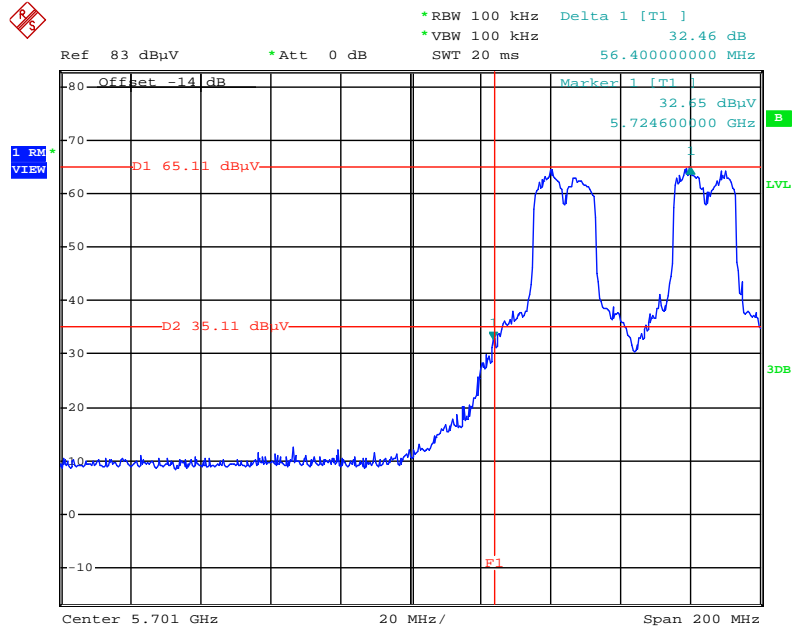


Date: 8.MAY.2012 00:21:00

Plot on Configuration IEEE 802.11n MCS0 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

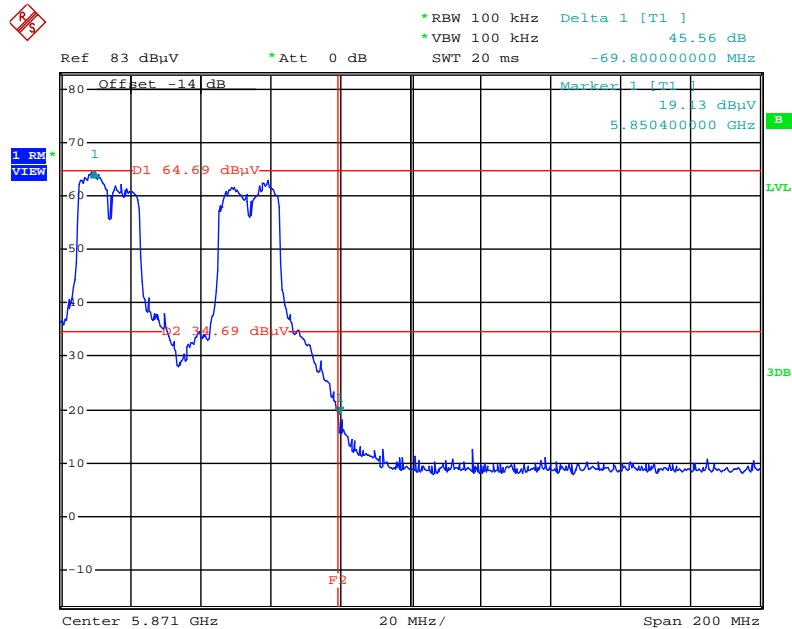


Date: 8.MAY.2012 00:25:31

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5745 MHz (3TX)

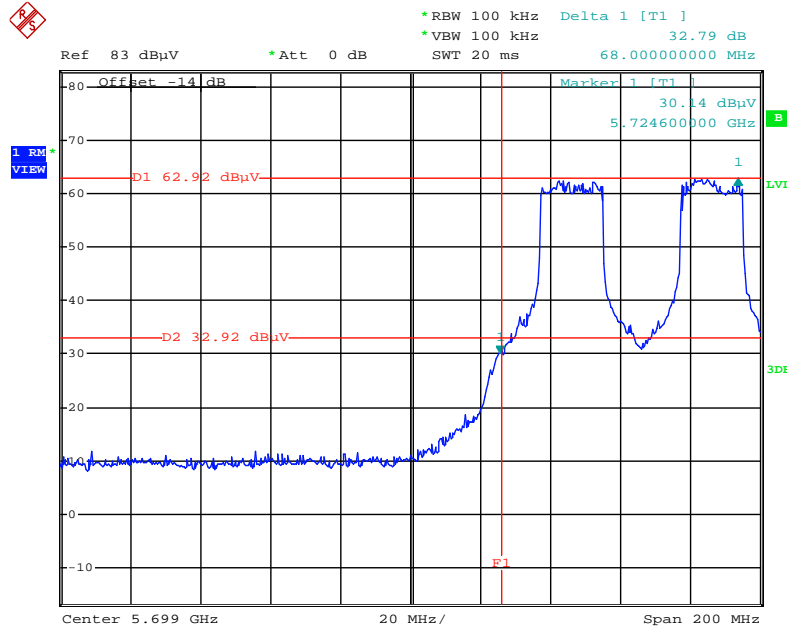


Date: 8.MAY.2012 00:31:59

Plot on Configuration IEEE 802.11n MCS8 20MHz / Chain 1 + Chain 2 + Chain 3 / 5785 MHz (3TX)

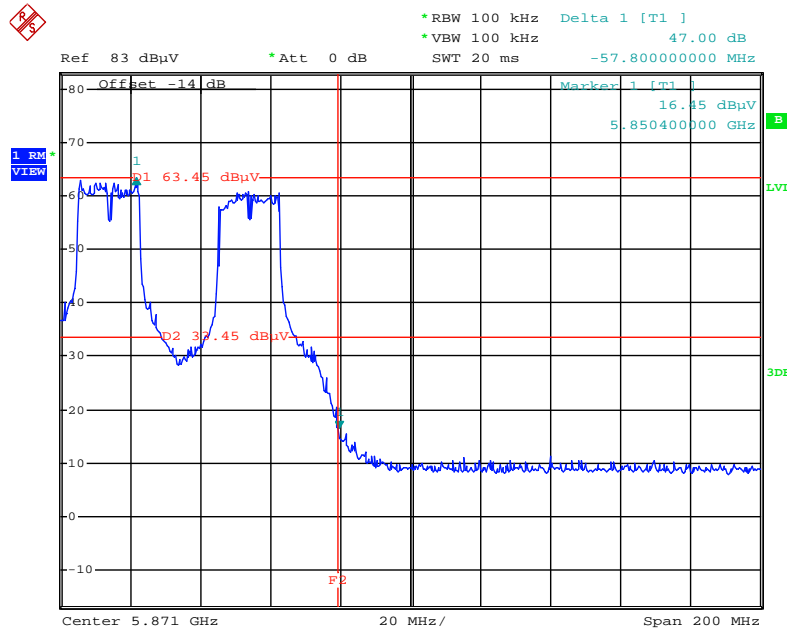


Date: 8.MAY.2012 00:28:47

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5755 MHz (1TX)

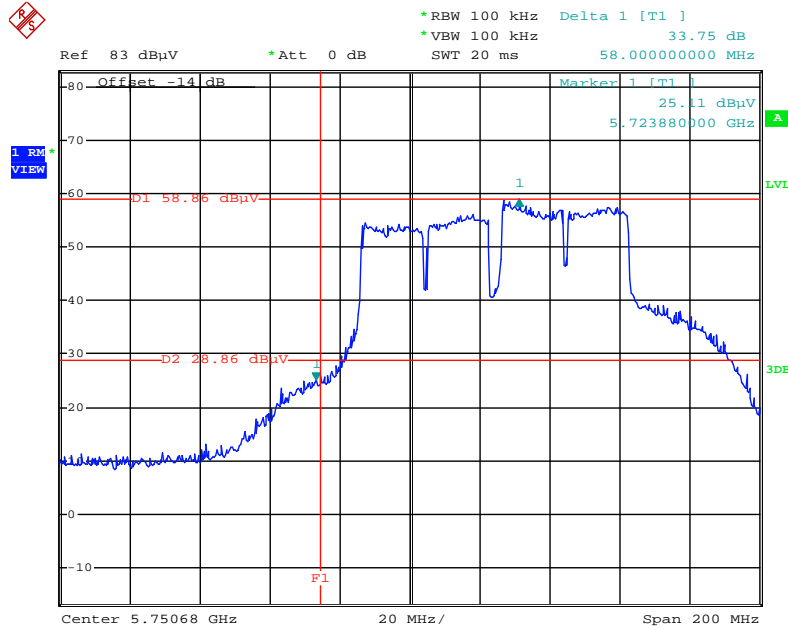


Date: 7.MAY.2012 15:37:44

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 / 5795 MHz (1TX)

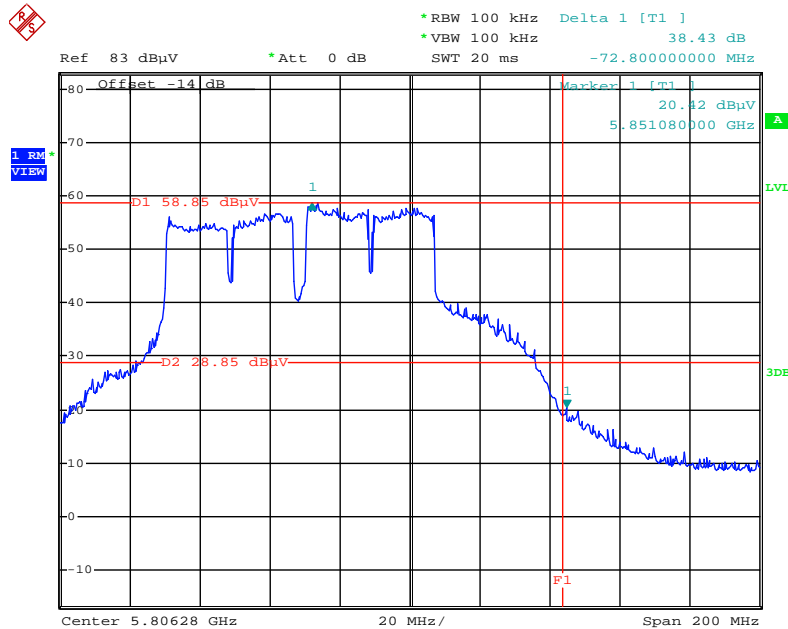


Date: 7.MAY.2012 15:45:40

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

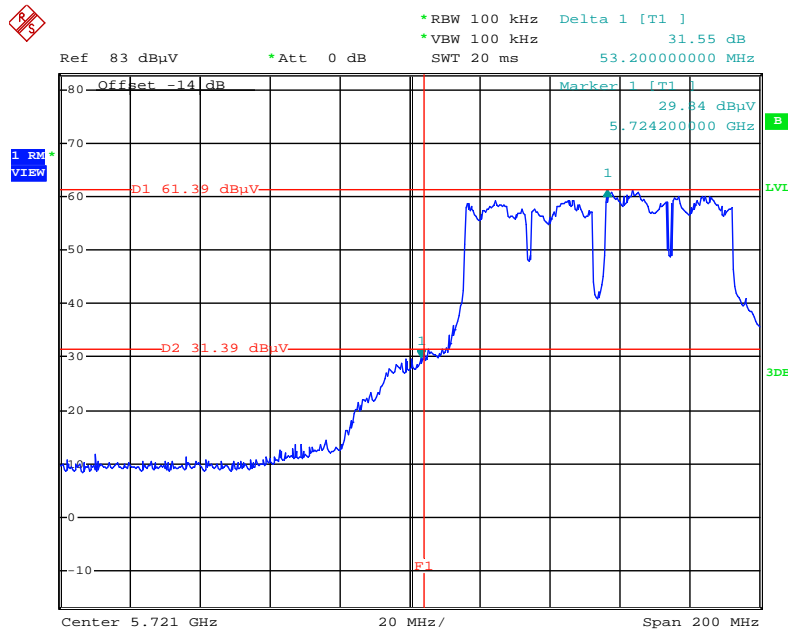


Date: 7.MAY.2012 21:46:30

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

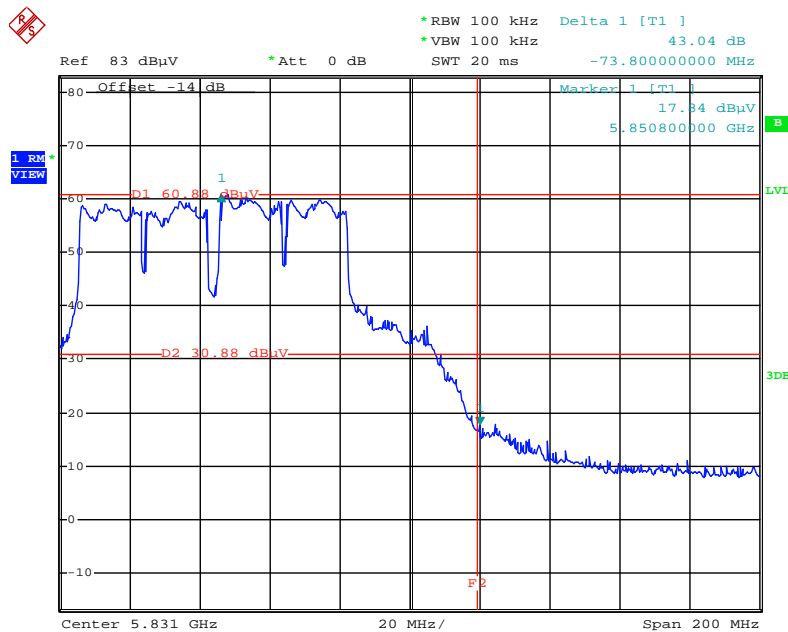


Date: 7.MAY.2012 21:49:18

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5755 MHz (2TX)

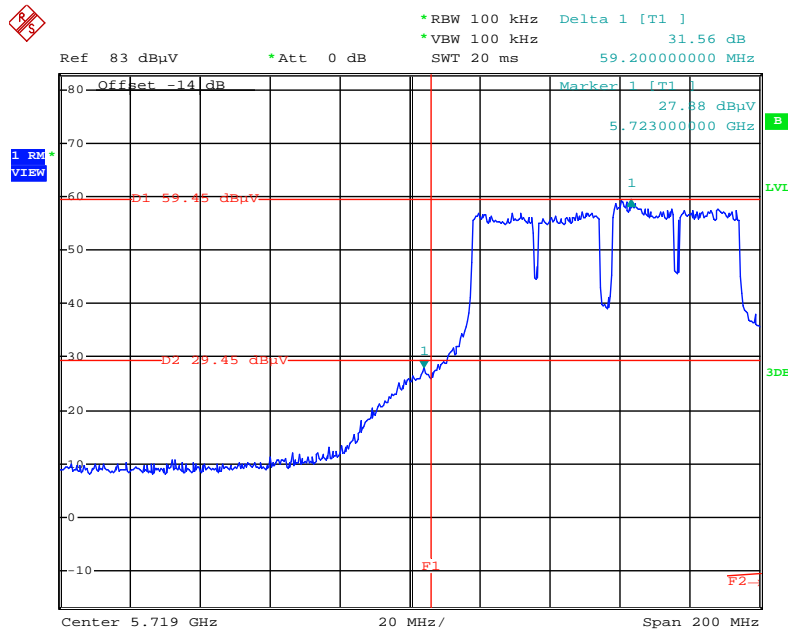


Date: 7.MAY.2012 21:54:28

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2/ 5795 MHz (2TX)

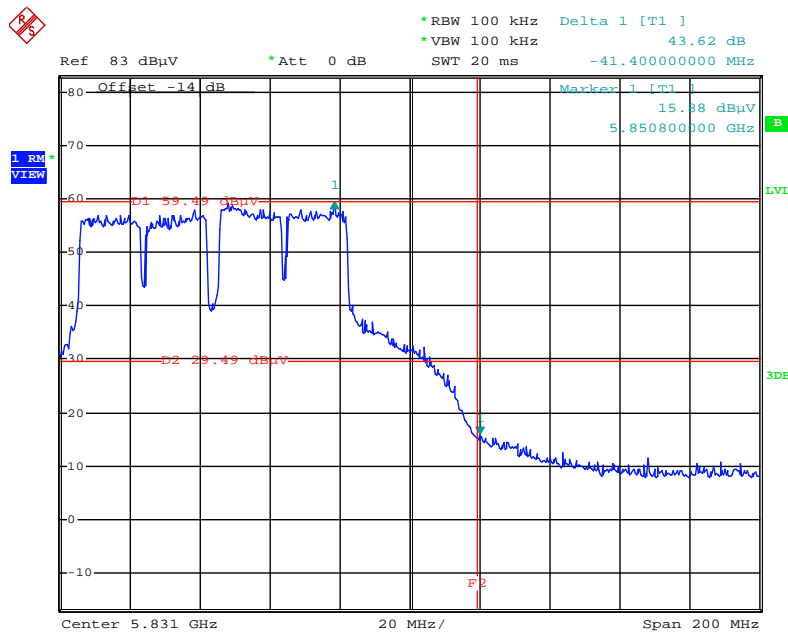


Date: 7.MAY.2012 21:56:35

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

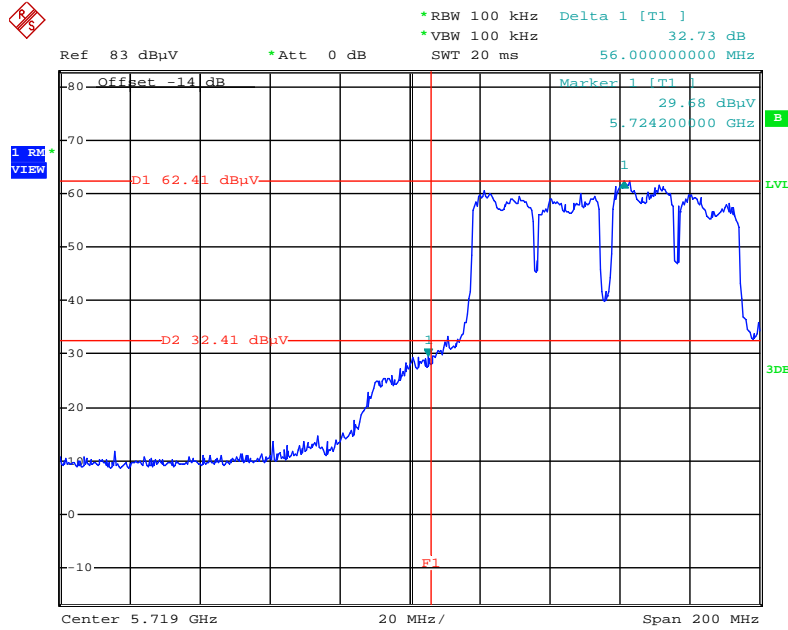


Date: 8.MAY.2012 00:36:34

Plot on Configuration IEEE 802.11n MCS0 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

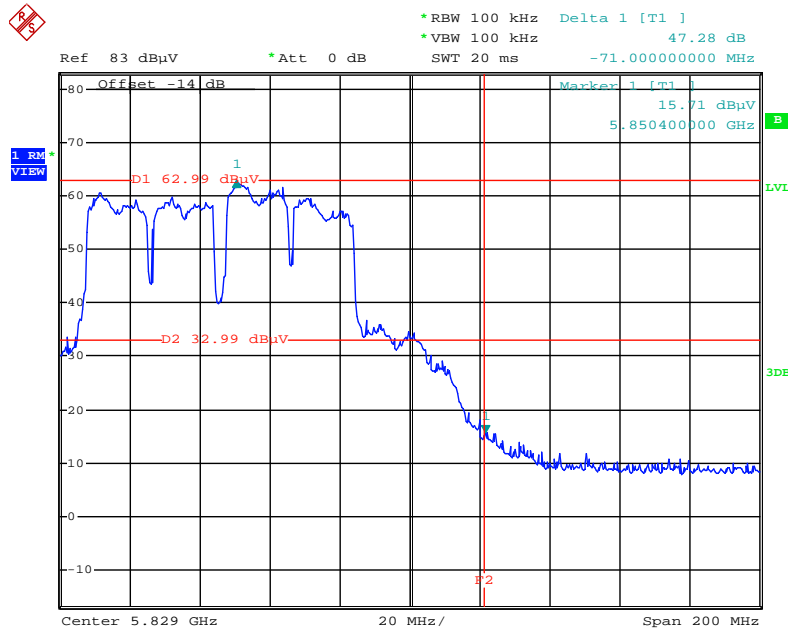


Date: 8.MAY.2012 00:38:53

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5755 MHz (3TX)

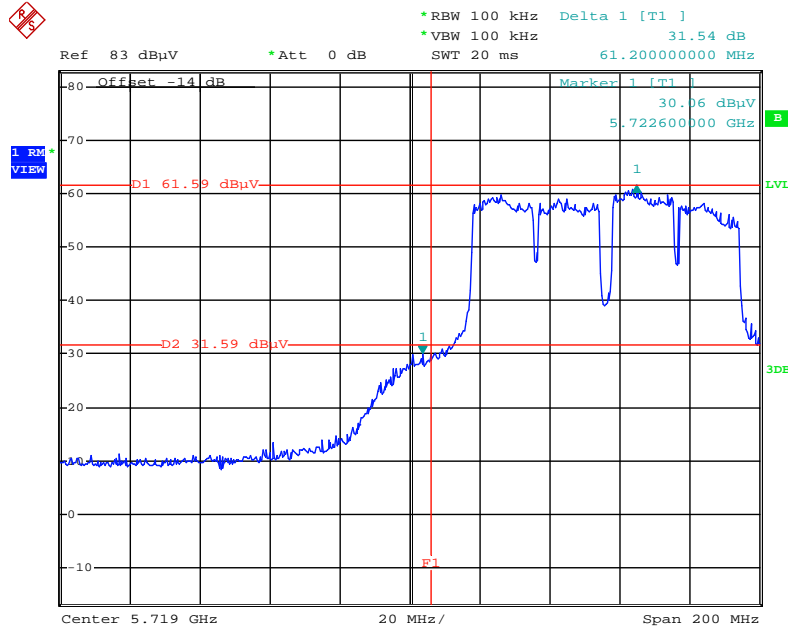

Date: 8.MAY.2012 00:42:21

Plot on Configuration IEEE 802.11n MCS8 40MHz / Chain 1 + Chain 2 + Chain 3 / 5795 MHz (3TX)

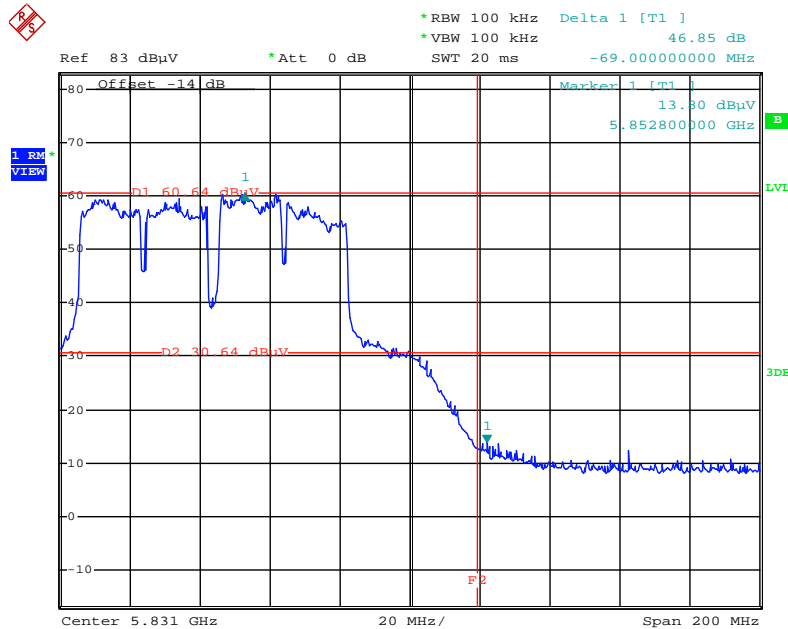

Date: 8.MAY.2012 00:44:54

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 30, 2011	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 29, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2011	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2012	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 22, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)


Note: Calibration Interval of instruments listed above is one year.

Note: “*” Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會
Taiwan Accreditation Foundation


Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix