



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

| | |
|------------------------|--|
| Applicant's company | Motorola, Inc. |
| Applicant Address | One Motorola Plaza Holtsville NY 111742 USA |
| FCC ID | UZ7MB82 |
| Manufacturer's company | Wistron NeWeb Corporation |
| Manufacturer Address | 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308,Taiwan,R.O.C. |

| | |
|-------------------|---------------------------------------|
| Product Name | MB82 Access Point Radio Module |
| Brand Name | Motorola |
| Model Name | MB82 |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C § 15.247 |
| Test Freq. Range | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz |
| Received Date | Aug. 07, 2009 |
| Final Test Date | Jul. 21, 2011 |
| Submission Type | Class II Change |
| Class II Change | Please refer to section 3.7 |



Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009 and 47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

Table of Contents

| | |
|--|----------------|
| 1. CERTIFICATE OF COMPLIANCE | 1 |
| 2. SUMMARY OF THE TEST RESULT | 2 |
| 3. GENERAL INFORMATION | 3 |
| 3.1. Product Details..... | 3 |
| 3.2. Accessories..... | 5 |
| 3.3. Table for Filed Antenna..... | 6 |
| 3.4. Table for Carrier Frequencies | 7 |
| 3.5. Table for Test Modes | 8 |
| 3.6. Table for Testing Locations..... | 9 |
| 3.7. Table for Class II Change & Multiple List | 10 |
| 3.8. Table for Supporting Units | 10 |
| 3.9. Table for Parameters of Test Software Setting | 11 |
| 3.10. Test Configurations | 13 |
| 4. TEST RESULT | 16 |
| 4.1. AC Power Line Conducted Emissions Measurement..... | 16 |
| 4.2. Peak Output Power Measurement | 20 |
| 4.3. Power Spectral Density Measurement | 37 |
| 4.4. 6dB Spectrum Bandwidth Measurement | 52 |
| 4.5. Radiated Emissions Measurement | 64 |
| 4.6. Band Edge Emissions Measurement | 102 |
| 4.7. Antenna Requirements | 130 |
| 5. LIST OF MEASURING EQUIPMENTS | 131 |
| 6. TEST LOCATION..... | 133 |
| 7. TAF CERTIFICATE OF ACCREDITATION | 134 |
| APPENDIX A. TEST PHOTOS | A1 ~ A9 |
| APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE | B1 ~ B3 |
| APPENDIX C. ANTENNA LIST | |

History of This Test Report


| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|-------------------------|---------------|
| FR152623AB | Rev. 01 | Initial issue of report | Jun. 21, 2011 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



1. CERTIFICATE OF COMPLIANCE

Product Name : MB82 Access Point Radio Module
Brand Name : Motorola
Model Name : MB82
Applicant : Motorola, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 07, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C | | | | |
|--|--------------|-----------------------------------|----------|-------------|
| Part | Rule Section | Description of Test | Result | Under Limit |
| 4.1 | 15.207 | AC Power Line Conducted Emissions | Complies | 10.91 dB |
| 4.2 | 15.247(b)(3) | Peak Output Power | Complies | 0.04 dB |
| 4.3 | 15.247(e) | Power Spectral Density | Complies | 0.66 dB |
| 4.4 | 15.247(a)(2) | 6dB Spectrum Bandwidth | Complies | - |
| 4.5 | 15.247(d) | Radiated Emissions | Complies | 4.42 dB |
| 4.6 | 15.247(d) | Band Edge Emissions | Complies | 1.01 dB |
| 4.7 | 15.203 | Antenna Requirements | Complies | - |

| Test Items | Uncertainty | Remark |
|---|-----------------------|--------------------------|
| AC Power Line Conducted Emissions | ±2.3dB | Confidence levels of 95% |
| Maximum Conducted Output Power | ±0.8dB | Confidence levels of 95% |
| Power Spectral Density | ±0.5dB | Confidence levels of 95% |
| 6dB Spectrum Bandwidth | ±8.5×10 ⁻⁸ | Confidence levels of 95% |
| Radiated Emissions (9kHz~30MHz) | ±0.8dB | Confidence levels of 95% |
| Radiated Emissions (30MHz~1000MHz) | ±1.9dB | Confidence levels of 95% |
| Radiated / Band Edge Emissions (1GHz~18GHz) | ±1.9dB | Confidence levels of 95% |
| Radiated Emissions (18GHz~40GHz) | ±1.9dB | Confidence levels of 95% |
| Temperature | ±0.7°C | Confidence levels of 95% |
| Humidity | ±3.2% | Confidence levels of 95% |
| DC / AC Power Source | ±1.4% | Confidence levels of 95% |

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

| Items | Description |
|--------------------------|--|
| Product Type | WLAN (2TX, 3RX) |
| Radio Type | Intentional Transceiver |
| Power Type | From Host System |
| Modulation | see the below table for IEEE 802.11n |
| Data Modulation | OFDM (BPSK / QPSK / 16QAM / 64QAM) |
| Data Rate (Mbps) | see the below table for IEEE 802.11n |
| Frequency Range | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz |
| Channel Number | For 2.4GHz Band: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth For 5GHz Band: 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth |
| Channel Band Width (99%) | For 2.4GHz Band: For Ant. 8: MCS8 (20MHz): 17.60 MHz ; MCS8 (40MHz): 36.32 MHz For Ant. 9: MCS8 (20MHz): 17.60 MHz ; MCS8 (40MHz): 36.32 MHz For 5GHz Band: For Ant. 7: MCS8 (20MHz): 17.60 MHz ; MCS8 (40MHz): 36.40 MHz |
| Peak Output Power | For 2.4GHz Band: For Ant. 8: MCS8 (20MHz): 24.27 dBm ; MCS8 (40MHz): 20.01 dBm For Ant. 9: MCS8 (20MHz): 25.27 dBm ; MCS8 (40MHz): 21.21 dBm For 5GHz Band: For Ant. 7: MCS8 (20MHz): 23.73 dBm ; MCS8 (40MHz): 23.26 dBm |
| Carrier Frequencies | Please refer to section 3.4 |
| Antenna | Please refer to section 3.3 |

802.11a/b/g

| Items | Description |
|--------------------------|---|
| Product Type | WLAN (2TX, 3RX) |
| Radio Type | Intentional Transceiver |
| Power Type | From Host System |
| Modulation | DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g |
| Data Modulation | DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM) |
| Data Rate (Mbps) | DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54) |
| Frequency Range | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz |
| Channel Number | 11b/g: 11 ; 11a: 5 |
| Channel Band Width (99%) | For Ant. 8: 11b: 15.24 MHz ; 11g: 16.48 MHz For Ant. 9: 11b: 15.28 MHz ; 11g: 16.48 MHz For Ant. 7: 11a: 16.80 MHz |
| Peak Output Power | For Ant. 8: 11b: 23.20 dBm ; 11g: 23.60 dBm For Ant. 9: 11b: 23.20 dBm ; 11g: 23.60 dBm For Ant. 7: 11a: 23.48 dBm |
| Carrier Frequencies | Please refer to section 3.4 |
| Antenna | Please refer to section 3.3 |

Antenna & Band width

| Antenna | Two (TX) | |
|-----------------|----------|--------|
| | 20 MHz | 40 MHz |
| Band width Mode | | |
| 802.11a | V | X |
| 802.11b | V | X |
| 802.11g | V | X |
| 802.11n | V | V |

IEEE 802.11n spec

| MCS Index | Nss | Modulation | R | NBPS | NCBPS | | NDBPS | | Datarate(Mbps) | | | |
|-----------|-----|------------|-----|------|-------|-------|-------|-------|----------------|-------|---------|-------|
| | | | | | 20MHz | 40MHz | 20MHz | 40MHz | 800nsGI | | 400nsGI | |
| | | | | | | | | | 20MHz | 40MHz | 20MHz | 40MHz |
| 0 | 1 | BPSK | 1/2 | 1 | 52 | 108 | 26 | 54 | 6.5 | 13.5 | 7.200 | 15 |
| 1 | 1 | QPSK | 1/2 | 2 | 104 | 216 | 52 | 108 | 13.0 | 27.0 | 14.400 | 30 |
| 2 | 1 | QPSK | 3/4 | 2 | 104 | 216 | 78 | 162 | 19.5 | 40.5 | 21.700 | 45 |
| 3 | 1 | 16-QAM | 1/2 | 4 | 208 | 432 | 104 | 216 | 26.0 | 54.0 | 28.900 | 60 |
| 4 | 1 | 16-QAM | 3/4 | 4 | 208 | 432 | 156 | 324 | 39.0 | 81.0 | 43.300 | 90 |
| 5 | 1 | 64-QAM | 2/3 | 6 | 312 | 648 | 208 | 432 | 52.0 | 108.0 | 57.800 | 120 |
| 6 | 1 | 64-QAM | 3/4 | 6 | 312 | 648 | 234 | 486 | 58.5 | 121.5 | 65.000 | 135 |
| 7 | 1 | 64-QAM | 5/6 | 6 | 312 | 648 | 260 | 540 | 65.0 | 135.0 | 72.200 | 150 |
| 8 | 2 | BPSK | 1/2 | 1 | 104 | 216 | 52 | 108 | 13.0 | 27.0 | 14.444 | 30 |
| 9 | 2 | QPSK | 1/2 | 2 | 208 | 432 | 104 | 216 | 26.0 | 54.0 | 28.889 | 60 |
| 10 | 2 | QPSK | 3/4 | 2 | 208 | 432 | 156 | 324 | 39.0 | 81.0 | 43.333 | 90 |
| 11 | 2 | 16-QAM | 1/2 | 4 | 416 | 864 | 208 | 432 | 52.0 | 108.0 | 57.778 | 120 |
| 12 | 2 | 16-QAM | 3/4 | 4 | 416 | 864 | 312 | 648 | 78.0 | 162.0 | 86.667 | 180 |
| 13 | 2 | 64-QAM | 2/3 | 6 | 624 | 1296 | 416 | 864 | 104.0 | 216.0 | 115.556 | 240 |
| 14 | 2 | 64-QAM | 3/4 | 6 | 624 | 1296 | 468 | 972 | 117.0 | 243.0 | 130.000 | 270 |
| 15 | 2 | 64-QAM | 5/6 | 6 | 624 | 1296 | 520 | 1080 | 130.0 | 270.0 | 144.444 | 300 |

| Symbol | Explanation |
|--------|---|
| NSS | Number of spatial streams |
| R | Code rate |
| NBPS | Number of coded bits per single carrier |
| NCBPS | Number of coded bits per symbol |
| NDBPS | Number of data bits per symbol |
| GI | guard interval |

3.2. Accessories


N/A

3.3. Table for Filed Antenna

| Ant. | Brand | Model Name | Antenna Type | Connector | Antenna Gain (dBi) | | Loss of External Cable (dB) | Antenna Total Gain (dBi) |
|------|----------|--------------------|----------------|-----------|--------------------|--------|-----------------------------|--------------------------|
| | | | | | 5GHz | 10.875 | | |
| 7 | Motorola | ML-5299-FHPA10-01R | Dipole Antenna | N MALE | 5GHz | 10.875 | 1.42 | 9.455 |
| 8 | Motorola | ML-2499-11PNA2-01R | Sector, panel | RBNC-M | 2.4GHz | 10.5 | 1.3 | 9.2 |
| 9 | Motorola | ML-2499-FHPA9-01R | Dipole Antenna | N MALE | 2.4GHz | 10 | 0.65 | 9.35 |

Note:

The EUT has three antenna connectors which can be used for transmitting and receiving simultaneously as 2Tx and 3Rx. There are six sets of antenna provided to this EUT and all of them can be used as transmitting and receiving antenna.

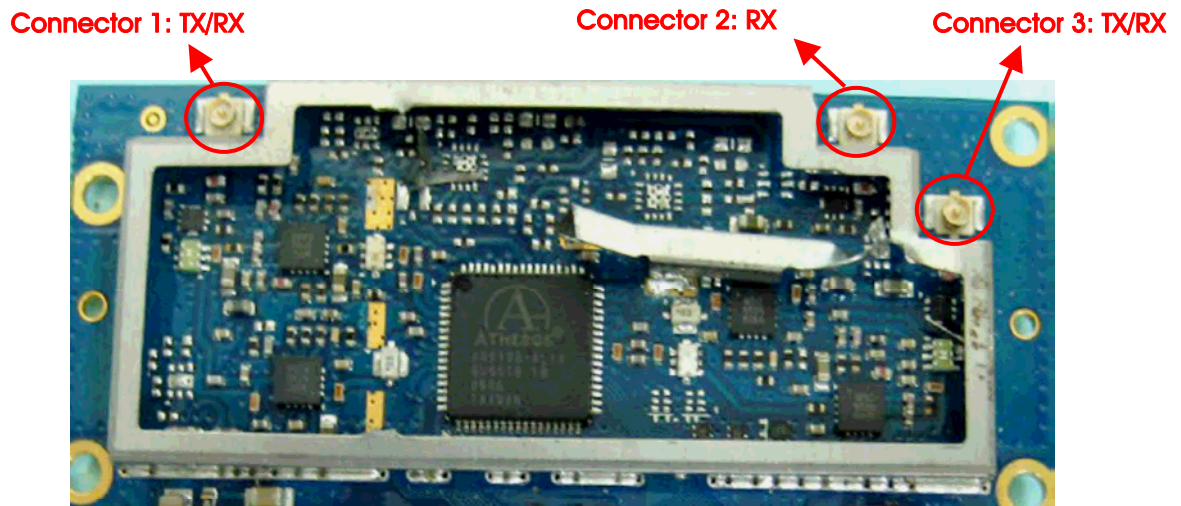

3.4. Table for Carrier Frequencies

For 2.4GHz Band

For IEEE 802.11b/g, use Channel 1~Channel 11.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1 | 2412 MHz | 7 | 2442 MHz |
| | 2 | 2417 MHz | 8 | 2447 MHz |
| | 3 | 2422 MHz | 9 | 2452 MHz |
| | 4 | 2427 MHz | 10 | 2457 MHz |
| | 5 | 2432 MHz | 11 | 2462 MHz |
| | 6 | 2437 MHz | - | - |

For 5GHz Band

For IEEE 802.11a, use Channel 149, 153, 157, 161, 165.

There are two bandwidth systems for IEEE 802.11n.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5725~5850 MHz Band 4 | 149 | 5745 MHz | 159 | 5795 MHz |
| | 151 | 5755 MHz | 161 | 5805 MHz |
| | 153 | 5765 MHz | 165 | 5825 MHz |
| | 157 | 5785 MHz | - | - |

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band

| Test Items | Mode | Data Rate | Channel | Antenna |
|-----------------------------------|-------------|-----------|---------|---------|
| AC Power Line Conducted Emissions | Normal Link | Auto | - | - |
| Peak Output Power | MCS8/20MHz | 13 Mbps | 1/6/11 | 8/9 |
| Power Spectral Density | MCS8/40MHz | 27 Mbps | 3/6/9 | 8/9 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 8/9 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 8/9 |
| 6dB Spectrum Bandwidth | MCS8/20MHz | 13 Mbps | 1/6/11 | 8/9 |
| | MCS8/40MHz | 27 Mbps | 3/6/9 | 8/9 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 8/9 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 8/9 |
| Radiated Emissions Below 1GHz | Normal Link | Auto | - | - |
| Radiated Emissions Above 1GHz | MCS8/20MHz | 13 Mbps | 1/6/11 | 8/9 |
| | MCS8/40MHz | 27 Mbps | 3/6/9 | 8/9 |
| | 11b/CCK | 1 Mbps | 1/6/11 | 8/9 |
| | 11g/BPSK | 6 Mbps | 1/6/11 | 8/9 |
| Band Edge Emissions | MCS8/20MHz | 13 Mbps | 1/11 | 8/9 |
| | MCS8/40MHz | 27 Mbps | 3/9 | 8/9 |
| | 11b/CCK | 1 Mbps | 1/11 | 8/9 |
| | 11g/BPSK | 6 Mbps | 1/11 | 8/9 |

For 5GHz Band

| Test Items | Mode | Data Rate | Channel | Antenna |
|--|-------------|-----------|-------------|---------|
| AC Power Line Conducted Emissions | Normal Link | Auto | - | - |
| Peak Output Power | MCS8/20MHz | 13 Mbps | 149/157/165 | 7 |
| | MCS8/40MHz | 27 Mbps | 151/159 | 7 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 7 |
| Power Spectral Density 6dB Spectrum Bandwidth | MCS8/20MHz | 13 Mbps | 149/157/165 | 7 |
| | MCS8/40MHz | 27 Mbps | 151/159 | 7 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 7 |
| Radiated Emissions Below 1GHz | Normal | Auto | - | - |
| Radiated Emissions Above 1GHz | MCS8/20MHz | 13 Mbps | 149/157/165 | 7 |
| | MCS8/40MHz | 27 Mbps | 151/159 | 7 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 7 |
| Band Edge Emissions | MCS8/20MHz | 13 Mbps | 149/157/165 | 7 |
| | MCS8/40MHz | 27 Mbps | 151/159 | 7 |
| | 11a/BPSK | 6 Mbps | 149/157/165 | 7 |

Note: For Conducted emission test and Radiated emission below 1GHz test, only the highest gain of antenna (Ant. 7) was selected to test and record in the report.

3.6. Table for Testing Locations

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
|---------------|---------------|----------|--------------|-------------|--------------|
| 03CH01-CB | SAC | Hsin Chu | 187376 | IC 4086D | - |
| CO01-CB | Conduction | Hsin Chu | 187376 | IC 4086D | - |
| TH01-CB | OVEN Room | Hsin Chu | - | - | - |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Class II Change & Multiple List

This product is an extension of original one reported under Sporton project number: FR972826AB / FR972826-01AB.

Below is the table for the change of the product with respect to the original one.

| Modifications | Description | Performance Checking |
|--------------------|---|--|
| Add three antennas | <p>There are six antennas in original report. (Ant.1 ~ Ant. 6)</p> <p>The antenna series No. 7 to No. 9 of this new project was increased.</p> <p>Ant. 7 is used as 5GHz band antenna.</p> <p>Ant. 8 and Ant. 9 are used as 2.4GHz Band antennas.</p> <p>The antenna gain for new project is higher than original project, so it was performed for all tests.</p> | <p>AC Power Conducted Emission</p> <p>Peak Output Power</p> <p>Power Spectral Density</p> <p>6dB Spectrum Bandwidth Measurement</p> <p>Radiated Emission</p> <p>Band Edge Emission</p> |

Note: There are totally 9 antennas based on this product (Please refer to Appendix C.)

3.8. Table for Supporting Units

| Support Unit | Brand | Model | FCC ID |
|--------------|--------|----------|------------|
| Notebook | DELL | D400 | E2K24GBRL |
| Mouse | iCooky | AMS0706W | DoC |
| Modem | ACEEX | DM1414 | IFAXDM1414 |
| Printer | EPSON | LQ-300+ | DoC |
| Notebook | DELL | D505 | E2K24GBRL |

3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 2.4GHz Band

<For Ant. 8>

Power Parameters of IEEE 802.11n

| Test Software Version | ART V1.3.2. | | |
|-----------------------|-------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| MCS8 20MHz | 14 | 18 | 14.5 |
| Frequency | 2422 MHz | 2437 MHz | 2452 MHz |
| MCS8 40MHz | 12.5 | 14 | 11 |

Power Parameters of IEEE 802.11b/g

| Test Software Version | ART V1.3.2. | | |
|-----------------------|-------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| IEEE 802.11b | 17.5 | 19 | 17 |
| IEEE 802.11g | 14.5 | 18.5 | 15 |

<For Ant. 9>

Power Parameters of IEEE 802.11n

| Test Software Version | ART V1.3.2. | | |
|-----------------------|-------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| MCS8 20MHz | 15 | 19 | 14.5 |
| Frequency | 2422 MHz | 2437 MHz | 2452 MHz |
| MCS8 40MHz | 13 | 15.5 | 12 |

Power Parameters of IEEE 802.11b/g

| Test Software Version | ART V1.3.2. | | |
|-----------------------|-------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| IEEE 802.11b | 18.5 | 19 | 18 |
| IEEE 802.11g | 15.5 | 18.5 | 15.5 |

For 5GHz Band

<For Ant. 7>

Power Parameters of IEEE 802.11n MCS8 20MHz

| Test Software Version | ART V1.3.2. | | |
|-----------------------|-------------|----------|----------|
| Frequency | 5745 MHz | 5785 MHz | 5825 MHz |
| MCS8 20MHz | 20 | 20 | 20.5 |

Power Parameters of IEEE 802.11n MCS8 40MHz

| Test Software Version | ART V1.3.2. | |
|-----------------------|-------------|----------|
| Frequency | 5755 MHz | 5795 MHz |
| MCS8 40MHz | 18 | 21.5 |

Power Parameters of IEEE 802.11a

| Test Software Version | ART V1.3.2. | | |
|-----------------------|-------------|----------|----------|
| Frequency | 5745 MHz | 5785 MHz | 5825 MHz |
| IEEE 802.11a | 20.0 | 20.0 | 20.5 |



During the test, "ART V1.3.2." under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.10. Test Configurations


3.10.1. Radiation Emissions Test Configuration

<For Ant. 7>

Test Configuration: 30MHz~1GHz

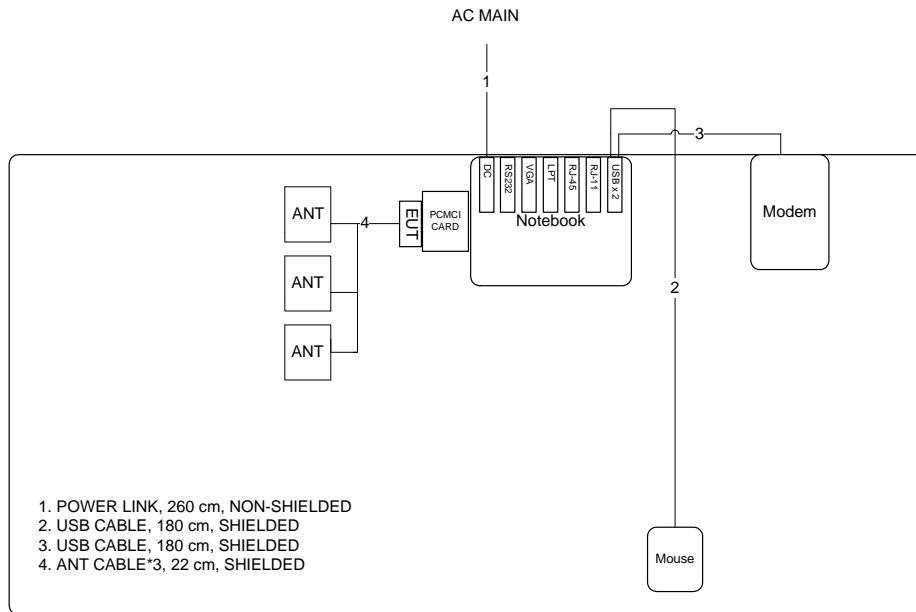


Test Configuration: above 1GHz

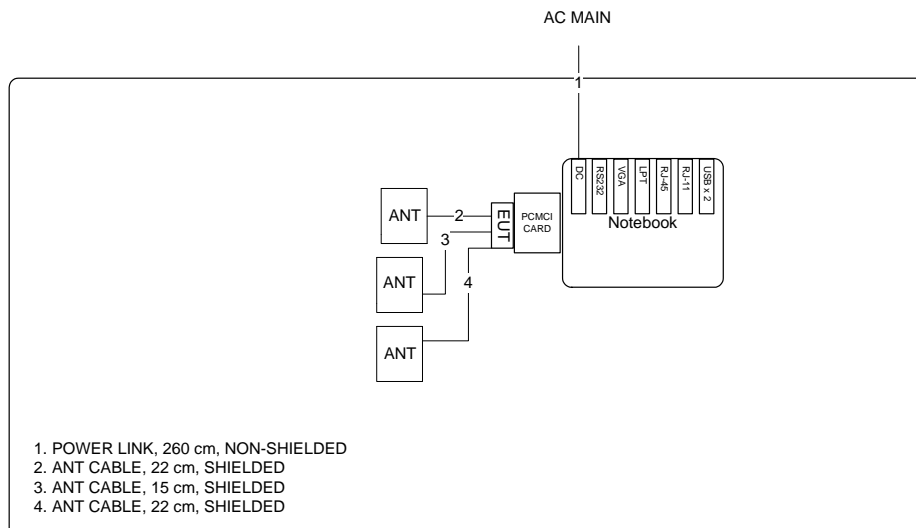


<For Ant. 8>

Test Configuration: above 1GHz


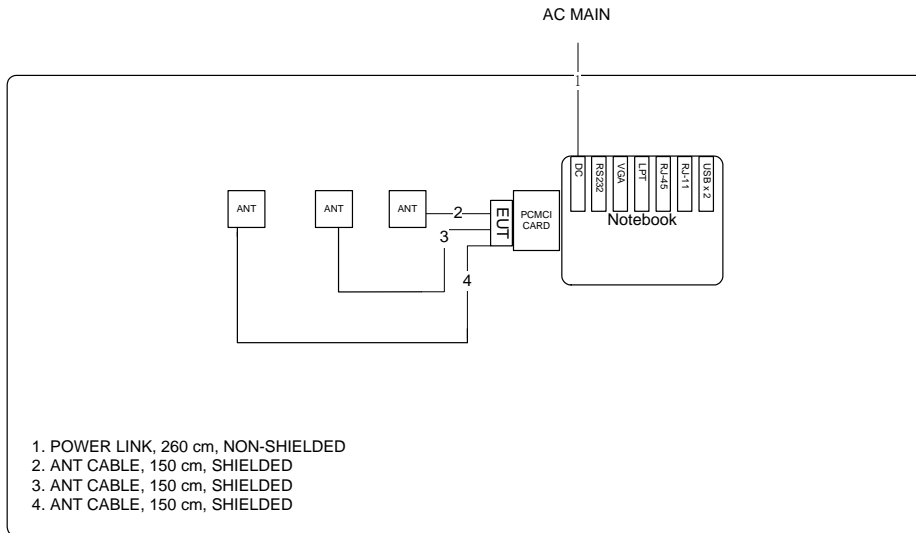


<For Ant. 9>

Test Configuration: above 1GHz

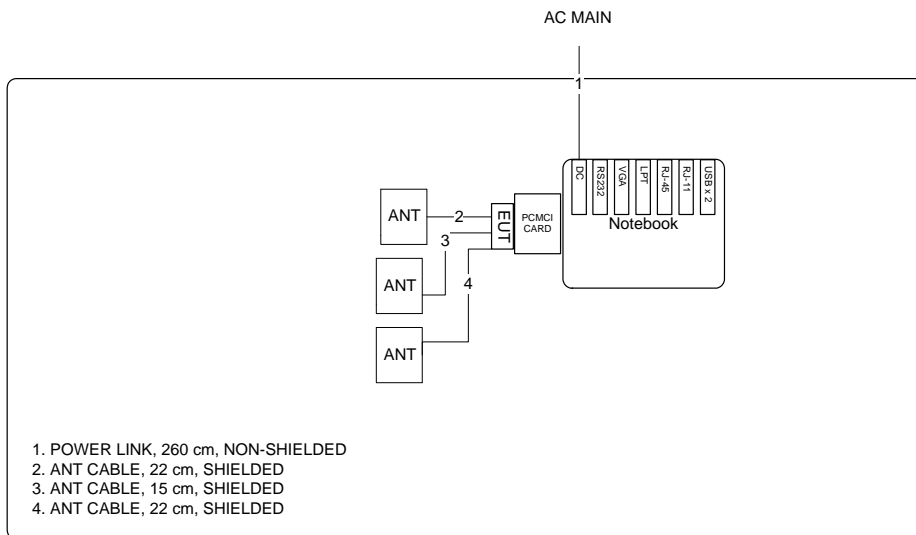

3.10.2.AC Power Line Conduction Emissions Test Configuration

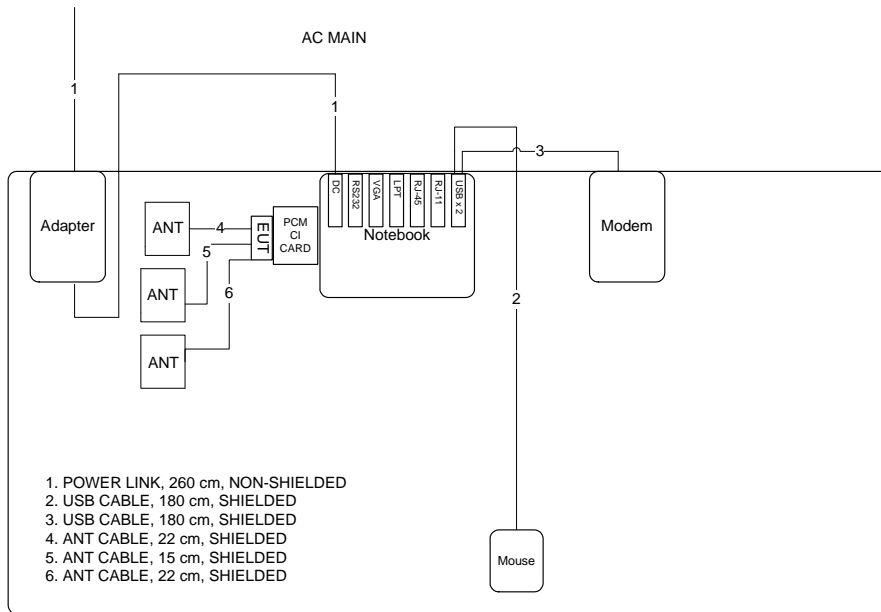

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5 | 66~56 | 56~46 |
| 0.5~5 | 56 | 46 |
| 5~30 | 60 | 50 |

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 KHz |

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

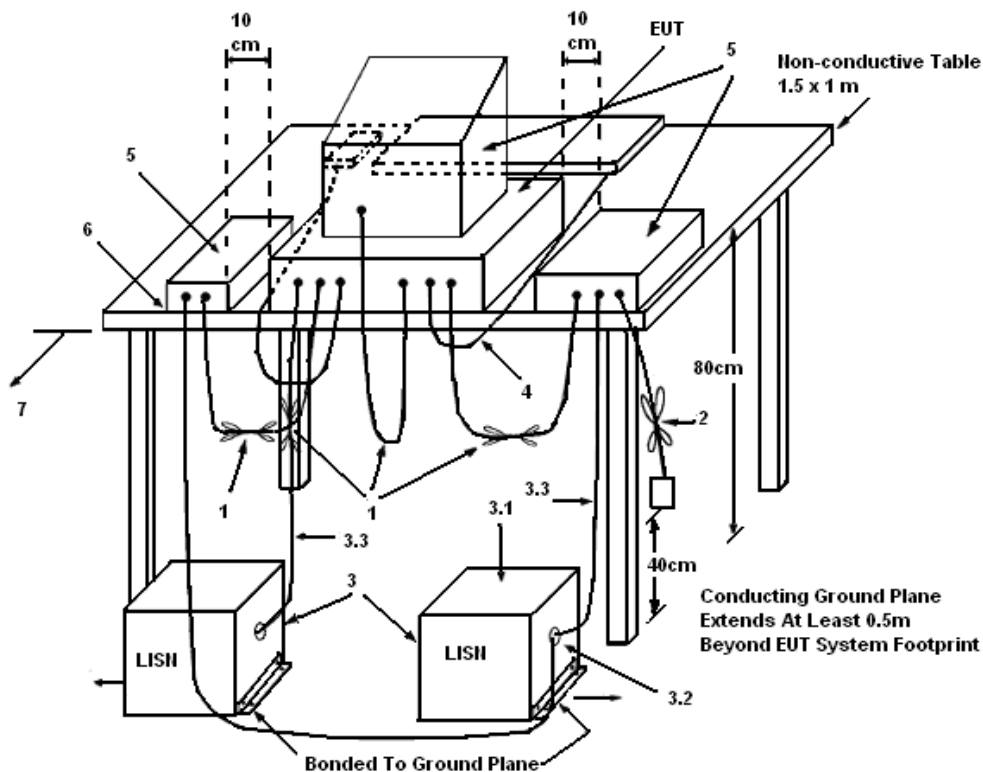

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

| | | | |
|---------------|----------------------|----------|------|
| Temperature | 24°C | Humidity | 62% |
| Test Engineer | Cloud Peng | Phase | Line |
| Configuration | Normal Link / Ant. 7 | | |

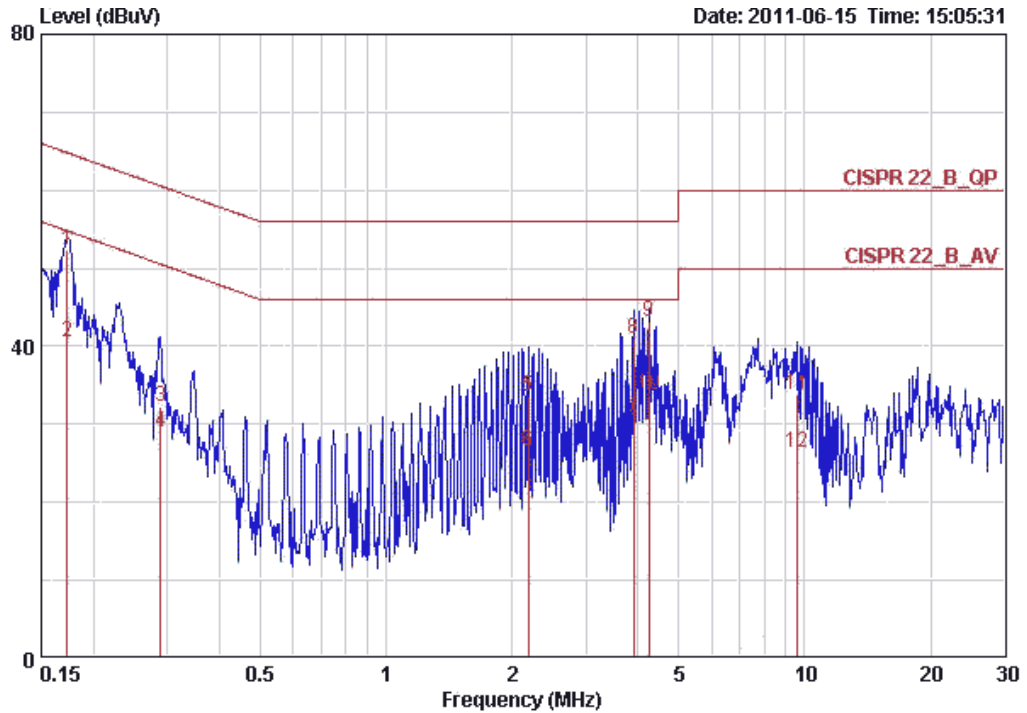

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.17307 | 52.32 | -12.49 | 64.81 | 52.06 | 0.06 | 0.20 | QP |
| 2 | 0.17307 | 40.57 | -14.24 | 54.81 | 40.31 | 0.06 | 0.20 | AVERAGE |
| 3 | 0.28935 | 32.17 | -28.37 | 60.54 | 31.93 | 0.04 | 0.20 | QP |
| 4 | 0.28935 | 29.04 | -21.50 | 50.54 | 28.80 | 0.04 | 0.20 | AVERAGE |
| 5 | 2.190 | 33.58 | -22.42 | 56.00 | 33.32 | 0.06 | 0.20 | QP |
| 6 | 2.190 | 26.70 | -19.30 | 46.00 | 26.44 | 0.06 | 0.20 | AVERAGE |
| 7 | 3.907 | 30.50 | -15.50 | 46.00 | 30.10 | 0.10 | 0.30 | AVERAGE |
| 8 | 3.907 | 40.97 | -15.03 | 56.00 | 40.57 | 0.10 | 0.30 | QP |
| 9 | 4.253 | 43.18 | -12.82 | 56.00 | 42.76 | 0.12 | 0.30 | QP |
| 10 | 4.253 | 33.75 | -12.25 | 46.00 | 33.33 | 0.12 | 0.30 | AVERAGE |
| 11 | 9.603 | 33.85 | -26.15 | 60.00 | 33.21 | 0.34 | 0.30 | QP |
| 12 | 9.603 | 26.31 | -23.69 | 50.00 | 25.67 | 0.34 | 0.30 | AVERAGE |

| | | | |
|---------------|----------------------|----------|---------|
| Temperature | 24°C | Humidity | 62% |
| Test Engineer | Cloud Peng | Phase | Neutral |
| Configuration | Normal Link / Ant. 7 | | |

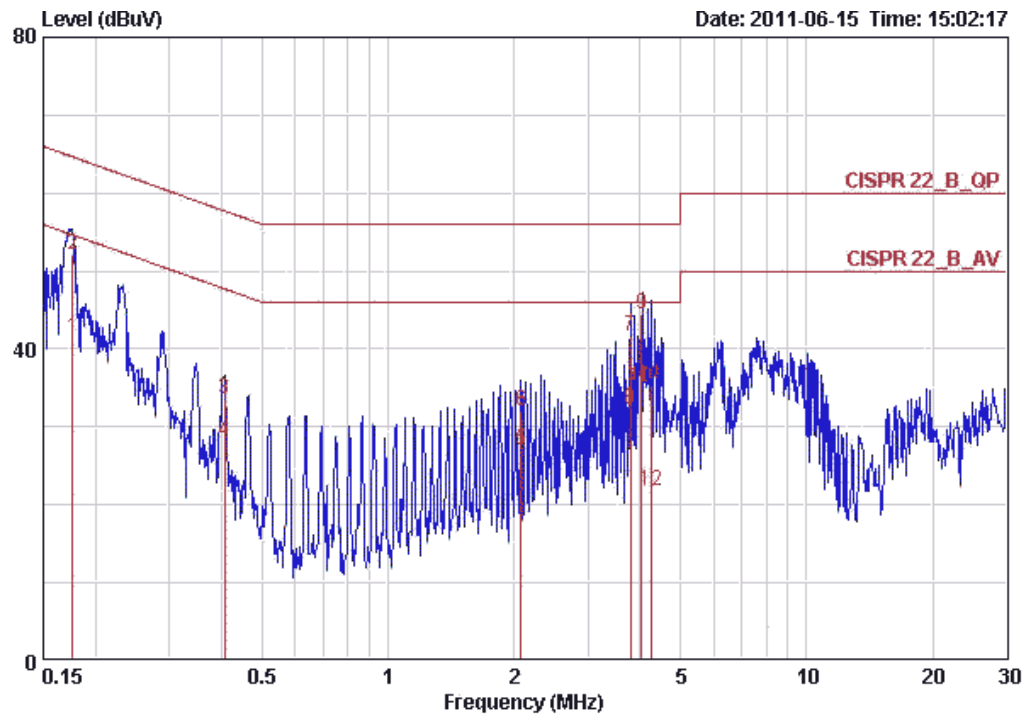

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|---------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.17584 | 41.50 | -13.18 | 54.68 | 41.21 | 0.09 | 0.20 | AVERAGE |
| 2 | 0.17584 | 52.07 | -12.61 | 64.68 | 51.78 | 0.09 | 0.20 | QP |
| 3 | 0.40615 | 33.56 | -24.17 | 57.73 | 33.29 | 0.07 | 0.20 | QP |
| 4 | 0.40615 | 28.02 | -19.71 | 47.73 | 27.75 | 0.07 | 0.20 | AVERAGE |
| 5 | 2.077 | 27.09 | -18.91 | 46.00 | 26.80 | 0.09 | 0.20 | AVERAGE |
| 6 | 2.077 | 32.09 | -23.91 | 56.00 | 31.80 | 0.09 | 0.20 | QP |
| 7 | 3.803 | 41.74 | -14.26 | 56.00 | 41.30 | 0.14 | 0.30 | QP |
| 8 | 3.803 | 32.20 | -13.80 | 46.00 | 31.76 | 0.14 | 0.30 | AVERAGE |
| 9 | 4.033 | 44.56 | -11.44 | 56.00 | 44.12 | 0.14 | 0.30 | QP |
| 10 | 4.033 | 35.09 | -10.91 | 46.00 | 34.65 | 0.14 | 0.30 | AVERAGE |
| 11 | 4.269 | 35.40 | -20.60 | 56.00 | 34.94 | 0.16 | 0.30 | QP |
| 12 | 4.269 | 21.83 | -24.17 | 46.00 | 21.37 | 0.16 | 0.30 | AVERAGE |

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB | 1MHz |
| VB | 3MHz |
| Detector | RMS |
| Trace | Max Hold |
| Sweep Time | Auto |

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout

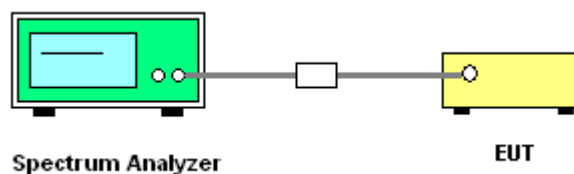

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Peak Output Power

<For Ant. 8>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 8 |

For 2.4GHz Band

Configuration IEEE 802.11n MCS8 20MHz

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 1 | 2412 MHz | 17.70 | 17.90 | 20.81 | 26.80 | Complies |
| 6 | 2437 MHz | 21.22 | 21.29 | 24.27 | 26.80 | Complies |
| 11 | 2462 MHz | 17.98 | 18.09 | 21.05 | 26.80 | Complies |

Configuration IEEE 802.11n MCS8 40MHz

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 3 | 2422 MHz | 15.26 | 15.57 | 18.43 | 26.80 | Complies |
| 6 | 2437 MHz | 16.87 | 17.12 | 20.01 | 26.80 | Complies |
| 9 | 2452 MHz | 13.98 | 14.11 | 17.06 | 26.80 | Complies |

| | | | |
|----------------------|-----------|-----------------------|-------------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11b/g / Ant. 8 |

For 2.4GHz Band
Configuration IEEE 802.11b

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 1 | 2412 MHz | 18.98 | 19.17 | 22.09 | 23.79 | Complies |
| 6 | 2437 MHz | 20.17 | 20.20 | 23.20 | 23.79 | Complies |
| 11 | 2462 MHz | 18.71 | 18.68 | 21.71 | 23.79 | Complies |

Configuration IEEE 802.11g

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 1 | 2412 MHz | 17.11 | 17.81 | 20.48 | 23.79 | Complies |
| 6 | 2437 MHz | 20.37 | 20.80 | 23.60 | 23.79 | Complies |
| 11 | 2462 MHz | 17.38 | 17.83 | 20.62 | 23.79 | Complies |

<For Ant. 9>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 9 |

For 2.4GHz Band

Configuration IEEE 802.11n MCS8 20MHz

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 1 | 2412 MHz | 18.37 | 18.83 | 21.62 | 26.65 | Complies |
| 6 | 2437 MHz | 22.20 | 22.32 | 25.27 | 26.65 | Complies |
| 11 | 2462 MHz | 18.14 | 18.09 | 21.13 | 26.65 | Complies |

Configuration IEEE 802.11n MCS8 40MHz

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 3 | 2422 MHz | 15.60 | 15.81 | 18.72 | 26.65 | Complies |
| 6 | 2437 MHz | 18.16 | 18.23 | 21.21 | 26.65 | Complies |
| 9 | 2452 MHz | 14.76 | 15.05 | 17.92 | 26.65 | Complies |

| | | | |
|----------------------|-----------|-----------------------|-------------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11b/g / Ant. 9 |

For 2.4GHz Band
Configuration IEEE 802.11b

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 1 | 2412 MHz | 20.08 | 20.19 | 23.15 | 23.64 | Complies |
| 6 | 2437 MHz | 20.17 | 20.20 | 23.20 | 23.64 | Complies |
| 11 | 2462 MHz | 19.81 | 19.69 | 22.76 | 23.64 | Complies |

Configuration IEEE 802.11g

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 1 | 2412 MHz | 18.81 | 17.79 | 21.34 | 23.64 | Complies |
| 6 | 2437 MHz | 20.37 | 20.80 | 23.60 | 23.64 | Complies |
| 11 | 2462 MHz | 18.08 | 18.60 | 21.36 | 23.64 | Complies |

<For Ant. 7>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 7 |

For 5GHz Band

Configuration IEEE 802.11n MCS8 20MHz

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 7-1 | Ant. 7-3 | Total | | |
| 149 | 5745 MHz | 18.42 | 22.21 | 23.73 | 26.55 | Complies |
| 157 | 5785 MHz | 17.72 | 21.99 | 23.37 | 26.55 | Complies |
| 165 | 5825 MHz | 18.32 | 19.96 | 22.23 | 26.55 | Complies |

Configuration IEEE 802.11n MCS8 40MHz

| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 7-1 | Ant. 7-3 | Total | | |
| 151 | 5755 MHz | 16.65 | 17.71 | 20.22 | 26.55 | Complies |
| 159 | 5795 MHz | 19.56 | 20.85 | 23.26 | 26.55 | Complies |

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11a / Ant. 7 |

For 5GHz Band

Configuration IEEE 802.11a


| Channel | Frequency | Conducted Output Power (dBm) | | | Max. Limit (dBm) | Result |
|---------|-----------|------------------------------|----------|-------|------------------|----------|
| | | Ant. 7-1 | Ant. 7-3 | Total | | |
| 149 | 5745 MHz | 18.29 | 21.85 | 23.44 | 23.53 | Complies |
| 157 | 5785 MHz | 17.30 | 22.04 | 23.30 | 23.53 | Complies |
| 165 | 5825 MHz | 21.54 | 19.06 | 23.48 | 23.53 | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


<For Ant. 8>

Channel Output Power Plot on Configuration 802.11n MCS8 20MHz Ant. 8-1 / 2437 MHz

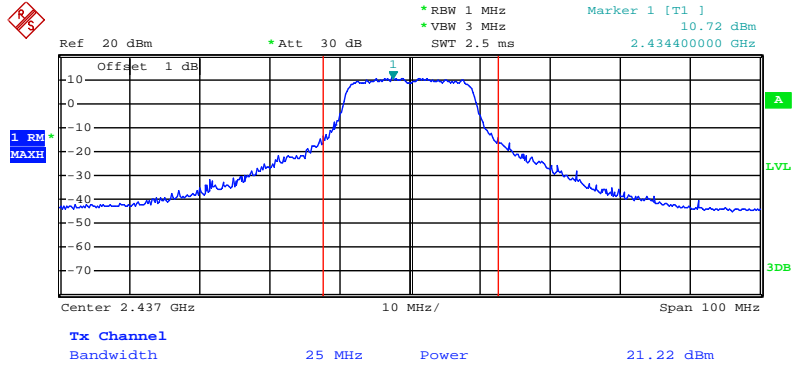


Date: 21.JUL.2011 00:02:30

Channel Output Power Plot on Configuration 802.11n MCS8 20MHz Ant. 8-3 / 2437 MHz

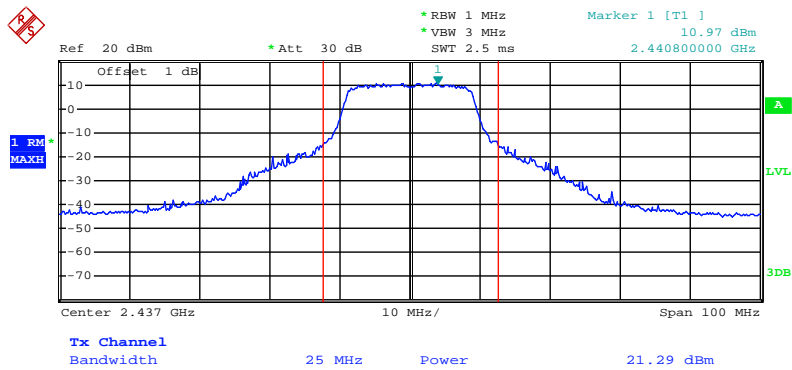


Date: 21.JUL.2011 00:03:43

Channel Output Power Plot on Configuration 802.11n MCS8 40MHz Ant. 8-1 / 2437 MHz

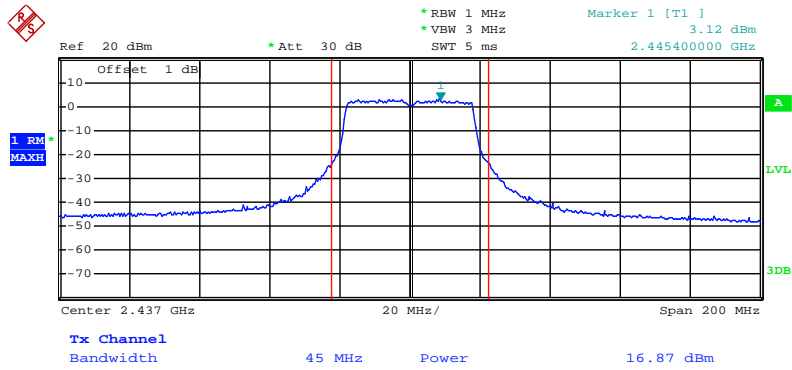


Date: 21.JUL.2011 00:21:11

Channel Output Power Plot on Configuration 802.11n MCS8 40MHz Ant. 8-3 / 2437 MHz

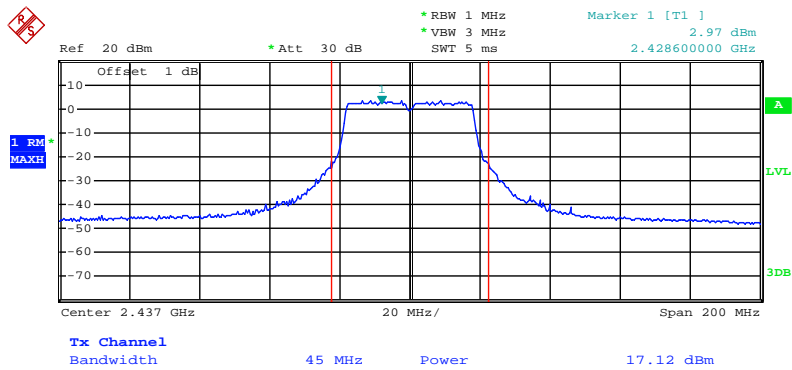


Date: 21.JUL.2011 00:19:35

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 8-1 / 2437 MHz

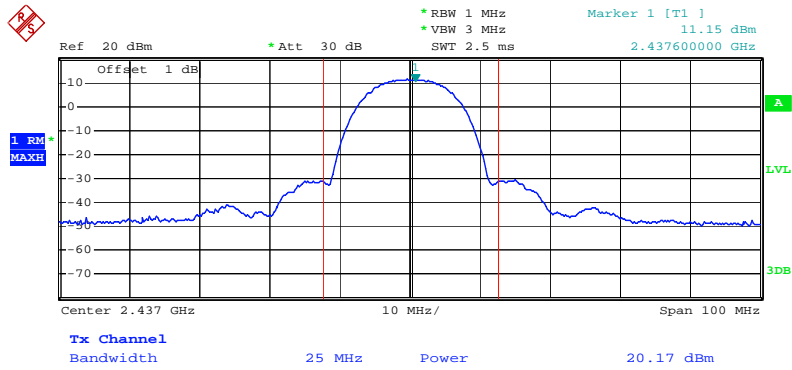


Date: 11.JUN.2011 14:07:13

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 8-3 / 2437 MHz

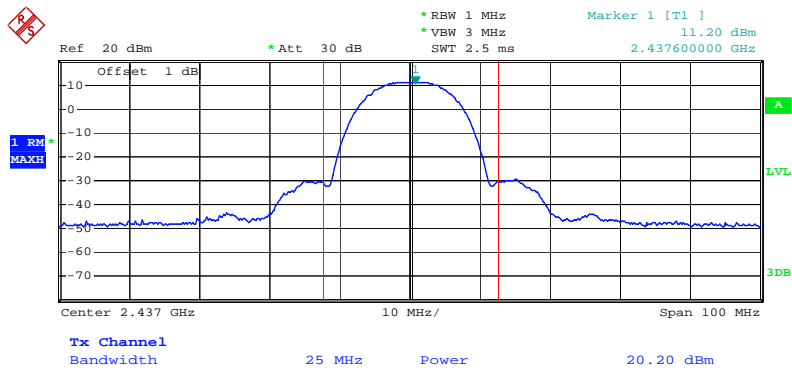


Date: 11.JUN.2011 14:08:09

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 8-1 / 2437 MHz

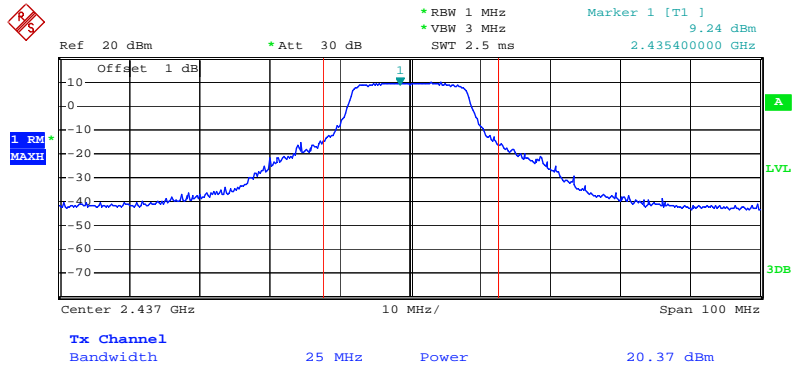

Date: 11.JUN.2011 14:27:21


Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 8-3 / 2437 MHz

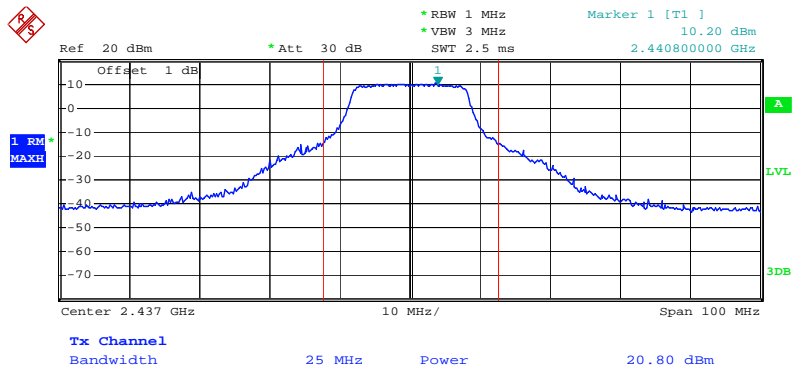

Date: 11.JUN.2011 14:27:50


<For Ant. 9>

Channel Output Power Plot on Configuration 802.11n MCS8 20MHz Ant. 9-1 / 2437 MHz

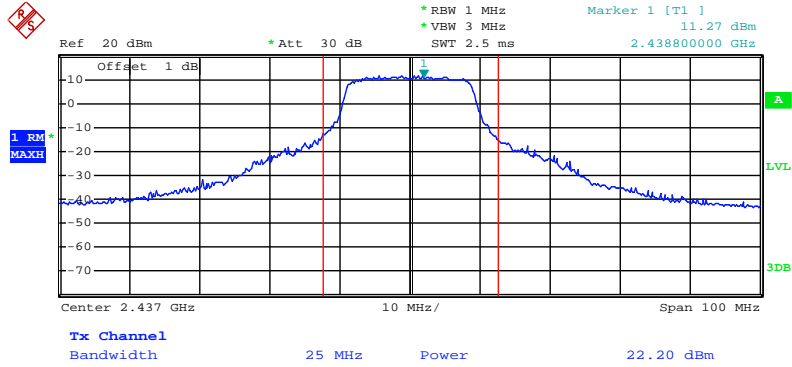


Date: 21.JUL.2011 00:43:41

Channel Output Power Plot on Configuration 802.11n MCS8 20MHz Ant. 9-3 / 2437 MHz

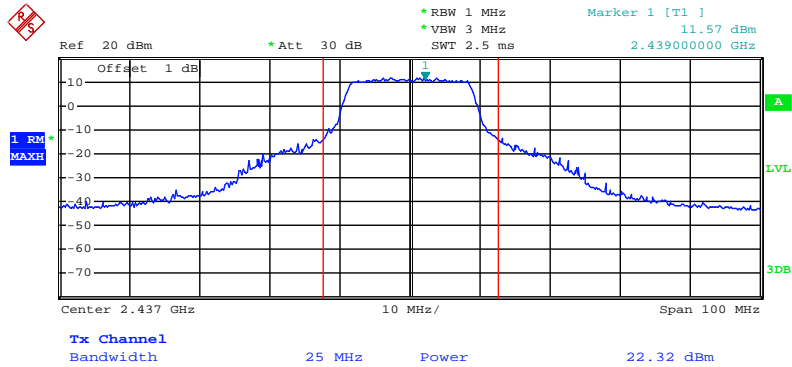


Date: 21.JUL.2011 00:44:38

Channel Output Power Plot on Configuration 802.11n MCS8 40MHz Ant. 9-1 / 2437 MHz

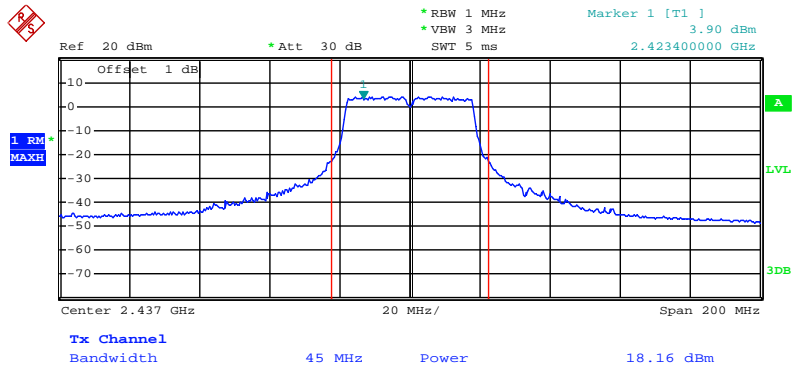

Date: 21.JUL.2011 00:34:28


Channel Output Power Plot on Configuration 802.11n MCS8 40MHz Ant. 9-3 / 2437 MHz

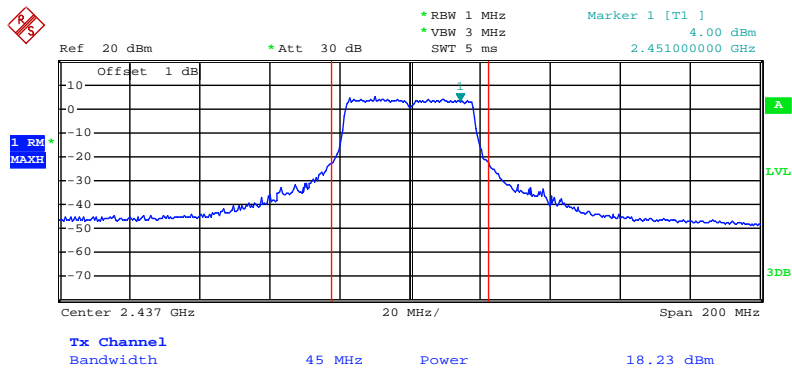

Date: 21.JUL.2011 00:33:28


<For Ant. 7>

Channel Output Power Plot on Configuration 802.11n MCS8 20MHz Ant. 7-1 / 5745 MHz

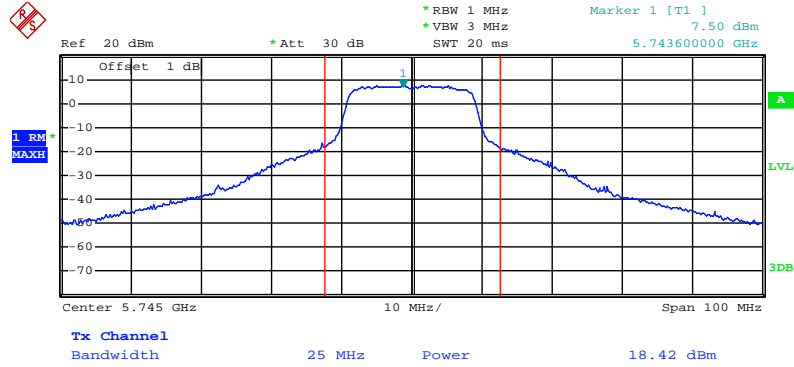


Date: 14.JUN.2011 18:38:56

Channel Output Power Plot on Configuration 802.11n MCS8 20MHz Ant. 7-3 / 5745 MHz

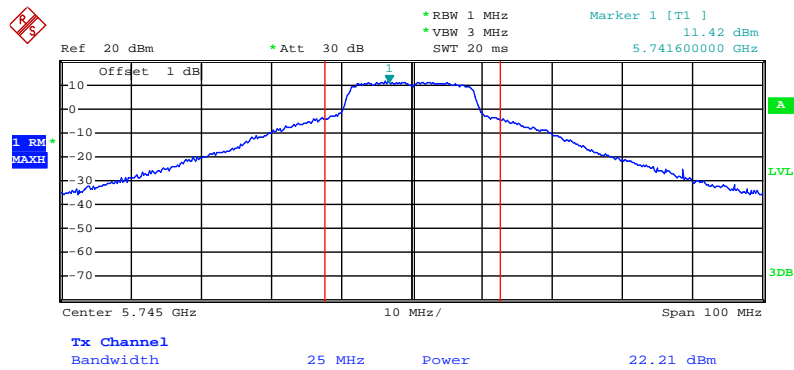


Date: 14.JUN.2011 18:39:24

Channel Output Power Plot on Configuration 802.11n MCS8 40MHz Ant. 7-1 / 5795 MHz

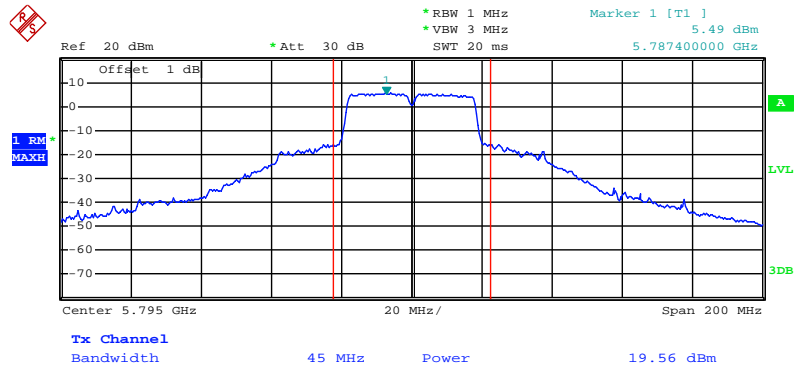

Date: 14.JUN.2011 18:29:18

Channel Output Power Plot on Configuration 802.11n MCS8 40MHz Ant. 7-3 / 5795 MHz

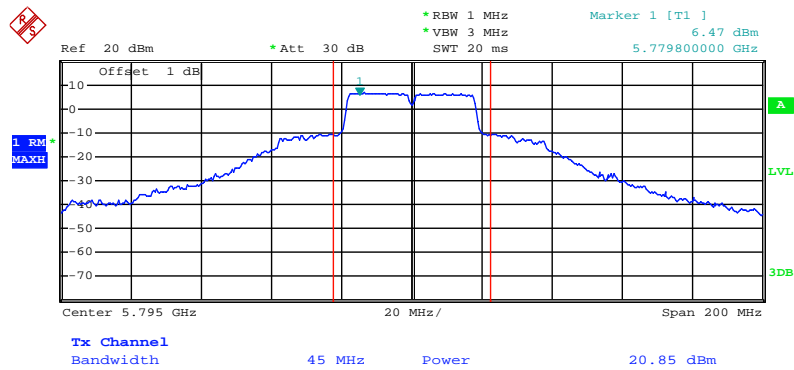

Date: 14.JUN.2011 18:30:13

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| Span Frequency | 30 kHz |
| RB | 3 kHz |
| VB | 30 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | 10s |

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. When measuring power spectral density with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

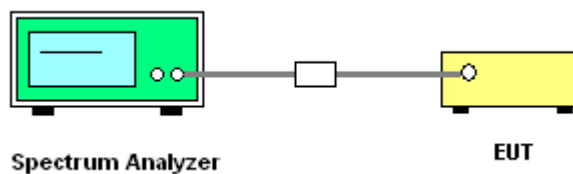

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

<For Ant. 8>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 8 |

For 2.4GHz Band

Configuration IEEE 802.11n MCS8 20MHz

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 1 | 2412 MHz | -9.72 | -9.93 | -6.81 | 8.00 | Complies |
| 6 | 2437 MHz | -4.40 | -3.29 | -0.80 | 8.00 | Complies |
| 11 | 2462 MHz | -8.13 | -7.91 | -5.01 | 8.00 | Complies |

Configuration IEEE 802.11n MCS8 40MHz

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 3 | 2422 MHz | -5.98 | -7.12 | -3.50 | 8.00 | Complies |
| 6 | 2437 MHz | -11.18 | -6.37 | -5.13 | 8.00 | Complies |
| 9 | 2452 MHz | -7.27 | -10.25 | -5.50 | 8.00 | Complies |

| | | | |
|---------------|-----------|----------------|-------------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11b/g / Ant. 8 |

For 2.4GHz Band

Configuration IEEE 802.11b

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 1 | 2412 MHz | -4.67 | -3.69 | -1.14 | 1.79 | Complies |
| 6 | 2437 MHz | -2.96 | -3.82 | -0.36 | 1.79 | Complies |
| 11 | 2462 MHz | -5.42 | -5.06 | -2.23 | 1.79 | Complies |

Configuration IEEE 802.11g

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 8-1 | Ant. 8-3 | Total | | |
| 1 | 2412 MHz | -7.89 | -9.78 | -5.72 | 1.79 | Complies |
| 6 | 2437 MHz | 0.16 | -6.65 | 0.98 | 1.79 | Complies |
| 11 | 2462 MHz | -8.56 | -8.70 | -5.62 | 1.79 | Complies |

<For Ant. 9>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 9 |

For 2.4GHz Band

Configuration IEEE 802.11n MCS8 20MHz

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 1 | 2412 MHz | -9.22 | -9.82 | -6.50 | 8.00 | Complies |
| 6 | 2437 MHz | -5.51 | -3.39 | -1.31 | 8.00 | Complies |
| 11 | 2462 MHz | -5.89 | -9.14 | -4.21 | 8.00 | Complies |

Configuration IEEE 802.11n MCS8 40MHz

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 3 | 2422 MHz | -4.93 | -7.81 | -3.13 | 8.00 | Complies |
| 6 | 2437 MHz | -7.60 | -6.21 | -3.84 | 8.00 | Complies |
| 9 | 2452 MHz | -5.03 | -10.10 | -3.85 | 8.00 | Complies |

| | | | |
|---------------|-----------|----------------|-------------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11b/g / Ant. 9 |

For 2.4GHz Band

Configuration IEEE 802.11b

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 1 | 2412 MHz | -3.88 | -3.90 | -0.88 | 1.64 | Complies |
| 6 | 2437 MHz | -2.96 | -3.82 | -0.36 | 1.64 | Complies |
| 11 | 2462 MHz | -3.30 | -3.75 | -0.51 | 1.64 | Complies |

Configuration IEEE 802.11g

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 9-1 | Ant. 9-3 | Total | | |
| 1 | 2412 MHz | -8.91 | -7.49 | -5.13 | 1.64 | Complies |
| 6 | 2437 MHz | 0.16 | -6.65 | 0.98 | 1.64 | Complies |
| 11 | 2462 MHz | -2.57 | -7.53 | -1.37 | 1.64 | Complies |

<For Ant. 7>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 7 |

For 5GHz Band

Configuration IEEE 802.11n MCS8 20MHz

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 7-1 | Ant. 7-3 | Total | | |
| 149 | 5745 MHz | -7.12 | -3.94 | -2.23 | 8.00 | Complies |
| 157 | 5785 MHz | -8.06 | -4.35 | -2.81 | 8.00 | Complies |
| 165 | 5825 MHz | -7.22 | -5.25 | -3.11 | 8.00 | Complies |

Configuration IEEE 802.11n MCS8 40MHz

| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 7-1 | Ant. 7-3 | Total | | |
| 151 | 5755 MHz | -12.94 | -9.77 | -8.06 | 8.00 | Complies |
| 159 | 5795 MHz | -8.66 | -8.70 | -5.67 | 8.00 | Complies |

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11a / Ant. 7 |

For 5GHz Band

Configuration IEEE 802.11a


| Channel | Frequency | Power Density (dBm/3kHz) | | | Max. Limit (dBm/3kHz) | Result |
|---------|-----------|--------------------------|----------|-------|-----------------------|----------|
| | | Ant. 7-1 | Ant. 7-3 | Total | | |
| 149 | 5745 MHz | -6.85 | -2.77 | -1.34 | 1.53 | Complies |
| 157 | 5785 MHz | -7.59 | -3.15 | -1.82 | 1.53 | Complies |
| 165 | 5825 MHz | -6.45 | -5.58 | -2.98 | 1.53 | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


<For Ant. 8>

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 8-1 / 2437 MHz

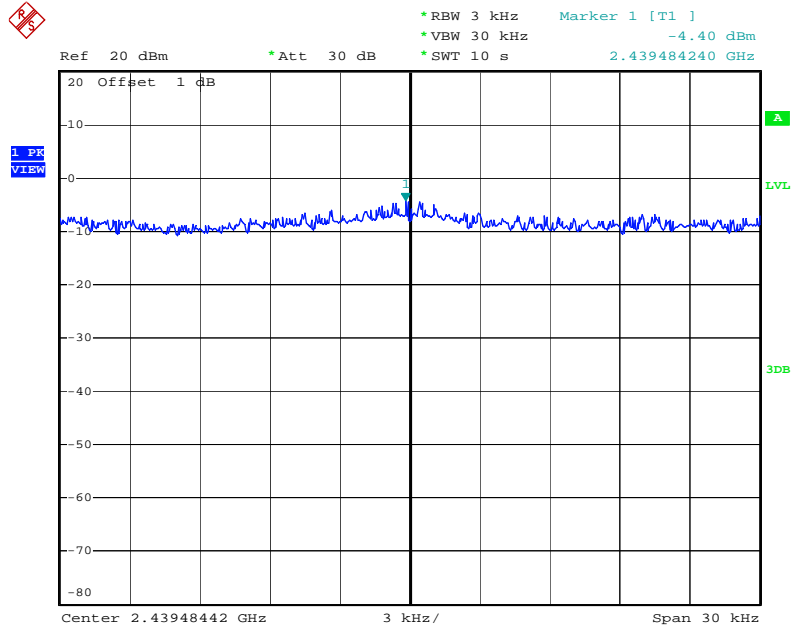


Date: 11.JUN.2011 16:16:20

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 8-3 / 2437 MHz

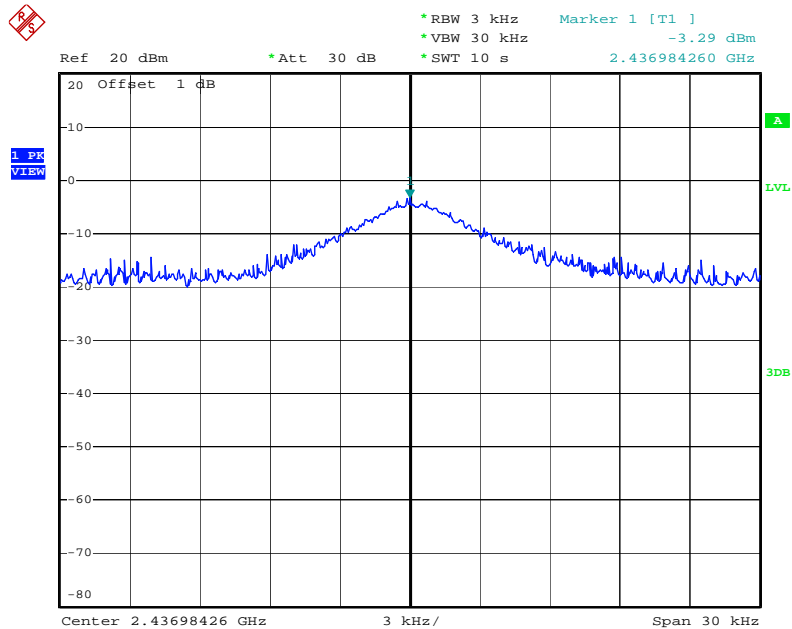


Date: 11.JUN.2011 16:21:03

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 8-1 / 2422 MHz

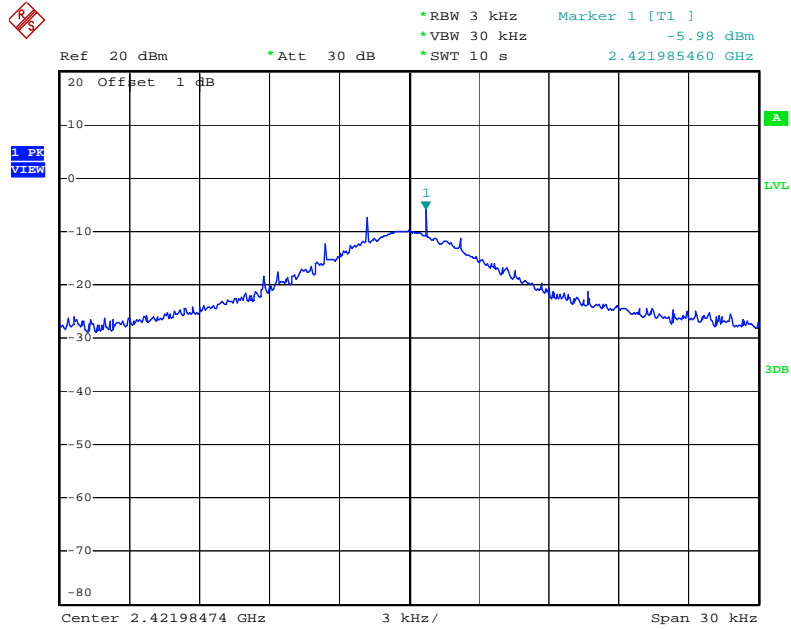


Date: 11.JUN.2011 15:35:09

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 8-3 / 2422 MHz

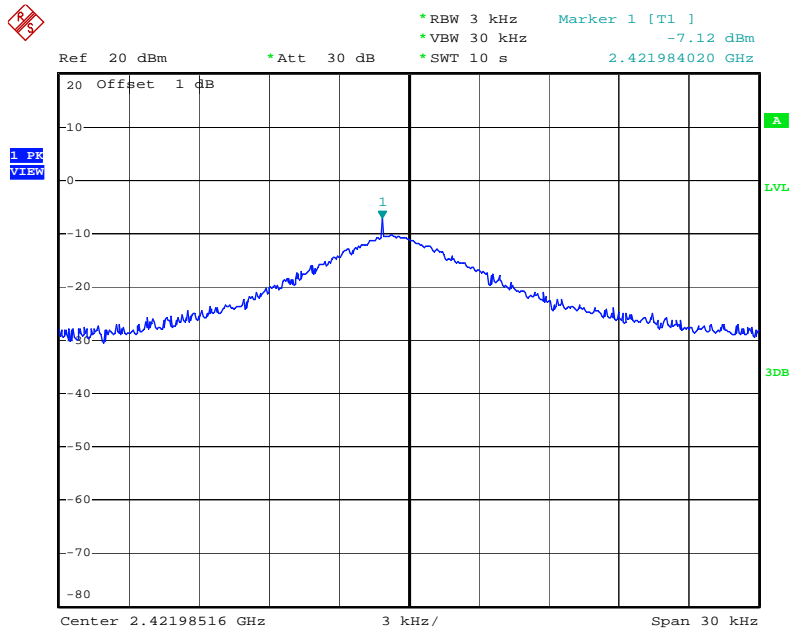


Date: 11.JUN.2011 15:37:17

Power Density Plot on Configuration IEEE 802.11b / Ant. 8-1 / 2437 MHz

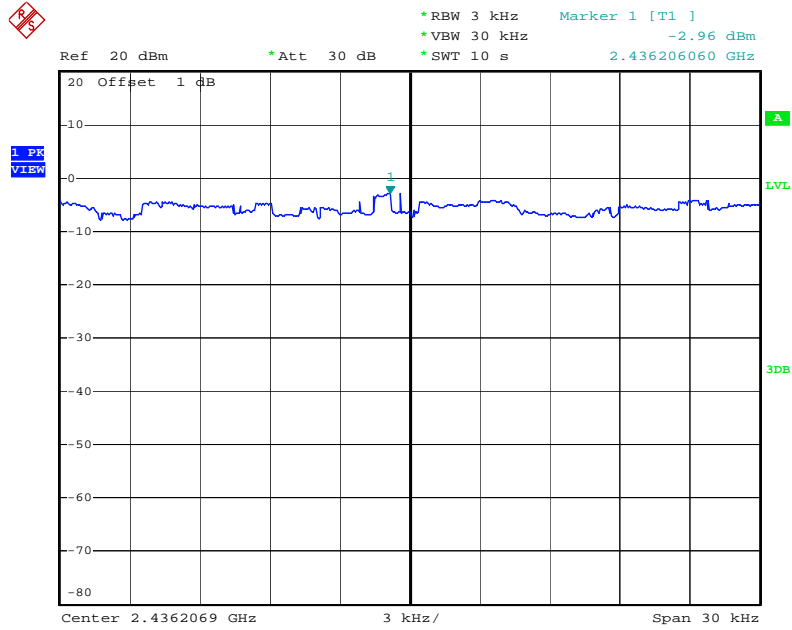


Date: 11.JUN.2011 17:03:12

Power Density Plot on Configuration IEEE 802.11b / Ant. 8-3 / 2437 MHz

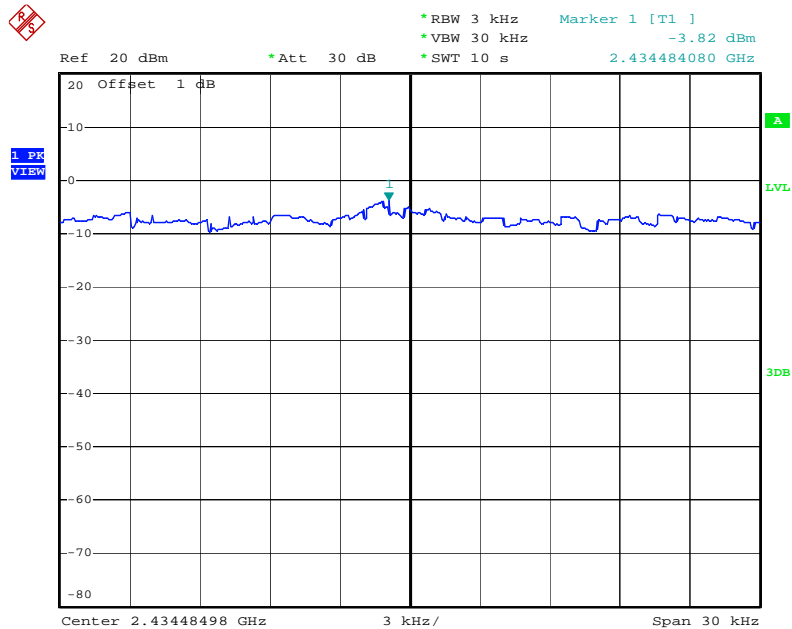


Date: 11.JUN.2011 17:04:58

Power Density Plot on Configuration IEEE 802.11g / Ant. 8-1 / 2437 MHz

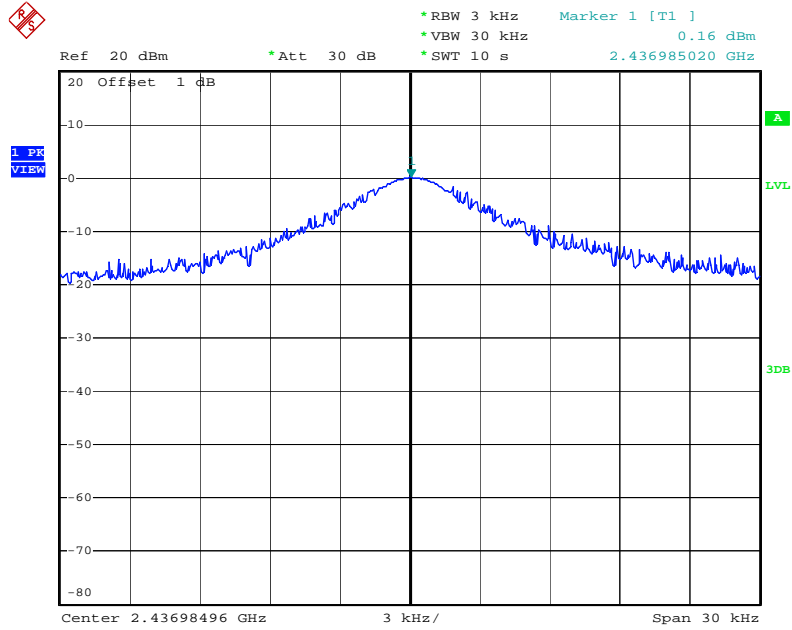

Date: 11.JUN.2011 16:42:37


Power Density Plot on Configuration IEEE 802.11g / Ant. 8-3 / 2437 MHz

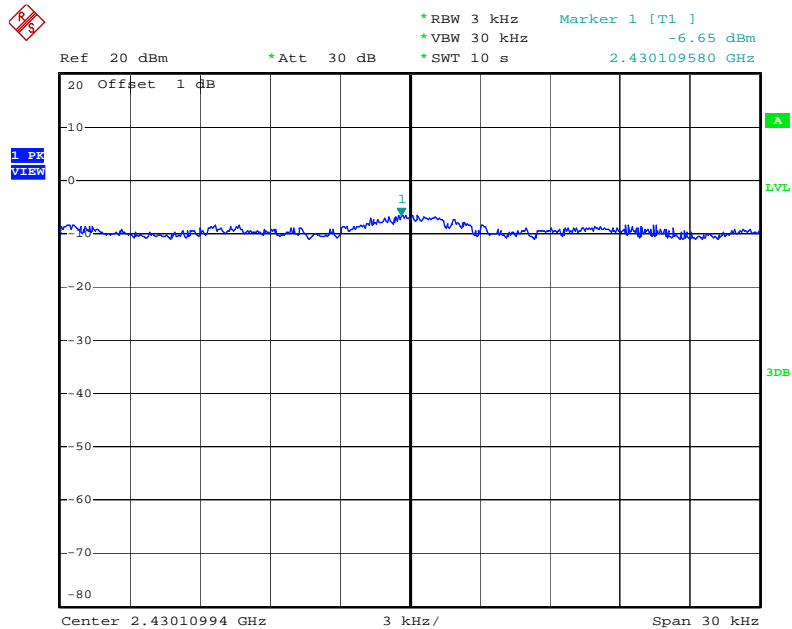

Date: 11.JUN.2011 16:40:51


<For Ant. 9>

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 9-1 / 2437 MHz

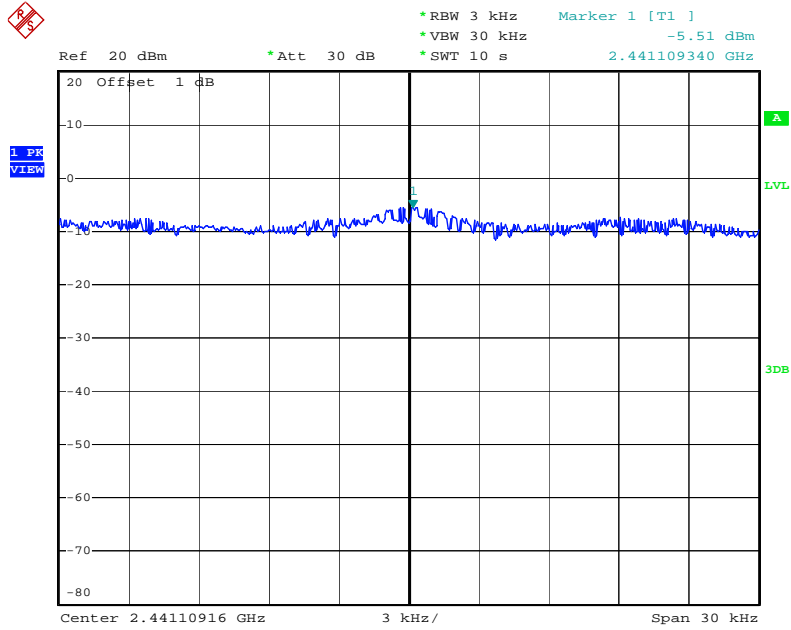


Date: 11.JUN.2011 16:14:21

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 9-3 / 2437 MHz

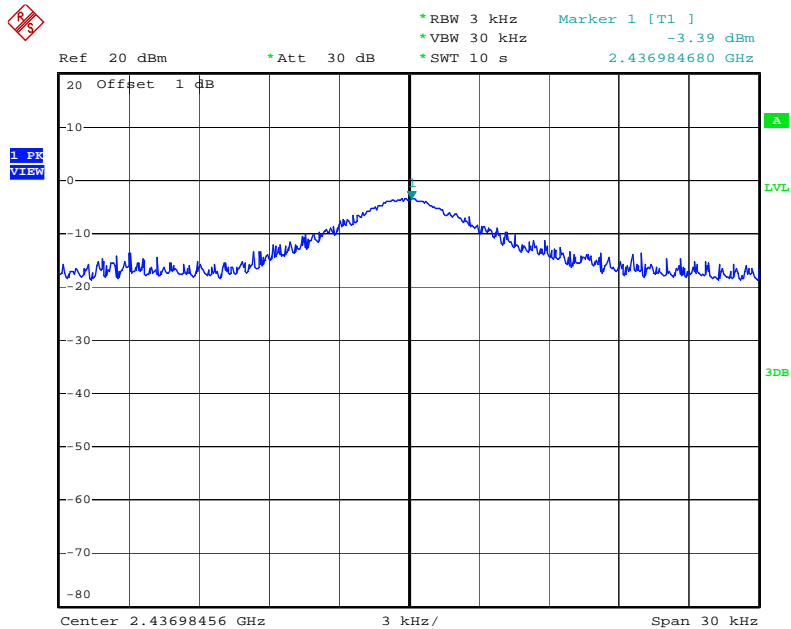


Date: 11.JUN.2011 16:12:21

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 9-1 / 2422 MHz

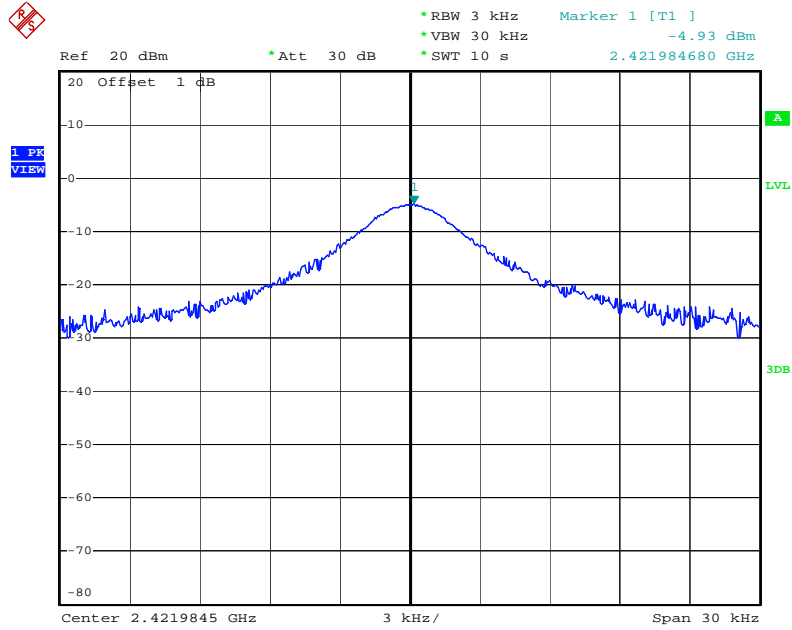


Date: 11.JUN.2011 15:56:43

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 9-3 / 2422 MHz

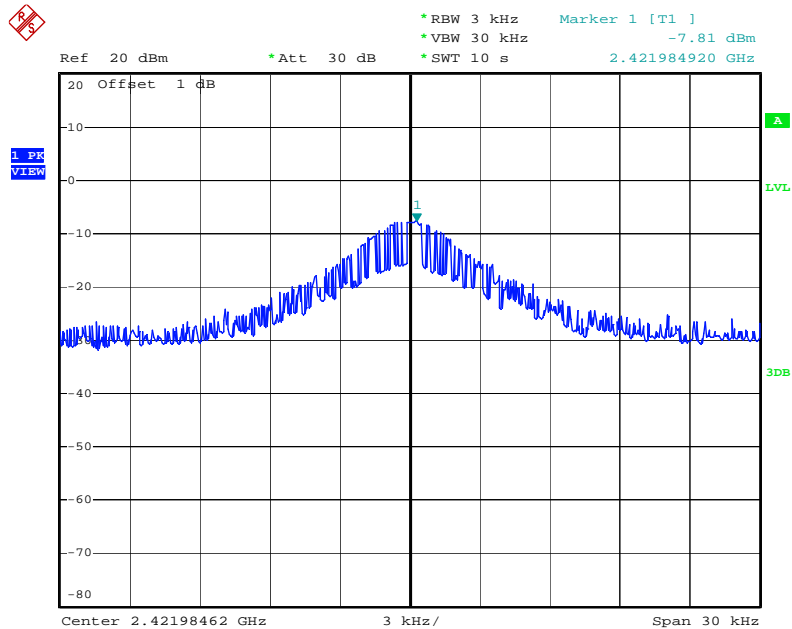


Date: 11.JUN.2011 15:54:48

Power Density Plot on Configuration IEEE 802.11b / Ant. 9-1 / 2437 MHz

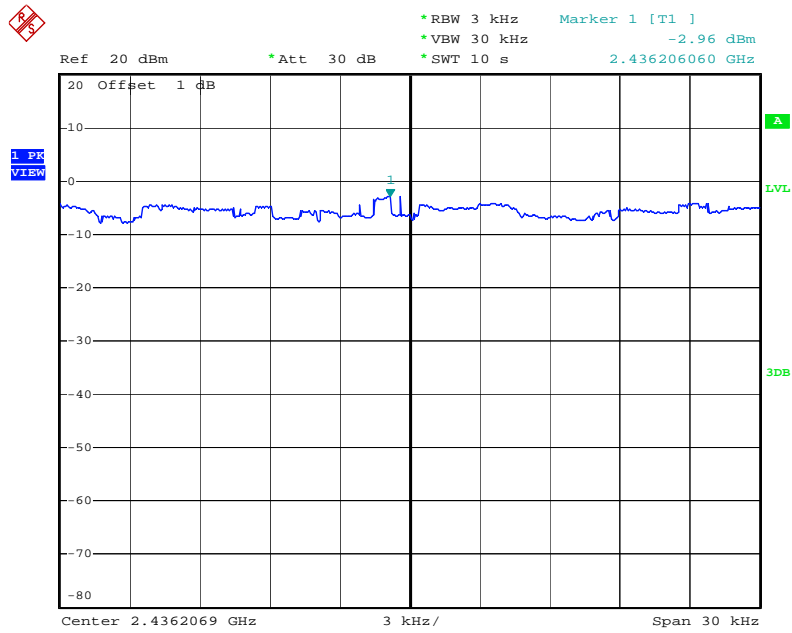


Date: 11.JUN.2011 17:03:12

Power Density Plot on Configuration IEEE 802.11b / Ant. 9-3 / 2437 MHz

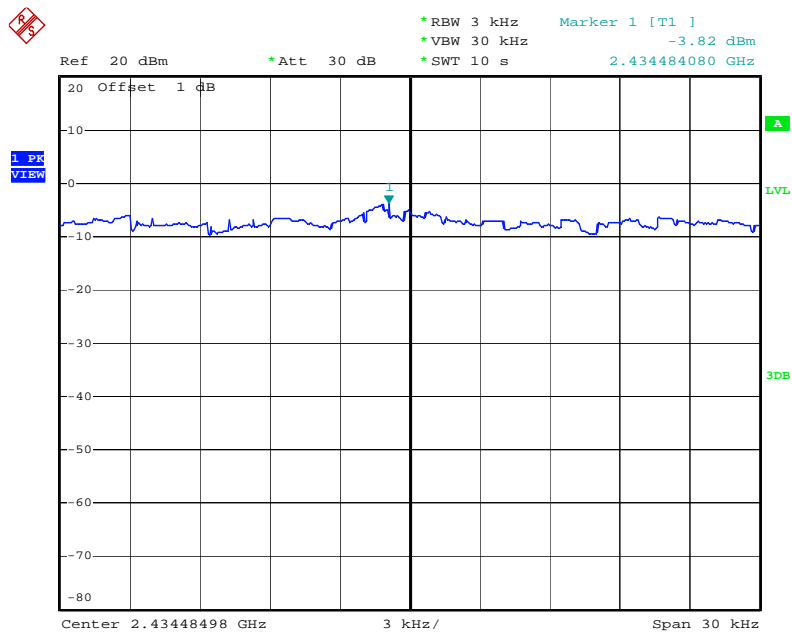


Date: 11.JUN.2011 17:04:58

Power Density Plot on Configuration IEEE 802.11g / Ant. 9-1 / 2437 MHz

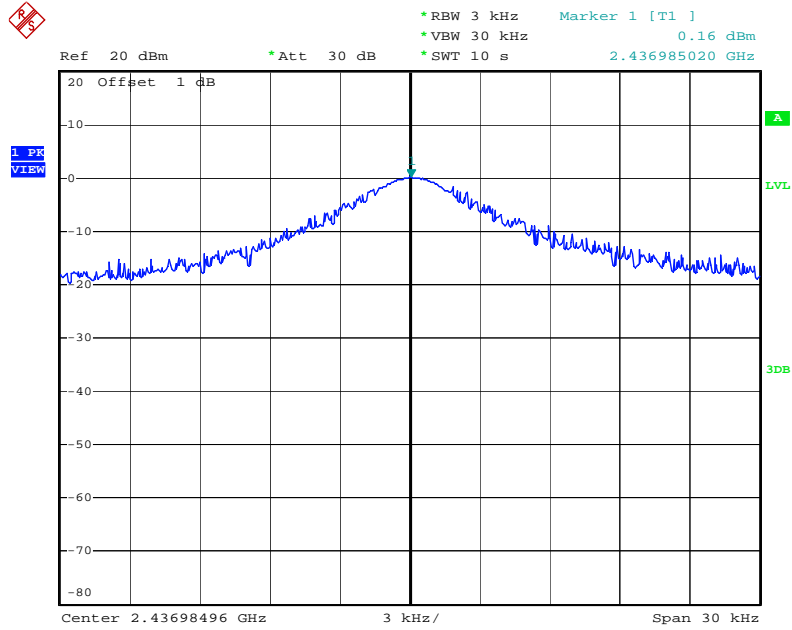

Date: 11.JUN.2011 16:42:37


Power Density Plot on Configuration IEEE 802.11g / Ant. 9-3 / 2437 MHz

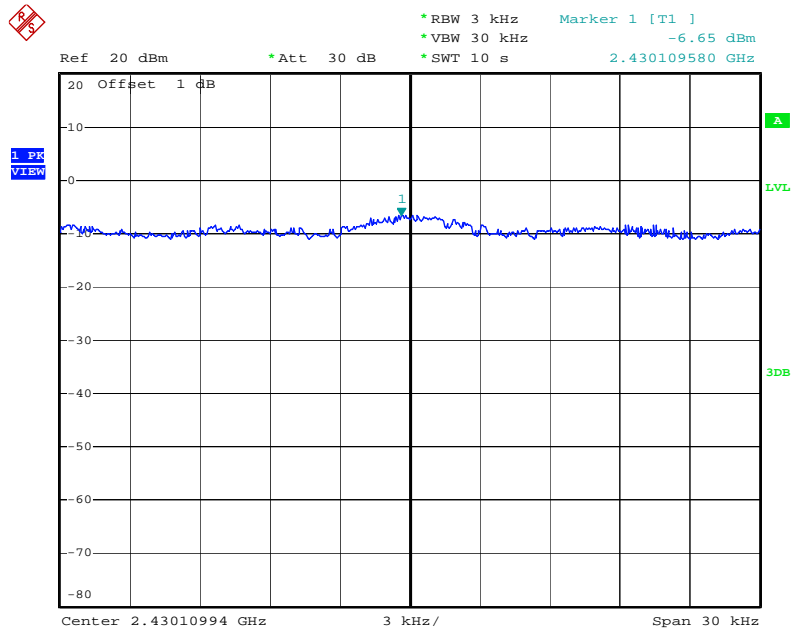

Date: 11.JUN.2011 16:40:51


<For Ant. 7>

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 7-1 / 5745 MHz

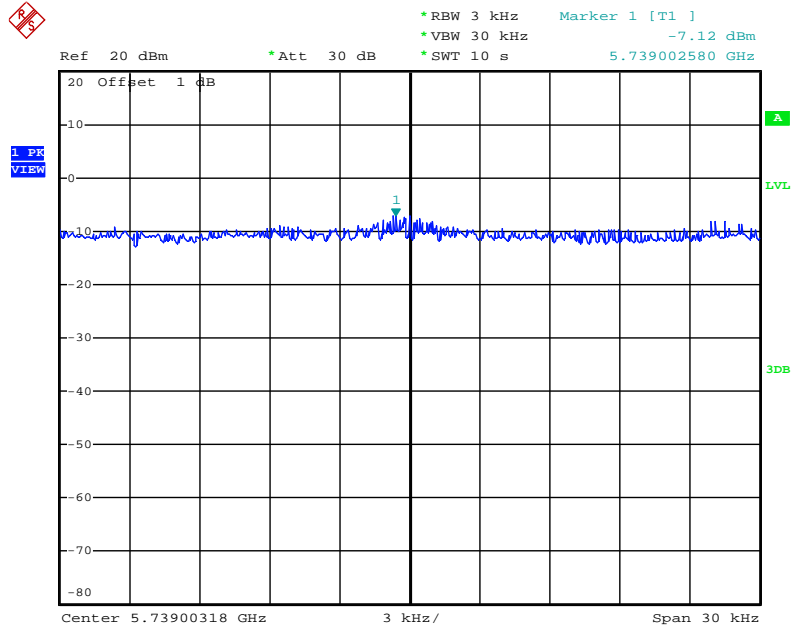


Date: 14.JUN.2011 19:29:57

Power Density Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 7-3 / 5745 MHz

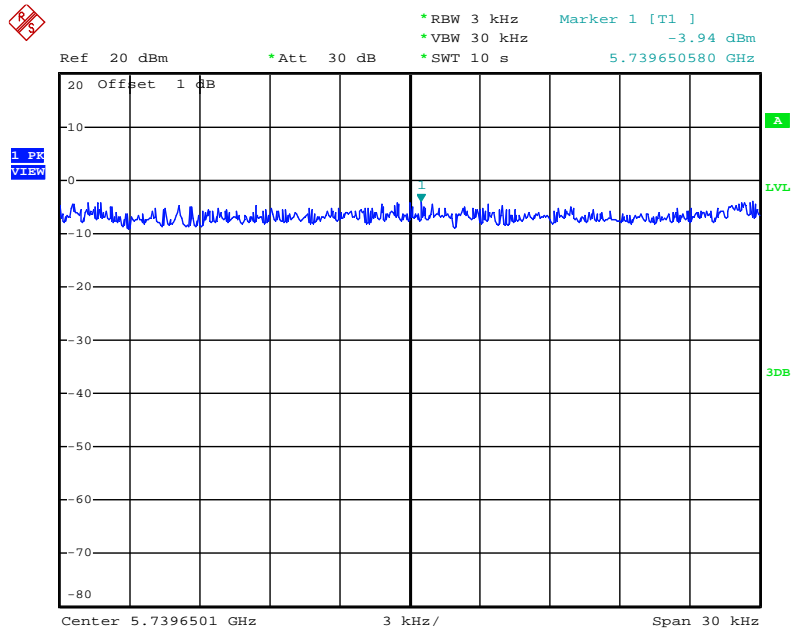


Date: 14.JUN.2011 19:27:00

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 7-1 / 5795 MHz

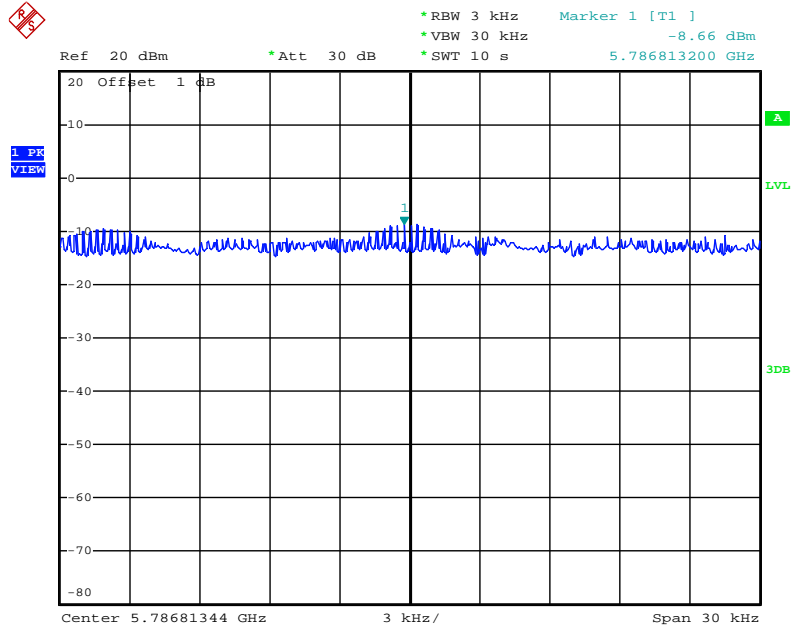


Date: 14.JUN.2011 19:50:24

Power Density Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 7-3 / 5795 MHz

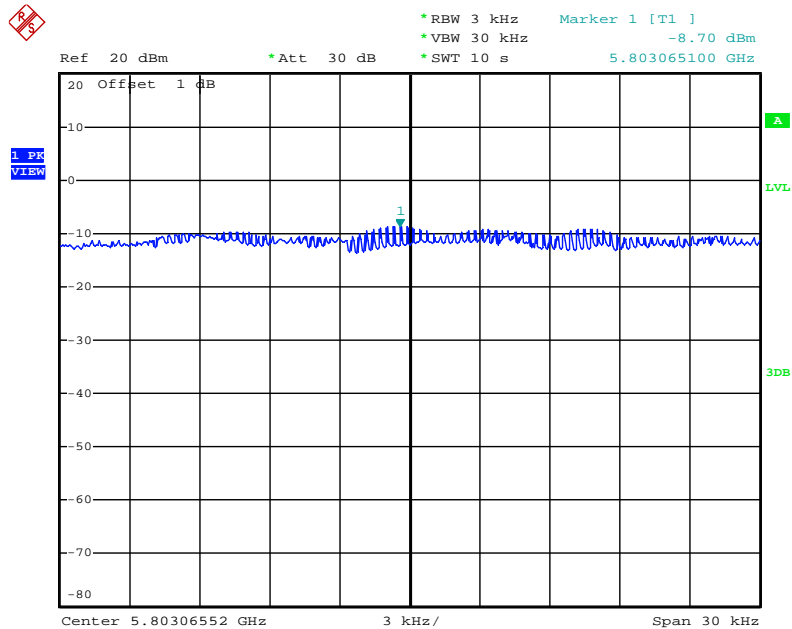


Date: 14.JUN.2011 19:48:33

Power Density Plot on Configuration IEEE 802.11a / Ant. 7-1 / 5745 MHz

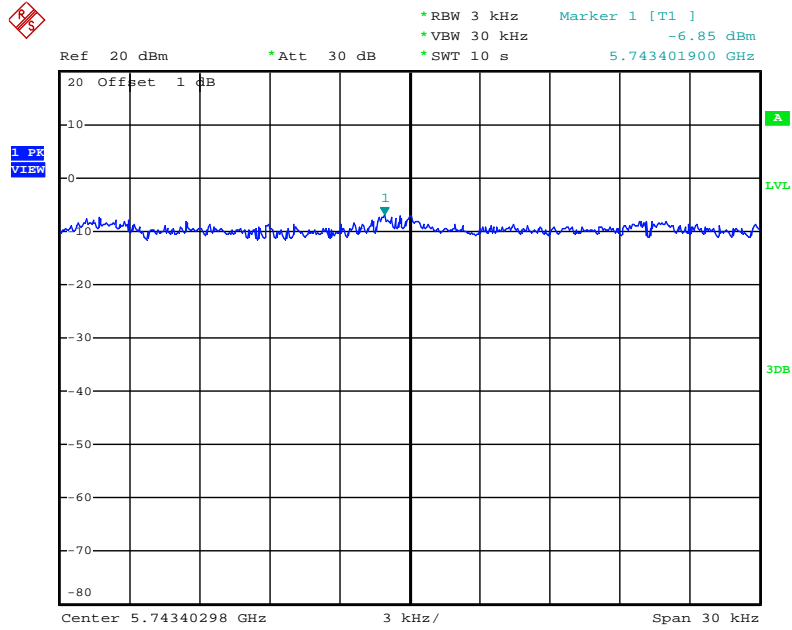

Date: 14.JUN.2011 19:02:31

Power Density Plot on Configuration IEEE 802.11a / Ant. 7-3 / 5745 MHz

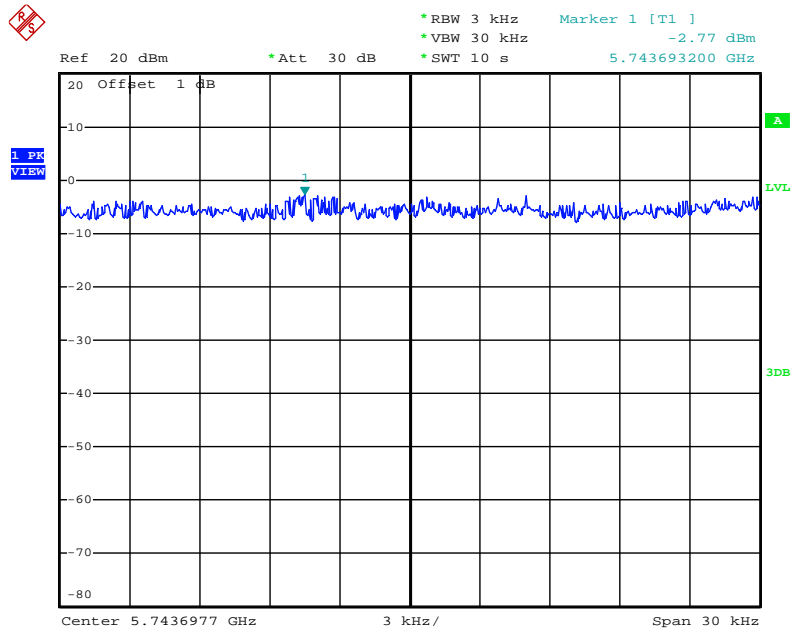

Date: 14.JUN.2011 19:08:43

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameters | Setting |
|---------------------|-----------------|
| Attenuation | Auto |
| Span Frequency | > 6dB Bandwidth |
| RB | 100 kHz |
| VB | 100 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

4.4.3. Test Procedures

4. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
5. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
6. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

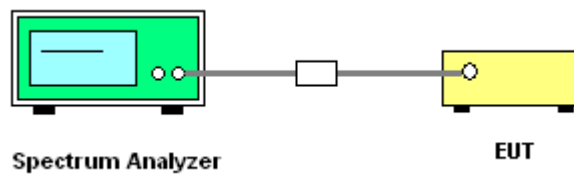

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Ant. 8>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 8 |

For 2.4GHz Band

Configuration IEEE 802.11n MCS8 20MHz / Ant. 8-1 + Ant. 8-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 16.12 | 17.60 | 500 | Complies |
| 6 | 2437 MHz | 15.08 | 17.60 | 500 | Complies |
| 11 | 2462 MHz | 16.28 | 17.60 | 500 | Complies |

Configuration IEEE 802.11n MCS8 40MHz / Ant. 8-1 + Ant. 8-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 3 | 2422 MHz | 35.92 | 36.24 | 500 | Complies |
| 6 | 2437 MHz | 35.76 | 36.32 | 500 | Complies |
| 9 | 2452 MHz | 35.12 | 36.32 | 500 | Complies |

| | | | |
|----------------------|-----------|-----------------------|-------------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11b/g / Ant. 8 |

Configuration IEEE 802.11b / Ant. 8-1 + Ant. 8-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 9.54 | 15.24 | 500 | Complies |
| 6 | 2437 MHz | 9.08 | 15.24 | 500 | Complies |
| 11 | 2462 MHz | 9.52 | 15.20 | 500 | Complies |

Configuration IEEE 802.11g / Ant. 8-1 + Ant. 8-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 16.40 | 16.44 | 500 | Complies |
| 6 | 2437 MHz | 16.04 | 16.48 | 500 | Complies |
| 11 | 2462 MHz | 16.36 | 16.44 | 500 | Complies |

<For Ant. 9>

| | | | |
|----------------------|-----------|-----------------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 9 |

For 2.4GHz Band

Configuration IEEE 802.11n MCS8 20MHz / Ant. 9-1 + Ant. 9-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 15.24 | 17.60 | 500 | Complies |
| 6 | 2437 MHz | 16.40 | 17.60 | 500 | Complies |
| 11 | 2462 MHz | 15.92 | 17.60 | 500 | Complies |

Configuration IEEE 802.11n MCS8 40MHz / Ant. 9-1 + Ant. 9-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 3 | 2422 MHz | 35.76 | 36.24 | 500 | Complies |
| 6 | 2437 MHz | 35.76 | 36.32 | 500 | Complies |
| 9 | 2452 MHz | 35.68 | 36.32 | 500 | Complies |

| | | | |
|----------------------|-----------|-----------------------|-------------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11b/g / Ant. 9 |

Configuration IEEE 802.11b / Ant. 9-1 + Ant. 9-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 9.08 | 15.28 | 500 | Complies |
| 6 | 2437 MHz | 9.08 | 15.24 | 500 | Complies |
| 11 | 2462 MHz | 9.04 | 15.28 | 500 | Complies |

Configuration IEEE 802.11g / Ant. 9-1 + Ant. 9-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1 | 2412 MHz | 16.44 | 16.44 | 500 | Complies |
| 6 | 2437 MHz | 16.04 | 16.48 | 500 | Complies |
| 11 | 2462 MHz | 16.40 | 16.44 | 500 | Complies |

<For Ant. 7>

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11n / Ant. 7 |

For 5GHz Band

Configuration IEEE 802.11n MCS8 20MHz / Ant. 7-1 + Ant. 7-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 15.04 | 17.60 | 500 | Complies |
| 157 | 5785 MHz | 15.80 | 17.80 | 500 | Complies |
| 165 | 5825 MHz | 15.64 | 17.64 | 500 | Complies |

Configuration IEEE 802.11n MCS8 40MHz / Ant. 7-1 + Ant. 7-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151 | 5755 MHz | 35.76 | 36.32 | 500 | Complies |
| 159 | 5795 MHz | 34.56 | 36.40 | 500 | Complies |

| | | | |
|---------------|-----------|----------------|-----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Allen Liu | Configurations | IEEE 802.11a / Ant. 7 |

For 5GHz Band

Configuration IEEE 802.11a / Ant. 7-1 + Ant. 7-3


| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 15.44 | 16.44 | 500 | Complies |
| 157 | 5785 MHz | 16.28 | 16.80 | 500 | Complies |
| 165 | 5825 MHz | 16.36 | 16.48 | 500 | Complies |

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


<For Ant. 8>

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 8-1 + Ant. 8-3 / 2437 MHz

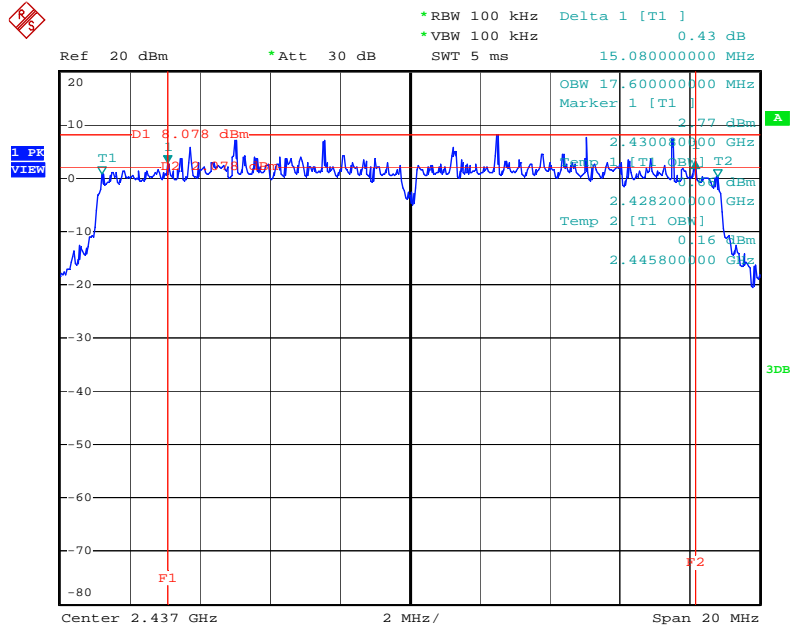


Date: 11.JUN.2011 17:22:31

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 8-1 + Ant. 8-3 / 2452 MHz

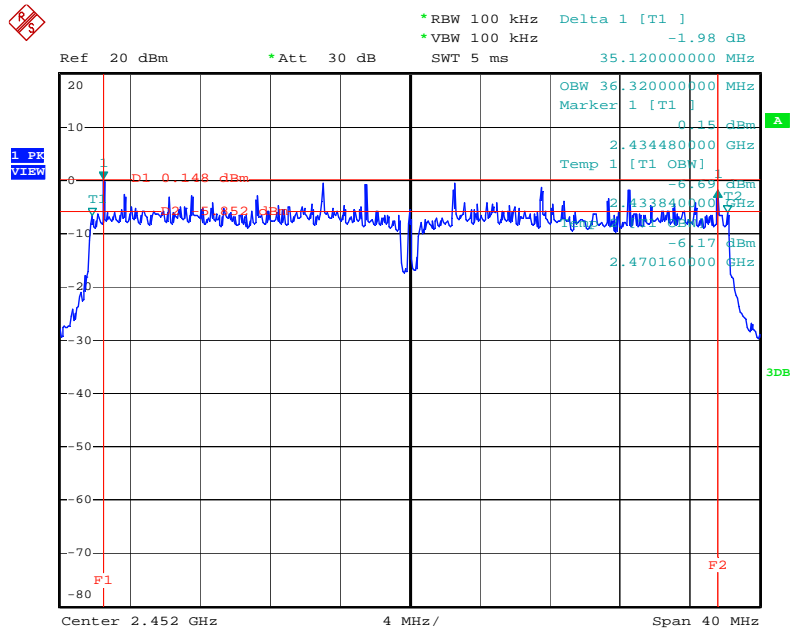


Date: 11.JUN.2011 17:23:58

6 dB Bandwidth Plot on Configuration IEEE 802.11b / Ant. 8-1 + Ant. 8-3 / 2437 MHz

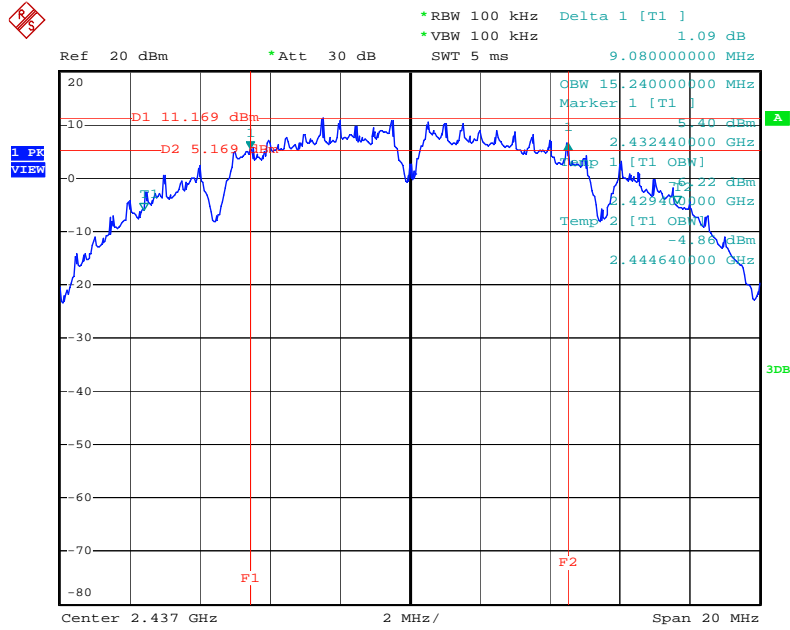

Date: 11.JUN.2011 17:16:05


6 dB Bandwidth Plot on Configuration IEEE 802.11g / Ant. 8-1 + Ant. 8-3 / 2437 MHz

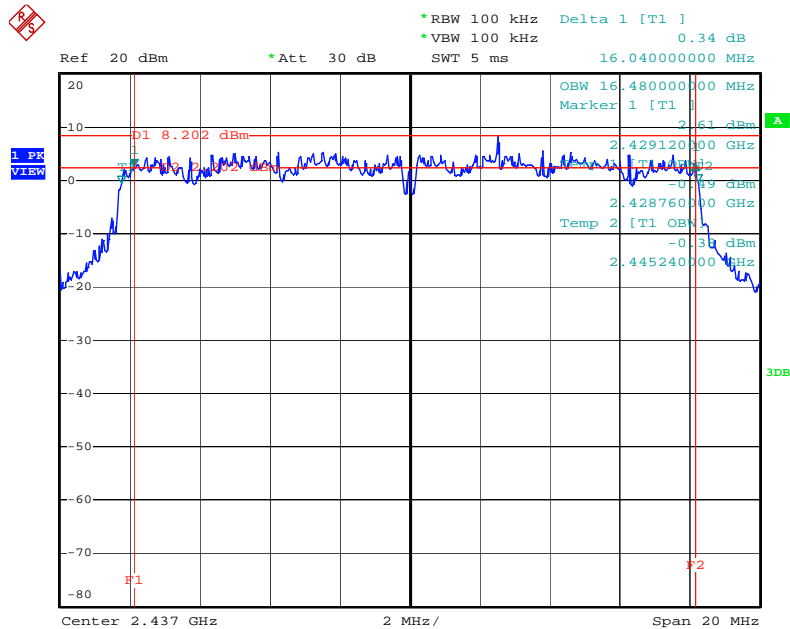

Date: 11.JUN.2011 17:18:43


<For Ant. 9>

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 9-1 + Ant. 9-3 / 2412 MHz

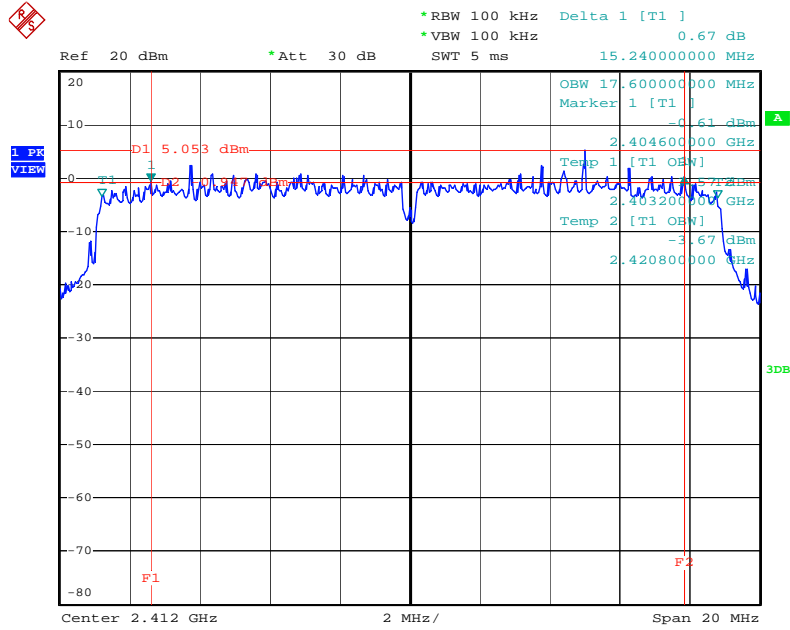


Date: 11.JUN.2011 17:21:29

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 9-1 + Ant. 9-3 / 2452 MHz

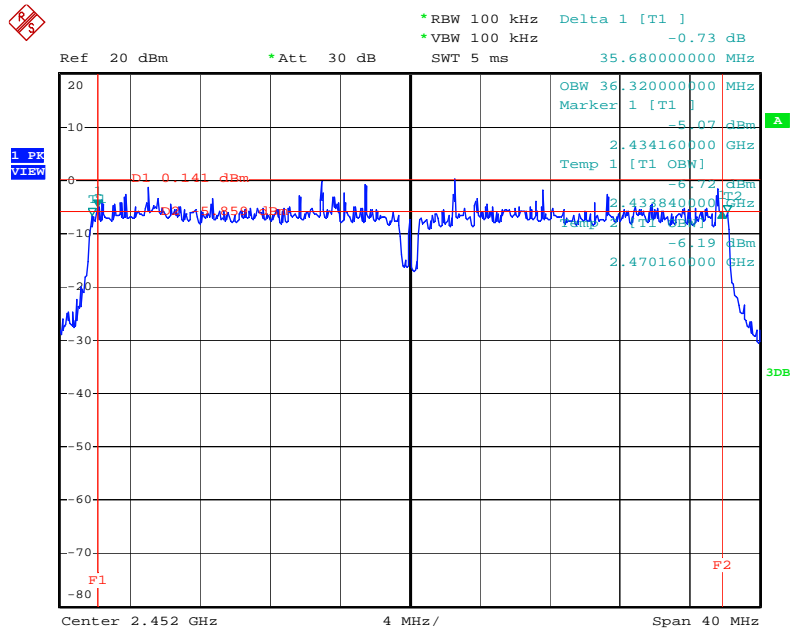


Date: 11.JUN.2011 17:25:54

6 dB Bandwidth Plot on Configuration IEEE 802.11b / Ant. 9-1 + Ant. 9-3 / 2462 MHz

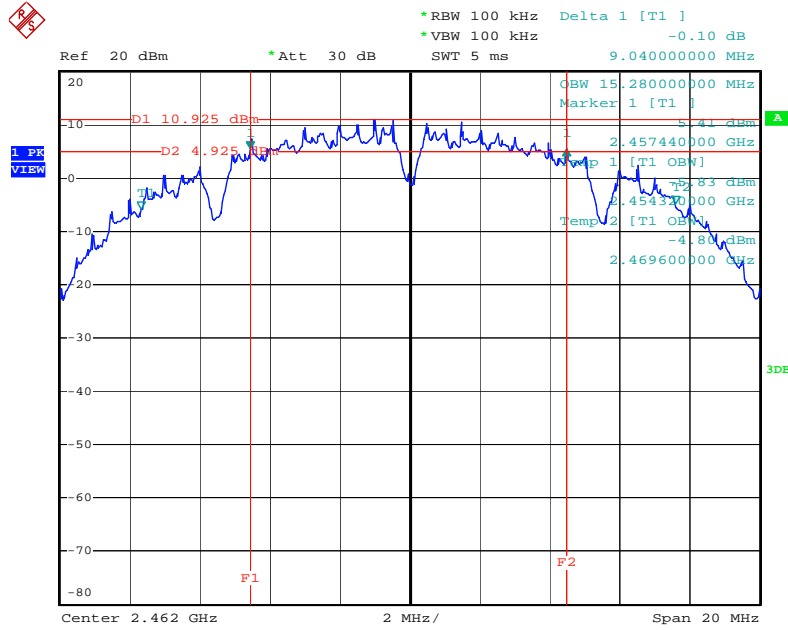

Date: 11.JUN.2011 17:15:35


6 dB Bandwidth Plot on Configuration IEEE 802.11g / Ant. 9-1 + Ant. 9-3 / 2437 MHz

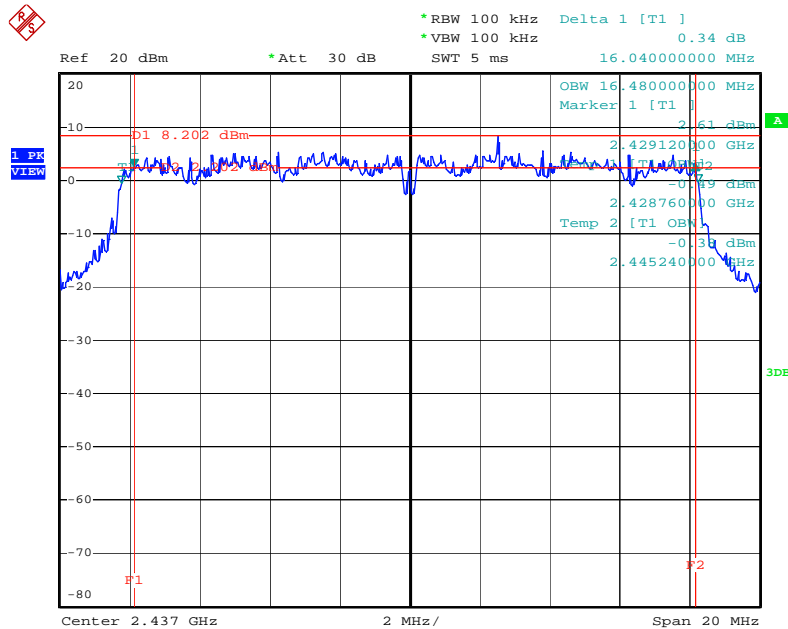

Date: 11.JUN.2011 17:18:43


<For Ant. 7>

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 7-1 + Ant. 7-3 / 5745 MHz

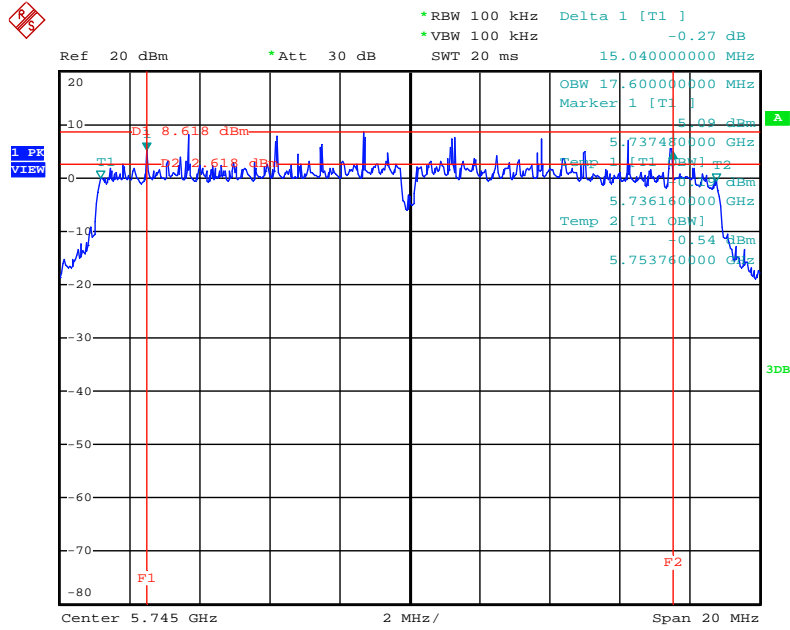


Date: 14.JUN.2011 20:26:40

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 7-1 + Ant. 7-3 / 5795 MHz

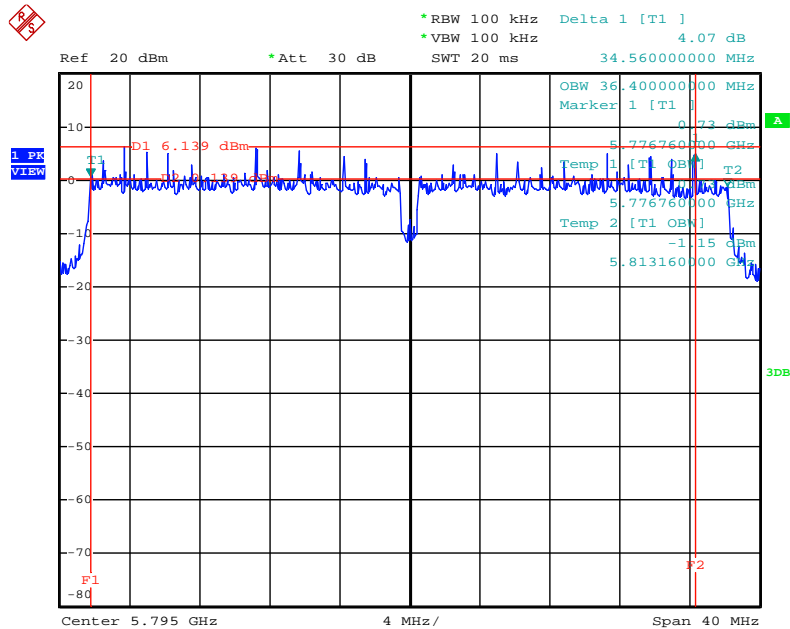

Date: 14.JUN.2011 19:52:43

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 7-1 + Ant. 7-3 / 5745 MHz

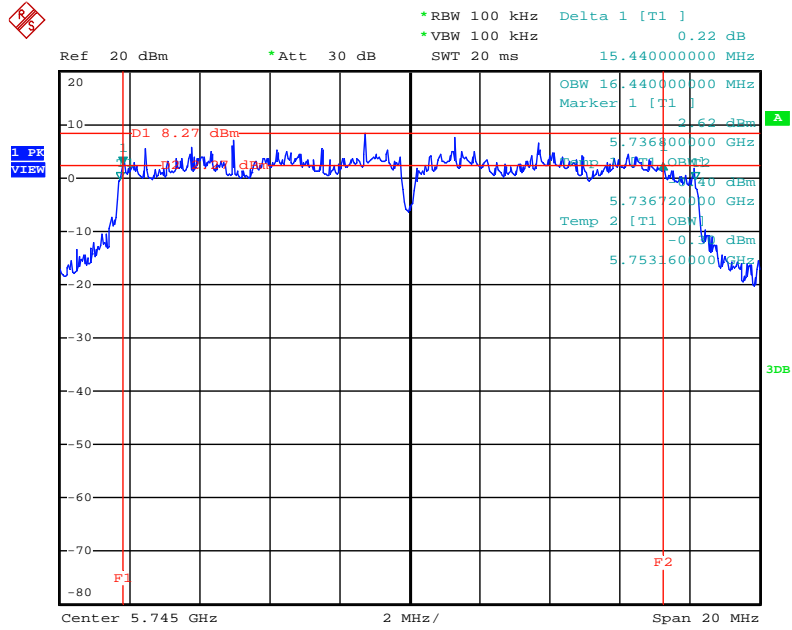

Date: 14.JUN.2011 20:31:52

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for peak |


| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 1GHz

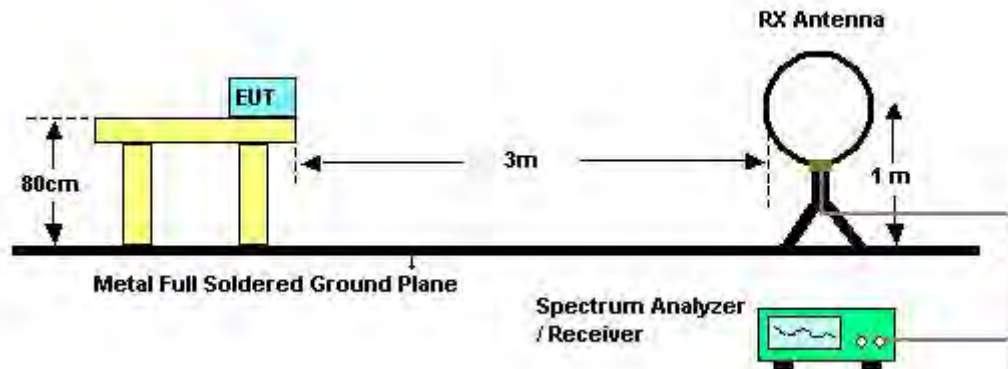

For radiated emissions above 1GHz

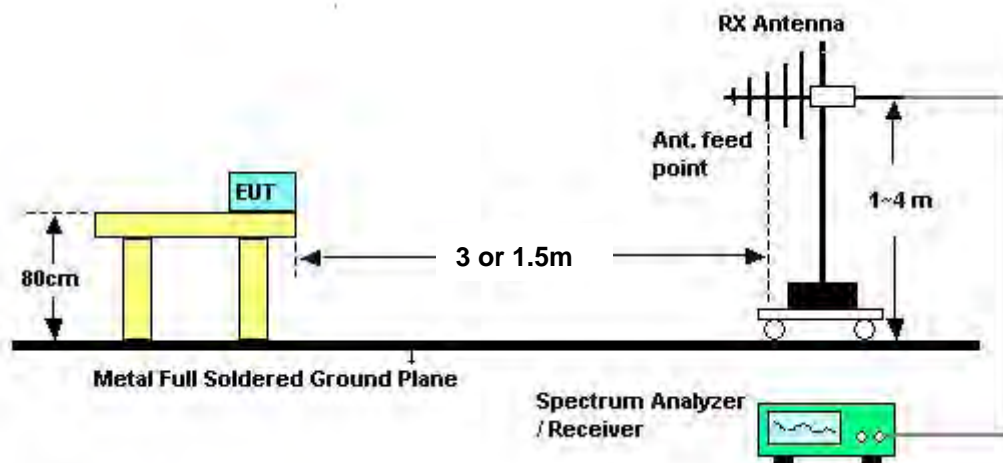

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

| | | | |
|----------------------|---------------|-----------------------|-------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | Normal Link |
| Test Date | Jun. 14, 2011 | | |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark |
|--------------------|---------------------|------------------------|--------------------------|---------------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


| | | | |
|---------------|---------|----------------|----------------------|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | Normal Link / Ant. 7 |

Horizontal

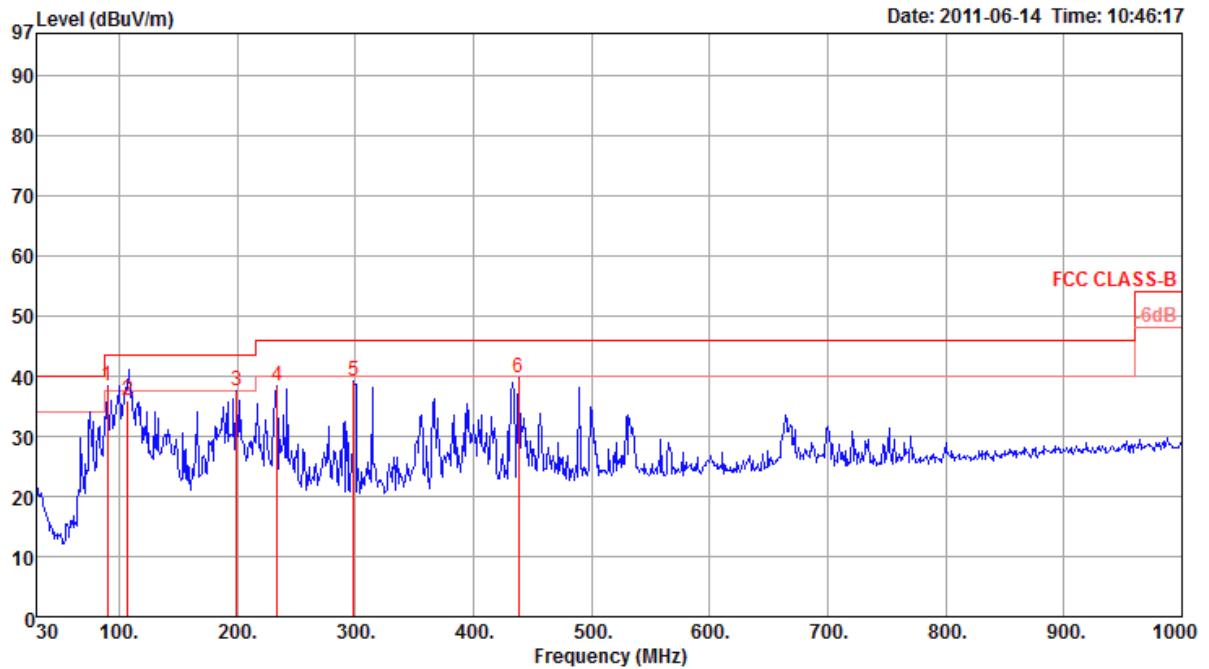

| | Freq | Level | Limit | Over | Read | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark | Pol/Phase |
|---|--------|--------|--------|-------|-------|-------|--------|---------|-------|-------|--------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB | dB/m | deg | cm | | |
| 1 | 90.14 | 38.46 | 43.50 | -5.04 | 56.02 | 1.10 | 27.64 | 8.98 | 0 | 100 | Peak | HORIZONTAL |
| 2 | 107.59 | 36.05 | 43.50 | -7.45 | 51.00 | 1.20 | 27.56 | 11.41 | 175 | 300 | QP | HORIZONTAL |
| 3 | 199.75 | 37.51 | 43.50 | -5.99 | 53.51 | 1.70 | 27.10 | 9.40 | 0 | 100 | Peak | HORIZONTAL |
| 4 | 233.70 | 38.28 | 46.00 | -7.72 | 51.88 | 1.83 | 27.03 | 11.60 | 0 | 100 | Peak | HORIZONTAL |
| 5 | 298.69 | 39.19 | 46.00 | -6.81 | 50.55 | 2.10 | 26.90 | 13.44 | 0 | 100 | Peak | HORIZONTAL |
| 6 | 438.37 | 39.81 | 46.00 | -6.19 | 48.33 | 2.53 | 27.79 | 16.74 | 0 | 100 | Peak | HORIZONTAL |

Vertical

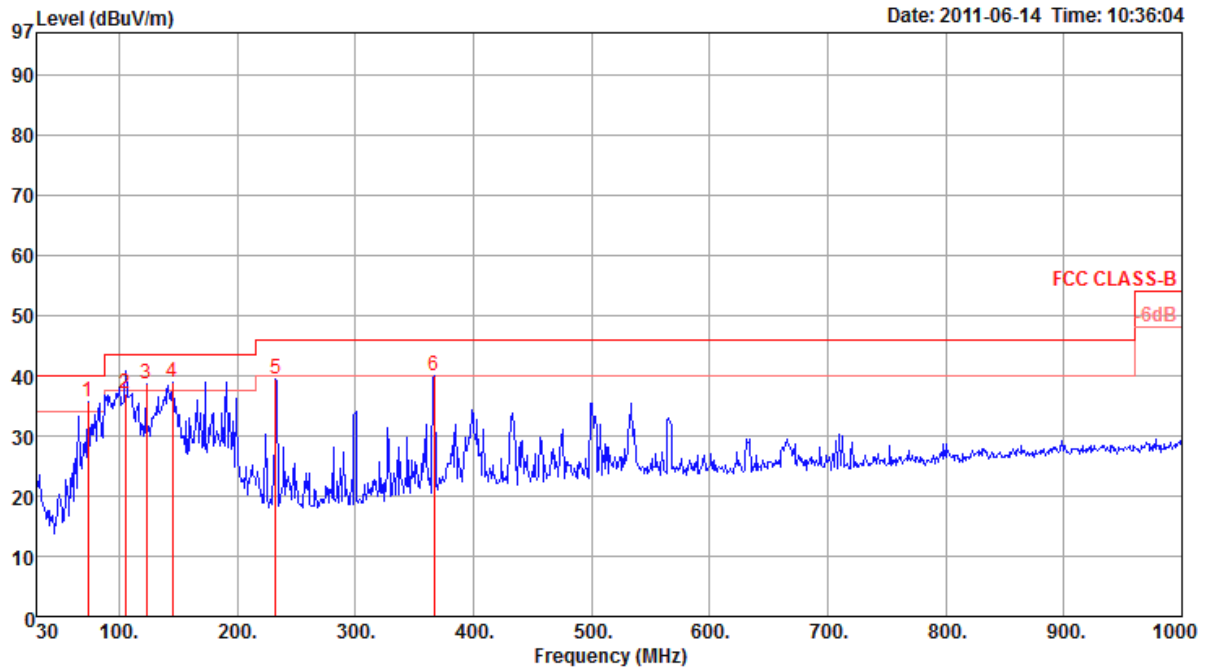

| | Freq | Level | Limit | Over | Read | Cable | Preamp | Antenna | T/Pos | A/Pos | Remark | Pol/Phase |
|---|--------|--------|--------|-------|-------|-------|--------|---------|-------|-------|--------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB | dB/m | deg | cm | | |
| 1 | 73.65 | 35.58 | 40.00 | -4.42 | 55.89 | 0.88 | 27.71 | 6.52 | 0 | 400 | Peak | VERTICAL |
| 2 | 105.66 | 36.88 | 43.50 | -6.62 | 51.99 | 1.20 | 27.57 | 11.26 | 230 | 100 | QP | VERTICAL |
| 3 | 123.12 | 38.68 | 43.50 | -4.82 | 52.57 | 1.23 | 27.48 | 12.36 | 0 | 400 | Peak | VERTICAL |
| 4 | 145.43 | 38.84 | 43.50 | -4.66 | 53.91 | 1.43 | 27.38 | 10.88 | 0 | 400 | Peak | VERTICAL |
| 5 | 232.73 | 39.42 | 46.00 | -6.58 | 53.08 | 1.83 | 27.03 | 11.54 | 0 | 400 | Peak | VERTICAL |
| 6 | 366.59 | 39.86 | 46.00 | -6.14 | 49.70 | 2.23 | 27.37 | 15.30 | 0 | 400 | Peak | VERTICAL |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Ant. 8>

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 1 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4819.00 | 42.42 | 74.00 | -31.58 | 40.00 | 4.26 | 33.36 | 35.20 | Peak | HORIZONTAL |
| 2 | 4824.60 | 30.51 | 54.00 | -23.49 | 28.06 | 4.26 | 33.39 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4823.04 | 30.70 | 54.00 | -23.30 | 28.25 | 4.26 | 33.39 | 35.20 | Average | VERTICAL |
| 2 | 4829.40 | 42.91 | 74.00 | -31.09 | 40.46 | 4.26 | 33.39 | 35.20 | Peak | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 6 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4877.72 | 42.30 | 74.00 | -31.70 | 39.69 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |
| 2 | 4884.00 | 30.34 | 54.00 | -23.66 | 27.73 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4871.00 | 42.54 | 74.00 | -31.46 | 39.93 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |
| 2 | 4883.40 | 30.50 | 54.00 | -23.50 | 27.89 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch11 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4923.64 | 43.55 | 74.00 | -30.45 | 40.78 | 4.39 | 33.58 | 35.20 | Peak | HORIZONTAL |
| 2 | 4924.03 | 30.71 | 54.00 | -23.29 | 27.94 | 4.39 | 33.58 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4923.89 | 30.75 | 54.00 | -23.25 | 27.98 | 4.39 | 33.58 | 35.20 | Average | VERTICAL |
| 2 | 4924.24 | 43.43 | 74.00 | -30.57 | 40.66 | 4.39 | 33.58 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 3 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4843.80 | 42.58 | 74.00 | -31.42 | 40.07 | 4.29 | 33.42 | 35.20 | Peak | HORIZONTAL |
| 2 | 4844.11 | 29.70 | 54.00 | -24.30 | 27.19 | 4.29 | 33.42 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4843.76 | 42.65 | 74.00 | -31.35 | 40.14 | 4.29 | 33.42 | 35.20 | Peak | VERTICAL |
| 2 | 4844.02 | 29.77 | 54.00 | -24.23 | 27.26 | 4.29 | 33.42 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 6 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4873.65 | 29.83 | 54.00 | -24.17 | 27.22 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |
| 2 | 4873.84 | 42.79 | 74.00 | -31.21 | 40.18 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4873.67 | 30.42 | 54.00 | -23.58 | 27.81 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |
| 2 | 4873.69 | 43.06 | 74.00 | -30.94 | 40.45 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 9 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4903.67 | 43.68 | 74.00 | -30.32 | 41.01 | 4.36 | 33.51 | 35.20 | Peak | HORIZONTAL |
| 2 | 4903.92 | 30.44 | 54.00 | -23.56 | 27.77 | 4.36 | 33.51 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4903.96 | 30.72 | 54.00 | -23.28 | 28.05 | 4.36 | 33.51 | 35.20 | Average | VERTICAL |
| 2 | 4904.48 | 44.43 | 74.00 | -29.57 | 41.76 | 4.36 | 33.51 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 1 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 02, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4823.95 | 44.19 | 74.00 | -29.81 | 41.74 | 4.26 | 33.39 | 35.20 | Peak | HORIZONTAL |
| 2 | 4824.00 | 33.08 | 54.00 | -20.92 | 30.63 | 4.26 | 33.39 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4823.94 | 48.96 | 54.00 | -5.04 | 46.51 | 4.26 | 33.39 | 35.20 | Average | VERTICAL |
| 2 | 4823.95 | 52.01 | 74.00 | -21.99 | 49.56 | 4.26 | 33.39 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 6 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 02, 2011 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4873.89 | 44.05 | 74.00 | -29.95 | 41.44 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |
| 2 | 4873.98 | 34.87 | 54.00 | -19.13 | 32.26 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4873.87 | 48.74 | 74.00 | -25.26 | 46.13 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |
| 2 | 4873.95 | 44.58 | 54.00 | -9.42 | 41.97 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 11 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 02, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4914.36 | 30.96 | 54.00 | -23.04 | 28.23 | 4.39 | 33.54 | 35.20 | Average | HORIZONTAL |
| 2 | 4924.00 | 43.24 | 74.00 | -30.76 | 40.47 | 4.39 | 33.58 | 35.20 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4923.72 | 33.57 | 54.00 | -20.43 | 30.80 | 4.39 | 33.58 | 35.20 | Average | VERTICAL |
| 2 | 4931.20 | 45.69 | 74.00 | -28.31 | 42.92 | 4.39 | 33.58 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 1 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4824.04 | 43.08 | 74.00 | -30.92 | 40.63 | 4.26 | 33.39 | 35.20 | Peak | HORIZONTAL |
| 2 | 4824.09 | 30.44 | 54.00 | -23.56 | 27.99 | 4.26 | 33.39 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4823.87 | 30.91 | 54.00 | -23.09 | 28.46 | 4.26 | 33.39 | 35.20 | Average | VERTICAL |
| 2 | 4824.27 | 44.14 | 74.00 | -29.86 | 41.69 | 4.26 | 33.39 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 6 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4873.74 | 42.41 | 74.00 | -31.59 | 39.80 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |
| 2 | 4874.41 | 30.08 | 54.00 | -23.92 | 27.47 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4873.84 | 43.52 | 74.00 | -30.48 | 40.91 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |
| 2 | 4874.07 | 31.17 | 54.00 | -22.83 | 28.56 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 11 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 02, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4923.60 | 30.84 | 54.00 | -23.16 | 28.07 | 4.39 | 33.58 | 35.20 | Average | HORIZONTAL |
| 2 | 4924.20 | 43.21 | 74.00 | -30.79 | 40.44 | 4.39 | 33.58 | 35.20 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4923.78 | 31.17 | 54.00 | -22.83 | 28.40 | 4.39 | 33.58 | 35.20 | Average | VERTICAL |
| 2 | 4924.12 | 43.59 | 74.00 | -30.41 | 40.82 | 4.39 | 33.58 | 35.20 | Peak | VERTICAL |

<For Ant. 9>

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 1 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4824.01 | 44.33 | 74.00 | -29.67 | 41.88 | 4.26 | 33.39 | 35.20 | Peak | HORIZONTAL |
| 2 | 4824.32 | 31.19 | 54.00 | -22.81 | 28.74 | 4.26 | 33.39 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4823.96 | 43.87 | 74.00 | -30.13 | 41.42 | 4.26 | 33.39 | 35.20 | Peak | VERTICAL |
| 2 | 4824.20 | 31.46 | 54.00 | -22.54 | 29.01 | 4.26 | 33.39 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 6 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4873.74 | 31.04 | 54.00 | -22.96 | 28.43 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |
| 2 | 4873.99 | 44.30 | 74.00 | -29.70 | 41.69 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4874.09 | 34.16 | 54.00 | -19.84 | 31.55 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |
| 2 | 4874.48 | 47.70 | 74.00 | -26.30 | 45.09 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch11 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4923.50 | 44.46 | 74.00 | -29.54 | 41.69 | 4.39 | 33.58 | 35.20 | Peak | HORIZONTAL |
| 2 | 4923.95 | 31.96 | 54.00 | -22.04 | 29.19 | 4.39 | 33.58 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4924.04 | 46.34 | 74.00 | -27.66 | 43.57 | 4.39 | 33.58 | 35.20 | Peak | VERTICAL |
| 2 | 4924.31 | 32.91 | 54.00 | -21.09 | 30.14 | 4.39 | 33.58 | 35.20 | Average | VERTICAL |



| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 3 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4844.32 | 31.06 | 54.00 | -22.94 | 28.55 | 4.29 | 33.42 | 35.20 | Average | HORIZONTAL |
| 2 | 4844.47 | 44.32 | 74.00 | -29.68 | 41.81 | 4.29 | 33.42 | 35.20 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4843.54 | 32.02 | 54.00 | -21.98 | 29.51 | 4.29 | 33.42 | 35.20 | Average | VERTICAL |
| 2 | 4844.46 | 45.73 | 74.00 | -28.27 | 43.22 | 4.29 | 33.42 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 6 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4873.98 | 44.33 | 74.00 | -29.67 | 41.72 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |
| 2 | 4874.20 | 31.12 | 54.00 | -22.88 | 28.51 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4874.22 | 33.01 | 54.00 | -20.99 | 30.40 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |
| 2 | 4874.41 | 46.24 | 74.00 | -27.76 | 43.63 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 9 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4903.71 | 44.58 | 74.00 | -29.42 | 41.91 | 4.36 | 33.51 | 35.20 | Peak | HORIZONTAL |
| 2 | 4904.25 | 31.44 | 54.00 | -22.56 | 28.77 | 4.36 | 33.51 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4903.86 | 32.39 | 54.00 | -21.61 | 29.72 | 4.36 | 33.51 | 35.20 | Average | VERTICAL |
| 2 | 4904.39 | 45.33 | 74.00 | -28.67 | 42.66 | 4.36 | 33.51 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 1 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4823.64 | 48.32 | 74.00 | -25.68 | 45.87 | 4.26 | 33.39 | 35.20 | Peak | HORIZONTAL |
| 2 | 4823.97 | 34.65 | 54.00 | -19.35 | 32.20 | 4.26 | 33.39 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4824.00 | 42.44 | 54.00 | -11.56 | 39.99 | 4.26 | 33.39 | 35.20 | Average | VERTICAL |
| 2 | 4824.00 | 49.91 | 74.00 | -24.09 | 47.46 | 4.26 | 33.39 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 6 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4873.78 | 47.02 | 74.00 | -26.98 | 44.41 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |
| 2 | 4874.13 | 35.28 | 54.00 | -18.72 | 32.67 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4873.77 | 49.90 | 74.00 | -24.10 | 47.29 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |
| 2 | 4873.98 | 39.78 | 54.00 | -14.22 | 37.17 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 11 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4923.63 | 44.35 | 74.00 | -29.65 | 41.58 | 4.39 | 33.58 | 35.20 | Peak | HORIZONTAL |
| 2 | 4924.25 | 32.17 | 54.00 | -21.83 | 29.40 | 4.39 | 33.58 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4923.72 | 47.19 | 74.00 | -26.81 | 44.42 | 4.39 | 33.58 | 35.20 | Peak | VERTICAL |
| 2 | 4923.95 | 34.44 | 54.00 | -19.56 | 31.67 | 4.39 | 33.58 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 1 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4823.87 | 31.20 | 54.00 | -22.80 | 28.75 | 4.26 | 33.39 | 35.20 | Average | HORIZONTAL |
| 2 | 4824.10 | 44.65 | 74.00 | -29.35 | 42.20 | 4.26 | 33.39 | 35.20 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4824.01 | 31.29 | 54.00 | -22.71 | 28.84 | 4.26 | 33.39 | 35.20 | Average | VERTICAL |
| 2 | 4824.45 | 43.92 | 74.00 | -30.08 | 41.47 | 4.26 | 33.39 | 35.20 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 6 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4873.51 | 43.71 | 74.00 | -30.29 | 41.10 | 4.33 | 33.48 | 35.20 | Peak | HORIZONTAL |
| 2 | 4873.80 | 31.12 | 54.00 | -22.88 | 28.51 | 4.33 | 33.48 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 4873.81 | 44.34 | 74.00 | -29.66 | 41.73 | 4.33 | 33.48 | 35.20 | Peak | VERTICAL |
| 2 | 4874.46 | 31.28 | 54.00 | -22.72 | 28.67 | 4.33 | 33.48 | 35.20 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 11 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jun. 03, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4924.26 | 44.54 | 74.00 | -29.46 | 41.77 | 4.39 | 33.58 | 35.20 | Peak | HORIZONTAL |
| 2 | 4924.40 | 32.26 | 54.00 | -21.74 | 29.49 | 4.39 | 33.58 | 35.20 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 4923.91 | 46.37 | 74.00 | -27.63 | 43.60 | 4.39 | 33.58 | 35.20 | Peak | VERTICAL |
| 2 | 4924.02 | 33.02 | 54.00 | -20.98 | 30.25 | 4.39 | 33.58 | 35.20 | Average | VERTICAL |

<For Ant. 7>

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz CH 149 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 04, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11492.16 | 43.96 | 60.00 | -16.04 | 32.21 | 7.33 | 39.50 | 35.08 | Average | HORIZONTAL |
| 2 | 11492.38 | 56.20 | 80.00 | -23.80 | 44.45 | 7.33 | 39.50 | 35.08 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11489.86 | 59.70 | 80.00 | -20.30 | 47.95 | 7.33 | 39.50 | 35.08 | Peak | VERTICAL |
| 2 | 11490.04 | 47.43 | 60.00 | -12.57 | 35.68 | 7.33 | 39.50 | 35.08 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz CH 157 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 04, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11568.80 | 46.19 | 60.00 | -13.81 | 34.50 | 7.31 | 39.47 | 35.09 | Average | HORIZONTAL |
| 2 | 11569.92 | 63.57 | 80.00 | -16.43 | 51.90 | 7.29 | 39.47 | 35.09 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11569.93 | 64.35 | 80.00 | -15.65 | 52.68 | 7.29 | 39.47 | 35.09 | Peak | VERTICAL |
| 2 | 11569.95 | 46.04 | 60.00 | -13.96 | 34.37 | 7.29 | 39.47 | 35.09 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz CH 165 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 04, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11649.91 | 64.54 | 80.00 | -15.46 | 52.95 | 7.22 | 39.44 | 35.07 | Peak | HORIZONTAL |
| 2 | 11650.12 | 46.29 | 60.00 | -13.71 | 34.70 | 7.22 | 39.44 | 35.07 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11650.85 | 45.87 | 60.00 | -14.13 | 34.28 | 7.22 | 39.44 | 35.07 | Average | VERTICAL |
| 2 | 11650.98 | 59.21 | 80.00 | -20.79 | 47.62 | 7.22 | 39.44 | 35.07 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz CH 151 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 09, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11509.98 | 59.05 | 80.00 | -20.95 | 47.30 | 7.35 | 39.50 | 35.10 | Peak | HORIZONTAL |
| 2 | 11510.10 | 42.14 | 60.00 | -17.86 | 30.39 | 7.35 | 39.50 | 35.10 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11509.95 | 45.94 | 60.00 | -14.06 | 34.19 | 7.35 | 39.50 | 35.10 | Average | VERTICAL |
| 2 | 11509.95 | 62.26 | 80.00 | -17.74 | 50.51 | 7.35 | 39.50 | 35.10 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz CH 159 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 09, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11589.74 | 44.18 | 60.00 | -15.82 | 32.50 | 7.29 | 39.47 | 35.08 | Average | HORIZONTAL |
| 2 | 11589.85 | 60.36 | 80.00 | -19.64 | 48.68 | 7.29 | 39.47 | 35.08 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | Remark | Pol/Phase |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11589.68 | 46.86 | 60.00 | -13.14 | 35.18 | 7.29 | 39.47 | 35.08 | Average | VERTICAL |
| 2 | 11589.82 | 62.74 | 80.00 | -17.26 | 51.06 | 7.29 | 39.47 | 35.08 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11a CH 149 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 04, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11488.90 | 60.07 | 80.00 | -19.93 | 48.32 | 7.33 | 39.50 | 35.08 | Peak | HORIZONTAL |
| 2 | 11489.26 | 47.29 | 60.00 | -12.71 | 35.54 | 7.33 | 39.50 | 35.08 | Average | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11488.92 | 49.80 | 60.00 | -10.20 | 38.05 | 7.33 | 39.50 | 35.08 | Average | VERTICAL |
| 2 | 11489.10 | 62.46 | 80.00 | -17.54 | 50.71 | 7.33 | 39.50 | 35.08 | Peak | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11a CH 157 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 04, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11568.28 | 48.55 | 60.00 | -11.45 | 36.86 | 7.31 | 39.47 | 35.09 | Average | HORIZONTAL |
| 2 | 11568.34 | 62.69 | 80.00 | -17.31 | 51.00 | 7.31 | 39.47 | 35.09 | Peak | HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 11568.49 | 64.75 | 80.00 | -15.25 | 53.06 | 7.31 | 39.47 | 35.09 | Peak | VERTICAL |
| 2 | 11568.64 | 50.96 | 60.00 | -9.04 | 39.27 | 7.31 | 39.47 | 35.09 | Average | VERTICAL |

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11a CH 165 / Ant. 7-1 + Ant. 7-3 |
| Test Date | Jun. 04, 2011 | | |

Horizontal

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|--------------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | |
| | | | | | | dB | dB/m | dB | |
| 1 | 11651.62 | 47.79 | 60.00 | -12.21 | 36.20 | 7.22 | 39.44 | 35.07 | Average HORIZONTAL |
| 2 | 11652.05 | 61.07 | 80.00 | -18.93 | 49.48 | 7.22 | 39.44 | 35.07 | Peak HORIZONTAL |

Vertical

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|--------|------------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | |
| | | | | | | dB | dB/m | dB | |
| 1 | 11647.80 | 61.65 | 80.00 | -18.35 | 50.06 | 7.22 | 39.44 | 35.07 | Peak VERTICAL |
| 2 | 11647.96 | 48.09 | 60.00 | -11.91 | 36.50 | 7.22 | 39.44 | 35.07 | Average VERTICAL |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Span Frequency | 100 MHz |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 100 KHz /100 KHz for Peak |

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Ant. 8>

| | | | |
|---------------|---------------|----------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 1 / Ant. 8-1 + Ant. 8-3 |
| Test date | Jul. 19, 2011 | | |

Channel 1

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|------------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | |
| | | | | | | dB | dB/m | dB | |
| 1 | 2390.00 | 52.95 | 54.00 | -1.05 | 22.02 | 2.88 | 28.05 | 0.00 | Average VERTICAL |
| 2 | 2390.00 | 69.94 | 74.00 | -4.06 | 39.01 | 2.88 | 28.05 | 0.00 | Peak VERTICAL |
| 3 | 2410.80 | 104.15 | | | | 2.88 | 28.09 | 0.00 | Average VERTICAL |
| 4 | 2413.80 | 115.21 | | | | 2.88 | 28.09 | 0.00 | Peak VERTICAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

| | | | |
|---------------|---------------|----------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 6 / Ant. 8-1 + Ant. 8-3 |
| Test date | Jul. 19, 2011 | | |

Channel 6

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|------------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | |
| | | | | | | dB | dB/m | dB | |
| 1 | 2389.60 | 63.10 | 74.00 | -10.90 | 32.19 | 2.86 | 28.05 | 0.00 | Peak VERTICAL |
| 2 | 2390.00 | 51.99 | 54.00 | -2.01 | 21.06 | 2.88 | 28.05 | 0.00 | Average VERTICAL |
| 3 | 2438.00 | 105.88 | | | | 2.89 | 28.18 | 0.00 | Average VERTICAL |
| 4 | 2443.80 | 117.84 | | | | 2.91 | 28.18 | 0.00 | Peak VERTICAL |
| 5 | 2483.50 | 52.64 | 54.00 | -1.36 | 21.45 | 2.93 | 28.26 | 0.00 | Average VERTICAL |
| 6 | 2483.50 | 64.41 | 74.00 | -9.59 | 33.22 | 2.93 | 28.26 | 0.00 | Peak VERTICAL |

Item 3, 4 are the fundamental frequency at 2437MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 11 / Ant. 8-1 + Ant. 8-3 |
| Test date | Jul. 19, 2011 | | |

Channel 11

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2460.80 | 102.86 | | | | 2.91 | 28.22 | 0.00 | Average | VERTICAL |
| 2 | 2462.60 | 114.79 | | | | 2.91 | 28.22 | 0.00 | Peak | VERTICAL |
| 3 | 2483.50 | 52.98 | 54.00 | -1.02 | 21.79 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 4 | 2484.30 | 67.81 | 74.00 | -6.19 | 36.62 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 3 / Ant. 8-1 + Ant. 8-3 |
| Test date | Jul. 19, 2011 | | |

Channel 3

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss Factor | Factor | | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2390.00 | 52.95 | 54.00 | -1.05 | 22.02 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2390.00 | 67.21 | 74.00 | -6.79 | 36.28 | 2.88 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2410.80 | 97.80 | | | | 2.88 | 28.09 | 0.00 | Average | VERTICAL |
| 4 | 2435.20 | 110.65 | | | | 2.89 | 28.18 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2422 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 6 / Ant. 8-1 + Ant. 8-3 |
| Test date | Jul. 19, 2011 | | |

Channel 6

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss Factor | Factor | | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2389.60 | 66.49 | 74.00 | -7.51 | 35.58 | 2.86 | 28.05 | 0.00 | Peak | VERTICAL |
| 2 | 2390.00 | 52.38 | 54.00 | -1.62 | 21.45 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 3 | 2445.00 | 111.52 | | | | 2.91 | 28.18 | 0.00 | Peak | VERTICAL |
| 4 | 2445.80 | 99.20 | | | | 2.91 | 28.18 | 0.00 | Average | VERTICAL |
| 5 | 2483.50 | 52.97 | 54.00 | -1.03 | 21.78 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 6 | 2483.90 | 67.63 | 74.00 | -6.37 | 36.44 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 9 / Ant. 8-1 + Ant. 8-3 |
| Test date | Jul. 19, 2011 | | |

Channel 9

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2447.20 | 96.41 | | | | 2.91 | 28.18 | 0.00 | Average | VERTICAL |
| 2 | 2448.80 | 108.78 | | | | 2.91 | 28.18 | 0.00 | Peak | VERTICAL |
| 3 | 2483.50 | 52.93 | 54.00 | -1.07 | 21.74 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 4 | 2483.50 | 67.07 | 74.00 | -6.93 | 35.88 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 1 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 1

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2385.80 | 52.65 | 54.00 | -1.35 | 21.74 | 2.86 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2386.00 | 61.44 | 74.00 | -12.56 | 30.53 | 2.86 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2410.80 | 111.59 | | | | 2.88 | 28.09 | 0.00 | Average | VERTICAL |
| 4 | 2413.00 | 117.31 | | | | 2.88 | 28.09 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 6 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 6

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2389.00 | 62.66 | 74.00 | -11.34 | 31.75 | 2.86 | 28.05 | 0.00 | Peak | VERTICAL |
| 2 | 2389.20 | 52.40 | 54.00 | -1.60 | 21.49 | 2.86 | 28.05 | 0.00 | Average | VERTICAL |
| 3 | 2435.60 | 117.29 | | | | 2.89 | 28.18 | 0.00 | Average | VERTICAL |
| 4 | 2436.00 | 121.33 | | | | 2.89 | 28.18 | 0.00 | Peak | VERTICAL |
| 5 | 2484.90 | 52.75 | 54.00 | -1.25 | 21.56 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 6 | 2484.90 | 62.24 | 74.00 | -11.76 | 31.05 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 11 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 11

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2462.60 | 111.14 | | | | 2.91 | 28.22 | 0.00 | Average | VERTICAL |
| 2 | 2463.00 | 115.50 | | | | 2.91 | 28.22 | 0.00 | Peak | VERTICAL |
| 3 | 2487.90 | 61.84 | 74.00 | -12.16 | 30.61 | 2.93 | 28.30 | 0.00 | Peak | VERTICAL |
| 4 | 2488.50 | 52.80 | 54.00 | -1.20 | 21.57 | 2.93 | 28.30 | 0.00 | Average | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 1 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 03, 2011 | | |

Channel 1

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2389.80 | 69.23 | 74.00 | -4.77 | 38.30 | 2.88 | 28.05 | 0.00 | Peak | VERTICAL |
| 2 | 2390.00 | 52.91 | 54.00 | -1.09 | 21.98 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 3 | 2411.40 | 105.10 | | | | 2.88 | 28.09 | 0.00 | Average | VERTICAL |
| 4 | 2414.40 | 116.66 | | | | 2.88 | 28.09 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 6 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 02, 2011 | | |

Channel 6

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2390.00 | 52.14 | 54.00 | -1.86 | 21.21 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2390.00 | 63.43 | 74.00 | -10.57 | 32.50 | 2.88 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2440.20 | 119.43 | | | | 2.89 | 28.18 | 0.00 | Peak | VERTICAL |
| 4 | 2442.40 | 107.58 | | | | 2.91 | 28.18 | 0.00 | Average | VERTICAL |
| 5 | 2483.50 | 52.68 | 54.00 | -1.32 | 21.49 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 6 | 2483.90 | 65.31 | 74.00 | -8.69 | 34.12 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 11 / Ant. 8-1 + Ant. 8-3 |
| Test Date | Jun. 02, 2011 | | |

Channel 11

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2463.40 | 104.58 | | | | 2.91 | 28.22 | 0.00 | Average | VERTICAL |
| 2 | 2465.20 | 115.87 | | | | 2.91 | 28.22 | 0.00 | Peak | VERTICAL |
| 3 | 2483.50 | 52.99 | 54.00 | -1.01 | 21.80 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 4 | 2483.50 | 68.20 | 74.00 | -5.80 | 37.01 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

<For Ant. 9>

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 1 / Ant. 9-1 + Ant. 9-3 |
| Test date | Jul. 19, 2011 | | |

Channel 1

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|----------------------|-------------------|------------------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 2390.00 | 52.68 | 54.00 | -1.32 | 21.75 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2390.00 | 65.59 | 74.00 | -8.41 | 34.66 | 2.88 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2411.00 | 101.14 | | | | 2.88 | 28.09 | 0.00 | Average | VERTICAL |
| 4 | 2419.60 | 113.20 | | | | 2.89 | 28.13 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 6 / Ant. 9-1 + Ant. 9-3 |
| Test date | Jul. 19, 2011 | | |

Channel 6

| | Freq | Level | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|----------------------|-------------------|------------------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 2390.00 | 52.46 | 54.00 | -1.54 | 21.53 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2390.00 | 61.74 | 74.00 | -12.26 | 30.81 | 2.88 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2432.20 | 116.98 | | | | 2.89 | 28.13 | 0.00 | Peak | VERTICAL |
| 4 | 2436.20 | 105.28 | | | | 2.89 | 28.18 | 0.00 | Average | VERTICAL |
| 5 | 2483.50 | 52.93 | 54.00 | -1.07 | 21.74 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 6 | 2483.50 | 62.97 | 74.00 | -11.03 | 31.78 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 20MHz Ch 11 / Ant. 9-1 + Ant. 9-3 |
| Test date | Jul. 19, 2011 | | |

Channel 11

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2459.00 | 113.01 | | | | 2.91 | 28.22 | 0.00 | Peak | VERTICAL |
| 2 | 2461.20 | 101.33 | | | | 2.91 | 28.22 | 0.00 | Average | VERTICAL |
| 3 | 2483.50 | 52.91 | 54.00 | -1.09 | 21.72 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 4 | 2483.50 | 68.05 | 74.00 | -5.95 | 36.86 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 3 / Ant. 9-1 + Ant. 9-3 |
| Test date | Jul. 19, 2011 | | |

Channel 3

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2390.00 | 52.96 | 54.00 | -1.04 | 22.03 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2390.00 | 69.01 | 74.00 | -4.99 | 38.08 | 2.88 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2405.60 | 94.98 | | | | 2.88 | 28.09 | 0.00 | Average | VERTICAL |
| 4 | 2416.40 | 107.18 | | | | 2.89 | 28.09 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2422 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 6 / Ant. 9-1 + Ant. 9-3 |
| Test date | Jul. 19, 2011 | | |

Channel 6

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2389.60 | 62.62 | 74.00 | -11.38 | 31.71 | 2.86 | 28.05 | 0.00 | Peak | VERTICAL |
| 2 | 2390.00 | 49.11 | 54.00 | -4.89 | 18.18 | 2.88 | 28.05 | 0.00 | Average | VERTICAL |
| 3 | 2444.60 | 112.77 | | | | 2.91 | 28.18 | 0.00 | Peak | VERTICAL |
| 4 | 2445.40 | 99.02 | | | | 2.91 | 28.18 | 0.00 | Average | VERTICAL |
| 5 | 2483.50 | 52.67 | 54.00 | -1.33 | 21.48 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 6 | 2486.70 | 66.88 | 74.00 | -7.12 | 35.65 | 2.93 | 28.30 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2437MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11n MCS8 40MHz Ch 9 / Ant. 9-1 + Ant. 9-3 |
| Test date | Jul. 19, 2011 | | |

Channel 9

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2447.60 | 94.78 | | | | 2.91 | 28.18 | 0.00 | Average | VERTICAL |
| 2 | 2469.20 | 107.56 | | | | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |
| 3 | 2483.50 | 52.99 | 54.00 | -1.01 | 21.80 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 4 | 2485.10 | 69.00 | 74.00 | -5.00 | 37.77 | 2.93 | 28.30 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 1 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 1

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2386.20 | 52.97 | 54.00 | -1.03 | 22.06 | 2.86 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2386.20 | 60.39 | 74.00 | -13.61 | 29.48 | 2.86 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2411.20 | 111.37 | | | | 2.88 | 28.09 | 0.00 | Average | VERTICAL |
| 4 | 2411.20 | 115.35 | | | | 2.88 | 28.09 | 0.00 | Peak | VERTICAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 6 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 6

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2389.20 | 52.67 | 54.00 | -1.33 | 21.76 | 2.86 | 28.05 | 0.00 | Average | VERTICAL |
| 2 | 2389.80 | 57.65 | 74.00 | -16.35 | 26.72 | 2.88 | 28.05 | 0.00 | Peak | VERTICAL |
| 3 | 2436.00 | 118.39 | | | | 2.89 | 28.18 | 0.00 | Peak | VERTICAL |
| 4 | 2436.20 | 115.97 | | | | 2.89 | 28.18 | 0.00 | Average | VERTICAL |
| 5 | 2484.50 | 59.62 | 74.00 | -14.38 | 28.43 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |
| 6 | 2484.90 | 49.93 | 54.00 | -4.07 | 18.74 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |

Item 3, 4 are the fundamental frequency at 2437 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11b CH 11 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 11

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2463.80 | 110.84 | | | | 2.91 | 28.22 | 0.00 | Average | VERTICAL |
| 2 | 2464.60 | 114.81 | | | | 2.91 | 28.22 | 0.00 | Peak | VERTICAL |
| 3 | 2487.50 | 52.91 | 54.00 | -1.09 | 21.68 | 2.93 | 28.30 | 0.00 | Average | VERTICAL |
| 4 | 2487.50 | 60.98 | 74.00 | -13.02 | 29.75 | 2.93 | 28.30 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 1 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 1

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|------------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | |
| | | | | | | dB | dB/m | dB | |
| 1 | 2390.00 | 52.61 | 54.00 | -1.39 | 21.68 | 2.88 | 28.05 | 0.00 | Average VERTICAL |
| 2 | 2390.00 | 67.94 | 74.00 | -6.06 | 37.01 | 2.88 | 28.05 | 0.00 | Peak VERTICAL |
| 3 | 2419.00 | 114.63 | | | | 2.89 | 28.13 | 0.00 | Peak VERTICAL |
| 4 | 2419.20 | 104.07 | | | | 2.89 | 28.13 | 0.00 | Average VERTICAL |

Item 3, 4 are the fundamental frequency at 2412 MHz.

| | | | |
|----------------------|---------------|-----------------------|--|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 6 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 6

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|------------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | Factor | |
| | | | | | | dB | dB/m | dB | |
| 1 | 2390.00 | 52.92 | 54.00 | -1.08 | 21.99 | 2.88 | 28.05 | 0.00 | Average VERTICAL |
| 2 | 2390.00 | 64.02 | 74.00 | -9.98 | 33.09 | 2.88 | 28.05 | 0.00 | Peak VERTICAL |
| 3 | 2434.00 | 118.52 | | | | 2.89 | 28.18 | 0.00 | Peak VERTICAL |
| 4 | 2434.80 | 108.43 | | | | 2.89 | 28.18 | 0.00 | Average VERTICAL |
| 5 | 2483.50 | 52.76 | 54.00 | -1.24 | 21.57 | 2.93 | 28.26 | 0.00 | Average VERTICAL |
| 6 | 2483.50 | 65.82 | 74.00 | -8.18 | 34.63 | 2.93 | 28.26 | 0.00 | Peak VERTICAL |

Item 3, 4 are the fundamental frequency at 2437 MHz.

| | | | |
|----------------------|---------------|-----------------------|---|
| Temperature | 24°C | Humidity | 56% |
| Test Engineer | Sean Ku | Configurations | IEEE 802.11g CH 11 / Ant. 9-1 + Ant. 9-3 |
| Test Date | Jul. 19, 2011 | | |

Channel 11


| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | Remark | Pol/Phase | |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|-----------|----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | Loss | Factor | | | |
| | | | | | | dB | dB/m | dB | | |
| 1 | 2460.40 | 103.07 | | | | 2.91 | 28.22 | 0.00 | Average | VERTICAL |
| 2 | 2463.20 | 114.33 | | | | 2.91 | 28.22 | 0.00 | Peak | VERTICAL |
| 3 | 2483.50 | 52.69 | 54.00 | -1.31 | 21.50 | 2.93 | 28.26 | 0.00 | Average | VERTICAL |
| 4 | 2484.10 | 71.02 | 74.00 | -2.98 | 39.83 | 2.93 | 28.26 | 0.00 | Peak | VERTICAL |

Item 1, 2 are the fundamental frequency at 2462 MHz.

For Emission not in Restricted Band


<For Ant. 8>

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 8-1 + Ant. 8-3 / 2412 MHz

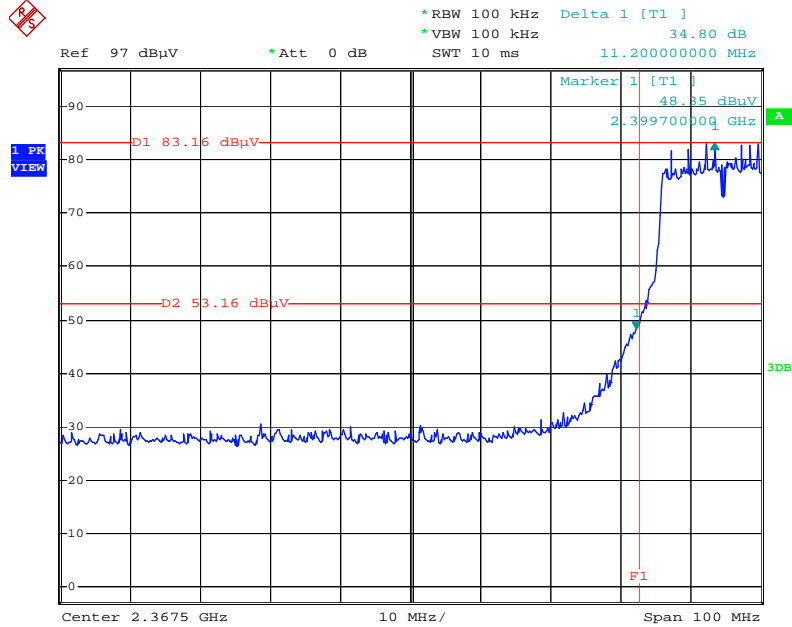


Date: 9.JUN.2011 22:08:22

High Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 8-1 + Ant. 8-3 / 2462 MHz

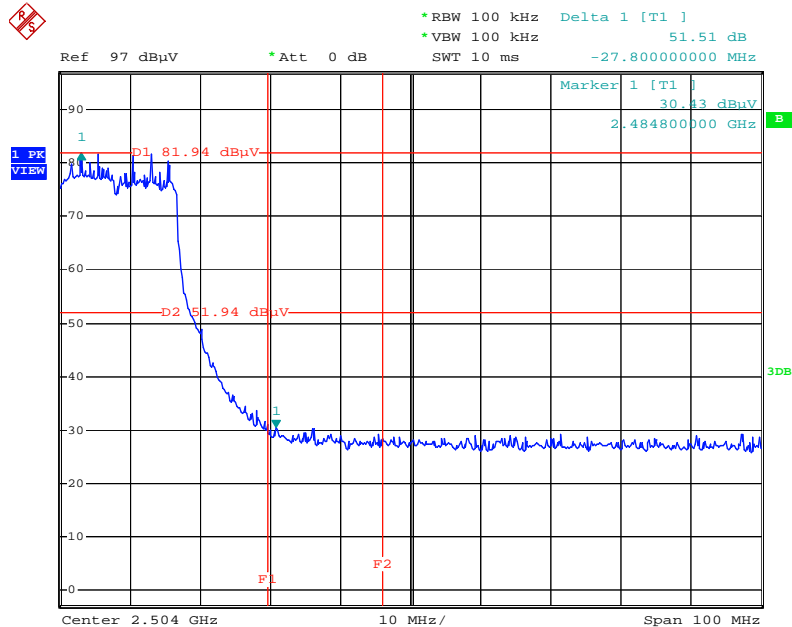


Date: 9.JUN.2011 22:12:49

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 8-1 + Ant. 8-3 / 2422 MHz

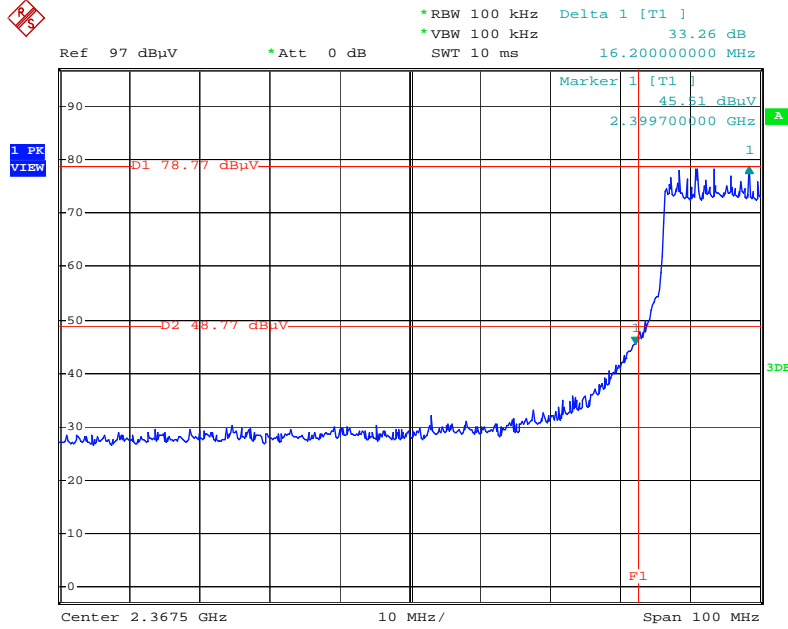


Date: 9.JUN.2011 22:23:33

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 8-1 + Ant. 8-3 / 2452 MHz

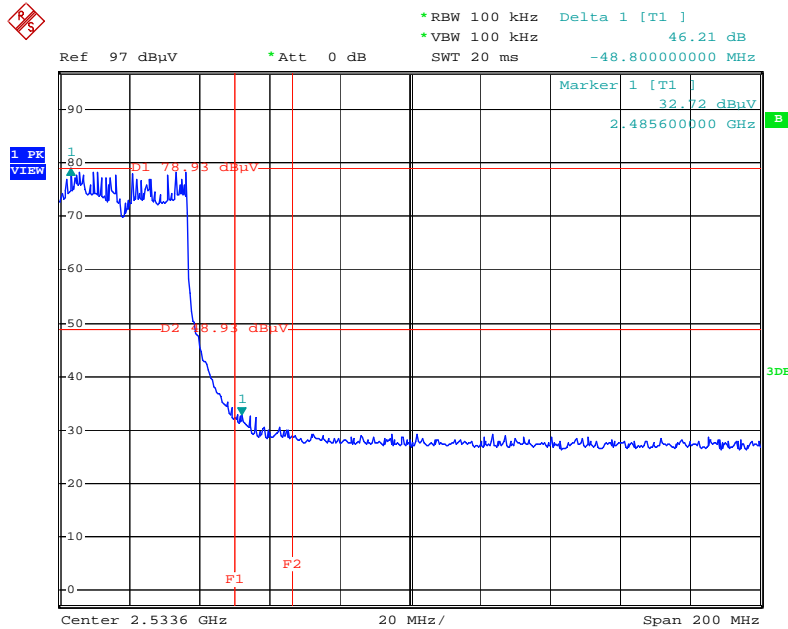


Date: 9.JUN.2011 22:18:53

Low Band Edge Plot on Configuration IEEE 802.11b / Ant. 8-1 + Ant. 8-3 / 2412 MHz

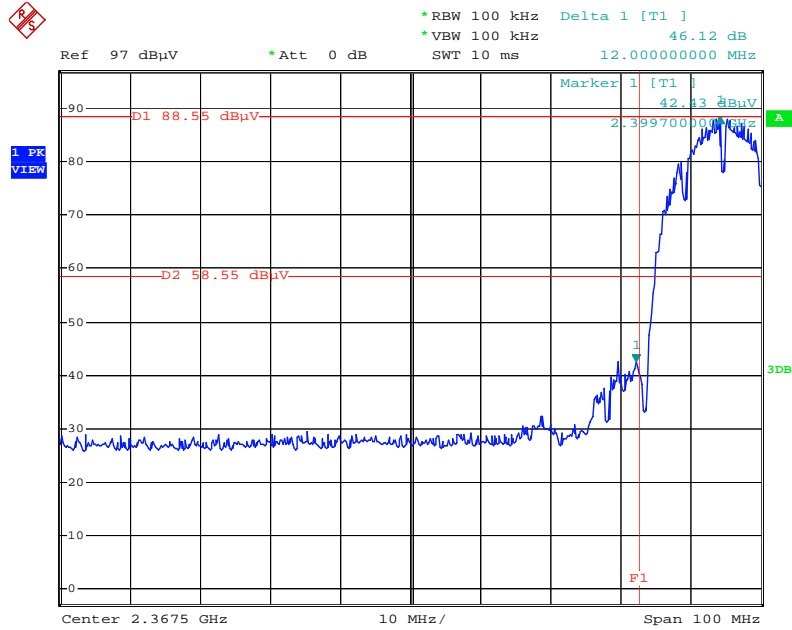


Date: 9.JUN.2011 21:51:53

High Band Edge Plot on Configuration IEEE 802.11b / Ant. 8-1 + Ant. 8-3 / 2462 MHz

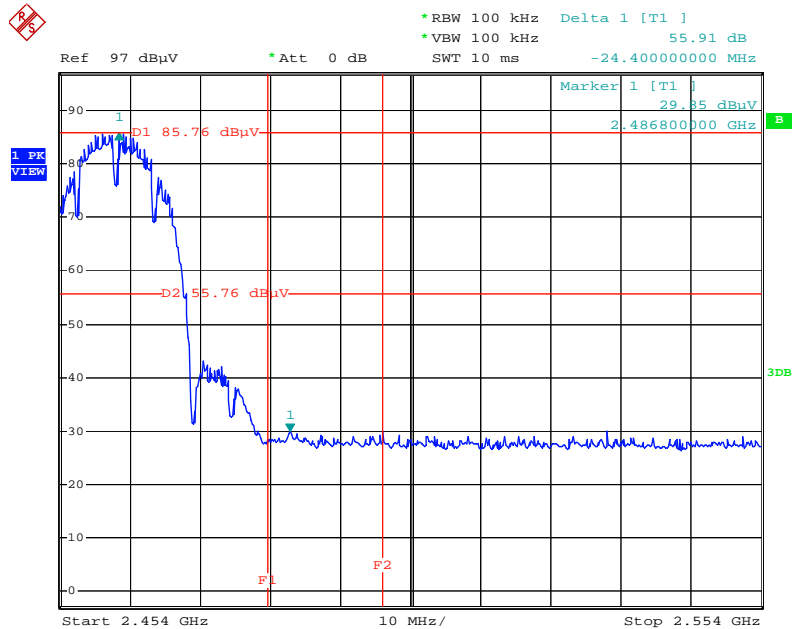


Date: 9.JUN.2011 21:57:45

Low Band Edge Plot on Configuration IEEE 802.11g / Ant. 8-1 + Ant. 8-3 / 2412 MHz

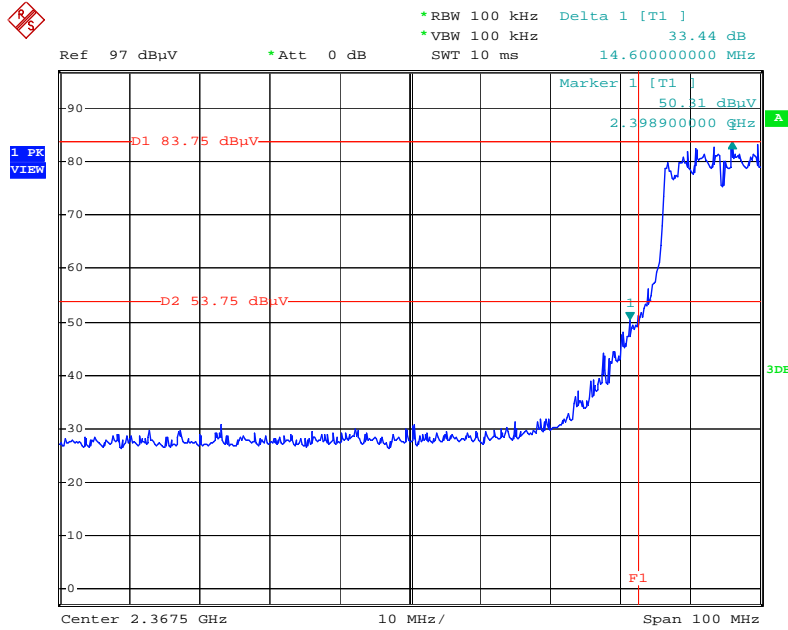

Date: 9.JUN.2011 22:06:10


High Band Edge Plot on Configuration IEEE 802.11g / Ant. 8-1 + Ant. 8-3 / 2462 MHz

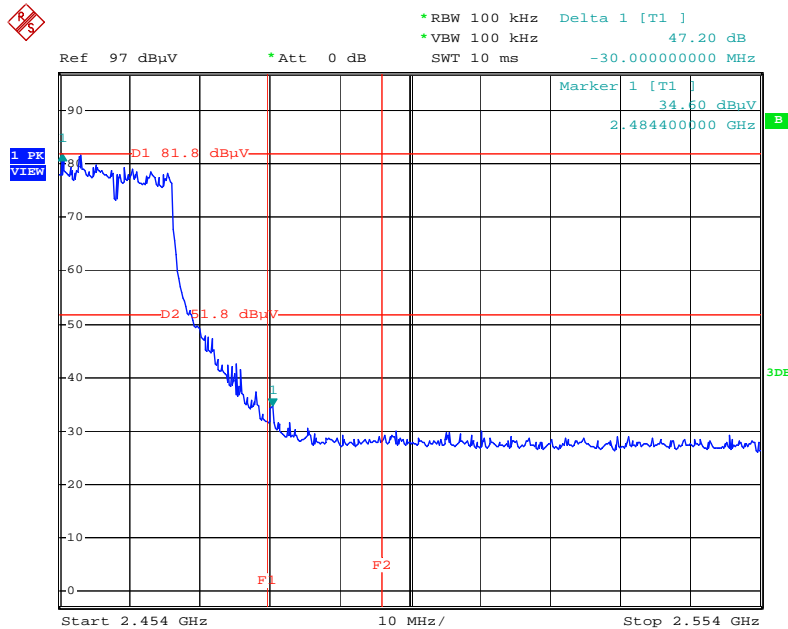

Date: 9.JUN.2011 22:00:32


<For Ant. 9>

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 9-1 + Ant. 9-3 / 2412 MHz

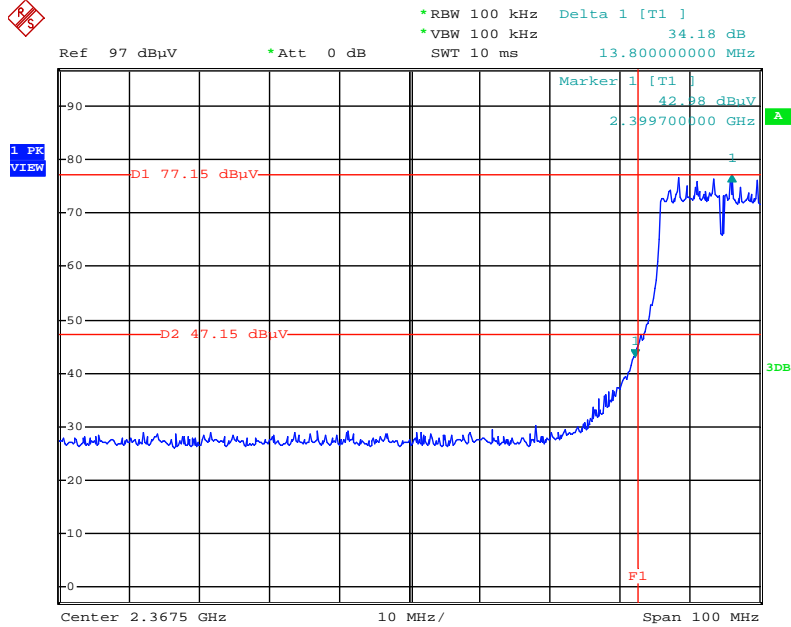


Date: 3.JUN.2011 23:44:01

High Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 9-1 + Ant. 9-3 / 2462 MHz

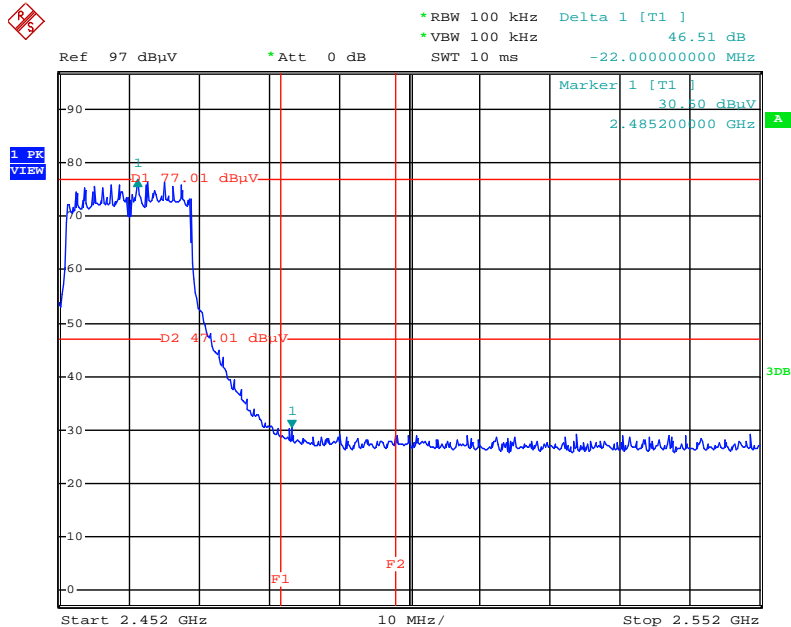


Date: 3.JUN.2011 23:56:35

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 9-1 + Ant. 9-3 / 2422 MHz

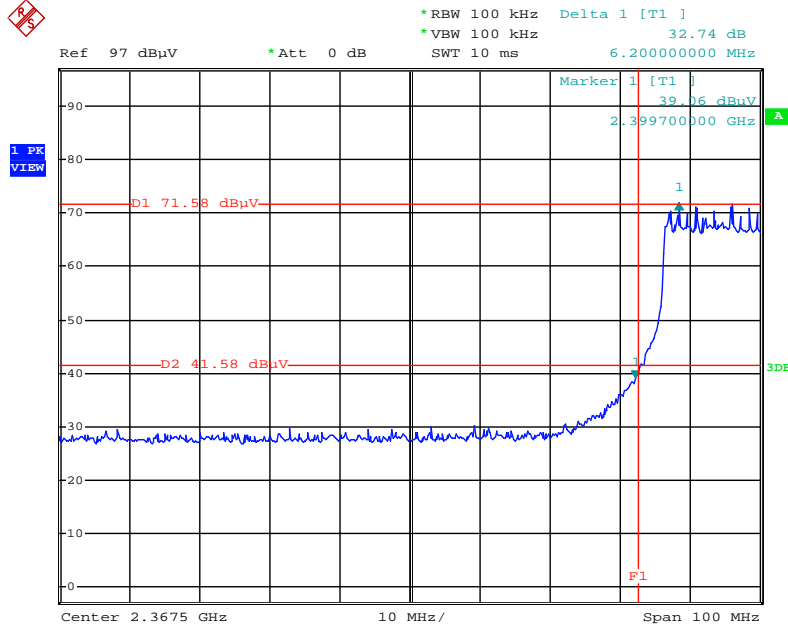


Date: 3.JUN.2011 23:47:45

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 9-1 + Ant. 9-3 / 2452 MHz

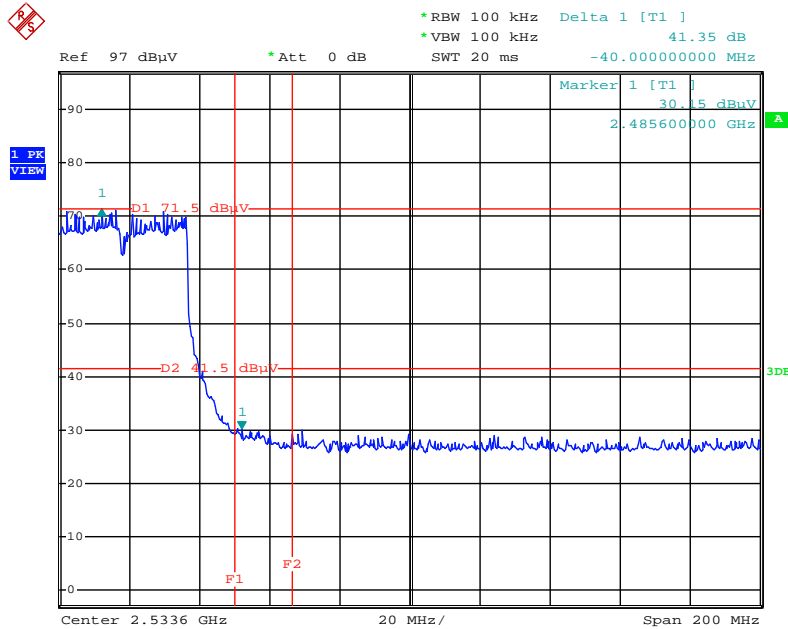


Date: 3.JUN.2011 23:51:26

Low Band Edge Plot on Configuration IEEE 802.11b / Ant. 9-1 + Ant. 9-3 / 2412 MHz

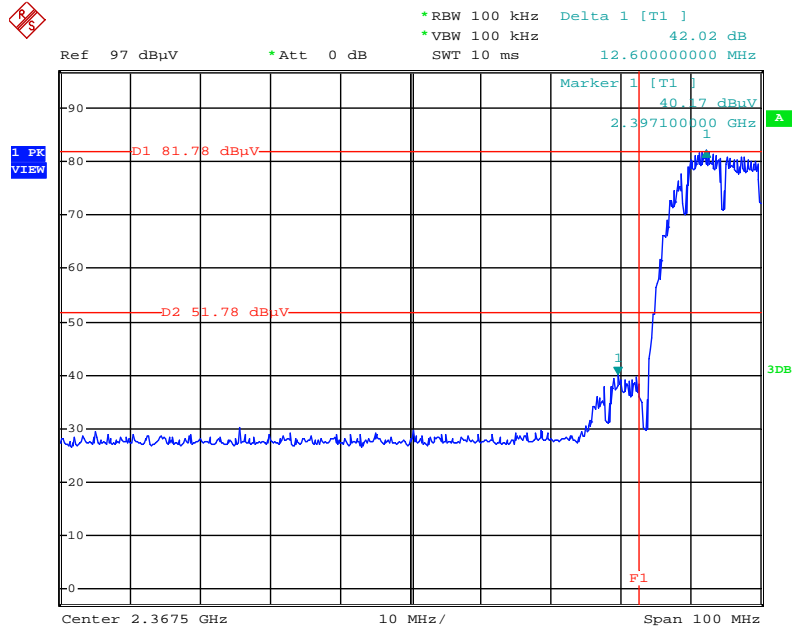


Date: 3.JUN.2011 23:36:40

High Band Edge Plot on Configuration IEEE 802.11b / Ant. 9-1 + Ant. 9-3 / 2462 MHz

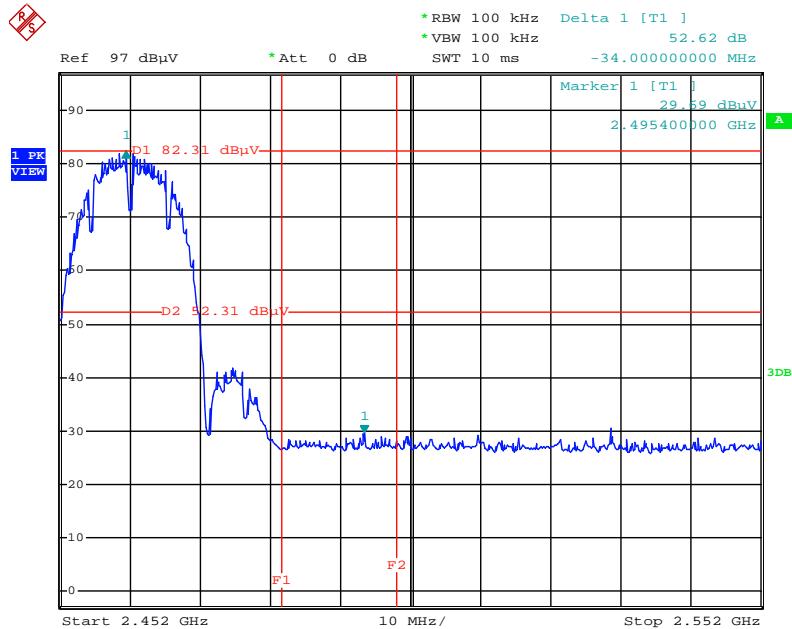


Date: 4.JUN.2011 00:01:06

Low Band Edge Plot on Configuration IEEE 802.11g / Ant. 9-1 + Ant. 9-3 / 2412 MHz

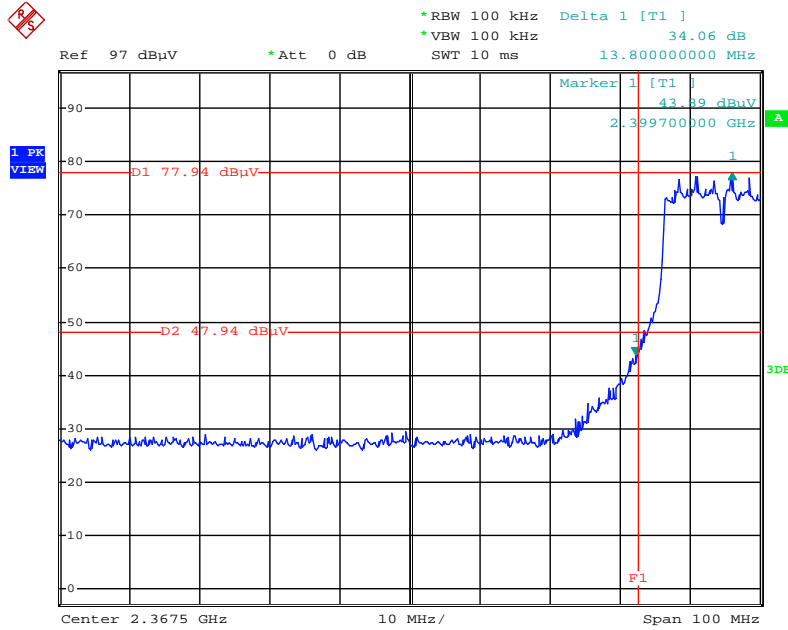

Date: 3.JUN.2011 23:41:25


High Band Edge Plot on Configuration IEEE 802.11g / Ant. 9-1 + Ant. 9-3 / 2462 MHz

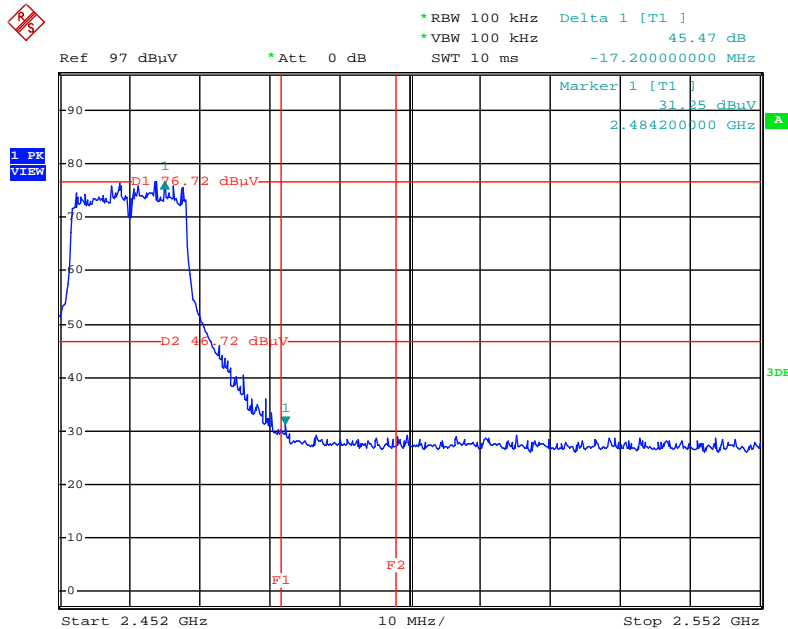

Date: 3.JUN.2011 23:59:09


<For Ant. 7>

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 7-1 + Ant. 7-3 / 5745 MHz

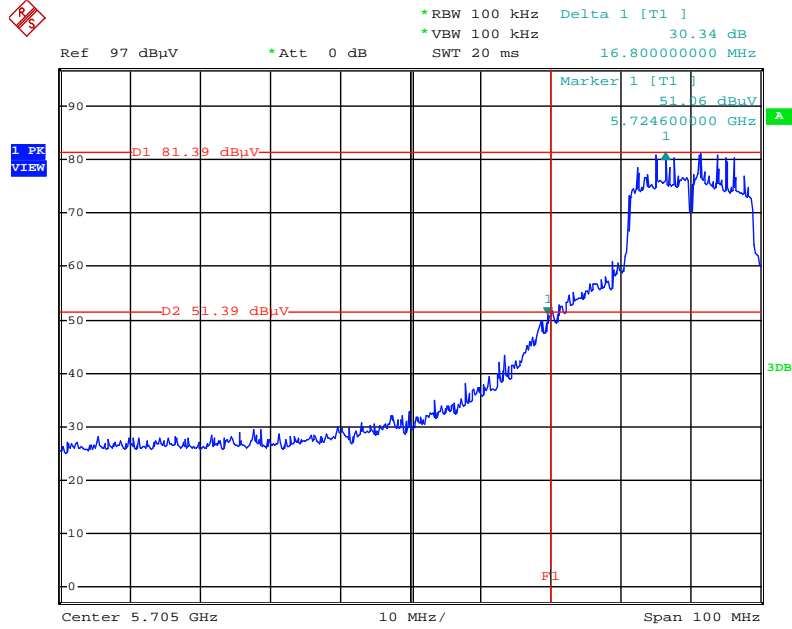


Date: 9.JUN.2011 04:29:39

High Band Edge Plot on Configuration IEEE 802.11n MCS8 20MHz / Ant. 7-1 + Ant. 7-3 / 5825 MHz

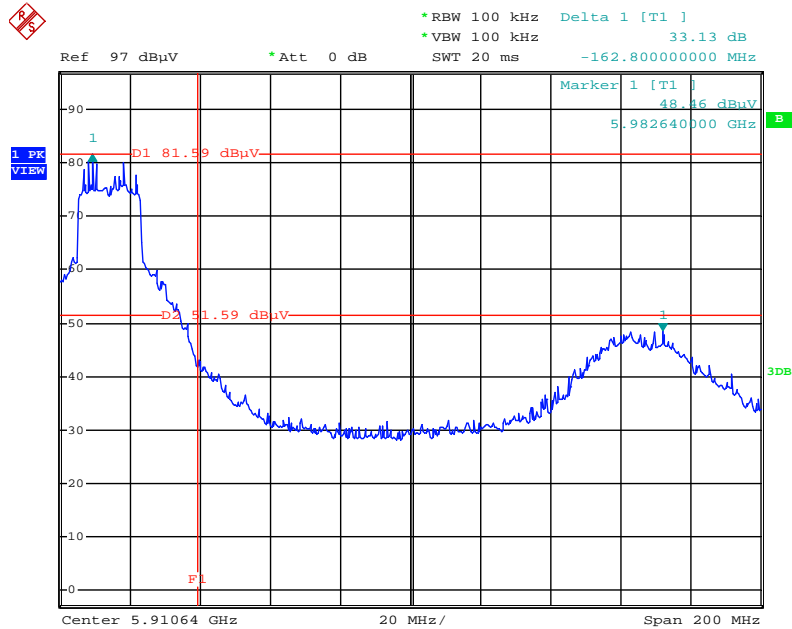


Date: 9.JUN.2011 04:34:12

Low Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 7-1 + Ant. 7-3 / 5755 MHz

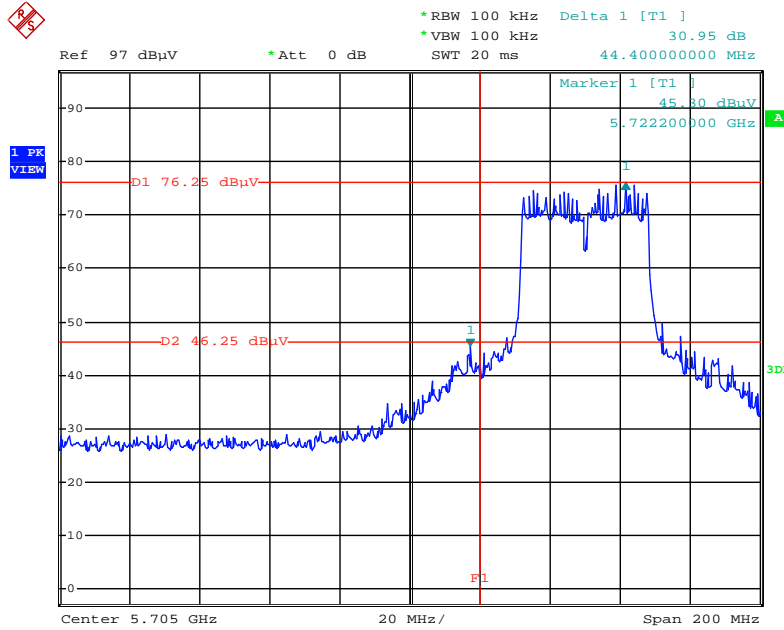


Date: 9.JUN.2011 04:43:58

High Band Edge Plot on Configuration IEEE 802.11n MCS8 40MHz / Ant. 7-1 + Ant. 7-3 / 5795 MHz

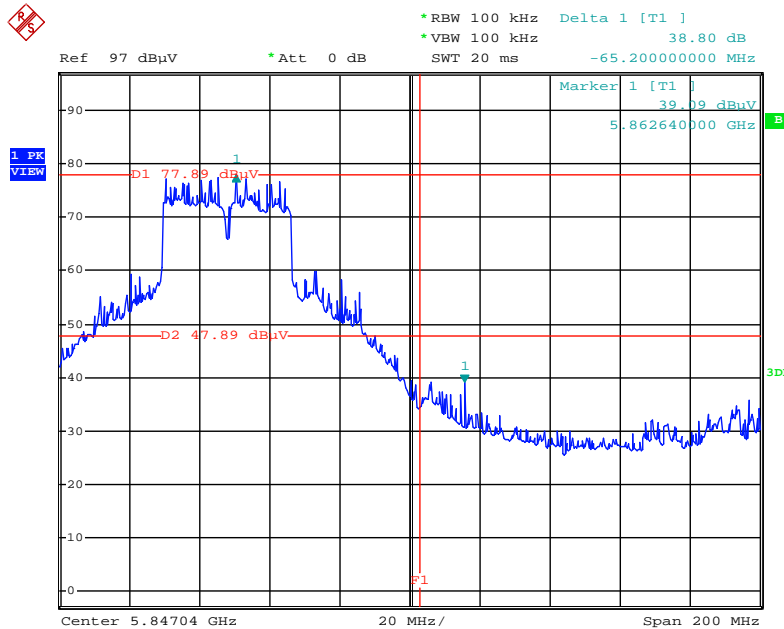


Date: 9.JUN.2011 04:49:02

Low Band Edge Plot on Configuration IEEE 802.11a / Ant. 7-1 + Ant. 7-3 / 5745 MHz

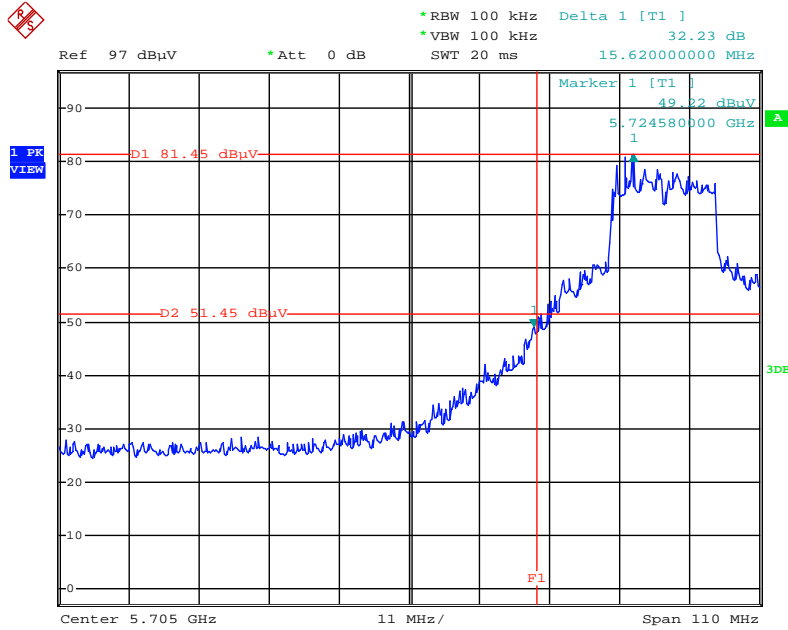

Date: 9.JUN.2011 04:07:14

High Band Edge Plot on Configuration IEEE 802.11a / Ant. 7-1 + Ant. 7-3 / 5825 MHz

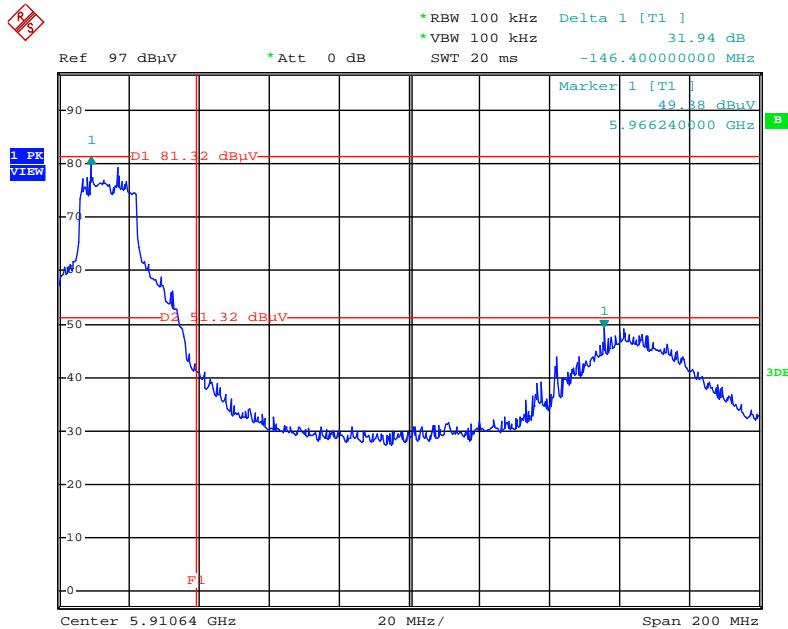

Date: 9.JUN.2011 04:20:05

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|----------------------------|--------------|------------------|-------------|------------------|------------------|-----------------------|
| EMI Test Receiver | R&S | ESCS 30 | 100377 | 9kHz ~ 2.75GHz | Sep. 01, 2010 | Conduction (CO01-CB) |
| LISN | F.C.C. | FCC-LISN-50-16-2 | 04083 | 150kHz ~ 100MHz | Oct. 28, 2010 | Conduction (CO01-CB) |
| V- LISN | Schwarzbeck | NSLK 8127 | 8127-478 | 9K ~ 30MHz | Nov. 16, 2010 | Conduction (CO01-CB) |
| PULSE LIMITER | R&S | ESH3-Z2 | 100430 | 9K~30MHz | Jan. 04, 2011 | Conduction (CO01-CB) |
| COND Cable | - | Cable | - | 0.15MHz~30MHz | Dec. 04, 2010 | Conduction (CO01-CB) |
| BILOG ANTENNA | Schaffner | CBL6112D | 22021 | 20MHz ~ 2GHz | Oct. 17, 2010 | Radiation (03CH01-CB) |
| Horn Antenna | EMCO | 3115 | 00075790 | 750MHz~18GHz | Nov. 22, 2010 | Radiation (03CH01-CB) |
| Horn Antenna | SCHWARZBEAK | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Oct. 08, 2010 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8447D | 2944A10991 | 0.1MHz ~ 1.3GHz | Nov. 17, 2010 | Radiation (03CH01-CB) |
| Pre-Amplifier | Agilent | 8449B | 3008A02310 | 1GHz ~ 26.5GHz | Nov. 23, 2010 | Radiation (03CH01-CB) |
| Pre-Amplifier | WM | TF-130N-R1 | 923365 | 26.5GHz ~ 40GHz | Nov. 17, 2010 | Radiation (03CH01-CB) |
| Spectrum analyzer | R&S | FSP | 100304 | 9kHz ~ 40GHz | Nov. 22, 2010 | Radiation (03CH01-CB) |
| EMI Test Receiver | R&S | ESCS 30 | 100355 | 9KHz ~ 2.75GHz | Mar. 22, 2011 | Radiation (03CH01-CB) |
| Loop Antenna | Teseq | HLA 6120 | 24155 | 9 kHz - 30 MHz | Sep. 09, 2010* | Radiation (03CH01-CB) |
| Turn Table | INN CO | CO 2000 | N/A | 0 ~ 360 degree | N/A | Radiation (03CH01-CB) |
| Antenna Mast | INN CO | CO2000 | N/A | 1 m - 4 m | N/A | Radiation (03CH01-CB) |
| RF Cable-low | Woken | Low Cable-1 | N/A | 30 MHz - 1 GHz | Nov. 17, 2010 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-1 | N/A | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-2 | N/A | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-3 | N/A | 1 GHz - 40 GHz | Nov. 17, 2010 | Radiation (03CH01-CB) |
| RF Cable-high | Woken | High Cable-4 | N/A | 1 GHz - 40 GHz | Nov. 17, 2010 | Radiation (03CH01-CB) |
| Spectrum analyzer | R&S | FSP30 | 100023 | 9KHz~30GHz | Mar. 15, 2011 | Conducted (TH01-CB) |
| Spectrum analyzer | R&S | FSV30 | 101026 | 9KHz~30GHz | Jul. 23, 2010 | Conducted (TH01-CB) |
| Temp. and Humidity Chamber | Ten Billion | TTH-D3SP | TBN-931011 | -30~100 degree | May 20, 2011 | Conducted (TH01-CB) |
| Thermo-Hygro Meter | N/A | HC 520 | #1 | 15~70 degree | Nov. 02, 2010 | Conducted (TH01-CB) |
| Signal Generator | R&S | SMR40 | 100302 | 10MHz-40GHz | Nov. 19, 2010 | Conducted (TH01-CB) |

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-------------------|--------------|---------------|------------|------------------|------------------|---------------------|
| RF Power Divider | HP | 11636A | 00306 | 2GHz ~ 18GHz | N/A | Conducted (TH01-CB) |
| RF Power Splitter | Anaren | 44100 | 1839 | 2GHz ~ 18GHz | N/A | Conducted (TH01-CB) |
| RF Power Splitter | Anaren | 42100 | 17930 | 2GHz ~ 18GHz | N/A | Conducted (TH01-CB) |
| Signal generator | R&S | SMU200A | 102782 | 10MHz-40GHz | Mar. 09, 2011 | Conducted (TH01-CB) |
| Horn Antenna | COM-POWER | AH-118 | 071187 | 1GHz – 18GHz | Mar. 18, 2011 | Conducted (TH01-CB) |
| Horn Antenna | COM-POWER | AH-118 | 071042 | 1GHz – 18GHz | Oct. 14, 2010 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-7 | - | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-8 | - | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-9 | - | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-10 | - | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-11 | - | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-12 | - | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Conducted (TH01-CB) |
| RF Cable-high | Woken | High Cable-13 | - | 1 GHz – 26.5 GHz | Nov. 17, 2010 | Conducted (TH01-CB) |
| Power Sensor | Anritsu | MA2411B | 0917223 | 300MHz~40GHz | Sep. 13, 2010 | Conducted (TH01-CB) |
| Power Meter | Anritsu | ML2495A | 1035008 | 300MHz~40GHz | Sep. 08, 2010 | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

| | |
|--------|--|
| SHIJR | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055 |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695 |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740 |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626 |
| NEIHU | ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777 |
| JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

| | |
|---------------------------------------|--|
| Accreditation Criteria | : ISO/IEC 17025:2005 |
| Accreditation Number | : 1190 |
| Originally Accredited | : December 15, 2003 |
| Effective Period | : January 10, 2010 to January 09, 2013 |
| Accredited Scope | : Testing Field, see described in the Appendix |
| Specific Accreditation Program | : Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities |

Jay-san Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

Pl, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix