



FCC TEST REPORT

REPORT NO.: RF980729H05B

MODEL NO.: MC3190

RECEIVED: Mar. 22, 2010

TESTED: Mar. 22 to 23, 2010

ISSUED: Apr. 02, 2010

APPLICANT: Motorola Inc.

ADDRESS: One Motorola Plaza Holtsville NY
11742-1300 USA

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	12
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4	DESCRIPTION OF SUPPORT UNITS	16
3.5	CONFIGURATION OF SYSTEM UNDER TEST	17
4.	TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)	19
4.1	RADIATED EMISSION MEASUREMENT	19
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.1.2	TEST INSTRUMENTS	20
4.1.3	TEST PROCEDURES	21
4.1.4	DEVIATION FROM TEST STANDARD	21
4.1.5	TEST SETUP	22
4.1.6	EUT OPERATING CONDITIONS	22
4.1.7	TEST RESULTS	23
4.2	6dB BANDWIDTH MEASUREMENT	32
4.2.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	32
4.2.2	TEST INSTRUMENTS	32
4.2.3	TEST PROCEDURE	33
4.2.4	DEVIATION FROM TEST STANDARD	33
4.2.5	TEST SETUP	33
4.2.6	EUT OPERATING CONDITIONS	33
4.2.7	TEST RESULTS	34
4.3	MAXIMUM PEAK OUTPUT POWER	38
4.3.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	38
4.3.2	INSTRUMENTS	38
4.3.3	TEST PROCEDURES	38
4.3.4	DEVIATION FROM TEST STANDARD	38
4.3.5	TEST SETUP	38
4.3.6	EUT OPERATING CONDITIONS	39
4.3.7	TEST RESULTS	40
4.4	POWER SPECTRAL DENSITY MEASUREMENT	41
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	41
4.4.2	TEST INSTRUMENTS	41
4.4.3	TEST PROCEDURE	42



A D T

4.4.4	DEVIATION FROM TEST STANDARD	42
4.4.5	TEST SETUP	42
4.4.6	EUT OPERATING CONDITION.....	42
4.4.7	TEST RESULTS	43
4.5	CONDUCTED OUT-BAND EMISSION MEASUREMENT	47
4.5.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	47
4.5.2	TEST INSTRUMENTS	47
4.5.3	TEST PROCEDURE.....	47
4.5.4	DEVIATION FROM TEST STANDARD	48
4.5.5	EUT OPERATING CONDITION.....	48
4.5.6	TEST RESULTS	48
4.6	ANTENNA REQUIREMENT	53
4.6.1	STANDARD APPLICABLE	53
4.6.2	ANTENNA CONNECTED CONSTRUCTION	53
5.	INFORMATION ON THE TESTING LABORATORIES	54
6.	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	55



1. CERTIFICATION

PRODUCT: Mobile Computer
BRAND NAME: MOTOROLA
MODEL NO.: MC3190
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Mar. 22 to 23, 2010
APPLICANT: Motorola Inc.
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Apr. 02, 2010
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Apr. 02, 2010
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Apr. 02, 2010
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 802.11b & g, 2412~2472MHz Band

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -7.57dB at 375.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

NOTE: This report is prepared for FCC class II permissive change. Only radiated emission, spectrum bandwidth, maximum peak output power, power spectral density and conducted Out-Band emission measurement were presented in this test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile Computer
MODEL NO.	MC3190
FCC ID	UZ7MC3190
POWER SUPPLY	DC 12V to cradle, DC 5.4V from power adapter or DC 3.7V from battery
MODULATION TYPE	For WLAN : CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM For Bluetooth : GFSK, $\pi/4$ – DQPSK, 8DPSK
MODULATION TECHNOLOGY	For WLAN : DSSS, OFDM For Bluetooth : FHSS
TRANSFER RATE	For WLAN : 802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps 802.11a: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps For Bluetooth : DH 1, DH 3, DH 5
FREQUENCY RANGE	For WLAN : For 15.407 802.11a: 5.18 ~ 5.32GHz, 5.50 ~ 5.70GHz For 15.247(2.4GHz) 802.11b & 802.11g: 2412 ~ 2472MHz For 15.247(5GHz) 802.11a: 5.745 ~ 5.825GHz For Bluetooth :2402MHz ~ 2480MHz
NUMBER OF CHANNEL	For WLAN : For 15.407 19 for 802.11a For 15.247(2.4GHz) 13 for 802.11b, 802.11g For 15.247(5GHz) 5 for 802.11a For Bluetooth : 79



MAXIMUM OUTPUT POWER	For WLAN : For 15.407 802.11a: 28.510mW For 15.247(2.4GHz) 802.11b: 52.360mW 802.11g: 165.959mW For 15.247(5GHz) 802.11a: 127.644mW
	For Bluetooth : GFSK: 1.445 mW 8DPSK: 2.449 mW $\pi/4$ – DQPSK: 2.265 mW
ANTENNA TYPE	Please see note 5
DATA CABLE	RS232 Cable x 1 (Part No.: 25-67866-03R) USB Cable x 1 (Part No.: 25-67868-03R) (only for test, not for sale together)
I/O PORTS	USB port x 1, SD slot port x 1, Audio port x 1
ASSOCIATED DEVICES	Battery x 1 for MC3190 (S & G) (Model No.: 82-127909-02) Battery x 1 for MC3190(R) (Model No.: 82-127912-01)

NOTE:

1. This report is prepared for FCC class II permissive change. This report is supplemental to the original Report No.: RF980729H05 with following addition:
u Add channel 12 and 13 test of 2.4GHz Band.
2. There are Bluetooth technology (BT2.1+EDR) and WLAN technology used for the EUT.
3. There are different types in MC3190, which with identical WLAN module and Bluetooth module in inside.
4. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y plane
Mode B	Z-X plane
Mode C	Z-Y plane

From the above modes, the worst emission level was found in **Mode C**. Therefore only the test data of the modes were recorded in this report individually.



A D T

5. There are nine antennas provided to this EUT, please refer to the following table:

For WLAN								
No.	Brand	Model	Antenna Type	Gain (dBi)	Connector Type	Frequency range (MHz)	Cable Loss(dB)	Cable Length
1	Laird (R Type)	Rot main	PIFA	0.37(2.4G) 4.81(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	25 ± 0.5mm
2	Laird (R Type)	Rot aux	PIFA	1.63(2.4G) 4.93(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	61 +2/-1mm
3	Laird (S Type)	Str main	PIFA	0.89(2.4G) 4.34(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	25 ± 0.5mm
4	Laird (S Type)	Str aux	PIFA	1.09(2.4G) 4.52(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	61 +2/-1mm
5	Laird (G Type)	Gun main	PIFA	2.16(2.4G) 5.83(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	25 ± 0.5mm
6	Laird (G Type)	Gun aux	PIFA	2.46(2.4G) 5.69(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	61 +2/-1mm

Note :

1. For 2.4G: The antenna 6 was selected as representative antenna for the test.
2. For 5G: The antenna 5 was selected as representative antenna for the test.

For Bluetooth

No.	Brand	Model	Antenna Type	Gain (dBi)	Connector Type	Frequency range (MHz)	Cable Loss(dB)	Cable Length
1	Motorola	Rot type	PIFA	3.08	Hirose U.FL	2400~2480	0.1~0.15	35 ± 0.5mm
2	Motorola	Str type	PIFA	2.481	Hirose U.FL	2400~2480	0.1~0.15	35 ± 0.5mm
3	Motorola	Gun type	PIFA	2.885	Hirose U.FL	2400~2480	0.1~0.15	35 ± 0.5mm

6. EUT Configuration:

	Straight type	Gun Type	Rotating type
	Type1	Type2_2	Type3
OS	WM6.1	WM6.1	WM6.1
CPU	624MHZ	624MHZ	624MHZ
RAM	128MB	128MB	128MB
Flash	512MB	512MB	512MB
Keypad	48keys	28keys	38keys
Battery	(Motorola)	(Motorola)	(Motorola)
Scan Engine	SE4500 SRBB (imager)	SE950	SE4500 HDBB DPM (imager)
wifi ANT	Str main/Str aux	Gun main/Gun aux	Rot main/Rot aux
WLAN (a/b/g)	V	V	V
BT	V	V	V

7. The EUT could be supplied with the a charger, power adapter and Li-ion battery as below:

Cradle 1 (1-slot) (only for test, not for sale together)	
Brand:	SYMBOL
Part No.:	CRD3000-1001RR
Input power :	+12V-----3.3A
I/O Ports:	USB Port x 1 RJ-45(console) Port x 1
Associated devices:	USB cable x 1 (Part No.: 25-68596-01R) (1.6m, Unshielded without core) RJ-45(console) cable x 1 (Part No.: 25-63852-01R) (1.8m, Unshielded without core) Adapter x 1 (Part No.: 50-14000-148R)
Cradle 2 (4-slot) (only for test, not for sale together)	
Brand:	SYMBOL
Part No.:	CRD3000-4001ER
Input power :	+12V-----9A
I/O Ports:	RJ-45(LAN) Port x 2
Associated devices:	Power cable x 2 (Part No.: 50-16002-042R) (1.8m, Shielded with two cores) Adapter x 2 (Part No.: 50-14000-241R)
Adapter 1 (only for Cradle 1 use, not for sale together)	
Brand:	HIPRO
Model No.:	HP-O2040D43
Part No.:	50-14000-148R
Input power :	100-240V, 50-60Hz, 1.5A
Output power :	+12V-----3.33A DC output cable (1.8m, Unshielded)
Adapter 2 (only for Cradle 2 use, not for sale together)	
Brand:	SYMBOL
Model No.:	SYM04-1
Part No.:	50-14000-241R
Input power :	100-120/200-240V, 50-60Hz, 3.0/1.5A
Output power :	+12V-----9.0A

Adapter 3 (only for test, not for sale together)	
Brand:	DELTA
Model No.:	ADP-16GB A
Part No.:	50-14000-147
Input power :	100-240V, 50-60Hz, 0.4A
Output power :	+5.4V----3.0A DC output cable (1.8m, Unshielded, with one core)
Adapter 4 (only for test, not for sale together)	
Brand:	MOTOROLA
Model No.:	EADP-16BB A
Part No.:	50-14000-249R
Input power :	100-240V, 50-60Hz, 0.4A
Output power :	+5.4V----3.0A DC output cable (1.8m, Unshielded)
Li-ion Battery 1 for MC3190 (S & G)	
Brand:	MOTOROLA
Model No.:	82-127909-02
RATING:	3.7V, 4800mAh
Li-ion Battery 2 for MC3190 (S & G)	
Brand:	SYMBOL
Model No.:	55-060112-05
RATING:	3.7V, 4400mAh
Li-ion Battery 3 for MC3190(R)	
Brand:	MOTOROLA
Model No.:	82-127912-01
RATING:	3.7V, 2740mAh
Li-ion Battery 4 for MC3190(R)	
Brand:	SYMBOL
Model No.:	55-060117-05
RATING:	3.7V, 2740mAh

8. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a, 802.11b, 802.11g and Bluetooth technology.
9. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

Thirteen channels are provided for 802.11b, 802.11g:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	8	2447MHz
2	2417MHz	9	2452MHz
3	2422MHz	10	2457MHz
4	2427MHz	11	2462MHz
5	2432MHz	12	2467MHz
6	2437MHz	13	2472MHz
7	2442MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

The device has several types and different accessory, therefore the worst case base on investigation by different combination for each test item and its data was recorded in this report.

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE < 1G	RE ≥ 1G	APCM	
A		√	√	USB Mode: Type3 MC3190+Battery+Adapter(motorola)
B	√			cradle mode: (4-slot) 2*(Type3 MC3190+Battery) +2*(Type2_2 MC3190+Battery)+Adapter

Where **RE < 1G**: Radiated Emission below 1GHz **RE ≥ 1G**: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11g	1 to 13	12	OFDM	BPSK	6	B

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 13	12, 13	DSSS	DBPSK	1	A
802.11g	1 to 13	12, 13	OFDM	BPSK	6	A



A D T

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 13	12, 13	DSSS	DBPSK	1	A
802.11g	1 to 13	12, 13	OFDM	BPSK	6	A

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 13	12, 13	DSSS	DBPSK	1	A
802.11g	1 to 13	12, 13	OFDM	BPSK	6	A

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Mobile Computer. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-7016 6-5CA-0448	PIW632500516610
2	NOTEBOOK COMPUTER	DELL	PP17L	CN-ONF743-48643 -7AV-0124	FCC DoC
3	EARPHONE	SYMBOL	NA	NA	NA
4	SD CARD	Transcend	NA	NA	NA
5	IPOD	APPLE	A1137	6U6078FMUPR	FCC DoC

No.	Signal cable description
1	NA
2	NA
3	1.3 m wrapped unshielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core.
4	NA
5	1.2 m foil shielded wire, USB connector, w/o core.


Note: 1. All power cords of the above support units are unshielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For USB Mode:

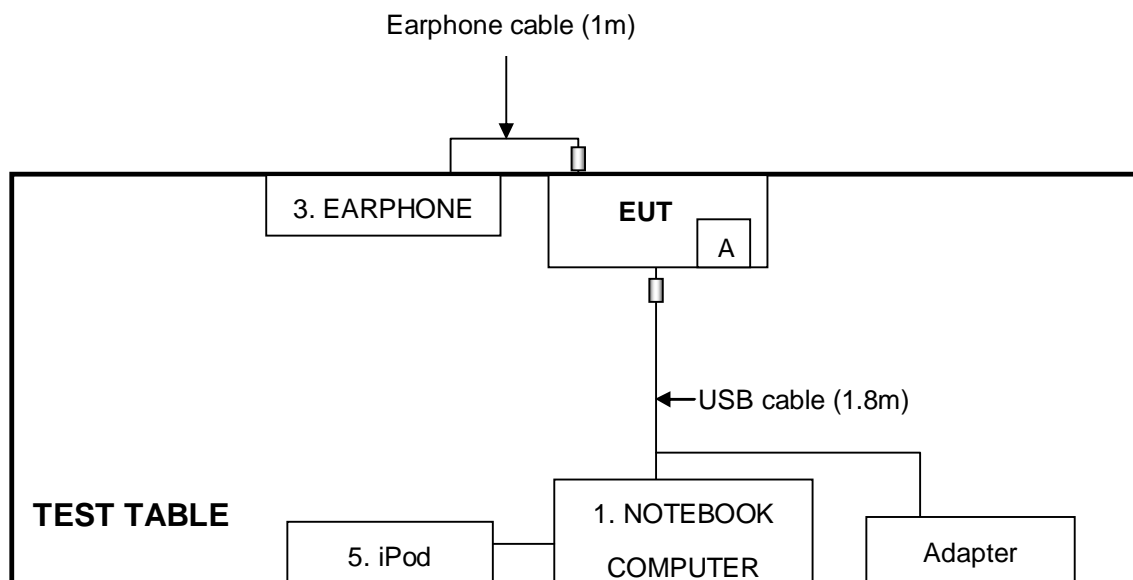

NOTE: 1. Item A is the SD Card (Support unit 4).

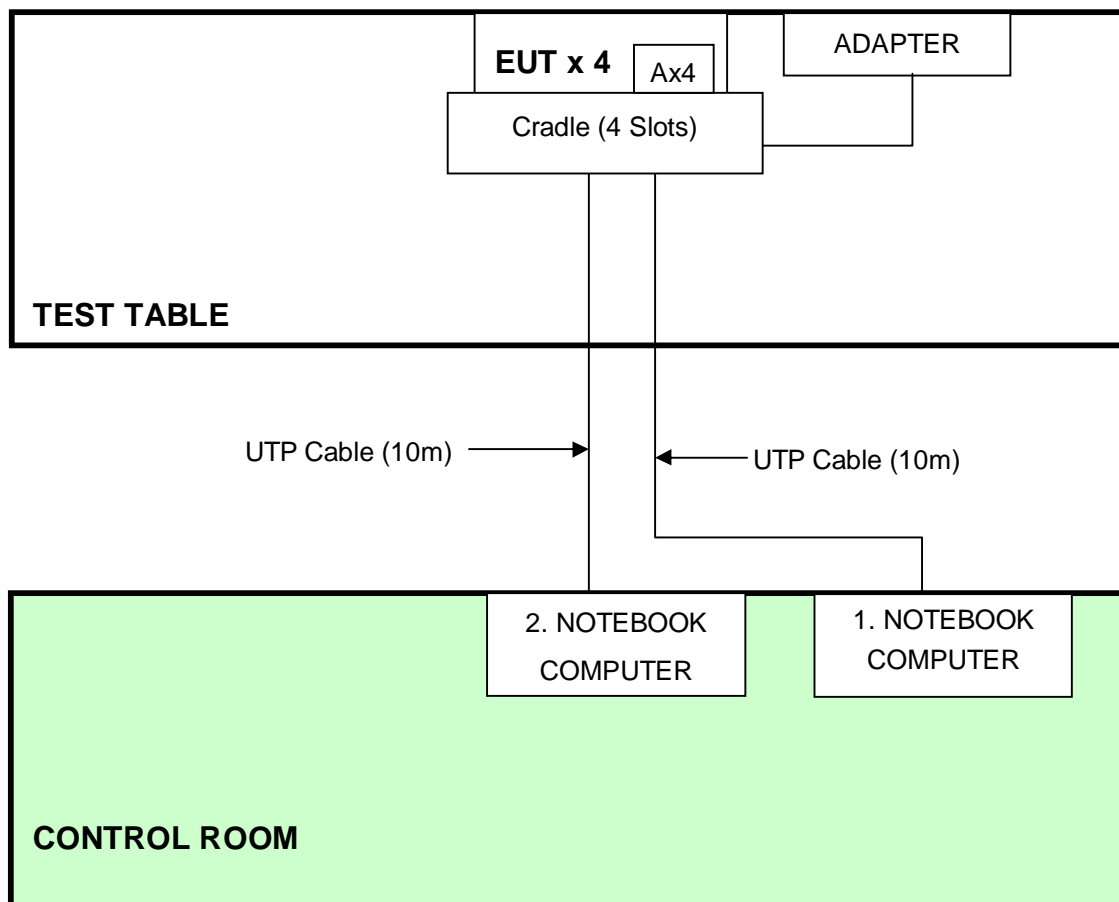For Cradle (4 Slot) Mode:

NOTE: 1. Item A is the SD Card (Support unit 4).

4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 24 , 2009	Apr. 23 , 2010
HP Pre_Amplifier	8449B	300801923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Aug. 28, 2009	Aug. 27, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 29, 2009	Apr. 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 14, 2009	Aug. 13, 2010
RF Cable	8DFB	STCCAB-30M-1GHz	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 7450G-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

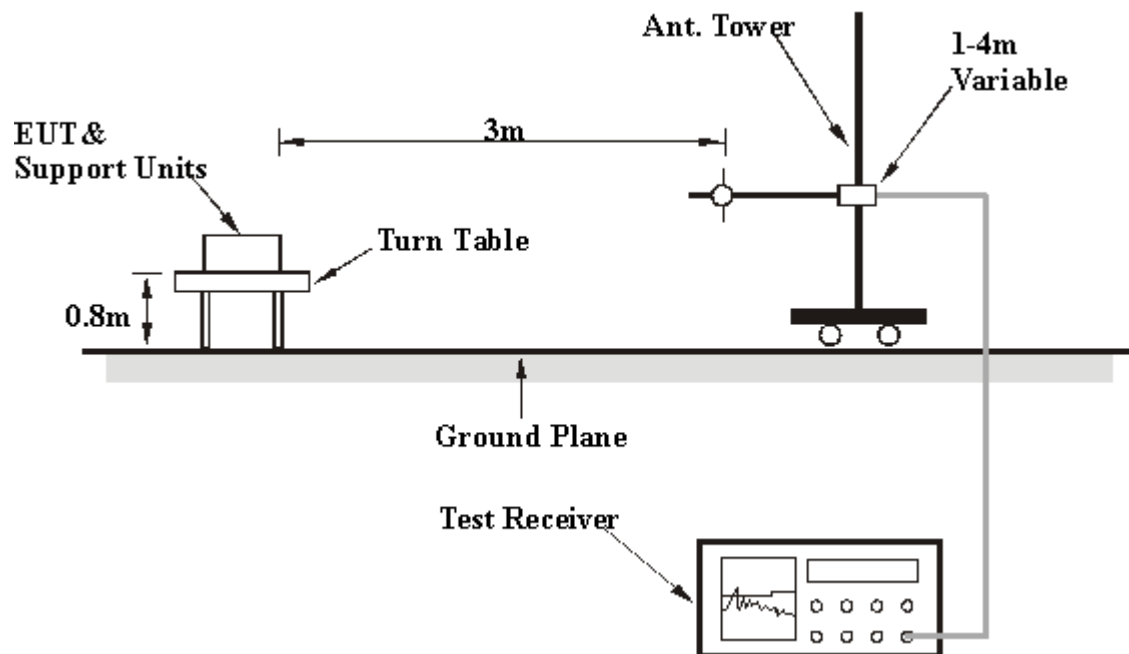

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

For USB Mode:

1. Set the EUT under charger condition via USB charging cable.
2. EUT runs the test program "CEcTxRx.v1.5.0.0" to transmission/receiving condition continuously.

For Cradle Mode:

1. Set the EUT under charger condition via cradle.
2. EUT runs the test program "CEcTxRx.v1.5.0.0" to transmission/receiving condition continuously.



A D T

4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 12	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25.0deg. C, 66.0%RH 1024hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.67	24.55 QP	40.00	-15.45	1.49 H	177	9.95	14.60
2	65.74	29.28 QP	40.00	-10.72	1.37 H	96	15.79	13.49
3	139.24	30.26 QP	43.50	-13.24	1.15 H	92	15.73	14.53
4	173.32	30.73 QP	43.50	-12.77	1.00 H	198	15.64	15.09
5	250.00	28.66 QP	46.00	-17.34	1.00 H	196	14.41	14.25
6	375.00	38.43 QP	46.00	-7.57	1.00 H	174	19.62	18.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.56	30.59 QP	40.00	-9.41	1.00 V	222	16.11	14.48
2	79.95	27.13 QP	40.00	-12.87	1.00 V	272	16.24	10.89
3	135.24	28.24 QP	43.50	-15.26	1.00 V	148	14.12	14.12
4	151.56	29.36 QP	43.50	-14.14	1.00 V	13	13.62	15.74
5	250.00	26.46 QP	46.00	-19.54	1.00 V	20	12.21	14.25
6	375.00	36.27 QP	46.00	-9.73	1.00 V	127	17.46	18.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 12	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 70.0%RH 1024hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	84.00 PK			1.04 H	320	53.64	30.36
2	*2467.00	81.51 AV			1.04 H	320	51.15	30.36
3	2499.97	54.17 PK	74.00	-19.83	1.04 H	322	23.68	30.49
4	2499.97	41.58 AV	54.00	-12.42	1.04 H	322	11.09	30.49
5	4934.00	42.70 PK	74.00	-31.30	1.36 H	273	7.06	35.64
6	4934.00	33.20 AV	54.00	-20.80	1.36 H	273	-2.44	35.64
7	7401.00	50.00 PK	74.00	-24.00	1.03 H	145	7.87	42.13
8	7401.00	37.90 AV	54.00	-16.10	1.03 H	145	-4.23	42.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	73.80 PK			1.12 V	320	43.44	30.36
2	*2467.00	69.44 AV			1.12 V	320	39.08	30.36
3	2499.86	54.01 PK	74.00	-19.99	1.12 V	321	23.52	30.49
4	2499.86	41.59 AV	54.00	-12.41	1.12 V	321	11.10	30.49
5	4934.00	42.50 PK	74.00	-31.50	1.30 V	286	6.86	35.64
6	4934.00	32.20 AV	54.00	-21.80	1.30 V	286	-3.44	35.64
7	7401.00	49.30 PK	74.00	-24.70	1.00 V	344	7.17	42.13
8	7401.00	37.85 AV	54.00	-16.15	1.00 V	344	-4.28	42.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 13	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 70.0%RH 1024hPa	TESTED BY	Phoenix Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	83.70 PK			1.03 H	321	53.32	30.38
2	*2472.00	80.91 AV			1.03 H	321	50.53	30.38
3	2483.50	58.22 PK	74.00	-15.78	1.05 H	321	27.79	30.43
4	2483.50	41.96 AV	54.00	-12.04	1.05 H	321	11.53	30.43
5	4944.00	42.90 PK	74.00	-31.10	1.43 H	287	7.25	35.65
6	4944.00	32.22 AV	54.00	-21.78	1.43 H	287	-3.43	35.65
7	7416.00	48.90 PK	74.00	-25.10	1.09 H	114	6.74	42.16
8	7416.00	37.80 AV	54.00	-16.20	1.09 H	114	-4.36	42.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	72.42 PK			1.11 V	93	42.04	30.38
2	*2472.00	68.00 AV			1.11 V	93	37.62	30.38
3	2483.50	52.93 PK	74.00	-21.07	1.11 V	94	22.50	30.43
4	2483.50	41.27 AV	54.00	-12.73	1.11 V	94	10.84	30.43
5	4944.00	42.44 PK	74.00	-31.56	1.18 V	0	6.79	35.65
6	4944.00	31.75 AV	54.00	-22.25	1.18 V	0	-3.90	35.65
7	7416.00	49.10 PK	74.00	-24.90	1.33 V	174	6.94	42.16
8	7416.00	37.80 AV	54.00	-16.20	1.33 V	174	-4.36	42.16

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH13, HORIZONTAL)

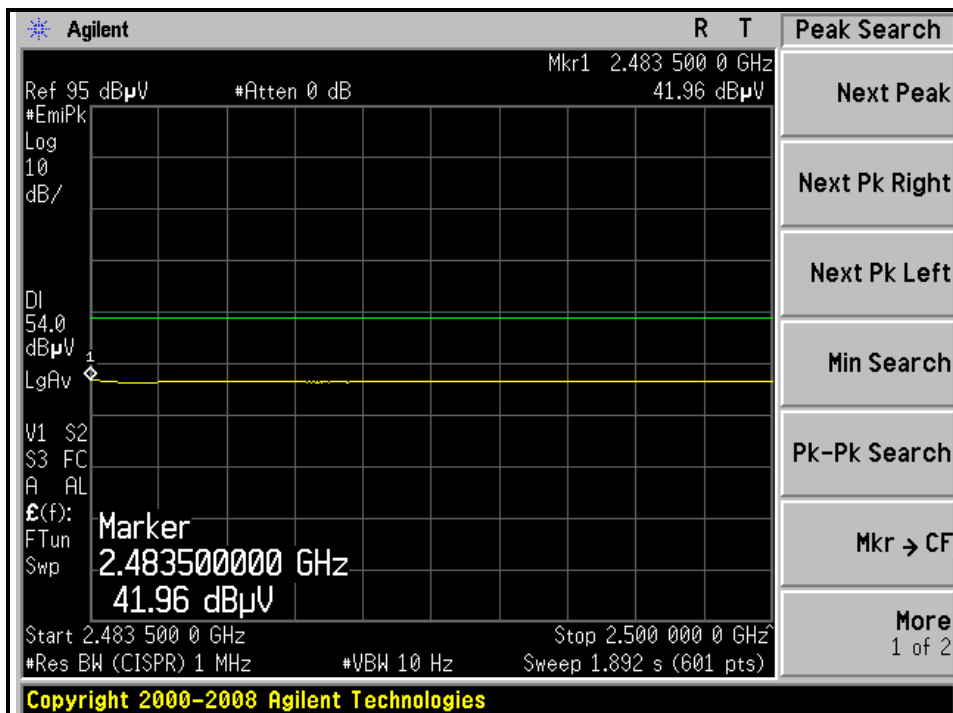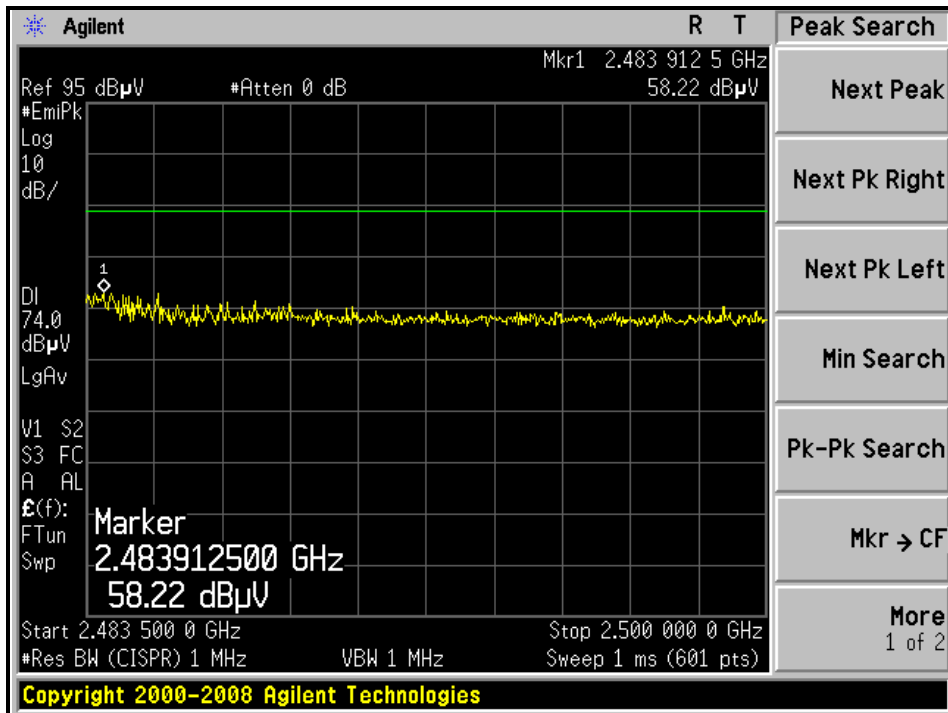



A D T

RESTRICTED BANDEDGE (802.11b MODE, CH13, VERTICAL)

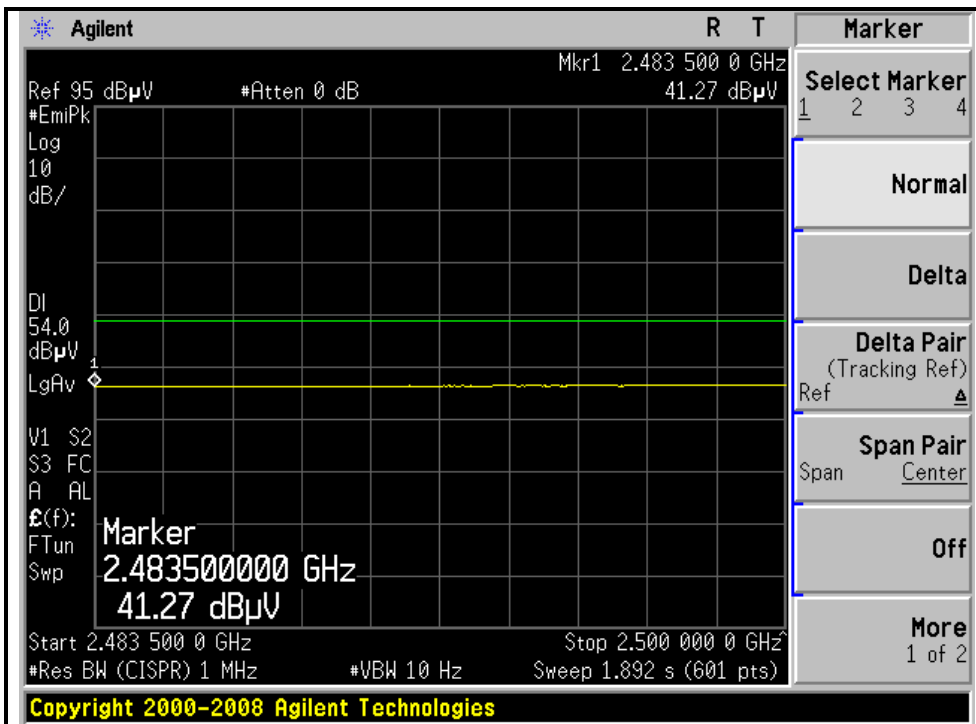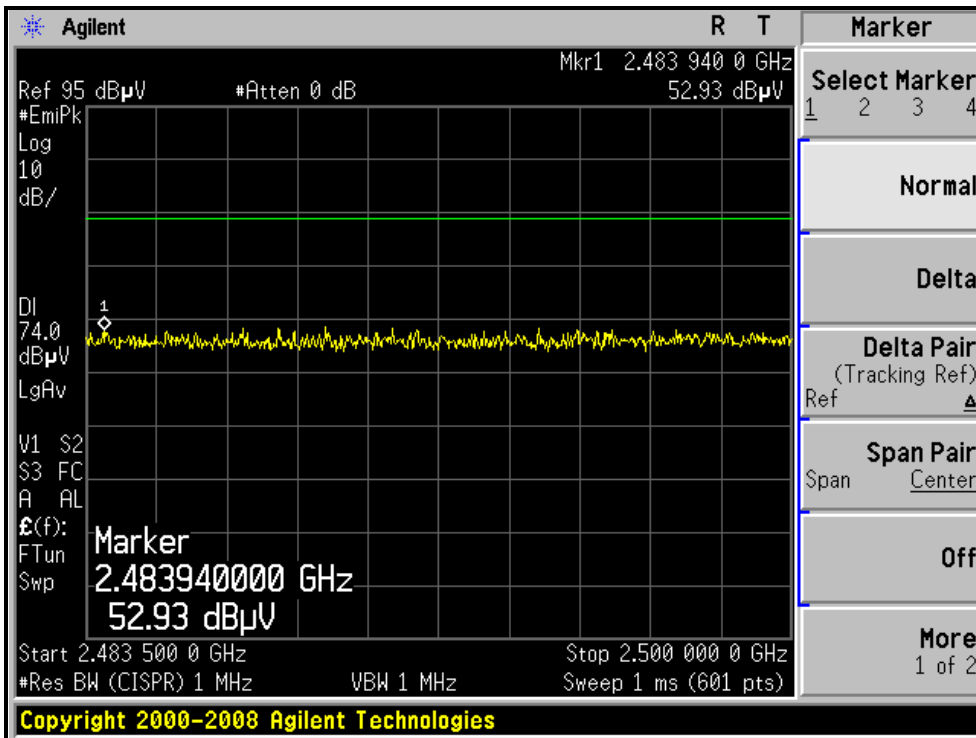



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 12	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 70.0%RH 1024hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	86.70 PK			1.04 H	330	56.34	30.36
2	*2467.00	77.15 AV			1.04 H	330	46.79	30.36
3	2497.36	53.68 PK	74.00	-20.32	1.12 H	245	23.20	30.48
4	2497.36	41.58 AV	54.00	-12.42	1.12 H	245	11.10	30.48
5	4934.00	42.80 PK	74.00	-31.20	1.13 H	98	7.16	35.64
6	4934.00	31.30 AV	54.00	-22.70	1.13 H	98	-4.34	35.64
7	7401.00	49.30 PK	74.00	-24.70	1.13 H	212	7.17	42.13
8	7401.00	38.20 AV	54.00	-15.80	1.13 H	212	-3.93	42.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2467.00	76.72 PK			1.00 V	25	46.36	30.36
2	*2467.00	66.97 AV			1.00 V	25	36.61	30.36
3	2500.00	53.87 PK	74.00	-20.13	1.00 V	25	23.38	30.49
4	2500.00	41.60 AV	54.00	-12.40	1.00 V	25	11.11	30.49
5	4934.00	42.63 PK	74.00	-31.37	1.16 V	219	6.99	35.64
6	4934.00	31.00 AV	54.00	-23.00	1.16 V	219	-4.64	35.64
7	7401.00	49.00 PK	74.00	-25.00	1.04 V	224	6.87	42.13
8	7401.00	38.00 AV	54.00	-16.00	1.04 V	224	-4.13	42.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 13	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24.0deg. C, 70.0%RH 1024hPa	TESTED BY	Phoenix Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	86.70 PK			1.03 H	319	56.32	30.38
2	*2472.00	77.10 AV			1.03 H	319	46.72	30.38
3	2483.78	56.05 PK	74.00	-17.95	1.03 H	315	25.62	30.43
4	2483.78	43.01 AV	54.00	-10.99	1.03 H	315	12.58	30.43
5	4944.00	40.90 PK	74.00	-33.10	1.25 H	134	5.25	35.65
6	4944.00	30.40 AV	54.00	-23.60	1.25 H	134	-5.25	35.65
7	7416.00	47.90 PK	74.00	-26.10	1.05 H	157	5.74	42.16
8	7416.00	36.80 AV	54.00	-17.20	1.05 H	157	-5.36	42.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2472.00	75.90 PK			1.00 V	26	45.52	30.38
2	*2472.00	66.10 AV			1.00 V	26	35.72	30.38
3	2483.50	54.66 PK	74.00	-19.34	1.00 V	24	24.23	30.43
4	2483.50	41.31 AV	54.00	-12.69	1.00 V	24	10.88	30.43
5	4944.00	41.00 PK	74.00	-33.00	1.31 V	96	5.35	35.65
6	4944.00	30.20 AV	54.00	-23.80	1.31 V	96	-5.45	35.65
7	7416.00	47.70 PK	74.00	-26.30	1.09 V	345	5.54	42.16
8	7416.00	36.70 AV	54.00	-17.30	1.09 V	345	-5.46	42.16

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.





A D T

RESTRICTED BANDEDGE (802.11g MODE, CH13, HORIZONTAL)

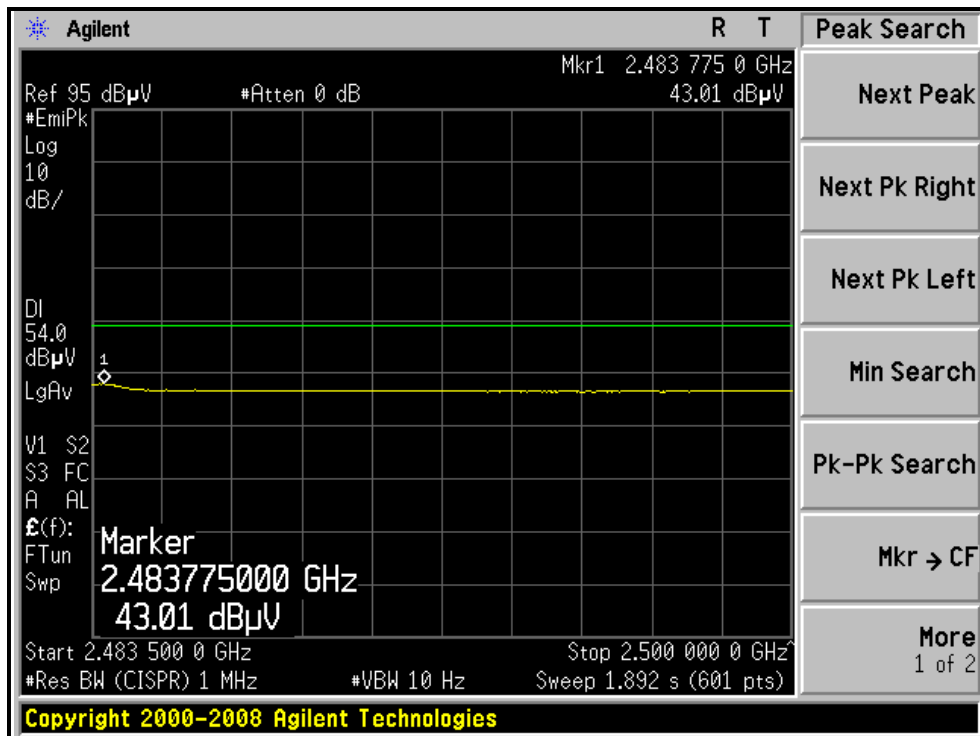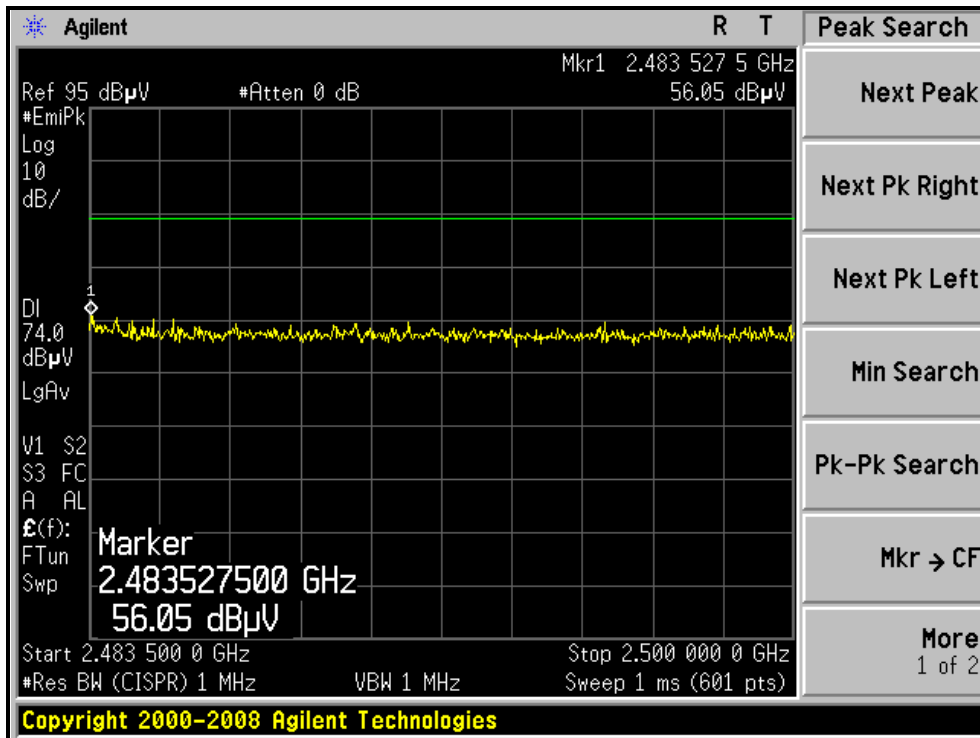

RESTRICTED BANDEDGE (802.11g MODE, CH13, VERTICAL)

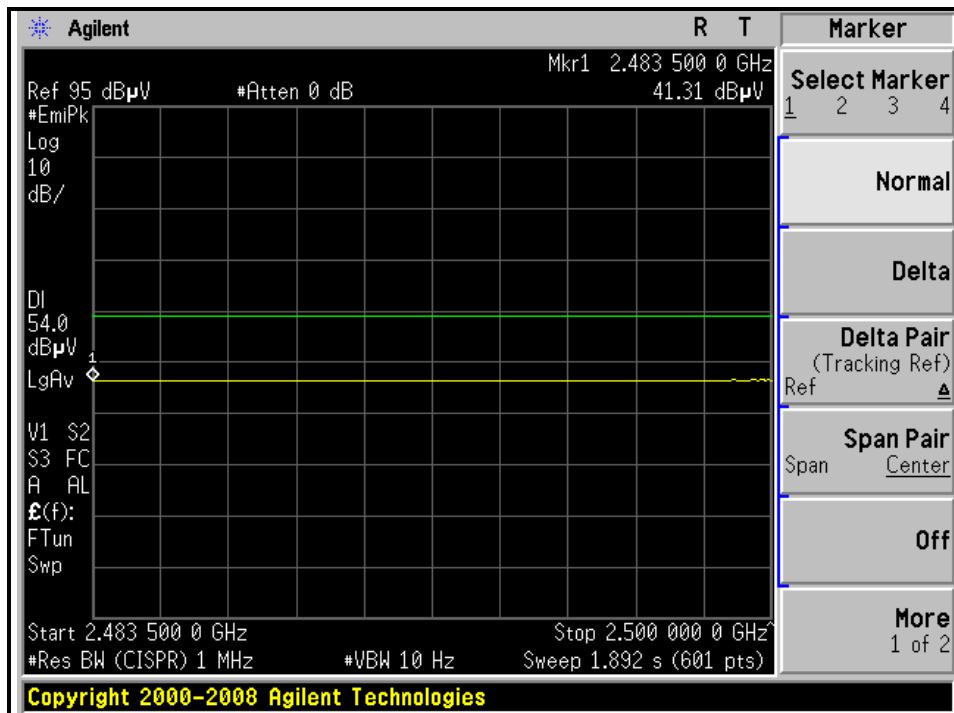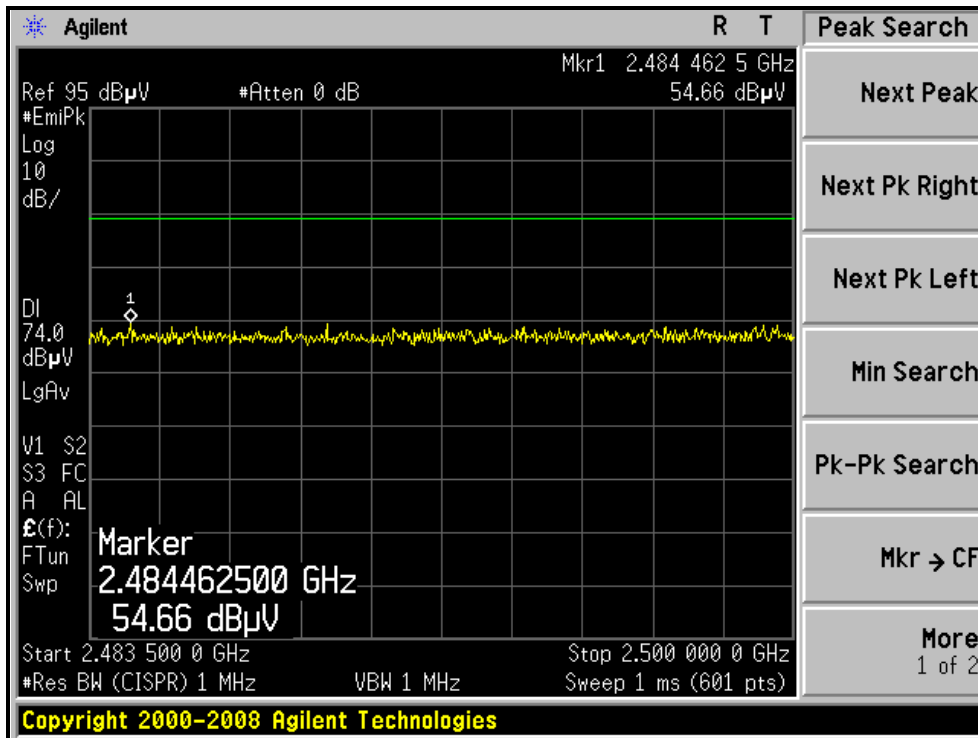



4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP



4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T


4.2.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 1024hPa
TESTED BY	Frank Liu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
12	2467	11.59	0.5	PASS
13	2472	11.60	0.5	PASS


CH12

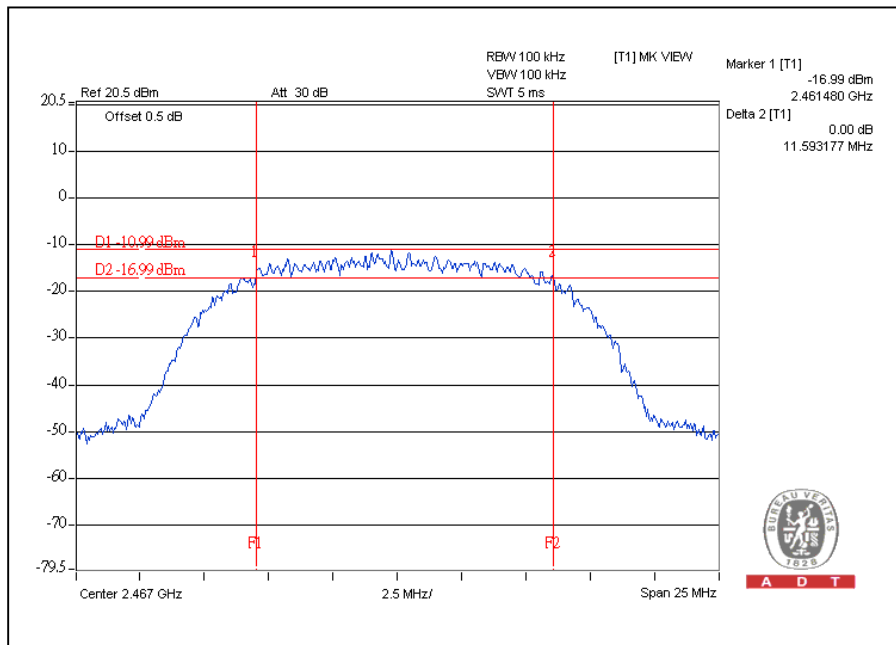



A D T

CH13

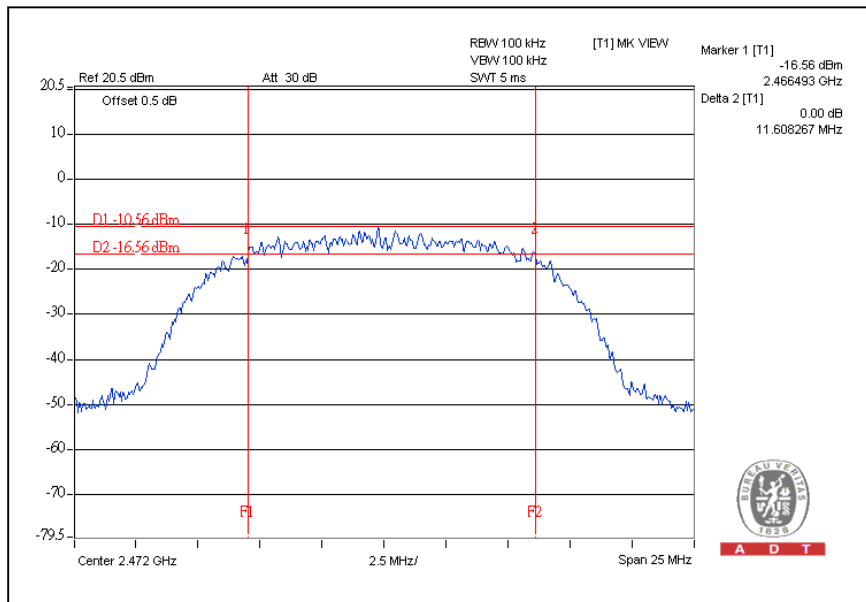




A D T

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 1024hPa
TESTED BY	Frank Liu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
12	2467	16.38	0.5	PASS
13	2472	16.39	0.5	PASS


CH12

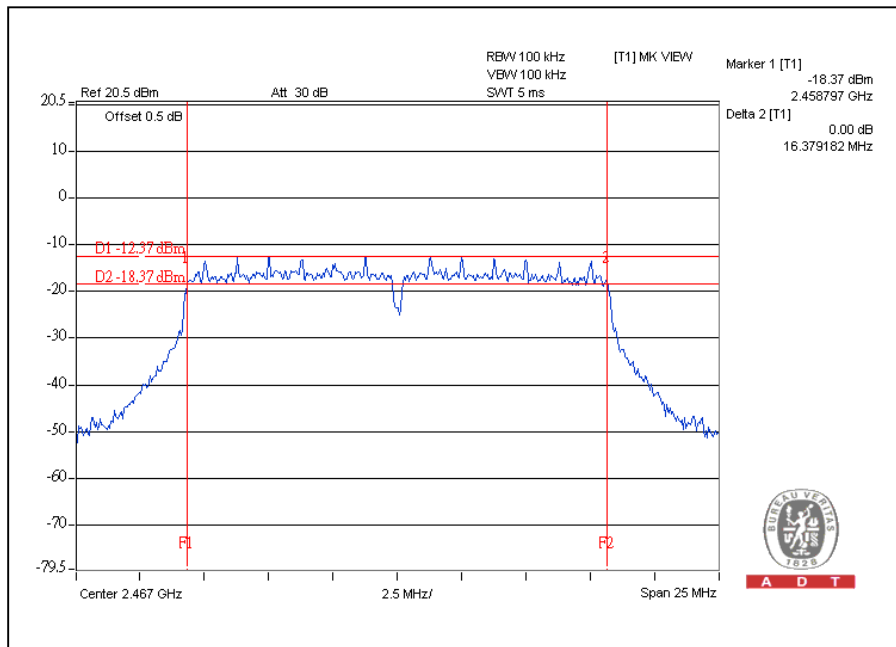



A D T

CH13

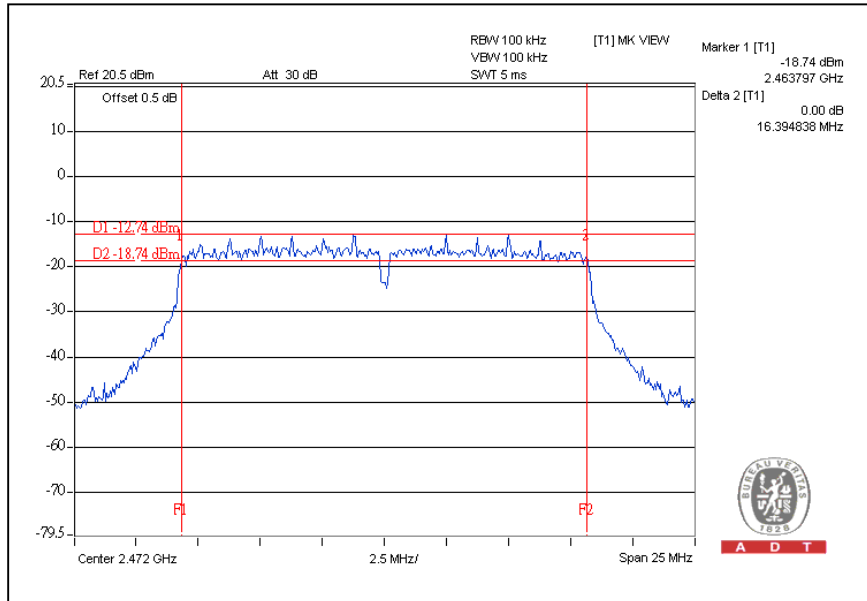

4.3 MAXIMUM PEAK OUTPUT POWER

4.3.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Limit is 30dBm.

4.3.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Anritsu Power Meter	ML2495A	0824006	April 25, 2009	April 24, 2010
Pulse Power Sensor	MA2411B	0738172	April 25, 2009	April 24, 2010

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

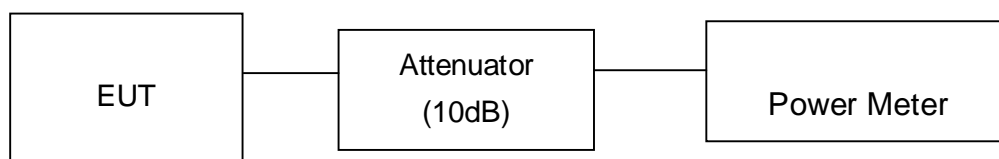

4.3.6 EUT OPERATING CONDITIONS

Same as Item 4.2.6



A D T

4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 1024hPa
TESTED BY	Frank Liu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
12	2467	2.23	1.70	30	PASS
13	2472	2.60	1.80	30	PASS

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 1024hPa
TESTED BY	Frank Liu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
12	2467	10.70	11.70	30	PASS
13	2472	10.50	11.20	30	PASS



4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T


4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 1024hPa
TESTED BY	Frank Liu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
12	2467	-24.6	8	PASS
13	2472	-24.6	8	PASS

CH12

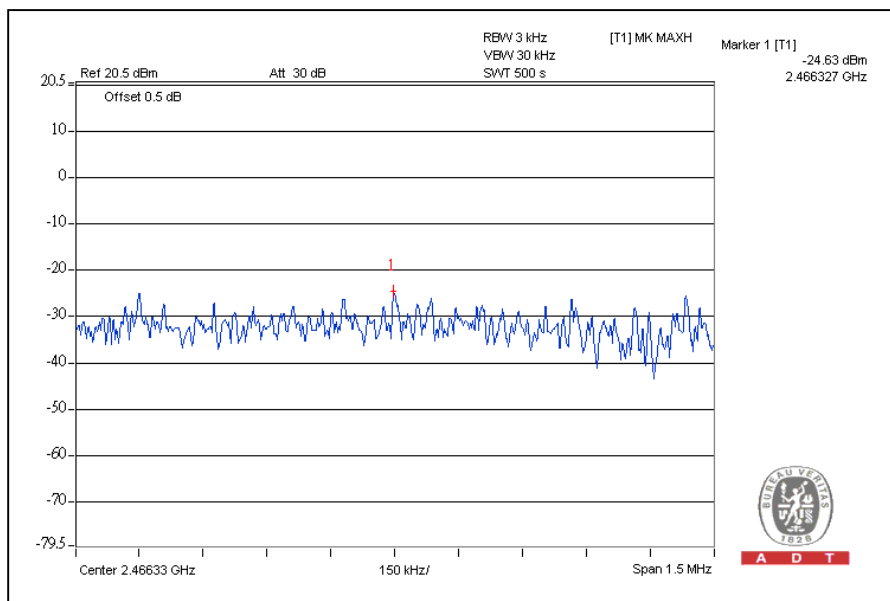


A D T



A D T

CH13

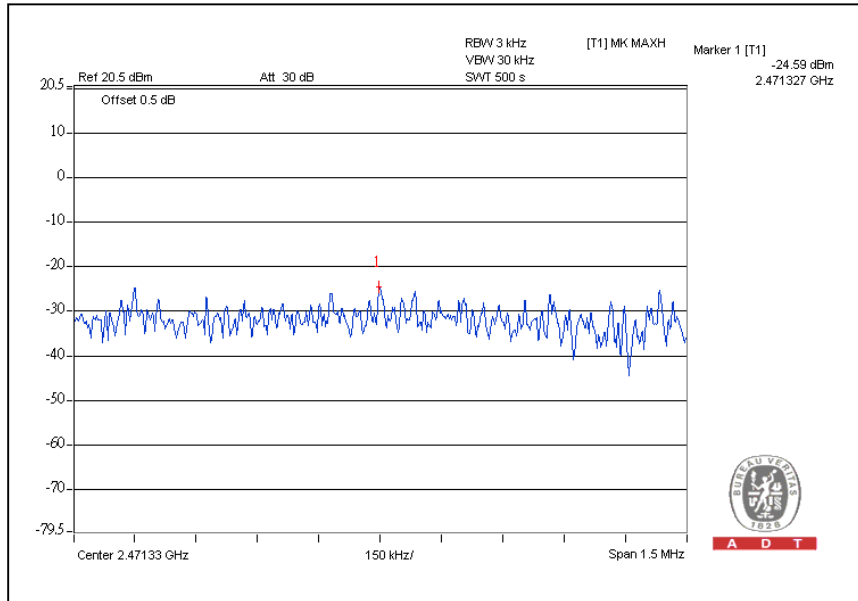

A D T




A D T

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 1024hPa
TESTED BY	Frank Liu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
12	2467	-27.8	8	PASS
13	2472	-28.6	8	PASS

CH12

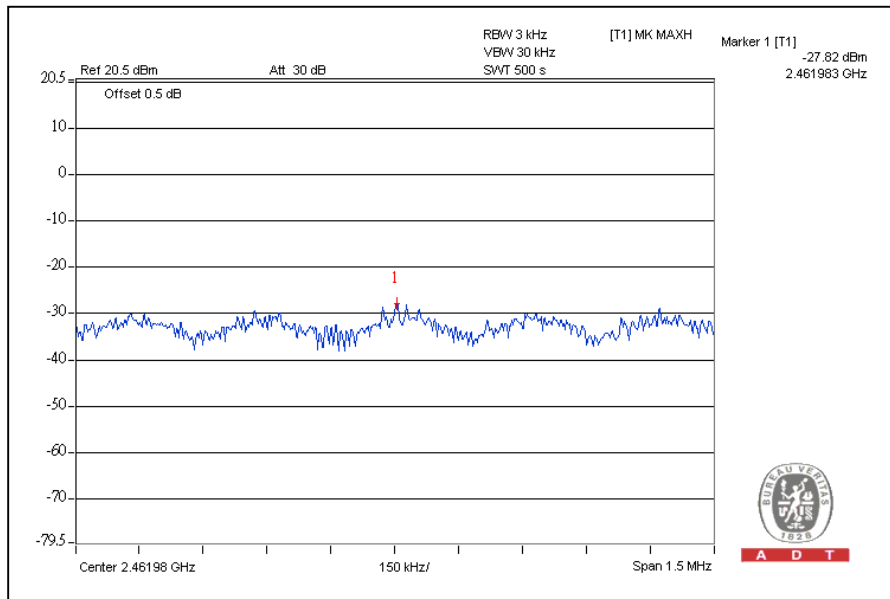


A D T



A D T

CH13

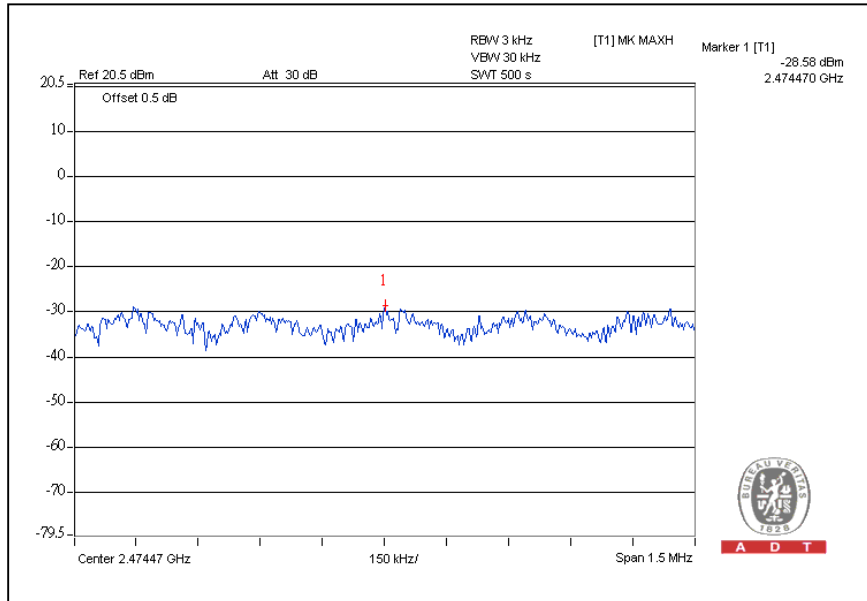

4.5 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.5.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


CH12

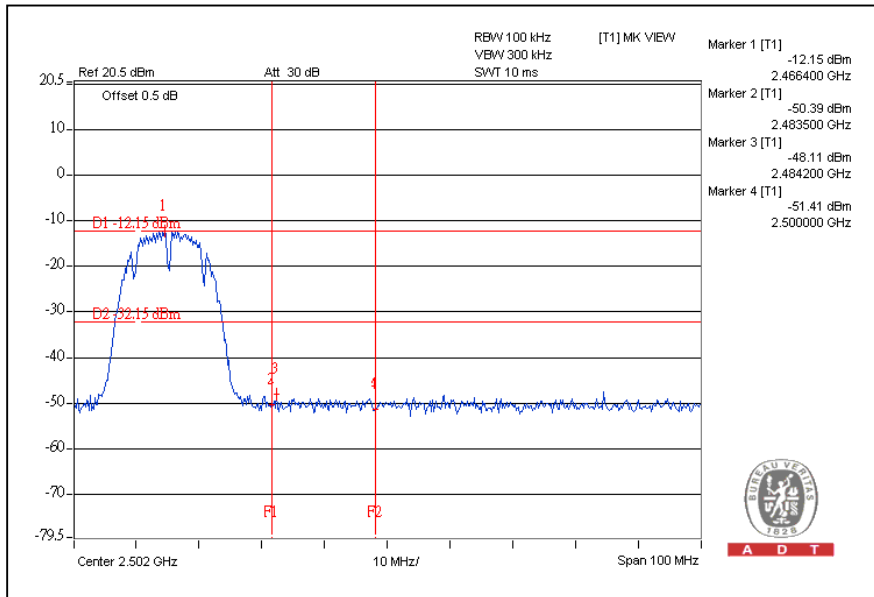


CH13

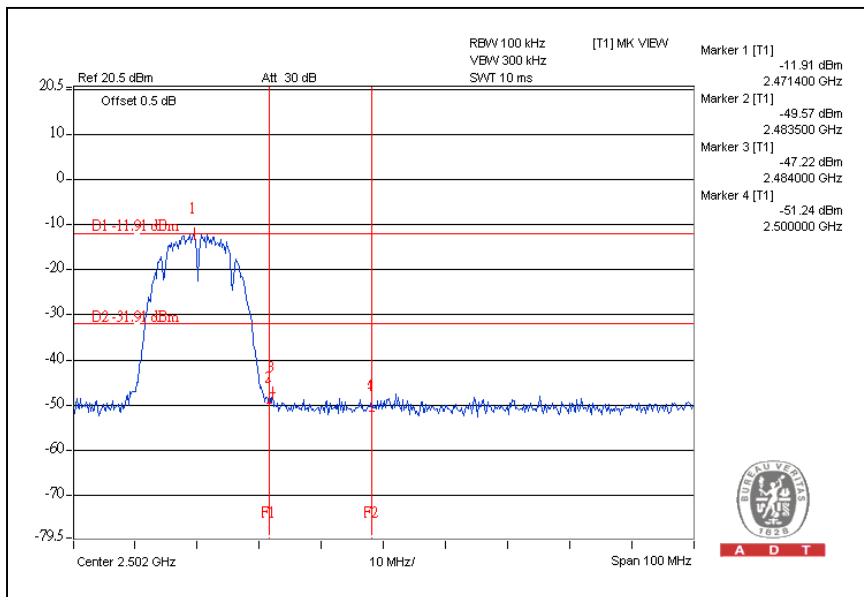

CH12

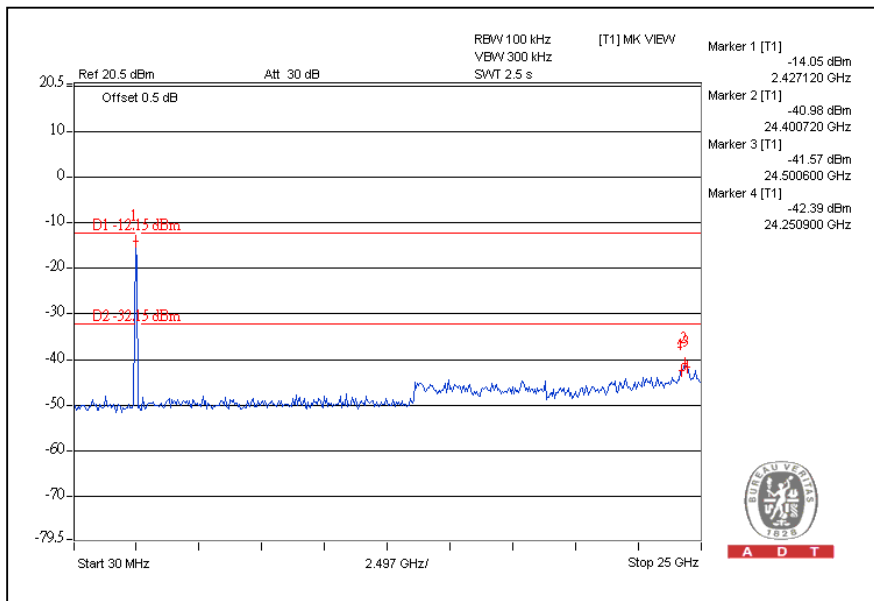


CH13

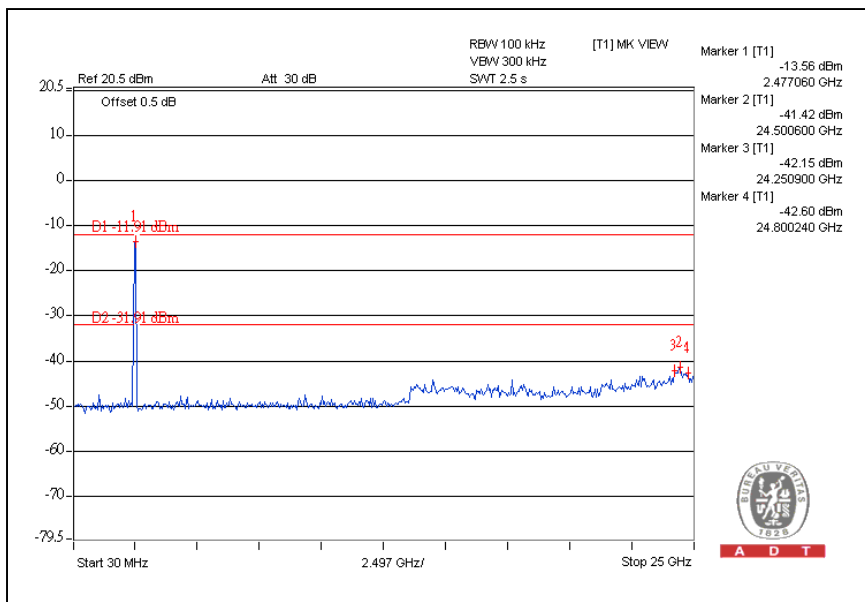


802.11g OFDM MODULATION::

CH12

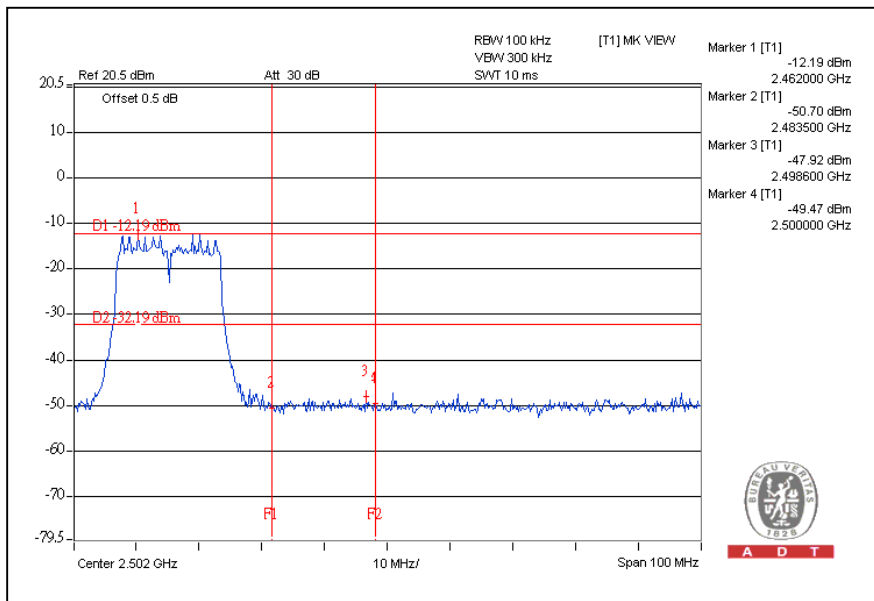


CH13

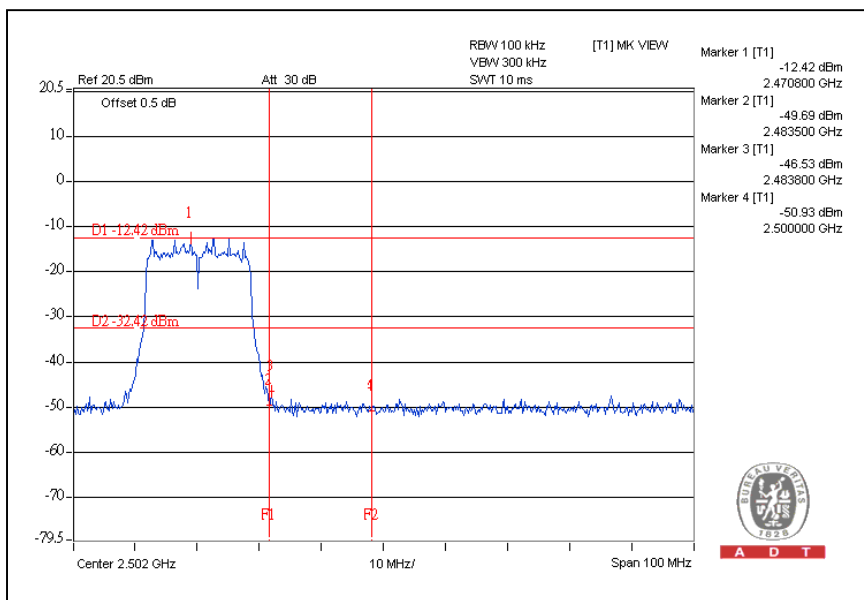




A D T

CH12

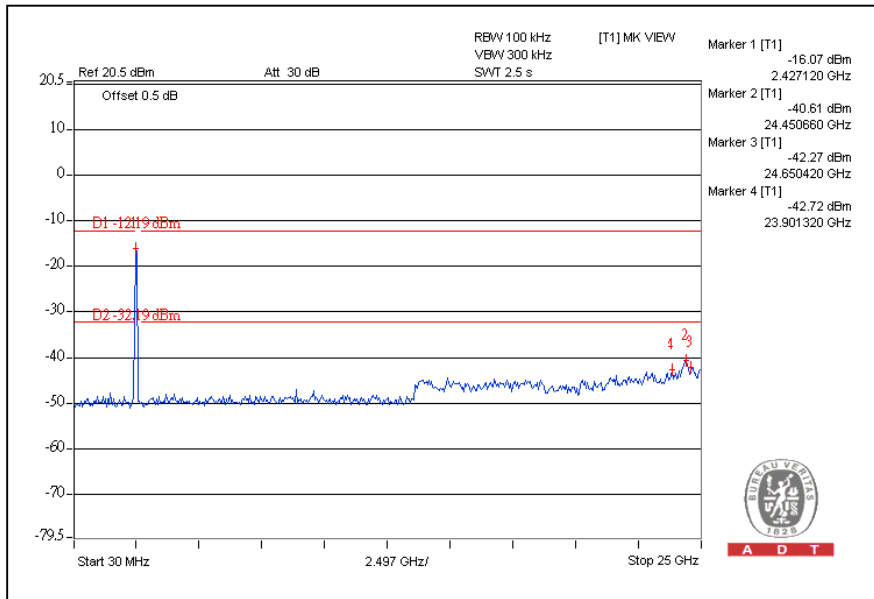

CH13

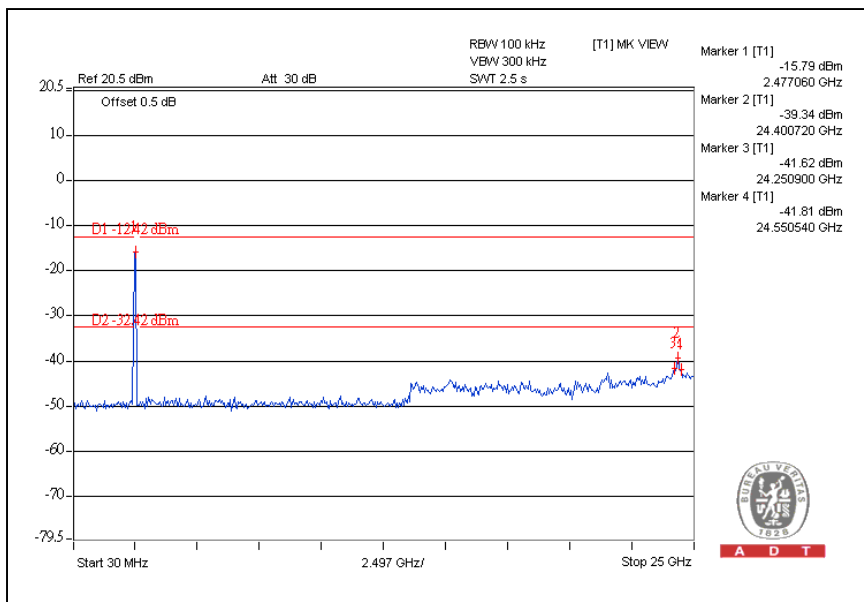

4.6 ANTENNA REQUIREMENT

4.6.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.6.2 ANTENNA CONNECTED CONSTRUCTION

There are nine antennas provided to this EUT, please refer to the following table:

For WLAN								
No.	Brand	Model	Antenna Type	Gain (dBi)	Connector Type	Frequency range (MHz)	Cable Loss(dB)	Cable Length
1	Laird (R Type)	Rot main	PIFA	0.37(2.4G) 4.81(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	25 ± 0.5mm
2	Laird (R Type)	Rot aux	PIFA	1.63(2.4G) 4.93(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	61 +2/-1mm
3	Laird (S Type)	Str main	PIFA	0.89(2.4G) 4.34(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	25 ± 0.5mm
4	Laird (S Type)	Str aux	PIFA	1.09(2.4G) 4.52(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	61 +2/-1mm
5	Laird (G Type)	Gun main	PIFA	2.16(2.4G) 5.83(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	25 ± 0.5mm
6	Laird (G Type)	Gun aux	PIFA	2.46(2.4G) 5.69(5G)	Hirose U.FL	2400~2500 4900~5850	0.1~0.15	61 +2/-1mm

Note :

1. For 2.4G: The antenna 6 was selected as representative antenna for the test.
2. For 5G: The antenna 5 was selected as representative antenna for the test.

For Bluetooth

No.	Brand	Model	Antenna Type	Gain (dBi)	Connector Type	Frequency range (MHz)	Cable Loss(dB)	Cable Length
1	Motorola	Rot type	PIFA	3.08	Hirose U.FL	2400~2480	0.1~0.15	35 ± 0.5mm
2	Motorola	Str type	PIFA	2.481	Hirose U.FL	2400~2480	0.1~0.15	35 ± 0.5mm
3	Motorola	Gun type	PIFA	2.885	Hirose U.FL	2400~2480	0.1~0.15	35 ± 0.5mm



5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



A D T

6.APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---