



FCC TEST REPORT (WLAN - 15.407)

REPORT NO.: RF991201E03-2 R1

MODEL NO.: MC319ZUS

FCC ID: UZ7MC319ZUS

RECEIVED: Dec. 01, 2010

TESTED: Dec. 07 to 14, 2010

ISSUED: Mar. 15, 2011

APPLICANT: Motorola Solutions Inc.

ADDRESS: One Motorola Plaza Holts ville NY 11742-1300
USA

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No.49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 89 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	13
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	14
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	17
3.4 DESCRIPTION OF SUPPORT UNITS.....	18
3.5 CONFIGURATION OF SYSTEM UNDER TEST.....	19
4. TEST TYPES AND RESULTS.....	22
4.1 CONDUCTED EMISSION MEASUREMENT.....	22
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	22
4.1.2 TEST INSTRUMENTS.....	22
4.1.3 TEST PROCEDURES.....	23
4.1.4 DEVIATION FROM TEST STANDARD.....	23
4.1.5 TEST SETUP.....	24
4.1.6 EUT OPERATING CONDITIONS.....	24
4.1.7 TEST RESULTS (MODE A).....	25
4.1.8 TEST RESULTS (MODE B).....	27
4.2 RADIATED EMISSION MEASUREMENT.....	29
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....	29
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	30
4.2.3 TEST INSTRUMENTS.....	31
4.2.4 TEST PROCEDURES.....	33
4.2.5 DEVIATION FROM TEST STANDARD.....	33
4.2.6 TEST SETUP.....	34
4.2.7 EUT OPERATING CONDITION.....	35
4.2.8 TEST RESULTS.....	36
4.3 OUTPUT TRANSMIT POWER MEASUREMENT.....	52
4.3.1 LIMITS OF OUTPUT TRANSMIT POWER MEASUREMENT.....	52
4.3.2 TEST INSTRUMENTS.....	52
4.3.3 TEST PROCEDURE.....	52
4.3.4 DEVIATION FROM TEST STANDARD.....	53
4.3.5 TEST SETUP.....	53
4.3.6 EUT OPERATING CONDITIONS.....	53
4.3.7 TEST RESULTS.....	54
4.4 PEAK POWER EXCURSION MEASUREMENT.....	65
4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	65
4.4.2 TEST INSTRUMENTS.....	65
4.4.3 TEST PROCEDURE.....	65
4.4.4 DEVIATION FROM TEST STANDARD.....	65
4.4.5 TEST SETUP.....	65
4.4.6 EUT OPERATING CONDITIONS.....	65
4.4.7 TEST RESULTS.....	66



A D T

4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	72
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	72
4.5.2	TEST INSTRUMENTS	72
4.5.3	TEST PROCEDURES	72
4.5.4	DEVIATION FROM TEST STANDARD	72
4.5.5	TEST SETUP	72
4.5.6	EUT OPERATING CONDITIONS	72
4.5.7	TEST RESULTS	73
4.6	FREQUENCY STABILITY	79
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	79
4.6.2	TEST INSTRUMENTS	79
4.6.3	TEST PROCEDURE	79
4.6.4	DEVIATION FROM TEST STANDARD	80
4.6.5	TEST SETUP	80
4.6.6	EUT OPERATING CONDITION	80
4.6.7	TEST RESULTS	81
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT	82
4.7.1	TEST INSTRUMENTS	82
4.7.2	TEST PROCEDURE	82
4.7.3	EUT OPERATING CONDITION	82
4.7.4	TEST RESULTS	82
5.	INFORMATION ON THE TESTING LABORATORIES	88
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	89



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Mar. 09, 2011
RF991201E03-2 R1	<ol style="list-style-type: none">1. Modify section 3.1 maximum output power for typing error.2. Change output power from two decimals into one decimal.	Mar. 15, 2011



1. CERTIFICATION

PRODUCT: Mobile Computing Terminal
BRAND NAME: MOTOROLA
MODEL NO.: MC319ZUS
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Dec. 07 to 14, 2010
APPLICANT: Motorola Solutions Inc.
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: MC319ZUS) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Claire Kuan , **DATE:** Mar. 15, 2011
(Claire Kuan, Specialist)

APPROVED BY : May Chen , **DATE:** Mar. 15, 2011
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For [802.11a](#)

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.07dB at 0.150MHz
15.407(b/1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -3.2dB at 5725.00MHz
15.407(a/1/2/3)	Output Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPX connector.

NOTE:

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.35GHz, 5.47~5.725GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.35GHz and 5.47~5.725GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)-Chamber G	3.30 dB
Radiated emissions (1GHz -18GHz)-Chamber C	2.49 dB
Radiated emissions (18GHz -40GHz) -Chamber C	2.70 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile Computing Terminal
MODEL NO.	MC319ZUS
FCC ID	UZ7MC319ZUS
POWER SUPPLY	DC 3.7V from battery, DC 12V to cradle or DC 5.4V to cable adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11a/g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps
FREQUENCY RANGE	15.247: 802.11b & 802.11g: 2.412 ~ 2.472GHz 802.11a: 5.745 ~ 5.825GHz
	15.407: 802.11a: 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.7GHz
NUMBER OF CHANNEL	15.247(2.4GHz) 13 for 802.11b, 802.11g, 15.247(5GHz) 5 for 802.11a
	15.407: 19 for 802.11a,
CHANNEL SPACING	802.11b/g: 5MHz 802.11a: 20MHz
MAXIMUM OUTPUT POWER	15.247(2.4GHz) 802.11b: 47.9mW 802.11g: 151.4mW 15.247(5GHz) 802.11a: 134.9mW
	15.407 802.11a: 33.1mW
ANTENNA TYPE	Please see note 2
ANTENNA CONNECTOR	Please see note 2



A D T

DATA CABLE	Charger cable(Unshielded, 1.8m with one core) x 1 RS232 cable(Unshielded, 1.8m)x 1 USB cable(Shielded, 1.55m) x 1
I/O PORTS	micro SD port x 1
ASSOCIATED DEVICES	Battery x 1 (Part No.: 82-127909-02 Rev B)

NOTE:

1. There are Bluetooth technology (BT2.1+EDR), WLAN and RFID technology used for the EUT:

Technology	Report No.
DFS	RF991201E03
15.247	RF991201E03-1
15.407	RF991201E03-2
Bluetooth	RF991201E03-3
RFID	RF991201E03-4



A D T

2. There are antennas provided to this EUT, please refer to the following table:

WLAN Antenna Spec.								
NO.	Brand	Antenna Type	Peak Gain(dBi) with cable loss	Connector Type	Frequency range (MHz)	Cable Loss (dB)	Cable Length	
1	Auden	Monopole + coupling	3.4 dBi (2.4GHz) 4.5 dBi (5GHz)	hirose	2.4 ~ 2.5 GHz 4.92 ~ 5.85 GHz	-0.2640 dB -0.6168 dB	52 mm	
2	Auden	PIFA	1.3 dBi (2.4GHz) 3.6 dBi (5GHz)	hirose	2.4 ~ 2.5 GHz 4.92 ~ 5.85 GHz	-0.6409 dB -1.0418 dB	68 mm	
RFID Antenna Spec.								
NO.	Brand	Antenna Type	Peak Gain(dBi) with cable loss	Connector Type	Frequency range (MHz)	Cable Loss (dB)	Cable Length	
1	Auden	Dipole	3.66	hirose	902 ~ 928 MHz	-0.43 dB	85 mm	
2	Auden	Slot Dipole	1.95	hirose	902 ~ 928 MHz	-0.43 dB	85 mm	
Bluetooth Antenna Spec.								
NO.	Brand	Model No.	Antenna Type	Peak Gain(dBi)	Connector Type	Frequency range (MHz)	Cable Loss (dB)	Cable Length
1	Antenova	(Mica 2.4GHz) 303DA5654-01	Chip Antenna	-1.34	U.FL	2400-2500	0.185	74 mm



A D T

3. The EUT could be supplied with a Cradle, power adapter and battery as below table:

Battery	
Brand:	MOTOROLA
Part No.:	82-127909-02 Rev B
Rating:	3.7V, 4800mAh/17.8Wh
Cable adapter (not for sale together)	
Brand:	MOTOROLA
Model No.:	EADP-16BB A
Part No.:	PWRS-14000-249R
Input power :	100-240V, 50-60Hz, 0.4A AC input cable (unshielded, 1.85m)
Output power :	5.4V ----- 3A
Cradle (not for sale together)	
Brand:	SYMBOL TECHNOLOGIES INC.
Model No.:	CRD3000-1000R
Part No.:	CRD3000-1001RR
Rating:	12V, 3.33A
Adapter for Cradle (not for sale together)	
Brand:	HIPRO
Model No.:	HP-O204D43
Part No.:	50-14000-148R
Input power :	100-240V, 50-60Hz, 1.5A AC input cable (unshielded, 1.8m)
Output power :	+12V ----- 3.33A DC output cable (unshielded, 1.8m with one core)



A D T

4. The EUT was pre-tested in chamber under following test modes :

Pre-test Mode	Description
Mode A	X-Y plane: EUT + Battery
Mode B	X-Z plane: EUT + Battery
Mode C	Y-Z plane: EUT + Battery
Mode D	X-Y plane: EUT + Cable adapter
Mode E	X-Z plane: EUT + Cable adapter
Mode F	Y-Z plane: EUT + Cable adapter
Mode G	Y-Z plane: EUT + Cradle + adapter

The worse spurious emission (Below 1GHz) was found in **Mode G**. And the spurious emission (Above 1GHz) was found in **Mode F**. Therefore only the test data of the modes were recorded in this report.

5. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a, 802.11b, 802.11g, Bluetooth technology and RFID in the 900MHz Band.
6. The above EUT information was declared by the manufacturer and for more detailed feature descriptions, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5350MHz bands:

Eight channels are provided for 802.11a:

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz
52	5260 MHz
56	5280 MHz
60	5300 MHz
64	5320 MHz

Operated in 5470MHz ~ 5725MHz bands:

Eleven channels are provided for 802.11a:

CHANNEL	FREQUENCY
100	5500 MHz
104	5520 MHz
108	5540 MHz
112	5560 MHz
116	5580 MHz
120	5600 MHz
124	5620 MHz
128	5640 MHz
132	5660 MHz
136	5680 MHz
140	5700 MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
A	√	-	-	-	X-Y plane: EUT + Cable adapter
B	√	√	-	-	Y-Z plane: EUT + Cradle + adapter
C	-	-	√	√	Y-Z plane: EUT + Cable adapter

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	CONFIGURE MODE
WORST CHANNEL	-	-	-	-	-	A ~ B

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	CONFIGURE MODE
802.11a	36 to 140	120	OFDM	BPSK	6	B



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	CONFIGURE MODE
802.11a	36 to 140	36, 40, 48, 52, 60, 64, 100, 120, 140	OFDM	BPSK	6	C

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	CONFIGURE MODE
802.11a	36 to 140	36, 64, 100, 140	OFDM	BPSK	6	C

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	CONFIGURE MODE
802.11a	36 to 140	36, 40, 48, 52, 60, 64, 100, 120, 140	OFDM	BPSK	6	C



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE ³ 1G	23deg. C, 69%RH, 1023 hPa	120Vac, 60Hz	Rex Huang
RE<1G	23deg. C, 71%RH, 1023 hPa	120Vac, 60Hz	Kent Liu
PLC	25deg. C, 60%RH, 1023 hPa	120Vac, 60Hz	Max Tseng
APCM	25deg. C, 60%RH, 1023 hPa	120Vac, 60Hz	Eric Lee



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


For conducted test					
No.	Product	Brand	Model No.	Serial No.	FCC ID
1	PERSONAL COMPUTER	DELL	DCSCMF	9KKB32S	FCC DoC
2	MONITOR	DELL	E2210Hc	CN-OG337R-6418 0-97S-OQDS	FCC DoC
3	PRINTER	EPSON	LQ-300+II	G88Y074083	FCC DoC
4	MODEM	ACEEX	1414	0206026778	IFAXDM1414
5	KEYBOARD	DELL	SK-8115	MY-0DJ325-71619- 99B-0476	FCC DoC
6	MOUSE	DELL	MOC5UO	I1401LVG	FCC DoC
7	EARPHONE	Hawk	HKC920	H001	FCC DoC
8	Wireless Access Point	Air Station	WLA-G54	NA	FCC DoC
For radiated test					
No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	DSL32S	FCC DoC
2	EARPHONE	MOTOROLA	NA	NA	NA

For conducted test	
No.	Signal cable description
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, with two cores
3	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.9 m foil shielded wire, USB connector, w/o core.
6	1.8 m foil shielded wire, USB connector, w/o core.
7	1.8 m Audio cable
8	NA
For radiated test	
No.	Signal cable description
1	NA
2	0.9 m Audio cable

Note: 1. All power cords of the above support units are unshielded (1.8m).


3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted test mode 1:

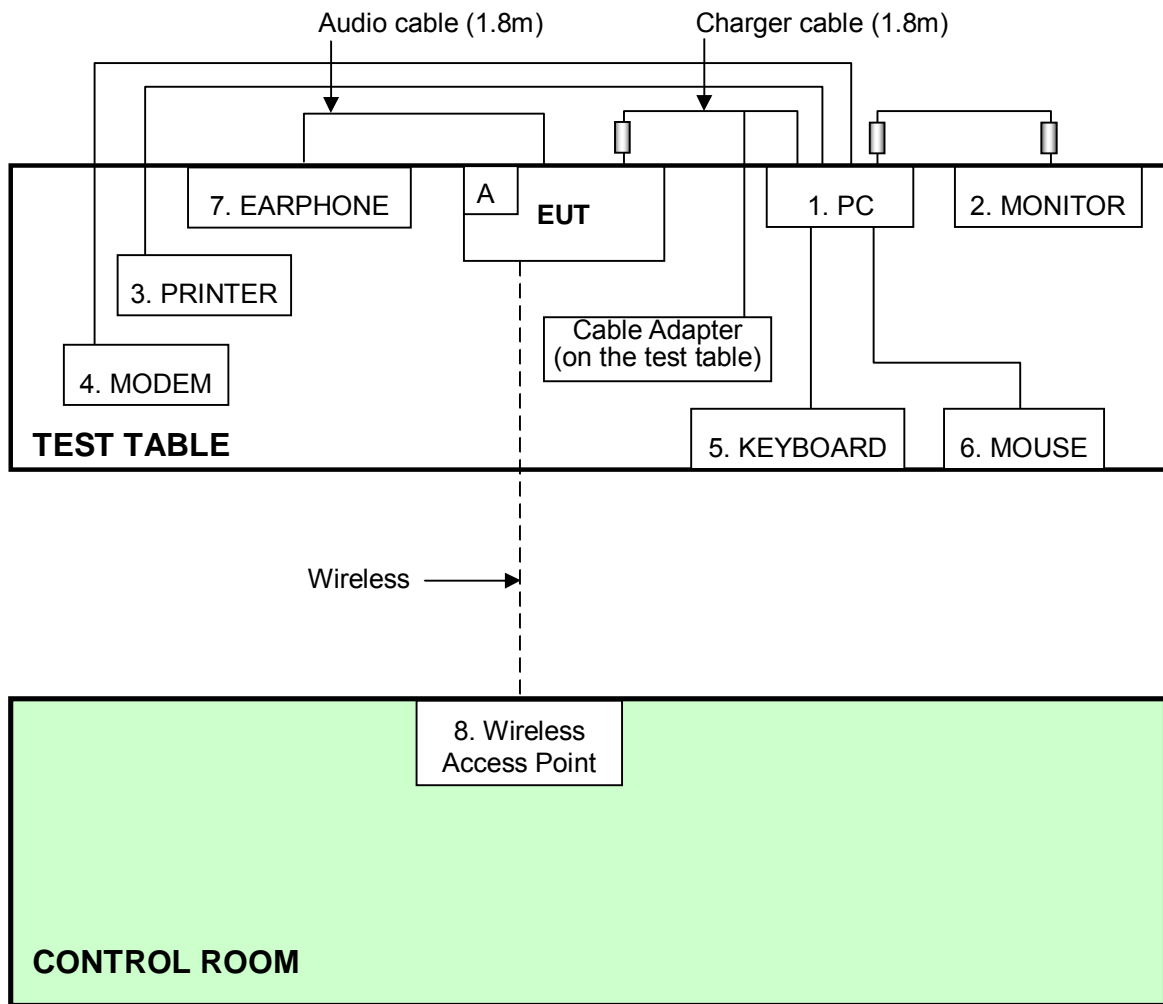


NOTE: 1. Item A is the micro SD card.

For Conducted test mode 2:

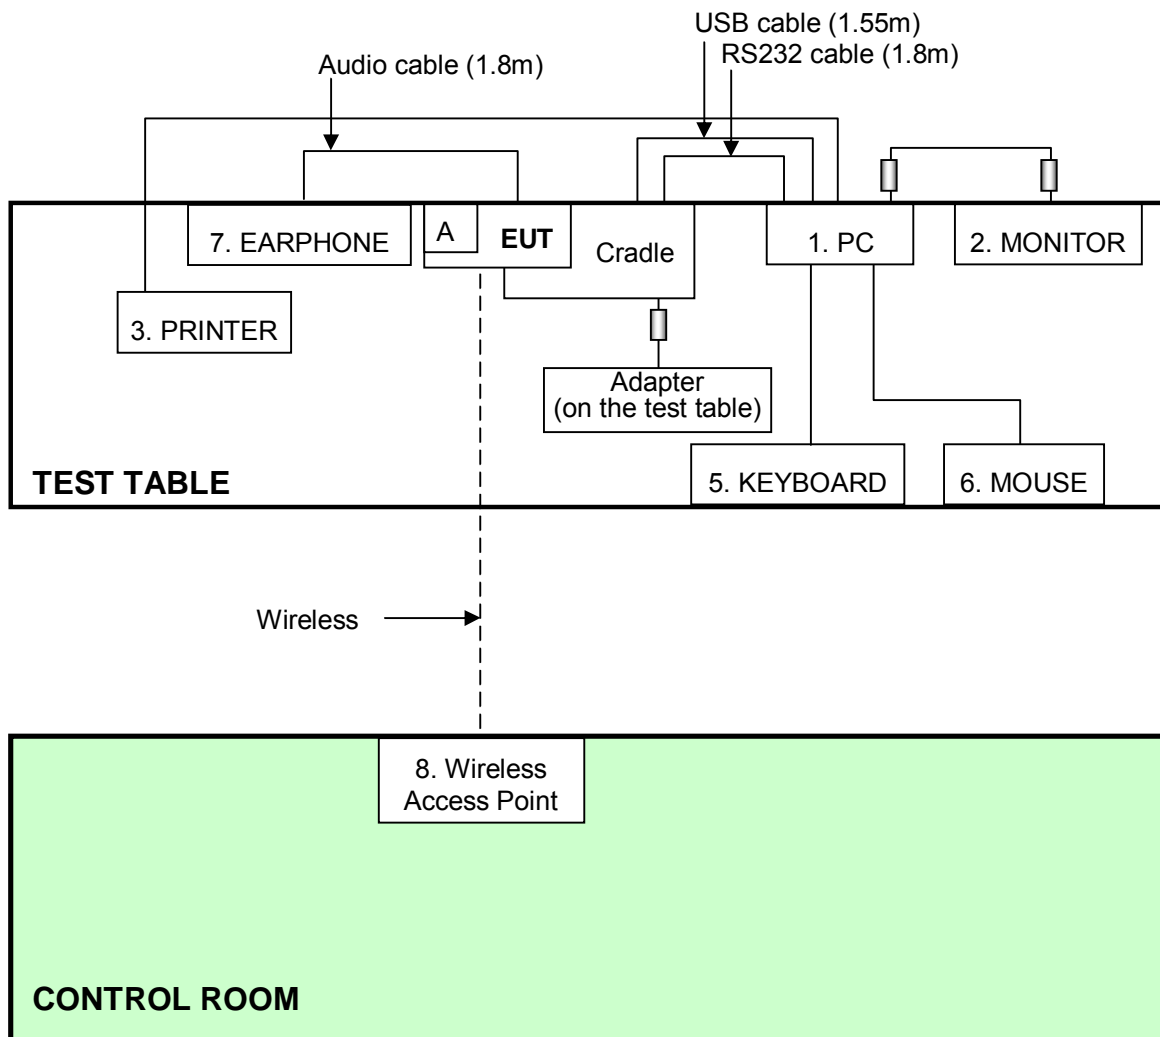


NOTE: 1. Item A is the micro SD Card.

For Radiated below 1GHz test:

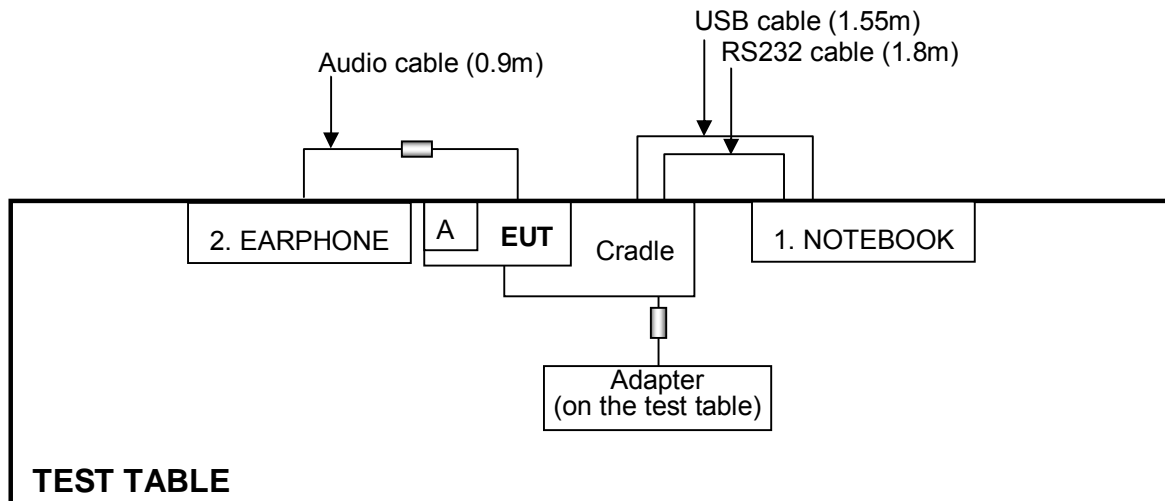

NOTE: 1. Item A is the micro SD Card.

For Radiated above 1GHz test:

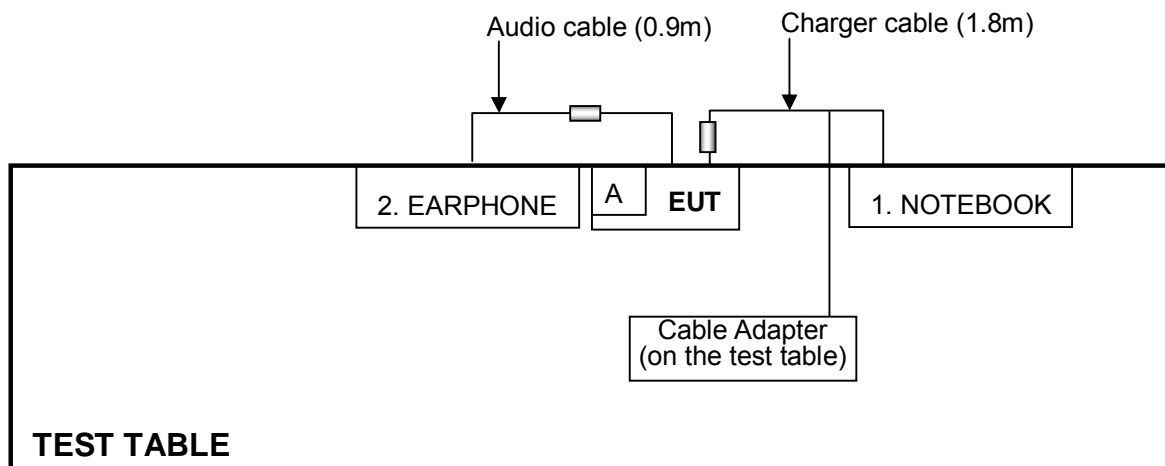

NOTE: 1. Item A is the micro SD Card.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2010	Mar. 08, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-522	Sep. 08, 2010	Sep. 07, 2011
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 03, 2010	Nov. 02, 2011
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 30, 2010	Aug. 29, 2011
50 ohms Terminator	50	3	Nov. 03, 2010	Nov. 02, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs
- b. provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

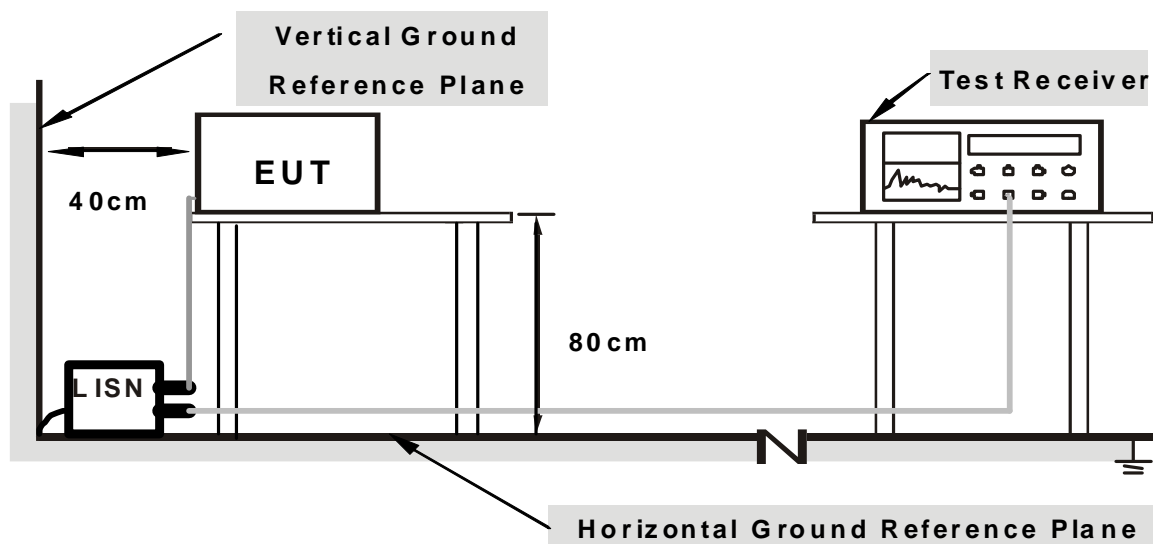

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Turn on the power of EUT.
2. The EUT run test program “BTRegTest_ver3.5” to enable EUT under transmission / receiver condition continuously at specific channel frequency.

4.1.7 TEST RESULTS (MODE A)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	51.83	-	51.93	-	66.00	56.00	-14.07	-
2	0.173	0.12	48.23	-	48.35	-	64.79	54.79	-16.45	-
3	0.205	0.13	45.42	-	45.55	-	63.42	53.42	-17.87	-
4	0.466	0.13	37.44	-	37.57	-	56.58	46.58	-19.01	-
5	5.762	0.28	30.41	-	30.69	-	60.00	50.00	-29.31	-
6	15.277	0.57	38.82	-	39.39	-	60.00	50.00	-20.61	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

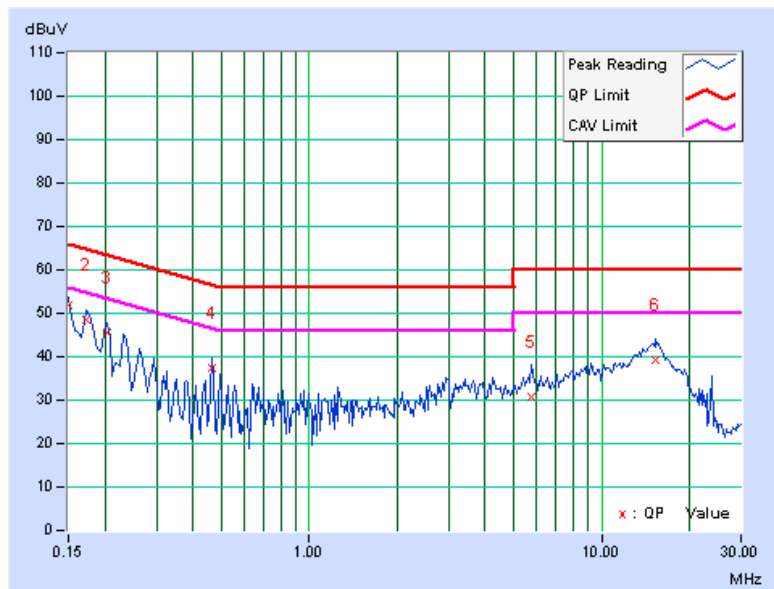

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.12	51.16	-	51.28	-	66.00	56.00	-14.72	-
2	0.177	0.13	48.29	-	48.42	-	64.61	54.61	-16.19	-
3	0.205	0.14	45.40	-	45.54	-	63.42	53.42	-17.88	-
4	0.466	0.15	38.24	-	38.39	-	56.58	46.58	-18.19	-
5	3.855	0.27	30.74	-	31.01	-	56.00	46.00	-24.99	-
6	15.090	1.13	39.18	-	40.31	-	60.00	50.00	-19.69	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

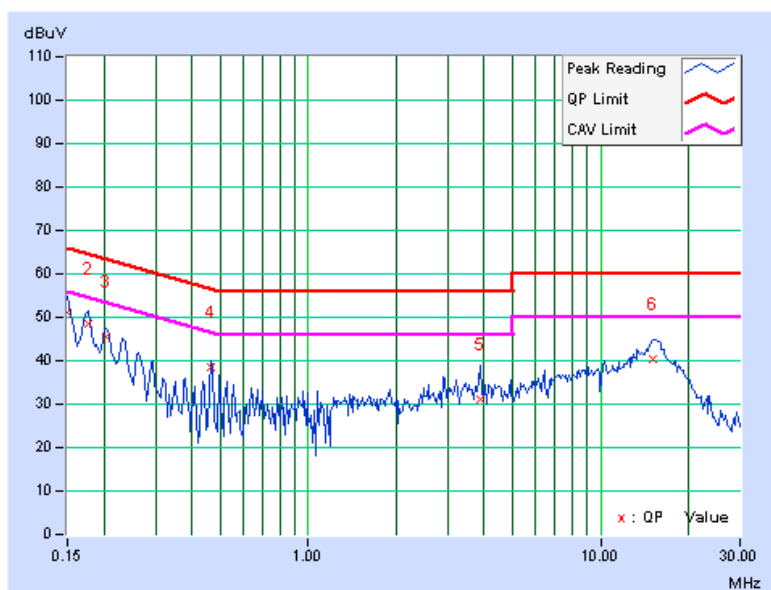


4.1.8 TEST RESULTS (MODE B)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.209	0.13	44.47	-	44.60	-	63.26
2	0.630	0.13	34.13	-	34.26	-	56.00	46.00	-21.74	-
3	0.736	0.14	35.41	-	35.55	-	56.00	46.00	-20.45	-
4	2.734	0.17	35.74	-	35.91	-	56.00	46.00	-20.09	-
5	3.047	0.18	37.45	-	37.63	-	56.00	46.00	-18.37	-
6	22.797	0.75	39.12	-	39.87	-	60.00	50.00	-20.13	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

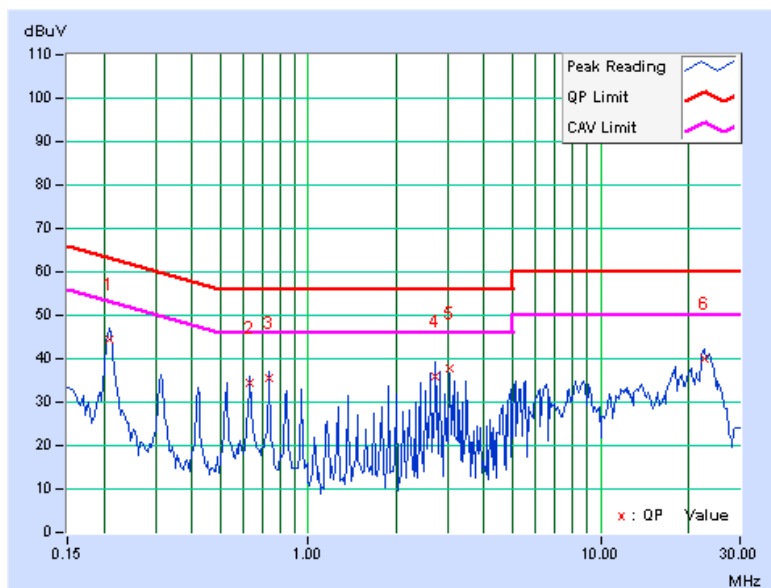

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.14	43.47	-	43.61	-	63.26	53.26	-19.65	-
2	0.314	0.15	34.07	-	34.22	-	59.86	49.86	-25.65	-
3	0.736	0.16	36.88	-	37.04	-	56.00	46.00	-18.96	-
4	2.941	0.23	39.05	-	39.28	-	56.00	46.00	-16.72	-
5	3.258	0.25	36.38	-	36.63	-	56.00	46.00	-19.37	-
6	23.531	1.69	36.61	-	38.30	-	60.00	50.00	-21.70	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

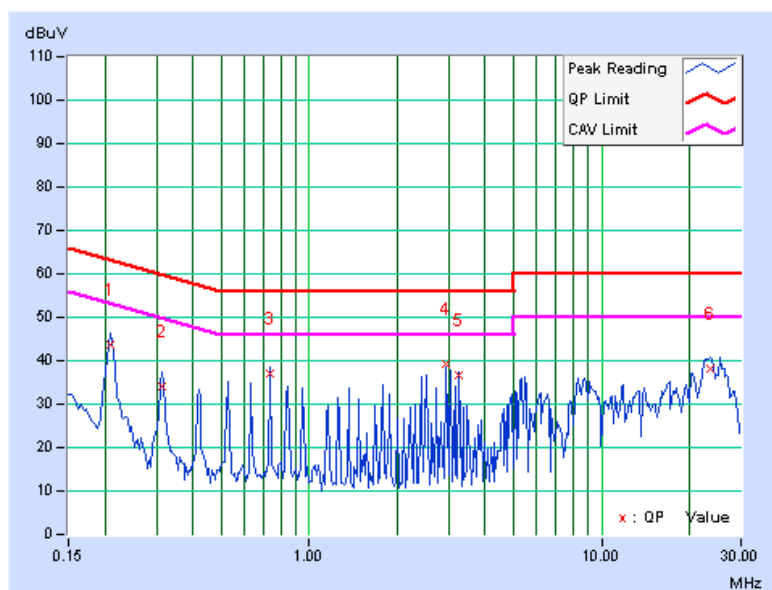

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

For below 1GHz test: (Test date: Dec. 07, 2010)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 14, 2010	July 13, 2011
Agilent Pre-Selector	N9039A	MY46520311	July 14, 2010	July 13, 2011
Agilent Signal Generator	N5181A	MY49060517	July 14, 2010	July 13, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02578	July 05, 2010	July 04, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 29, 2010	Apr. 28, 2011
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 12, 2010	Nov. 11, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.



A D T

For above 1GHz test: (Test date: Dec. 09, 2010)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	May 12 , 2010	May 11 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 01, 2010	Oct. 31, 2011
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M- 1GHz	NA	NA
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter chamber room for below 1GHz and 10 meter open area test site for above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD


No deviation

4.2.6 TEST SETUP

<Frequency Range below 1GHz>

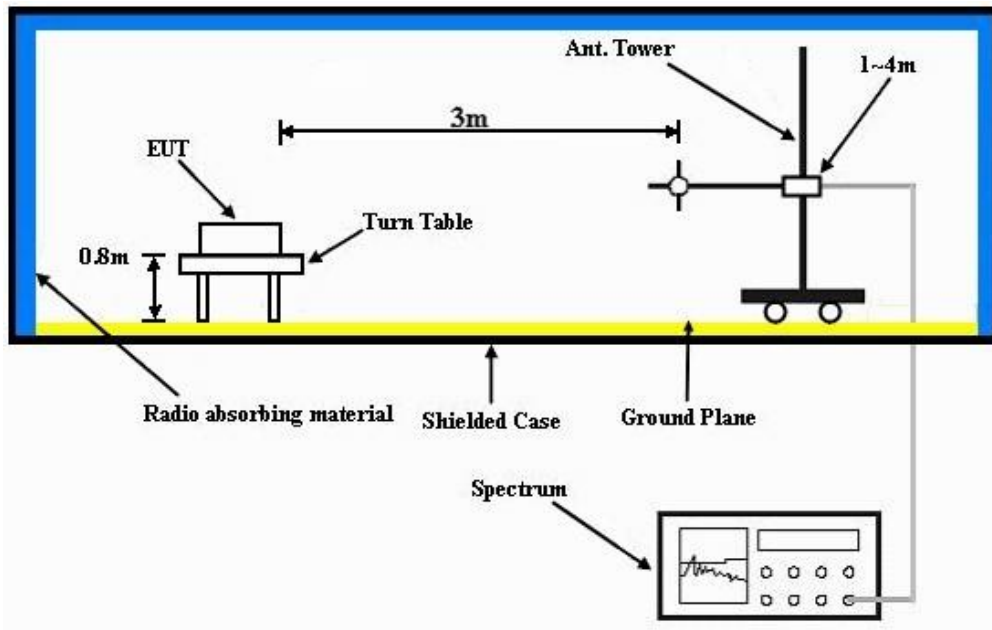

<Frequency Range above 1GHz>

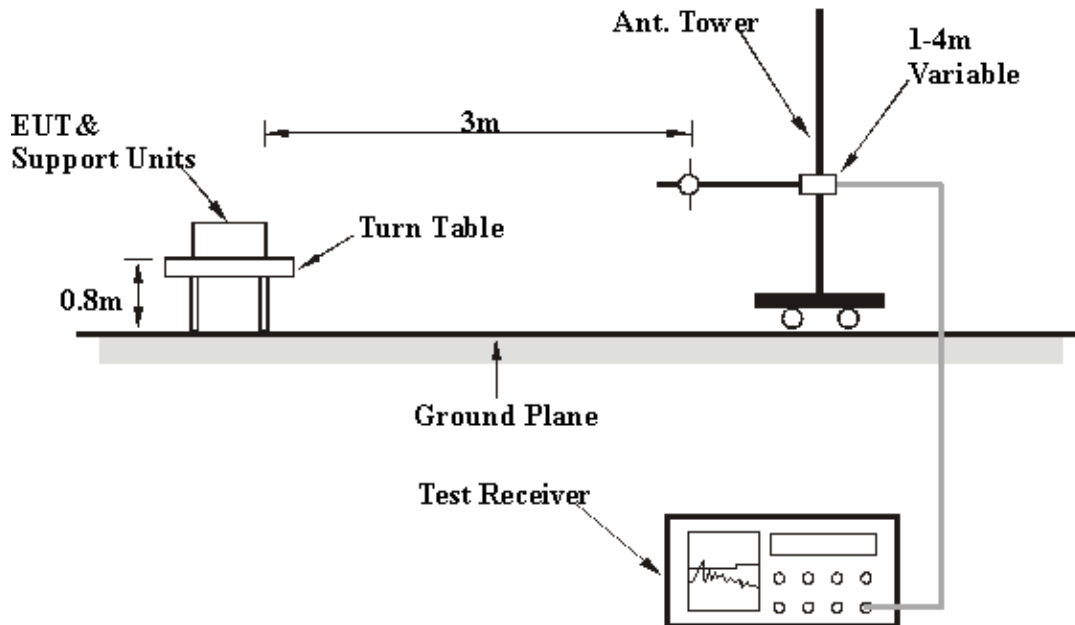

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.2.7 EUT OPERATING CONDITION

Same as 4.1.6



A D T

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 120	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 71%RH 1024 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.08	31.7 QP	43.50	-11.9	2.00 H	24	22.49	9.16
2	147.12	33.5 QP	43.50	-10.0	2.00 H	314	19.50	14.00
3	180.00	31.1 QP	43.50	-12.4	1.50 H	24	19.16	11.95
4	219.30	30.5 QP	46.00	-15.5	1.55 H	285	18.68	11.82
5	263.41	32.2 QP	46.00	-13.8	1.25 H	64	18.24	13.98
6	385.77	30.2 QP	46.00	-15.8	1.00 H	349	12.87	17.37
7	700.04	31.7 QP	46.00	-14.3	1.50 H	24	8.01	23.67
8	750.01	28.7 QP	46.00	-17.3	1.00 H	342	4.33	24.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.20	30.2 QP	43.50	-13.3	1.00 V	360	21.00	9.17
2	133.15	32.6 QP	43.50	-10.9	1.00 V	360	19.03	13.55
3	228.83	30.1 QP	46.00	-15.9	1.00 V	360	17.74	12.32
4	385.74	27.9 QP	46.00	-18.1	1.75 V	22	10.51	17.37
5	434.89	28.2 QP	46.00	-17.8	1.25 V	155	9.72	18.52
6	700.04	27.0 QP	46.00	-19.0	1.00 V	70	3.29	23.67
7	799.98	28.8 QP	46.00	-17.2	1.00 V	272	3.77	25.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.7 PK	74.00	-14.3	1.45 H	260	18.53	41.17
2	5150.00	48.5 AV	54.00	-5.5	1.45 H	260	7.33	41.17
3	*5180.00	104.3 PK			1.43 H	246	63.07	41.23
4	*5180.00	94.9 AV			1.43 H	246	53.67	41.23
5	#10360.00	56.2 PK	68.30	-12.1	1.56 H	1	8.26	47.94

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.3 PK	74.00	-15.7	1.01 V	270	17.13	41.17
2	5150.00	47.0 AV	54.00	-7.0	1.01 V	270	5.83	41.17
3	*5180.00	101.8 PK			1.00 V	269	60.57	41.23
4	*5180.00	92.3 AV			1.00 V	269	51.07	41.23
5	#10360.00	55.8 PK	68.30	-12.5	1.58 V	20	7.86	47.94

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.8 PK			1.37 H	266	64.53	41.27
2	*5200.00	95.9 AV			1.37 H	266	54.63	41.27
3	#10400.00	56.7 PK	68.30	-11.6	1.25 H	65	8.72	47.98
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	102.6 PK			1.00 V	300	61.33	41.27
2	*5200.00	93.2 AV			1.00 V	300	51.93	41.27
3	#10400.00	55.7 PK	68.30	-12.6	1.24 V	51	7.72	47.98

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.3 PK			1.36 H	250	64.95	41.35
2	*5240.00	95.9 AV			1.36 H	250	54.55	41.35
3	#10480.00	56.9 PK	68.30	-11.4	1.25 H	54	8.84	48.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	103.9 PK			1.00 V	65	62.55	41.35
2	*5240.00	94.1 AV			1.00 V	65	52.75	41.35
3	#10480.00	55.4 PK	68.30	-12.9	1.25 V	84	7.34	48.06

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 52	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	105.9 PK			1.36 H	259	64.52	41.38
2	*5260.00	95.9 AV			1.36 H	259	54.52	41.38
3	#10520.00	56.9 PK	68.30	-11.4	1.25 H	99	8.81	48.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	103.3 PK			1.00 V	281	61.92	41.38
2	*5260.00	94.3 AV			1.00 V	281	52.92	41.38
3	#10520.00	55.6 PK	68.30	-12.7	1.00 V	2	7.51	48.09

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	107.1 PK			1.33 H	269	65.64	41.46
2	*5300.00	96.8 AV			1.33 H	269	55.34	41.46
3	10600.00	56.9 PK	74.00	-17.1	1.25 H	54	8.75	48.15
4	10600.00	45.3 AV	54.00	-8.7	1.25 H	54	-2.85	48.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	104.9 PK			1.05 V	266	63.44	41.46
2	*5300.00	95.3 AV			1.05 V	266	53.84	41.46
3	10600.00	55.7 PK	74.00	-18.3	1.69 V	62	7.55	48.15
4	10600.00	44.1 AV	54.00	-9.9	1.69 V	62	-4.05	48.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	106.5 PK			1.36 H	259	65.00	41.50
2	*5320.00	96.9 AV			1.36 H	259	55.40	41.50
3	5350.00	62.6 PK	74.00	-11.4	1.23 H	297	21.04	41.56
4	5350.00	49.6 AV	54.00	-4.4	1.23 H	297	8.04	41.56
5	10640.00	57.2 PK	74.00	-16.8	1.25 H	326	9.03	48.17
6	10640.00	46.3 AV	54.00	-7.7	1.25 H	326	-1.87	48.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	105.0 PK			1.04 V	257	63.50	41.50
2	*5320.00	95.0 AV			1.04 V	257	53.50	41.50
3	5350.00	60.8 PK	74.00	-13.2	1.01 V	260	19.24	41.56
4	5350.00	48.5 AV	54.00	-5.5	1.01 V	260	6.94	41.56
5	10640.00	55.4 PK	74.00	-18.6	1.20 V	236	7.23	48.17
6	10640.00	44.2 AV	54.00	-9.8	1.20 V	236	-3.97	48.17

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 100	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.1 PK	74.00	-12.9	1.02 H	258	19.32	41.78
2	5460.00	49.2 AV	54.00	-4.8	1.02 H	258	7.42	41.78
3	#5470.00	64.5 PK	68.30	-3.8	1.39 H	261	22.70	41.80
4	*5500.00	105.9 PK			1.38 H	260	64.04	41.86
5	*5500.00	96.1 AV			1.38 H	260	54.24	41.86
6	11000.00	56.9 PK	74.00	-17.1	1.24 H	54	8.45	48.45
7	11000.00	46.7 AV	54.00	-7.3	1.24 H	54	-1.75	48.45
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5440.00	59.9 PK	74.00	-14.1	1.10 V	288	18.17	41.73
2	5440.00	47.8 AV	54.00	-6.2	1.10 V	288	6.07	41.73
3	#5470.00	63.8 PK	68.30	-4.5	1.09 V	270	22.00	41.80
4	*5500.00	105.2 PK			1.06 V	266	63.34	41.86
5	*5500.00	95.2 AV			1.06 V	266	53.34	41.86
6	11000.00	55.2 PK	74.00	-18.8	1.60 V	137	6.75	48.45
7	11000.00	43.9 AV	54.00	-10.1	1.60 V	137	-4.55	48.45

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 120	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5600.00	106.1 PK			1.26 H	222	64.12	41.98
2	*5600.00	96.2 AV			1.26 H	222	54.22	41.98
3	11200.00	56.9 PK	74.00	-17.1	1.02 H	215	8.35	48.55
4	11200.00	45.8 AV	54.00	-8.2	1.02 H	215	-2.75	48.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5600.00	105.6 PK			1.10 V	288	63.62	41.98
2	*5600.00	95.2 AV			1.10 V	288	53.22	41.98
3	11200.00	55.2 PK	74.00	-18.8	1.02 V	218	6.65	48.55
4	11200.00	44.1 AV	54.00	-9.9	1.02 V	218	-4.45	48.55

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH 1024 hPa	TESTED BY	Eric Lee



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	105.9 PK			1.30 H	210	63.80	42.10
2	*5700.00	96.4 AV			1.30 H	210	54.30	42.10
3	#5725.00	65.1 PK	68.30	-3.2	1.02 H	215	22.96	42.14
4	11400.00	56.9 PK	74.00	-17.1	1.58 H	47	8.35	48.55
5	11400.00	46.2 AV	54.00	-7.8	1.58 H	47	-2.35	48.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	105.4 PK			1.08 V	270	63.30	42.10
2	*5700.00	95.3 AV			1.08 V	270	53.20	42.10
3	#5725.00	64.9 PK	68.30	-3.4	1.10 V	269	22.76	42.14
4	11400.00	55.0 PK	74.00	-19.0	1.65 V	222	6.45	48.55
5	11400.00	44.2 AV	54.00	-9.8	1.65 V	222	-4.35	48.55

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH36, HORIZONTAL)

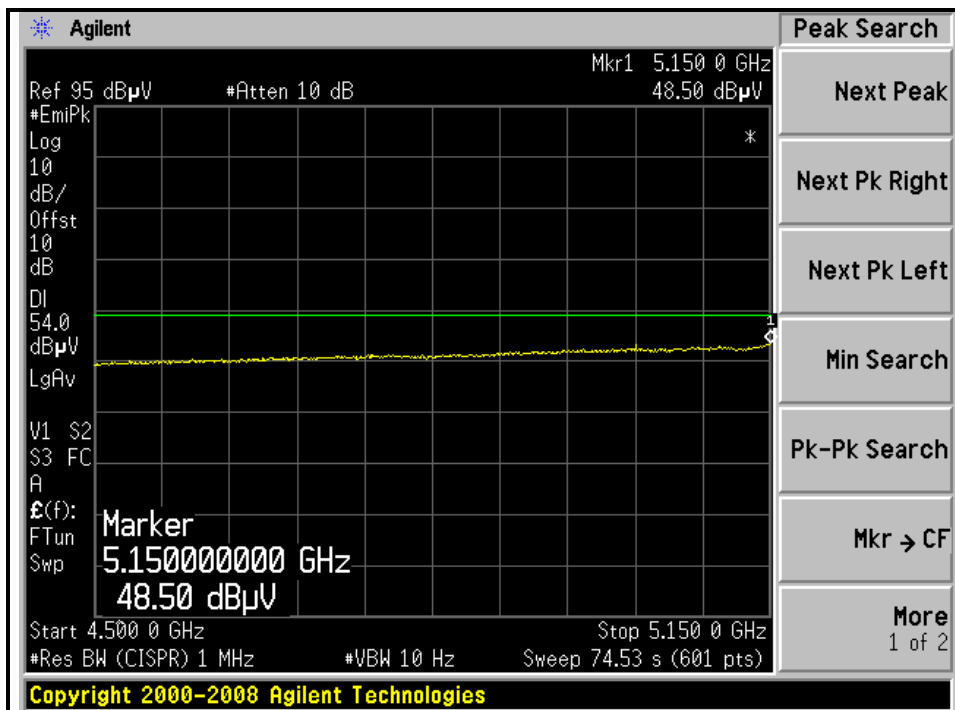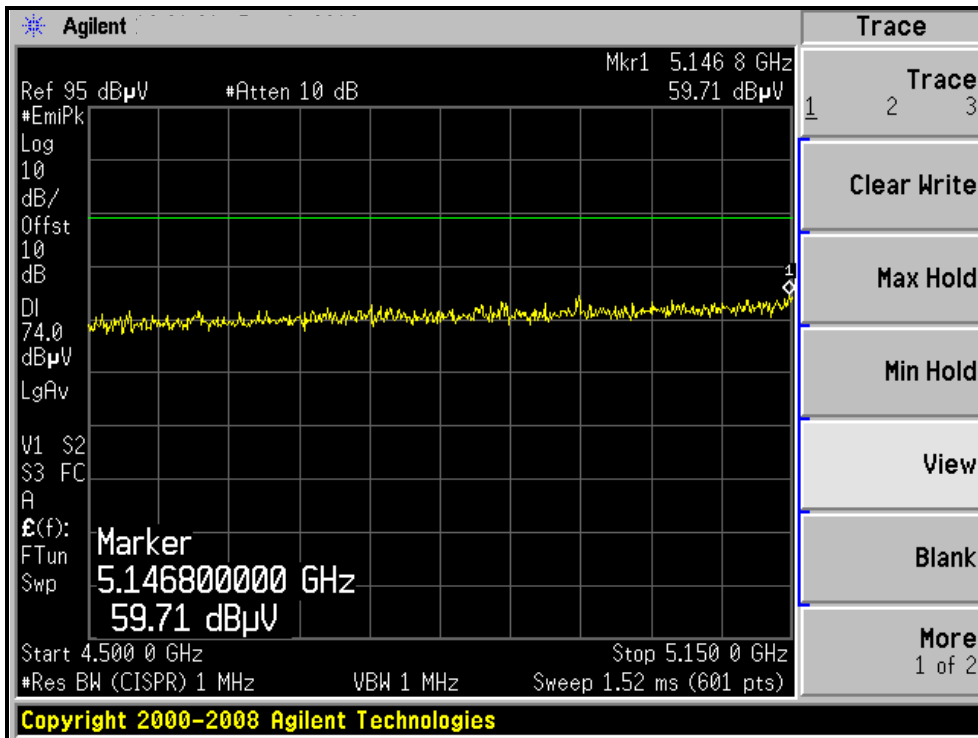



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH36, VERTICAL)

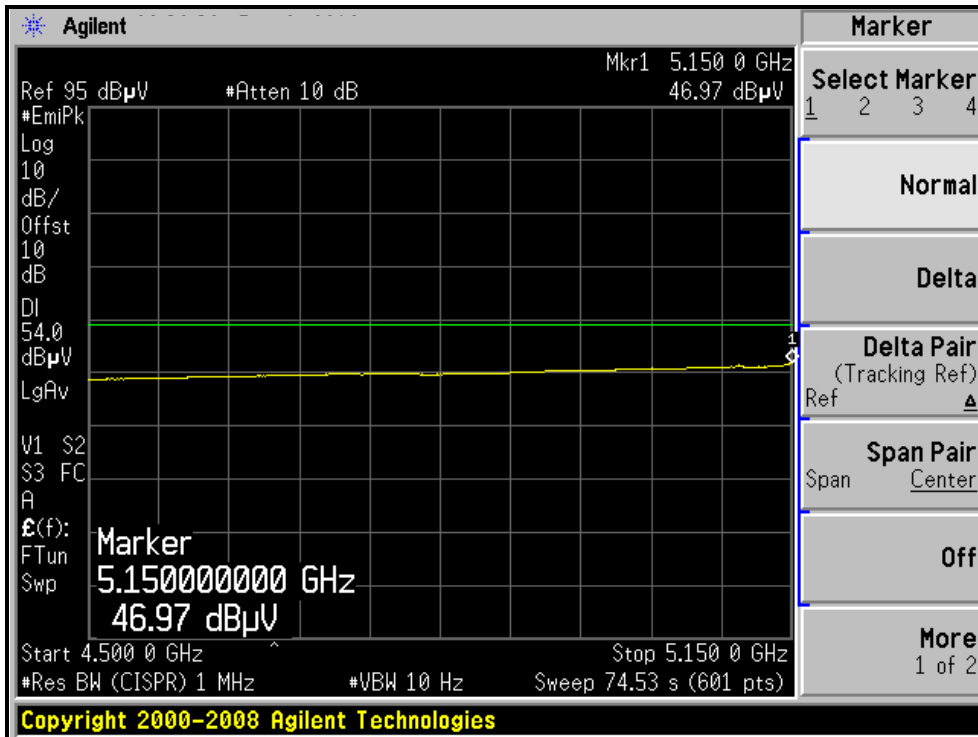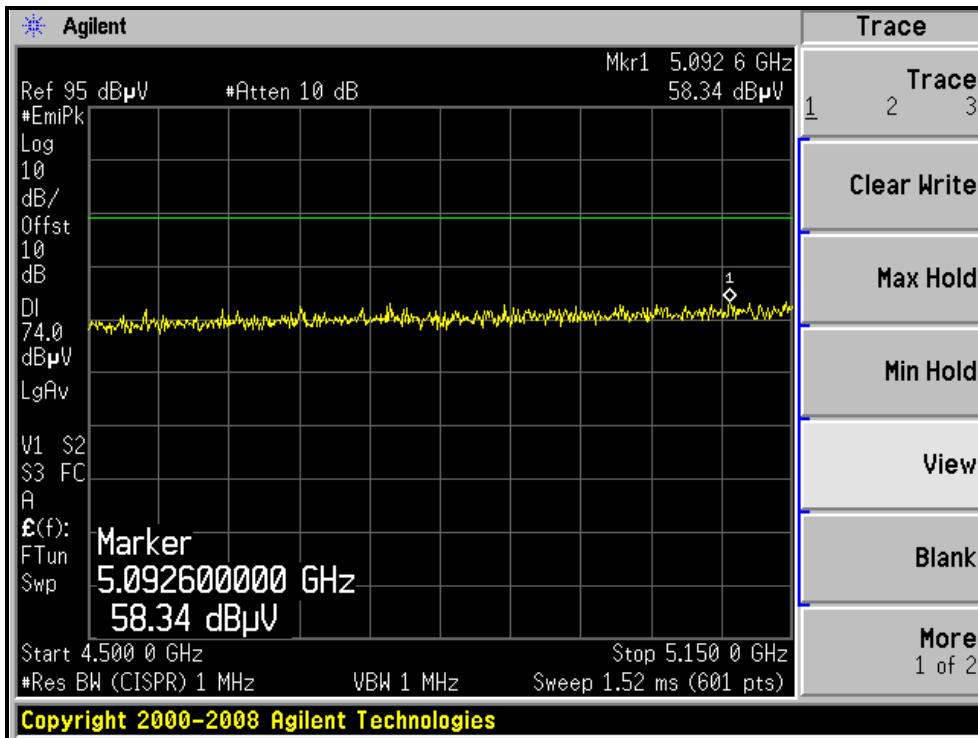



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH64, HORIZONTAL)

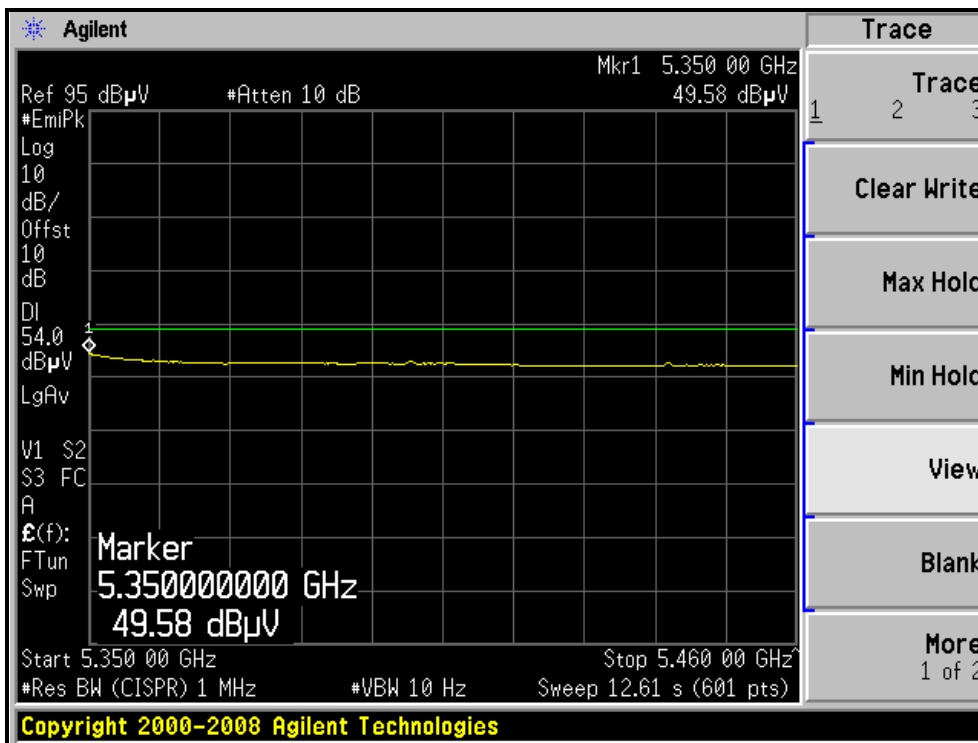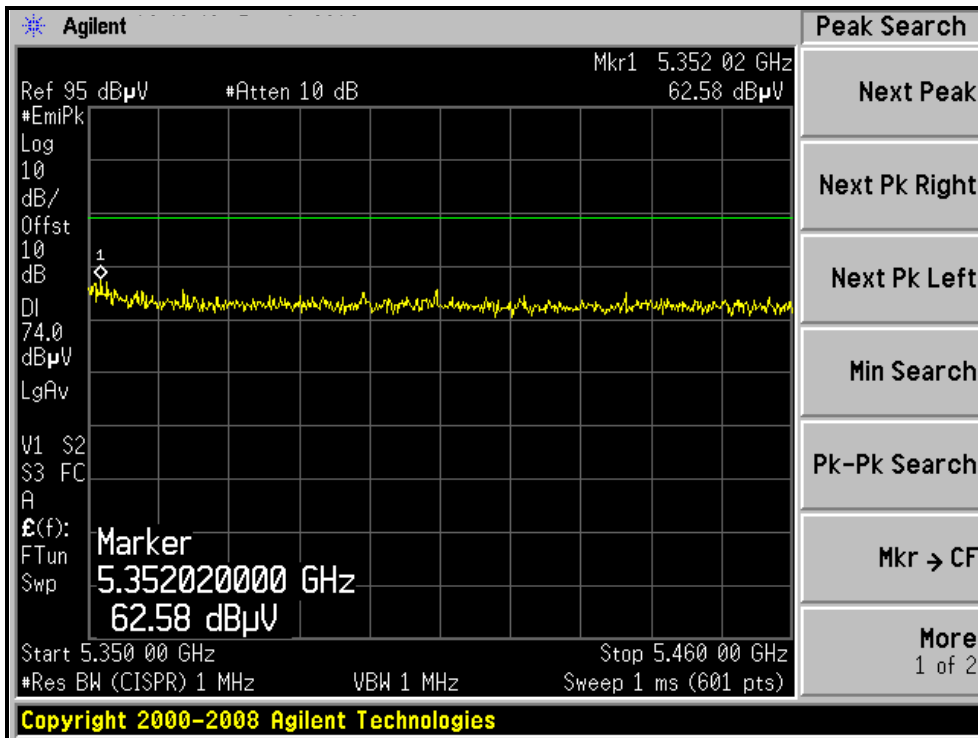



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH64, VERTICAL)

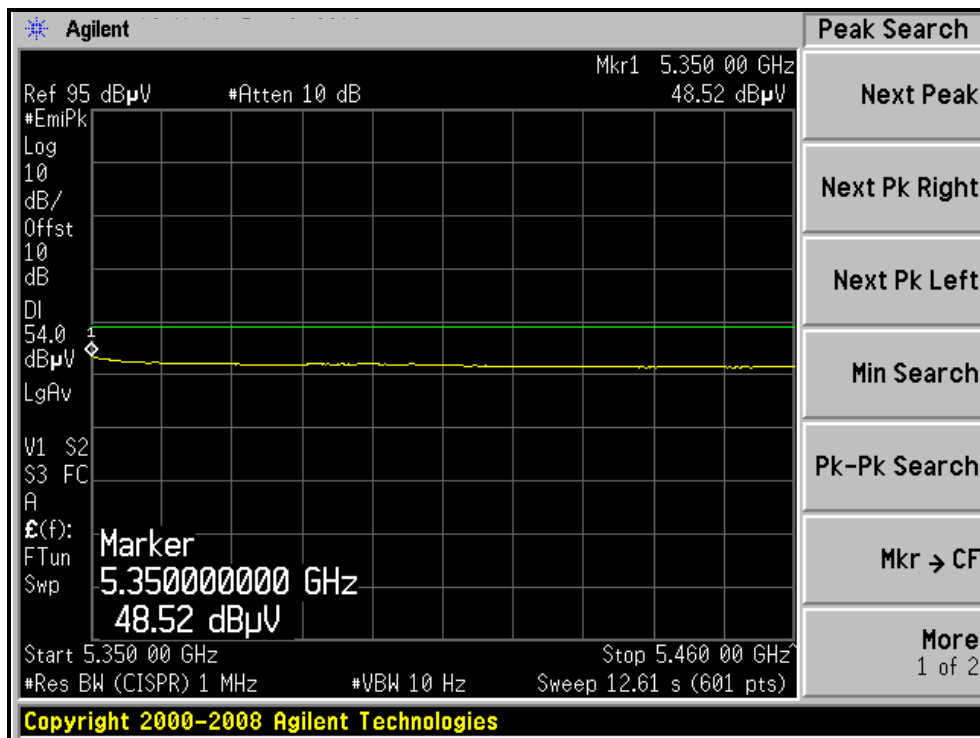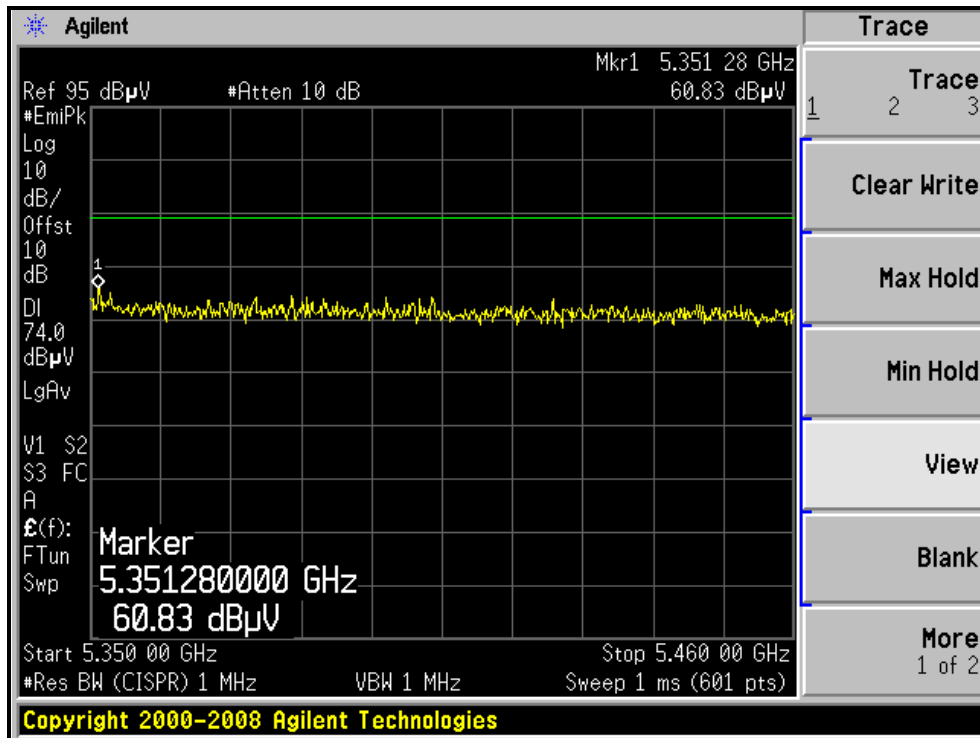



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH100, HORIZONTAL)

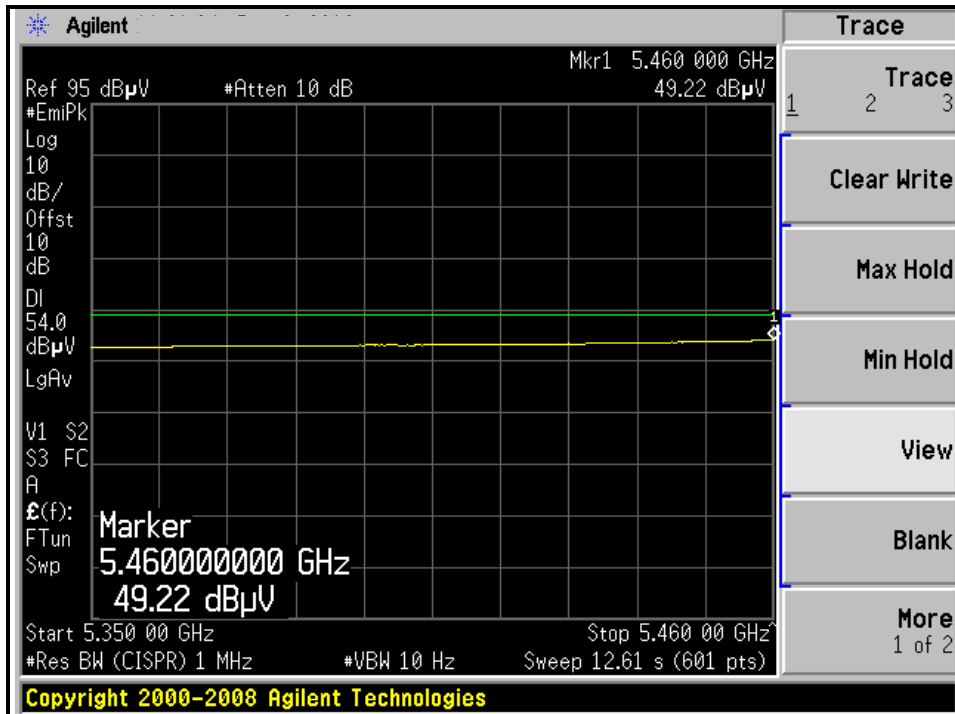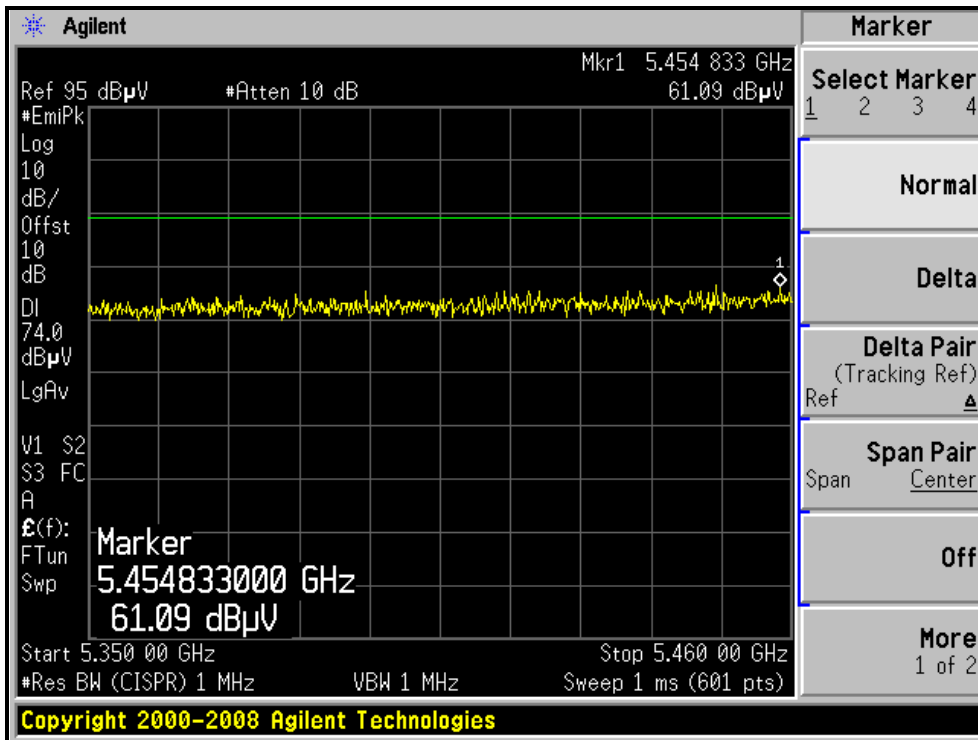



A D T

RESTRICTED BANDEDGE (802.11a MODE, CH100, VERTICAL)

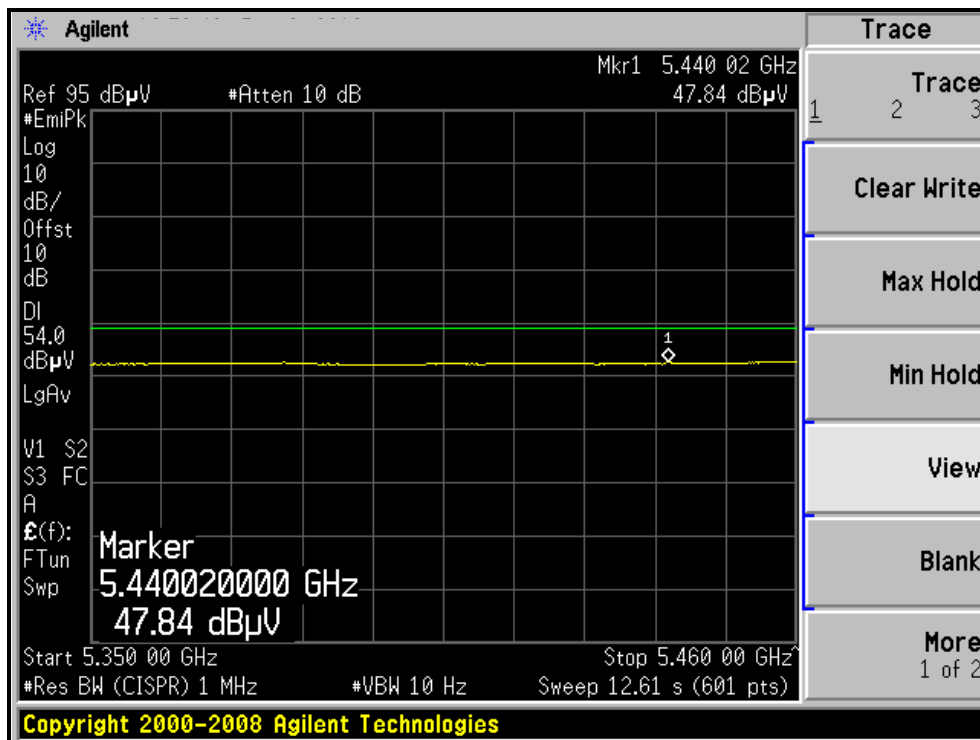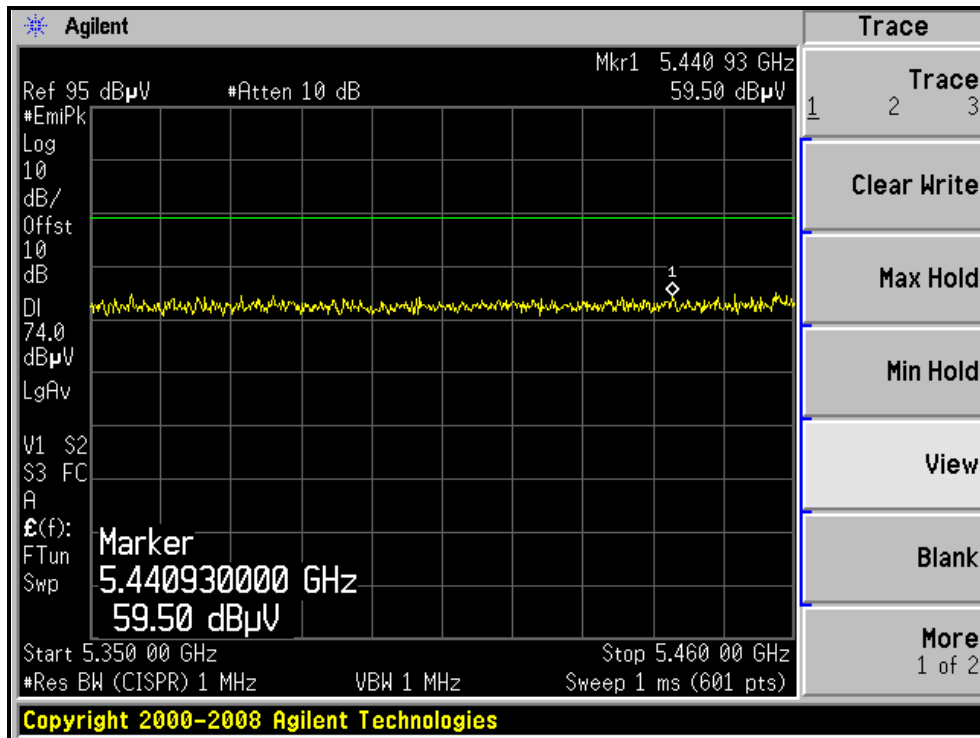

4.3 OUTPUT TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF OUTPUT TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY4825025 4	July 14, 2010	July 13, 2011

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The EUT was setup to ANSI C63.4, tested to UNII test procedure of KDB289238 (DA-02-2138A1) for compliance to FCC 47CFR 15.407 requirements.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

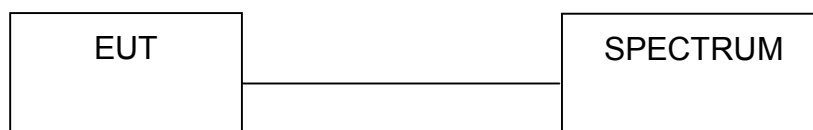

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11a OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	OUTPUT POWER (mW)	OUTPUT POWER (dBm)	OUTPUT POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
36	5180	17.8	12.5	17.0	20.91	PASS
40	5200	25.1	14.0	17.0	23.37	PASS
48	5240	19.1	12.8	17.0	20.82	PASS
52	5260	27.5	14.4	24.0	23.31	PASS
60	5300	27.5	14.4	24.0	23.45	PASS
64	5320	15.8	12.0	24.0	20.81	PASS
100	5500	20.4	13.1	24.0	21.28	PASS
120	5600	33.1	15.2	24.0	23.28	PASS
140	5700	9.1	9.6	24.0	20.62	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.




A D T

Peak Power Output: CH36

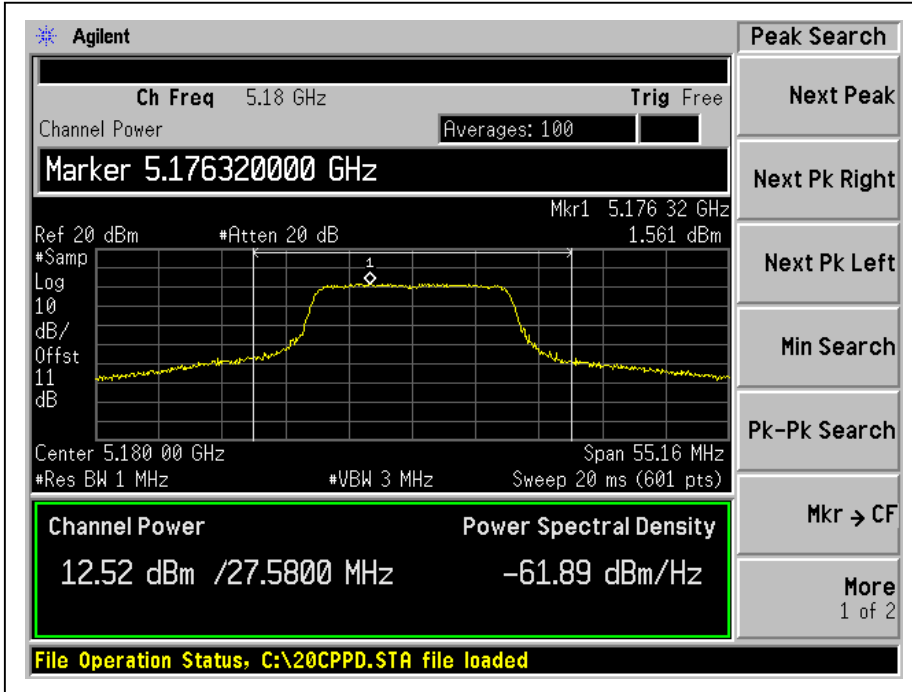


CH40

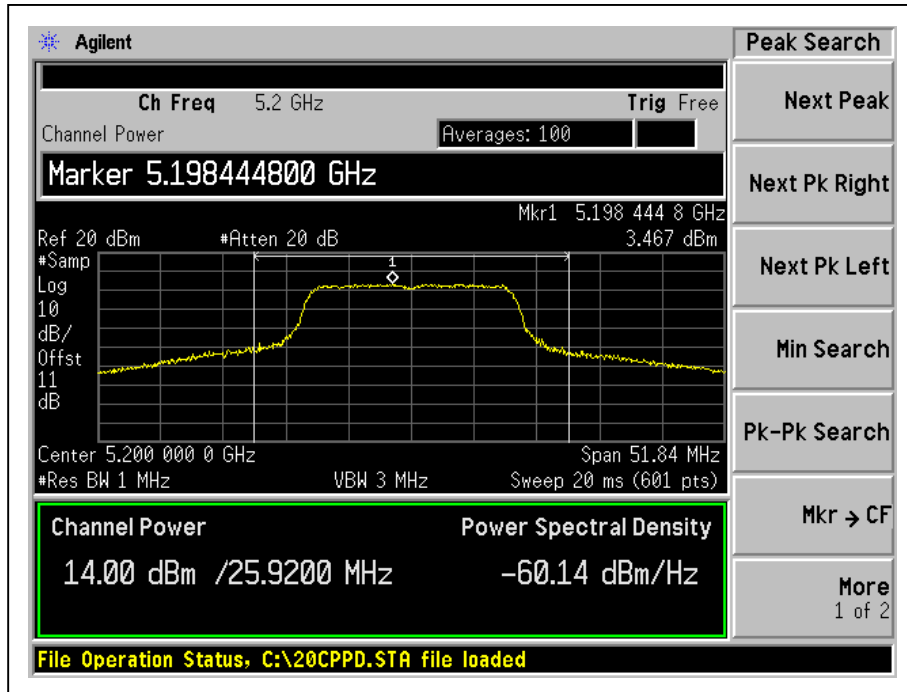




A D T

CH48

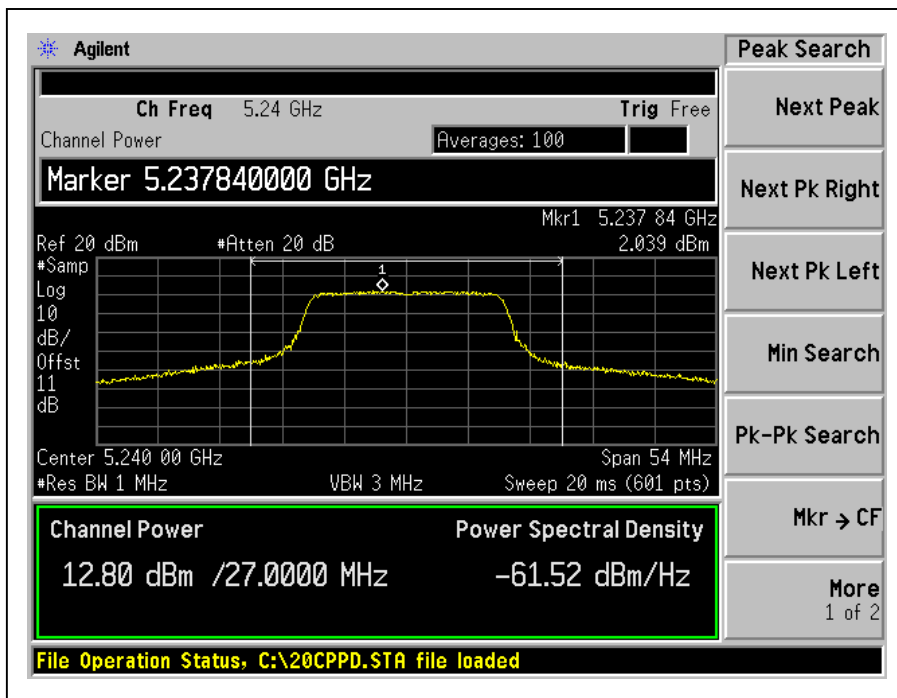


CH52

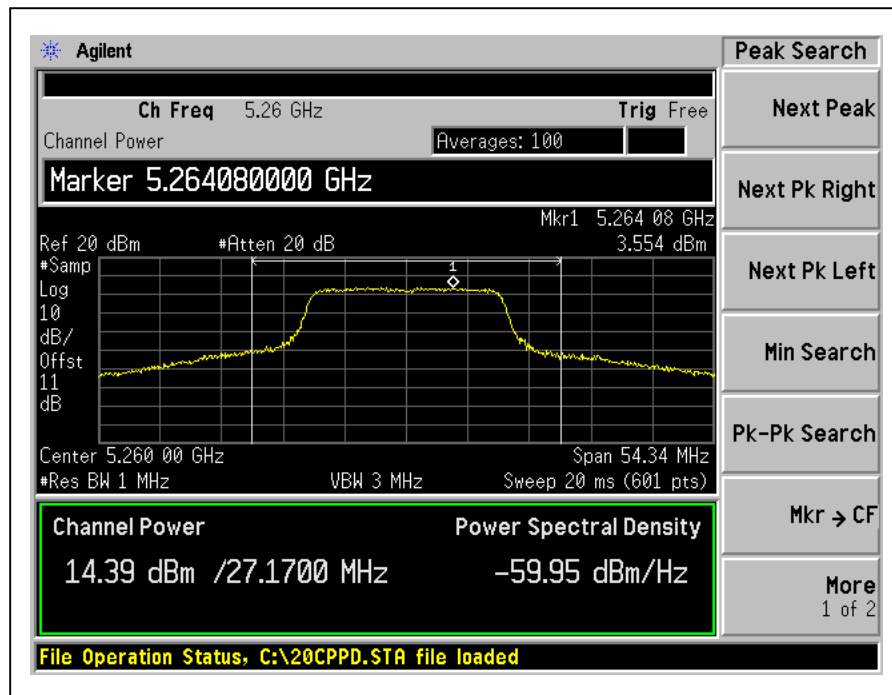




A D T

CH60

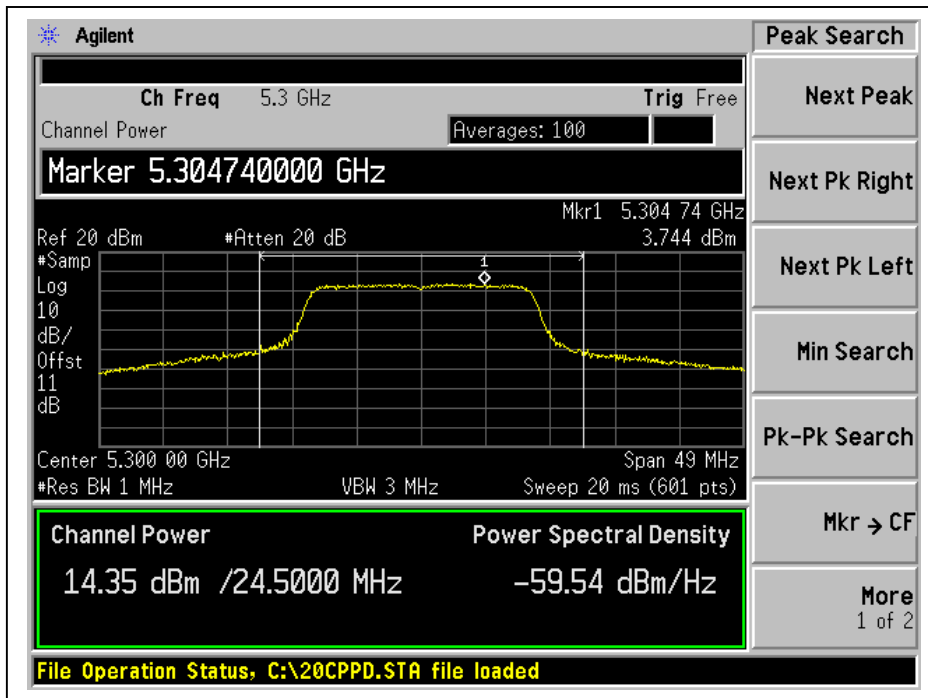


CH64

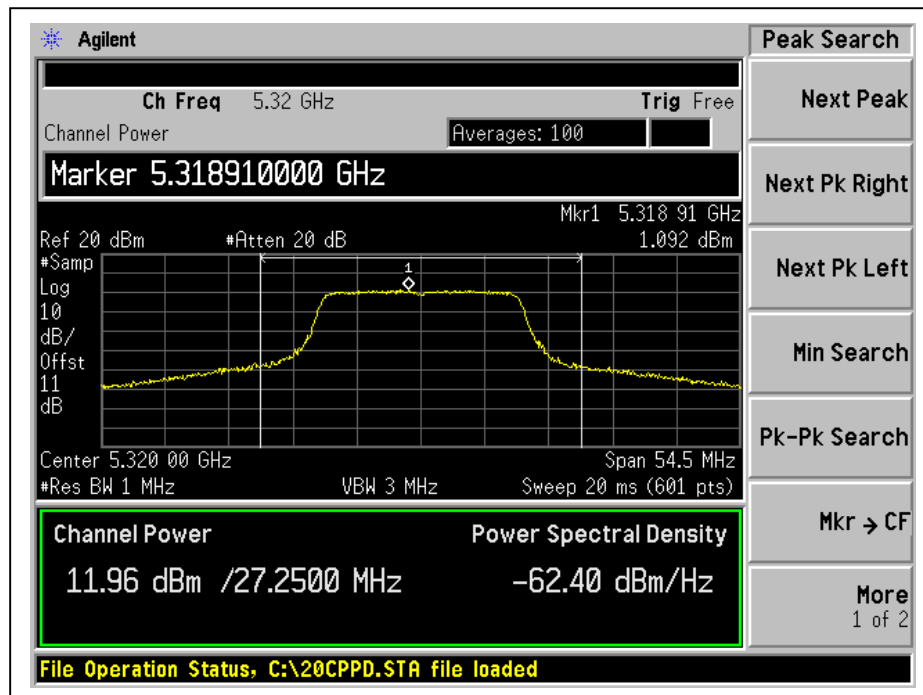




A D T

CH100

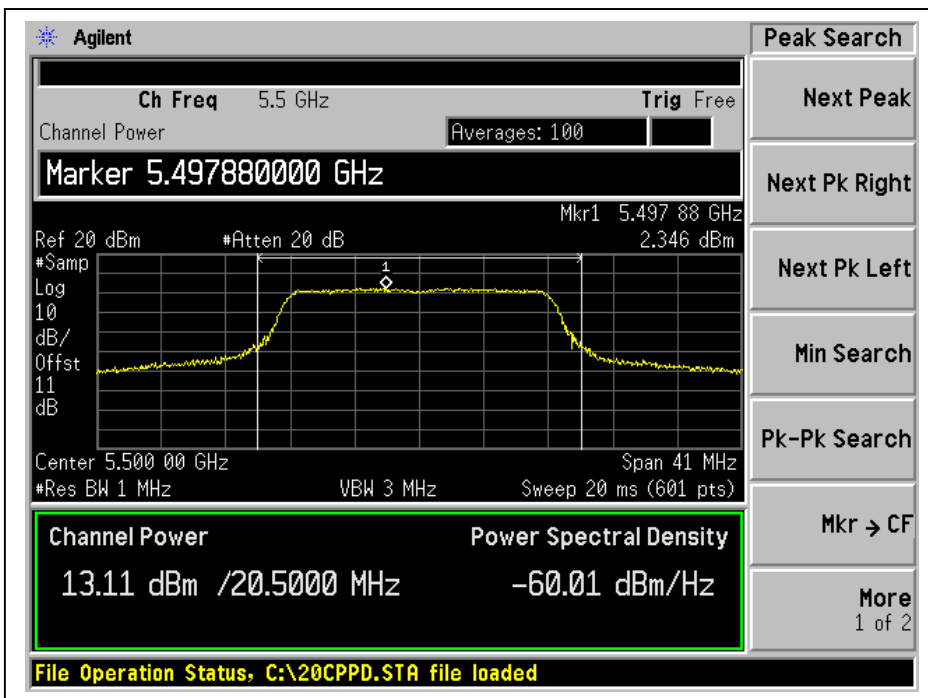


CH120

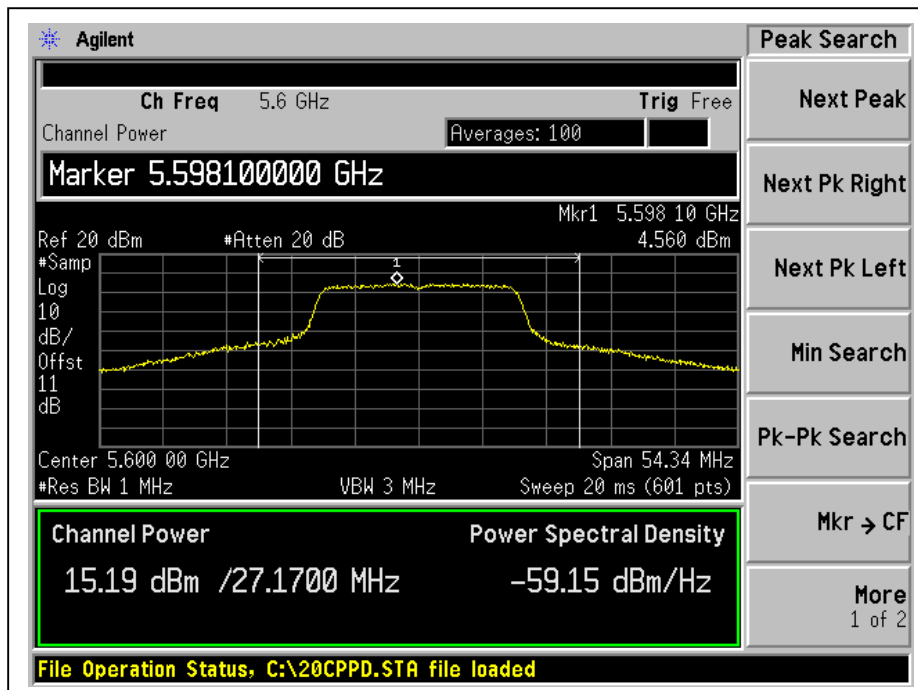



A D T


CH140

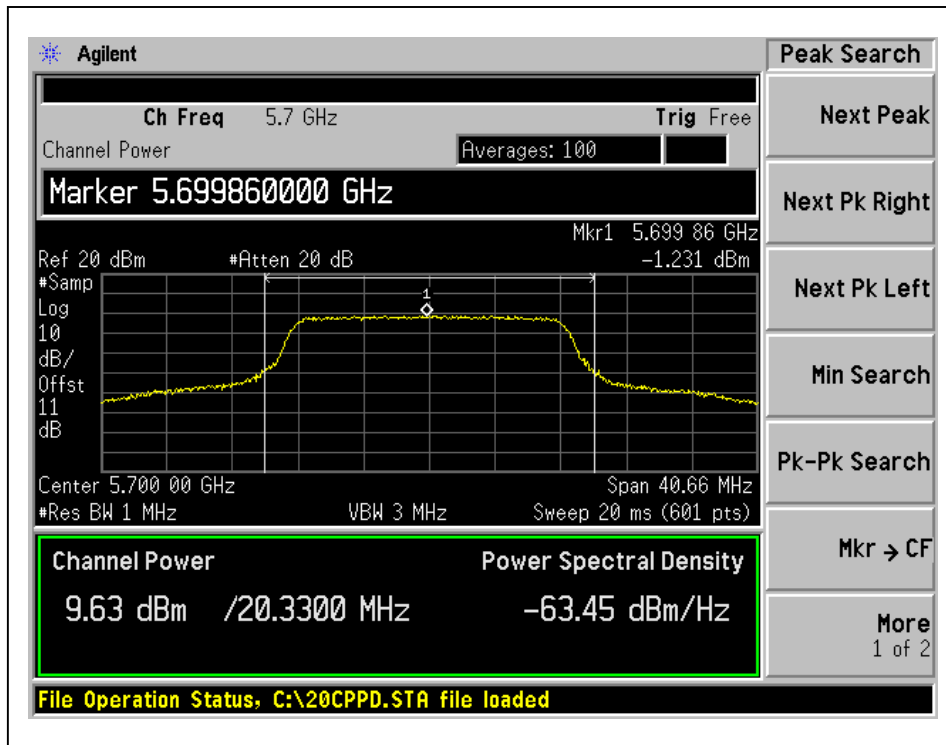




A D T

26dB Occupied Bandwidth: CH36

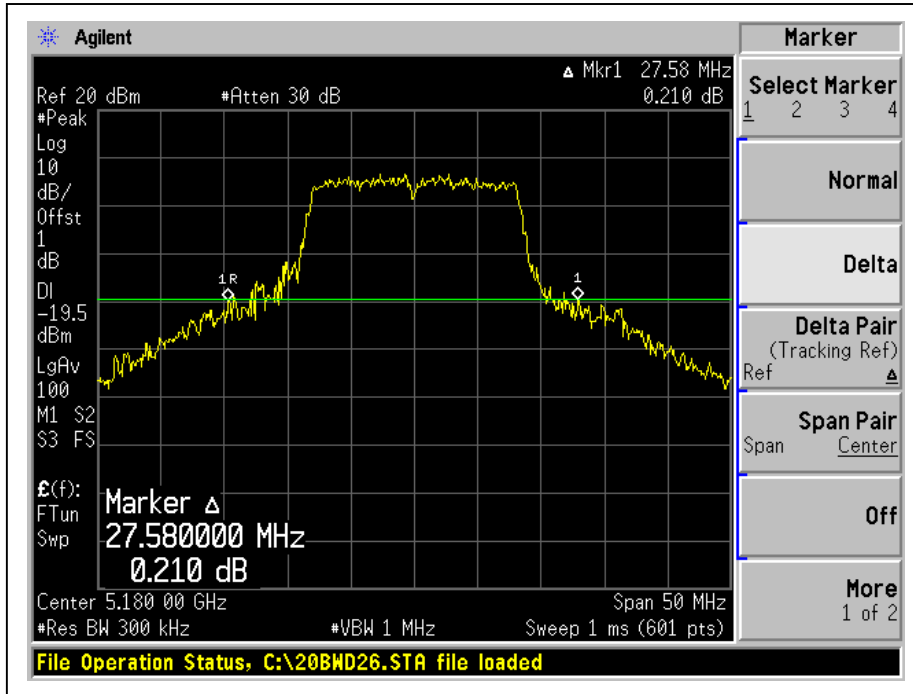


CH40

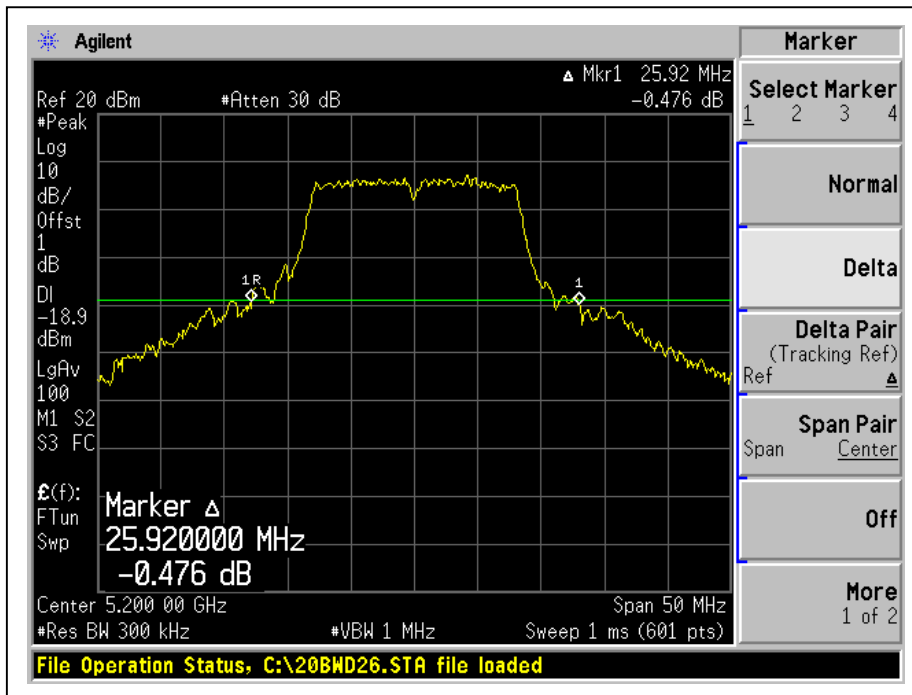




A D T


CH48

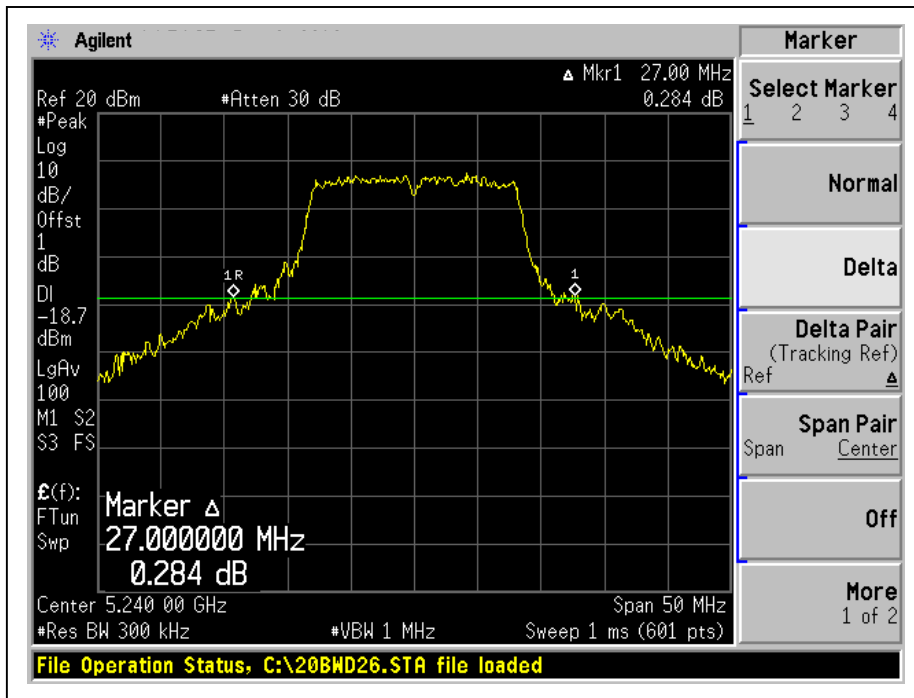


CH52

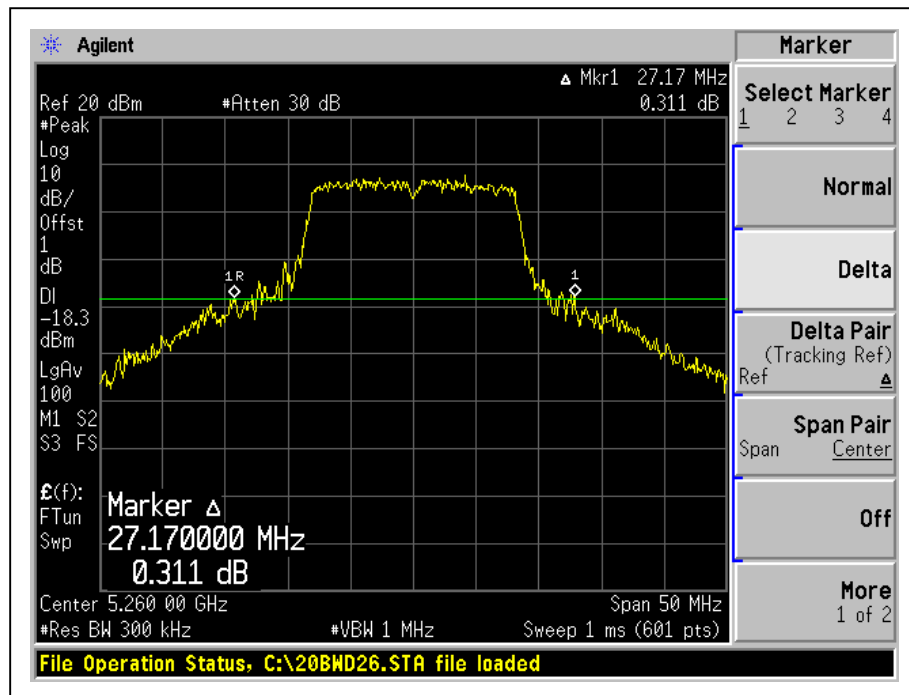

CH60

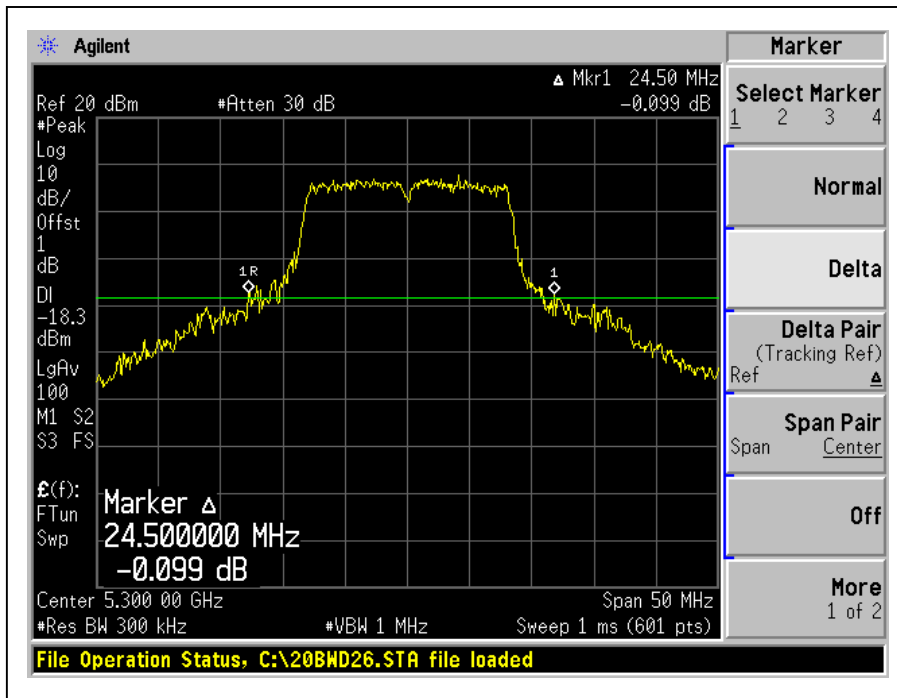


CH64

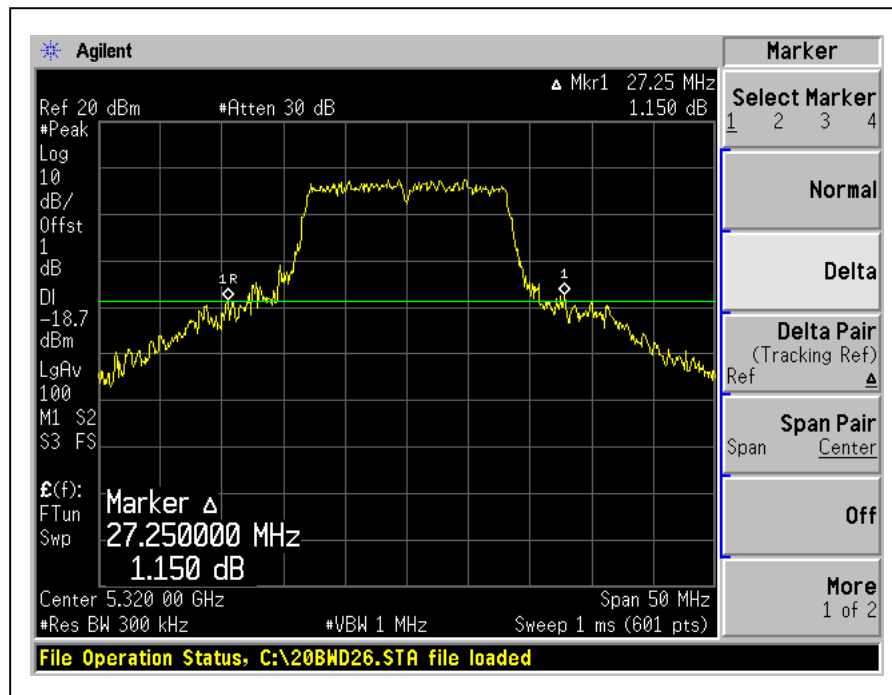




A D T

CH100

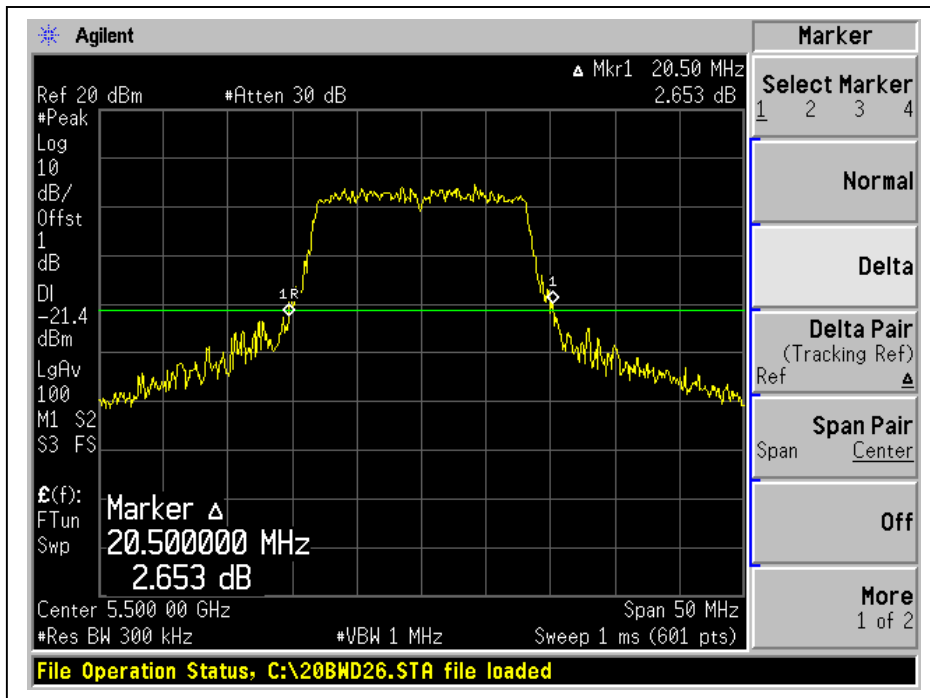


CH120

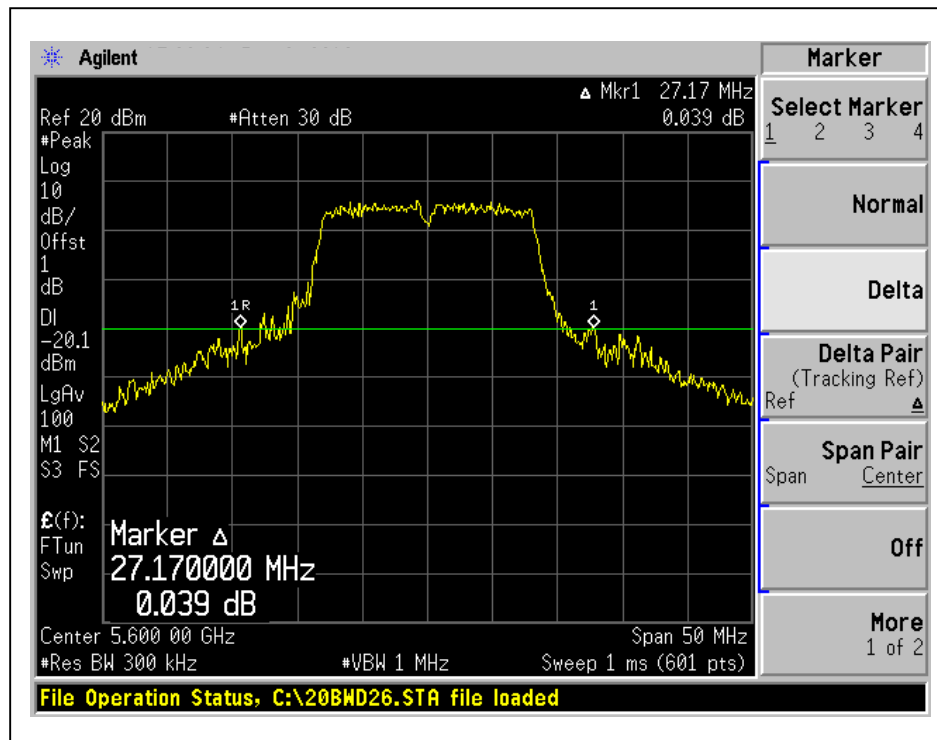



A D T

CH140

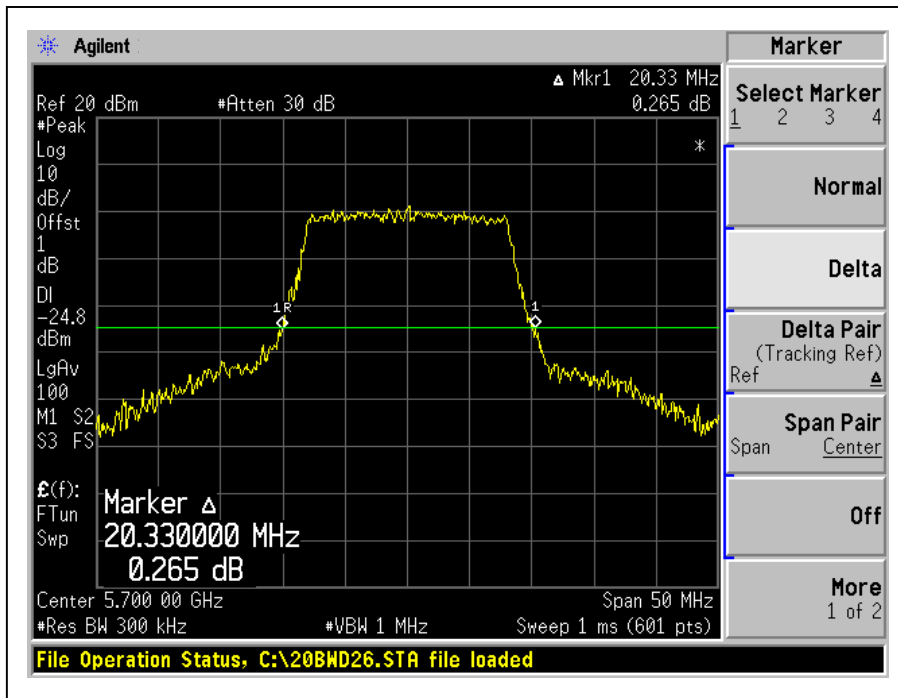



A D T

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.47 – 5.725GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 14, 2010	July 13, 2011

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300kHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.


NOTE:

The EUT was setup to ANSI C63.4, tested to UNII test procedure of KDB289238 (DA-02-2138A1) for compliance to FCC 47CFR 15.407 requirements.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

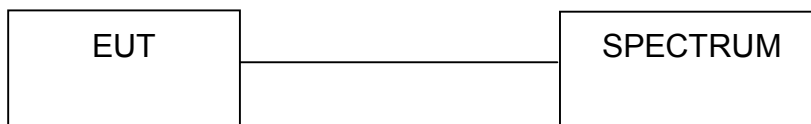

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.4.7 TEST RESULTS


802.11a OFDM modulation

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	7.2	13	PASS
40	5200	6.9	13	PASS
48	5240	7.5	13	PASS
52	5260	8.1	13	PASS
60	5300	8.2	13	PASS
64	5320	7.8	13	PASS
100	5500	8.0	13	PASS
120	5600	7.1	13	PASS
140	5700	7.9	13	PASS




A D T

CH36

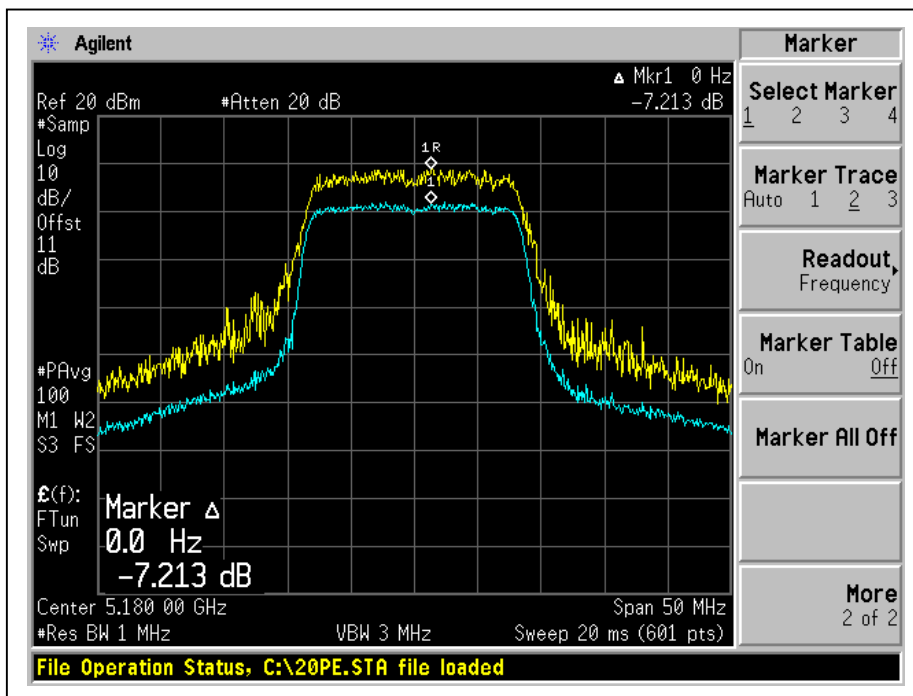


CH40

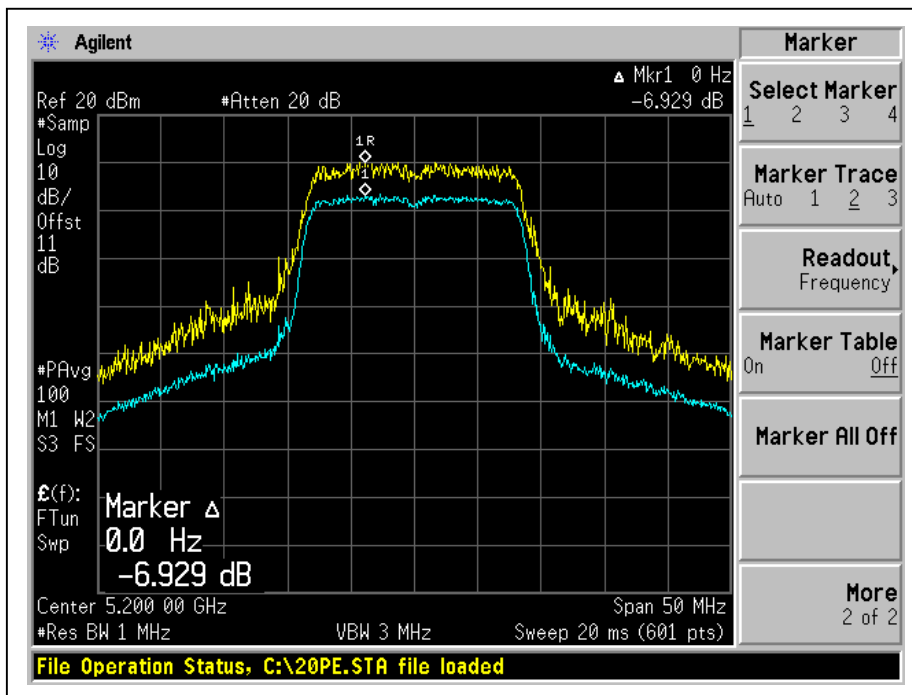




A D T

CH48

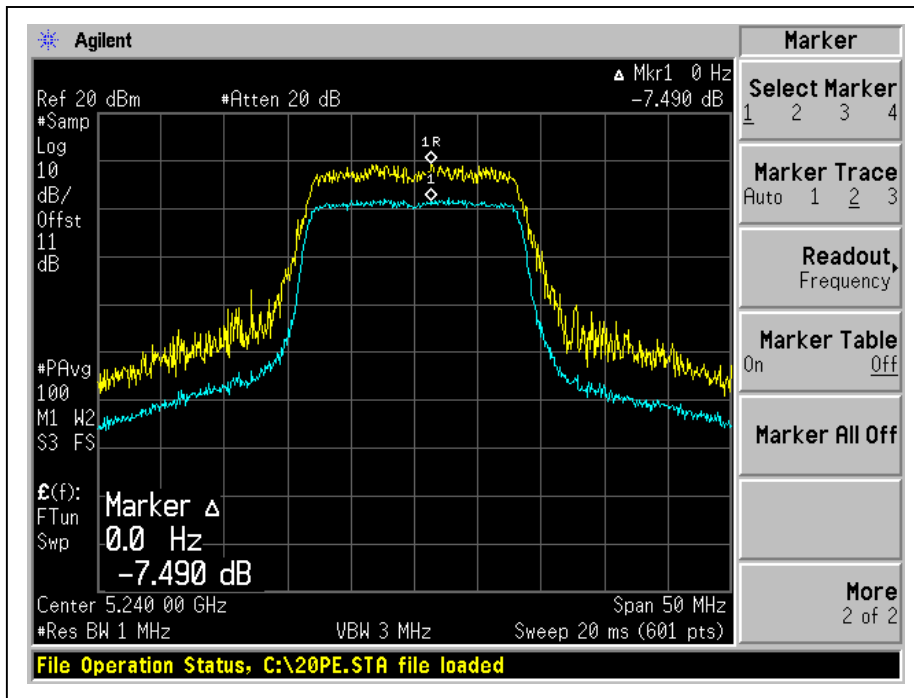


CH52

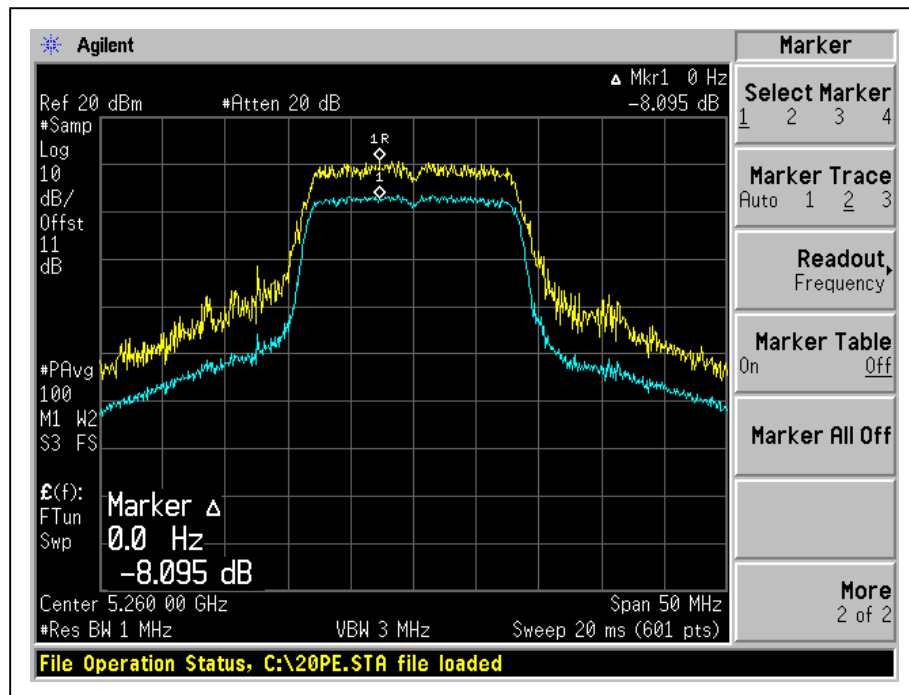




A D T

CH60

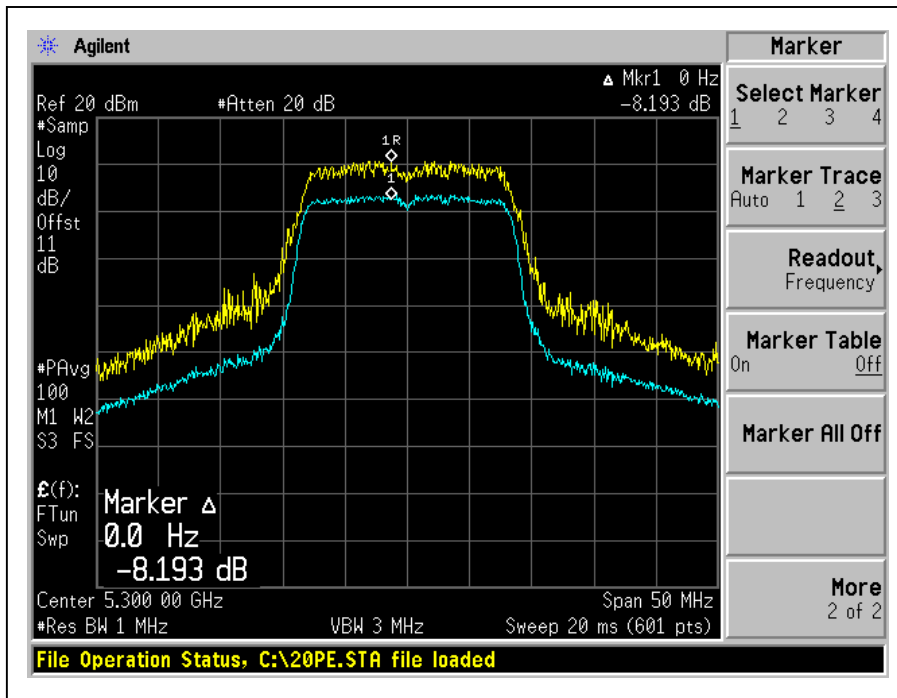


CH64

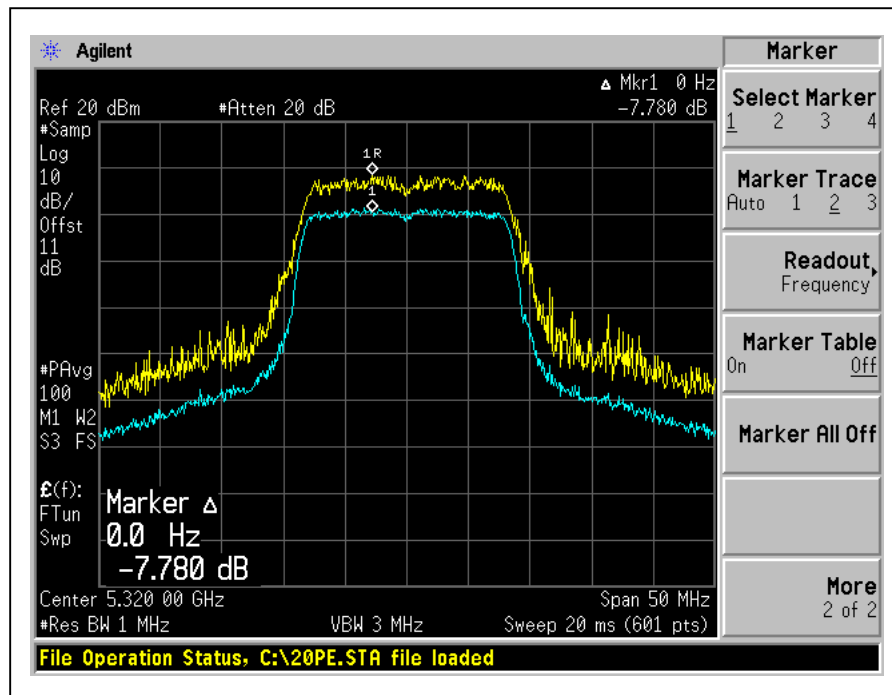




A D T

CH100

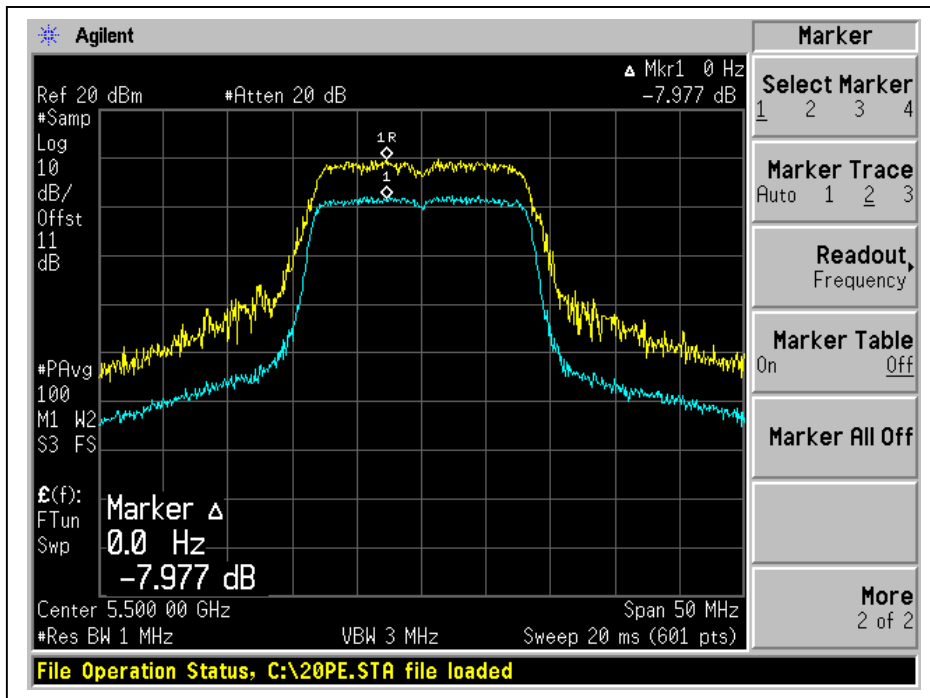


CH120

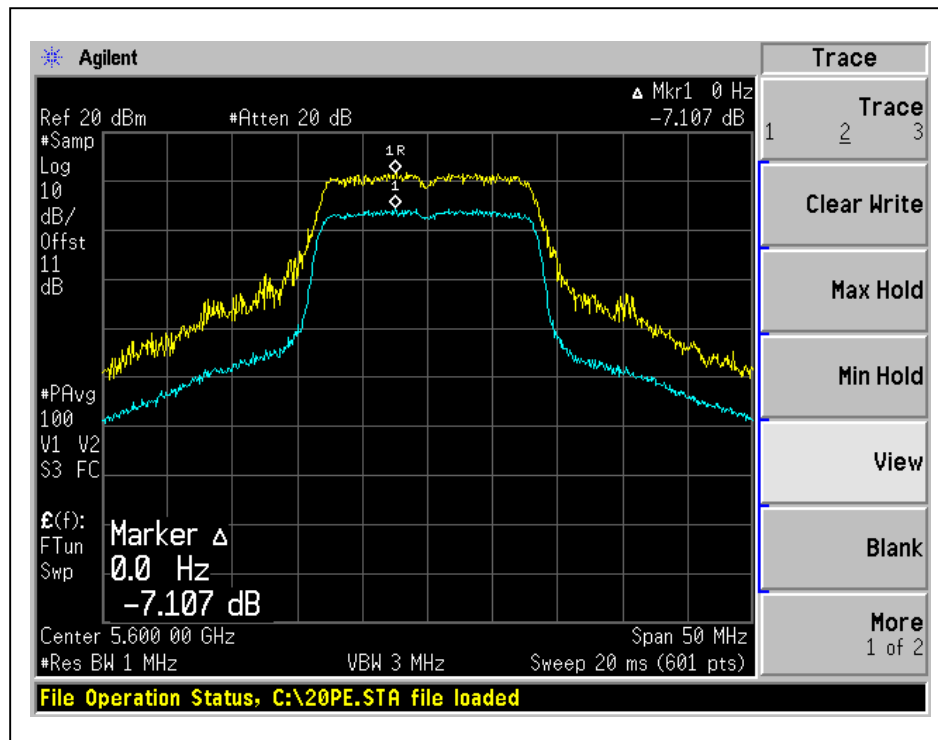



A D T

CH140

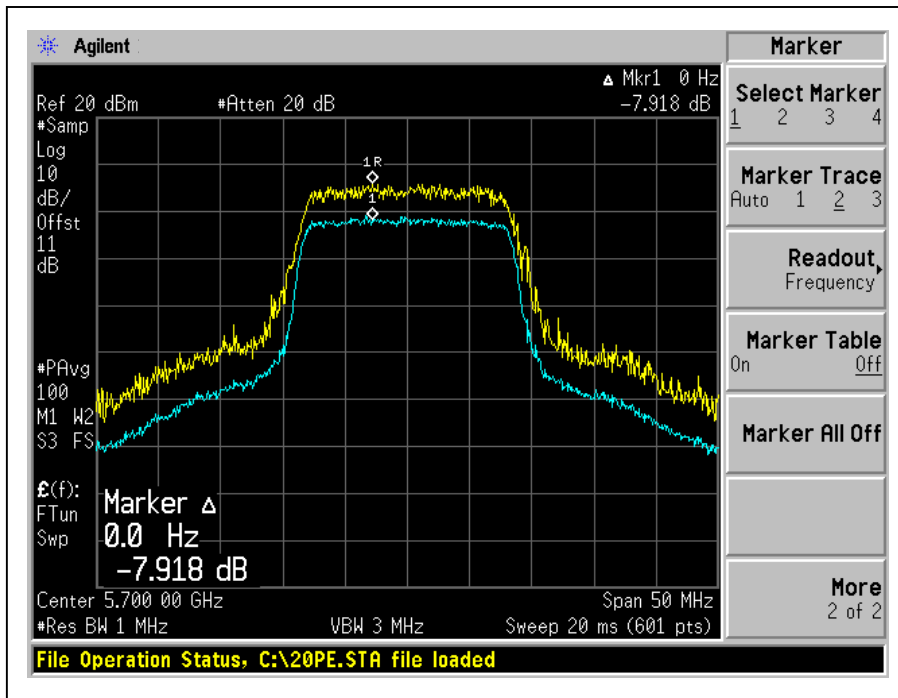



A D T

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 – 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY4825025 4	July 14, 2010	July 13, 2011

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

NOTE:

The EUT was setup to ANSI C63.4, tested to UNII test procedure of KDB289238 (DA-02-2138A1) for compliance to FCC 47CFR 15.407 requirements.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6



A D T

4.5.7 TEST RESULTS


802.11a OFDM modulation

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	1.6	4	PASS
40	5200	3.5	4	PASS
48	5240	2.0	4	PASS
52	5260	3.6	11	PASS
60	5300	3.7	11	PASS
64	5320	1.1	11	PASS
100	5500	2.3	11	PASS
120	5600	4.6	11	PASS
140	5700	-1.2	11	PASS




A D T

CH36

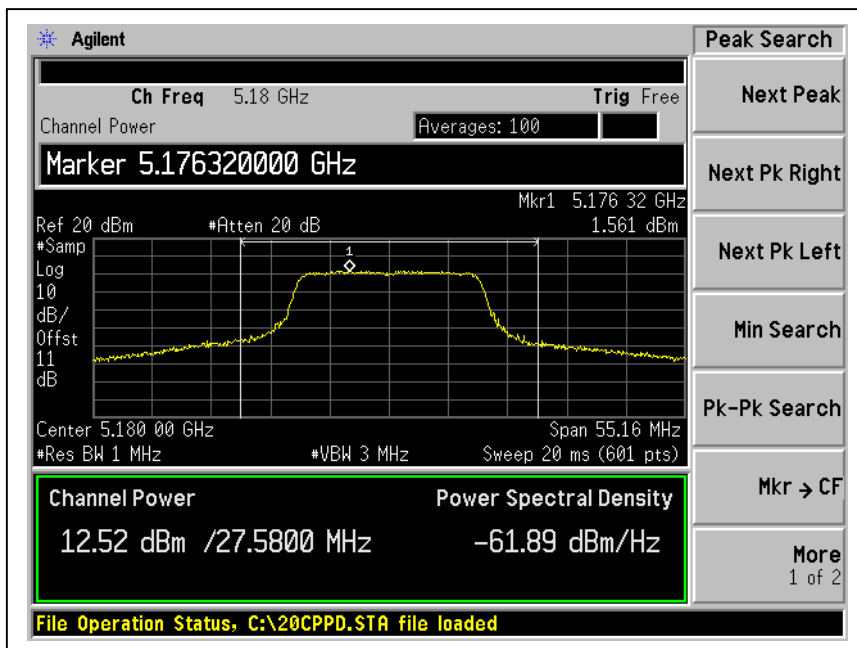


CH40

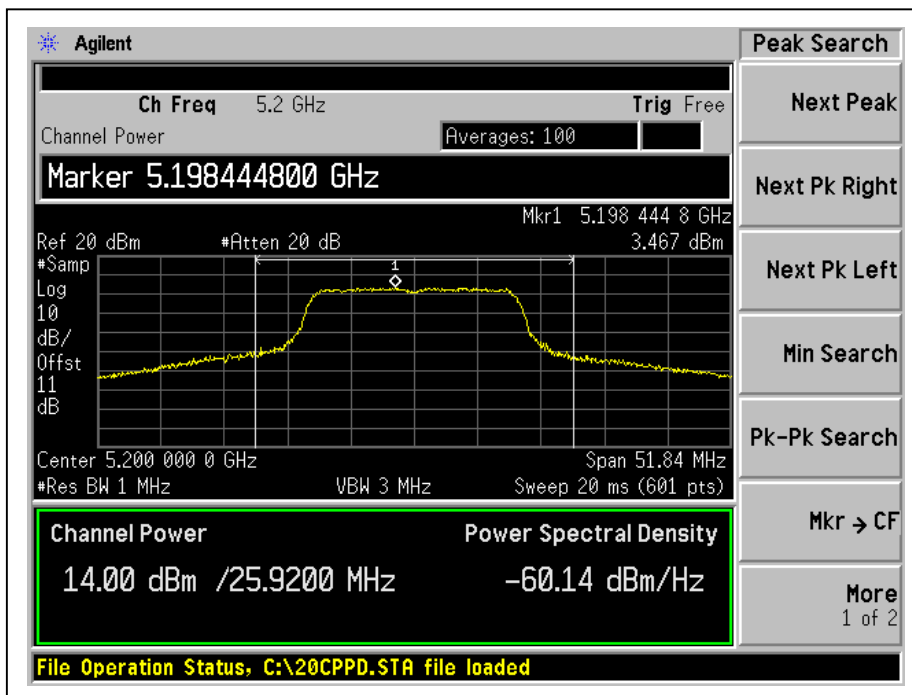




A D T

CH48

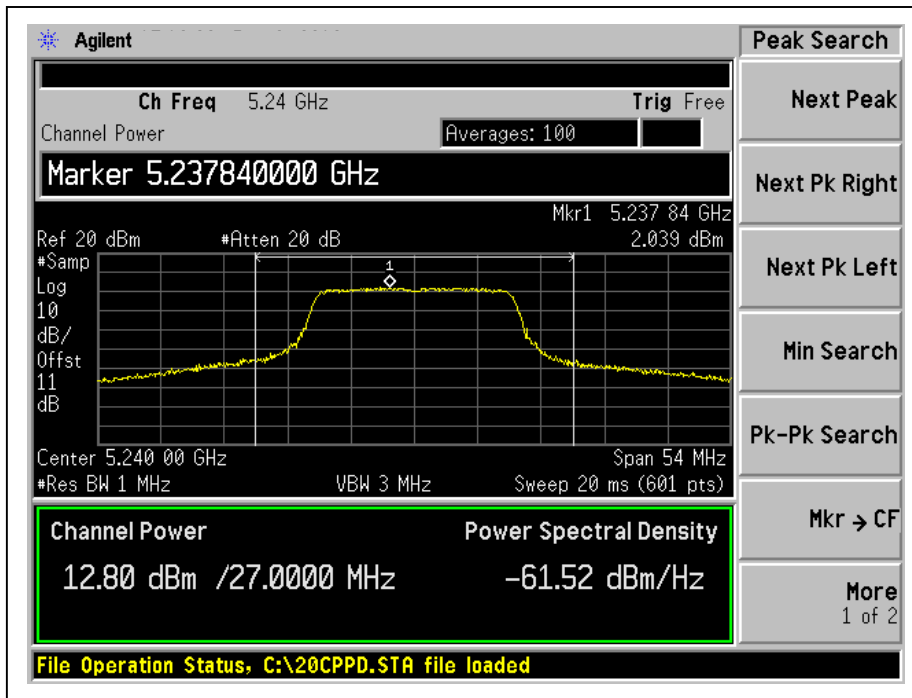


CH52

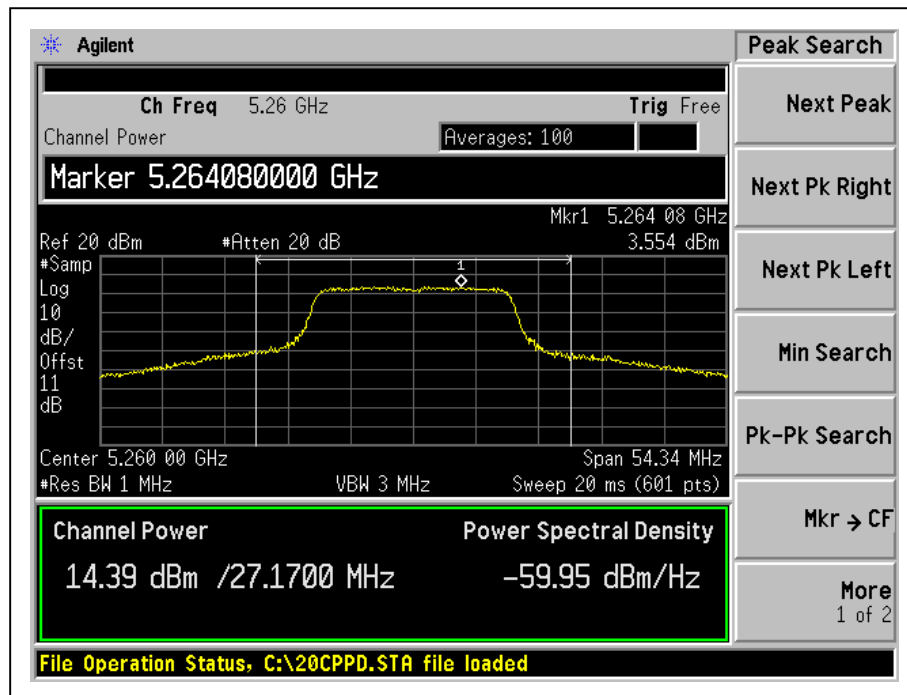




A D T

CH60

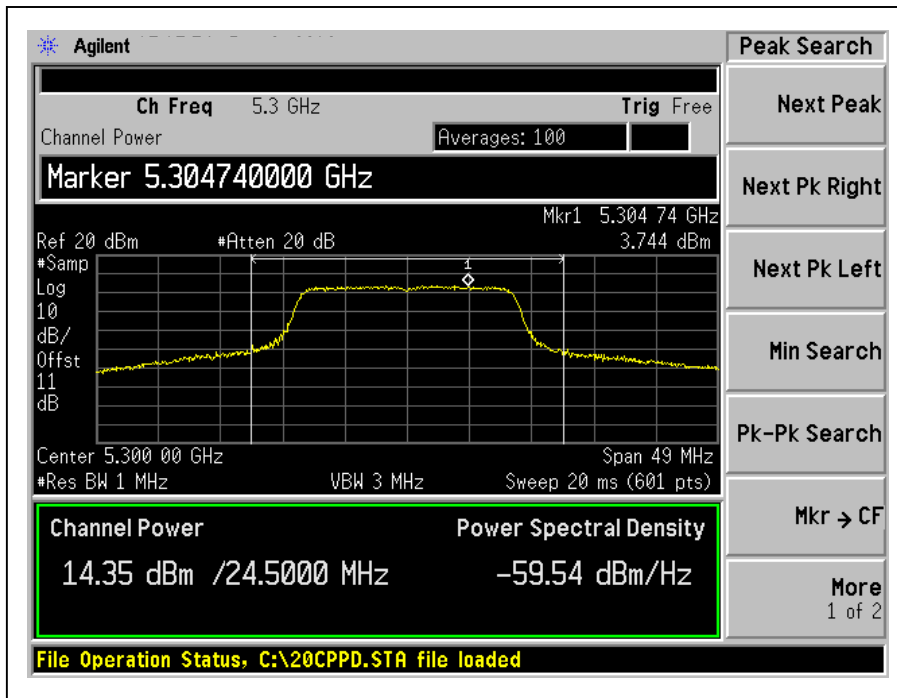


CH64

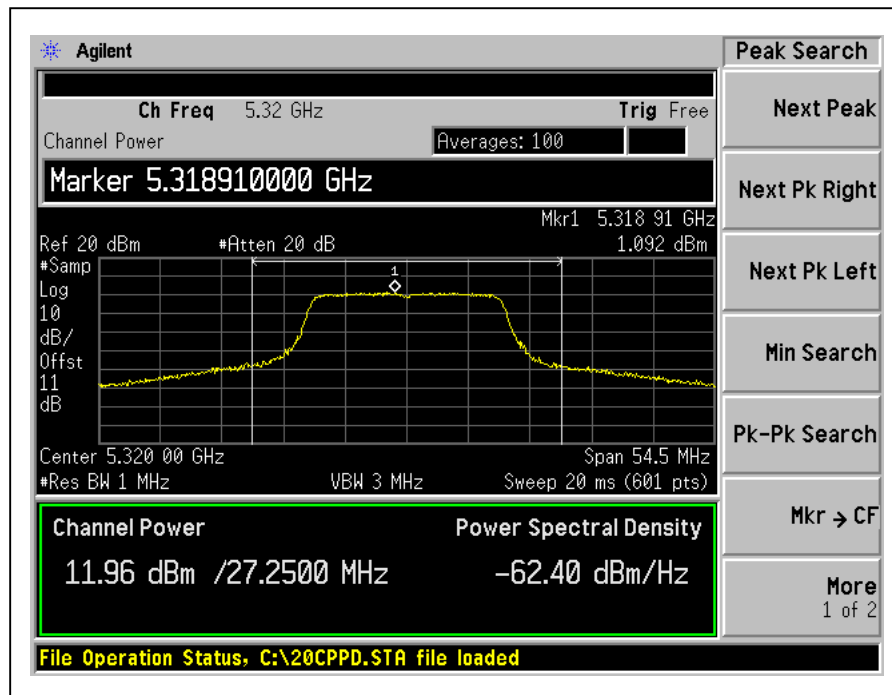




A D T

CH100

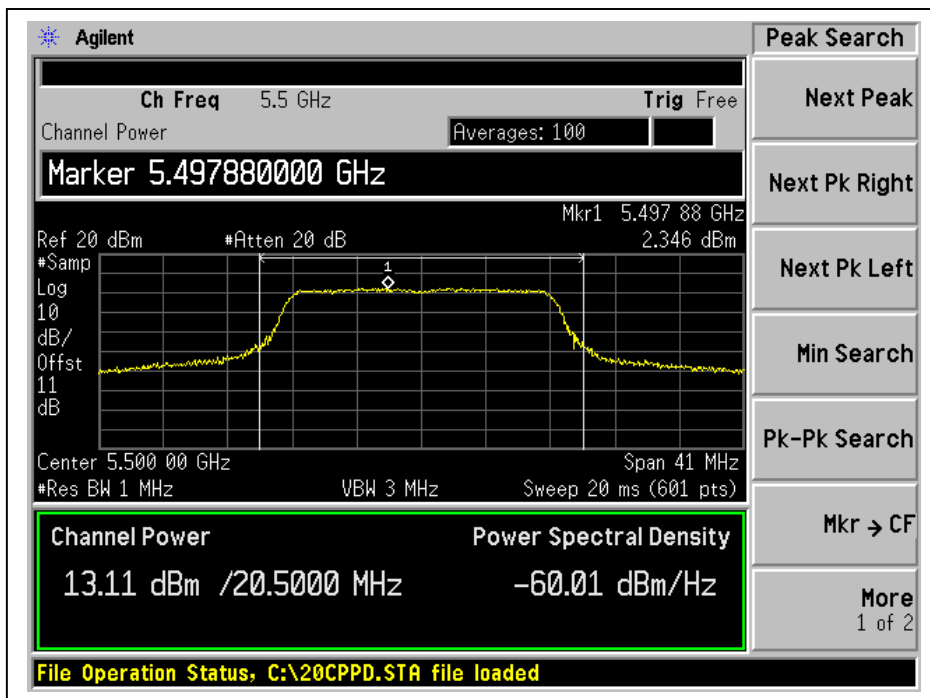


CH120

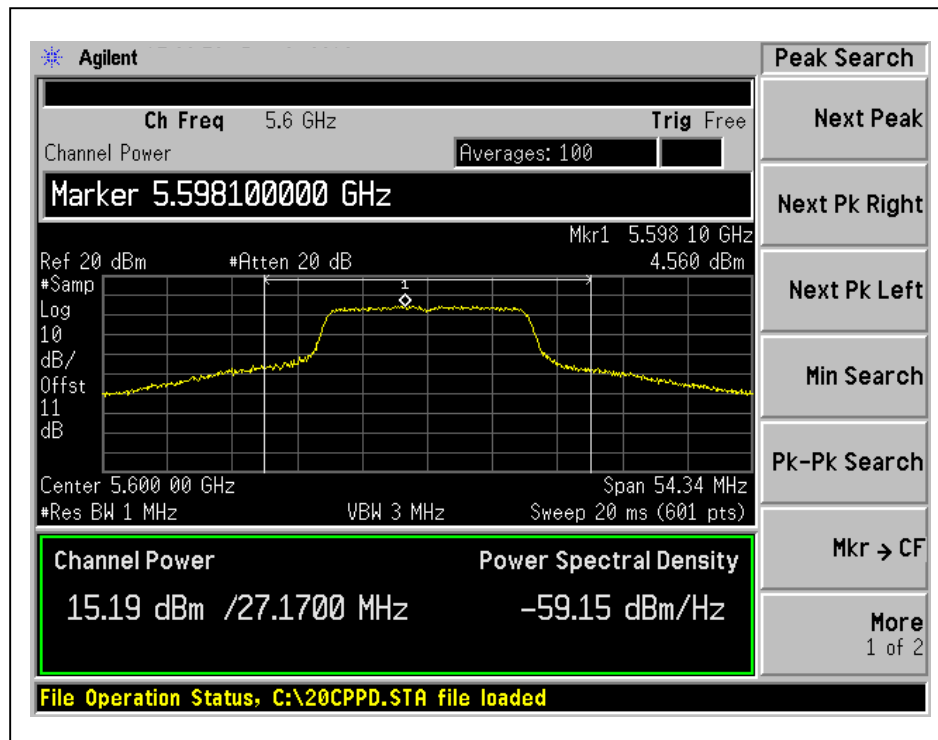



A D T

CH140

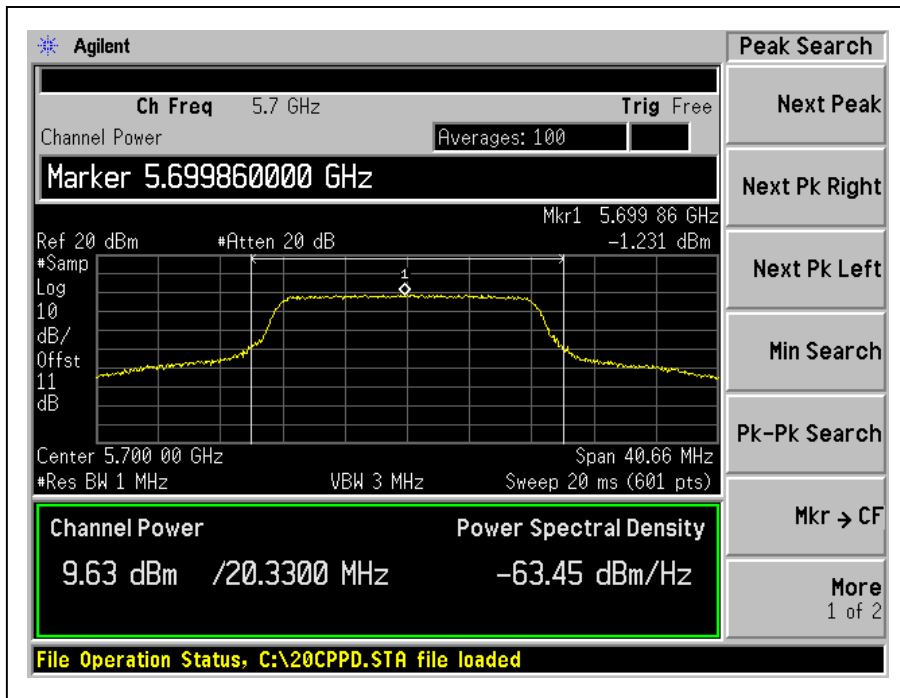

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY482502 54	July 14, 2010	July 13, 2011

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

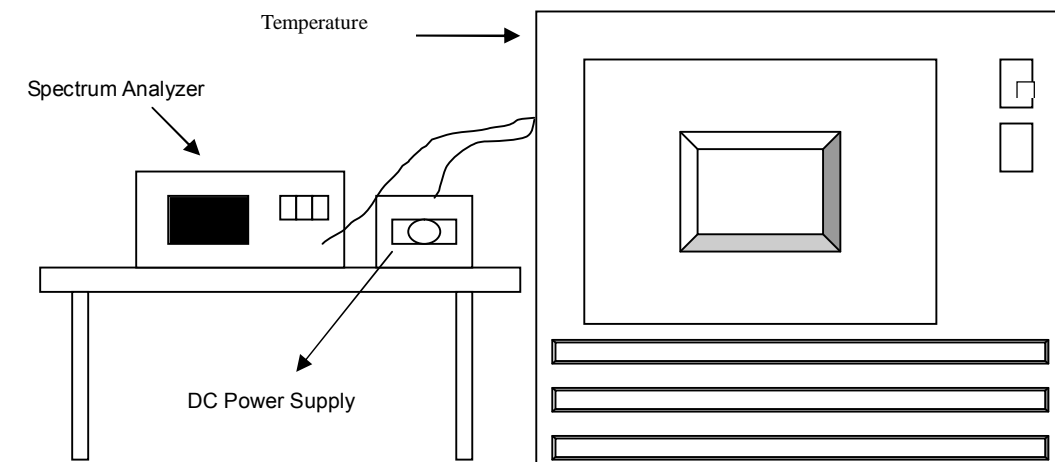

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.6.7 TEST RESULTS

		Operating frequency: 5320MHz				Limit : ± 0.02%			
Temp. (°C)	Power supply (Vdc)	0 minute		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	4.255	5320.0152	0.000286	5320.0138	0.000259	5320.0120	0.000226	5320.0123	0.000231
	3.7	5320.015	0.000282	5320.0158	0.000297	5320.0140	0.000263	5320.0147	0.000276
	3.145	5320.015	0.000282	5320.0128	0.000241	5320.0120	0.000226	5320.0145	0.000273
40	4.255	5320.021	0.000395	5320.0215	0.000404	5320.0218	0.000410	5320.0219	0.000412
	3.7	5320.021	0.000395	5320.0214	0.000402	5320.0218	0.000410	5320.0225	0.000423
	3.145	5320.0212	0.000398	5320.0212	0.000398	5320.0218	0.000410	5320.0223	0.000419
30	4.255	5320.0146	0.000274	5320.0098	0.000184	5320.0060	0.000113	5320.0053	0.000100
	3.7	5320.0146	0.000274	5320.0128	0.000241	5320.0090	0.000169	5320.0077	0.000145
	3.145	5320.0146	0.000274	5320.0088	0.000165	5320.0070	0.000132	5320.0063	0.000118
20	4.255	5320.0076	0.000143	5320.0028	0.000053	5320.0030	0.000056	5320.0033	0.000062
	3.7	5320.0076	0.000143	5320.0058	0.000109	5320.0040	0.000075	5320.0039	0.000073
	3.145	5320.0056	0.000105	5320.0028	0.000053	5320.0030	0.000056	5320.0037	0.000070
10	4.255	5319.9768	0.000436	5319.9767	0.000438	5319.9767	0.000438	5319.9755	0.000461
	3.7	5319.9768	0.000436	5319.9769	0.000434	5319.9768	0.000436	5319.9763	0.000445
	3.145	5319.9768	0.000436	5319.9767	0.000438	5319.9766	0.000440	5319.9757	0.000457
0	4.255	5319.9917	0.000156	5319.9916	0.000158	5319.9915	0.000160	5319.9917	0.000156
	3.7	5319.9918	0.000154	5319.992	0.000150	5319.9919	0.000152	5319.9915	0.000160
	3.145	5319.9917	0.000156	5319.9916	0.000158	5319.9915	0.000160	5319.9912	0.000165
-10	4.255	5319.9727	0.000513	5319.9824	0.000331	5319.9823	0.000333	5319.9826	0.000327
	3.7	5319.9728	0.000511	5319.9824	0.000331	5319.9825	0.000329	5319.9822	0.000335
	3.145	5319.9827	0.000325	5319.9827	0.000325	5319.9822	0.000335	5319.9825	0.000329
-20	4.255	5319.9962	0.000071	5319.9959	0.000077	5319.9958	0.000079	5319.9947	0.000100
	3.7	5319.9962	0.000071	5319.9961	0.000073	5319.9961	0.000073	5319.9945	0.000103
	3.145	5319.9962	0.000071	5319.9959	0.000077	5319.9958	0.000079	5319.9942	0.000109
-30	4.255	5319.997	0.000056	5319.997	0.000056	5319.9969	0.000058	5319.9959	0.000077
	3.7	5319.997	0.000056	5319.997	0.000056	5319.9971	0.000055	5319.9957	0.000081
	3.145	5319.997	0.000056	5319.9969	0.000058	5319.9968	0.000060	5319.9955	0.000085

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS


For 5.15 to 5.35GHz band:

The spectrum plots (Peak RBW=1MHz, VBW=3MHz) are attached on the following pages.




A D T

CH 36

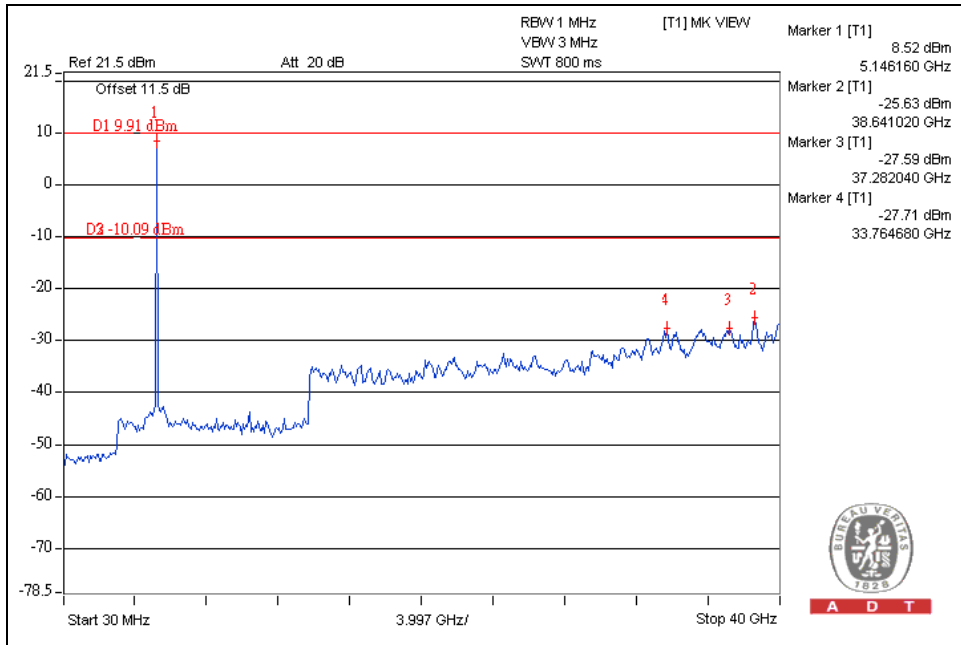

CH 64

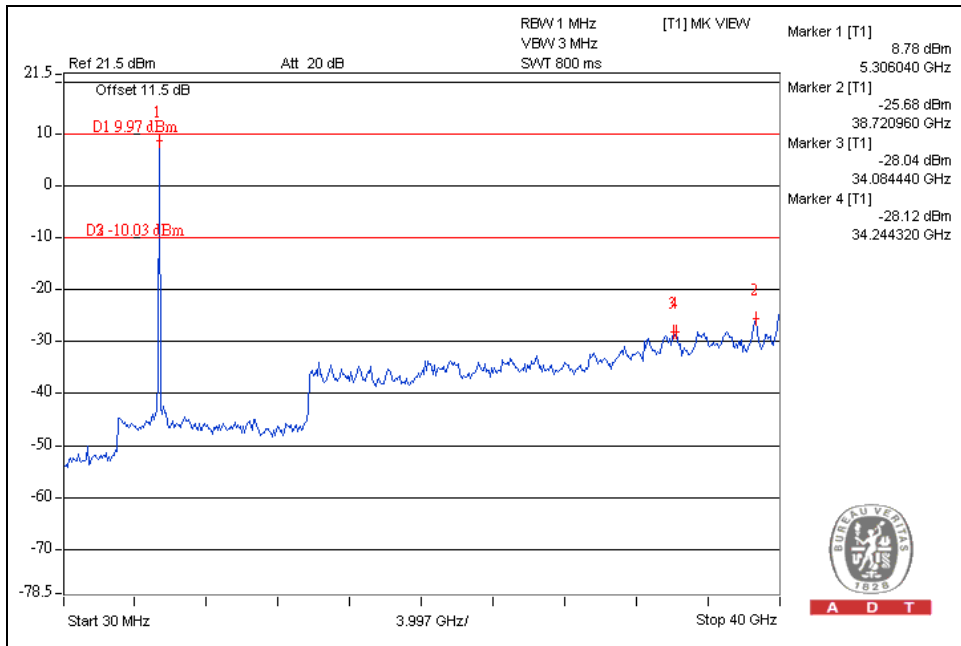

For 5.47 to 5.725GHz band:


The spectrum plots (Peak RBW=1MHz, VBW=3MHz) are attached on the following pages.




A D T

802.11a OFDM modulation

CH 100

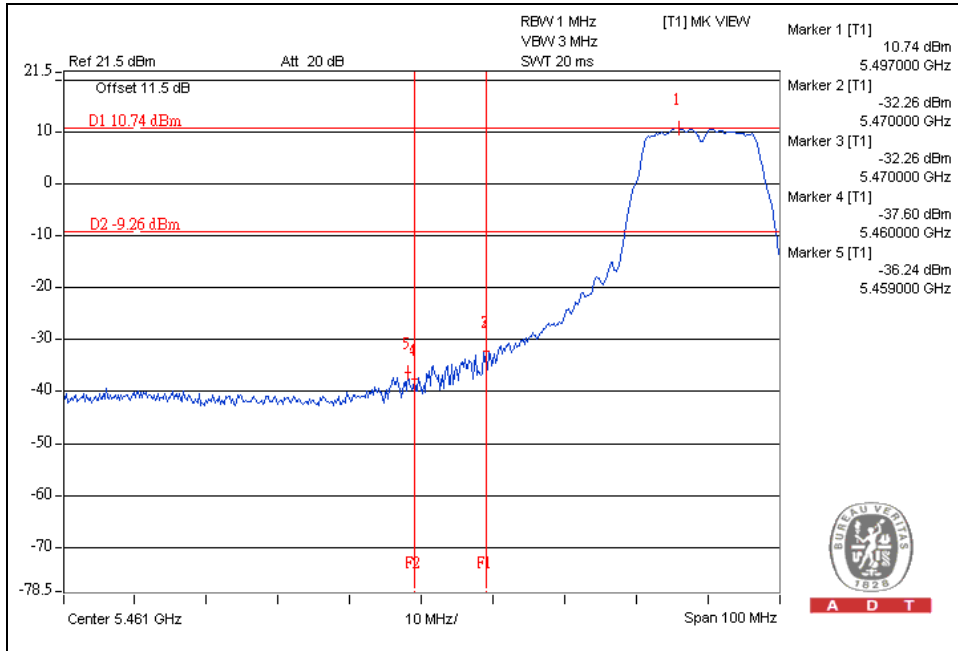


CH 140

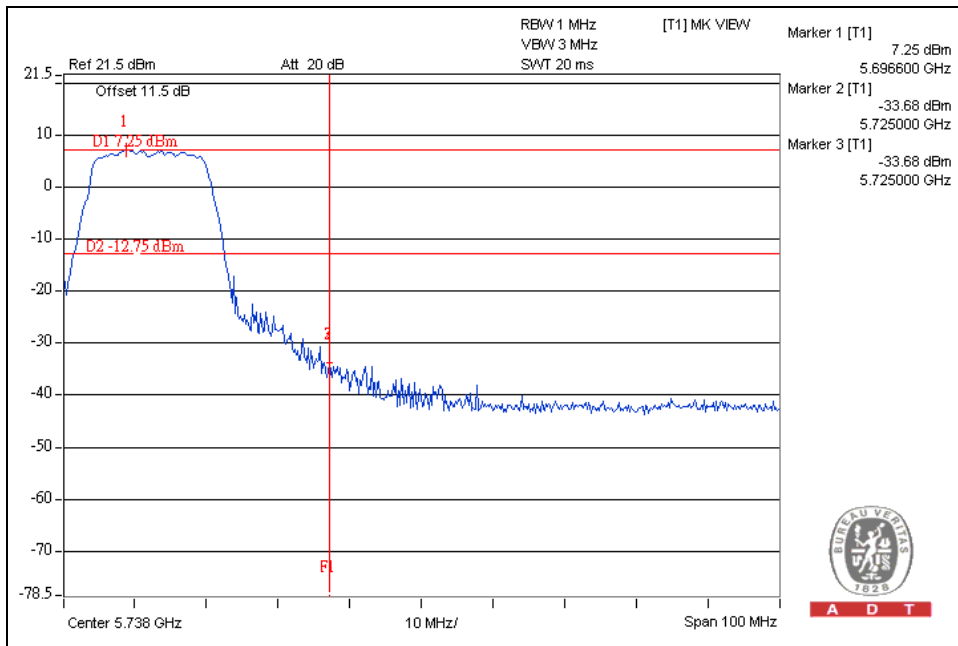




A D T

CH 100

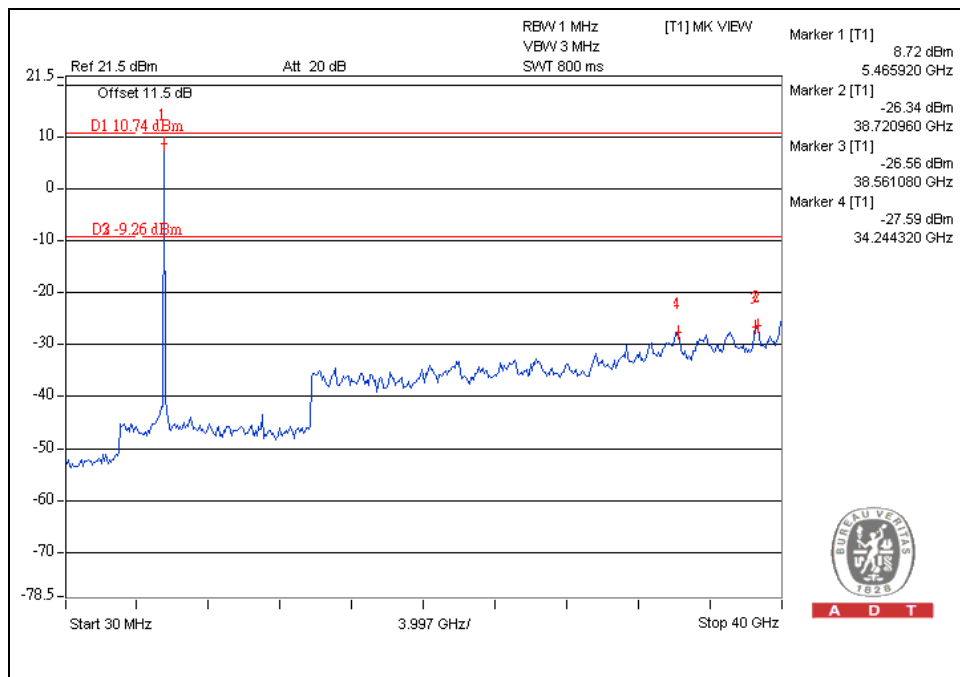

CH 140

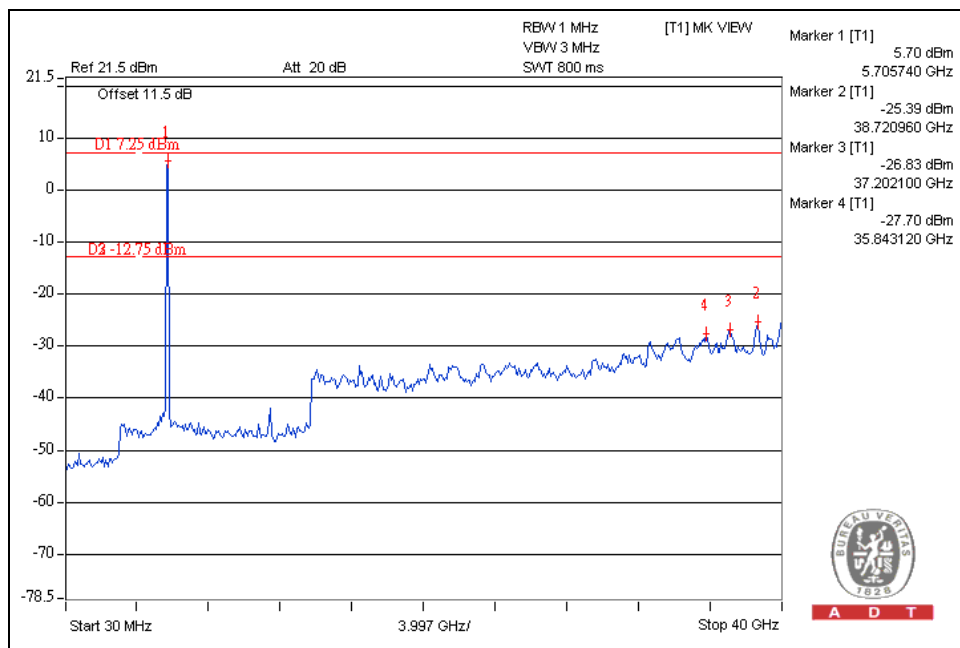



A D T

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.