





CSE Plot on Ch 78 between 30MHz ~ 3 GHz

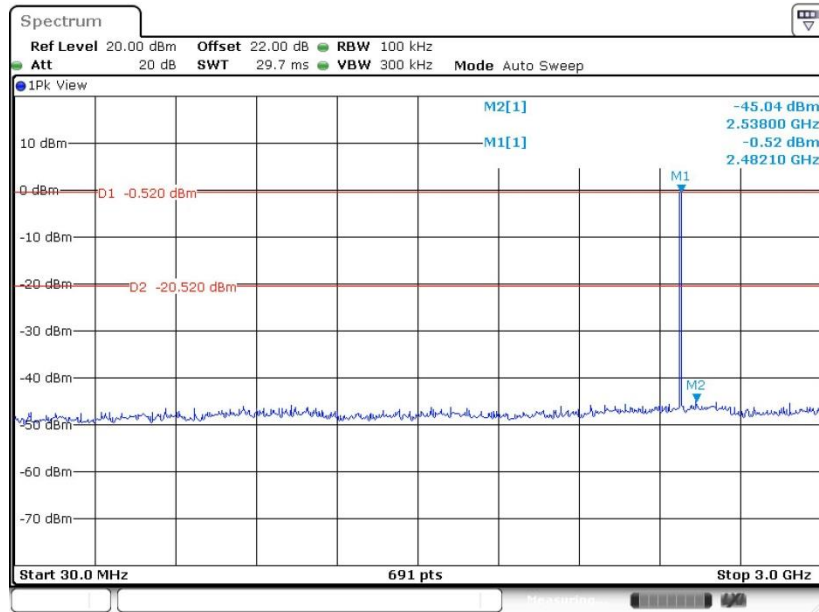

Date: 24.SEP.2019 23:39:09

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

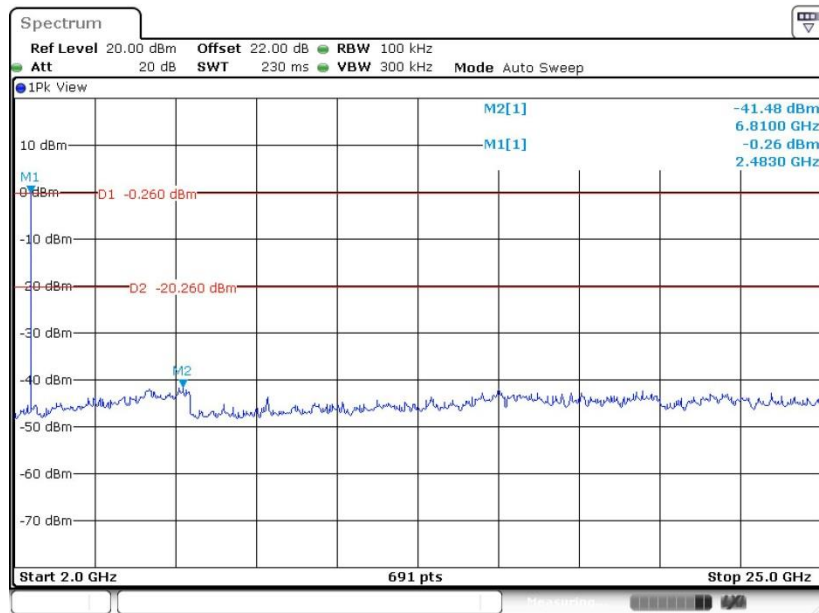

Date: 24.SEP.2019 23:39:38



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.


**3.8.3 Test Procedures**

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB for SKU 1 & SKU 2 ; -24.76dB for SKU 3) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

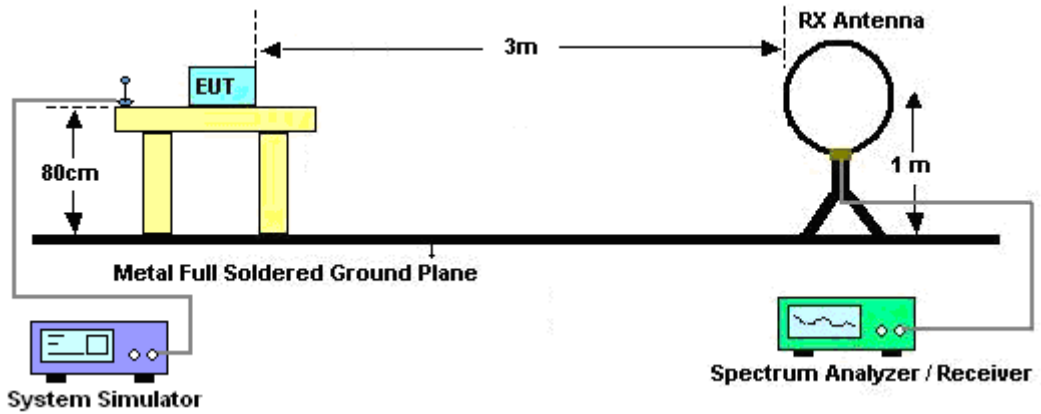

For radiated emissions from 30MHz to 1GHz

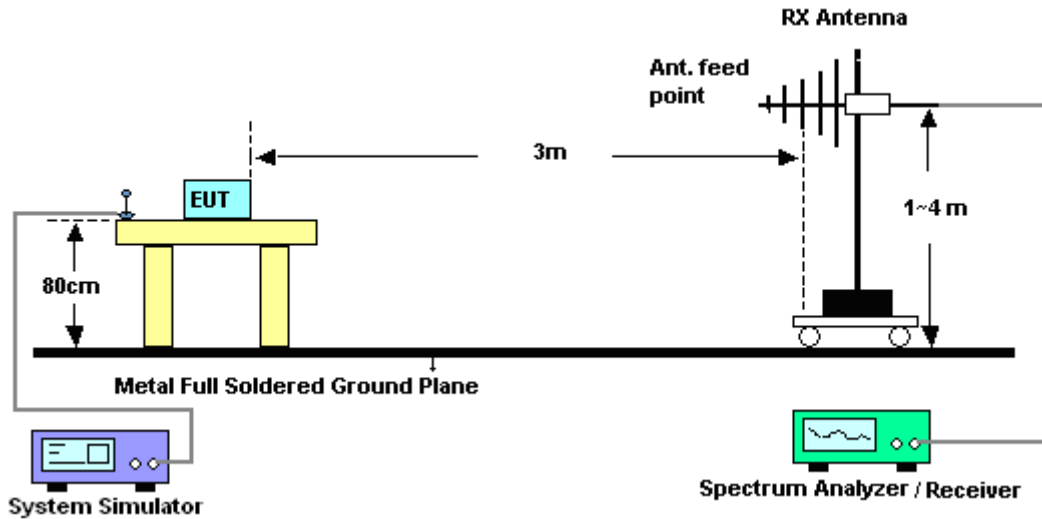

For radiated emissions above 1GHz

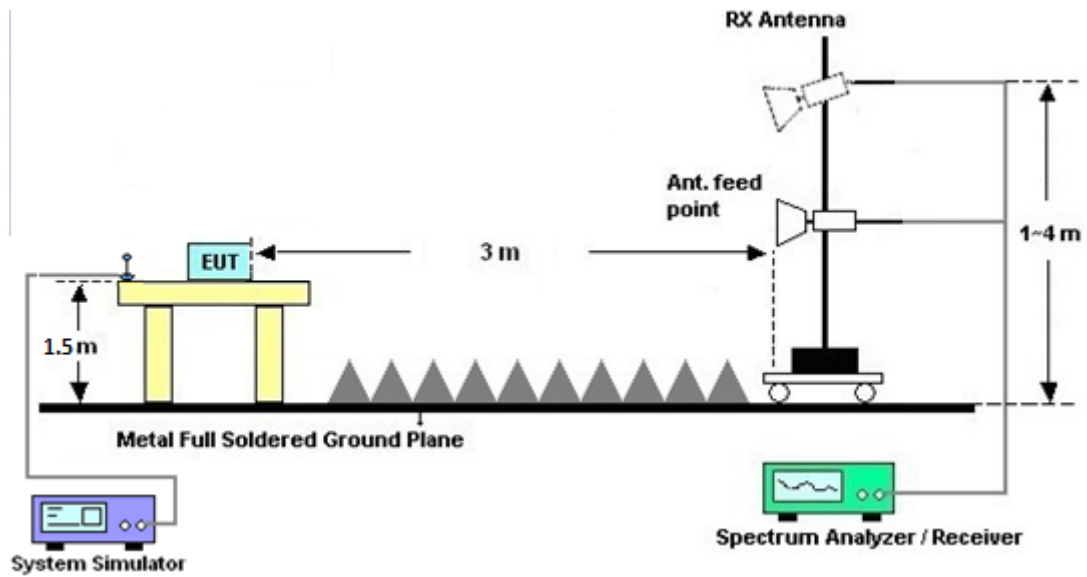

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

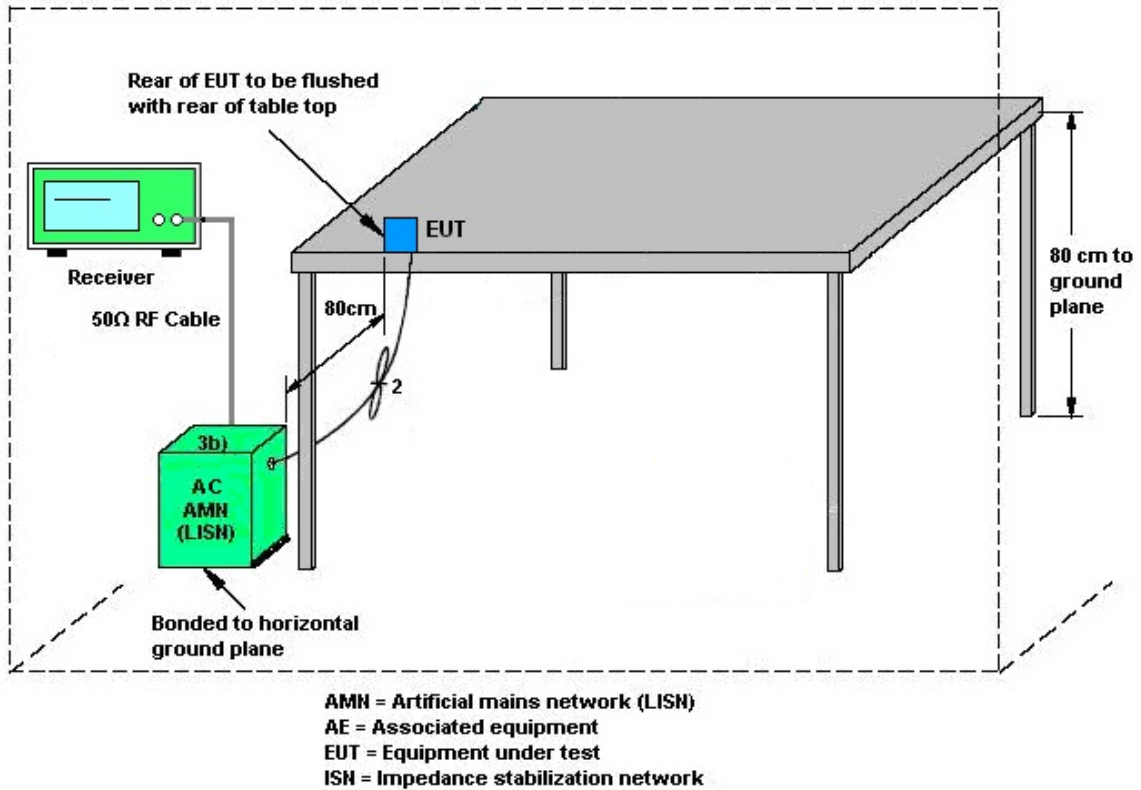

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 27, 2018	Sep. 18, 2019~ Sep. 24, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 27, 2018	Sep. 18, 2019~ Sep. 24, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 13, 2018	Sep. 18, 2019~ Sep. 24, 2019	Nov. 12, 2019	Conducted (TH05-HY)
BT Base Station(Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 26, 2018	Sep. 18, 2019~ Sep. 24, 2019	Sep. 25, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	EM	EMSW18	SW107090 3	N/A	Dec. 19, 2018	Sep. 18, 2019~ Sep. 24, 2019	Dec. 18, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 23, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 12, 2018	Sep. 23, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Sep. 23, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Sep. 23, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Sep. 23, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Sep. 23, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Sep. 23, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Sep. 24, 2019~ Oct. 01, 2019	Dec. 05, 2019	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 04, 2018	Sep. 24, 2019~ Oct. 01, 2019	Dec. 03, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 13, 2018	Sep. 24, 2019~ Oct. 01, 2019	Oct. 12, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 30, 2018	Sep. 24, 2019~ Oct. 01, 2019	Oct. 29, 2019	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 22, 2018	Sep. 24, 2019~ Oct. 01, 2019	Nov. 21, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 14, 2018	Sep. 24, 2019~ Oct. 01, 2019	Nov. 13, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2018	Sep. 24, 2019~ Oct. 01, 2019	Oct. 18, 2019	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Sep. 24, 2019~ Oct. 01, 2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Sep. 24, 2019~ Oct. 01, 2019	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 20, 2019	Sep. 24, 2019~ Oct. 01, 2019	May 19, 2020	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Dec. 05, 2018	Sep. 24, 2019~ Oct. 01, 2019	Dec. 04, 2019	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY541300 85	N/A	Nov. 01, 2018	Sep. 24, 2019~ Oct. 01, 2019	Oct. 31, 2019	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Sep. 24, 2019~ Oct. 01, 2019	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 13, 2019	Sep. 24, 2019~ Oct. 01, 2019	Mar. 12, 2020	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Sep. 24, 2019~ Oct. 01, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 13, 2019	Sep. 24, 2019~ Oct. 01, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	Sep. 24, 2019~ Oct. 01, 2019	Mar. 12, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WLJ4-1000-1 530-6000-40S T	SN3	1.53GHz Low Pass Filter	Mar. 23, 2019	Sep. 24, 2019~ Oct. 01, 2019	Mar. 22, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000 -60ST	SN1	1.2GHz High Pass Filter	Mar. 19, 2019	Sep. 24, 2019~ Oct. 01, 2019	Mar. 18, 2020	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
-------------------------------------------------------------------------	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
-------------------------------------------------------------------------	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
-------------------------------------------------------------------------	-----


Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
-------------------------------------------------------------------------	-----



Appendix A. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	25.9~26.2°C
		Relative Humidity :	41.8~42.7%
Test Voltage :	120Vac / 60Hz	Phase :	Line

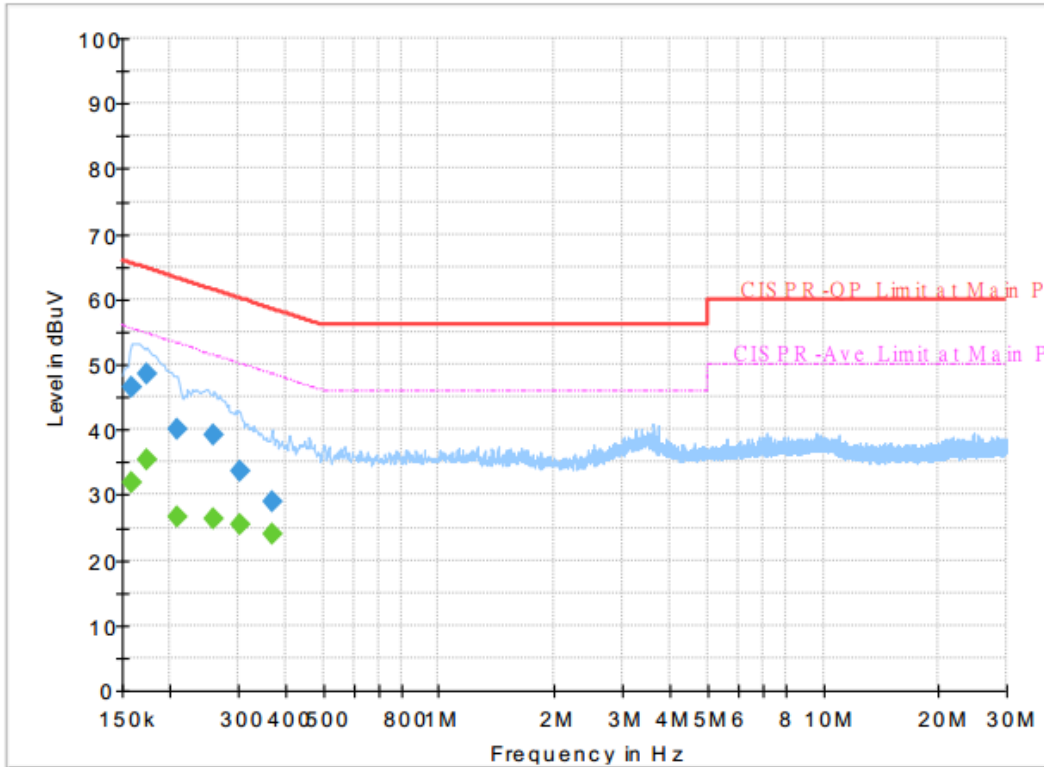


Final Result :

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	46.36	---	65.52	19.16	L1	OFF	19.4
0.159000	---	31.78	55.52	23.74	L1	OFF	19.4
0.174750	48.44	---	64.73	16.29	L1	OFF	19.4
0.174750	---	35.45	54.73	19.28	L1	OFF	19.4
0.208500	40.19	---	63.27	23.08	L1	OFF	19.4
0.208500	---	26.53	53.27	26.74	L1	OFF	19.4
0.260250	39.07	---	61.42	22.35	L1	OFF	19.4
0.260250	---	26.31	51.42	25.11	L1	OFF	19.4
0.305250	33.66	---	60.10	26.44	L1	OFF	19.4
0.305250	---	25.54	50.10	24.56	L1	OFF	19.4
0.368250	28.97	---	58.54	29.57	L1	OFF	19.4
0.368250	---	23.99	48.54	24.55	L1	OFF	19.4



Test Engineer :	Howard Huang	Temperature :	25.9~26.2°C
		Relative Humidity :	41.8~42.7%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

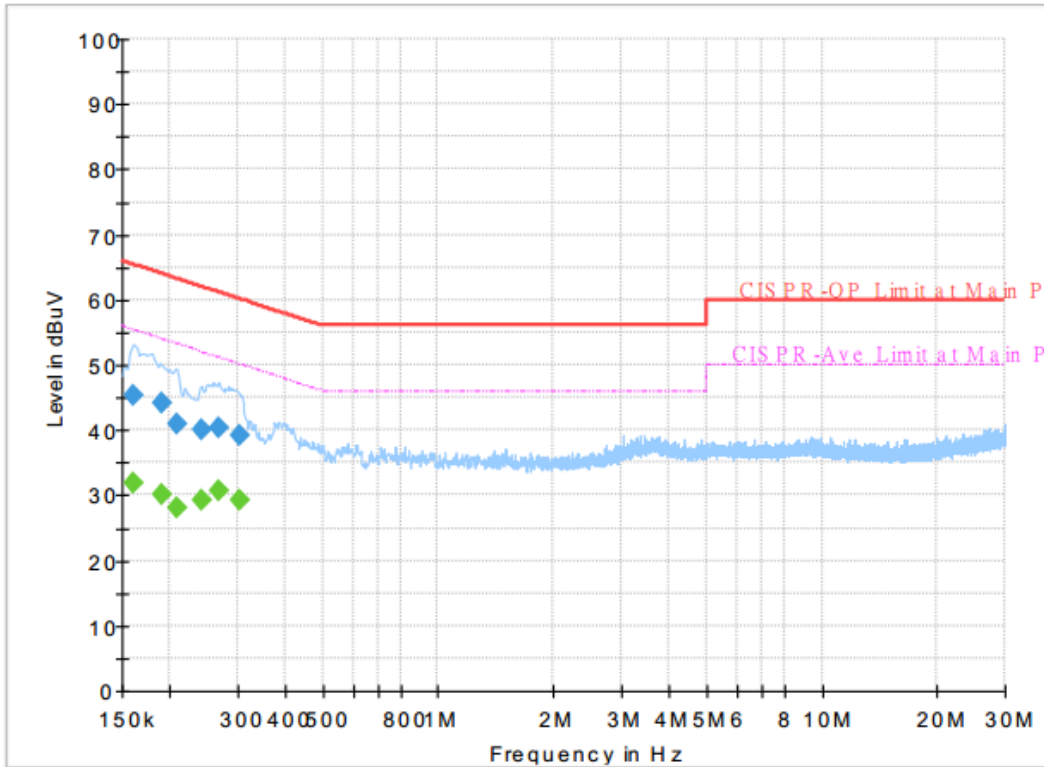

Final Result :

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	31.85	55.40	23.55	N	OFF	19.5
0.161250	45.29	---	65.40	20.11	N	OFF	19.5
0.190500	---	30.02	54.02	24.00	N	OFF	19.5
0.190500	44.18	---	64.02	19.84	N	OFF	19.5
0.208500	---	27.95	53.27	25.32	N	OFF	19.5
0.208500	40.81	---	63.27	22.46	N	OFF	19.5
0.242250	---	29.33	52.02	22.69	N	OFF	19.5
0.242250	39.95	---	62.02	22.07	N	OFF	19.5
0.269250	---	30.57	51.14	20.57	N	OFF	19.5
0.269250	40.23	---	61.14	20.91	N	OFF	19.5
0.303000	---	29.11	50.16	21.05	N	OFF	19.5
0.303000	39.08	---	60.16	21.08	N	OFF	19.5



Appendix B. Radiated Spurious Emission

Test Engineer :	Fu Chen, Troye Hsieh	Temperature :	21.8 ~ 25.7°C
		Relative Humidity :	53.7 ~ 64.2%

<SKU1>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH00 2402MHz		2335.83	43.19	-30.81	74	42.53	27.66	6.65	33.65	261	38	P	H	
		2335.83	18.39	-35.60	54	-	-	-	-	-	-	A	H	
	*	2402	-	-	74	87.58	27.4	6.72	33.63	261	38	P	H	
	*	2402	-	-	54	-	-	-	-	-	-	A	H	
													H	
			2373.63	43.05	-30.95	74	42.49	27.51	6.69	33.64	198	297	P	V
			2373.63	18.25	-35.74	54	-	-	-	-	-	-	A	V
	*		2402	-	-	74	97.37	27.4	6.72	33.63	198	297	P	V
	*		2402	-	-	54	-	-	-	-	-	-	A	V
														V
BT CH 39 2441MHz		2367.26	43.88	-30.12	74	43.31	27.53	6.68	33.64	256	23	P	H	
		2367.26	19.08	-34.91	54	-	-	-	-	-	-	A	H	
	*	2441	-	-	74	90.71	27.32	6.76	33.61	256	23	P	H	
	*	2441	-	-	54	-	-	-	-	-	-	A	H	
			2483.55	42.09	-31.91	74	41.58	27.3	6.81	33.6	256	23	P	H
			2483.55	17.29	-36.70	54	-	-	-	-	-	-	A	H
			2367.26	43.88	-30.12	74	43.31	27.53	6.68	33.64	256	23	P	V
			2367.26	19.08	-34.91	54	-	-	-	-	-	-	A	V
	*		2441	-	-	74	101.93	27.32	6.76	33.61	188	299	P	V
	*		2441	-	-	54	-	-	-	-	-	-	A	V
			2489.22	42.62	-31.38	74	42.1	27.3	6.81	33.59	188	299	P	V
			2489.22	17.82	-36.17	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	-	-	74	91.63	27.3	6.8	33.6	247	33	P	H
	*	2480	-	-	54	-	-	-	-	-	-	A	H
		2484.44	42.45	-31.55	74	41.94	27.3	6.81	33.6	247	33	P	H
		2484.44	17.65	-36.34	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	-	-	74	102.15	27.3	6.8	33.6	194	304	P	V
	*	2480	-	-	54	-	-	-	-	-	-	A	V
		2484.28	45.27	-28.73	74	44.76	27.3	6.81	33.6	194	304	P	V
		2484.28	20.47	-33.52	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	40.91	-33.09	74	59.73	31.1	10.56	60.92	100	0	P	H
													H
													H
													H
		4804	40.73	-33.27	74	59.55	31.1	10.56	60.92	100	0	P	V
													V
													V
BT CH 39 2441MHz		4882	41.27	-32.73	74	60.02	31.04	10.63	60.85	100	0	P	H
		7323	43.75	-30.25	74	54.47	36.55	13.24	60.92	100	0	P	H
													H
													H
		4882	40.25	-33.75	74	59	31.04	10.63	60.85	100	0	P	V
		7323	44.53	-29.47	74	55.25	36.55	13.24	60.92	100	0	P	V
													V
BT CH 78 2480MHz		4960	41.65	-32.35	74	59.99	31.32	10.7	60.77	100	0	P	H
		7440	45.28	-28.72	74	56.09	36.48	13.24	60.91	100	0	P	H
													H
													H
		4960	41.34	-32.66	74	59.68	31.32	10.7	60.77	100	0	P	V
		7440	44.27	-29.73	74	55.08	36.48	13.24	60.91	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BT LF		41.64	24.19	-15.81	40	37.46	18.23	0.85	32.37	-	-	P	H	
		46.49	21.59	-18.41	40	37.21	15.84	0.89	32.37	-	-	P	H	
		64.92	20.55	-19.45	40	40.2	11.6	1.06	32.36	-	-	P	H	
		926.28	32.47	-13.53	46	29.96	29.34	4.07	31.11	-	-	P	H	
		931.13	32.84	-13.16	46	30.09	29.52	4.08	31.06	-	-	P	H	
		947.62	33.93	-12.07	46	30.07	30.43	4.12	30.91	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			35.82	29.02	-10.98	40	39.22	21.35	0.81	32.37	-	-	P	V
			39.7	33.95	-6.05	40	46.27	19.2	0.83	32.37	100	0	P	V
			45.52	32.28	-7.72	40	47.42	16.32	0.89	32.37	-	-	P	V
			936.95	33.24	-12.76	46	30.15	29.8	4.09	31.01	-	-	P	V
			948.59	33.62	-12.38	46	29.69	30.49	4.12	30.9	-	-	P	V
			954.41	34.68	-11.32	46	30.41	30.77	4.13	30.85	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<SKU2>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH 78 2480MHz	*	2480	-	-	74	99.54	27.3	6.8	33.6	170	0	P	H	
	*	2480	-	-	54	-	-	-	-	-	-	A	H	
		2483.68	46.49	-27.51	74	45.98	27.3	6.81	33.6	170	0	P	H	
		2483.68	21.7	-32.3	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	-	-	74	95.9	27.3	6.8	33.6	100	93	P	V	
	*	2480	-	-	54	-	-	-	-	-	-	-	A	V
		2483.56	44.02	-29.98	74	43.51	27.3	6.81	33.6	100	93	P	V	
		2483.56	19.23	-34.77	54	-	-	-	-	-	-	-	A	V
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)**

BT	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 78 2480MHz		4960	42.02	-31.98	74	60.77	31.32	10.7	60.77	100	0	P	H
		7440	45.86	-28.14	74	57.05	36.48	13.24	60.91	100	0	P	H
													H
													H
		4960	41.6	-32.4	74	60.35	31.32	10.7	60.77	100	0	P	V
		7440	44.59	-29.41	74	55.78	36.48	13.24	60.91	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BT LF		40.67	23.7	-16.3	40	36.51	18.7	0.84	32.37	-	-	P	H	
		45.52	21.79	-18.21	40	36.93	16.32	0.89	32.37	-	-	P	H	
		63.95	21.19	-18.81	40	40.84	11.61	1.05	32.36	-	-	P	H	
		898.15	32.64	-13.36	46	30.79	29	4.02	31.36	-	-	P	H	
		920.46	33.12	-12.88	46	30.88	29.14	4.06	31.16	-	-	P	H	
		947.62	34.16	-11.84	46	30.3	30.43	4.12	30.91	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			30.97	25.65	-14.35	40	33.66	23.58	0.77	32.37	-	-	P	V
			40.67	33.43	-6.57	40	46.24	18.7	0.84	32.37	100	0	P	V
			46.49	31.24	-8.76	40	46.86	15.84	0.89	32.37	-	-	P	V
			935.98	32.42	-13.58	46	29.38	29.76	4.09	31.02	-	-	P	V
			943.74	33.79	-12.21	46	30.22	30.19	4.11	30.95	-	-	P	V
			953.44	34.05	-11.95	46	29.84	30.72	4.13	30.86	-	-	P	V
													V	
												V		
												V		
												V		
												V		
												V		
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<SKU3>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH 78 2480MHz	*	2480	-	-	74	97.39	27.3	6.8	33.6	147	4	P	H	
	*	2480	-	-	54	-	-	-	-	-	-	A	H	
		2483.64	46.53	-27.47	74	46.02	27.3	6.81	33.6	147	4	P	H	
		2483.64	21.77	-32.23	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	-	-	74	96.19	27.3	6.8	33.6	103	91	P	V	
	*	2480	-	-	54	-	-	-	-	-	-	-	A	V
		2483.84	44.72	-29.28	74	44.21	27.3	6.81	33.6	103	91	P	V	
		2483.84	19.96	-34.04	54	-	-	-	-	-	-	-	A	V
													V	
													V	

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.
---------------	---------------------------------------------------------------------------------------------



**2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)**

BT	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 78 2480MHz		4960	42.1	-31.9	74	60.85	31.32	10.7	60.77	100	0	P	H	
		7440	45.63	-28.37	74	56.82	36.48	13.24	60.91	100	0	P	H	
													H	
													H	
			4960	41.69	-32.31	74	60.44	31.32	10.7	60.77	100	0	P	V
			7440	44.82	-29.18	74	56.01	36.48	13.24	60.91	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BT LF		39.7	23.11	-16.89	40	35.43	19.2	0.85	32.37	-	-	P	H	
		45.52	21.25	-18.75	40	36.39	16.32	0.91	32.37	-	-	P	H	
		64.92	18.38	-21.62	40	38.03	11.6	1.11	32.36	-	-	P	H	
		915.61	32.71	-13.29	46	30.59	29.08	4.25	31.21	-	-	P	H	
		942.77	33.33	-12.67	46	29.84	30.12	4.33	30.96	-	-	P	H	
		952.47	33.92	-12.08	46	29.76	30.68	4.35	30.87	100	0	P	H	
														H
														H
														H
														H
														H
														H
			40.67	33.89	-6.11	40	46.7	18.7	0.86	32.37	100	0	P	V
			44.55	29.87	-10.13	40	44.54	16.8	0.9	32.37	-	-	P	V
			71.71	27.57	-12.43	40	46.56	12.19	1.17	32.35	-	-	P	V
			936.95	32.86	-13.14	46	29.77	29.8	4.3	31.01	-	-	P	V
			940.83	33	-13	46	29.66	30	4.31	30.97	-	-	P	V
			950.53	34.75	-11.25	46	30.7	30.6	4.34	30.89	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Fu Chen, Troye Hsieh	Temperature :	21.8 ~ 25.7°C
		Relative Humidity :	53.7 ~ 64.2%

<SKU1>

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>






BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH11-11Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	<p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>

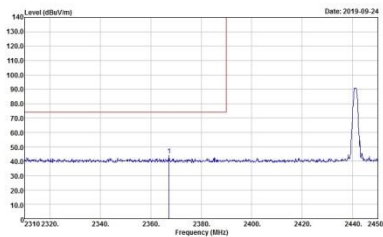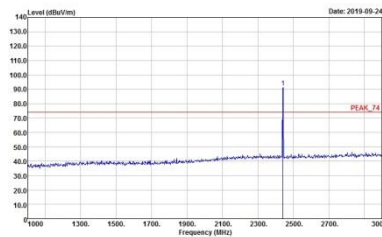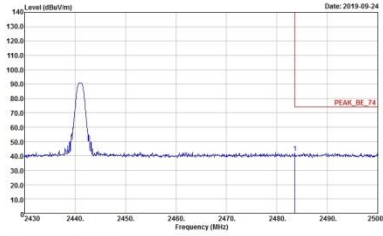

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2019-09-24</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	 <p>Date: 2019-09-24</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>
Peak	 <p>Date: 2019-09-24</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	Left blank

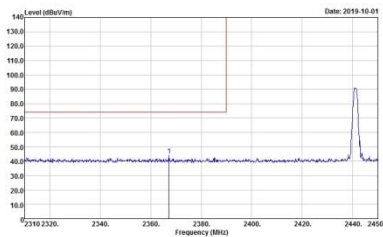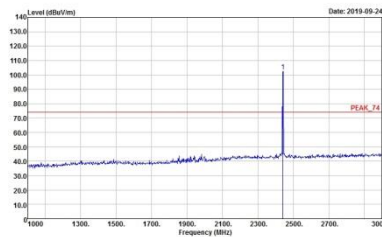
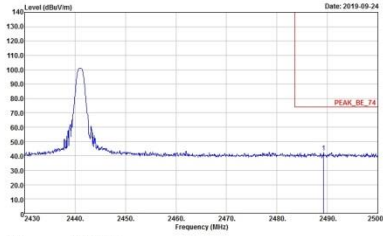


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Vertical	Fundamental
Peak	 <p>Date: 2019-10-01</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	 <p>Date: 2019-09-24</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>
Peak	 <p>Date: 2019-09-24</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-11Y Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	<p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>

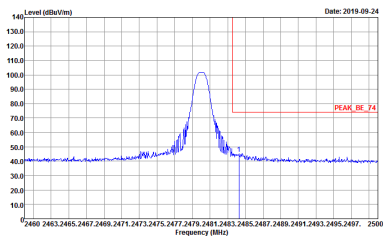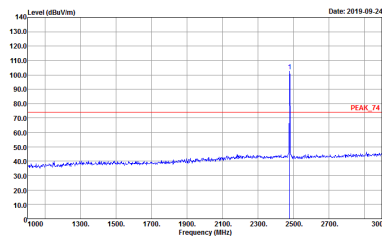

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-11Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>





2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 981238</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 981238</p>

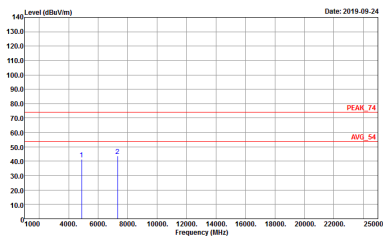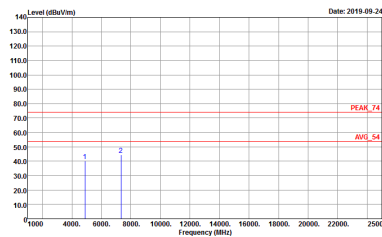

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH39 2441MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 981238</p>	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 981238</p>

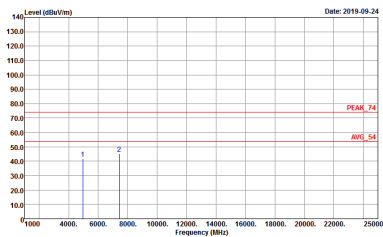
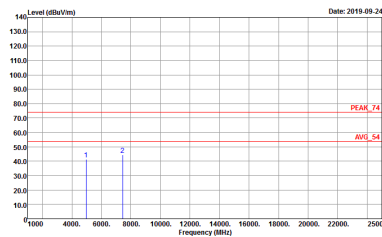


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH78 2480MHz		
Horizontal		Vertical
Peak Avg.	 <p data-bbox="430 728 686 784">Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 981238</p>	 <p data-bbox="901 728 1157 784">Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 981238</p>



Emission below 1GHz

2.4GHz BT (LF)

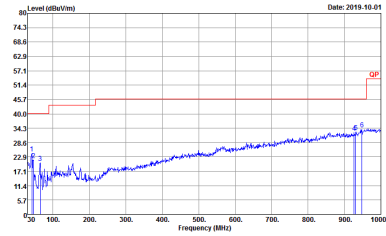
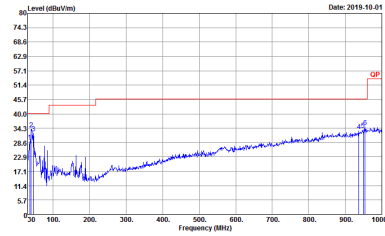
BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CHI-HY Condition : QP 3m 8E-LOG-6111D-LF_ETC HORIZONTAL Detector : Peak Project : 981238</p>	 <p>Site : 03CHI-HY Condition : QP 3m 8E-LOG-6111D-LF_ETC VERTICAL Detector : Peak Project : 981238</p>



<SKU2>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

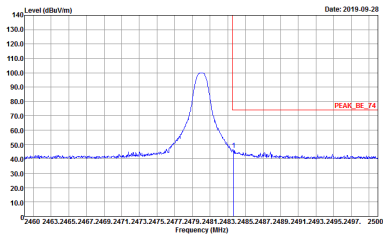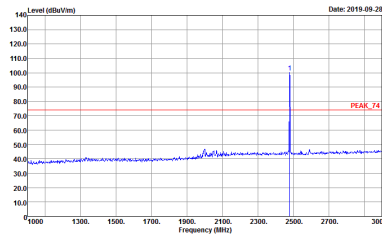BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH11-11Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	<p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>



2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

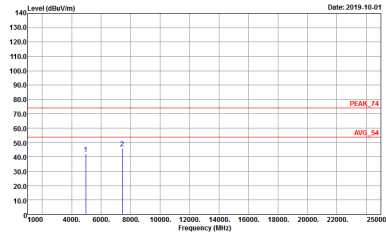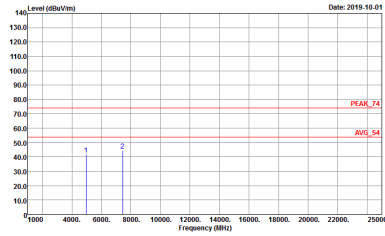BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH78 2480MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 981238</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 981238</p>



Emission below 1GHz

2.4GHz BT (LF)

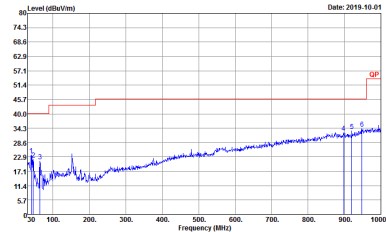
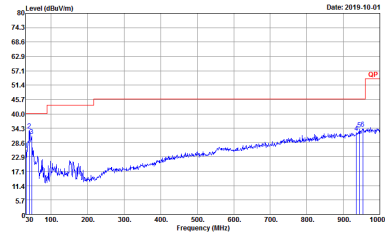
BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m 8E-LOG-6111D-LF_ETC HORIZONTAL Detector : Peak Project : 981238</p>	 <p>Site : 03CH11-HY Condition : QP 3m 8E-LOG-6111D-LF_ETC VERTICAL Detector : Peak Project : 981238</p>





<SKU3>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

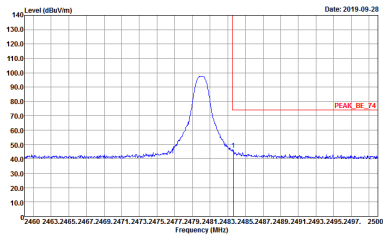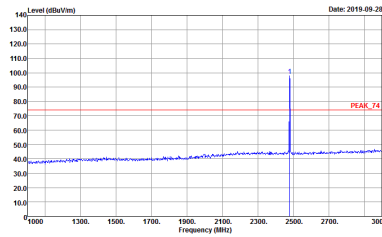BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Date: 2019-09-28</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	 <p>Date: 2019-09-28</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>

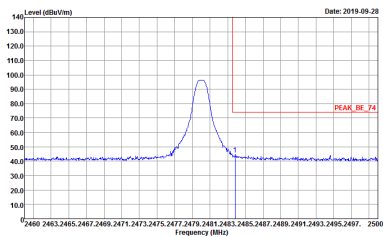
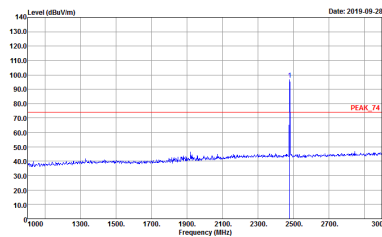


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-11Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 981238</p>



2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

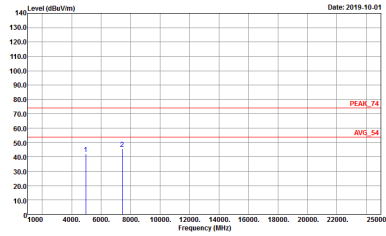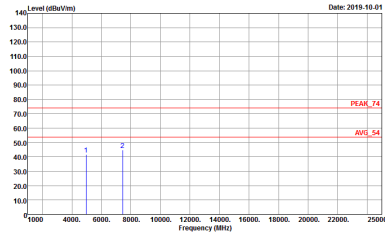BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH78 2480MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 981238</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 981238</p>



Emission below 1GHz


2.4GHz BT (LF)

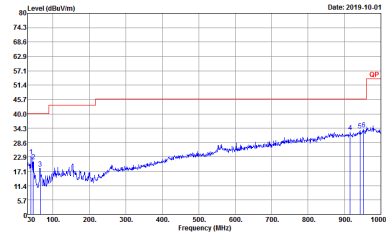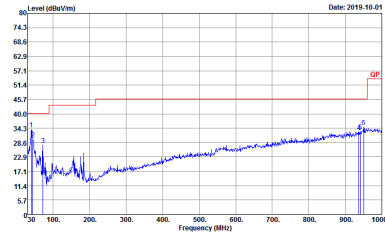BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CHI-HY Condition : QP 3m 8E-LOG-6111D-LF_ETC HORIZONTAL Detector : Peak Project : 981238</p>	 <p>Site : 03CHI-HY Condition : QP 3m 8E-LOG-6111D-LF_ETC VERTICAL Detector : Peak Project : 981238</p>


Appendix D. Duty Cycle Plots

<SKU1>

DH5 on time (One Pulse) Plot on Channel 39

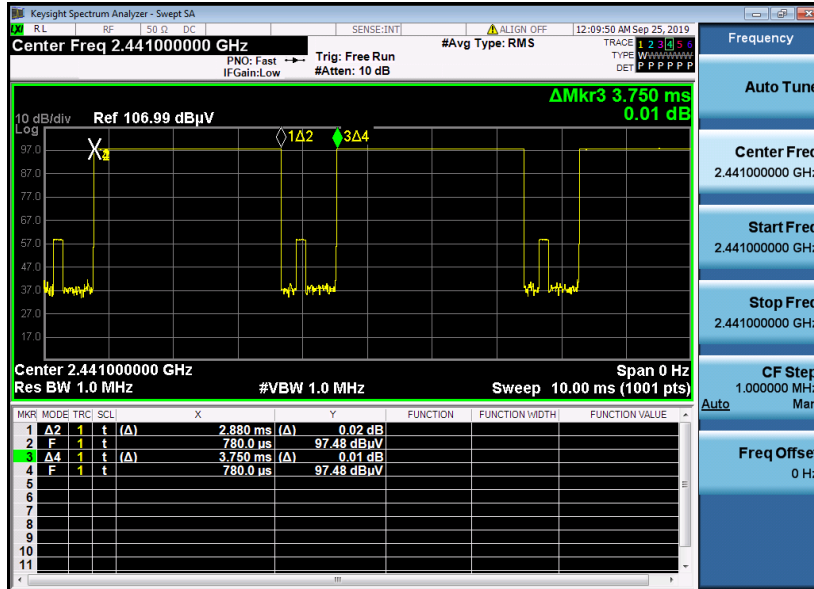

on time (Count Pulses) Plot on Channel 39

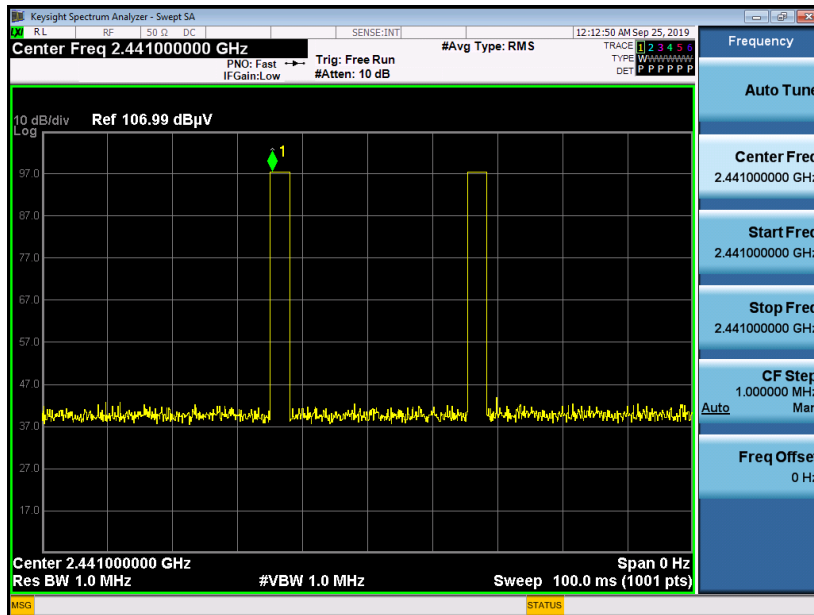


Note:


1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.

<SKU2>

DH5 on time (One Pulse) Plot on Channel 39

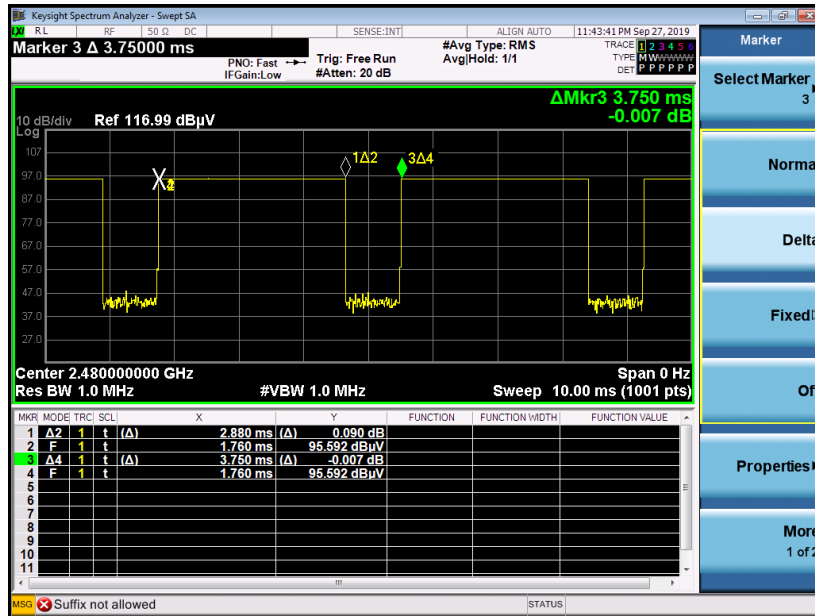

on time (Count Pulses) Plot on Channel 39

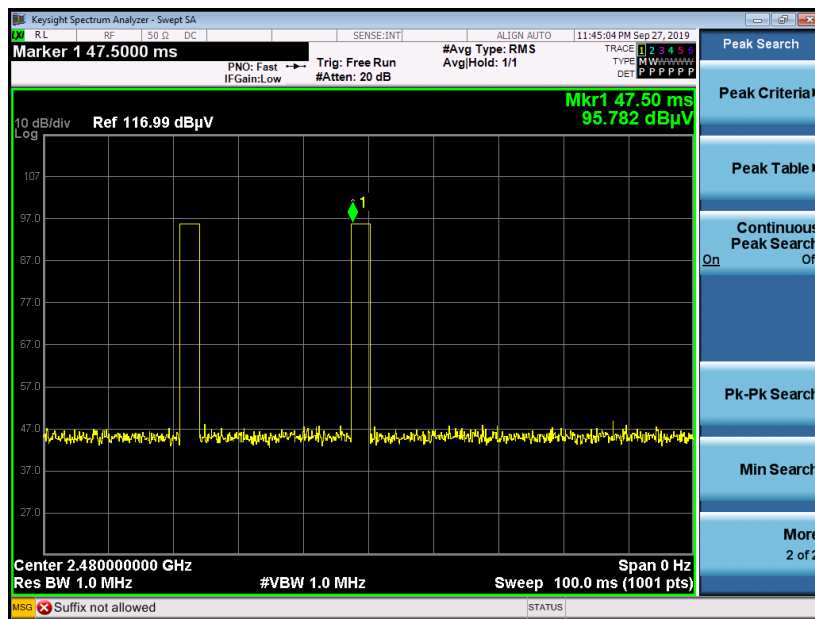


Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.




<SKU3>

DH5 on time (One Pulse) Plot on Channel 39

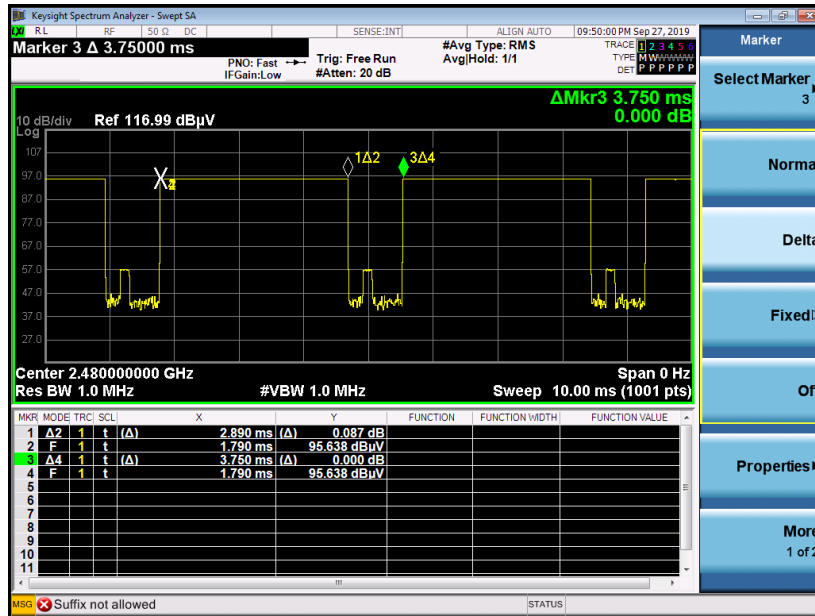

on time (Count Pulses) Plot on Channel 39

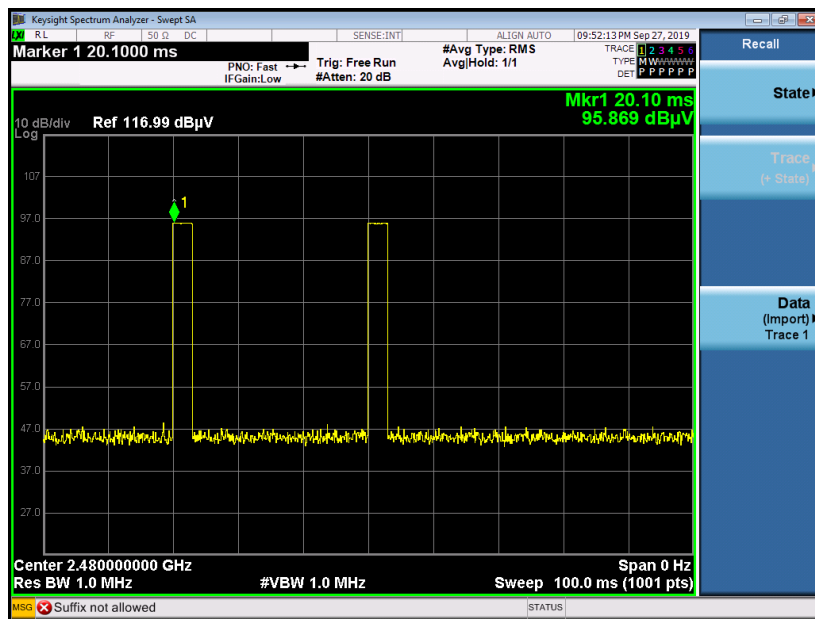

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.89 / 100 = 5.78 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.76 dB
3. DH5 has the highest duty cycle worst case and is reported.



Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2$ hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$