



# FCC RADIO TEST REPORT

**FCC ID** : UZ7MC3401  
**Equipment** : Mobile Computer  
**Brand Name** : ZEBRA  
**Model Name** : MC3401  
**Applicant** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Manufacturer** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Apr. 08, 2024 and testing was performed from May 07, 2024 to Jun. 20, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	7
1.3 Modification of EUT .....	9
1.4 Testing Location .....	10
1.5 Applicable Standards.....	10
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>11</b>
2.1 Carrier Frequency and Channel .....	11
2.2 Test Mode.....	12
2.3 Connection Diagram of Test System.....	14
2.4 Support Unit used in test configuration and system .....	15
2.5 EUT Operation Test Setup .....	15
2.6 Measurement Results Explanation Example.....	15
<b>3 Test Result .....</b>	<b>16</b>
3.1 6dB and 99% Bandwidth Measurement .....	16
3.2 Output Power Measurement.....	17
3.3 Power Spectral Density Measurement .....	18
3.4 Conducted Band Edges and Spurious Emission Measurement .....	20
3.5 Radiated Band Edges and Spurious Emission Measurement .....	21
3.6 AC Conducted Emission Measurement.....	25
3.7 Antenna Requirements .....	27
<b>4 List of Measuring Equipment.....</b>	<b>28</b>
<b>5 Measurement Uncertainty .....</b>	<b>30</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR443061C	01	Initial issue of report	Jul. 01, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	1.27 dB under the limit at 2483.52 MHz
3.6	15.207	AC Conducted Emission	Pass	16.13 dB under the limit at 0.30 MHz
3.7	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Keven Cheng**

**Report Producer: Clio Lo**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Computer
Brand Name	ZEBRA
Model Name	MC3401
FCC ID	UZ7MC3401
Sample 1	SKU 13 (Brick+SE5800+38 Keypad)
Sample 2	SKU 9 (Gun+SE5500+47 Keypad)
Sample 3	SKU 8 (Brick+SE4770+38 Keypad)
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
HW Version	EV
MFD	23MAR24
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

SKU List									
Configuration	SKU 5	SKU 6	SKU 7	SKU 8	SKU 9	SKU 10	SKU 11	SKU 12	SKU 13
WW/WL	WLAN	WLAN	WLAN	WLAN	WLAN	WLAN	WLAN	WLAN	WLAN
Form Factor	FA	FA	FA	FA	FA	FA	FA	FA	FA
SKU	Prem	Prem	Prem	Prem	Prem+	Prem+	Prem+	Prem+	Prem+
Brick / Gun	Gun	Gun	Gun	Brick	Gun	Gun	Gun	Brick	Brick
DDR size	6GB	6GB	6GB	6GB	6GB	6GB	6GB	6GB	6GB
UFS size	64GB	64GB	64GB	64GB	128GB	128GB	128GB	128GB	128GB
Scan engine	SE4770	SE5500	SE5800	SE4770	SE5500	SE5800	SE5800	SE5800	SE5800
FF Camera	None	None	None	None	5MP (PN)	5MP (PN)	5MP (PN)	5MP (PN)	5MP (PN)
RF Camera					13MP (PN)	13MP (PN)	13MP (PN)	13MP (PN)	13MP (PN)
Keypad	38	38	47	38	47	47	47	38	38
Battery	7000mAh	7000mAh	7000mAh	7000mAh	7000mAh	7000mAh + BLE	7000mAh	7000mAh	7000mAh
Region (ROW or NA)	RW	RW	NA	RW	RW	NA	RW	NA	RW



Specification of Accessories			
<b>Adapter USB Wall Charger</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> PWR-WUA5V12W0US
<b>Battery 1 Standard Battery (7000mAh)</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> BT-000375
			<b>Manufacturer</b> TWS
<b>Battery 2 Standard Battery (7000mAh)</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> BT-000375
			<b>Manufacturer</b> Inventus
<b>Battery 3 BLE Battery (7000mAh)</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> BT-000444
<b>Type C USB Cable</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> CBL-TC5X-USBC2A-01
<b>USB Cable Cup</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> CBL-MC33-USBCHG-01
<b>Soft Holster for Gun Type</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> SG-MC3021212-01R
<b>Soft Holster for Brick Type</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> SG-MC3X-SHLSTB-01
<b>USB-C PTT Headset</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> HDST-USBC-PTT1-01
<b>USB-C to 3.5mm adapter</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> ADP-USBC-35MM1-01
<b>3.5mm To Quick Disconnect (QD) Adapter Cable</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> ADP-35M-QDCBL1-01
<b>3.5mm PTT Headset</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> HDST-35MM-PTT1-01
<b>3.5mm PTT HS2100 Headset</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> HS2100
<b>Quick Disconnect (QD) Cable</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b> CBL-HS2100-QDC1-01



## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard											
<b>Tx/Rx Frequency Range</b>	2412 MHz ~ 2462 MHz										
<b>Maximum Output Power to Antenna</b>	<b>MIMO &lt;Ant. 6+7&gt;</b> 802.11b : 23.19 dBm / 0.2084 W 802.11g : 22.84 dBm / 0.1923 W 802.11n HT20 : 22.59 dBm / 0.1816 W 802.11ac VHT20 : 22.69 dBm / 0.1858 W 802.11ax HE20 : 22.94 dBm / 0.1968 W										
<b>99% Occupied Bandwidth</b>	<b>MIMO &lt;Ant. 6&gt;</b> 802.11b: 13.89 MHz 802.11g: 16.83 MHz 802.11ac VHT20: 20.58 MHz 802.11ax HE20: 19.08 MHz <b>MIMO &lt;Ant. 7&gt;</b> 802.11b: 13.64 MHz 802.11g: 16.83 MHz 802.11ac VHT20: 19.03 MHz 802.11ax HE20: 19.13 MHz										
<b>Antenna Type / Gain</b>	<b>&lt;Ant. 6&gt;</b> : PIFA Antenna with gain 2.00 dBi <b>&lt;Ant. 7&gt;</b> : PIFA Antenna with gain 1.69 dBi										
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)										
<b>Antenna Function Description</b>	<table border="1"> <thead> <tr> <th></th> <th>Ant. 6</th> <th>Ant. 7</th> </tr> </thead> <tbody> <tr> <td>802.11 b/g/n/ac/ax MIMO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11ax TXBF</td> <td>V</td> <td>V</td> </tr> </tbody> </table>			Ant. 6	Ant. 7	802.11 b/g/n/ac/ax MIMO	V	V	802.11ax TXBF	V	V
	Ant. 6	Ant. 7									
802.11 b/g/n/ac/ax MIMO	V	V									
802.11ax TXBF	V	V									

**Remark:**

1. MIMO Ant. 6+7 Directional Gain is a calculated result from MIMO Ant. 6 and MIMO Ant. 7. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 6 + Ant. 7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.
3. 802.11ax Support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is less than CDD mode 3dbm, so CDD mode cover Tx Beamforming mode.
4. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

### 1.2.1 Antenna Directional Gain

**<For CDD Mode>**

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

$G_{ANT}$  is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k/20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

As minimum  $N_{SS}=1$  is supported by EUT, the formula can be simplified as:

$$Directional\ gain = 10 \cdot \log \left[ \frac{(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2}{N_{ANT}} \right] \text{ dBi}$$

Where  $G_1, G_2, \dots, G_N$  denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 6	Ant 7	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
<b>2.4GHz</b>	2.00	1.69	2.00	4.86	0.00	0.00

Calculation example:

If a device has two antenna,  $G_{ANT1}= 2.00\text{dBi}$ ;  $G_{ANT2}=1.69\text{dBi}$

Directional gain of power measurement =  $\max(2.00, 1.69) + 0 = 2.00 \text{ dBi}$

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[ 10^{(2.00 \text{ dBi} / 20)} + 10^{(1.69 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

= 4.86 dBi

Power and PSD limit reduction = Composite gain – 6dBi, ( min = 0 )



**<TXBF Modes>**

The EUT supports beamforming modes , then

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)e)ii)

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

The directional gain “DG” is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 6	Ant 7	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
<b>2.4GHz</b>	2.00	1.69	4.86	4.86	0.00	0.00

Calculation example:

Directional gain is derived from formula which is

$$10 \times \log \left\{ \left[ 10^{(2.00 \text{ dBi} / 20)} + 10^{(1.69 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= 4.86 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, ( min = 0 )

### 1.3 Modification of EUT

No modifications made to the EUT during the testing.



### 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, CO07-HY, 03CH22-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

### 1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
  
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



## 2.2 Test Mode

This device support 26/52/106/242-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

### MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11ac VHT20	MCS0
802.11ax HE20	MCS0

**Remark:** The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : WLAN (2.4GHz) Link + Bluetooth Link + MPEG4 + USB Cable Cup (Charging from Adapter USB Wall Charger) + Battery 1 Standard Battery (7000mAh) for Sample 1
<b>Remark:</b> For Radiated Test Cases, the tests were performed with Battery 1 Standard Battery (7000mAh).	



<Sample 1>

Ch. #	2400-2483.5 MHz			
	802.11b	802.11g	802.11ac VHT20	802.11ax HE20
Low	01	01	01	01
Middle	06	06	06	06
High	11	11	11	11

<Sample 2>

Ch. #	2400-2483.5 MHz
	802.11b
Low	-
Middle	-
High	11


<Sample 3>

Ch. #	2400-2483.5 MHz
	802.11b
Low	-
Middle	-
High	11


**Remark:** For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

## 2.3 Connection Diagram of Test System

### <AC Conducted Emission Mode>

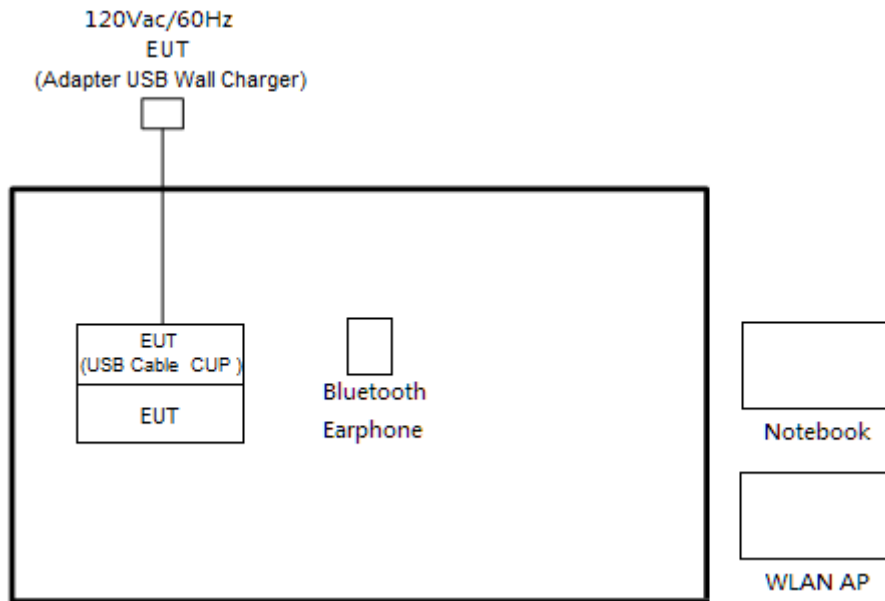

### <WLAN Tx Mode>

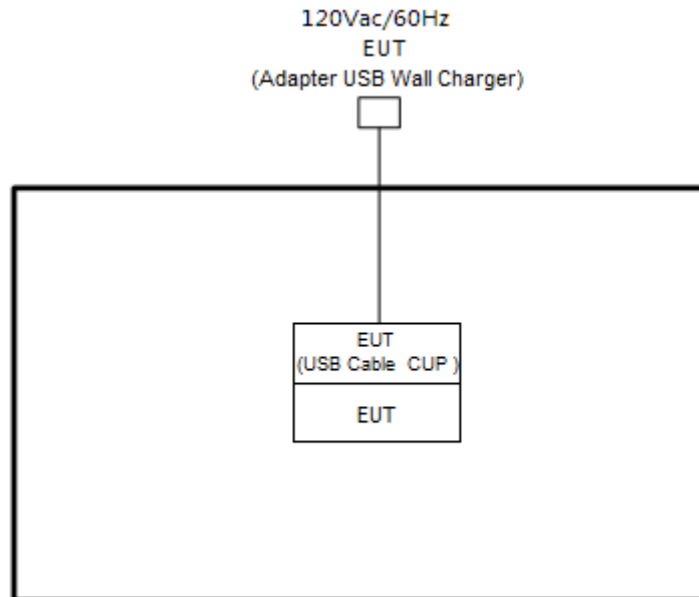



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
2.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.211.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

*= 4.2 + 10 = 14.2 (dB)*

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

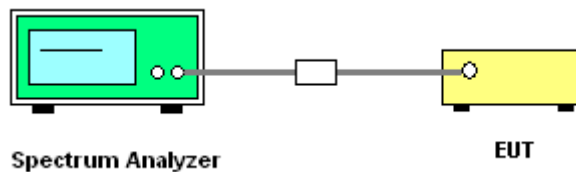

##### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.



## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

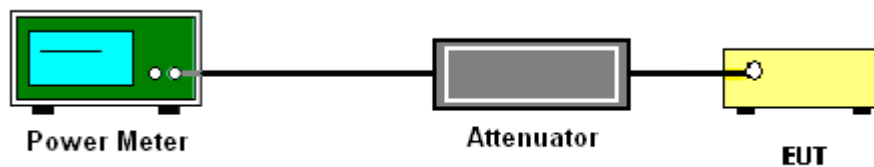

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{ANT})$  dB serves to apportion the emission limit among the  $N_{ANT}$  outputs so that each output is permitted to contribute no more than  $1/N_{ANT}^{th}$  of the PSD limit .

### 3.3.4 Test Setup

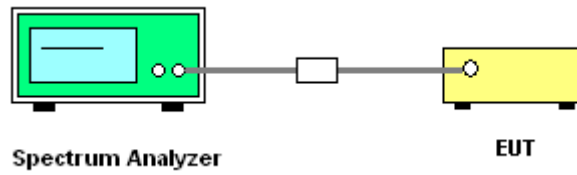

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

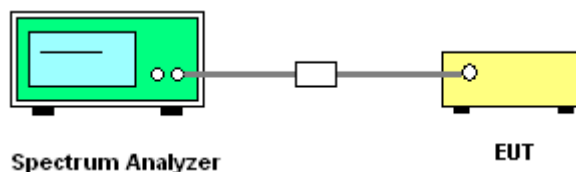

### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


#### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3 MHz for  $f \geq 1$  GHz for peak measurement.For average measurement:
  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

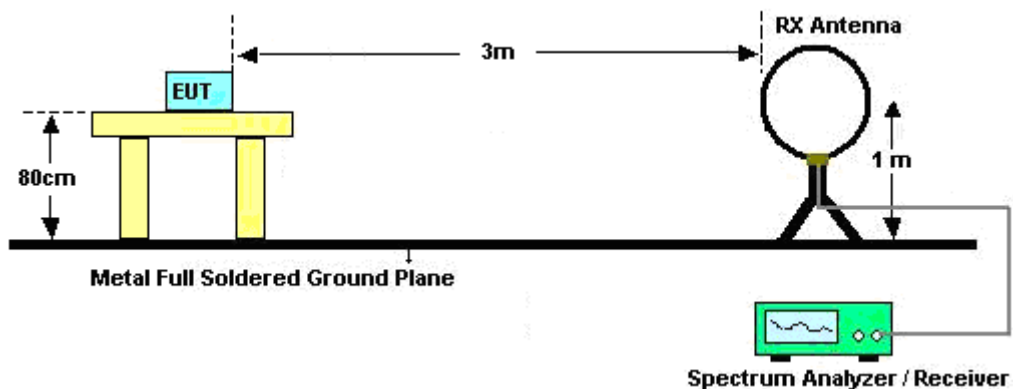


For radiated emissions from 30MHz to 1GHz

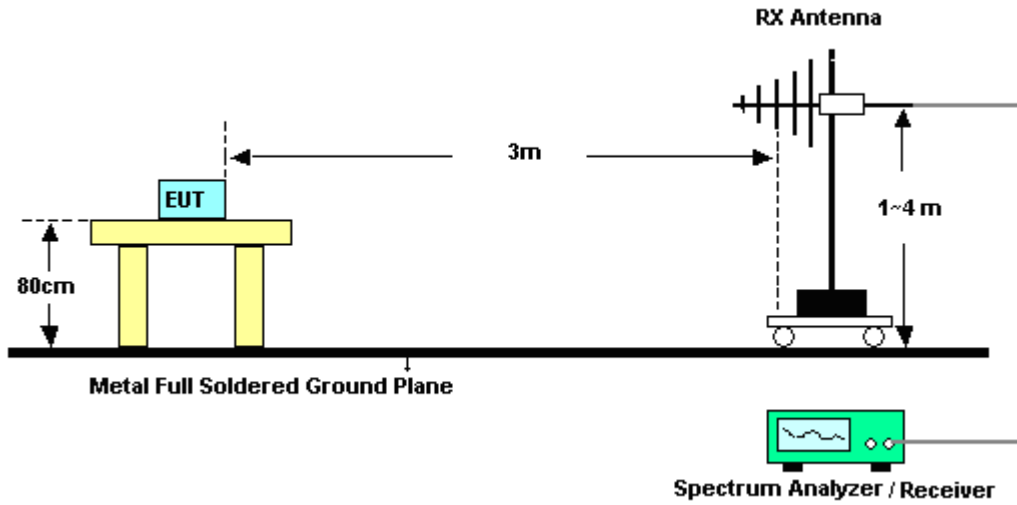

For radiated test from 1GHz to 18GHz

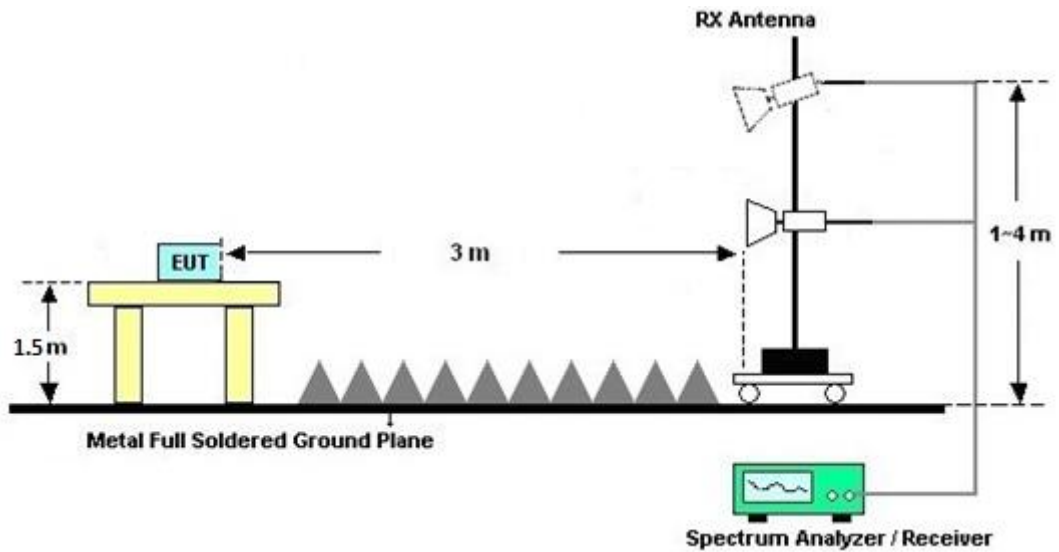

For radiated test above 18GHz

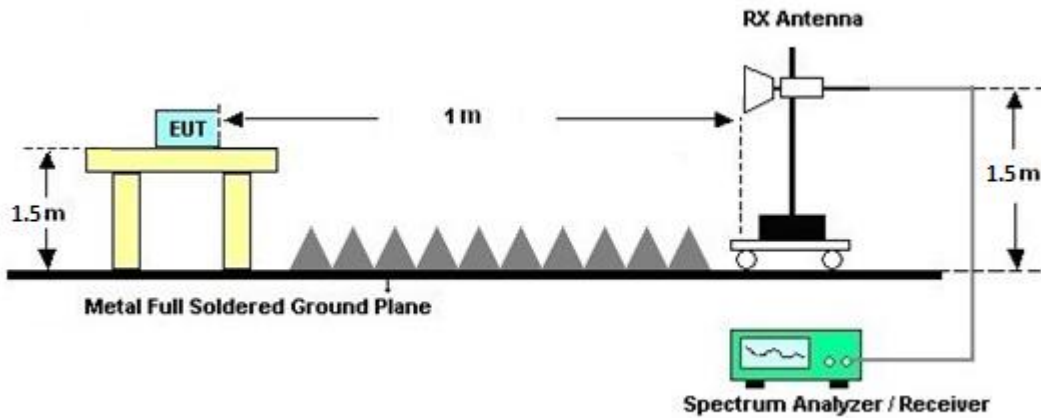

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.





### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup



### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Sep. 12, 2023	May 07, 2024~ Jun. 20, 2024	Sep. 11, 2024	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	May 07, 2024~ Jun. 20, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	May 07, 2024~ Jun. 20, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18E N	1GHz~18GHz	Jul. 12, 2023	May 07, 2024~ Jun. 20, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jul. 10, 2023	May 07, 2024~ Jun. 20, 2024	Jul. 09, 2024	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	May 07, 2024~ Jun. 20, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Sep. 06, 2023	May 07, 2024~ Jun. 20, 2024	Sep. 05, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Aug. 31, 2023	May 07, 2024~ Jun. 20, 2024	Aug. 30, 2024	Radiation (03CH22-HY)
EMI Test Receiver	Keysight	N9038B	MY62210111	20Hz~8.4GHz	Aug. 23, 2023	May 07, 2024~ Jun. 20, 2024	Aug. 22, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Jan. 03, 2024	May 07, 2024~ Jun. 20, 2024	Jan. 02, 2025	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 07, 2024~ Jun. 20, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 07, 2024~ Jun. 20, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 07, 2024~ Jun. 20, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019 122	RK-002347	N/A	N/A	May 07, 2024~ Jun. 20, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	May 07, 2024~ Jun. 20, 2024	Mar. 05, 2025	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,804 611/2,804615/ 2	N/A	Oct. 24, 2023	May 07, 2024~ Jun. 20, 2024	Oct. 23, 2024	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	May 08, 2024~ May 29, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Jan. 10, 2024	May 08, 2024~ May 29, 2024	Jan. 09, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	May 08, 2024~ May 29, 2024	Aug. 22, 2024	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	May 20, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 20, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Oct. 20, 2023	May 20, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	May 20, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	May 20, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	May 20, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	May 20, 2024	Sep. 19, 2024	Conduction (CO07-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.44 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.50 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50 dB
---	---------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.40 dB
---	---------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2024/5/8~2024/5/29	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant6	Ant7	Ant6	Ant7		
11b	1Mbps	2	1	2412	12.89	13.59	8.05	8.07	0.50	Pass
11b	1Mbps	2	6	2437	13.39	13.64	8.55	8.56	0.50	Pass
11b	1Mbps	2	11	2462	12.84	12.94	7.58	8.05	0.50	Pass
11g	6Mbps	2	1	2412	16.83	16.83	15.92	15.93	0.50	Pass
11g	6Mbps	2	6	2437	16.58	16.53	16.33	16.32	0.50	Pass
11g	6Mbps	2	11	2462	16.48	16.43	16.03	16.30	0.50	Pass
VHT20	MCS0	2	1	2412	18.53	18.18	17.70	17.71	0.50	Pass
VHT20	MCS0	2	6	2437	20.58	19.03	17.74	17.73	0.50	Pass
VHT20	MCS0	2	11	2462	18.08	18.08	17.71	17.74	0.50	Pass



**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant6	Ant7	SUM	Ant6	Ant7	Ant6	Ant7	Ant6	Ant7	Ant6	Ant7	
11b	1Mbps	2	1	2412	19.98	20.38	23.19	30.00		2.00		25.19		36.00	Pass	
11b	1Mbps	2	6	2437	19.38	19.78	22.59	30.00		2.00		24.59		36.00	Pass	
11b	1Mbps	2	11	2462	17.98	18.68	21.35	30.00		2.00		23.35		36.00	Pass	
11g	6Mbps	2	1	2412	19.88	19.78	22.84	30.00		2.00		24.84		36.00	Pass	
11g	6Mbps	2	6	2437	19.48	19.58	22.54	30.00		2.00		24.54		36.00	Pass	
11g	6Mbps	2	11	2462	17.78	17.78	20.79	30.00		2.00		22.79		36.00	Pass	
HT20	MCS0	2	1	2412	17.58	17.48	20.54	30.00		2.00		22.54		36.00	Pass	
HT20	MCS0	2	6	2437	19.58	19.58	22.59	30.00		2.00		24.59		36.00	Pass	
HT20	MCS0	2	11	2462	17.08	16.78	19.94	30.00		2.00		21.94		36.00	Pass	
VHT20	MCS0	2	1	2412	17.68	17.58	20.64	30.00		2.00		22.64		36.00	Pass	
VHT20	MCS0	2	6	2437	19.68	19.68	22.69	30.00		2.00		24.69		36.00	Pass	
VHT20	MCS0	2	11	2462	17.18	16.88	20.04	30.00		2.00		22.04		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant6	Ant7	Worse + 3.01	Ant6	Ant7	Ant6	Ant7	
11b	1Mbps	2	1	2412	-1.45	-1.11	1.90	4.86		8.00		Pass
11b	1Mbps	2	6	2437	-4.51	-4.12	-1.11	4.86		8.00		Pass
11b	1Mbps	2	11	2462	-4.90	-4.29	-1.28	4.86		8.00		Pass
11g	6Mbps	2	1	2412	-4.65	-4.53	-1.52	4.86		8.00		Pass
11g	6Mbps	2	6	2437	-3.98	-3.38	-0.37	4.86		8.00		Pass
11g	6Mbps	2	11	2462	-7.30	-6.62	-3.61	4.86		8.00		Pass
VHT20	MCS0	2	1	2412	-7.75	-6.92	-3.91	4.86		8.00		Pass
VHT20	MCS0	2	6	2437	-5.82	-5.26	-2.25	4.86		8.00		Pass
VHT20	MCS0	2	11	2462	-8.15	-8.43	-5.14	4.86		8.00		Pass

Measured power density (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant6	Ant7	Ant6	Ant7		
HE20	MCS0	2	1	2412	Full	18.88	18.93	17.82	18.53	0.50	Pass
HE20	MCS0	2	6	2437	Full	19.08	19.13	18.89	18.83	0.50	Pass
HE20	MCS0	2	11	2462	Full	18.93	18.88	18.49	18.41	0.50	Pass

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant6	Ant7	SUM	Ant6	Ant7	Ant6	Ant7	Ant6	Ant7	Ant6	Ant7	
HE20	MCS0	2	1	2412	Full	17.68	17.78	20.74	30.00		2.00		22.74		36.00		Pass
HE20	MCS0	2	1	2412	26/0	9.08	9.18	12.14	30.00		2.00		14.14		36.00		Pass
HE20	MCS0	2	1	2412	52/37	11.48	12.38	14.96	30.00		2.00		16.96		36.00		Pass
HE20	MCS0	2	1	2412	106/53	14.48	14.68	17.59	30.00		2.00		19.59		36.00		Pass
HE20	MCS0	2	6	2437	Full	19.88	19.98	22.94	30.00		2.00		24.94		36.00		Pass
HE20	MCS0	2	6	2437	26/4	10.78	11.28	14.05	30.00		2.00		16.05		36.00		Pass
HE20	MCS0	2	6	2437	52/38	13.78	14.48	17.15	30.00		2.00		19.15		36.00		Pass
HE20	MCS0	2	6	2437	106/53	16.18	16.38	19.29	30.00		2.00		21.29		36.00		Pass
HE20	MCS0	2	11	2462	Full	17.18	16.98	20.09	30.00		2.00		22.09		36.00		Pass
HE20	MCS0	2	11	2462	26/8	9.18	9.48	12.34	30.00		2.00		14.34		36.00		Pass
HE20	MCS0	2	11	2462	52/40	11.38	11.78	14.59	30.00		2.00		16.59		36.00		Pass
HE20	MCS0	2	11	2462	106/54	14.18	14.38	17.29	30.00		2.00		19.29		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band MIMO													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant6	Ant7	Worse + 3.01	Ant6	Ant7	Ant6	Ant7	
HE20	MCS0	2	1	2412	Full	-7.55	-7.64	-4.54	4.86		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-8.72	-7.88	-4.87	4.86		8.00		Pass
HE20	MCS0	2	1	2412	52/37	-8.62	-7.73	-4.72	4.86		8.00		Pass
HE20	MCS0	2	1	2412	106/53	-8.60	-7.89	-4.88	4.86		8.00		Pass
HE20	MCS0	2	6	2437	Full	-5.89	-6.01	-2.88	4.86		8.00		Pass
HE20	MCS0	2	6	2437	26/4	-6.43	-6.06	-3.05	4.86		8.00		Pass
HE20	MCS0	2	6	2437	52/38	-6.68	-5.97	-2.96	4.86		8.00		Pass
HE20	MCS0	2	6	2437	106/53	-6.71	-6.45	-3.44	4.86		8.00		Pass
HE20	MCS0	2	11	2462	Full	-7.62	-8.39	-4.61	4.86		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-8.64	-7.95	-4.94	4.86		8.00		Pass
HE20	MCS0	2	11	2462	52/40	-8.64	-7.99	-4.98	4.86		8.00		Pass
HE20	MCS0	2	11	2462	106/54	-8.57	-8.11	-5.10	4.86		8.00		Pass


Measured power density (dBm) has offset with cable loss.



6dB and 99% Occupied Bandwidth


MIMO <Ant. 6+7>

<802.11b>

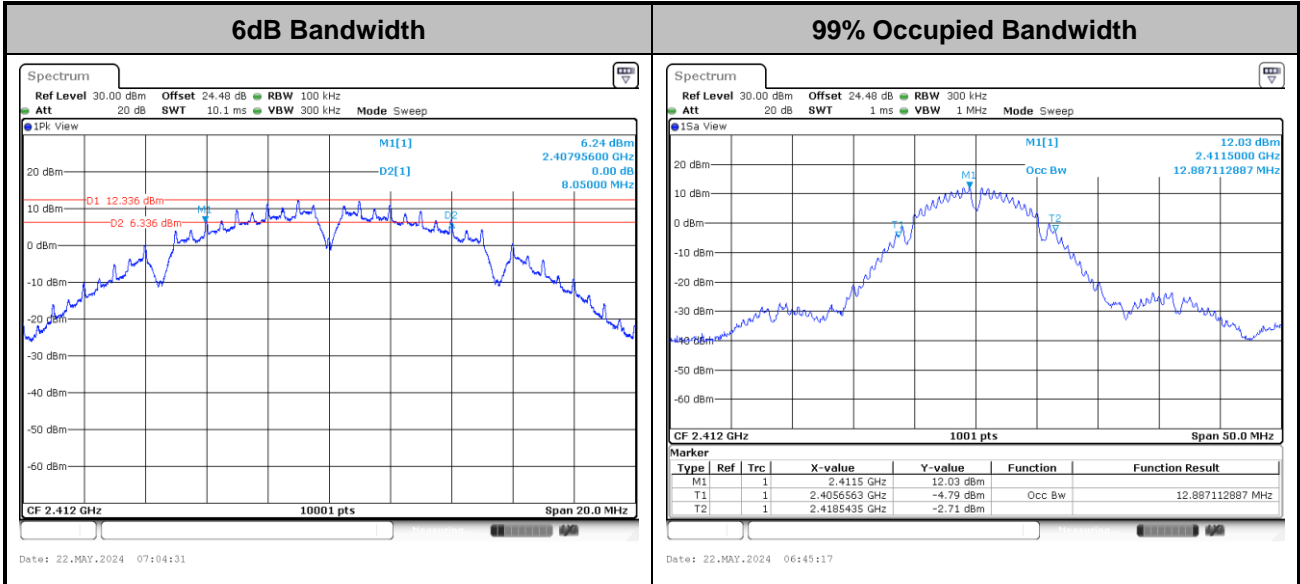

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

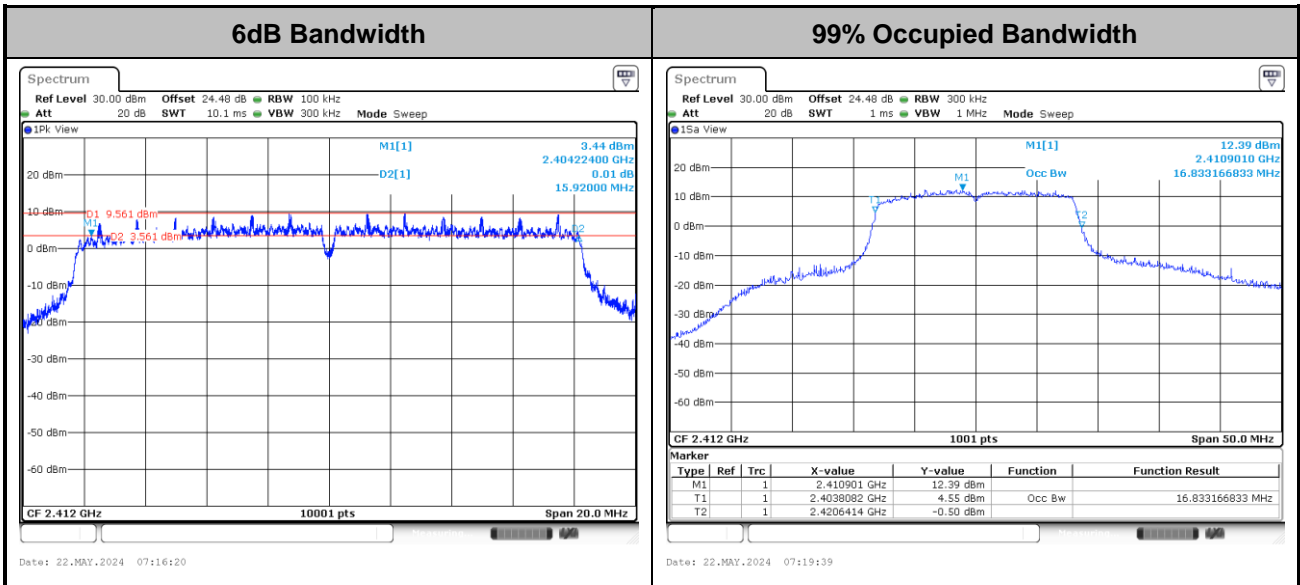

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT20>

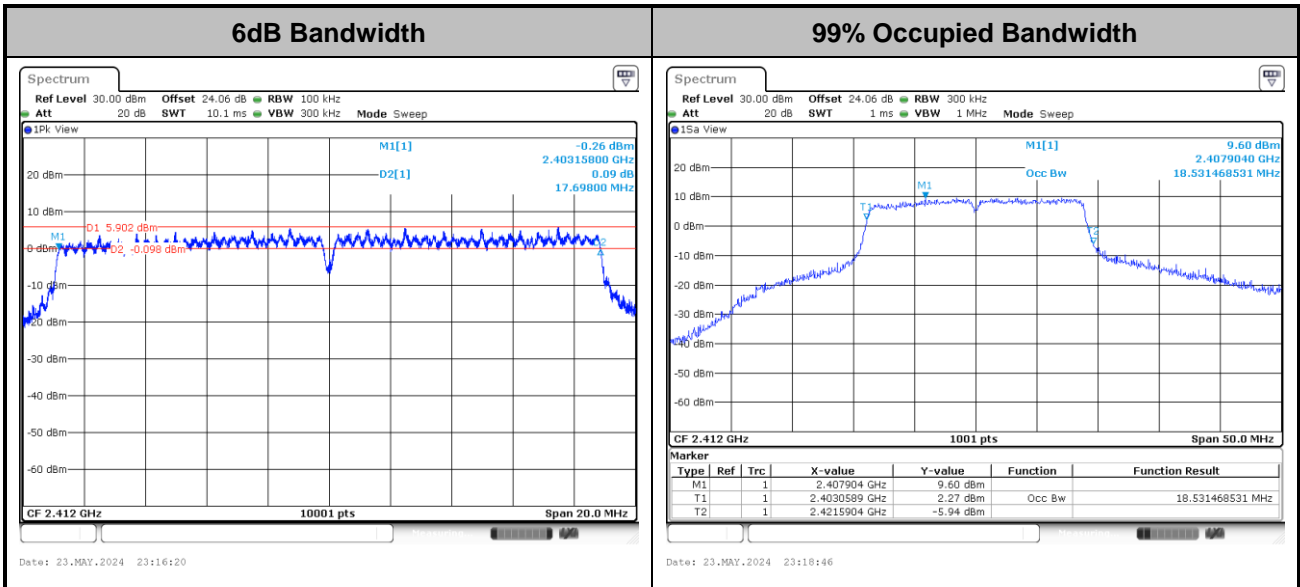

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11ax HE20>

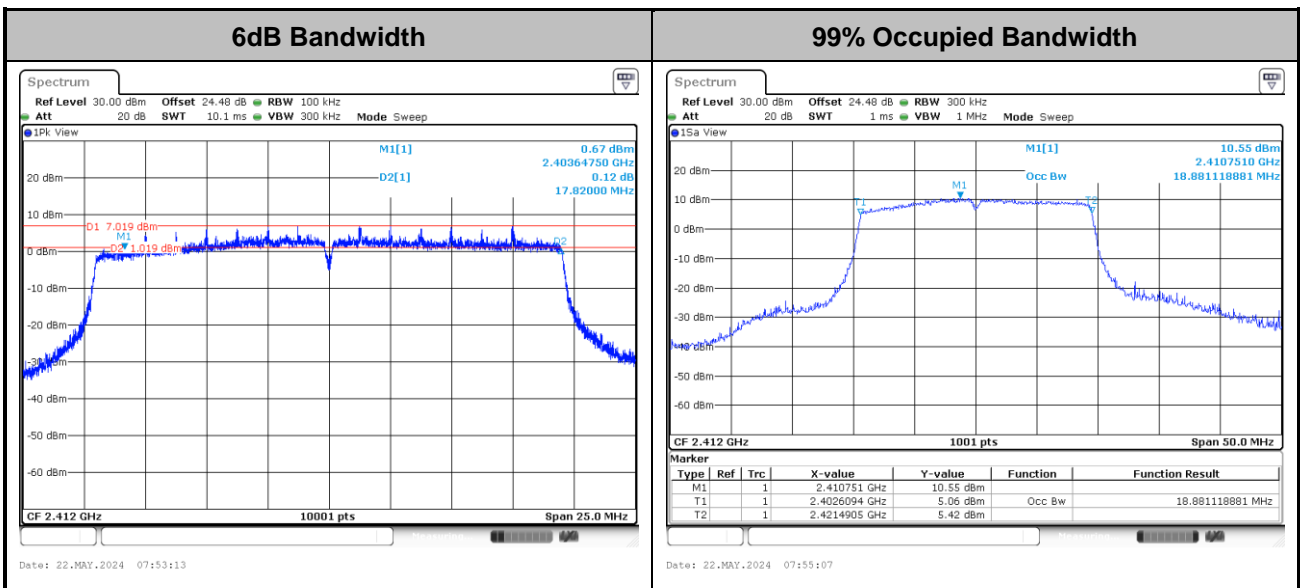


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Power Spectral Density(dBm/3kHz)

<802.11b>

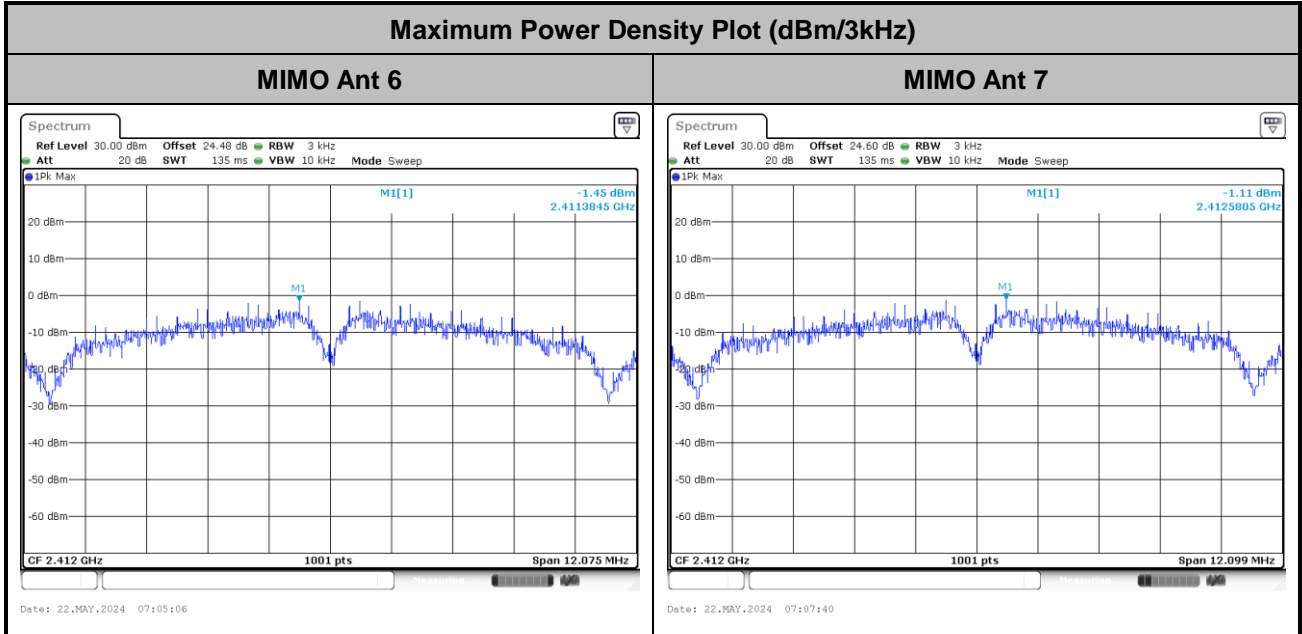


<802.11g>

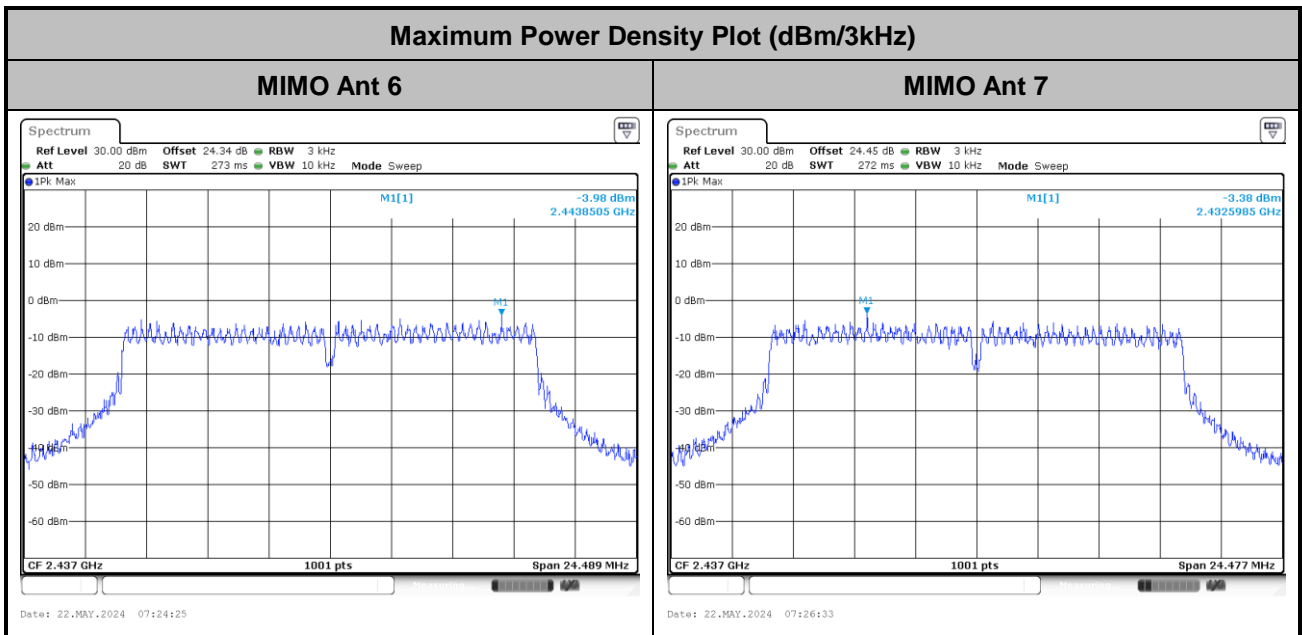






<802.11ac VHT20>

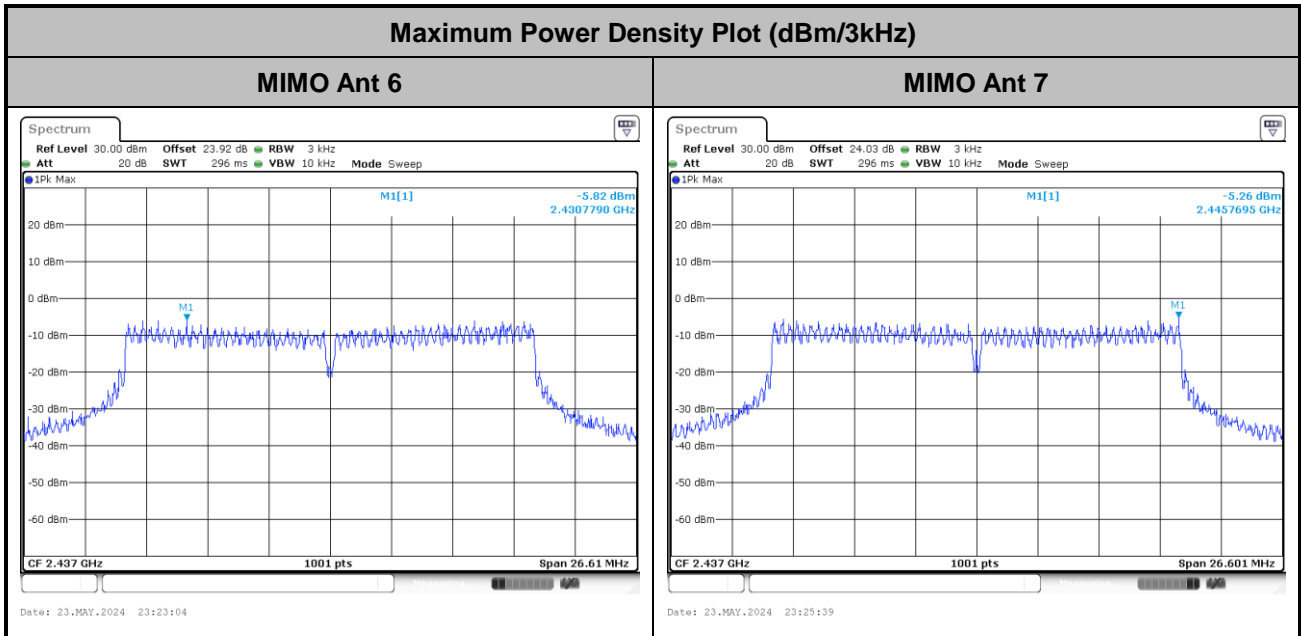

<802.11ax HE20>

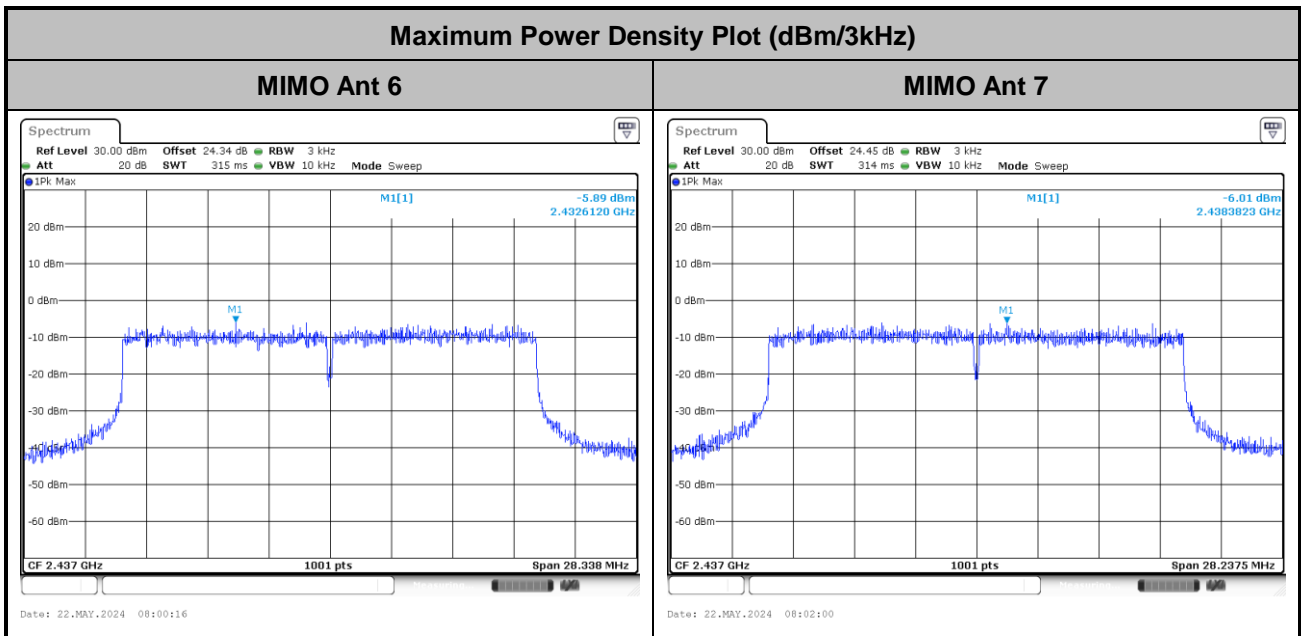




Band Edges and Spurious Emission


Number of TX = 2, Ant. 6 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

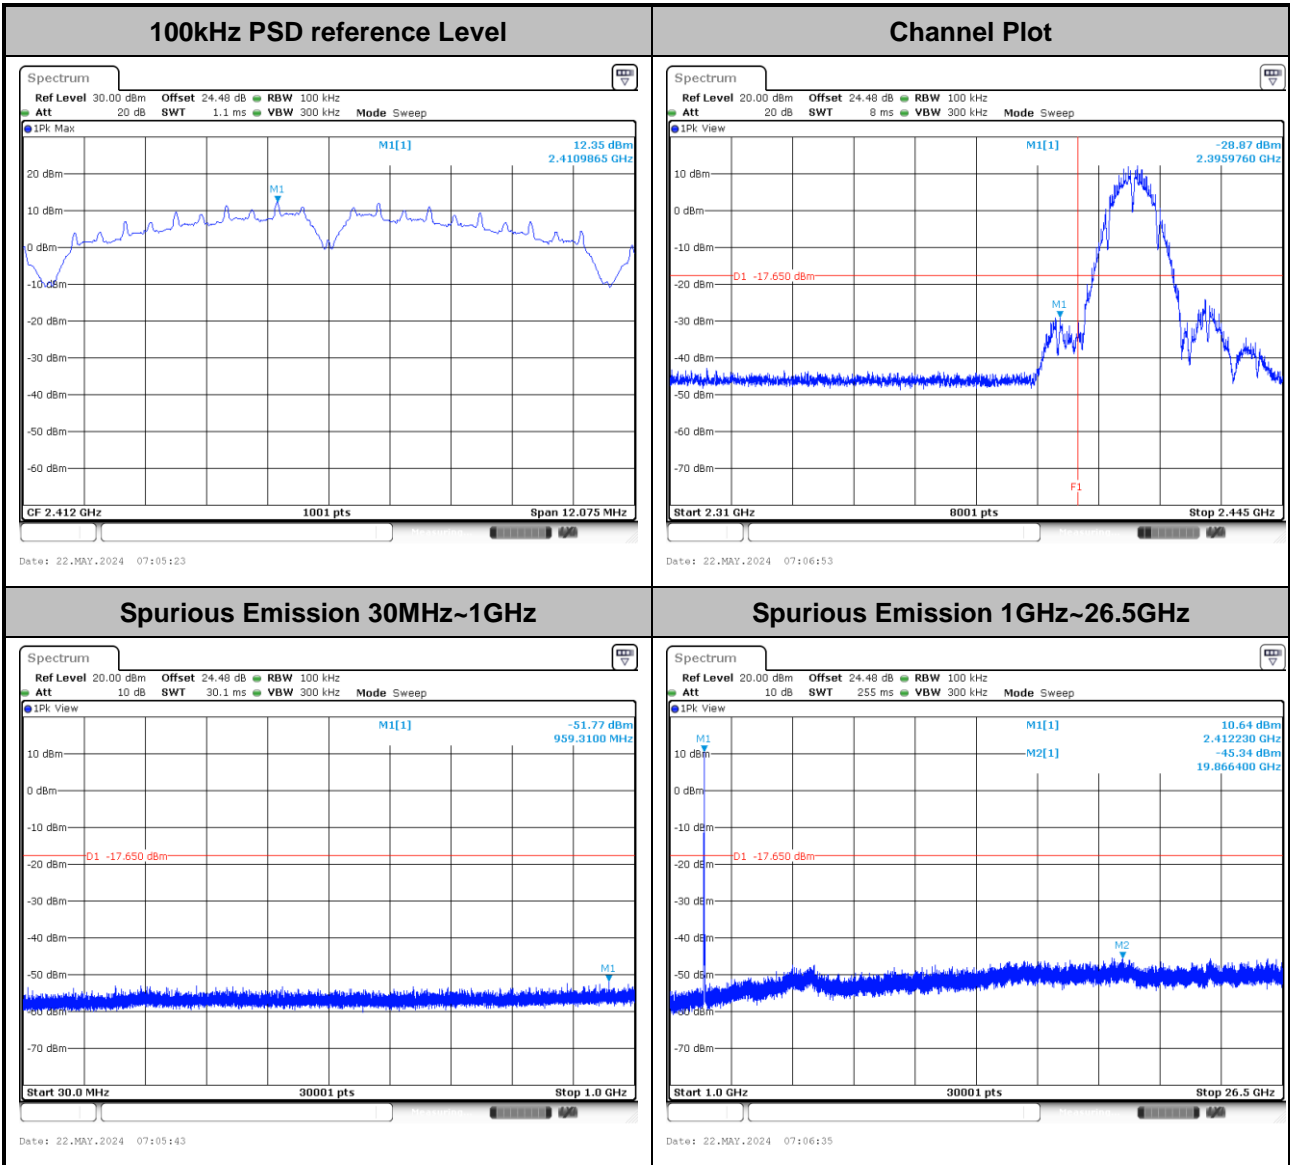




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

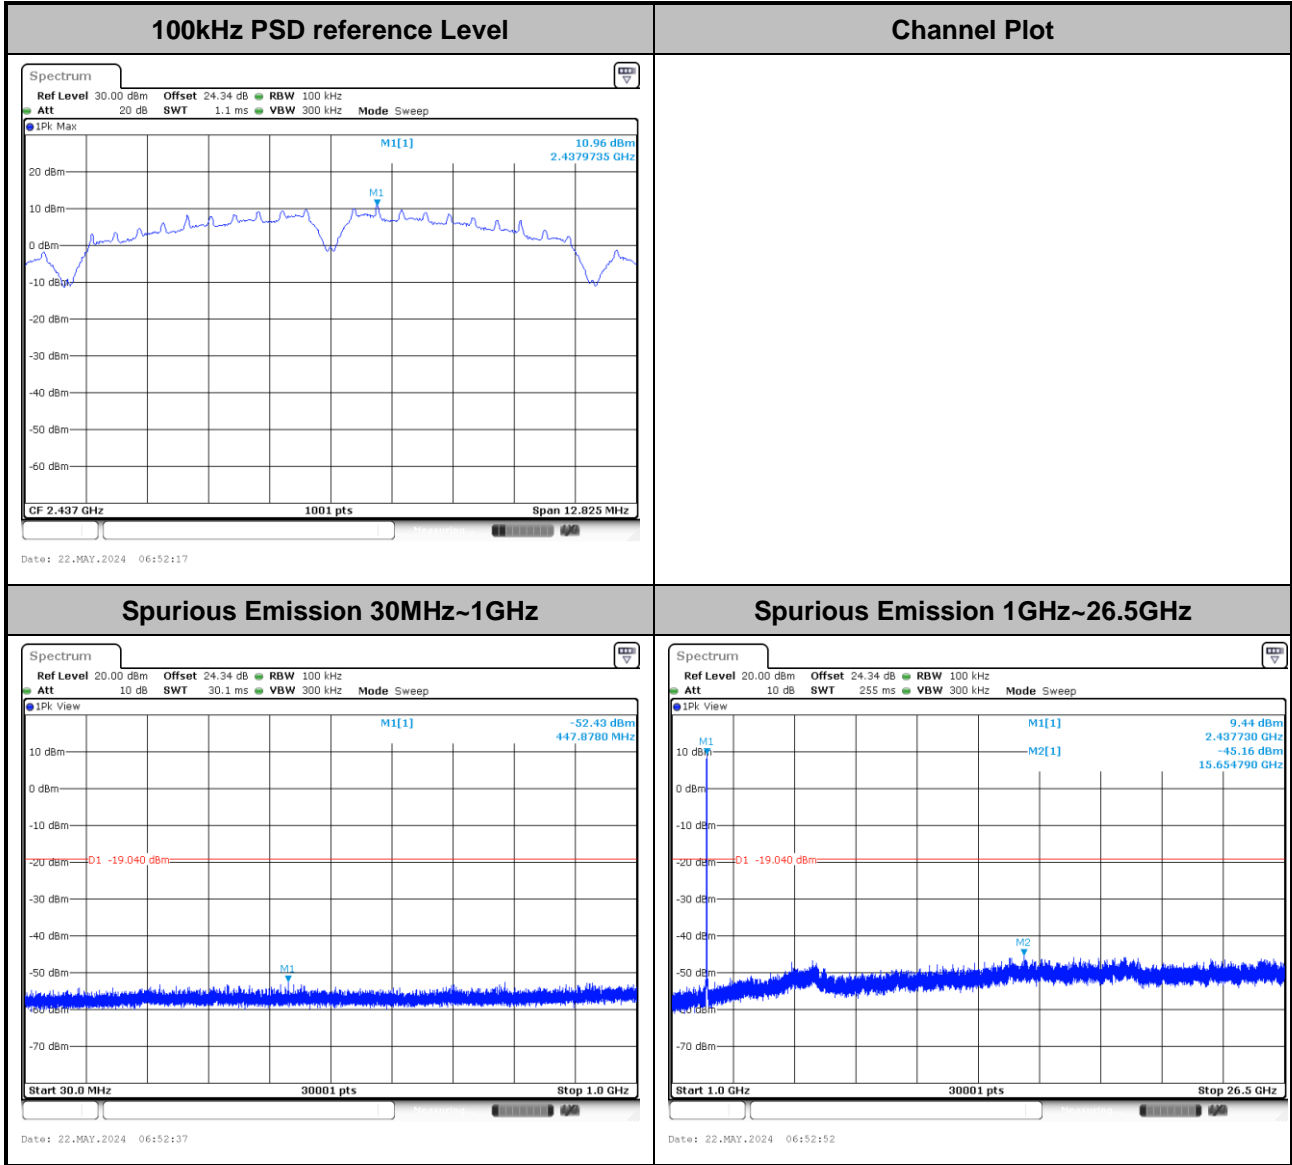




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

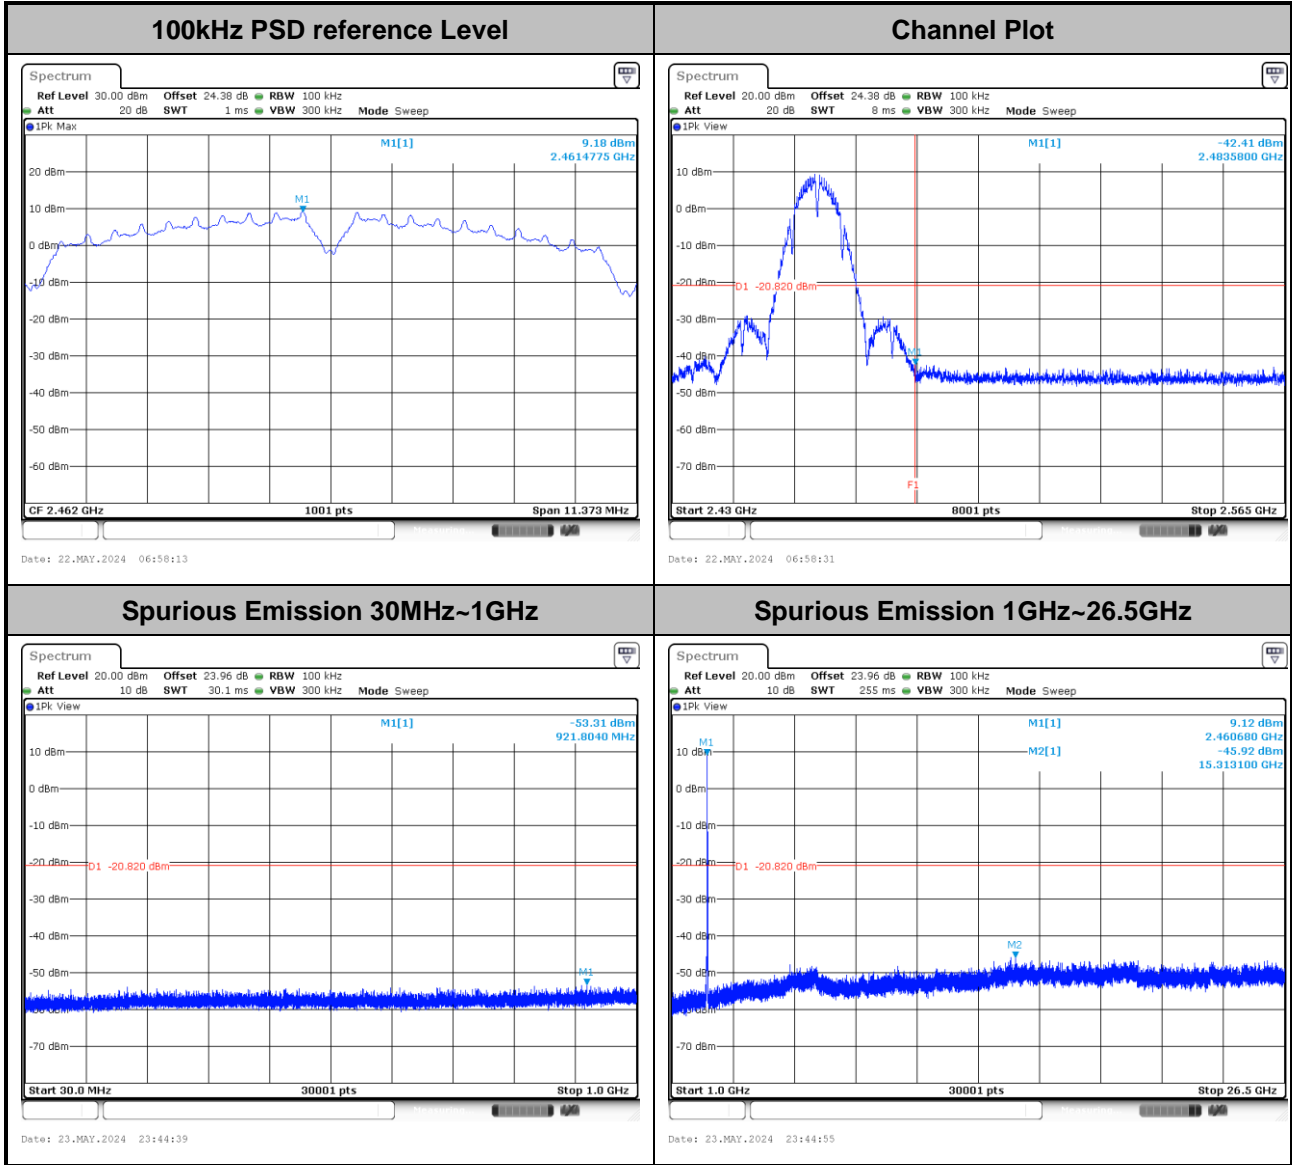




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

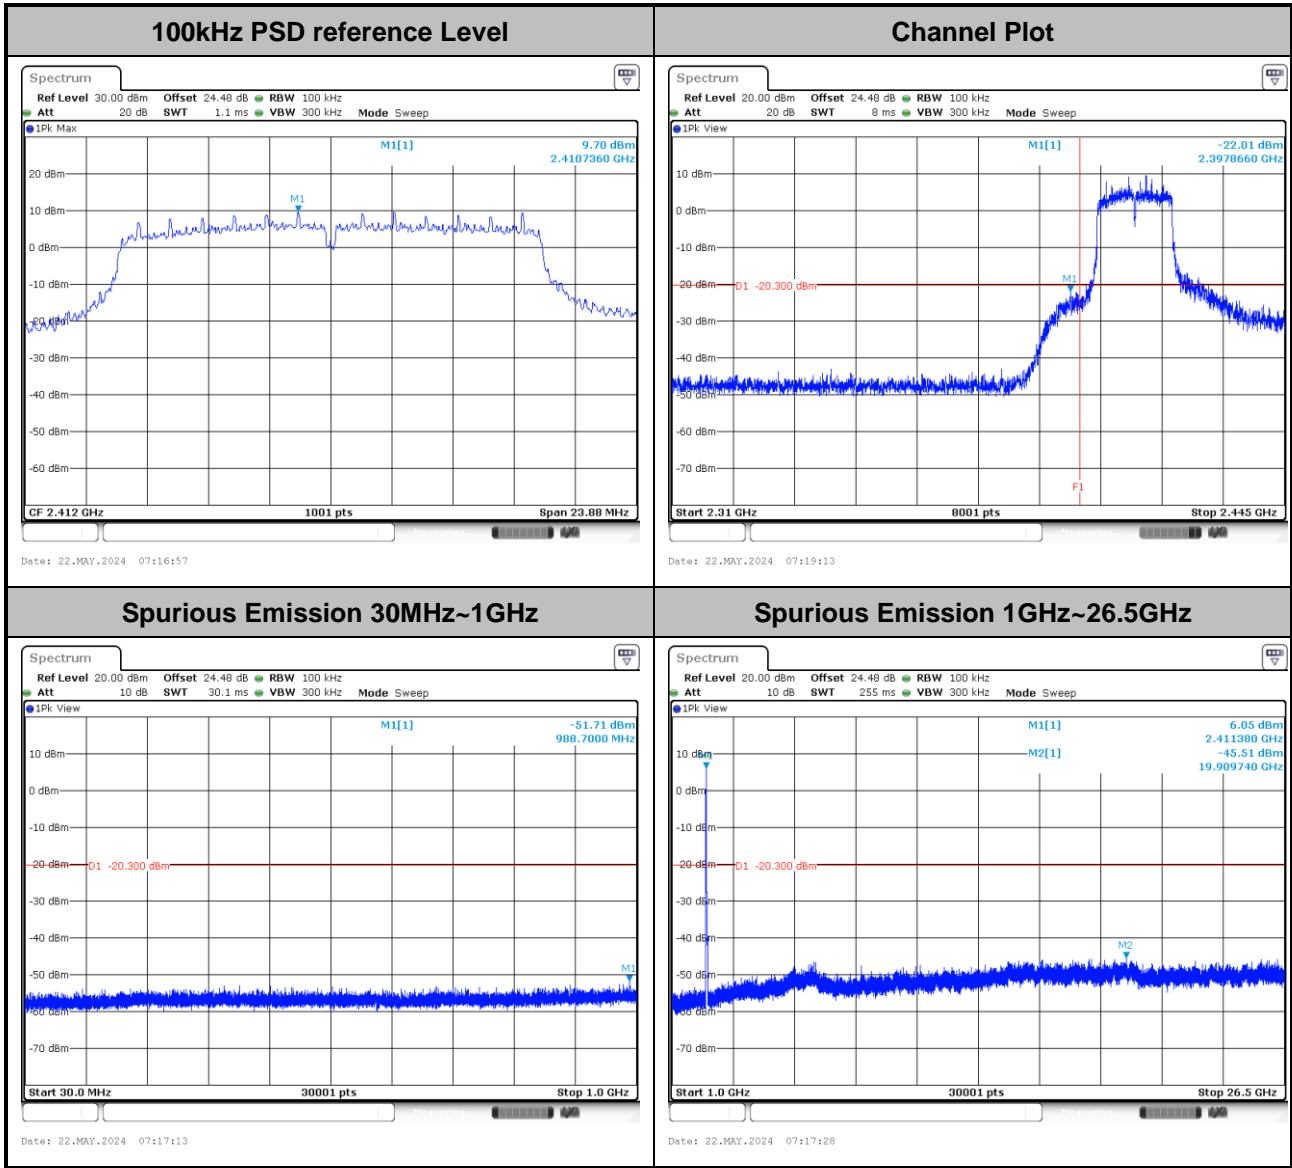




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

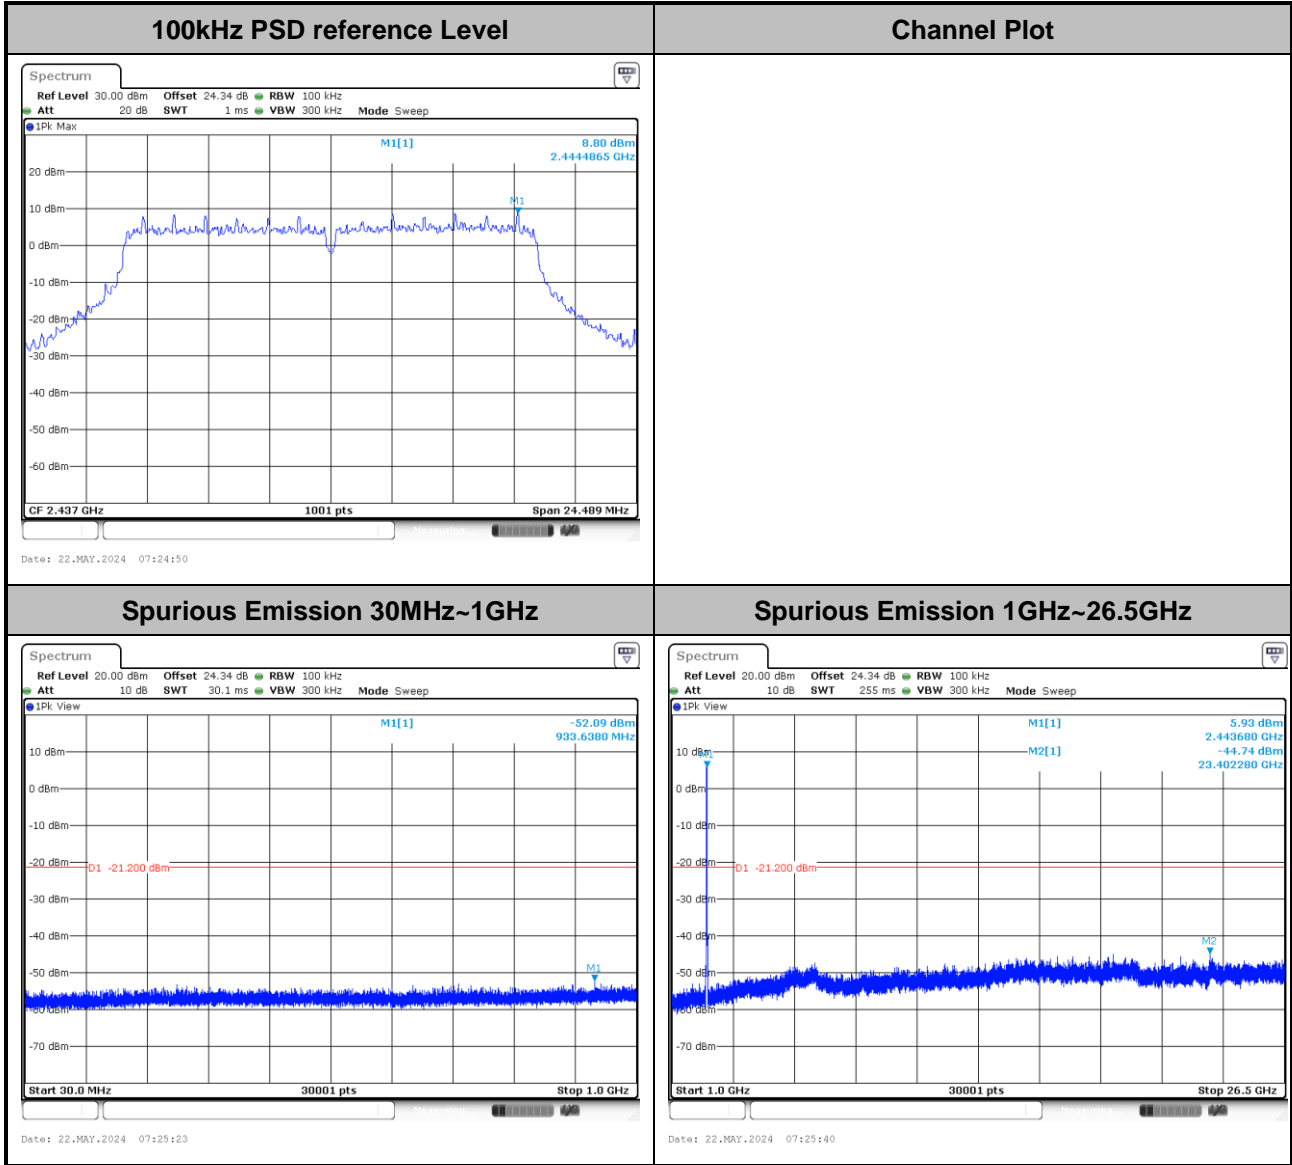




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

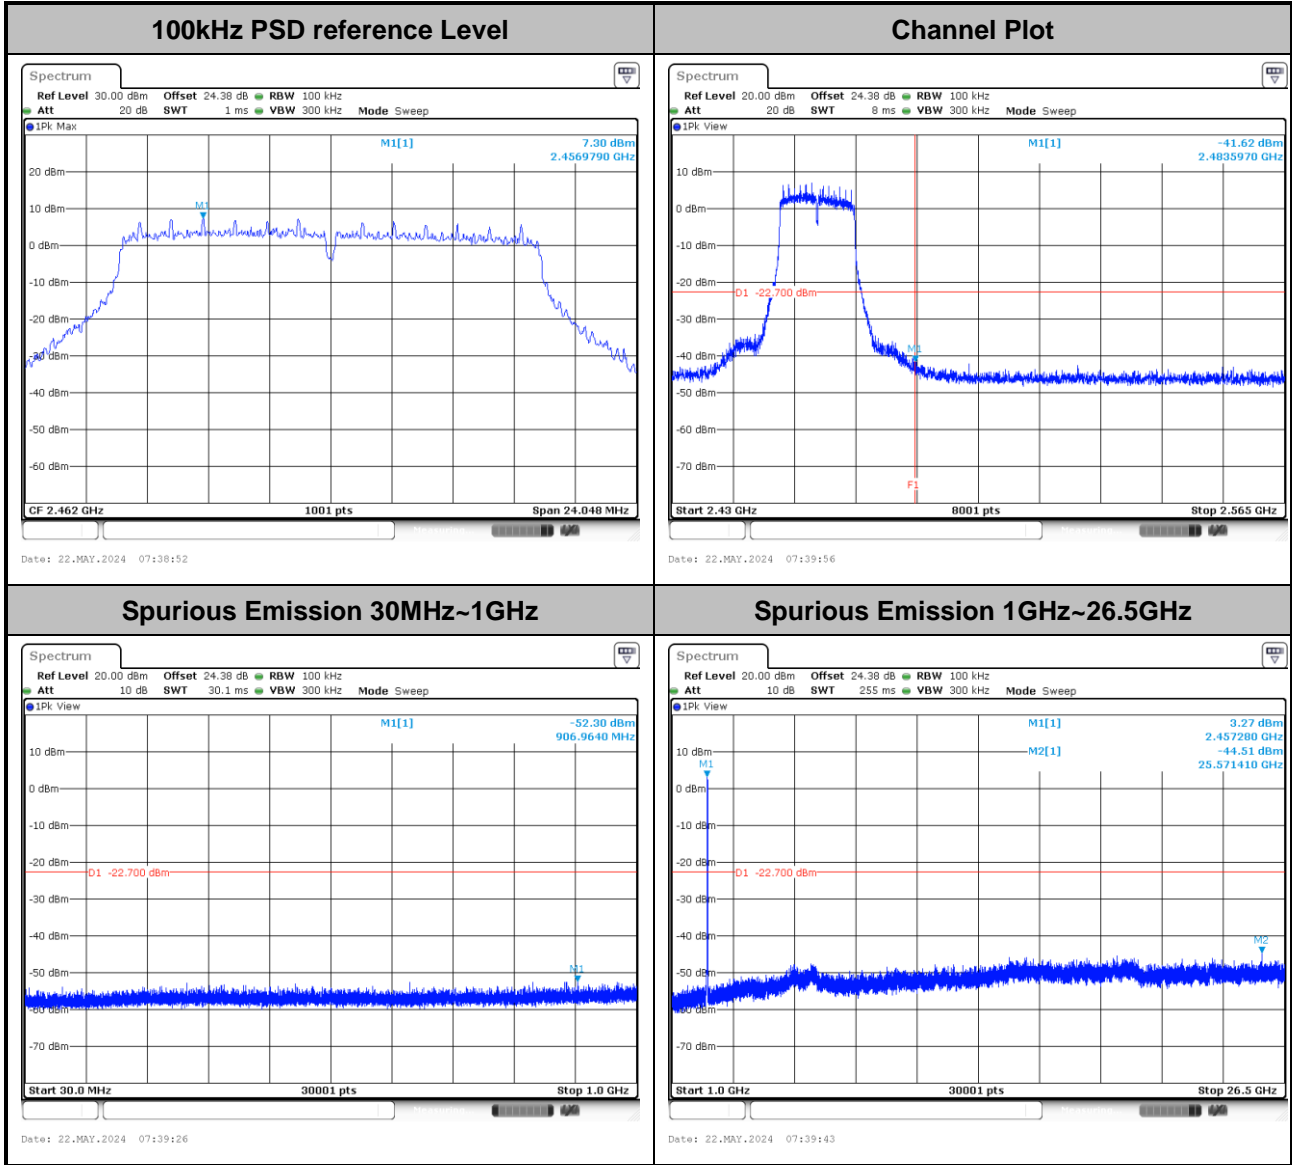




Test Mode :	802.11ac VHT20	Test Channel :	01
-------------	----------------	----------------	----

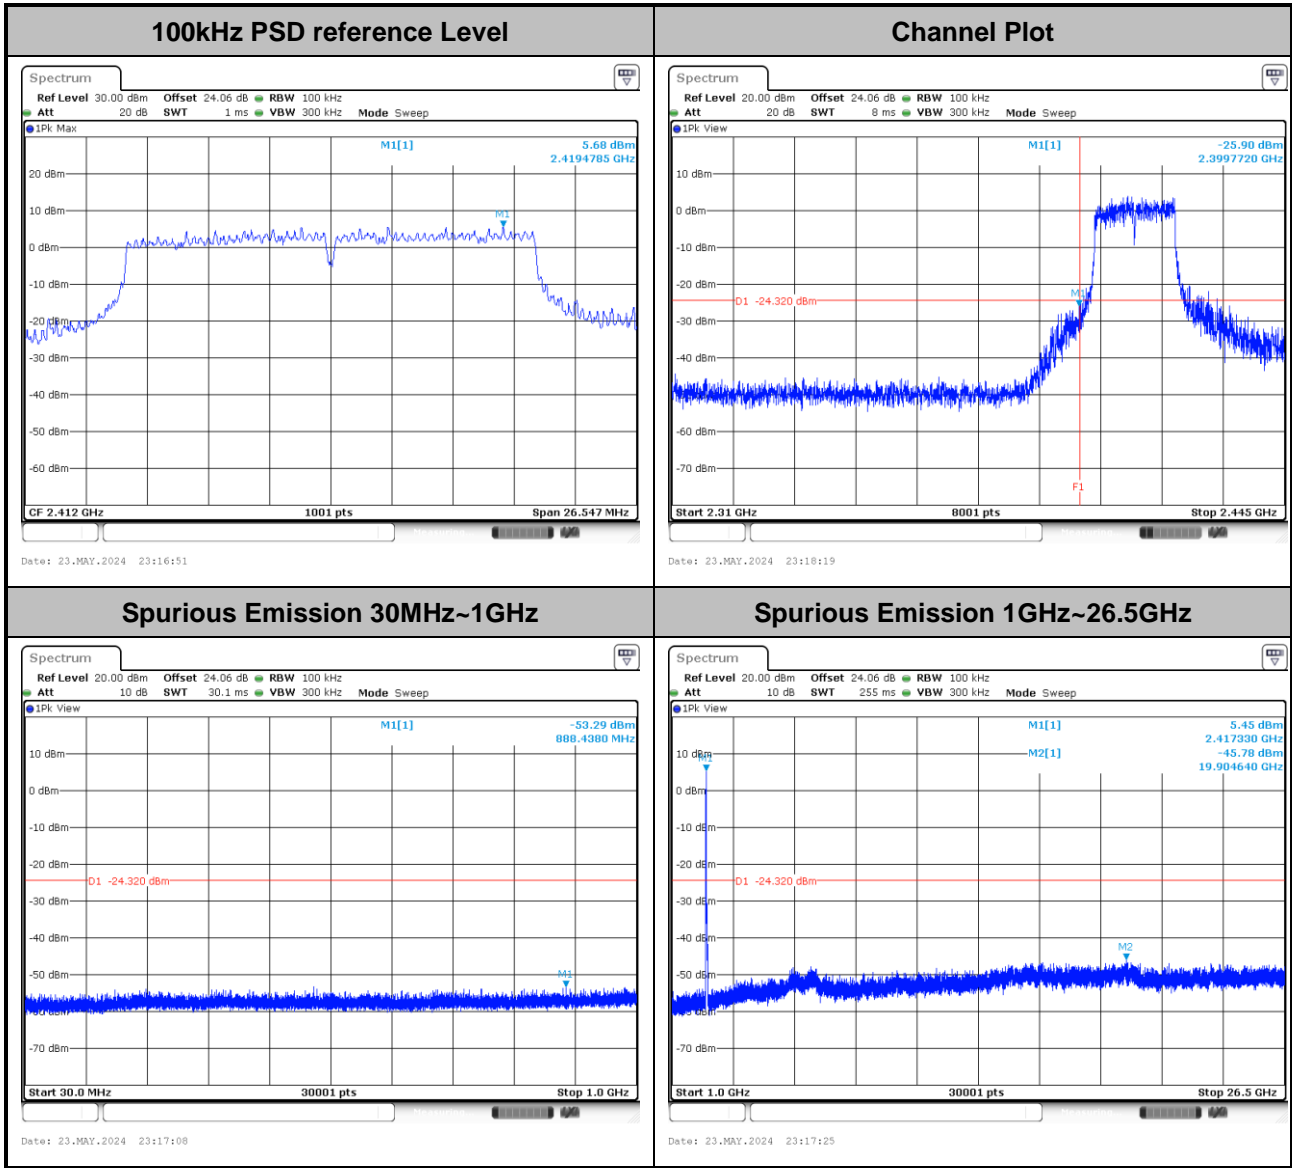






Test Mode :	802.11ac VHT20	Test Channel :	06
-------------	----------------	----------------	----

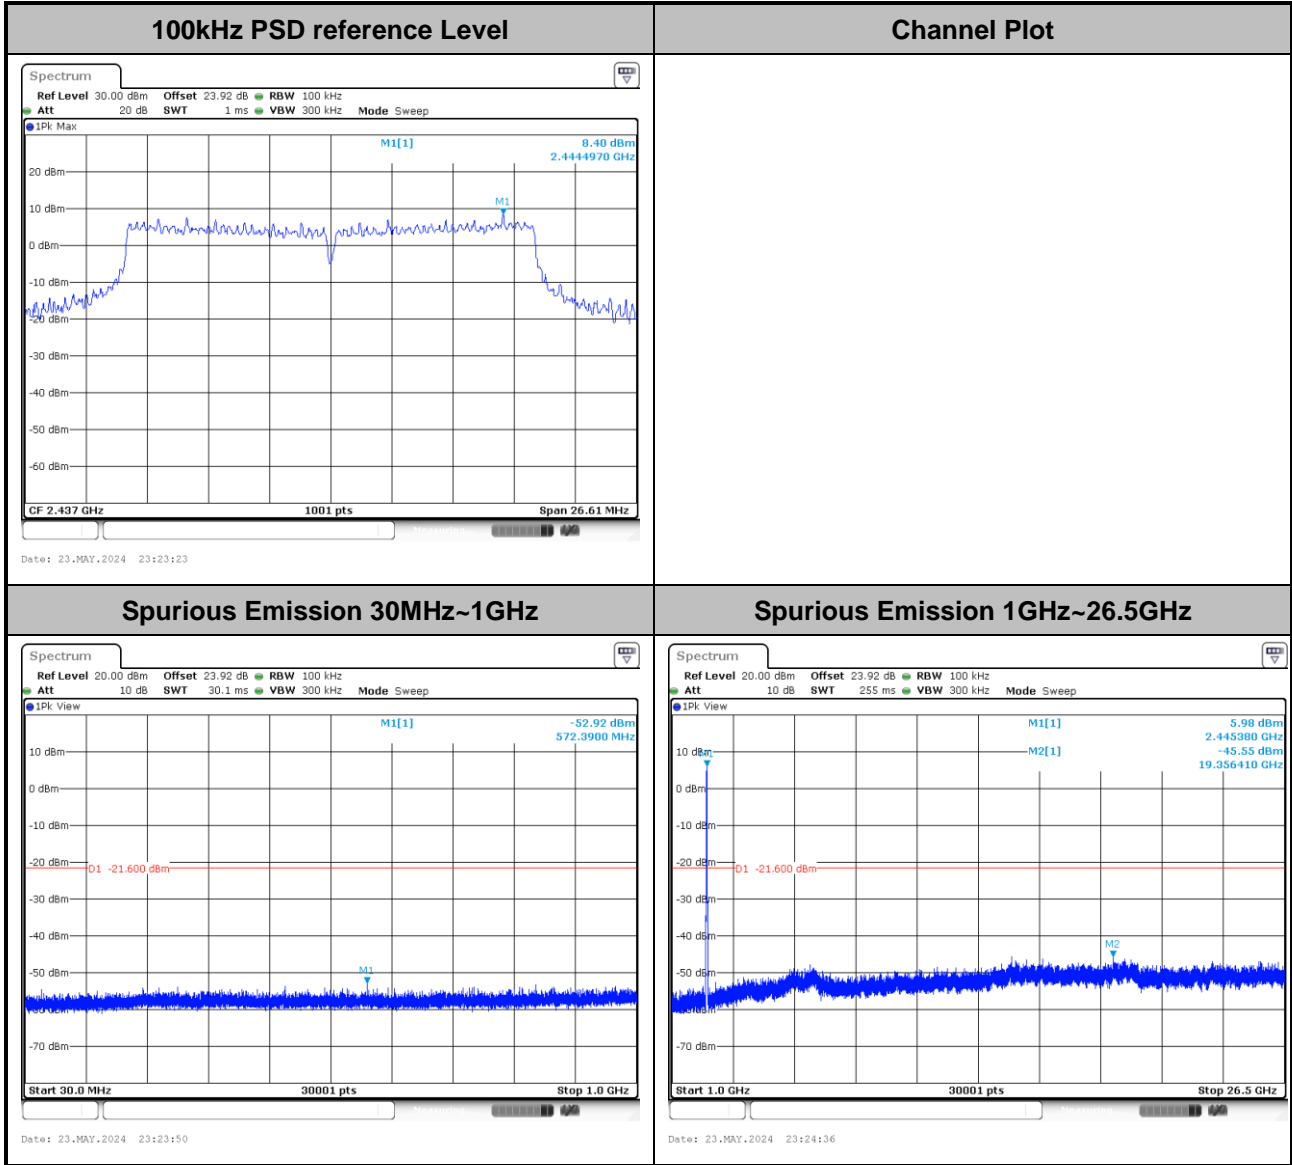




Test Mode :	802.11ac VHT20	Test Channel :	11
-------------	----------------	----------------	----

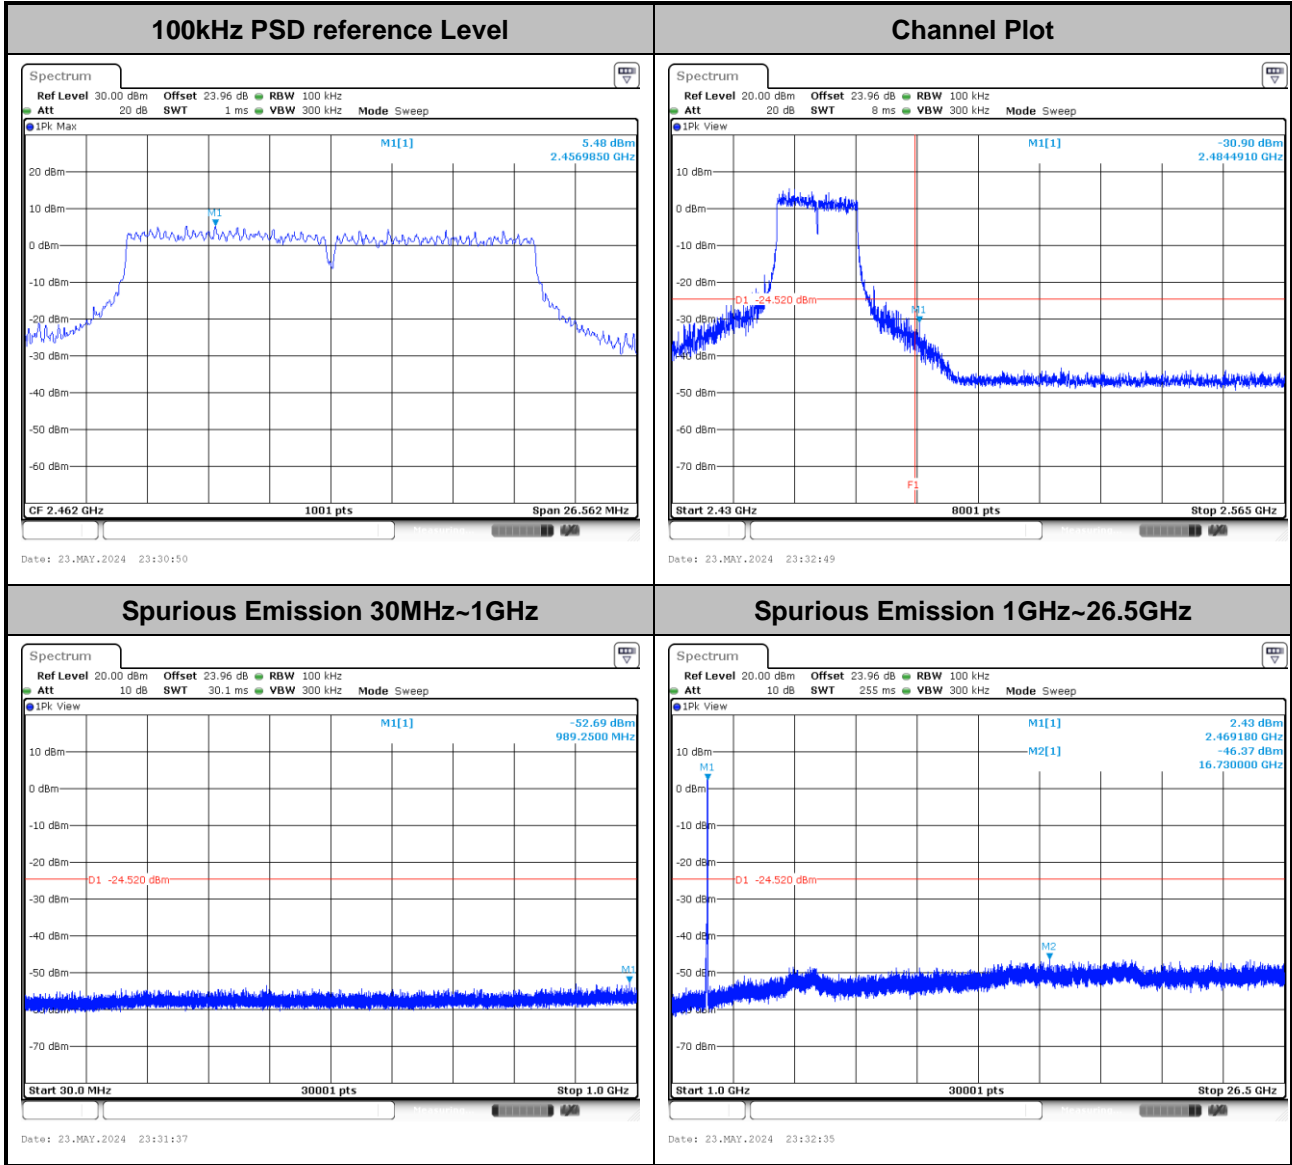




Test Mode :	802.11ax HE20_FullRU	Test Channel :	01
-------------	----------------------	----------------	----

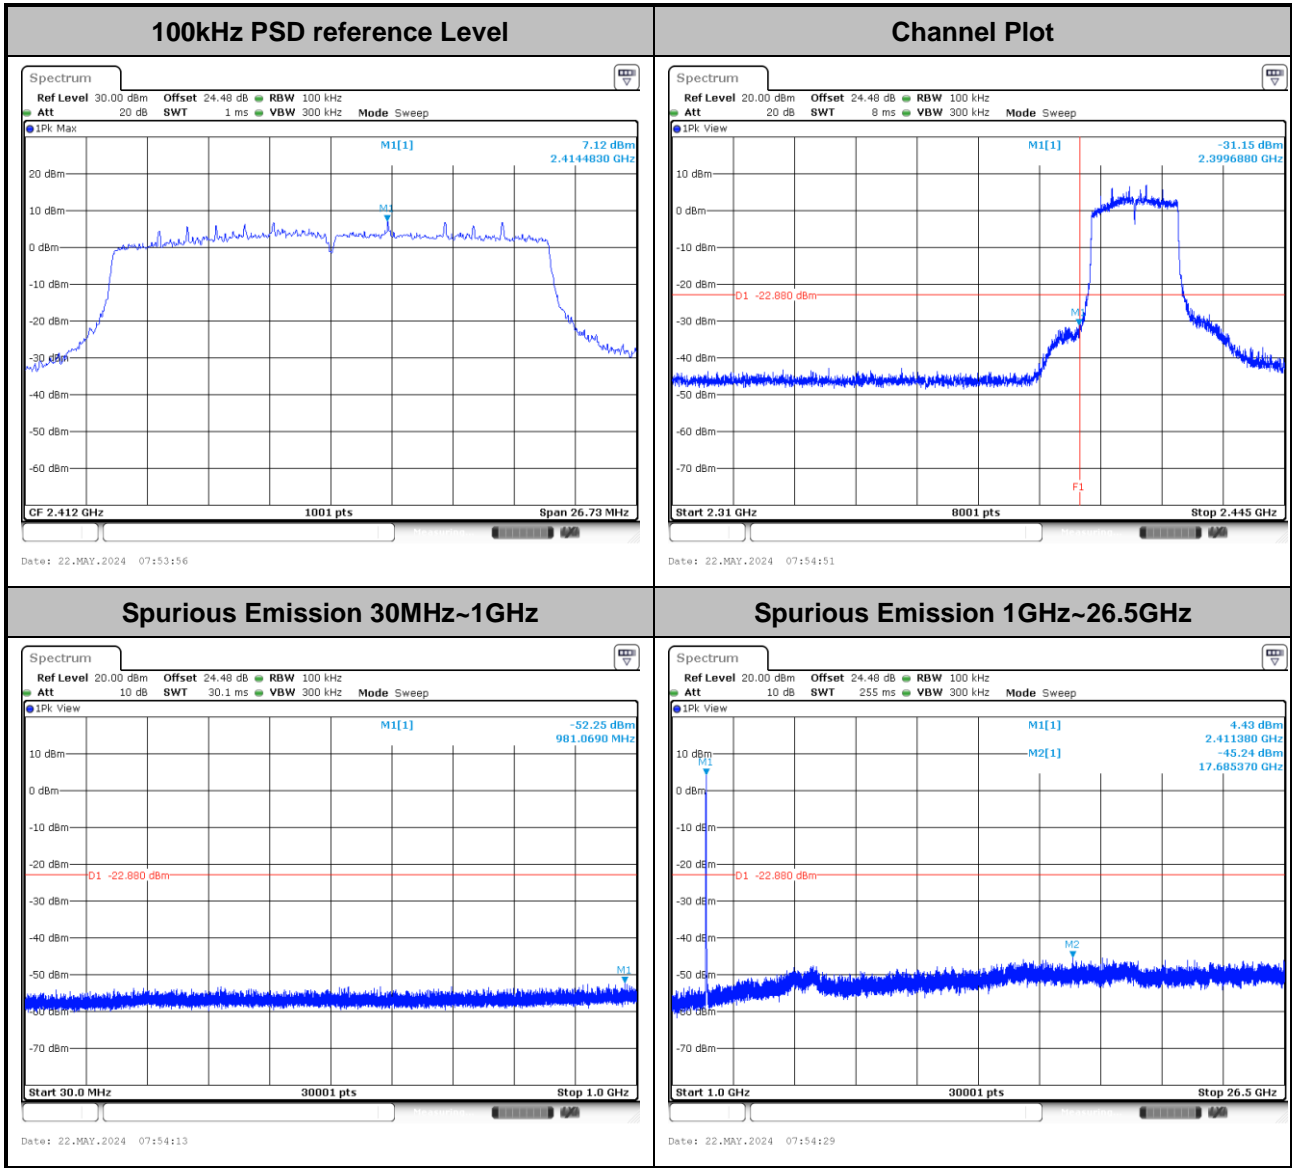




Test Mode :	802.11ax HE20_FullIRU	Test Channel :	06
-------------	-----------------------	----------------	----

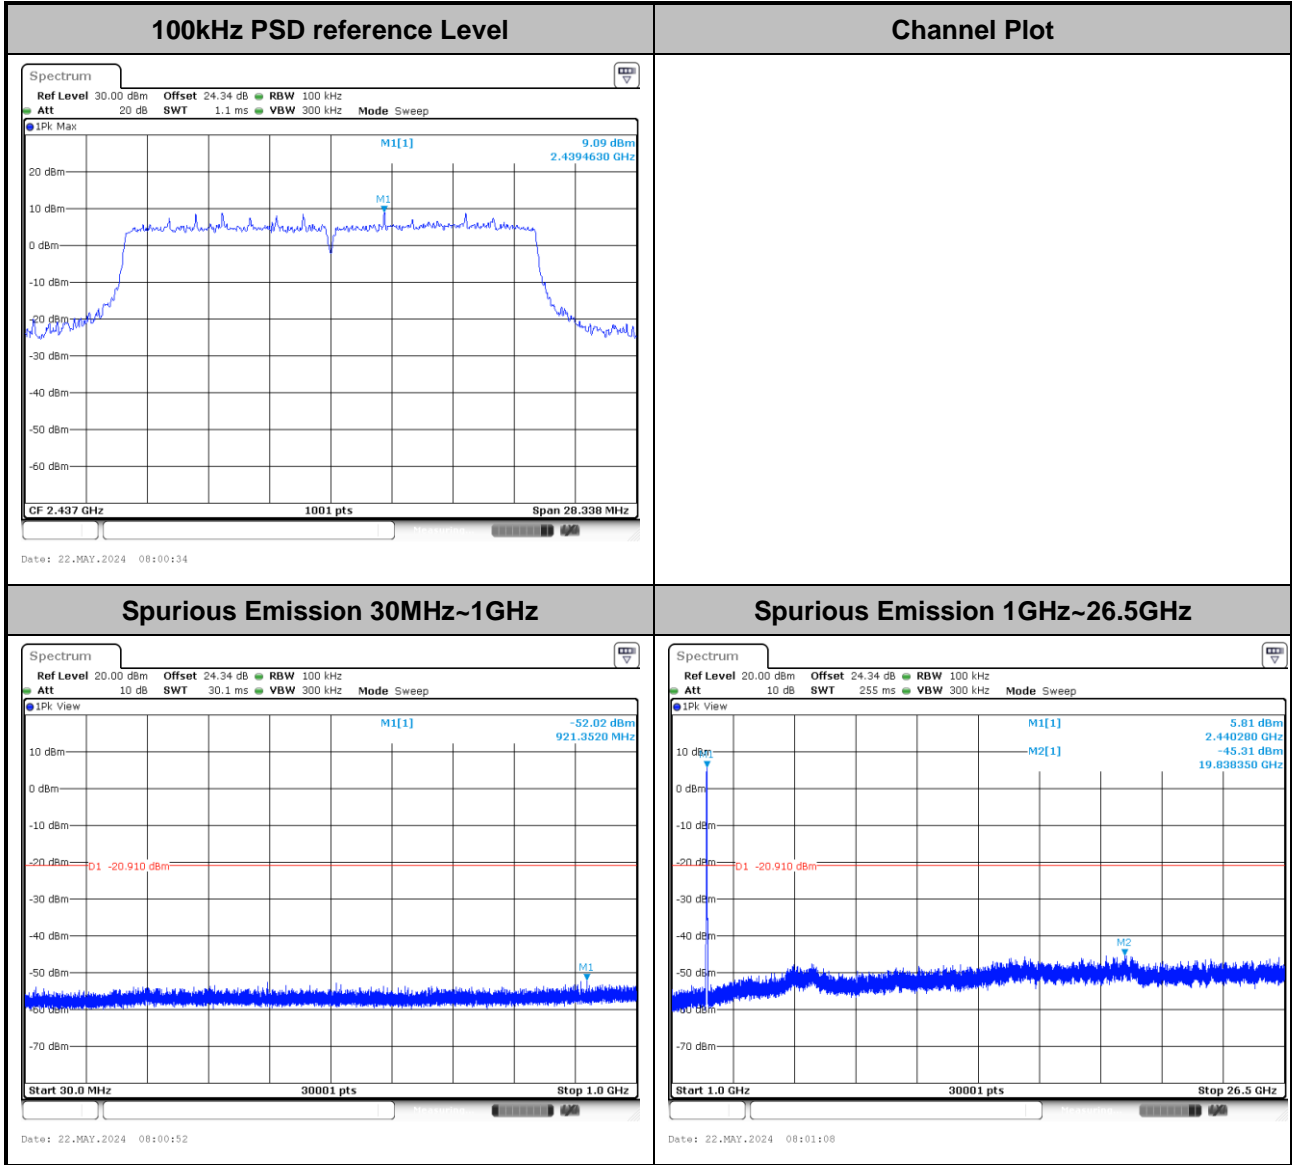




Test Mode :	802.11ax HE20_FullRU	Test Channel :	11
-------------	----------------------	----------------	----

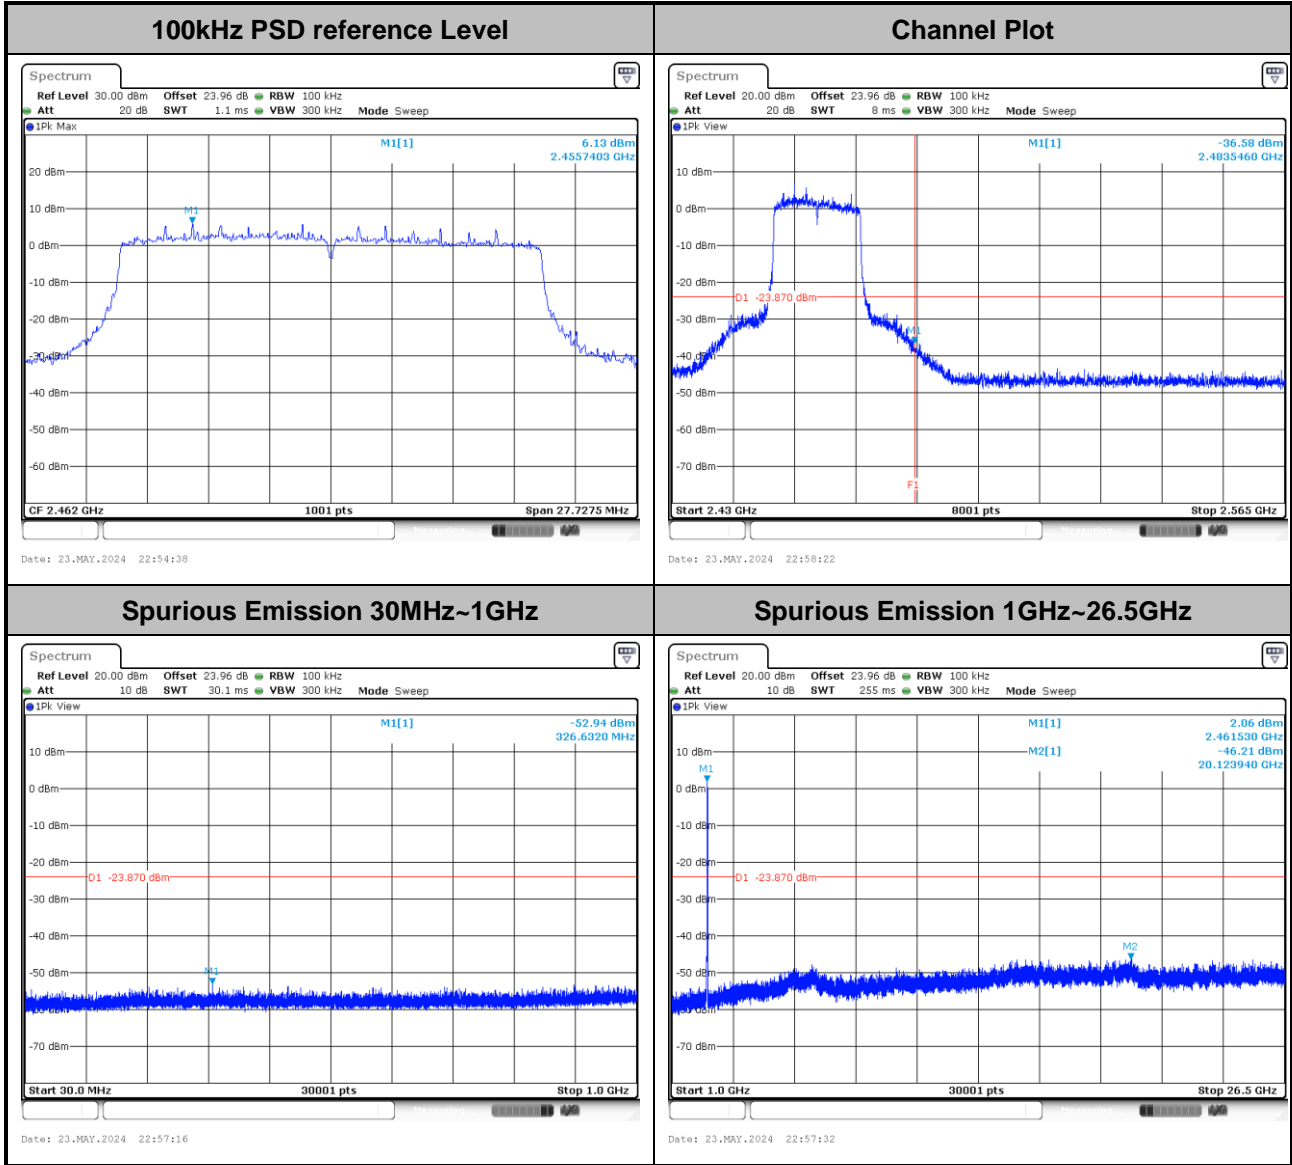




Number of TX = 2, Ant. 7 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

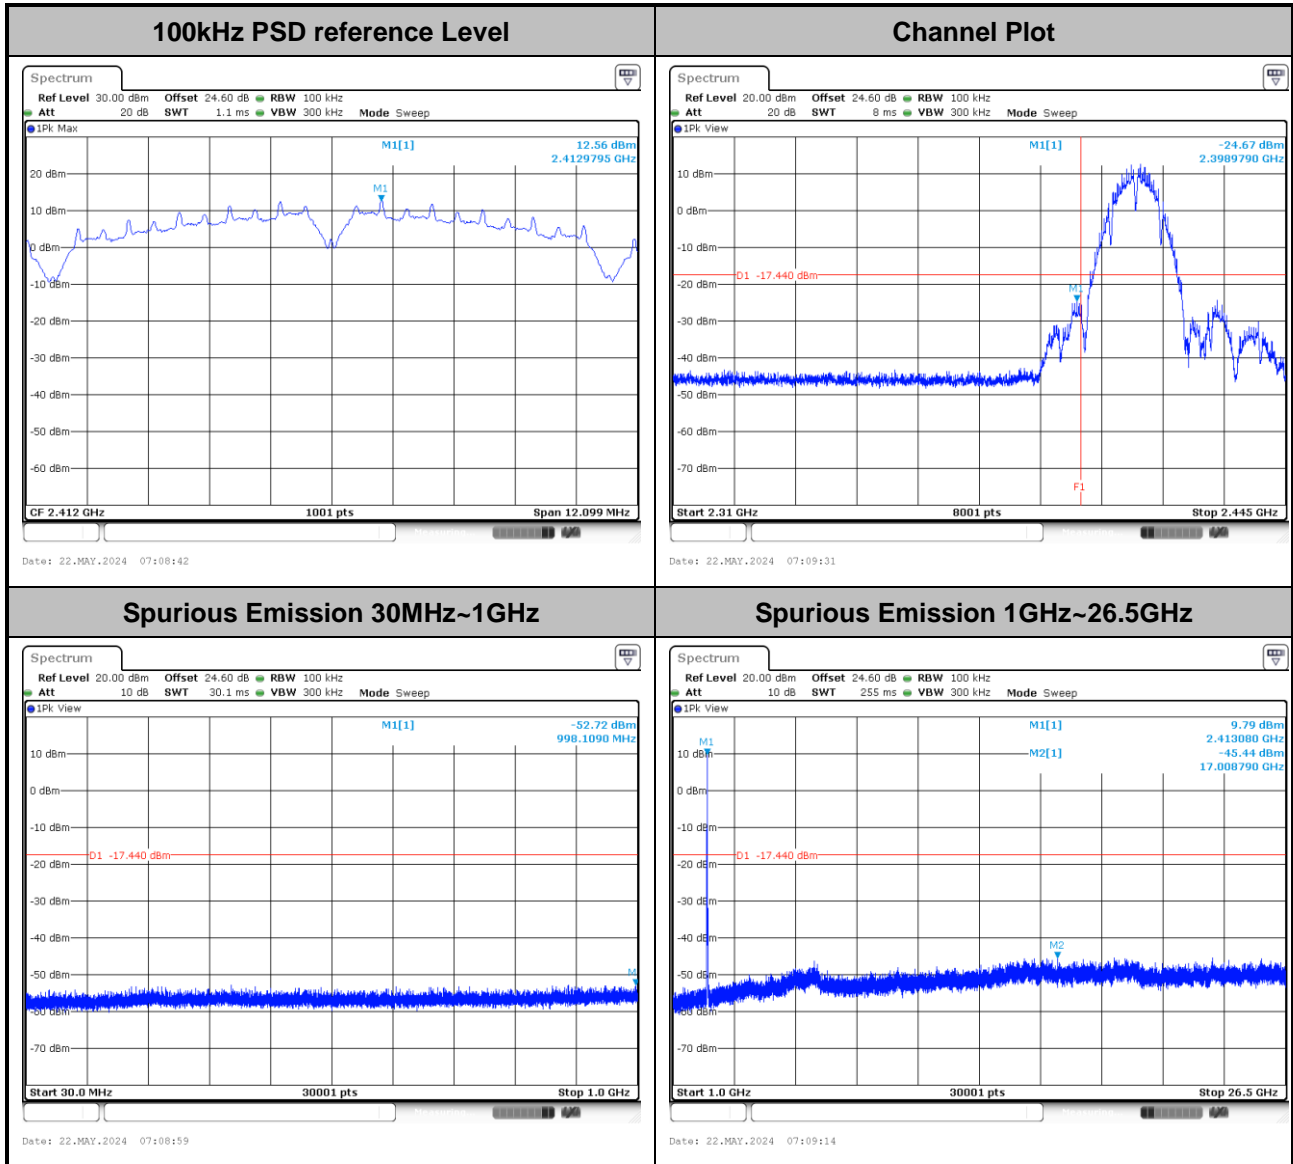




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

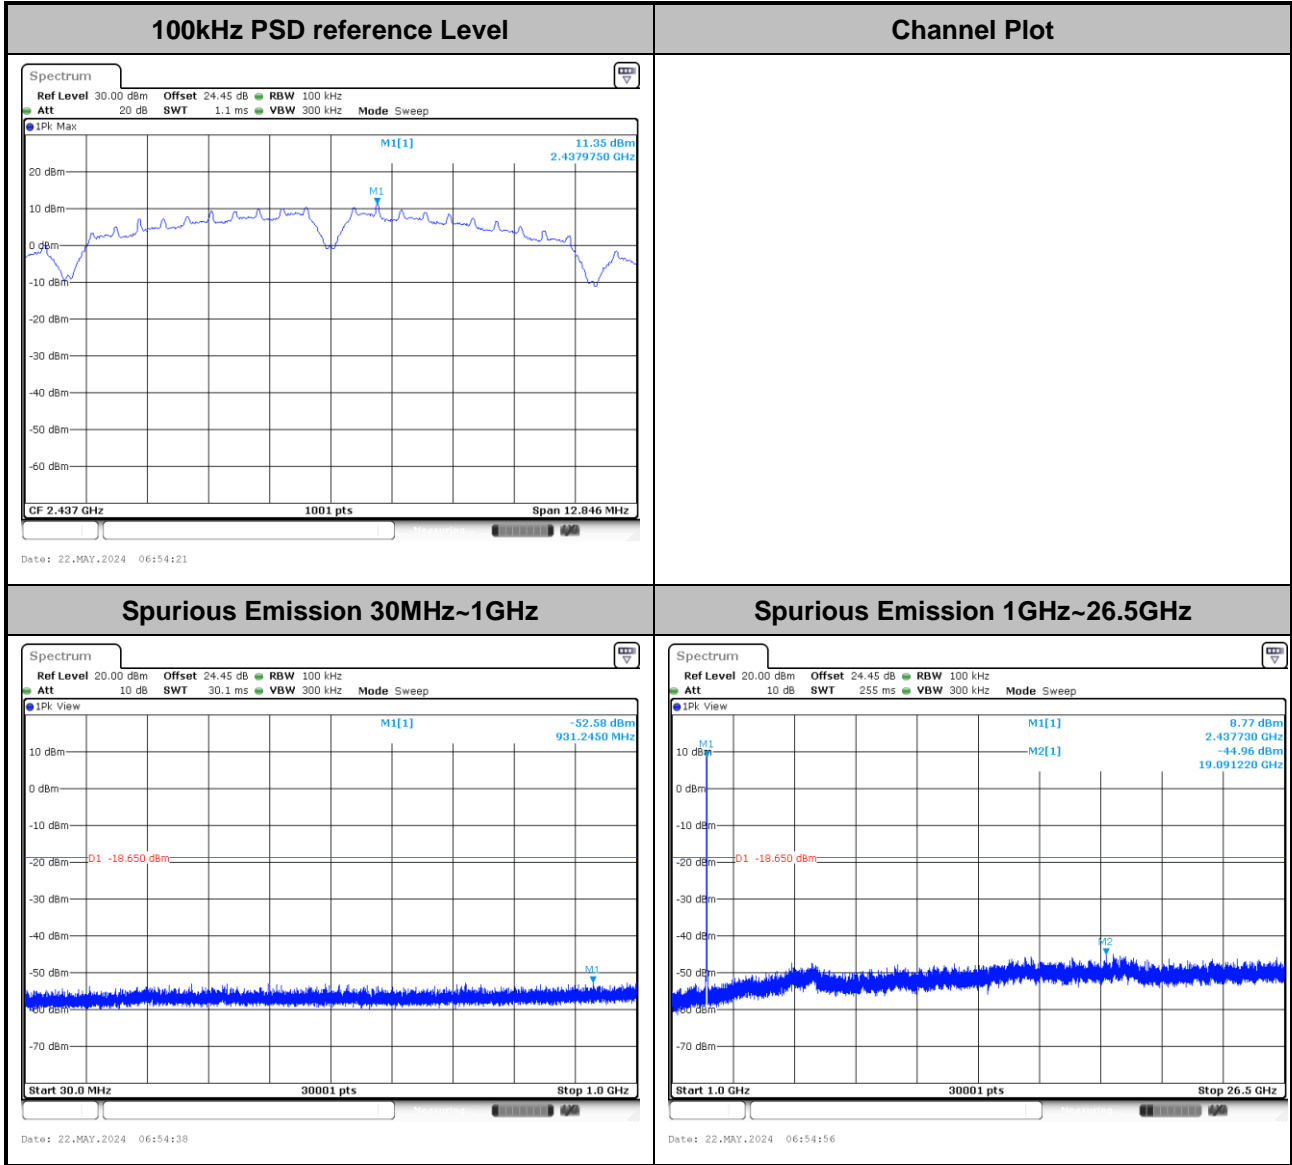




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

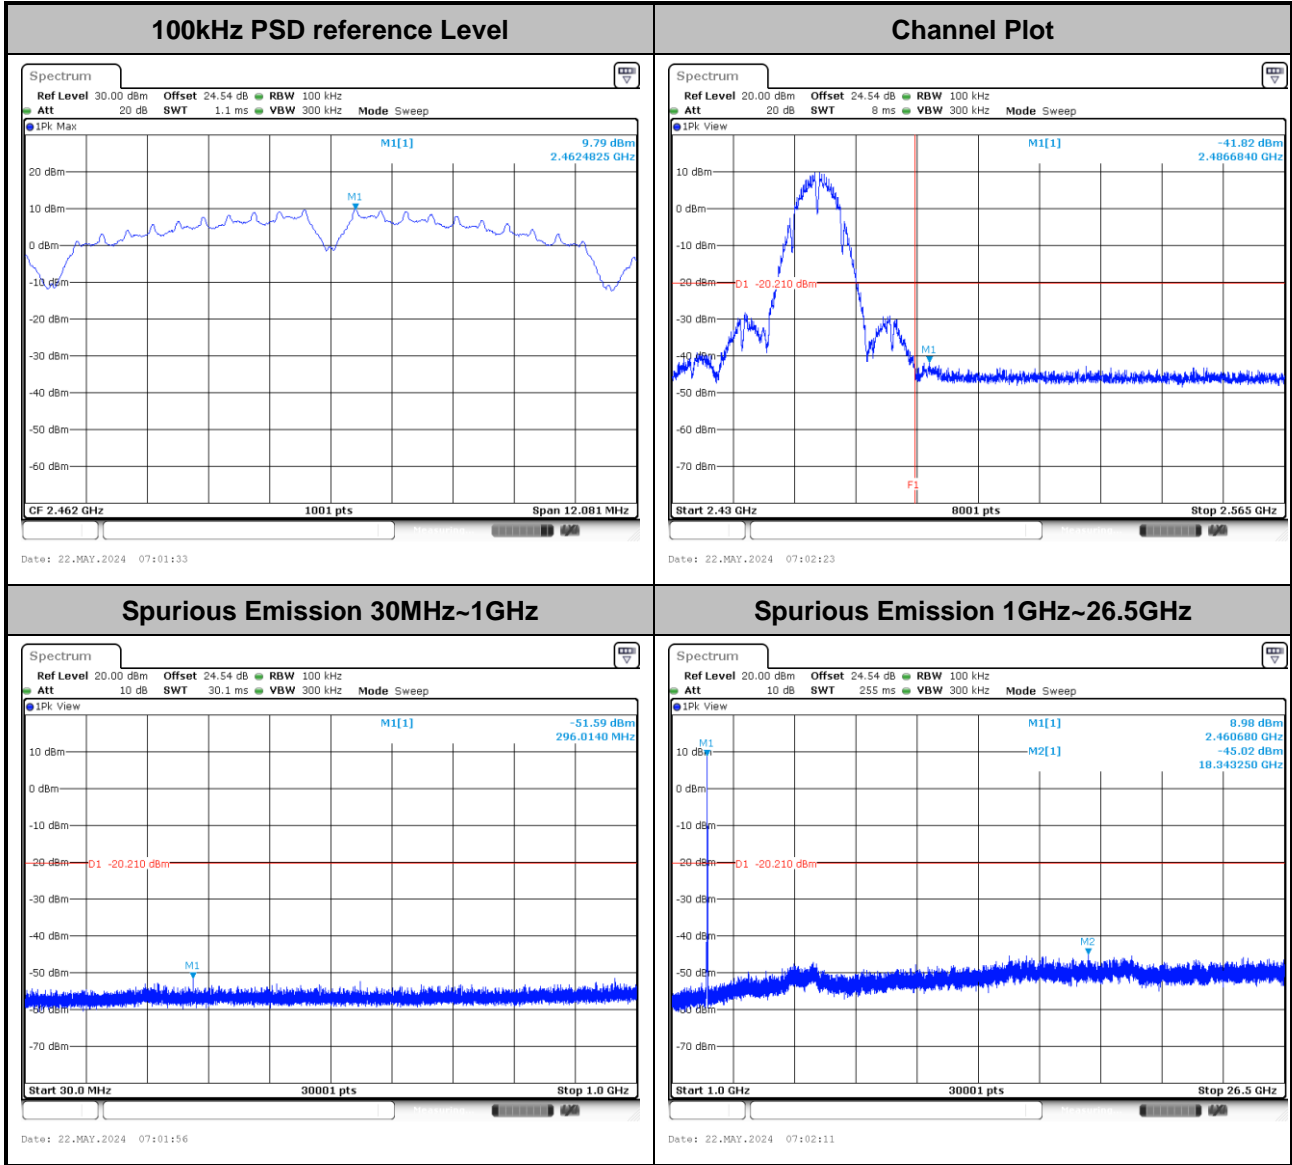






Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

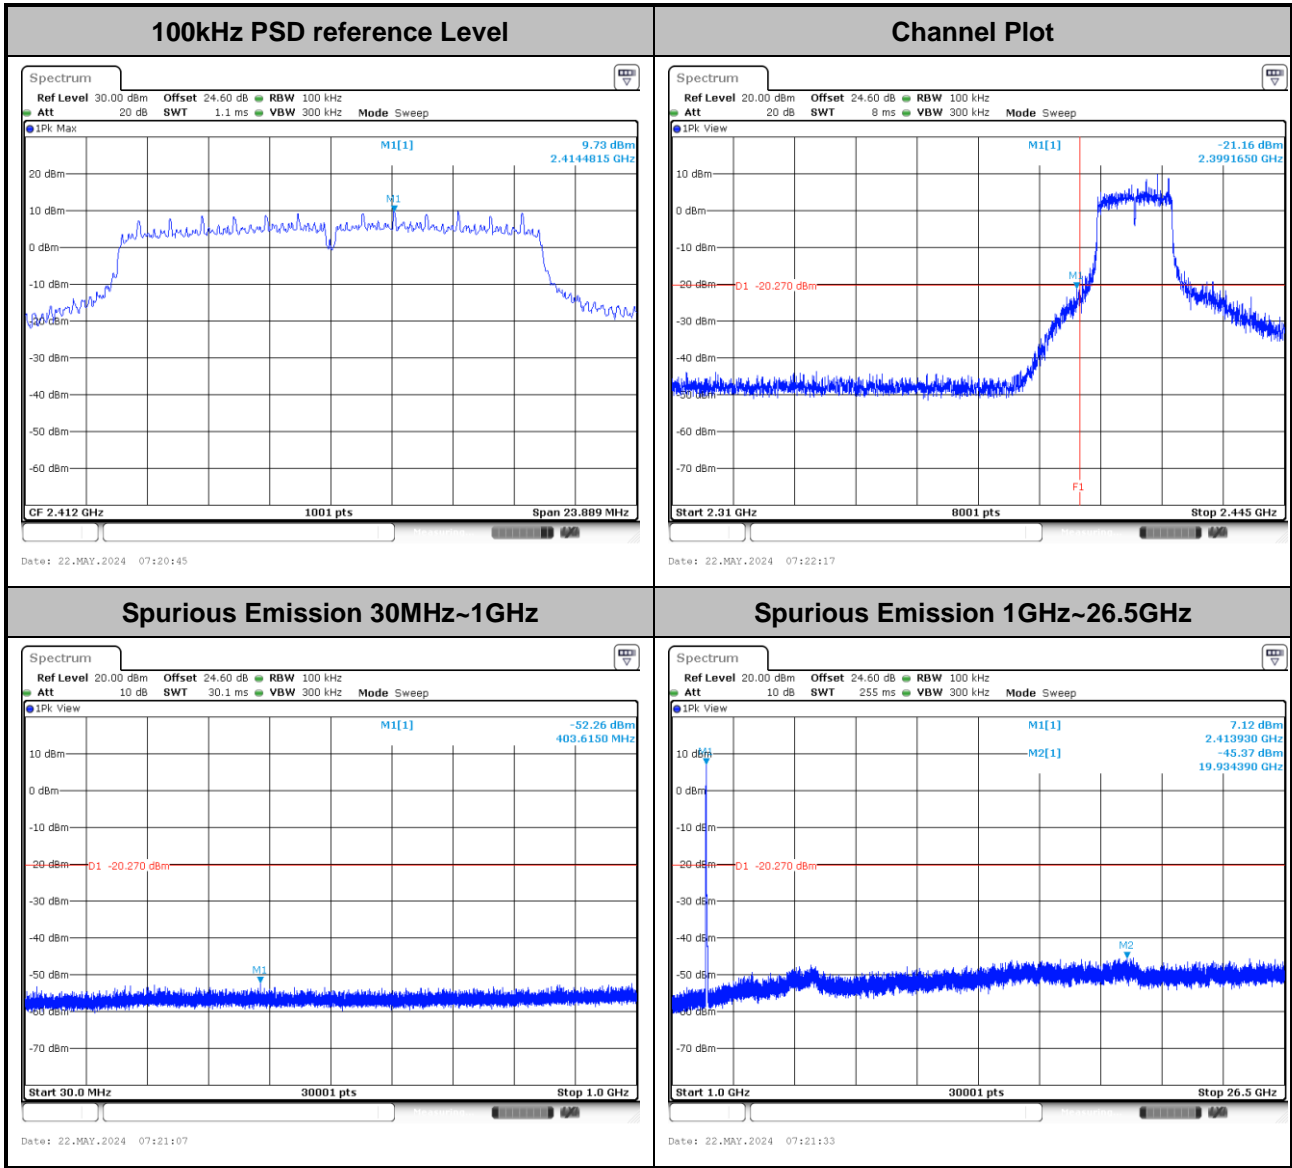




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

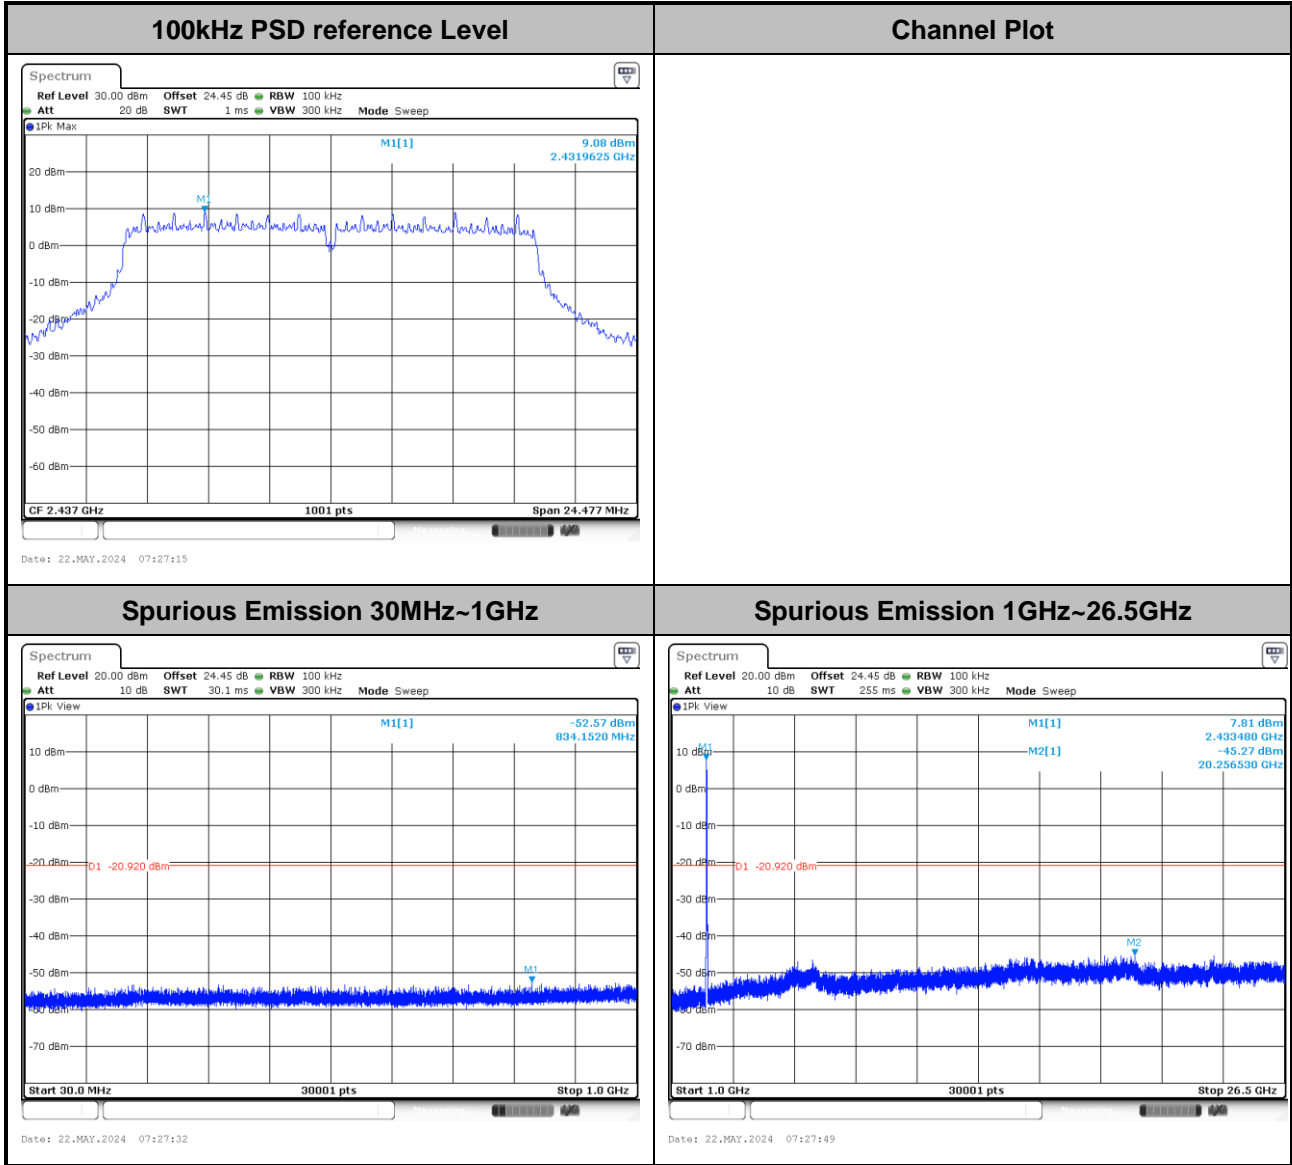




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

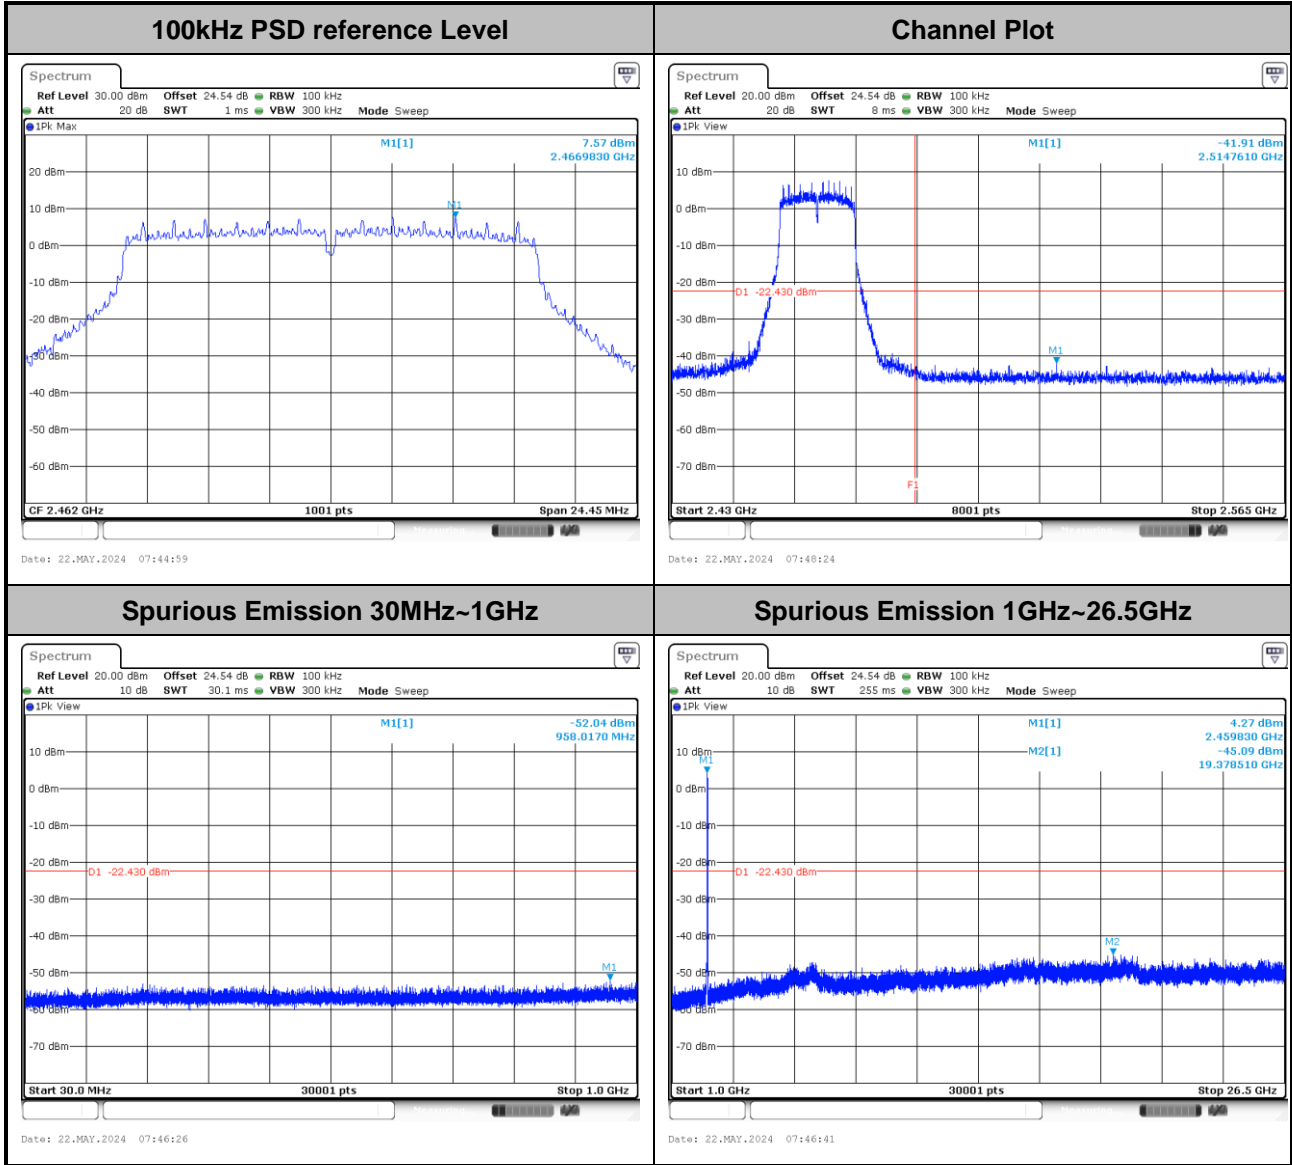




Test Mode :	802.11ac VHT20	Test Channel :	01
-------------	----------------	----------------	----

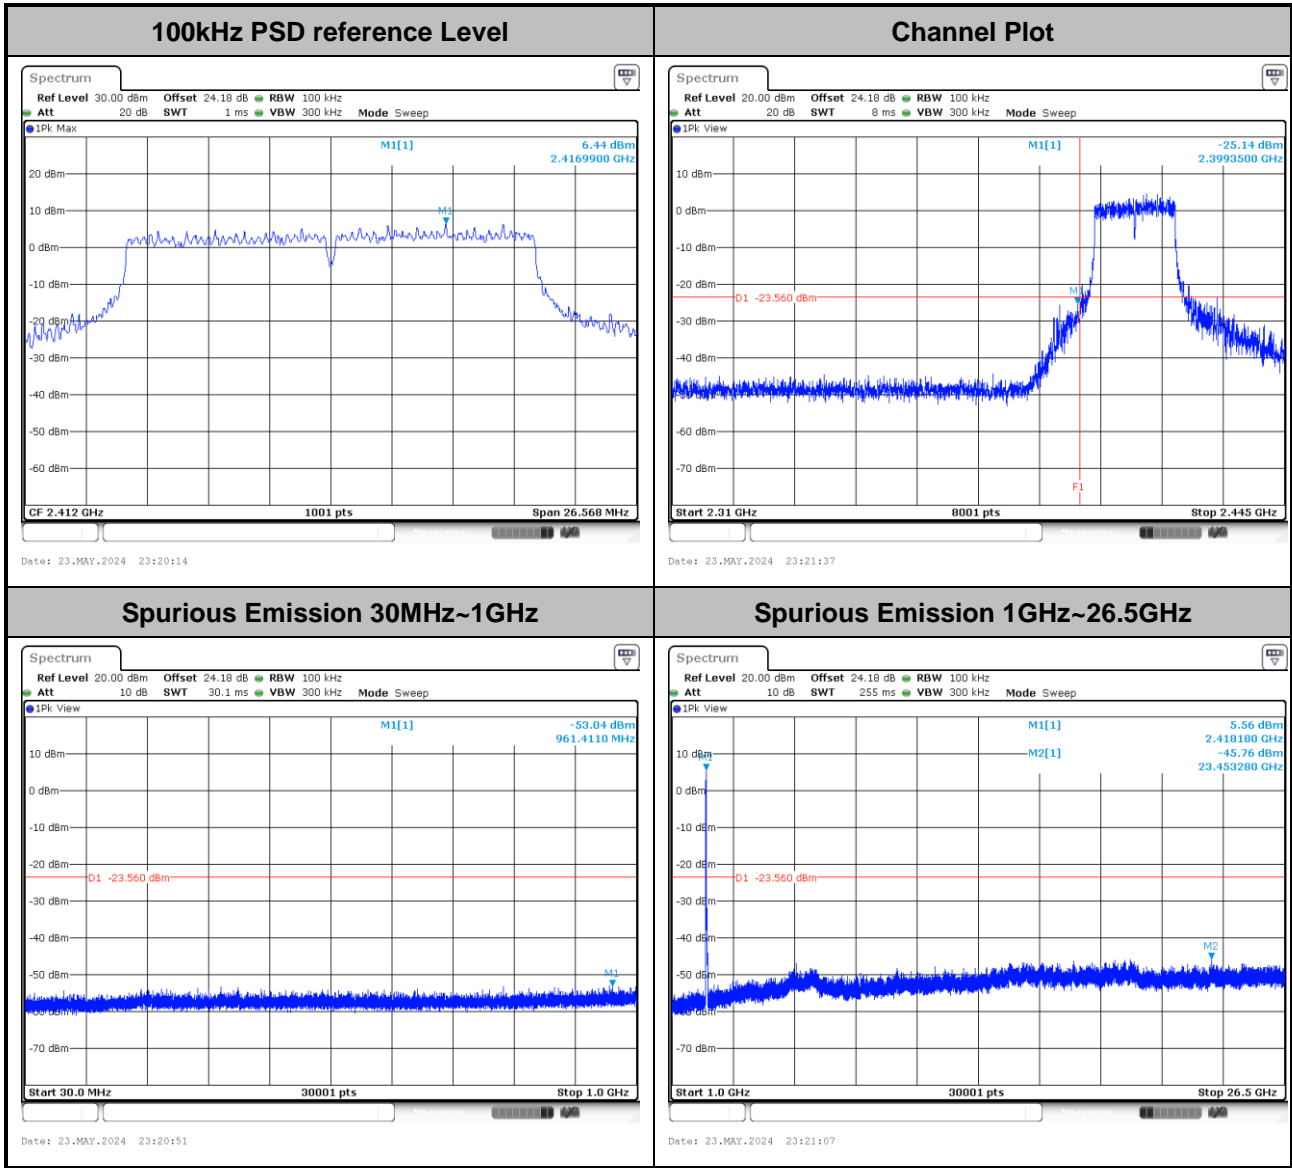




<b>Test Mode :</b>	802.11ac VHT20	<b>Test Channel :</b>	06
--------------------	----------------	-----------------------	----

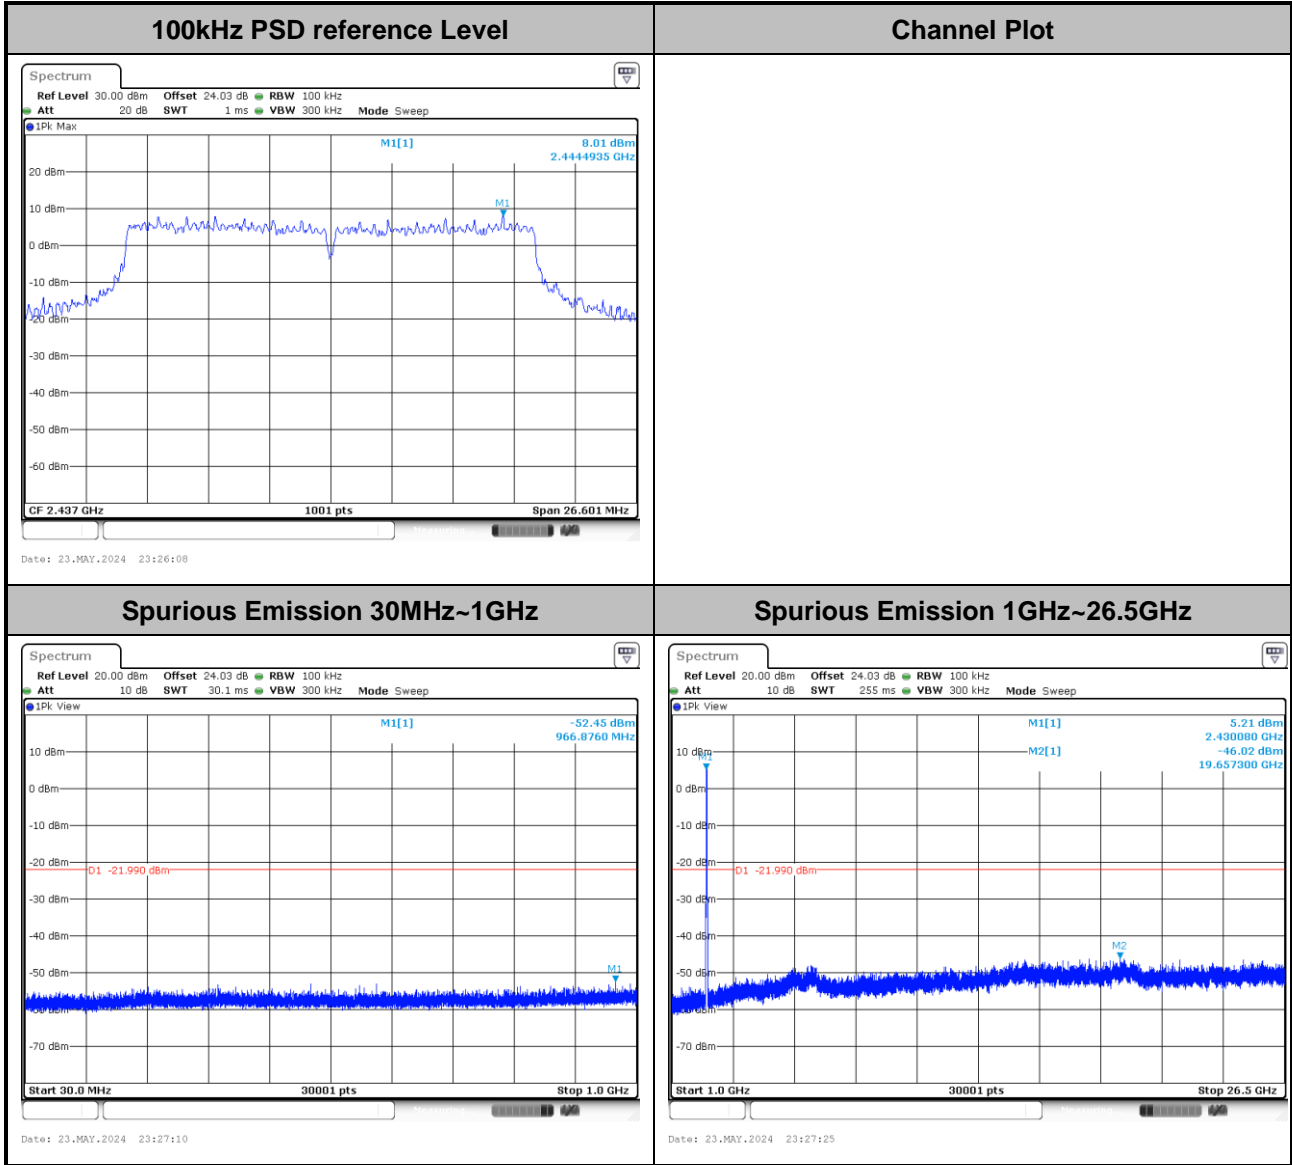




Test Mode :	802.11ac VHT20	Test Channel :	11
-------------	----------------	----------------	----

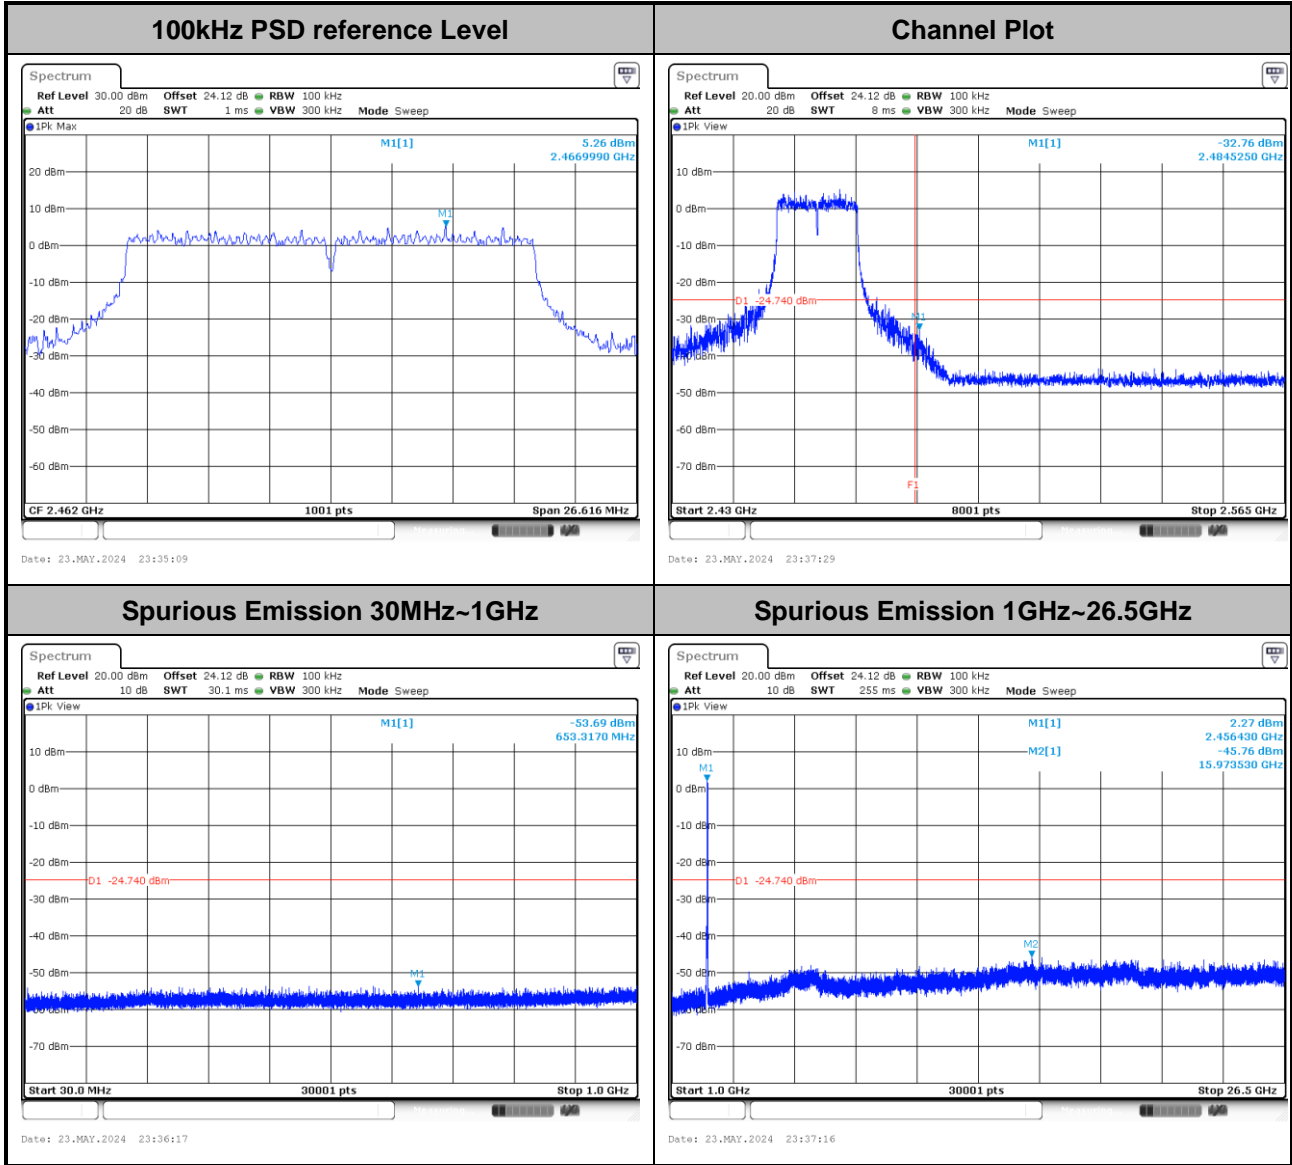




Test Mode :	802.11ax HE20_FullRU	Test Channel :	01
-------------	----------------------	----------------	----

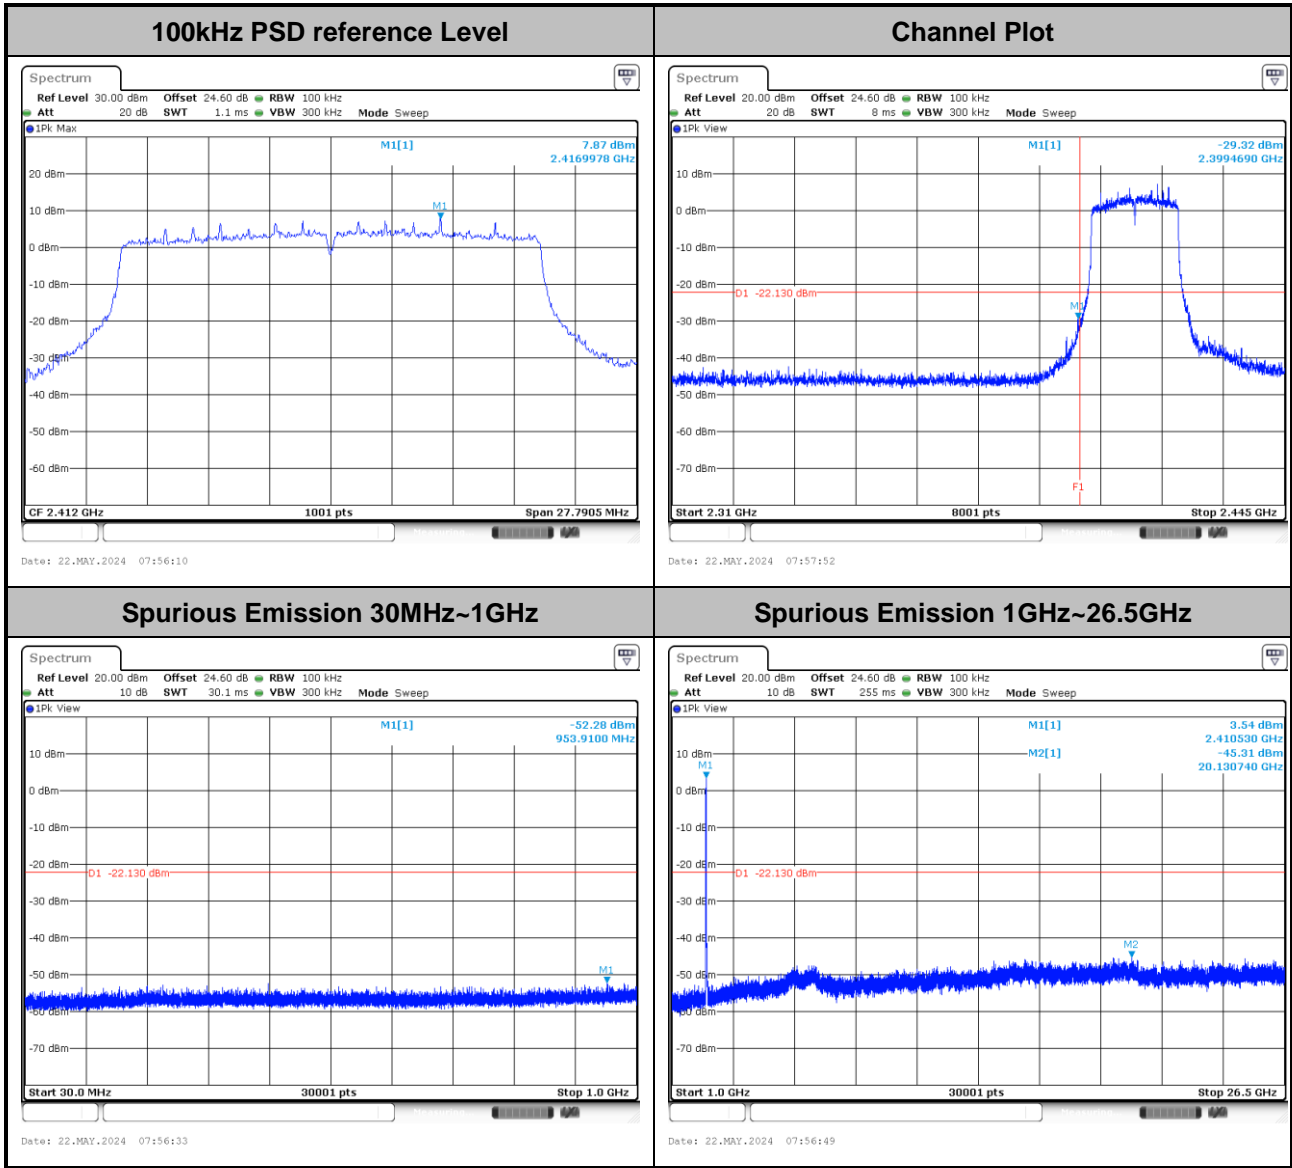




Test Mode :	802.11ax HE20_FullIRU	Test Channel :	06
-------------	-----------------------	----------------	----

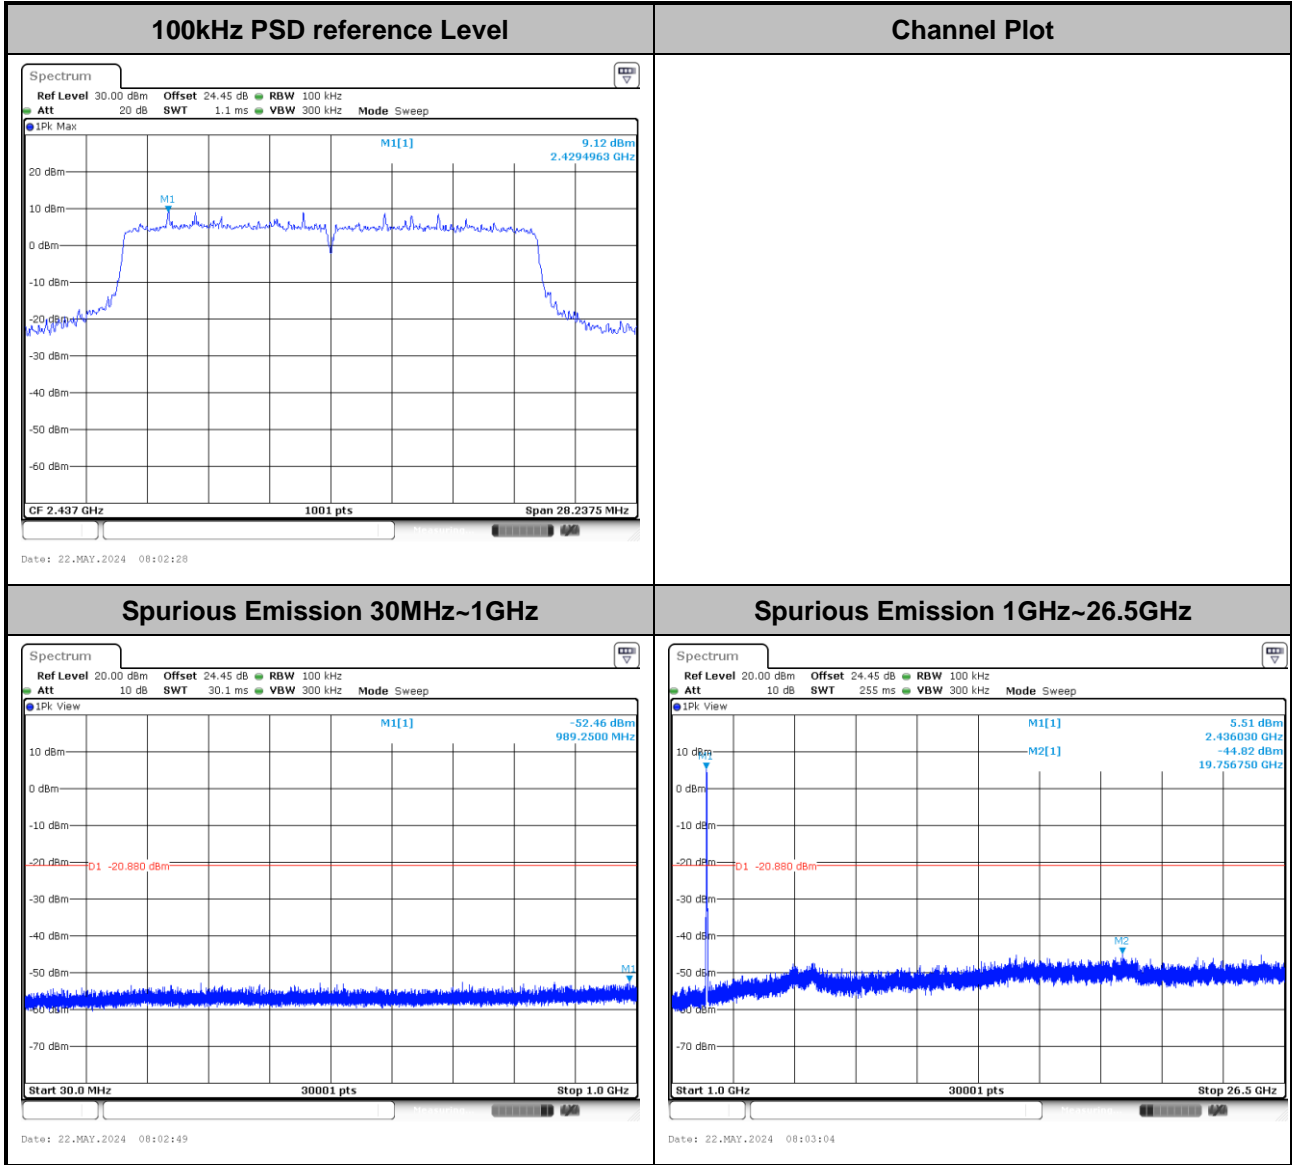





Test Mode :	802.11ax HE20_FullRU	Test Channel :	11
-------------	----------------------	----------------	----

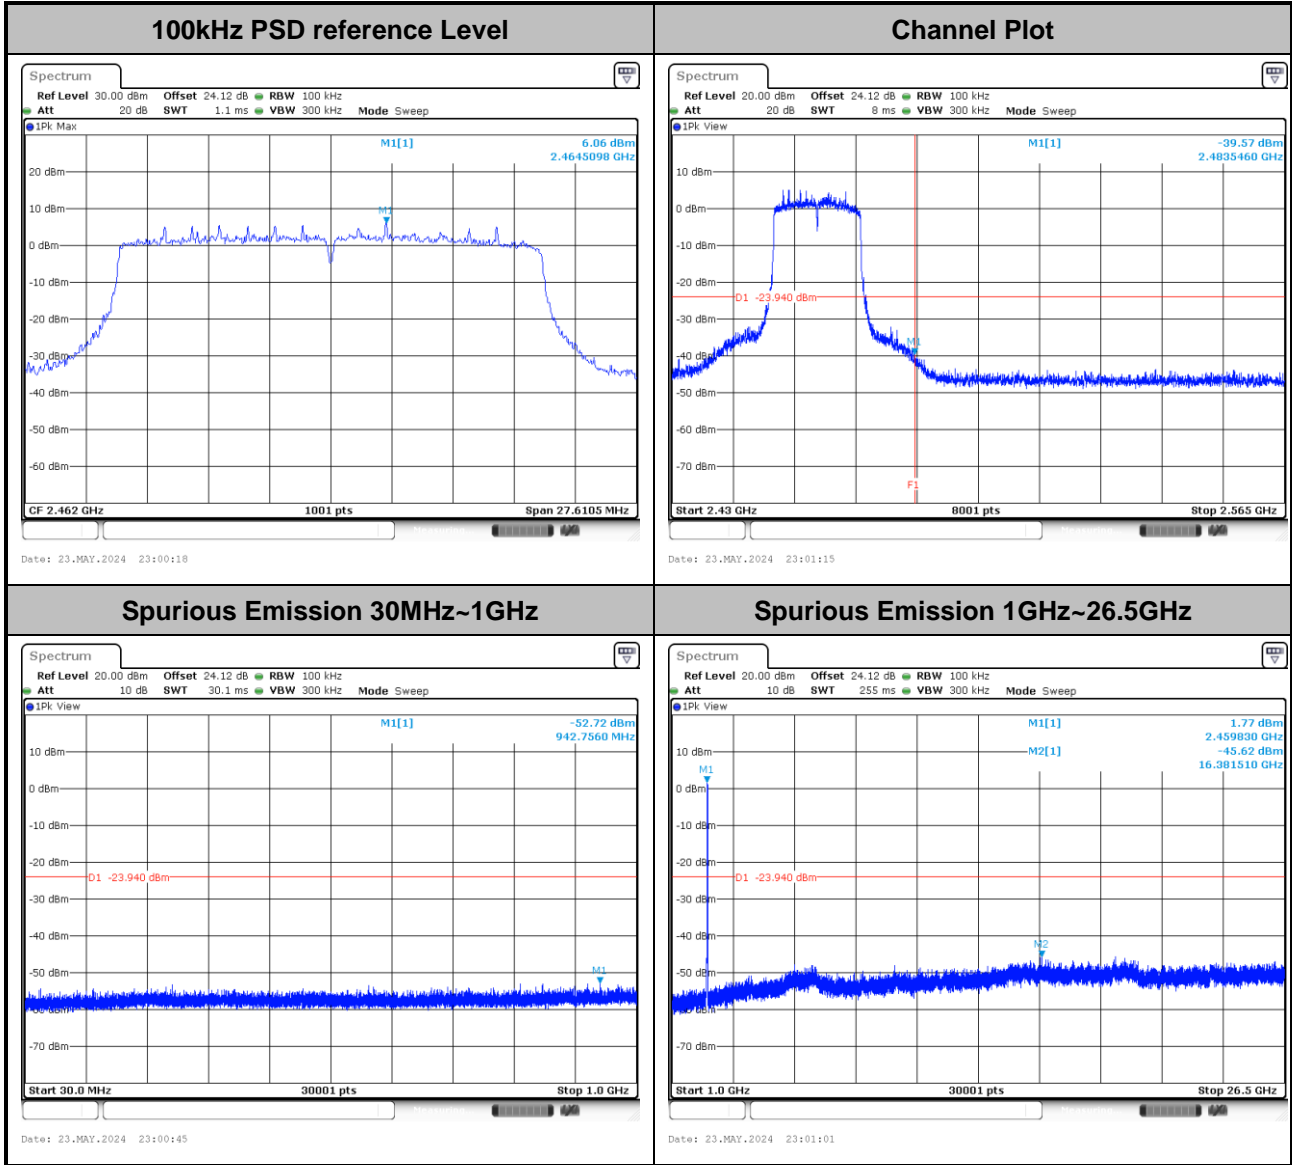




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	24.3~26.8°C
		Relative Humidity :	55.5~67.1%

## EUT Information

Report NO : 443061  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

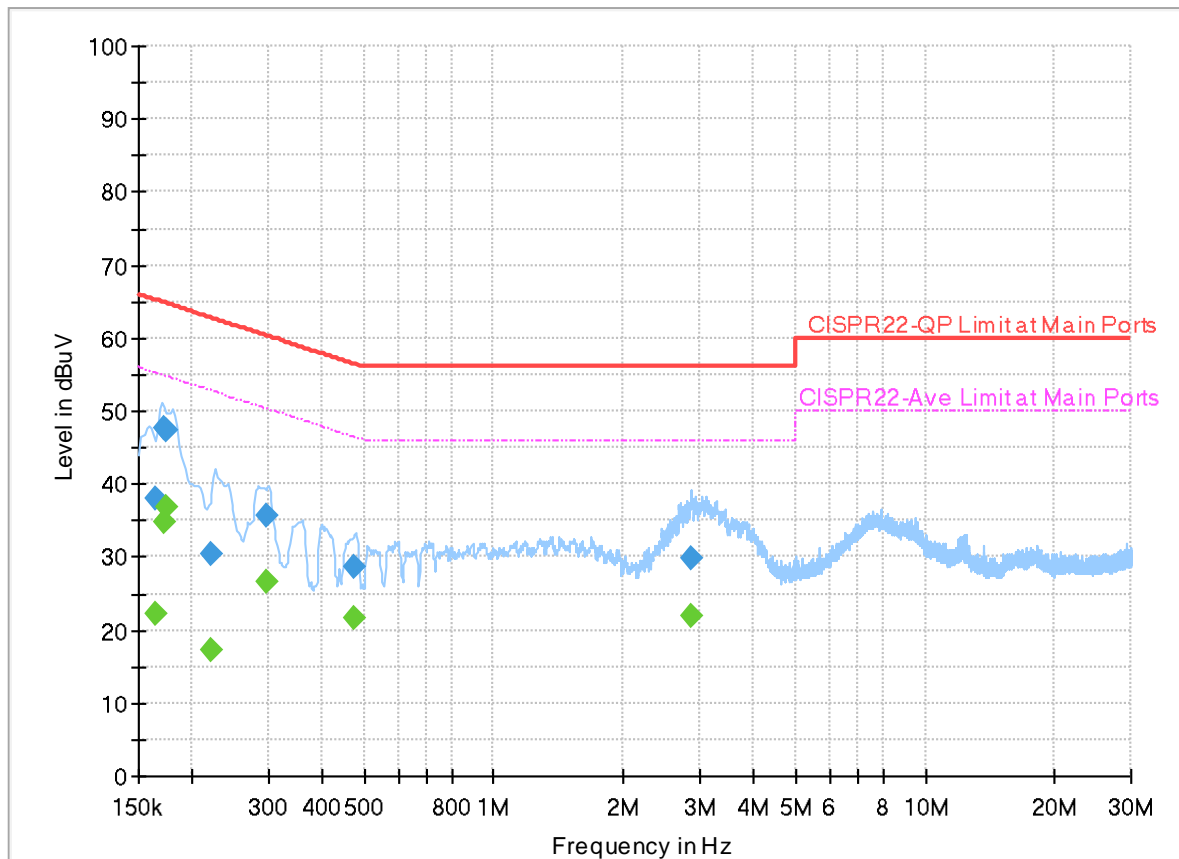


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.163500	---	22.08	55.28	33.20	L1	OFF	19.9
0.163500	38.04	---	65.28	27.24	L1	OFF	19.9
0.171690	---	34.71	54.88	20.17	L1	OFF	19.9
0.171690	47.66	---	64.88	17.22	L1	OFF	19.9
0.174750	---	36.88	54.73	17.85	L1	OFF	19.9
0.174750	47.40	---	64.73	17.33	L1	OFF	19.9
0.222000	---	17.14	52.74	35.60	L1	OFF	19.9
0.222000	30.35	---	62.74	32.39	L1	OFF	19.9
0.296250	---	26.62	50.35	23.73	L1	OFF	19.9
0.296250	35.61	---	60.35	24.74	L1	OFF	19.9
0.474000	---	21.65	46.44	24.79	L1	OFF	19.9
0.474000	28.54	---	56.44	27.90	L1	OFF	19.9
2.877000	---	22.04	46.00	23.96	L1	OFF	20.0
2.877000	29.76	---	56.00	26.24	L1	OFF	20.0

# EUT Information

Report NO : 443061  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

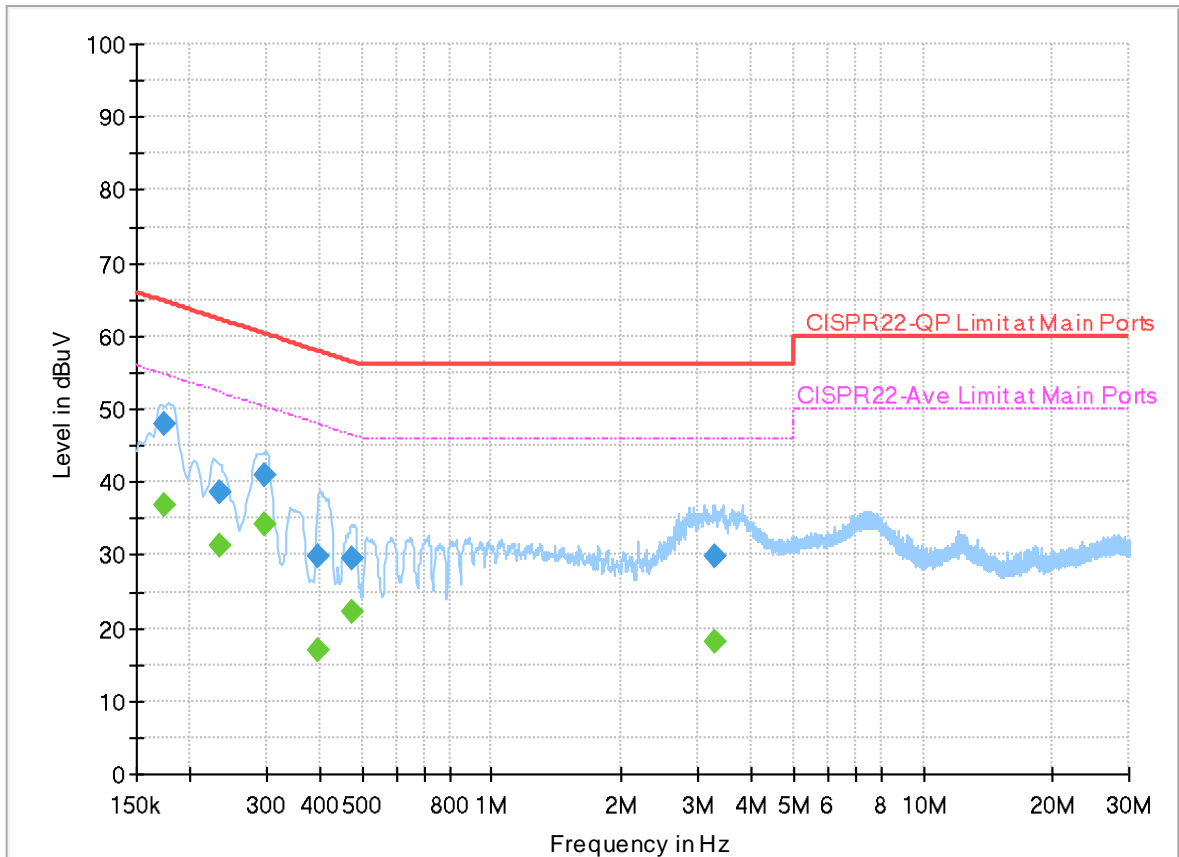

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.173130	---	36.85	54.81	17.96	N	OFF	19.9
0.173130	48.04	---	64.81	16.77	N	OFF	19.9
0.233250	---	31.39	52.33	20.94	N	OFF	19.9
0.233250	38.61	---	62.33	23.72	N	OFF	19.9
0.296250	---	34.22	50.35	16.13	N	OFF	19.9
0.296250	40.87	---	60.35	19.48	N	OFF	19.9
0.393000	---	16.82	48.00	31.18	N	OFF	19.9
0.393000	29.80	---	58.00	28.20	N	OFF	19.9
0.476250	---	22.28	46.40	24.12	N	OFF	19.9
0.476250	29.62	---	56.40	26.78	N	OFF	19.9
3.275250	---	18.25	46.00	27.75	N	OFF	20.0
3.275250	29.79	---	56.00	26.21	N	OFF	20.0



### Appendix C. Radiated Spurious Emission

Test Engineer :	BANK Lin, Fred Tseng and Karl Hou	Temperature :	21.5~24.9°C
		Relative Humidity :	50.1~60.9%

<Sample 1>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
6+7		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11b CH 01 2412MHz		2388.54	51.97	-22.03	74	39.05	26.91	18.36	32.35	100	62	P	H	
		2388.75	42.83	-11.17	54	29.91	26.91	18.36	32.35	100	62	A	H	
	*	2412	110.68	-	-	97.67	26.98	18.4	32.37	100	62	P	H	
	*	2412	107.61	-	-	94.58	27	18.4	32.37	100	62	A	H	
													H	
														H
			2387.91	55.72	-18.28	74	42.79	26.92	18.36	32.35	172	94	P	V
			2388.015	48.6	-5.4	54	35.67	26.92	18.36	32.35	172	94	A	V
	*		2412	119.39	-	-	106.38	26.98	18.4	32.37	172	94	P	V
	*		2412	116.31	-	-	103.3	26.98	18.4	32.37	172	94	A	V
														V
														V
802.11b CH 06 2437MHz		2366.96	50.78	-23.22	74	37.8	27	18.32	32.34	100	302	P	H	
		2388.88	39.44	-14.56	54	26.52	26.91	18.36	32.35	100	302	A	H	
	*	2437	111.9	-	-	99.03	26.8	18.45	32.38	100	302	P	H	
	*	2437	108.92	-	-	96.05	26.8	18.45	32.38	100	302	A	H	
			2485.28	51.65	-22.35	74	38.63	26.9	18.53	32.41	100	302	P	H
			2483.52	41.56	-12.44	54	28.54	26.9	18.53	32.41	100	302	A	H
			2340.24	51.18	-22.82	74	38.23	27	18.27	32.32	119	92	P	V
			2389.36	40.1	-13.9	54	27.18	26.91	18.36	32.35	119	92	A	V
	*		2437	118.35	-	-	105.48	26.8	18.45	32.38	119	92	P	V
	*		2437	115.26	-	-	102.39	26.8	18.45	32.38	119	92	A	V
			2483.76	53.27	-20.73	74	40.25	26.9	18.53	32.41	119	92	P	V
			2484.88	42.16	-11.84	54	29.14	26.9	18.53	32.41	119	92	A	V



WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 11 2462MHz													H	
													H	
	*	2462	104.45	-	-	91.56	26.8	8.65	32.4	105	11	P	H	
	*	2462	101.33	-	-	88.44	26.8	8.65	32.4	105	11	A	H	
		2486.44	54.13	-19.87	74	41.1	26.9	8.7	32.41	105	11	P	H	
		2486.68	45.03	-8.97	54	32	26.9	8.7	32.41	105	11	A	H	
														V
														V
	*	2462	117.15	-	-	104.26	26.8	8.65	32.4	151	90	P	V	
	*	2462	114	-	-	101.11	26.8	8.65	32.4	151	90	A	V	
		2483.52	57.85	-16.15	74	44.83	26.9	8.69	32.41	151	90	P	V	
		2483.52	52.73	-1.27	54	39.71	26.9	8.69	32.41	151	90	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		4824	52.09	-21.91	74	40.14	32.4	13.05	33.5	143	305	P	H	
		4824	49.12	-4.88	54	37.17	32.4	13.05	33.5	143	305	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4824	50.51	-23.49	74	38.56	32.4	13.05	33.5	318	244	P	V
			4824	45.74	-8.26	54	33.79	32.4	13.05	33.5	318	244	A	V
														V
														V
														V
														V
														V
														V
													V	



WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11b CH 06 2437MHz		4874	53.23	-20.77	74	41.1	32.55	13.07	33.49	204	347	P	H	
		4874	48.69	-5.31	54	36.56	32.55	13.07	33.49	204	347	A	H	
		7311	54.53	-19.47	74	36.87	37.5	16	35.84	300	285	P	H	
		7311	48.64	-5.36	54	30.98	37.5	16	35.84	300	285	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4874	49.26	-24.74	74	37.13	32.55	13.07	33.49	398	174	P	V
			4874	45.19	-8.81	54	33.06	32.55	13.07	33.49	398	174	A	V
			7311	55.84	-18.16	74	38.18	37.5	16	35.84	140	314	P	V
			7311	50.17	-3.83	54	32.51	37.5	16	35.84	140	314	A	V
														V
														V
														V
													V	
													V	
													V	
													V	





WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 11 2462MHz		4924	52.1	-21.9	74	39.83	32.65	13.1	33.48	245	332	P	H
		4924	48.34	-5.66	54	36.07	32.65	13.1	33.48	245	332	A	H
		7386	52.72	-21.28	74	35.09	37.43	16.09	35.89	311	284	P	H
		7386	46.54	-7.46	54	28.91	37.43	16.09	35.89	311	284	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4924	50.02	-23.98	74	37.75	32.65	13.1	33.48	368	258	P	V
		4924	44.86	-9.14	54	32.59	32.65	13.1	33.48	368	258	A	V
		7386	54.64	-19.36	74	37.01	37.43	16.09	35.89	100	297	P	V
		7386	48.62	-5.38	54	30.99	37.43	16.09	35.89	100	297	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11g CH 01 2412MHz		2390	59.12	-14.88	74	46.21	26.9	18.36	32.35	130	73	P	H	
		2390	46.26	-7.74	54	33.35	26.9	18.36	32.35	130	73	A	H	
	*	2412	115.66	-	-	102.65	26.98	18.4	32.37	130	73	P	H	
	*	2412	107.51	-	-	94.5	26.98	18.4	32.37	130	73	A	H	
													H	
														H
			2390	61.76	-12.24	74	48.85	26.9	18.36	32.35	100	94	P	V
			2390	51.46	-2.54	54	38.55	26.9	18.36	32.35	100	94	A	V
	*		2412	119.25	-	-	106.24	26.98	18.4	32.37	100	94	P	V
	*		2412	112.04	-	-	99.03	26.98	18.4	32.37	100	94	A	V
														V
														V
802.11g CH 06 2437MHz		2329.68	50.87	-23.13	74	37.84	27.1	18.25	32.32	297	64	P	H	
		2389.84	39.63	-14.37	54	26.72	26.9	18.36	32.35	297	64	A	H	
	*	2437	115.02	-	-	102.15	26.8	18.45	32.38	297	64	P	H	
	*	2437	107.5	-	-	94.63	26.8	18.45	32.38	297	64	A	H	
			2484.24	55.98	-18.02	74	42.96	26.9	18.53	32.41	297	64	P	H
			2483.52	45.33	-8.67	54	32.31	26.9	18.53	32.41	297	64	A	H
			2366.96	50.54	-23.46	74	37.56	27	18.32	32.34	102	88	P	V
			2390	40.54	-13.46	54	27.63	26.9	18.36	32.35	102	88	A	V
	*		2437	120.1	-	-	107.23	26.8	18.45	32.38	102	88	P	V
	*		2437	112.08	-	-	99.21	26.8	18.45	32.38	102	88	A	V
			2483.6	58.98	-15.02	74	45.96	26.9	18.53	32.41	102	88	P	V
			2483.52	48.19	-5.81	54	35.17	26.9	18.53	32.41	102	88	A	V



WiFi Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 11 2462MHz	*	2462	113.31	-	-	100.42	26.8	18.49	32.4	192	73	P	H
	*	2462	105.08	-	-	92.19	26.8	18.49	32.4	192	73	A	H
		2483.6	60.98	-13.02	74	47.96	26.9	18.53	32.41	192	73	P	H
		2483.52	50.11	-3.89	54	37.09	26.9	18.53	32.41	192	73	A	H
													H
													H
	*	2462	117.2	-	-	104.31	26.8	18.49	32.4	102	90	P	V
	*	2462	108.95	-	-	96.06	26.8	18.49	32.4	102	90	A	V
		2484.72	61.4	-12.6	74	48.38	26.9	18.53	32.41	102	90	P	V
		2483.52	50.91	-3.09	54	37.89	26.9	18.53	32.41	102	90	A	V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 01 2412MHz		4824	48.01	-25.99	74	36.06	32.4	13.05	33.5	110	353	P	H	
		4824	38.25	-15.75	54	26.3	32.4	13.05	33.5	110	353	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4824	46.01	-27.99	74	34.06	32.4	13.05	33.5	100	285	P	V
			4824	37.13	-16.87	54	25.18	32.4	13.05	33.5	100	285	A	V
														V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11g CH 06 2437MHz		4874	47.16	-26.84	74	35.03	32.55	13.07	33.49	-	-	P	H	
		7311	58.71	-15.29	74	41.05	37.5	16	35.84	302	269	P	H	
		7311	48.23	-5.77	54	30.57	37.5	16	35.84	302	269	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4874	46.25	-27.75	74	34.12	32.55	13.07	33.49	-	-	P	V
			7311	61.5	-12.5	74	43.84	37.5	16	35.84	100	318	P	V
			7311	50.07	-3.93	54	32.41	37.5	16	35.84	100	318	A	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WiFi Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
<b>802.11g CH 11 2462MHz</b>		4924	46.98	-27.02	74	34.71	32.65	13.1	33.48	-	-	P	H	
		7386	51.74	-22.26	74	34.11	37.43	16.09	35.89	300	243	P	H	
		7386	42.26	-11.74	54	24.63	37.43	16.09	35.89	300	243	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4924	46	-28	74	33.73	32.65	13.1	33.48	-	-	P	V
			7386	54.66	-19.34	74	37.03	37.43	16.09	35.89	100	315	P	V
			7386	43.41	-10.59	54	25.78	37.43	16.09	35.89	100	315	A	V
														V
														V
														V
														V
														V
													V	
<b>Remark</b>	<p>1. No other spurious found.</p> <p>2. All results are PASS against Peak and Average limit line.</p> <p>3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</p>													



**2.4GHz 2400~2483.5MHz  
WIFI 802.11ac VHT20 (Band Edge @ 3m)**

WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT20 CH 11 2462MHz	*	2462	114.4	-	-	101.51	26.8	18.49	32.4	296	69	P	H
	*	2462	106.17	-	-	93.28	26.8	18.49	32.4	296	69	A	H
		2483.64	61.84	-12.16	74	48.82	26.9	18.53	32.41	296	69	P	H
		2483.52	50.94	-3.06	54	37.92	26.9	18.53	32.41	296	69	A	H
													H
													H
	*	2462	117.86	-	-	104.97	26.8	18.49	32.4	100	93	P	V
	*	2462	109.84	-	-	96.95	26.8	18.49	32.4	100	93	A	V
		2483.52	63.28	-10.72	74	50.26	26.9	18.53	32.41	100	93	P	V
		2483.52	51.1	-2.9	54	38.08	26.9	18.53	32.41	100	93	A	V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11ac VHT20 CH 11 2462MHz		4924	46.27	-27.73	74	34	32.65	13.1	33.48	-	-	P	H	
		7386	59.1	-14.9	74	41.47	37.43	16.09	35.89	294	262	P	H	
		7386	44.31	-9.69	54	26.68	37.43	16.09	35.89	294	262	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4924	45.57	-28.43	74	33.3	32.65	13.1	33.48	-	-	P	V
			7386	61.22	-12.78	74	43.59	37.43	16.09	35.89	100	315	P	V
			7386	45.76	-8.24	54	28.13	37.43	16.09	35.89	100	315	A	V
														V
														V
														V
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													





**2.4GHz 2400~2483.5MHz  
WIFI 802.11ax HE20 Full (Band Edge @ 3m)**

WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11ax HE20 Full CH 01 2412MHz		2389.485	61.35	-12.65	74	48.43	26.91	18.36	32.35	100	68	P	H	
		2390	45.73	-8.27	54	32.82	26.9	18.36	32.35	100	68	A	H	
	*	2412	114.8	-	-	101.79	26.98	18.4	32.37	100	68	P	H	
	*	2412	106.16	-	-	93.15	26.98	18.4	32.37	100	68	A	H	
													H	
														H
			2389.59	63.75	-10.25	74	50.84	26.9	18.36	32.35	137	90	P	V
			2390	51.74	-2.26	54	38.83	26.9	18.36	32.35	137	90	A	V
		*	2412	120.53	-	-	107.52	26.98	18.4	32.37	137	90	P	V
		*	2412	110.92	-	-	97.91	26.98	18.4	32.37	137	90	A	V
													V	
													V	
802.11ax HE20 Full CH 06 2437MHz		2380.72	50.53	-23.47	74	37.55	26.99	18.34	32.35	101	301	P	H	
		2390	39.83	-14.17	54	26.92	26.9	18.36	32.35	101	301	A	H	
		*	2437	118.94	-	-	106.07	26.8	18.45	32.38	101	301	P	H
		*	2437	109.38	-	-	96.51	26.8	18.45	32.38	101	301	A	H
			2483.52	59.11	-14.89	74	46.09	26.9	18.53	32.41	101	301	P	H
			2483.52	47.1	-6.9	54	34.08	26.9	18.53	32.41	101	301	A	H
			2389.84	54.49	-19.51	74	41.58	26.9	18.36	32.35	155	89	P	V
			2390	43.58	-10.42	54	30.67	26.9	18.36	32.35	155	89	A	V
		*	2437	119.66	-	-	106.79	26.8	18.45	32.38	155	89	P	V
		*	2437	111.06	-	-	98.19	26.8	18.45	32.38	155	89	A	V
		2483.68	60.94	-13.06	74	47.92	26.9	18.53	32.41	155	89	P	V	
		2483.52	48.79	-5.21	54	35.77	26.9	18.53	32.41	155	89	A	V	



WIFI Ant. 6+7	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE20 Full CH 11 2462MHz	*	2462	114.75	-	-	101.86	26.8	18.49	32.4	200	71	P	H
	*	2462	104.99	-	-	92.1	26.8	18.49	32.4	200	71	A	H
		2483.68	62.64	-11.36	74	49.62	26.9	18.53	32.41	200	71	P	H
		2483.52	51.22	-2.78	54	38.2	26.9	18.53	32.41	200	71	A	H
													H
													H
	*	2462	117.86	-	-	104.97	26.8	18.49	32.4	100	94	P	V
	*	2462	108.54	-	-	95.65	26.8	18.49	32.4	100	94	A	V
		2483.56	66.33	-7.67	74	53.31	26.9	18.53	32.41	100	94	P	V
		2483.52	52.31	-1.69	54	39.29	26.9	18.53	32.41	100	94	A	V
												V	
												V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												