

System Check_Body_900MHz

DUT: D900V2-043

Communication System: CW ; Frequency: 900 MHz;Duty Cycle: 1:1

Medium: MSL_900_170922 Medium parameters used: $f = 900$ MHz; $\sigma = 1.024$ S/m; $\epsilon_r = 56.693$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.49, 9.49, 9.49); Calibrated: 2017/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2016/12/15
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1164
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7373)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.77 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 62.97 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 4.23 W/kg
SAR(1 g) = 2.85 W/kg; SAR(10 g) = 1.89 W/kg
Maximum value of SAR (measured) = 3.76 W/kg

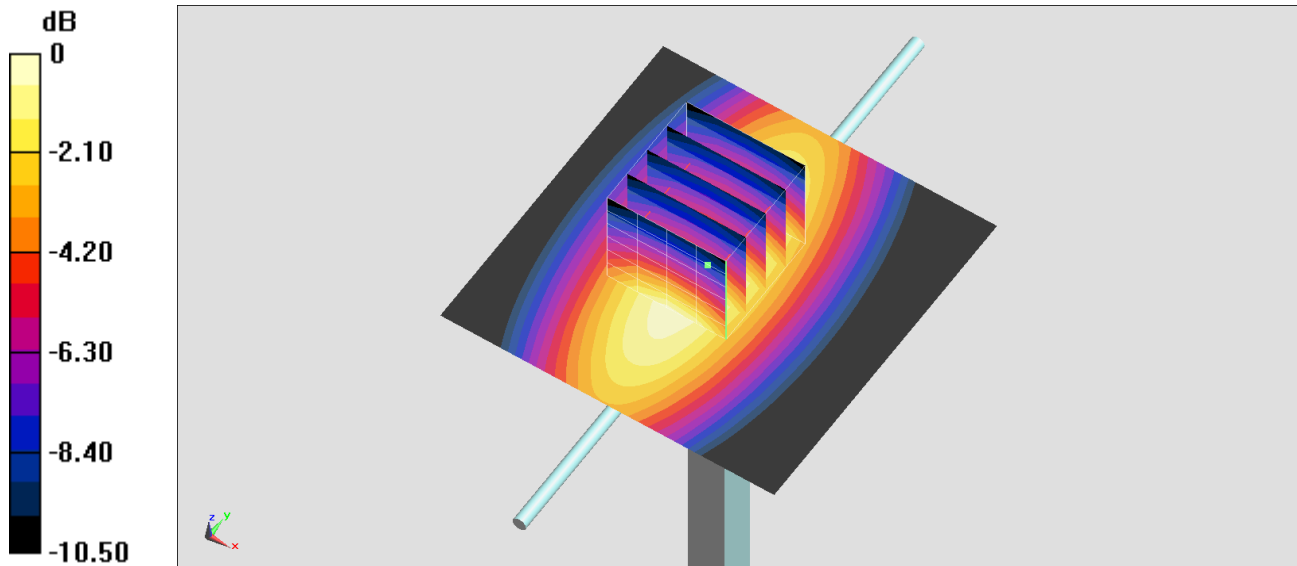

0 dB = 3.76 W/kg = 5.75 dBW/kg