



FCC RADIO TEST REPORT

FCC ID : UZ7RTL10B1
Equipment : Tablet
Brand Name : Zebra
Model Name : RTL10B1
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Feb. 22, 2019 and testing was started from Apr. 09, 2019 and completed on May 03, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	7
1.3 Modification of EUT	7
1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.5 Testing Location	8
1.6 Applicable Standards	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Result	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power and ERP/EIRP	12
3.3 Peak-to-Average Ratio	13
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.5 Conducted Band Edge	15
3.6 Conducted Spurious Emission	16
3.7 Frequency Stability.....	17
4 Radiated Test Items	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 List of Measuring Equipment.....	20
6 Uncertainty of Evaluation	21
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	
Appendix C. Test Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power		
	§24.232 (c)	Equivalent Isotropic Radiated Power		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission	Pass	-
3.7	§2.1055 §22.355	Frequency Stability Temperature & Voltage	Pass	-
	§2.1055 §24.235 §27.54			-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation	Pass	Under limit 20.22 dB at 3704.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Natasha Hsieh



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Brand Name	Zebra
Model Name	RTL10B1
FCC ID	UZ7RTL10B1
Sample 1	EUT with SKU 1 + Keyboard
Sample 2	EUT with SKU 1
Sample 3	EUT with SKU 2
Sample 4	EUT with SKU 3
Sample 5	EUT with SKU 4
EUT supports Radios application	WCDMA/HSPA/LTE/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DV0
SW Version	Android version 8.1.0
FW Version - Xpad	01-17-09.00-OG-U00-PLT
FW Version - Xslate	01-17-05.00-OG-U00-PRD
FW Version - Xbook	01-17-05.00-OG-U00-PRD
MFD - Xpad	19MAR01
MFD - Xslate	19MAR01
MFD - Xbook	19MAR01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
AC Adapter	Brand Name	Delta	Model Name	ADP-65JH HB
Spare Standard Battery 36Whr	Brand Name	XPLORE	Model Name	XLBM1
Keyboard dock	Brand Name	XPLORE	Model Name	LX-KB
Touch Pen	Brand Name	WACOM	Model Name	CP-903-05B-2
Touch Pen	Brand Name	EMPIA	Model Name	EPNB-8C1000-0000 40820A01
Touch Pen	Brand Name	HAO SHUAN	Model Name	440007



<Sample Information>

	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5
DV0	SKU 1+ Keyboard	L10A - SKU1	L10A - SKU2	L10A - SKU3	L10A - SKU4
ID	Xbook	XSLATE	XPAD	XPAD	XPAD
OS	Refer Xslate	Android O	Android O	Android O	Android O
CPU		Qualcomm SDM660	Qualcomm SDM660	Qualcomm SDM660	Qualcomm SDM660
Display with touch		Panasonic EP101R1912N50 0TG 10.1" LCD (500nits)	Panasonic EP101R1912N50 0TG 10.1" LCD (500nits)	Panasonic EP101R1912N50 0TG 10.1" LCD (1000nits)	Panasonic EP101R1912N50 0TG 10.1" LCD (1000nits) with digitizer
Memory		Samsung LPDDR4 4GB Hynix LPDD4 4 GB	Samsung LPDDR4 4GB Hynix LPDD4 4 GB	Samsung LPDDR4 4GB Micron LPDD4 4 GB	Samsung LPDDR4 4GB Micron LPDD4 4 GB
eMMC		TOSHIBA 64GB	TOSHIBA 64GB	TOSHIBA 64GB	TOSHIBA 64GB
GPS		Qualcomm	Qualcomm	Qualcomm	Qualcomm
WWAN		Qualcomm	Qualcomm	Qualcomm	Qualcomm
WLAN		Qualcomm WCN3990	Qualcomm WCN3990	Qualcomm WCN3990	Qualcomm WCN3990
Antenna		WLAN*2/NFC /GPS/WWAN*2	WLAN*2/NFC /GPS/WWAN*2	WLAN*2/NFC /GPS/WWAN*2	WLAN*2/NFC /GPS/WWAN*2
Barcode Reader		No	Yes	Yes	Yes
HDMI		No	No	Yes	No
Serial Port		No	Yes	No	No



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	WCDMA: Band V: 24.34 dBm Band II: 23.39 dBm Band IV: 24.20 dBm
Antenna Type	PCB Antenna
Antenna Gain	Cellular Band: 1.40 dBi PCS Band: 2.96 dBi AWS Band: 2.96 dBi
Type of Modulation	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	826.4 ~ 846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.2286	0.0167 ppm	4M14F9W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.4315	0.0037 ppm	4M14F9W
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.5200	0.0179 ppm	4M15F9W



1.5 Testing Location

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW1190 and TW0007

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X Plane for Cellular Band ; Z Plane for PCS Band and AWS Band) were recorded in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for WCDMA Band II.


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Sample 2.

2.2 Connection Diagram of Test System

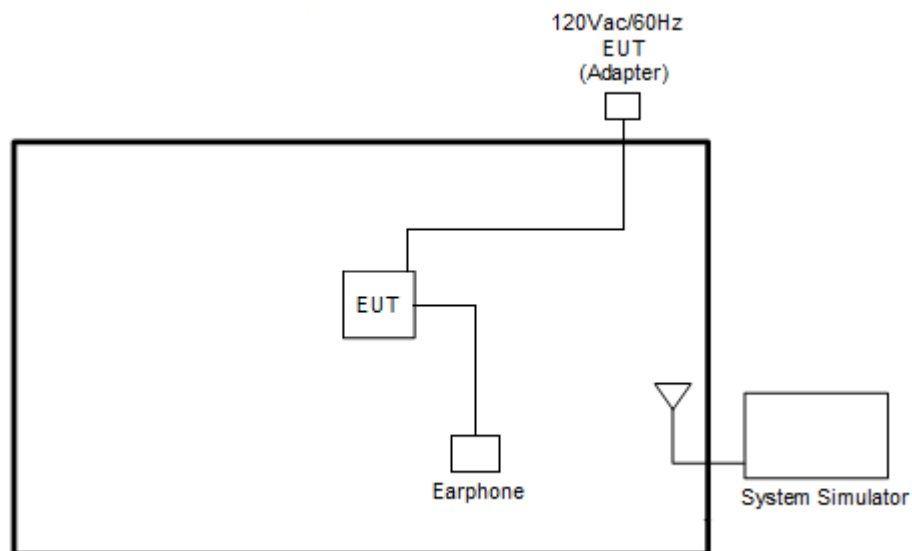



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	A1387	Verification	Unshielded, 1.0 m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

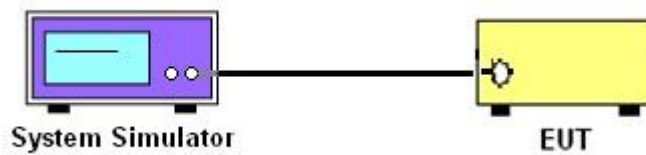

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

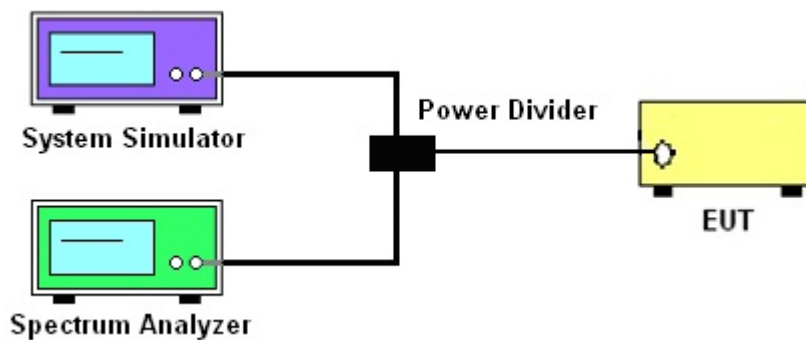

3.1.4 Frequency Stability

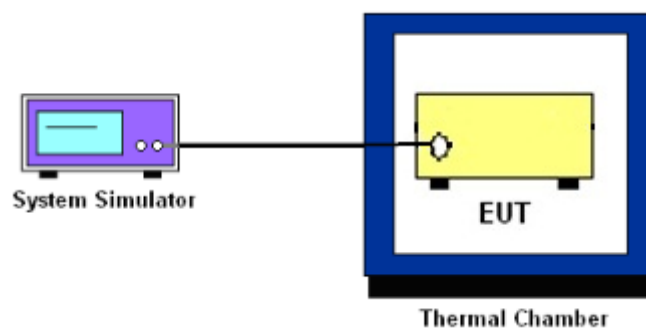

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.



3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

For radiated test from 30MHz to 1GHz

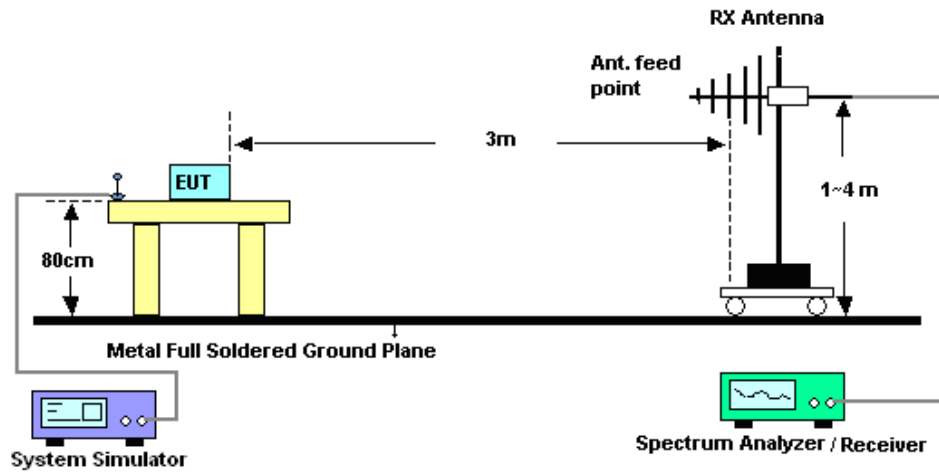

For radiated test above 1GHz

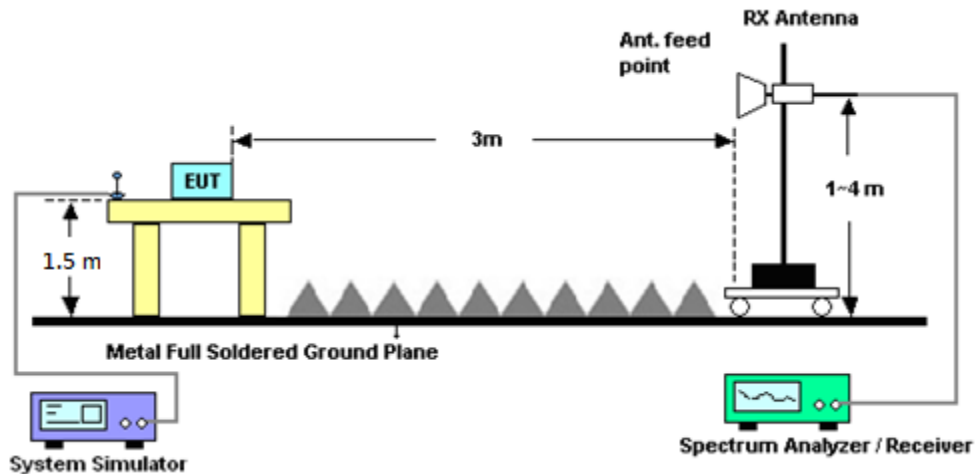

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201107509	-	Mar. 02, 2019	Apr. 10, 2019	Mar. 01, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	May 03, 2019	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Dec. 06, 2017	May 03, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V; Current:0~5A	Dec. 06, 2017	May 03, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 10, 2018	May 03, 2019	Aug. 09, 2019	Conducted (TH03-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Apr. 09, 2019~ Apr. 12, 2019	Dec. 05, 2019	Radiation (03CH15-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Apr. 09, 2019~ Apr. 12, 2019	Jan. 06, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	May 08, 2018	Apr. 09, 2019~ Apr. 12, 2019	May 07, 2019	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2018	Apr. 09, 2019~ Apr. 12, 2019	Dec. 27, 2019	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&0800N1D01N-06	41912&05	30MHz to 1GHz	Feb. 12, 2019	Apr. 09, 2019~ Apr. 12, 2019	Feb. 11, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1620	1G~18GHz	Oct. 17, 2018	Apr. 09, 2019~ Apr. 12, 2019	Oct. 16, 2019	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 23, 2018	Apr. 09, 2019~ Apr. 12, 2019	Aug. 22, 2019	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	Apr. 25, 2018	Apr. 09, 2019~ Apr. 12, 2019	Apr. 24, 2019	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 09, 2019~ Apr. 12, 2019	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 09, 2019~ Apr. 12, 2019	N/A	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Nov. 20, 2018	Apr. 09, 2019~ Apr. 12, 2019	Nov. 19, 2019	Radiation (03CH15-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2018	Apr. 09, 2019~ Apr. 12, 2019	May 21, 2019	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Sep. 07, 2018	Apr. 09, 2019~ Apr. 12, 2019	Sep. 06, 2019	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24	RK-000451	N/A	N/A	Apr. 09, 2019~ Apr. 12, 2019	N/A	Radiation (03CH15-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.37
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.67
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.03
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	24.34	24.30	24.27	23.30	23.39	23.31
HSDPA Subtest-1	23.39	23.38	23.33	22.35	22.50	22.44
HSDPA Subtest-2	23.43	23.34	23.31	22.41	22.48	22.45
HSDPA Subtest-3	22.93	22.88	22.84	21.93	21.99	22.00
HSDPA Subtest-4	22.91	22.86	22.84	21.89	21.98	21.97
HSUPA Subtest-1	23.39	23.40	23.36	22.39	22.49	22.49
HSUPA Subtest-2	21.49	21.38	21.40	20.32	20.48	20.49
HSUPA Subtest-3	22.42	22.37	22.27	21.40	21.50	21.50
HSUPA Subtest-4	21.38	21.37	21.33	20.41	20.50	20.49
HSUPA Subtest-5	23.40	23.40	23.40	22.40	22.50	22.50

Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	24.11	24.20	24.17
HSDPA Subtest-1	22.99	23.20	23.27
HSDPA Subtest-2	23.02	23.18	23.24
HSDPA Subtest-3	22.53	22.68	22.75
HSDPA Subtest-4	22.51	22.68	22.75
HSUPA Subtest-1	23.03	23.20	23.28
HSUPA Subtest-2	21.04	21.21	21.27
HSUPA Subtest-3	22.02	22.23	22.02
HSUPA Subtest-4	21.03	21.23	21.28
HSUPA Subtest-5	23.10	23.20	23.20










A2. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.88	3.00	2.68	PASS
Middle CH	3.08	2.88	2.92	
Highest CH	3.04	2.88	2.88	

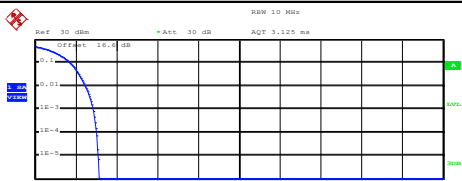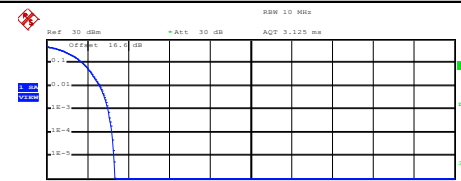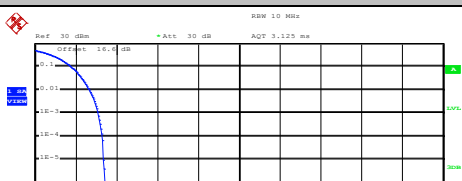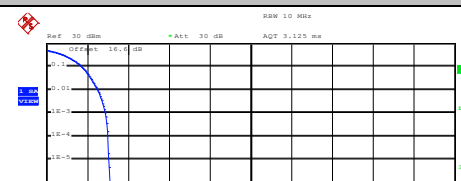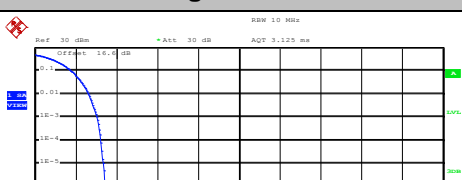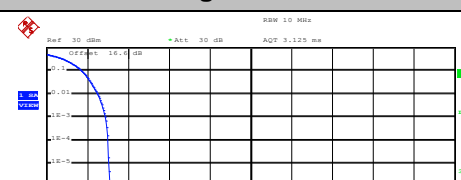

WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																
<p style="text-align: center;">Lowest Channel</p>  <p>Center 826.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 24.57 dBm Peak 27.71 dBm Crest 3.14 dB</p> <table border="1"> <tr><td>10 %</td><td>1.72 dB</td></tr> <tr><td>1 %</td><td>2.48 dB</td></tr> <tr><td>.1 %</td><td>2.88 dB</td></tr> <tr><td>.01 %</td><td>3.04 dB</td></tr> </table> <p>Date: 2.MAY.2019 18:42:46</p>	10 %	1.72 dB	1 %	2.48 dB	.1 %	2.88 dB	.01 %	3.04 dB	<p style="text-align: center;">Lowest Channel</p>  <p>Center 1.8524 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.95 dBm Peak 26.30 dBm Crest 3.35 dB</p> <table border="1"> <tr><td>10 %</td><td>1.76 dB</td></tr> <tr><td>1 %</td><td>2.60 dB</td></tr> <tr><td>.1 %</td><td>3.00 dB</td></tr> <tr><td>.01 %</td><td>3.20 dB</td></tr> </table> <p>Date: 2.MAY.2019 18:17:08</p>	10 %	1.76 dB	1 %	2.60 dB	.1 %	3.00 dB	.01 %	3.20 dB
10 %	1.72 dB																
1 %	2.48 dB																
.1 %	2.88 dB																
.01 %	3.04 dB																
10 %	1.76 dB																
1 %	2.60 dB																
.1 %	3.00 dB																
.01 %	3.20 dB																
<p style="text-align: center;">Middle Channel</p>  <p>Center 830.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 24.50 dBm Peak 27.92 dBm Crest 3.42 dB</p> <table border="1"> <tr><td>10 %</td><td>1.76 dB</td></tr> <tr><td>1 %</td><td>2.68 dB</td></tr> <tr><td>.1 %</td><td>3.08 dB</td></tr> <tr><td>.01 %</td><td>3.32 dB</td></tr> </table> <p>Date: 2.MAY.2019 18:43:03</p>	10 %	1.76 dB	1 %	2.68 dB	.1 %	3.08 dB	.01 %	3.32 dB	<p style="text-align: center;">Middle Channel</p>  <p>Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.05 dBm Peak 26.16 dBm Crest 3.11 dB</p> <table border="1"> <tr><td>10 %</td><td>1.72 dB</td></tr> <tr><td>1 %</td><td>2.52 dB</td></tr> <tr><td>.1 %</td><td>2.88 dB</td></tr> <tr><td>.01 %</td><td>3.00 dB</td></tr> </table> <p>Date: 2.MAY.2019 18:17:42</p>	10 %	1.72 dB	1 %	2.52 dB	.1 %	2.88 dB	.01 %	3.00 dB
10 %	1.76 dB																
1 %	2.68 dB																
.1 %	3.08 dB																
.01 %	3.32 dB																
10 %	1.72 dB																
1 %	2.52 dB																
.1 %	2.88 dB																
.01 %	3.00 dB																
<p style="text-align: center;">Highest Channel</p>  <p>Center 846.6 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 24.42 dBm Peak 27.85 dBm Crest 3.43 dB</p> <table border="1"> <tr><td>10 %</td><td>1.76 dB</td></tr> <tr><td>1 %</td><td>2.64 dB</td></tr> <tr><td>.1 %</td><td>3.04 dB</td></tr> <tr><td>.01 %</td><td>3.24 dB</td></tr> </table> <p>Date: 2.MAY.2019 18:43:21</p>	10 %	1.76 dB	1 %	2.64 dB	.1 %	3.04 dB	.01 %	3.24 dB	<p style="text-align: center;">Highest Channel</p>  <p>Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.05 dBm Peak 26.16 dBm Crest 3.11 dB</p> <table border="1"> <tr><td>10 %</td><td>1.72 dB</td></tr> <tr><td>1 %</td><td>2.52 dB</td></tr> <tr><td>.1 %</td><td>2.88 dB</td></tr> <tr><td>.01 %</td><td>3.00 dB</td></tr> </table> <p>Date: 2.MAY.2019 18:17:42</p>	10 %	1.72 dB	1 %	2.52 dB	.1 %	2.88 dB	.01 %	3.00 dB
10 %	1.76 dB																
1 %	2.64 dB																
.1 %	3.04 dB																
.01 %	3.24 dB																
10 %	1.72 dB																
1 %	2.52 dB																
.1 %	2.88 dB																
.01 %	3.00 dB																

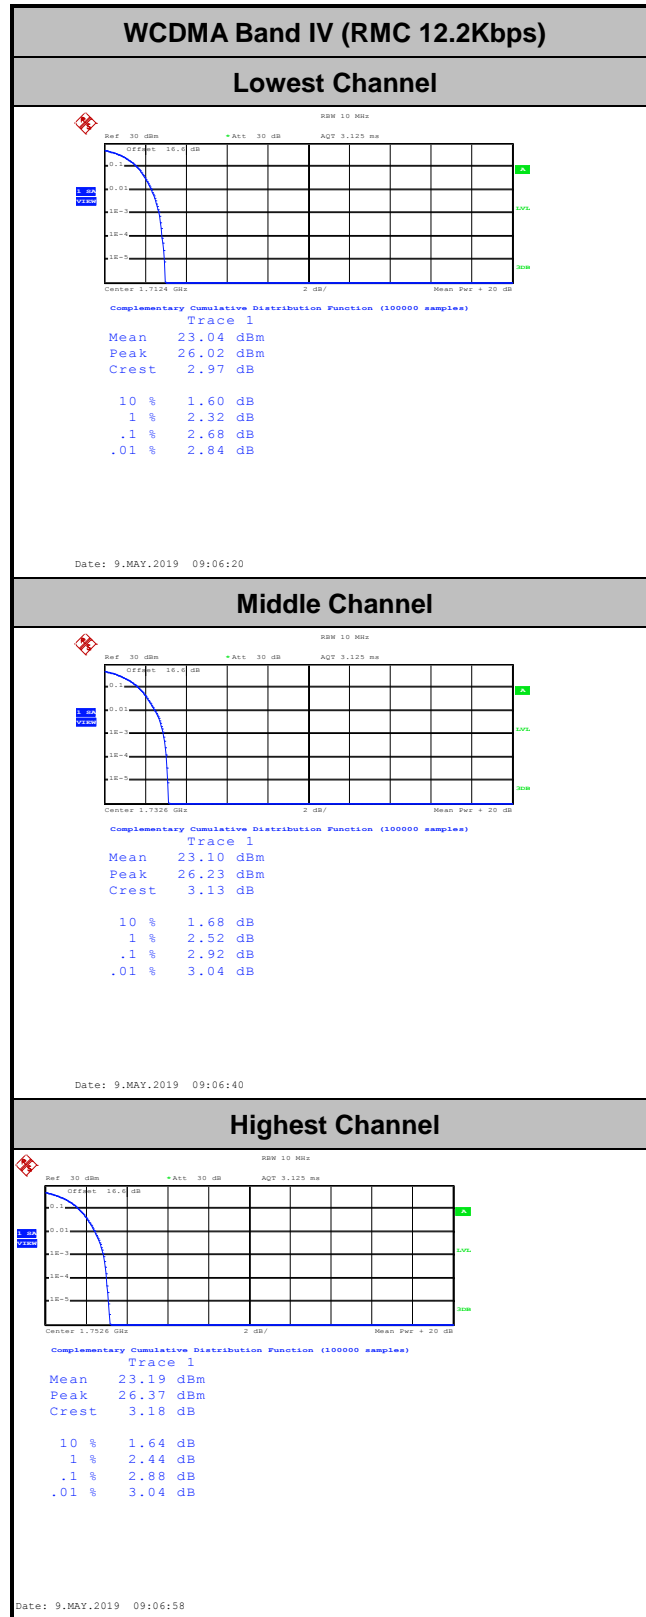



26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.72	4.73
Middle CH	4.70	4.71	4.72
Highest CH	4.70	4.71	4.72





WCDMA Band V (RMC 12.2Kbps)

WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

Lowest Channel

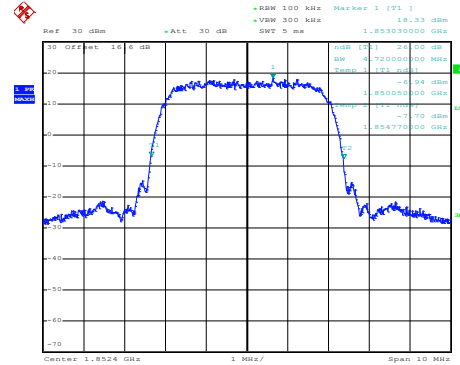
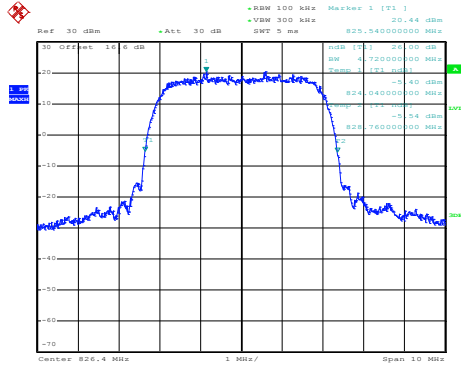


Date: 2.MAY.2019 18:29:29

Date: 2.MAY.2019 18:04:23

Middle Channel

Middle Channel

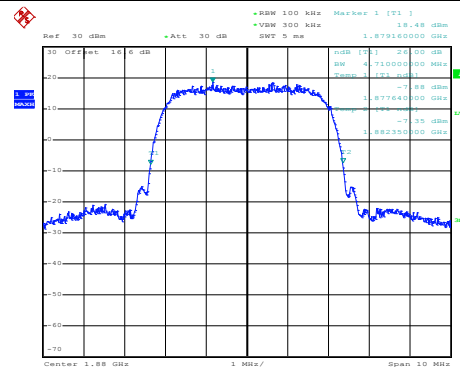
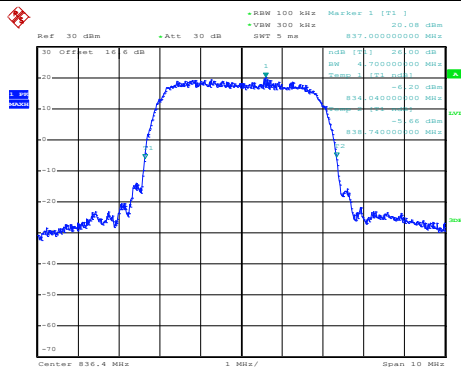


Date: 2.MAY.2019 18:30:05

Date: 2.MAY.2019 18:04:59

Highest Channel

Highest Channel

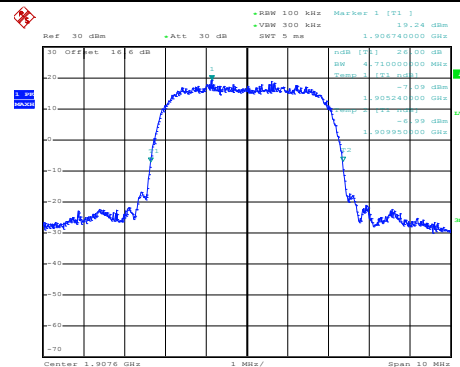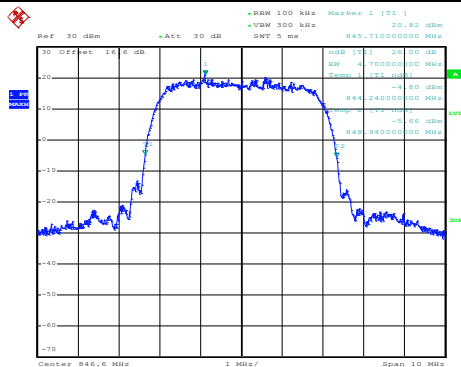


Date: 2.MAY.2019 18:30:57

Date: 2.MAY.2019 18:05:36




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

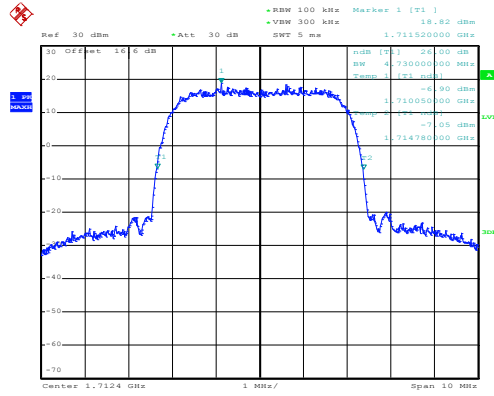


Date: 9.MAY.2019 08:53:20

Middle Channel

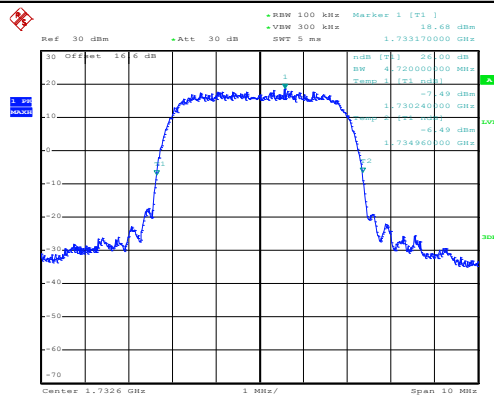

Date: 9.MAY.2019 08:54:09

Highest Channel

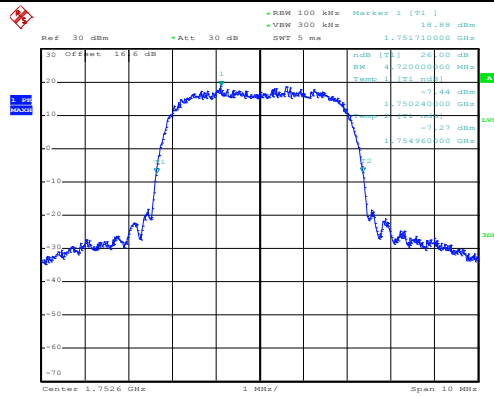

Date: 9.MAY.2019 08:54:48



Occupied Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.14	4.15
Middle CH	4.14	4.14	4.14
Highest CH	4.13	4.14	4.14




WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
<p style="text-align: center;">Lowest Channel</p> <p>Date: 2.MAY.2019 18:32:06</p>	<p style="text-align: center;">Lowest Channel</p> <p>Date: 2.MAY.2019 18:06:19</p>
<p style="text-align: center;">Middle Channel</p> <p>Date: 2.MAY.2019 18:32:43</p>	<p style="text-align: center;">Middle Channel</p> <p>Date: 2.MAY.2019 18:06:59</p>
<p style="text-align: center;">Highest Channel</p> <p>Date: 2.MAY.2019 18:33:21</p>	<p style="text-align: center;">Highest Channel</p> <p>Date: 2.MAY.2019 18:07:37</p>




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

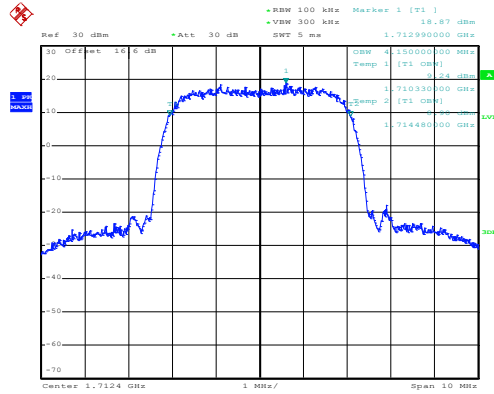


Date: 9.MAY.2019 08:55:31

Middle Channel

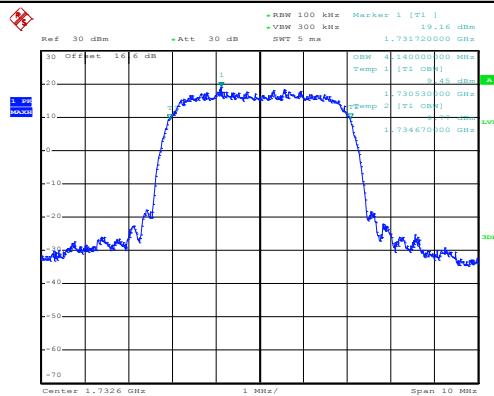

Date: 9.MAY.2019 08:56:06

Highest Channel

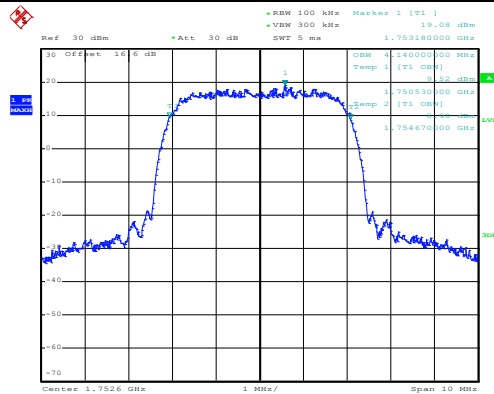


Date: 9.MAY.2019 08:56:43



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

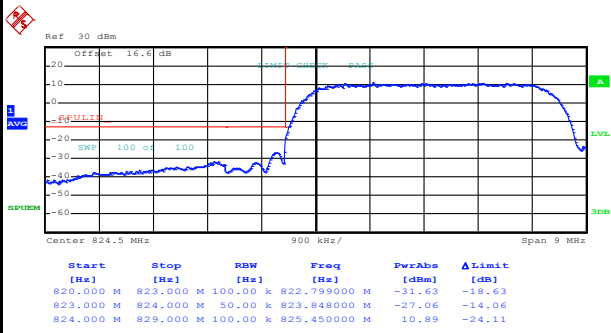

Date: 2.MAY.2019 18:36:24

Highest Band Edge

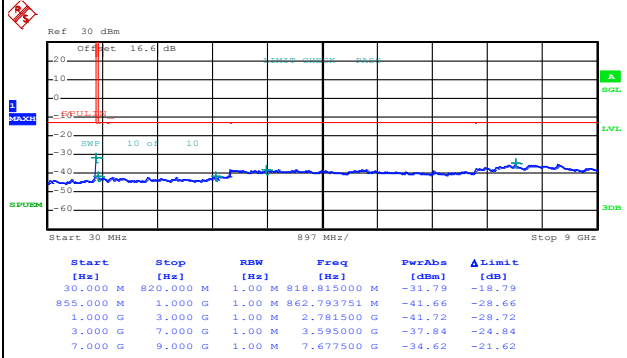


Date: 2.MAY.2019 18:40:22




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

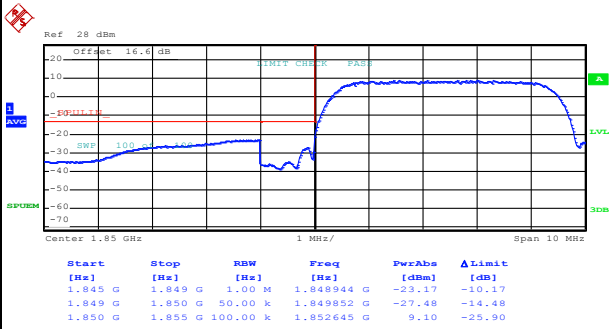

Date: 2.MAY.2019 18:10:34

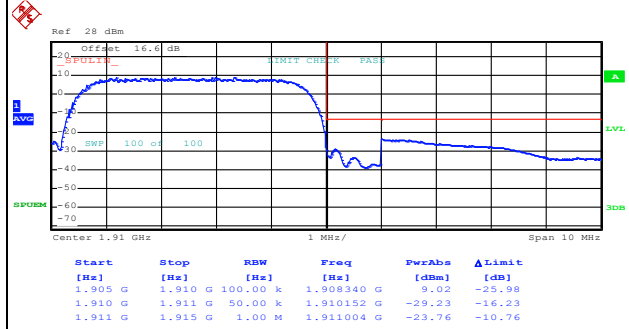


Date: 2.MAY.2019 18:13:30




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

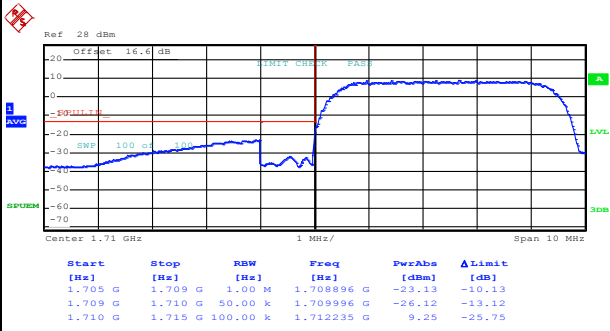







Date: 9.MAY.2019 08:59:41

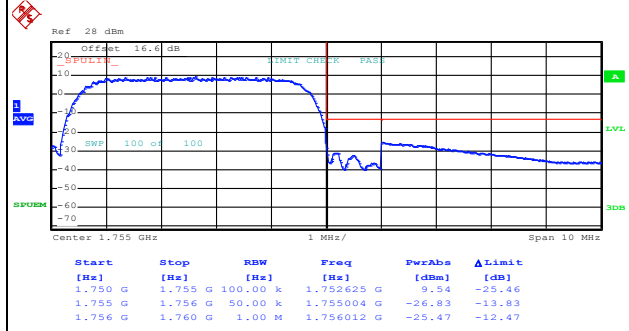

Date: 9.MAY.2019 09:03:03




Conducted Spurious Emission

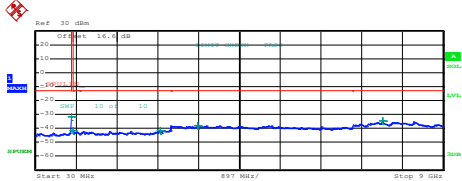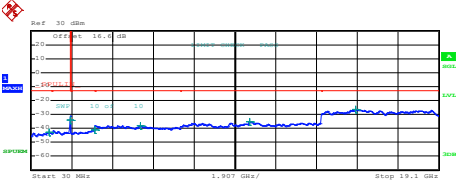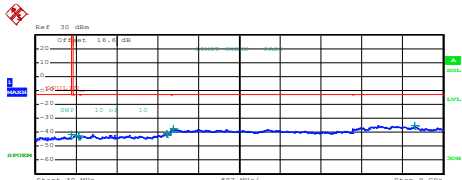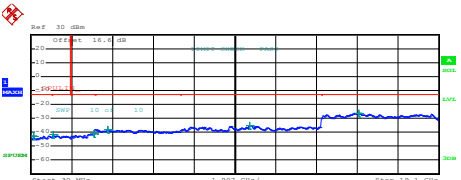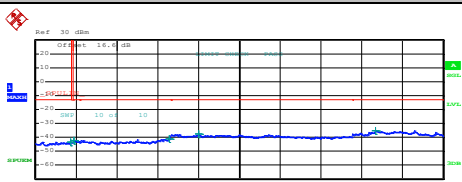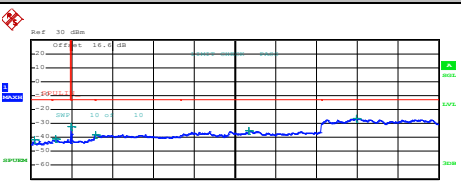WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																																																																														
Lowest Channel	Lowest Channel																																																																														
 <table border="1" data-bbox="239 660 654 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>818.815000 M</td> <td>-33.79</td> <td>-18.79</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>862.793751 M</td> <td>-41.66</td> <td>-26.66</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.7823000 G</td> <td>-41.72</td> <td>-26.72</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.5950000 G</td> <td>-37.84</td> <td>-24.84</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>7.6775000 G</td> <td>-34.62</td> <td>-21.62</td> </tr> </tbody> </table> <p data-bbox="207 907 383 929">Date: 2.MAY.2019 18:40:22</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	818.815000 M	-33.79	-18.79	855.000 M	1.000 G	1.00 M	862.793751 M	-41.66	-26.66	1.000 G	3.000 G	1.00 M	2.7823000 G	-41.72	-26.72	3.000 G	7.000 G	1.00 M	3.5950000 G	-37.84	-24.84	7.000 G	9.000 G	1.00 M	7.6775000 G	-34.62	-21.62	 <table border="1" data-bbox="893 660 1308 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>876.225000 M</td> <td>-42.68</td> <td>-29.68</td> </tr> <tr> <td>1.000 G</td> <td>1.845 G</td> <td>1.00 M</td> <td>1.8444578 G</td> <td>-34.16</td> <td>-21.16</td> </tr> <tr> <td>1.845 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.9943004 G</td> <td>-41.26</td> <td>-28.26</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>5.1430000 G</td> <td>-37.95</td> <td>-24.95</td> </tr> <tr> <td>7.000 G</td> <td>13.600 G</td> <td>1.00 M</td> <td>10.236475 G</td> <td>-35.11</td> <td>-22.11</td> </tr> <tr> <td>13.600 G</td> <td>19.100 G</td> <td>1.00 M</td> <td>15.2330003 G</td> <td>-26.26</td> <td>-13.26</td> </tr> </tbody> </table> <p data-bbox="861 907 1037 929">Date: 2.MAY.2019 18:14:42</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	876.225000 M	-42.68	-29.68	1.000 G	1.845 G	1.00 M	1.8444578 G	-34.16	-21.16	1.845 G	3.000 G	1.00 M	2.9943004 G	-41.26	-28.26	3.000 G	7.000 G	1.00 M	5.1430000 G	-37.95	-24.95	7.000 G	13.600 G	1.00 M	10.236475 G	-35.11	-22.11	13.600 G	19.100 G	1.00 M	15.2330003 G	-26.26	-13.26
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	820.000 M	1.00 M	818.815000 M	-33.79	-18.79																																																																										
855.000 M	1.000 G	1.00 M	862.793751 M	-41.66	-26.66																																																																										
1.000 G	3.000 G	1.00 M	2.7823000 G	-41.72	-26.72																																																																										
3.000 G	7.000 G	1.00 M	3.5950000 G	-37.84	-24.84																																																																										
7.000 G	9.000 G	1.00 M	7.6775000 G	-34.62	-21.62																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	1.000 G	1.00 M	876.225000 M	-42.68	-29.68																																																																										
1.000 G	1.845 G	1.00 M	1.8444578 G	-34.16	-21.16																																																																										
1.845 G	3.000 G	1.00 M	2.9943004 G	-41.26	-28.26																																																																										
3.000 G	7.000 G	1.00 M	5.1430000 G	-37.95	-24.95																																																																										
7.000 G	13.600 G	1.00 M	10.236475 G	-35.11	-22.11																																																																										
13.600 G	19.100 G	1.00 M	15.2330003 G	-26.26	-13.26																																																																										
Middle Channel	Middle Channel																																																																														
 <table border="1" data-bbox="239 1176 654 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>817.432000 M</td> <td>-41.80</td> <td>-26.80</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>983.653259 M</td> <td>-42.76</td> <td>-28.76</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.9100000 G</td> <td>-40.94</td> <td>-27.94</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.0670000 G</td> <td>-37.82</td> <td>-24.82</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>8.3735000 G</td> <td>-35.04</td> <td>-22.04</td> </tr> </tbody> </table> <p data-bbox="207 1424 383 1447">Date: 2.MAY.2019 18:41:18</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	817.432000 M	-41.80	-26.80	855.000 M	1.000 G	1.00 M	983.653259 M	-42.76	-28.76	1.000 G	3.000 G	1.00 M	2.9100000 G	-40.94	-27.94	3.000 G	7.000 G	1.00 M	3.0670000 G	-37.82	-24.82	7.000 G	9.000 G	1.00 M	8.3735000 G	-35.04	-22.04	 <table border="1" data-bbox="893 1176 1308 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>143.003000 M</td> <td>-42.83</td> <td>-29.83</td> </tr> <tr> <td>1.000 G</td> <td>1.845 G</td> <td>1.00 M</td> <td>3.043039 G</td> <td>-41.41</td> <td>-28.41</td> </tr> <tr> <td>1.845 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.977215 G</td> <td>-41.02</td> <td>-28.02</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.6230000 G</td> <td>-38.02</td> <td>-25.02</td> </tr> <tr> <td>7.000 G</td> <td>13.600 G</td> <td>1.00 M</td> <td>10.2321500 G</td> <td>-35.10</td> <td>-22.10</td> </tr> <tr> <td>13.600 G</td> <td>19.100 G</td> <td>1.00 M</td> <td>15.346937 G</td> <td>-26.36</td> <td>-13.36</td> </tr> </tbody> </table> <p data-bbox="861 1424 1037 1447">Date: 2.MAY.2019 18:15:37</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	143.003000 M	-42.83	-29.83	1.000 G	1.845 G	1.00 M	3.043039 G	-41.41	-28.41	1.845 G	3.000 G	1.00 M	2.977215 G	-41.02	-28.02	3.000 G	7.000 G	1.00 M	3.6230000 G	-38.02	-25.02	7.000 G	13.600 G	1.00 M	10.2321500 G	-35.10	-22.10	13.600 G	19.100 G	1.00 M	15.346937 G	-26.36	-13.36
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	820.000 M	1.00 M	817.432000 M	-41.80	-26.80																																																																										
855.000 M	1.000 G	1.00 M	983.653259 M	-42.76	-28.76																																																																										
1.000 G	3.000 G	1.00 M	2.9100000 G	-40.94	-27.94																																																																										
3.000 G	7.000 G	1.00 M	3.0670000 G	-37.82	-24.82																																																																										
7.000 G	9.000 G	1.00 M	8.3735000 G	-35.04	-22.04																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	1.000 G	1.00 M	143.003000 M	-42.83	-29.83																																																																										
1.000 G	1.845 G	1.00 M	3.043039 G	-41.41	-28.41																																																																										
1.845 G	3.000 G	1.00 M	2.977215 G	-41.02	-28.02																																																																										
3.000 G	7.000 G	1.00 M	3.6230000 G	-38.02	-25.02																																																																										
7.000 G	13.600 G	1.00 M	10.2321500 G	-35.10	-22.10																																																																										
13.600 G	19.100 G	1.00 M	15.346937 G	-26.36	-13.36																																																																										
Highest Channel	Highest Channel																																																																														
 <table border="1" data-bbox="239 1691 654 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>808.545000 M</td> <td>-43.48</td> <td>-30.48</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>869.137501 M</td> <td>-42.43</td> <td>-29.43</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.9795000 G</td> <td>-40.98</td> <td>-27.98</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.6210000 G</td> <td>-37.79</td> <td>-24.79</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>7.5190000 G</td> <td>-35.48</td> <td>-22.48</td> </tr> </tbody> </table> <p data-bbox="207 1942 383 1964">Date: 2.MAY.2019 18:42:19</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	808.545000 M	-43.48	-30.48	855.000 M	1.000 G	1.00 M	869.137501 M	-42.43	-29.43	1.000 G	3.000 G	1.00 M	2.9795000 G	-40.98	-27.98	3.000 G	7.000 G	1.00 M	3.6210000 G	-37.79	-24.79	7.000 G	9.000 G	1.00 M	7.5190000 G	-35.48	-22.48	 <table border="1" data-bbox="893 1691 1308 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>168.225000 M</td> <td>-41.85</td> <td>-28.85</td> </tr> <tr> <td>1.000 G</td> <td>1.845 G</td> <td>1.00 M</td> <td>1.197197 G</td> <td>-41.34</td> <td>-28.34</td> </tr> <tr> <td>1.845 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>3.053814 G</td> <td>-32.31</td> <td>-19.31</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.0400000 G</td> <td>-37.88</td> <td>-24.88</td> </tr> <tr> <td>7.000 G</td> <td>13.600 G</td> <td>1.00 M</td> <td>10.219975 G</td> <td>-35.36</td> <td>-22.36</td> </tr> <tr> <td>13.600 G</td> <td>19.100 G</td> <td>1.00 M</td> <td>15.2330003 G</td> <td>-26.26</td> <td>-13.26</td> </tr> </tbody> </table> <p data-bbox="861 1942 1037 1964">Date: 2.MAY.2019 18:16:32</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	168.225000 M	-41.85	-28.85	1.000 G	1.845 G	1.00 M	1.197197 G	-41.34	-28.34	1.845 G	3.000 G	1.00 M	3.053814 G	-32.31	-19.31	3.000 G	7.000 G	1.00 M	3.0400000 G	-37.88	-24.88	7.000 G	13.600 G	1.00 M	10.219975 G	-35.36	-22.36	13.600 G	19.100 G	1.00 M	15.2330003 G	-26.26	-13.26
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	820.000 M	1.00 M	808.545000 M	-43.48	-30.48																																																																										
855.000 M	1.000 G	1.00 M	869.137501 M	-42.43	-29.43																																																																										
1.000 G	3.000 G	1.00 M	2.9795000 G	-40.98	-27.98																																																																										
3.000 G	7.000 G	1.00 M	3.6210000 G	-37.79	-24.79																																																																										
7.000 G	9.000 G	1.00 M	7.5190000 G	-35.48	-22.48																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30.000 M	1.000 G	1.00 M	168.225000 M	-41.85	-28.85																																																																										
1.000 G	1.845 G	1.00 M	1.197197 G	-41.34	-28.34																																																																										
1.845 G	3.000 G	1.00 M	3.053814 G	-32.31	-19.31																																																																										
3.000 G	7.000 G	1.00 M	3.0400000 G	-37.88	-24.88																																																																										
7.000 G	13.600 G	1.00 M	10.219975 G	-35.36	-22.36																																																																										
13.600 G	19.100 G	1.00 M	15.2330003 G	-26.26	-13.26																																																																										




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

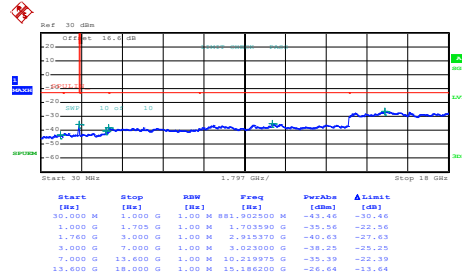


Date: 9.MAY.2019 09:04:06

Middle Channel

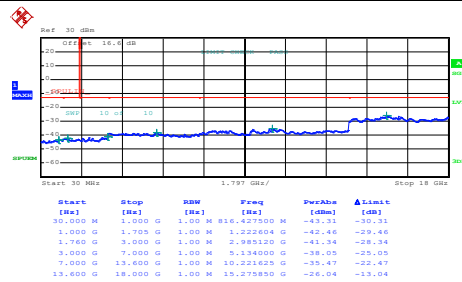

Date: 9.MAY.2019 09:05:04

Highest Channel

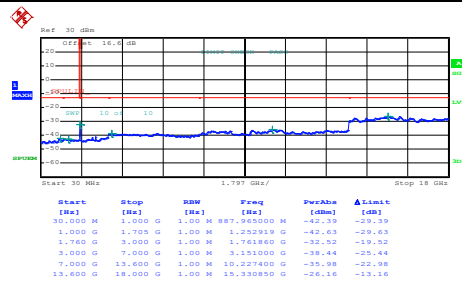

Date: 9.MAY.2019 09:05:59



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0155	PASS
40	Normal Voltage	0.0132	
30	Normal Voltage	0.0167	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0012	
-10	Normal Voltage	0.0000	
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0036	
20	Maximum Voltage	0.0167	
20	Normal Voltage	0.0143	
20	Battery End Point	0.0167	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0037	PASS
40	Normal Voltage	0.0021	
30	Normal Voltage	0.0016	
20(Ref.)	Normal Voltage	0.0011	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0016	
-20	Normal Voltage	0.0005	
-30	Normal Voltage	0.0021	
20	Maximum Voltage	0.0032	
20	Normal Voltage	0.0011	
20	Battery End Point	0.0011	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0173	PASS
40	Normal Voltage	0.0179	
30	Normal Voltage	0.0150	
20(Ref.)	Normal Voltage	0.0155	
10	Normal Voltage	0.0023	
0	Normal Voltage	0.0058	
-10	Normal Voltage	0.0092	
-20	Normal Voltage	0.0110	
-30	Normal Voltage	0.0115	
20	Maximum Voltage	0.0087	
20	Normal Voltage	0.0155	
20	Battery End Point	0.0069	

Note:

1. Normal Voltage = 7.6 V. ; Battery End Point (BEP) = 7.0 V. ; Maximum Voltage =8.7 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	WCDMA Band V	24.34	0.2716	23.59	0.2286
Middle	RMC 12.2Kbps	24.30	0.2692	23.55	0.2265
Highest	(GT - LC = 1.4 dB)	24.27	0.2673	23.52	0.2249
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band II	23.30	0.2138	26.26	0.4227
Middle	RMC 12.2Kbps	23.39	0.2183	26.35	0.4315
Highest	(GT - LC = 2.96 dB)	23.31	0.2143	26.27	0.4236
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	24.11	0.2576	27.07	0.5093
Middle	RMC 12.2Kbps	24.20	0.2630	27.16	0.5200
Highest	(GT - LC = 2.96 dB)	24.17	0.2612	27.13	0.5164
Limit	EIRP < 1W	Result		PASS	



Radiated Spurious Emission

WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-54.66	-13	-41.66	-65.75	-60.52	0.70	8.71	H
	2479	-59.80	-13	-46.80	-75.76	-67.47	0.95	10.77	H
	3305	-58.12	-13	-45.12	-76.24	-66.64	1.20	11.87	H
									H
									H
									H
									H
	1652	-52.76	-13	-39.76	-63.73	-58.62	0.70	8.71	V
	2479	-59.74	-13	-46.74	-75.69	-67.41	0.95	10.77	V
	3305	-58.13	-13	-45.13	-76.08	-66.65	1.20	11.87	V
									V
									V
									V
									V



Middle	1672	-52.62	-13	-39.62	-63.83	-58.55	0.71	8.79	H
	2509	-59.58	-13	-46.58	-75.55	-67.28	0.95	10.81	H
	3345	-57.65	-13	-44.65	-75.67	-66.25	1.21	11.96	H
									H
									H
									H
									H
	1672	-53.30	-13	-40.30	-64.42	-59.23	0.71	8.79	V
	2509	-59.62	-13	-46.62	-75.61	-67.32	0.95	10.81	V
	3345	-58.31	-13	-45.31	-76.03	-66.91	1.21	11.96	V
									V
									V
									V
									V
Highest	1696	-49.59	-13	-36.59	-60.94	-55.60	0.72	8.88	H
	2539	-59.19	-13	-46.19	-75.21	-66.91	0.96	10.83	H
	3386	-58.47	-13	-45.47	-76.38	-67.15	1.22	12.05	H
									H
									H
									H
									H
	1696	-50.80	-13	-37.80	-62.08	-56.81	0.72	8.88	V
	2539	-58.79	-13	-45.79	-75.08	-66.51	0.96	10.83	V
	3386	-58.88	-13	-45.88	-76.37	-67.56	1.22	12.05	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1700

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-41.52	-13	-28.52	-60.36	-52.42	1.23	12.13	H
	5137	-45.41	-13	-32.41	-69.28	-56.31	1.97	12.86	H
	6849	-51.12	-13	-38.12	-76.18	-60.09	2.34	11.32	H
									H
									H
									H
									H
	3424	-39.22	-13	-26.22	-57.68	-50.12	1.23	12.13	V
	5137	-46.18	-13	-33.18	-69.77	-57.08	1.97	12.86	V
	6849	-51.45	-13	-38.45	-76.41	-60.42	2.34	11.32	V
									V
									V
									V
									V
Middle	3465	-38.13	-13	-25.13	-57.46	-49.11	1.24	12.22	H
	5198	-43.85	-13	-30.85	-67.88	-54.81	1.97	12.94	H
	6930	-50.56	-13	-37.56	-76.35	-59.78	2.36	11.58	H
									H
									H
									H
									H
	3465	-34.96	-13	-21.96	-54.04	-45.94	1.24	12.22	V
	5198	-43.47	-13	-30.47	-67.06	-54.43	1.97	12.94	V
	6930	-50.18	-13	-37.18	-76.07	-59.40	2.36	11.58	V
									V
									V
									V
									V



Highest	3504	-37.21	-13	-24.21	-56.91	-48.26	1.25	12.30	H
	5254	-43.30	-13	-30.30	-67.32	-54.32	1.98	13.00	H
	7010	-48.86	-13	-35.86	-75.37	-58.28	2.37	11.79	H
									H
									H
									H
									H
	3504	-33.90	-13	-20.90	-53.44	-44.95	1.25	12.30	V
	5254	-43.16	-13	-30.16	-66.87	-54.18	1.98	13.00	V
	7010	-48.72	-13	-35.72	-75.53	-58.14	2.37	11.79	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-35.54	-13	-22.54	-56.11	-46.57	1.43	12.46	H
	5557	-43.46	-13	-30.46	-67.43	-54.74	2.01	13.29	H
	7409	-48.39	-13	-35.39	-76.3	-57.57	2.21	11.39	H
									H
									H
									H
									H
	3704	-33.22	-13	-20.22	-53.49	-44.25	1.43	12.46	V
	5557	-43.52	-13	-30.52	-67.71	-54.80	2.01	13.29	V
	7409	-48.78	-13	-35.78	-76.27	-57.96	2.21	11.39	V
									V
									V
									V
									V
Middle	3760	-38.87	-13	-25.87	-59.55	-49.90	1.48	12.51	H
	5640	-43.80	-13	-30.80	-67.81	-55.07	2.00	13.27	H
	7520	-48.63	-13	-35.63	-76.45	-57.74	2.18	11.30	H
									H
									H
									H
									H
	3760	-34.94	-13	-21.94	-55.37	-45.97	1.48	12.51	V
	5640	-44.13	-13	-31.13	-68.42	-55.40	2.00	13.27	V
	7520	-48.44	-13	-35.44	-76.4	-57.55	2.18	11.30	V
									V
									V
									V
									V



Highest	3815	-40.53	-13	-27.53	-61.31	-51.55	1.53	12.55	H
	5723	-46.93	-13	-33.93	-71.01	-58.19	1.99	13.26	H
	7630	-48.07	-13	-35.07	-75.39	-57.08	2.26	11.27	H
									H
									H
									H
									H
	3815	-35.80	-13	-22.80	-56.4	-46.82	1.53	12.55	V
	5723	-48.11	-13	-35.11	-72.45	-59.37	1.99	13.26	V
	7630	-47.60	-13	-34.60	-75.15	-56.61	2.26	11.27	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.