



FCC RADIO TEST REPORT

FCC ID : UZ7TC15BK
Equipment : Touch computer
Brand Name : Zebra
Model Name : TC15BK
Applicant : Zebra Technologies Corporation
1 Zebra Plaza Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 20, 2021 and testing was performed from Mar. 02, 2022 to Mar. 23, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Product Specification of Equipment Under Test..... 6

 1.3 Modification of EUT 6

 1.4 Testing Location 6

 1.5 Applicable Standards..... 7

2 Test Configuration of Equipment Under Test 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 13

 2.4 Support Unit used in test configuration and system 14

 2.5 EUT Operation Test Setup 14

 2.6 Measurement Results Explanation Example..... 14

3 Test Result 15

 3.1 6dB and 99% Bandwidth Measurement 15

 3.2 Output Power Measurement..... 19

 3.3 Power Spectral Density Measurement 22

 3.4 Conducted Band Edges and Spurious Emission Measurement 26

 3.5 Radiated Band Edges and Spurious Emission Measurement 39

 3.6 AC Conducted Emission Measurement..... 44

 3.7 Antenna Requirements 46

4 List of Measuring Equipment..... 47

5 Uncertainty of Evaluation 49

Appendix A. AC Conducted Emission Test Result

Appendix B. Radiated Spurious Emission

Appendix C. Radiated Spurious Emission Plots

Appendix D. Duty Cycle Plots

Appendix E. Setup Photographs



History of this test report

Report No.	Version	Description	Issue Date
FR1N2513C	01	Initial issue of report	Mar. 31, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	1.28 dB under the limit at 2484.740 MHz
3.6	15.207	AC Conducted Emission	Pass	8.91 dB under the limit at 0.440 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Cindy Liu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch computer
Brand Name	Zebra
Model Name	TC15BK
FCC ID	UZ7TC15BK
Sample 1	Scanner(SE4710)
Sample 2	Scanner(SE4100)
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	EV2.4
SW Version	Groot-userdebug11 11-06-29.00-RG-U000-PRD-GRT FX3
MFD	26JAN22
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Battery 1	Brand Name	Zebra	Model Number	BT-000454
			Part Number	BT-000454-20
Battery 2	Brand Name	Zebra	Model Number	BT-000454
			Part Number	BT-000454-70
Earphone	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01



1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to Antenna for Average power	802.11b : 18.90 dBm / 0.0776 W 802.11g : 17.40 dBm / 0.0550 W 802.11n HT20 : 17.40 dBm / 0.0550 W 802.11n HT40 : 16.90 dBm / 0.0490 W 802.11ac VHT20: 17.30 dBm / 0.0537 W 802.11ac VHT40: 16.80 dBm / 0.0479 W
Maximum Output Power to Antenna for Peak power	802.11b : 20.86 dBm / 0.1219 W 802.11g : 21.85 dBm / 0.1531 W 802.11n HT20 : 21.85 dBm / 0.1531 W 802.11n HT40 : 22.60 dBm / 0.1820 W 802.11ac VHT20: 21.75 dBm / 0.1496 W 802.11ac VHT40: 22.50 dBm / 0.1778 W
99% Occupied Bandwidth	802.11b : 13.99 MHz 802.11g : 18.63 MHz 802.11n HT20 : 19.78 MHz 802.11n HT40 : 36.56 MHz
Antenna Type / Gain	PIFA Antenna with gain -1.02 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH16-HY, CO07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane as worst plane.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

The final test modes consider the modulation and the worst data rates as shown in the table below.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + MPEG4 + USB Cable (Charging from Adapter) + Battery1 for Sample 1

<Sample 1>

Ch. #	2400-2483.5 MHz			
	802.11b	802.11g	802.11n HT20	802.11n HT40
Low	01	01	01	03
Middle	06	06	06	06
High	11	11	11	09

<Sample 2>

Ch. #	2400-2483.5 MHz
	802.11n HT40
Low	-
Middle	-
High	09

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.



<Average Power>

802.11b RF Average Output Power (dBm)						
Power vs. Channel			Power vs Data Rate			
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)		
		1M		2M	5.5M	11M
CH 01	2412	18.90	CH 01	18.80	18.50	18.30
CH 06	2437	18.60				
CH 11	2462	18.90				

802.11g RF Average Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)						
		6M		9M	12M	18M	24M	36M	48M	54M
CH 01	2412	17.30	CH 11	17.30	17.30	17.30	17.30	17.20	17.20	17.20
CH 06	2437	17.20								
CH 11	2462	17.40								

802.11n HT20 RF Average Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
CH 01	2412	17.20	CH 06	17.30	17.30	17.30	17.30	17.20	17.20	17.20
CH 06	2437	17.40								
CH 11	2462	17.40								

802.11n HT40 RF Average Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
CH 03	2422	16.90	CH 03	16.80	16.80	16.80	16.80	16.80	16.80	16.80
CH 06	2437	16.30								
CH 09	2452	15.10								



802.11ac VHT20 RF Average Output Power (dBm)												
Power vs. Channel			Power vs Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index								
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	
CH 01	2412	17.10	CH 06	17.30	17.30	17.30	17.30	17.30	17.30	17.20	17.20	17.20
CH 06	2437	17.30										
CH 11	2462	17.30										

802.11ac VHT40 RF Average Output Power (dBm)													
Power vs. Channel			Power vs Data Rate										
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index									
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9	
CH 03	2422	16.80	CH 03	16.80	16.80	16.80	16.80	16.80	16.80	16.80	16.70	16.70	16.70
CH 06	2437	16.20											
CH 09	2452	15.00											

<Peak Power>

802.11b RF Peak Output Power (dBm)						
Power vs. Channel			Power vs Data Rate			
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)		
		1M		2M	5.5M	11M
CH 01	2412	20.86	CH 01	20.76	20.73	20.65
CH 06	2437	20.62				
CH 11	2462	20.75				

802.11g RF Peak Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	Data Rate (bps)	Channel	Data Rate (bps)						
		6M		9M	12M	18M	24M	36M	48M	54M
CH 01	2412	21.85	CH 01	21.80	21.80	21.70	21.70	21.61	21.60	21.60
CH 06	2437	21.50								
CH 11	2462	21.62								



802.11n HT20 RF Peak Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
CH 01	2412	21.82	CH 06	21.72	21.72	21.72	21.62	21.62	21.57	21.57
CH 06	2437	21.85								
CH 11	2462	21.66								


802.11n HT40 RF Peak Output Power (dBm)										
Power vs. Channel			Power vs Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index						
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
CH 03	2422	22.60	CH 03	22.50	22.50	22.50	22.50	22.40	22.40	22.40
CH 06	2437	21.86								
CH 09	2452	21.05								

802.11ac VHT20 RF Peak Output Power (dBm)											
Power vs. Channel			Power vs Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index							
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8
CH 01	2412	21.72	CH 06	21.65	21.65	21.65	21.65	21.65	21.55	21.55	21.55
CH 06	2437	21.75									
CH 11	2462	21.56									


802.11ac VHT40 RF Peak Output Power (dBm)												
Power vs. Channel			Power vs Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS Index								
		MCS 0		MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
CH 03	2422	22.50	CH 03	22.40	22.40	22.40	22.40	22.30	22.30	22.30	22.30	22.30
CH 06	2437	21.76										
CH 09	2452	20.95										

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

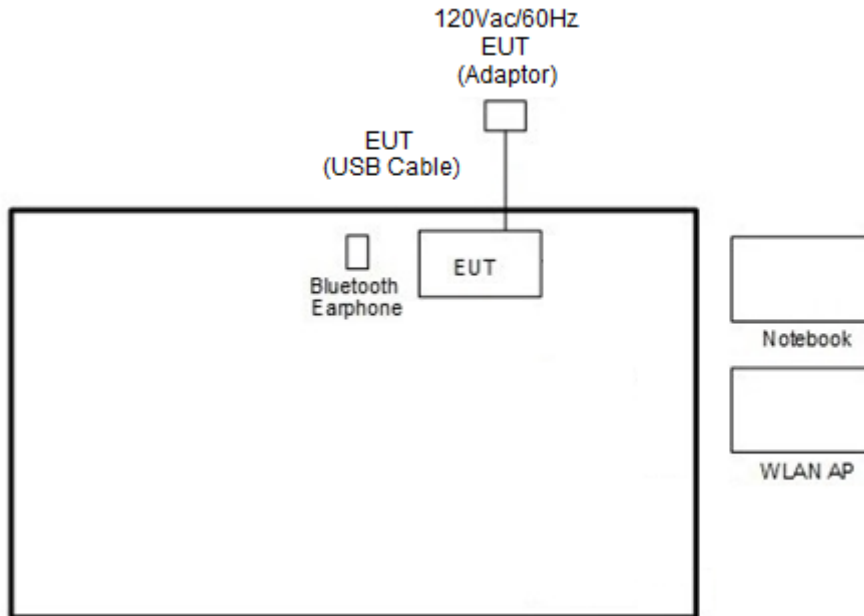

<WLAN Tx Mode>

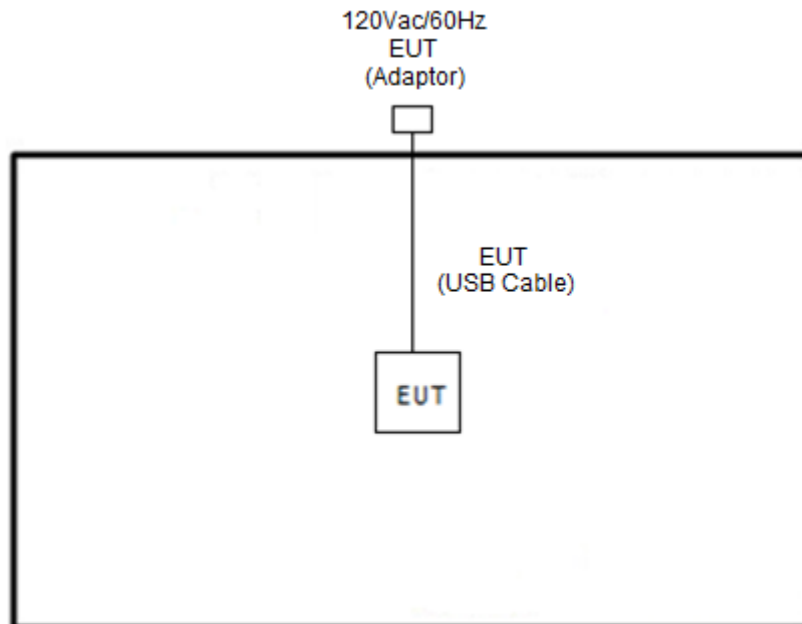



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	P79G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.00194.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test Engineer :	Hank Hsu and Junyu Jhou	Temperature :	21~25°C
		Relative Humidity :	51~54%

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant7	Ant2	Ant7	Ant2		
11b	1Mbps	1	1	2412	13.99	-	9.08	-	0.50	Pass
11b	1Mbps	1	6	2437	13.94	-	8.60	-	0.50	Pass
11b	1Mbps	1	11	2462	13.99	-	9.08	-	0.50	Pass
11g	6Mbps	1	1	2412	17.93	-	16.10	-	0.50	Pass
11g	6Mbps	1	6	2437	18.63	-	15.50	-	0.50	Pass
11g	6Mbps	1	11	2462	17.98	-	15.76	-	0.50	Pass
HT20	MCS0	1	1	2412	19.03	-	16.58	-	0.50	Pass
HT20	MCS0	1	6	2437	19.78	-	15.76	-	0.50	Pass
HT20	MCS0	1	11	2462	19.03	-	16.38	-	0.50	Pass
HT40	MCS0	1	3	2422	36.56	-	35.80	-	0.50	Pass
HT40	MCS0	1	6	2437	36.36	-	35.80	-	0.50	Pass
HT40	MCS0	1	9	2452	36.26	-	35.24	-	0.50	Pass




<802.11b>

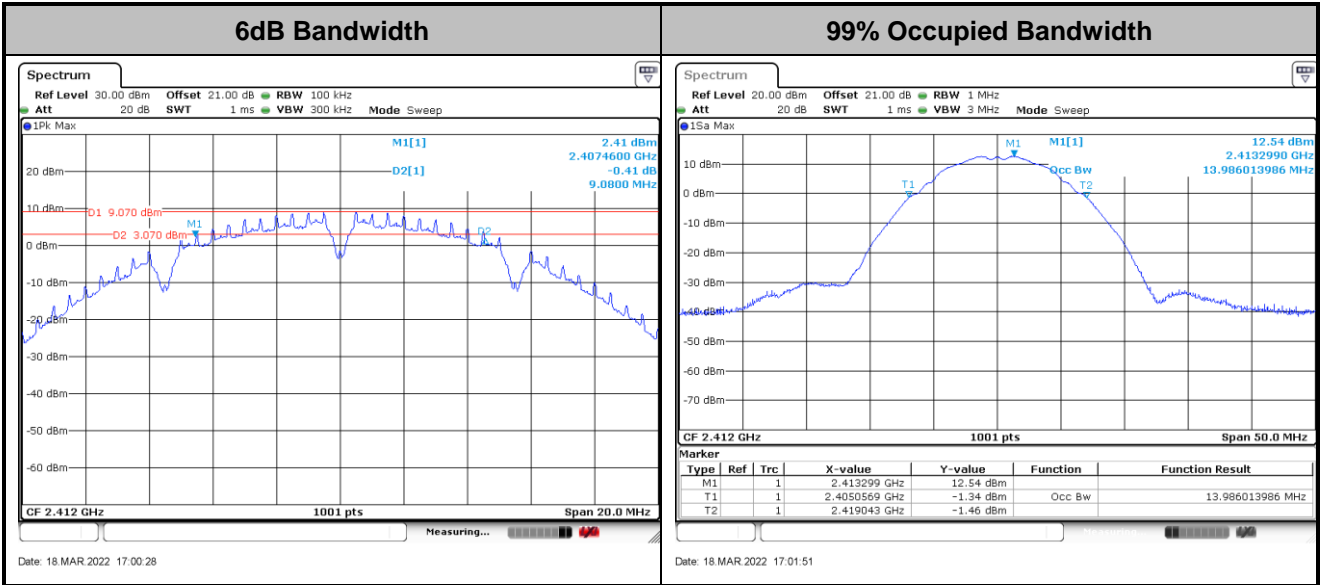

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

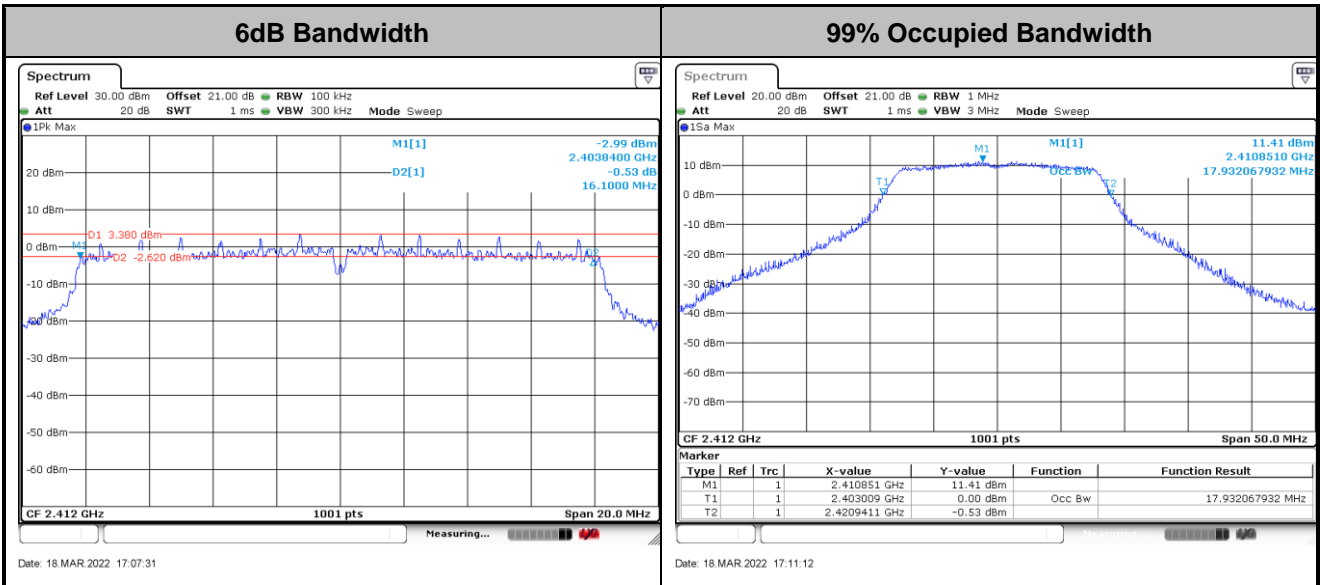

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11n HT20>

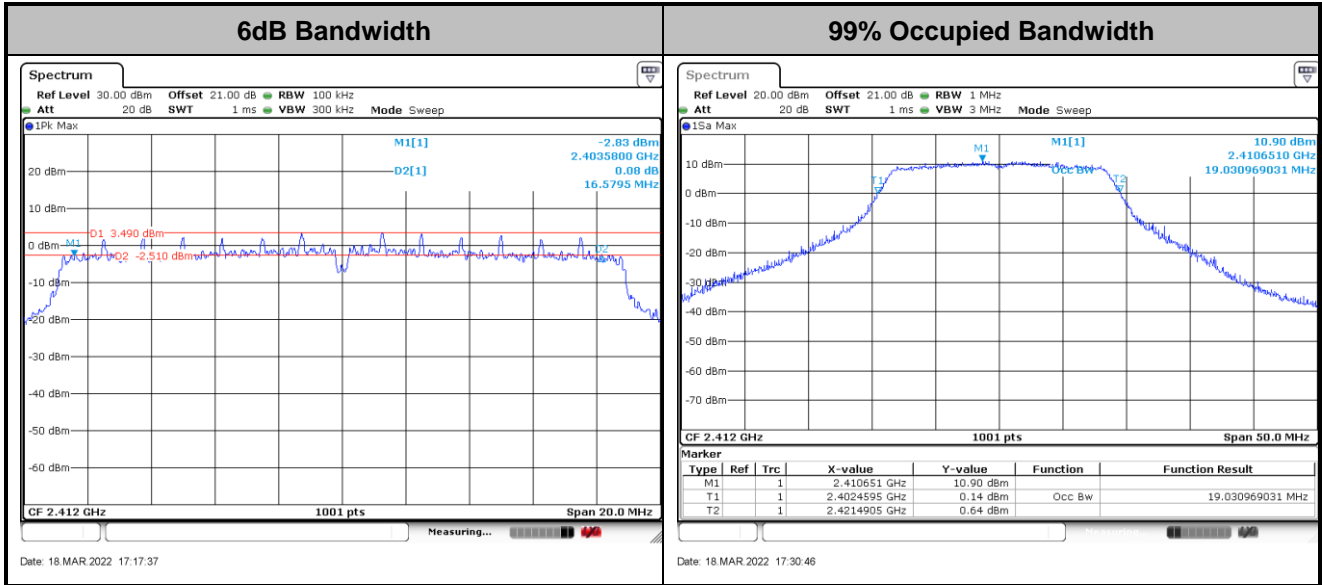

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11n HT40>

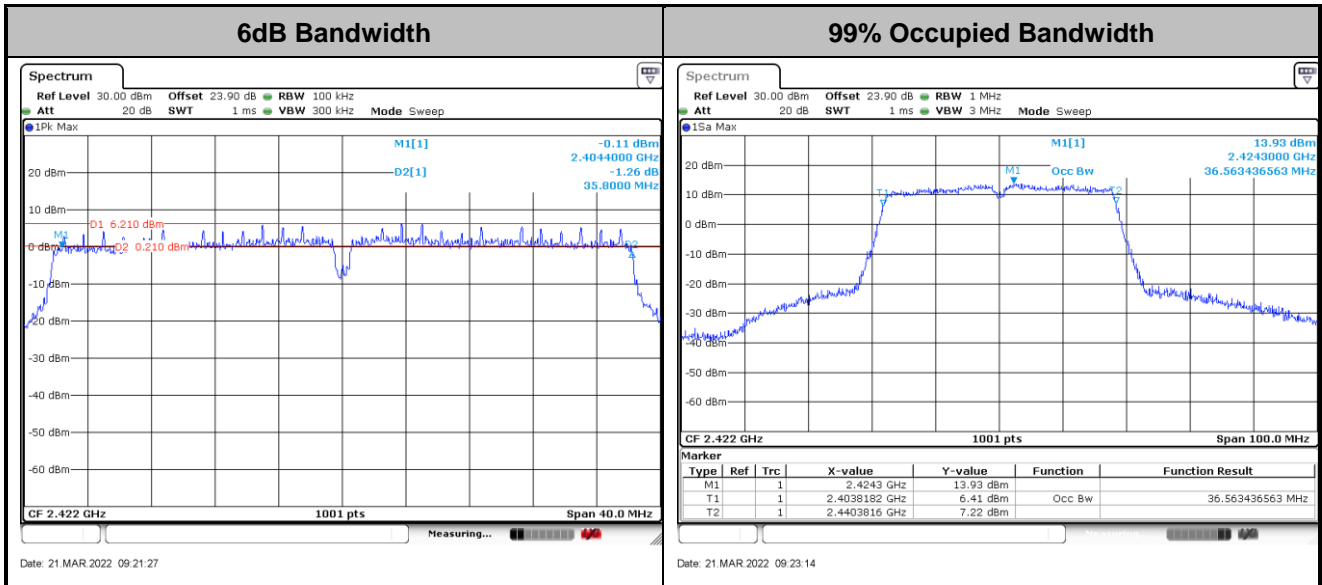

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

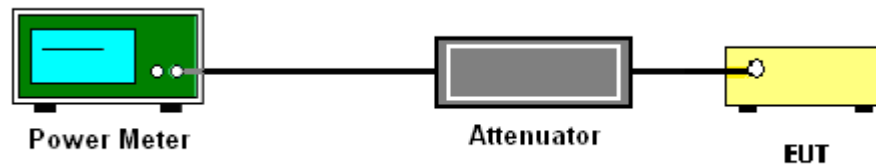



3.2.5 Test Result of Peak Output Power

Test Engineer :	Hank Hsu and Junyu Jhou	Temperature :	21~25°C
		Relative Humidity :	51~54%

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant7	Ant2	SUM	Ant7	Ant2	Ant7	Ant2	Ant7	Ant2	Ant7	Ant2	
11b	1Mbps	1	1	2412	20.86	-		30.00	-	-1.02	-	19.84	-	36.00	-	Pass
11b	1Mbps	1	6	2437	20.62	-		30.00	-	-1.02	-	19.60	-	36.00	-	Pass
11b	1Mbps	1	11	2462	20.75	-		30.00	-	-1.02	-	19.73	-	36.00	-	Pass
11g	6Mbps	1	1	2412	21.85	-		30.00	-	-1.02	-	20.83	-	36.00	-	Pass
11g	6Mbps	1	6	2437	21.50	-		30.00	-	-1.02	-	20.48	-	36.00	-	Pass
11g	6Mbps	1	11	2462	21.62	-		30.00	-	-1.02	-	20.60	-	36.00	-	Pass
HT20	MCS0	1	1	2412	21.82	-		30.00	-	-1.02	-	20.80	-	36.00	-	Pass
HT20	MCS0	1	6	2437	21.85	-		30.00	-	-1.02	-	20.83	-	36.00	-	Pass
HT20	MCS0	1	11	2462	21.66	-		30.00	-	-1.02	-	20.64	-	36.00	-	Pass
HT40	MCS0	1	3	2422	22.60	-		30.00	-	-1.02	-	21.58	-	36.00	-	Pass
HT40	MCS0	1	6	2437	21.86	-		30.00	-	-1.02	-	20.84	-	36.00	-	Pass
HT40	MCS0	1	9	2452	21.05	-		30.00	-	-1.02	-	20.03	-	36.00	-	Pass
VHT20	MCS8	1	1	2412	21.72	-		30.00	-	-1.02	-	20.70	-	36.00	-	Pass
VHT20	MCS8	1	6	2437	21.75	-		30.00	-	-1.02	-	20.73	-	36.00	-	Pass
VHT20	MCS8	1	11	2462	21.56	-		30.00	-	-1.02	-	20.54	-	36.00	-	Pass
VHT40	MCS9	1	3	2422	22.50	-		30.00	-	-1.02	-	21.48	-	36.00	-	Pass
VHT40	MCS9	1	6	2437	21.76	-		30.00	-	-1.02	-	20.74	-	36.00	-	Pass
VHT40	MCS9	1	9	2452	20.95	-		30.00	-	-1.02	-	19.93	-	36.00	-	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

Test Engineer :	Hank Hsu and Junyu Jhou	Temperature :	21~25°C
		Relative Humidity :	51~54%

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant7	Ant2	SUM	Ant7	Ant2	Ant7	Ant2	Ant7	Ant2	Ant7	Ant2	
11b	1Mbps	1	1	2412	18.90	-		30.00	-	-1.02	-	17.88	-	36.00	-	Pass
11b	1Mbps	1	6	2437	18.60	-		30.00	-	-1.02	-	17.58	-	36.00	-	Pass
11b	1Mbps	1	11	2462	18.90	-		30.00	-	-1.02	-	17.88	-	36.00	-	Pass
11g	6Mbps	1	1	2412	17.30	-		30.00	-	-1.02	-	16.28	-	36.00	-	Pass
11g	6Mbps	1	6	2437	17.20	-		30.00	-	-1.02	-	16.18	-	36.00	-	Pass
11g	6Mbps	1	11	2462	17.40	-		30.00	-	-1.02	-	16.38	-	36.00	-	Pass
HT20	MCS0	1	1	2412	17.20	-		30.00	-	-1.02	-	16.18	-	36.00	-	Pass
HT20	MCS0	1	6	2437	17.40	-		30.00	-	-1.02	-	16.38	-	36.00	-	Pass
HT20	MCS0	1	11	2462	17.40	-		30.00	-	-1.02	-	16.38	-	36.00	-	Pass
HT40	MCS0	1	3	2422	16.90	-		30.00	-	-1.02	-	15.88	-	36.00	-	Pass
HT40	MCS0	1	6	2437	16.30	-		30.00	-	-1.02	-	15.28	-	36.00	-	Pass
HT40	MCS0	1	9	2452	15.10	-		30.00	-	-1.02	-	14.08	-	36.00	-	Pass
VHT20	MCS8	1	1	2412	17.10	-		30.00	-	-1.02	-	16.08	-	36.00	-	Pass
VHT20	MCS8	1	6	2437	17.30	-		30.00	-	-1.02	-	16.28	-	36.00	-	Pass
VHT20	MCS8	1	11	2462	17.30	-		30.00	-	-1.02	-	16.28	-	36.00	-	Pass
VHT40	MCS9	1	3	2422	16.80	-		30.00	-	-1.02	-	15.78	-	36.00	-	Pass
VHT40	MCS9	1	6	2437	16.20	-		30.00	-	-1.02	-	15.18	-	36.00	-	Pass
VHT40	MCS9	1	9	2452	15.00	-		30.00	-	-1.02	-	13.98	-	36.00	-	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

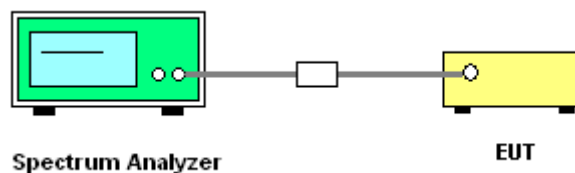




3.3.5 Test Result of Power Spectral Density

Test Engineer :	Hank Hsu and Junyu Jhou	Temperature :	21~25°C
		Relative Humidity :	51~54%


2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant7	Ant2	Worse + 3.01	Ant7	Ant2	Ant7	Ant2	
11b	1Mbps	1	1	2412	-4.68	-		-1.02	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-5.02	-		-1.02	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-8.09	-		-1.02	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-10.25	-		-1.02	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-8.10	-		-1.02	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-11.78	-		-1.02	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-11.78	-		-1.02	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-9.87	-		-1.02	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-10.21	-		-1.02	-	8.00	-	Pass
HT40	MCS0	1	3	2422	-9.10	-		-1.02	-	8.00	-	Pass
HT40	MCS0	1	6	2437	-9.52	-		-1.02	-	8.00	-	Pass
HT40	MCS0	1	9	2452	-10.87	-		-1.02	-	8.00	-	Pass



<802.11b>

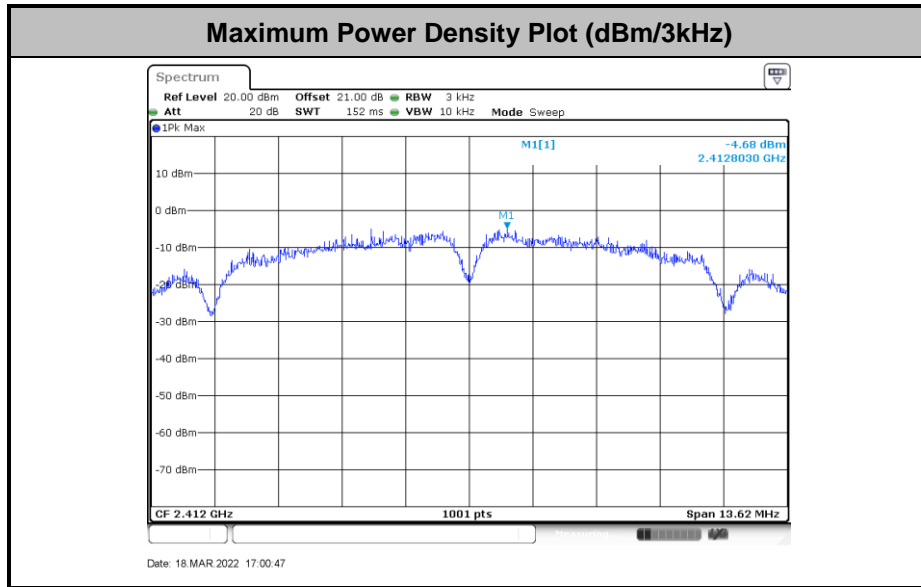


<802.11g>

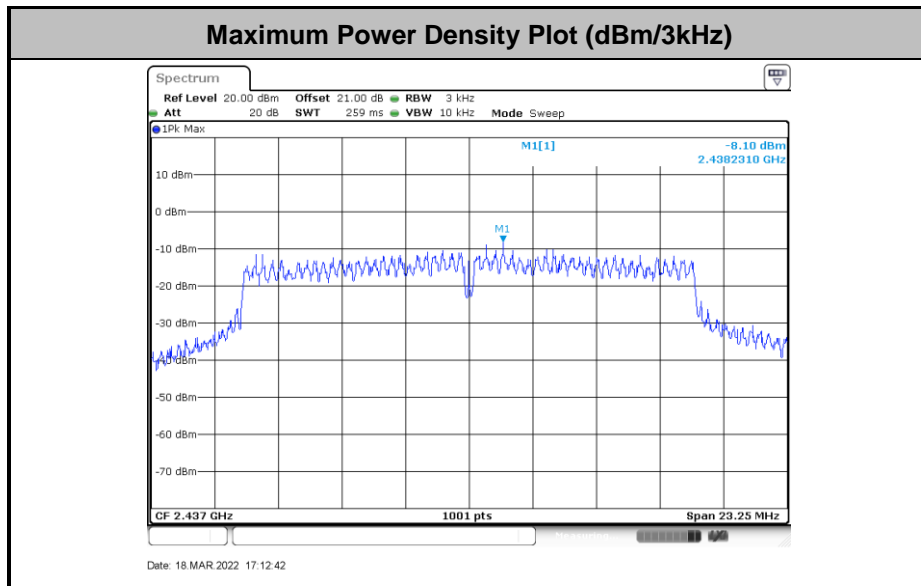




<802.11n HT20>

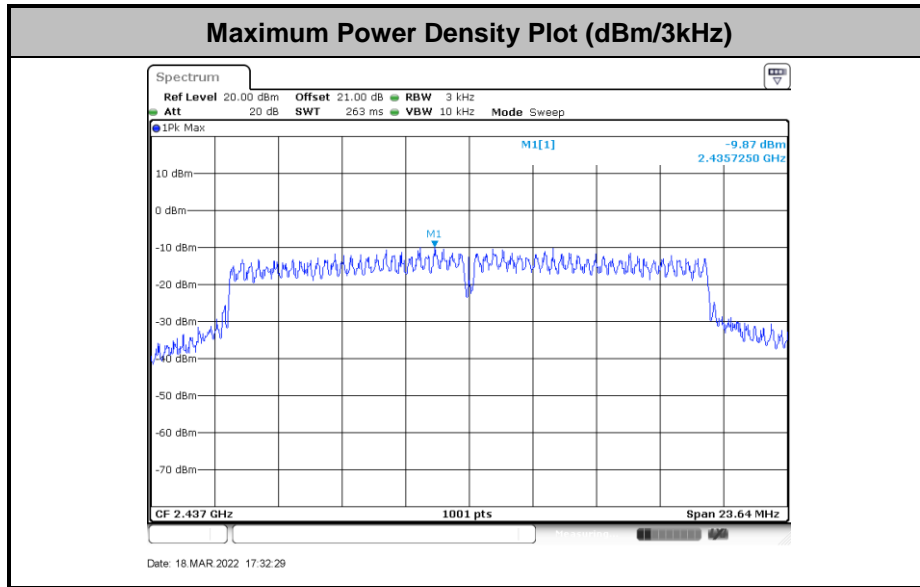

<802.11n HT40>

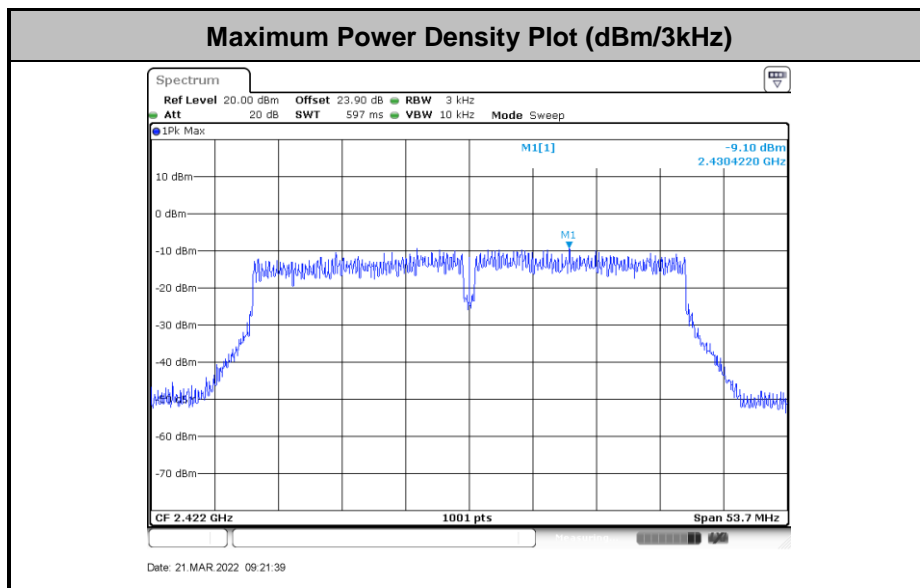

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission



Number of TX = 1, Ant. 7 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

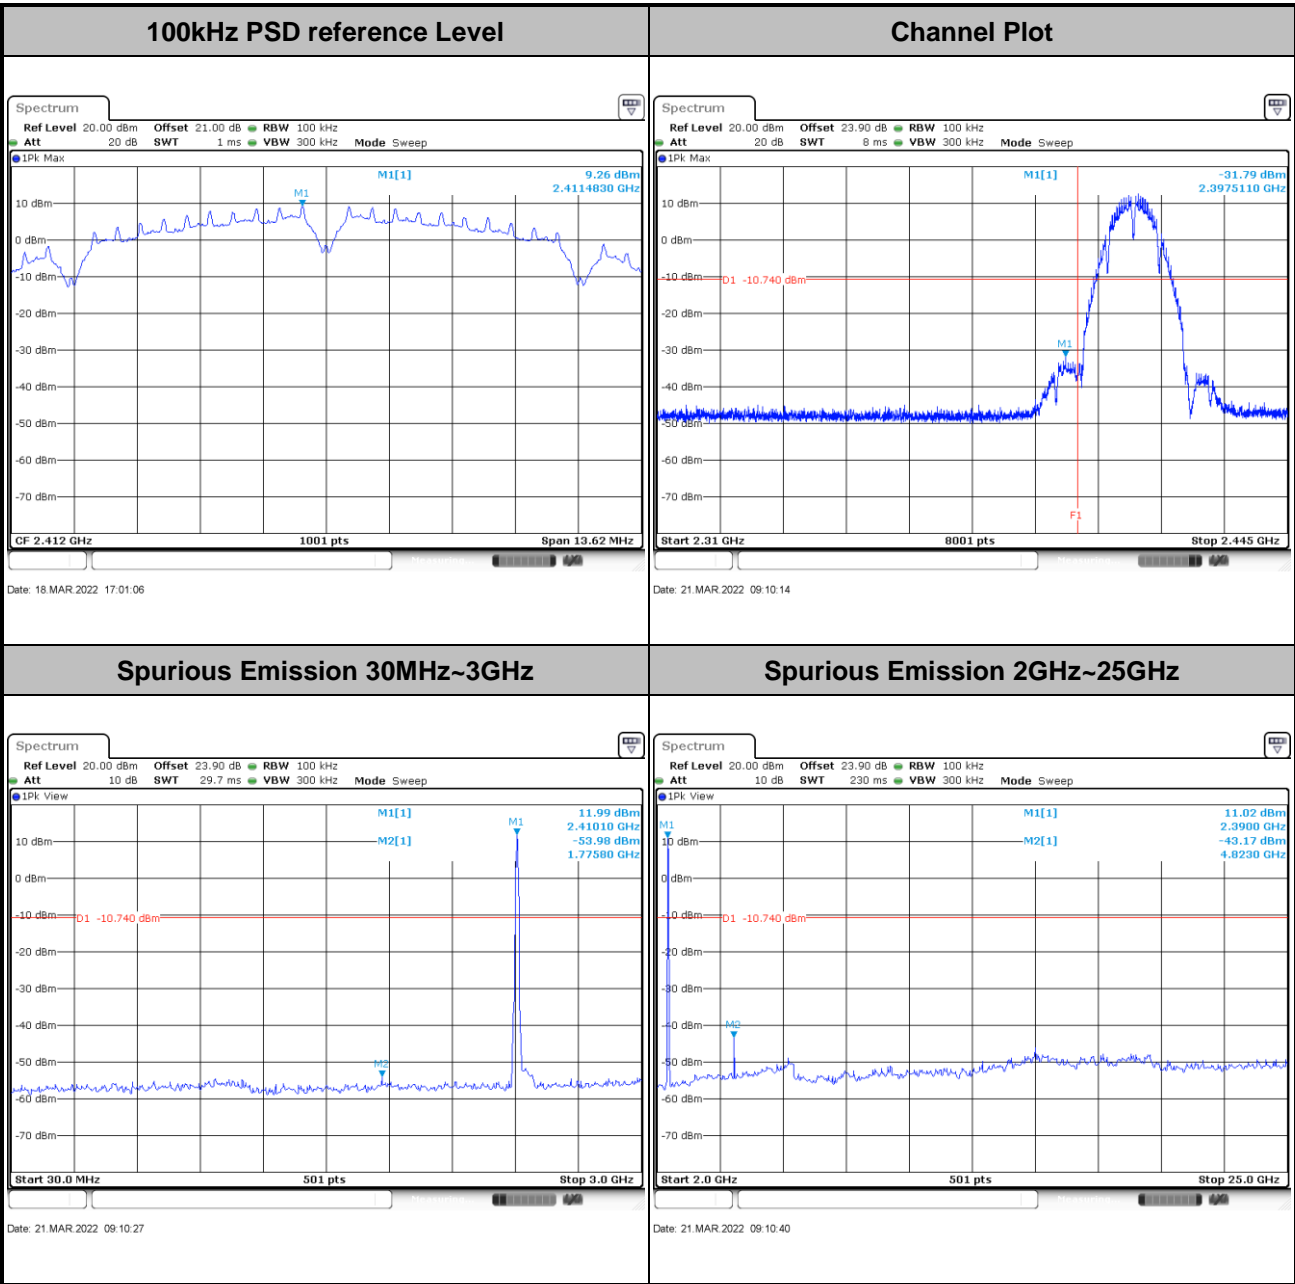





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

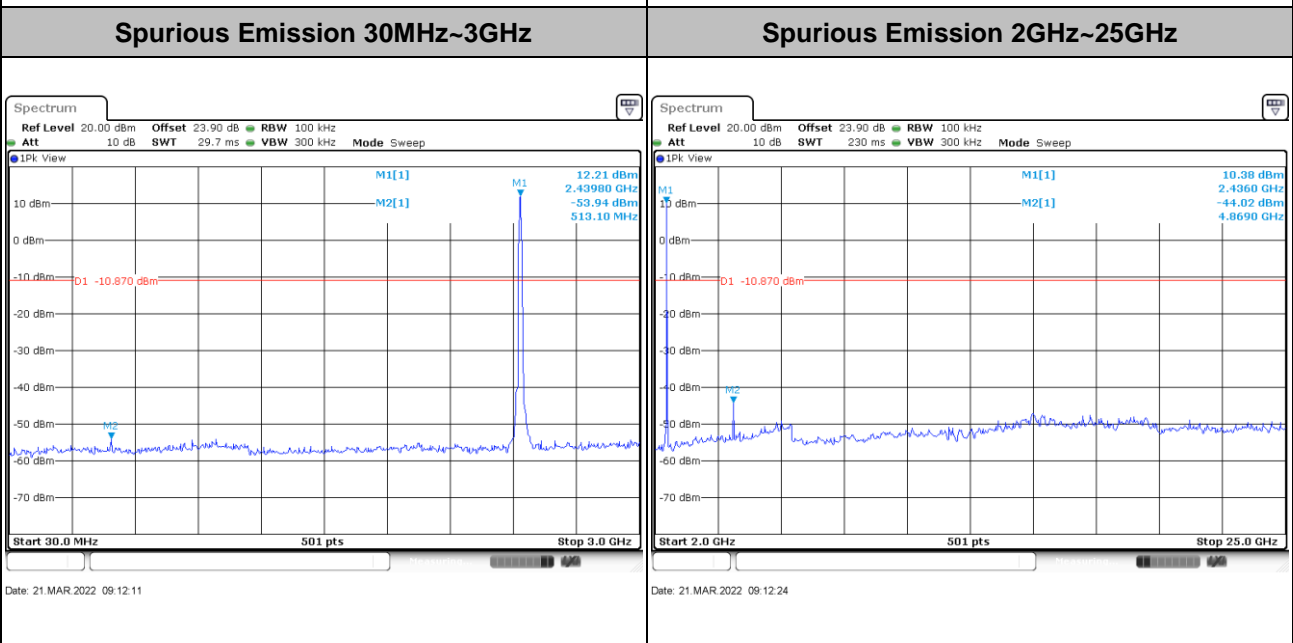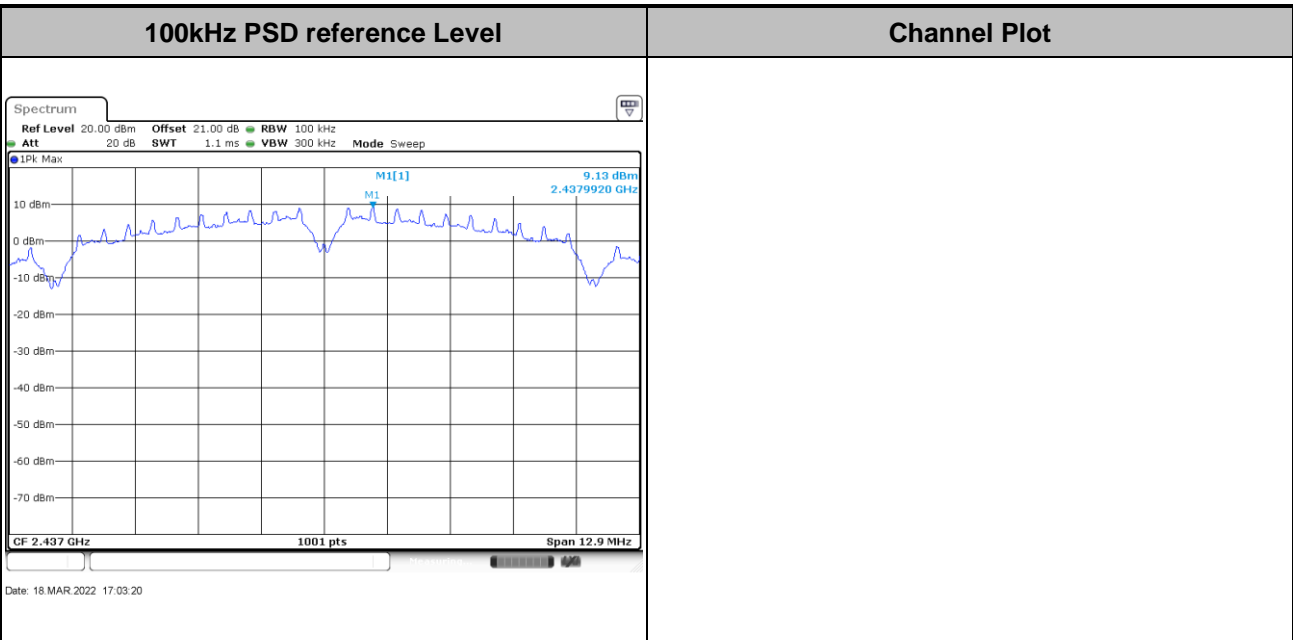







Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

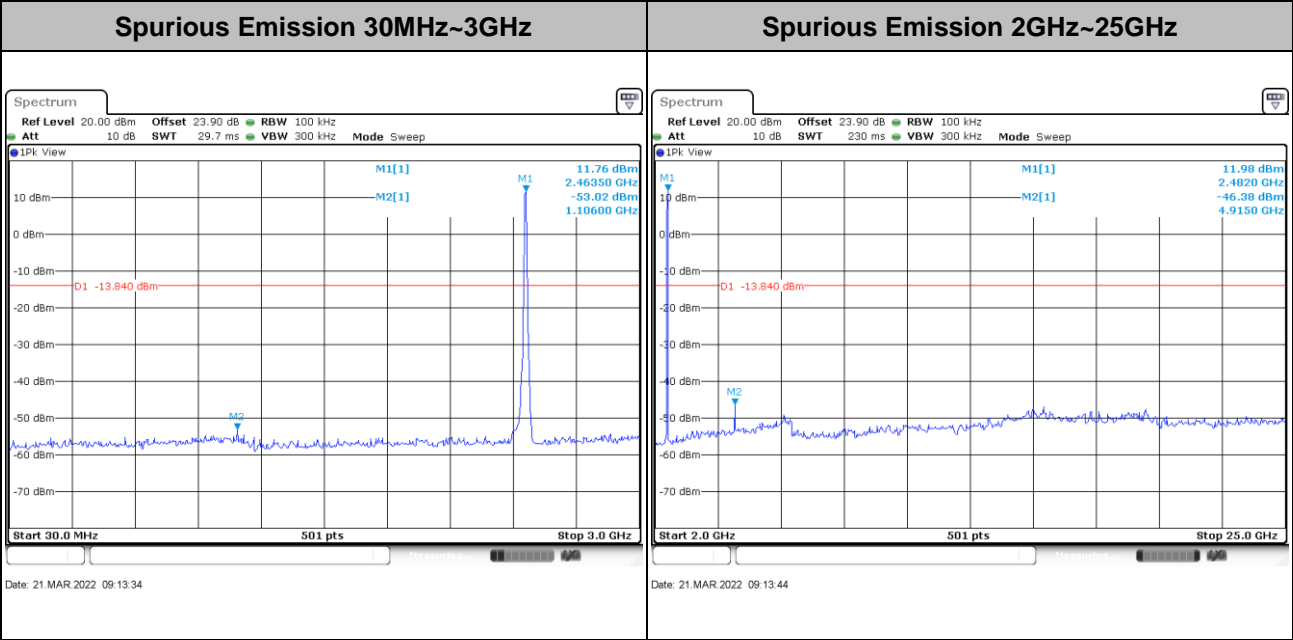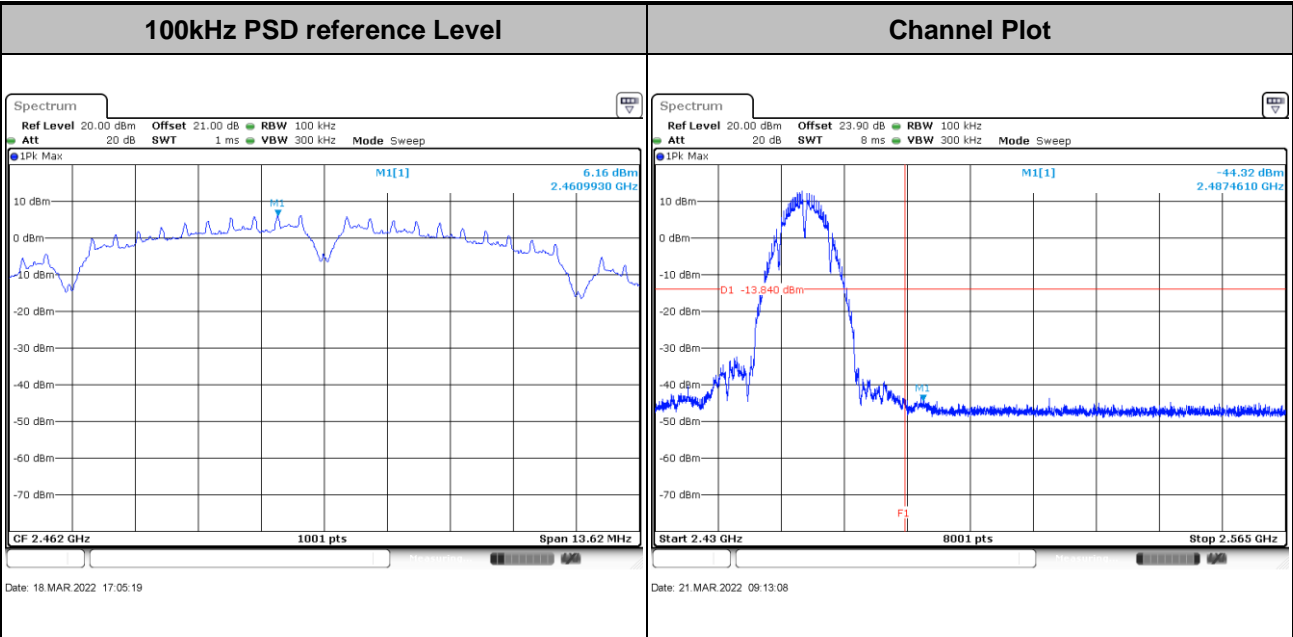





Test Mode : 802.11g Test Channel : 01

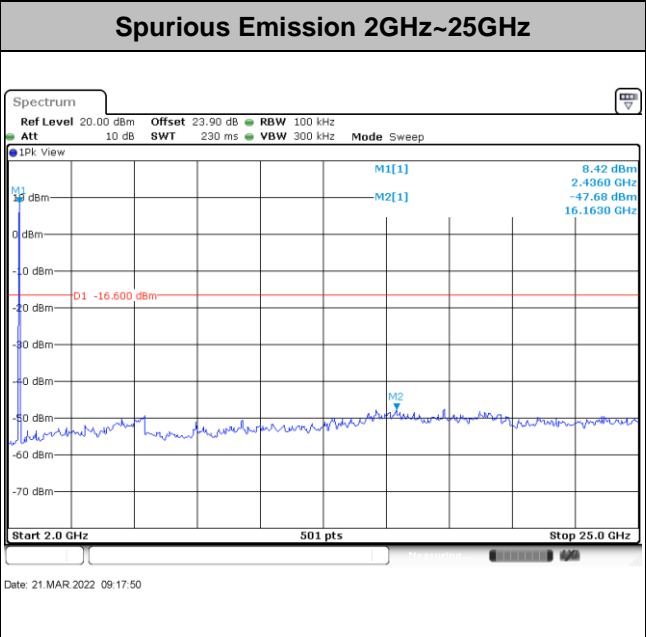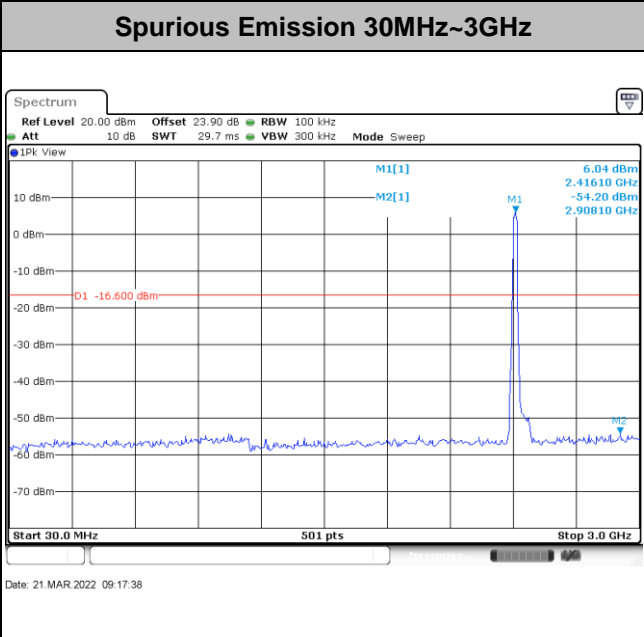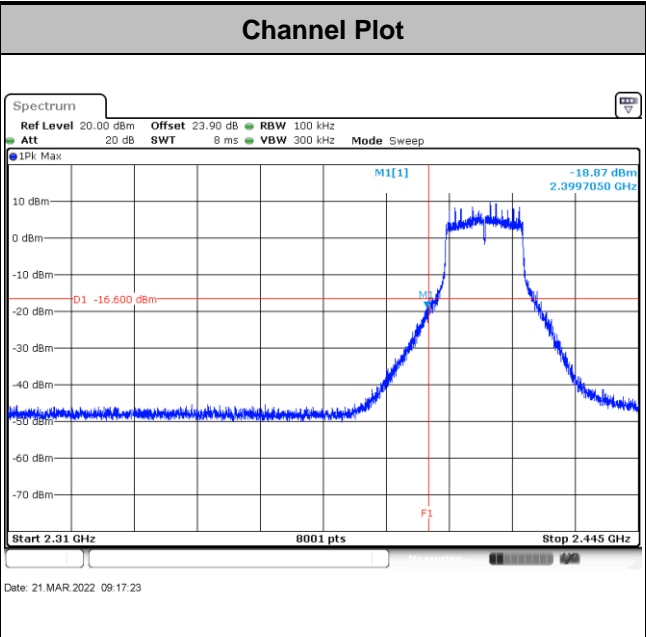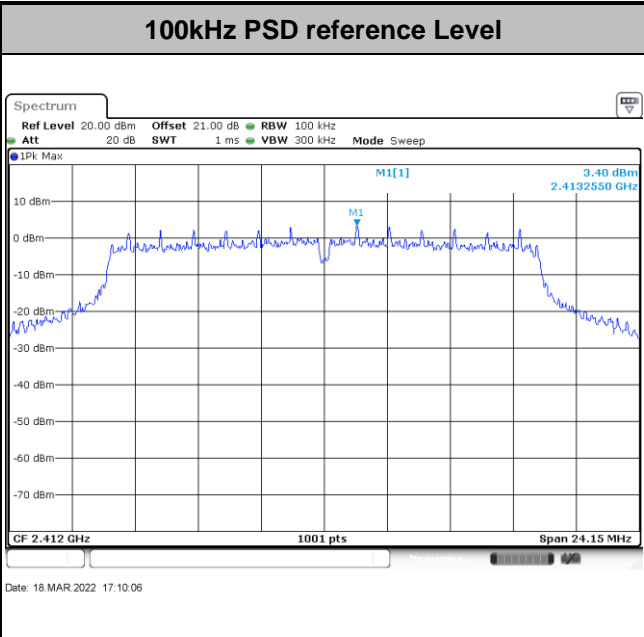





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

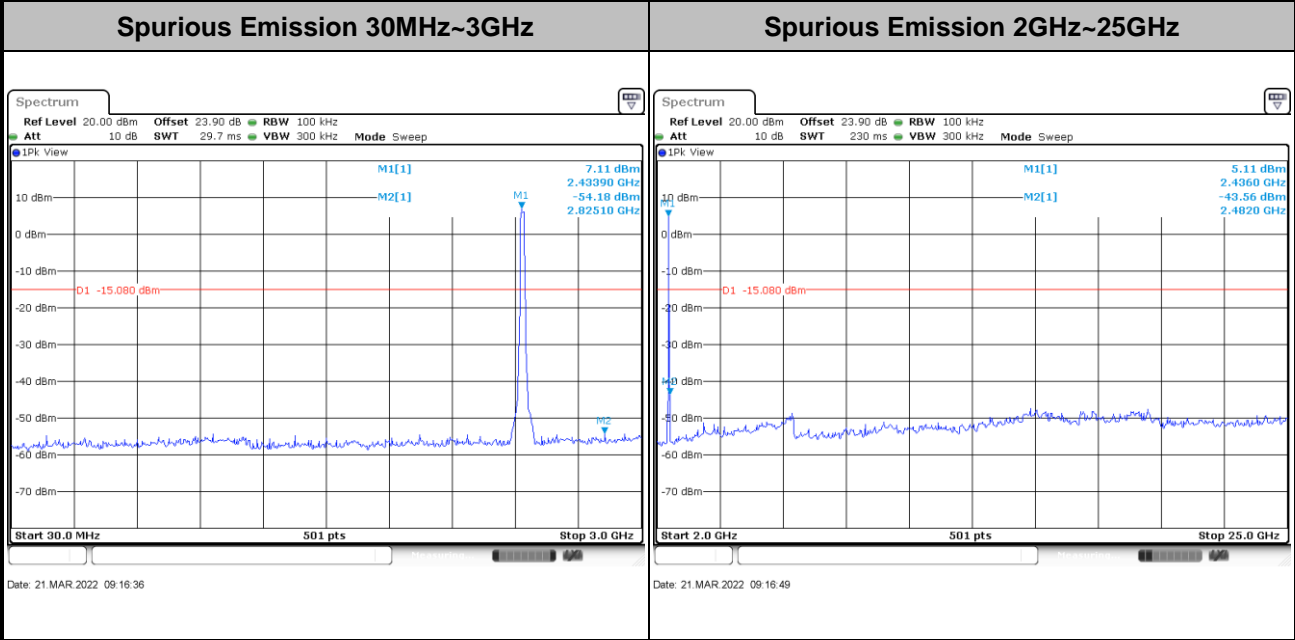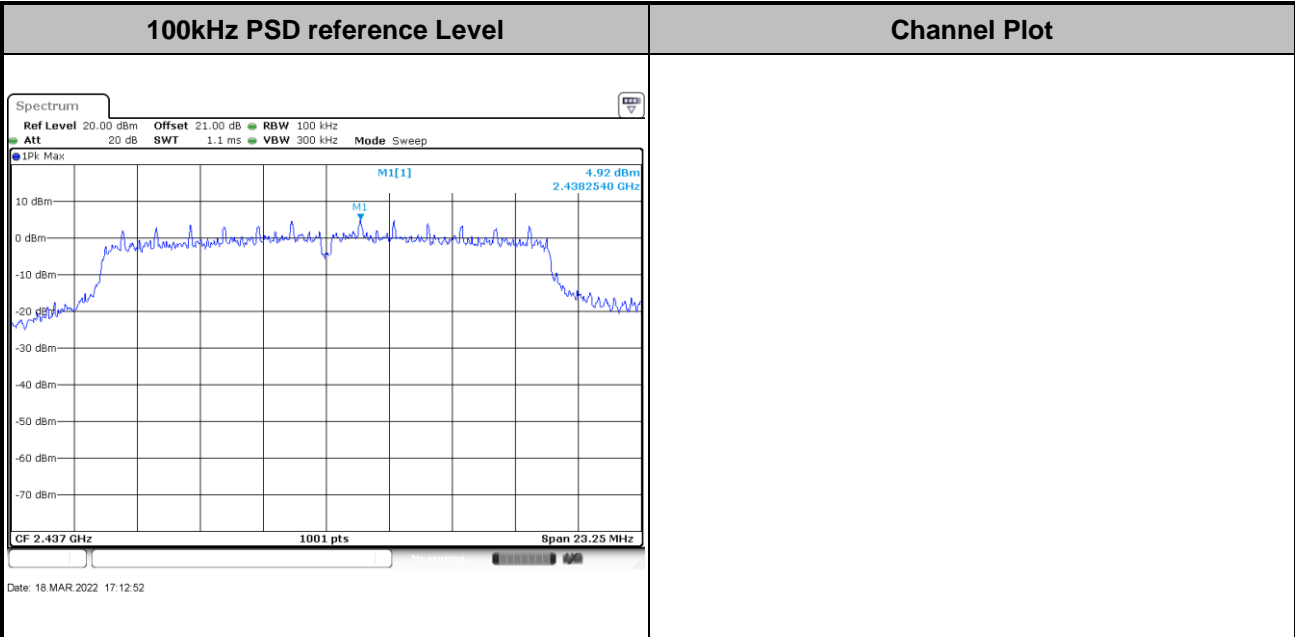





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

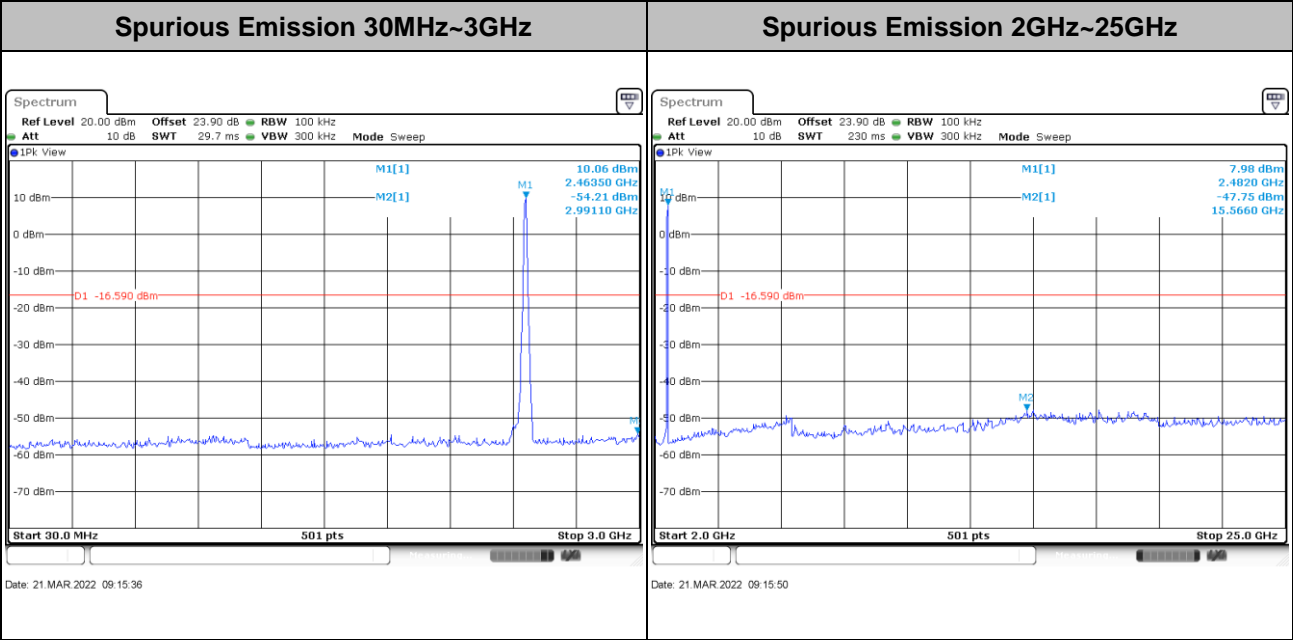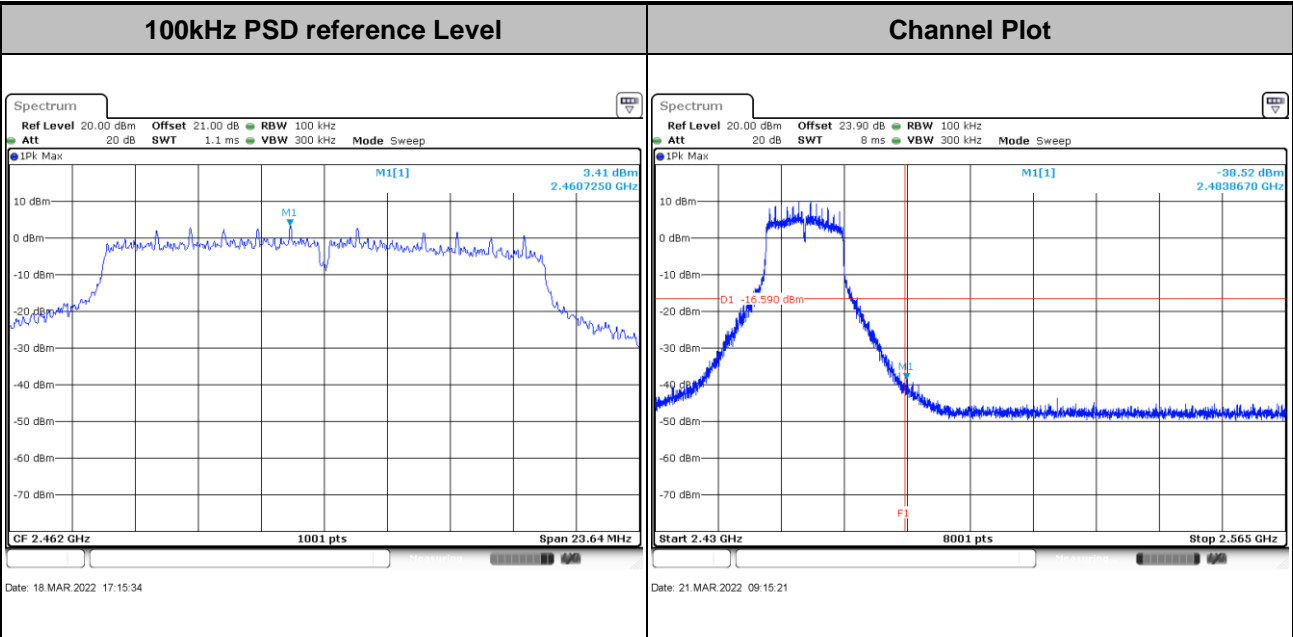







Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

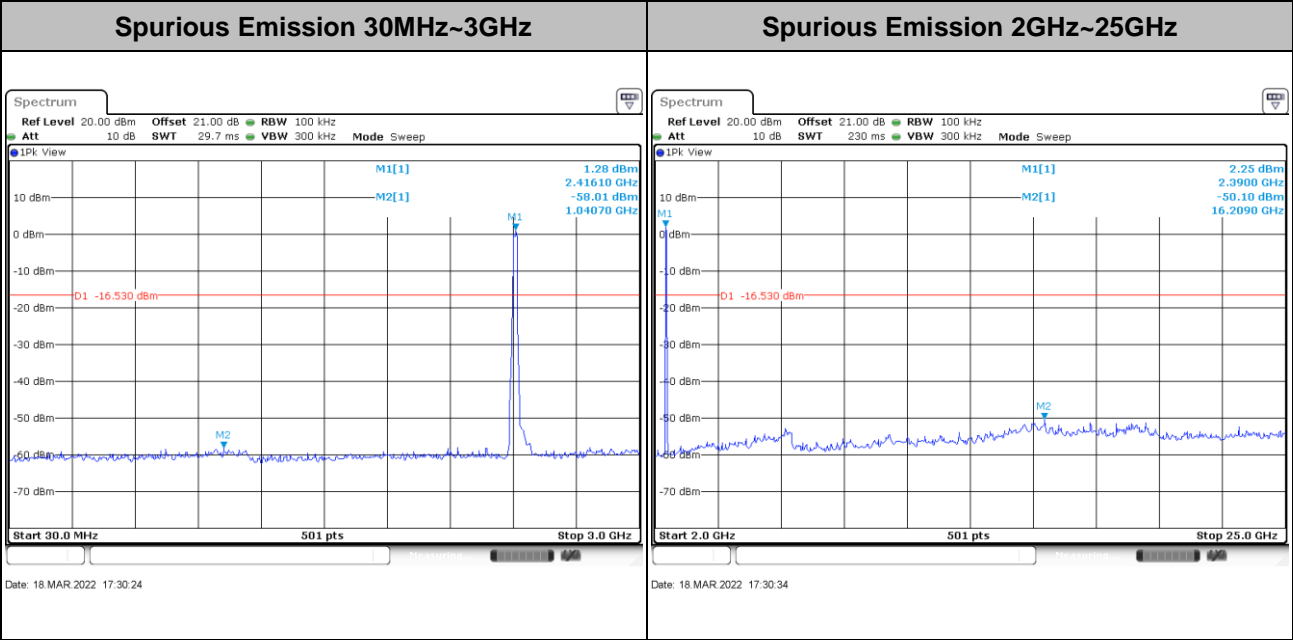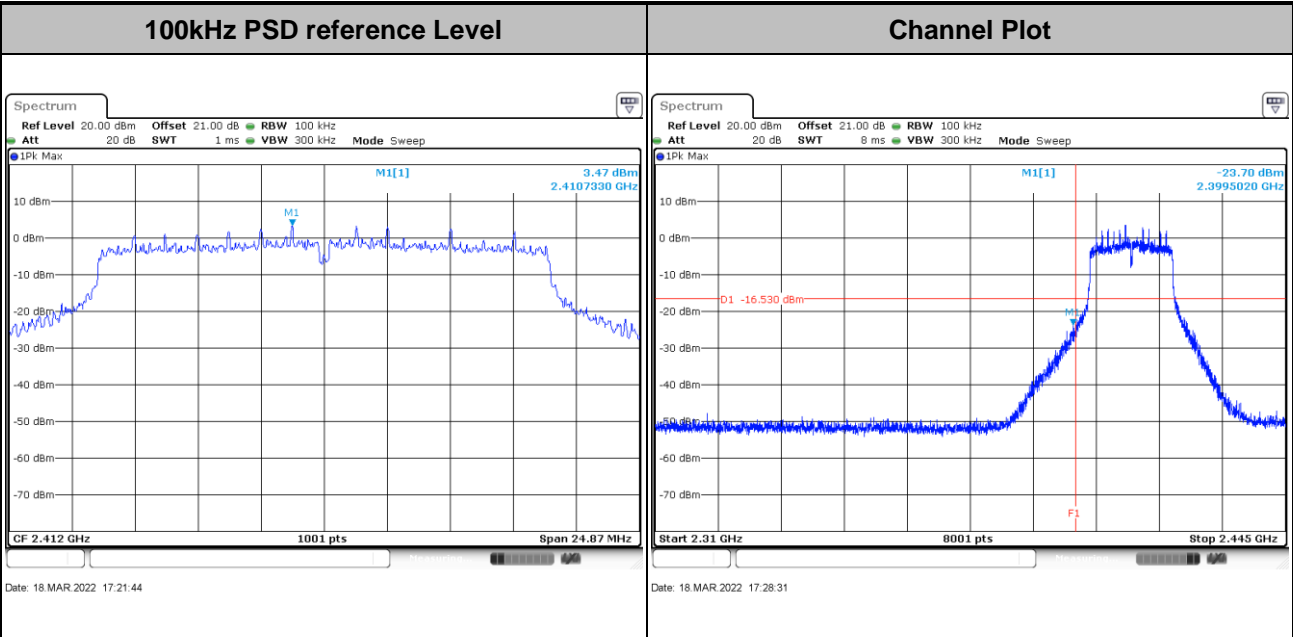





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

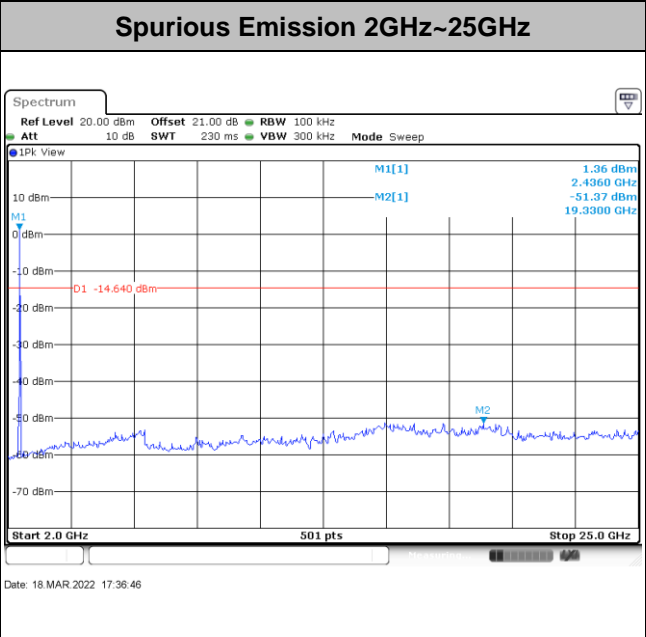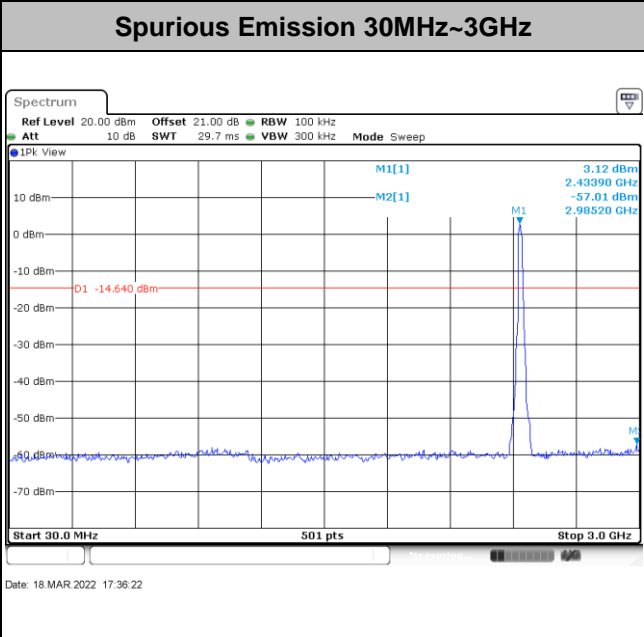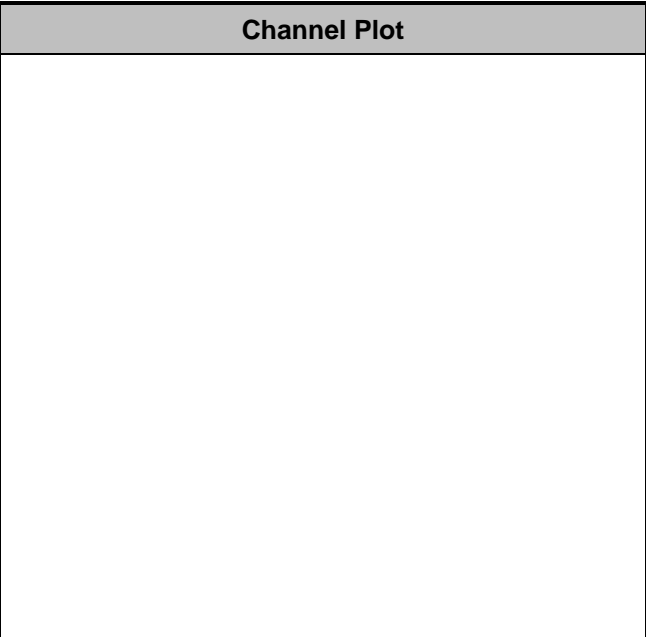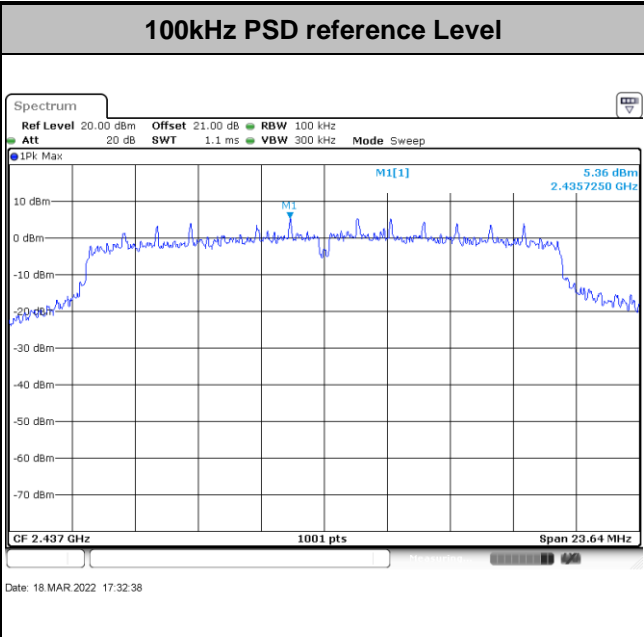





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

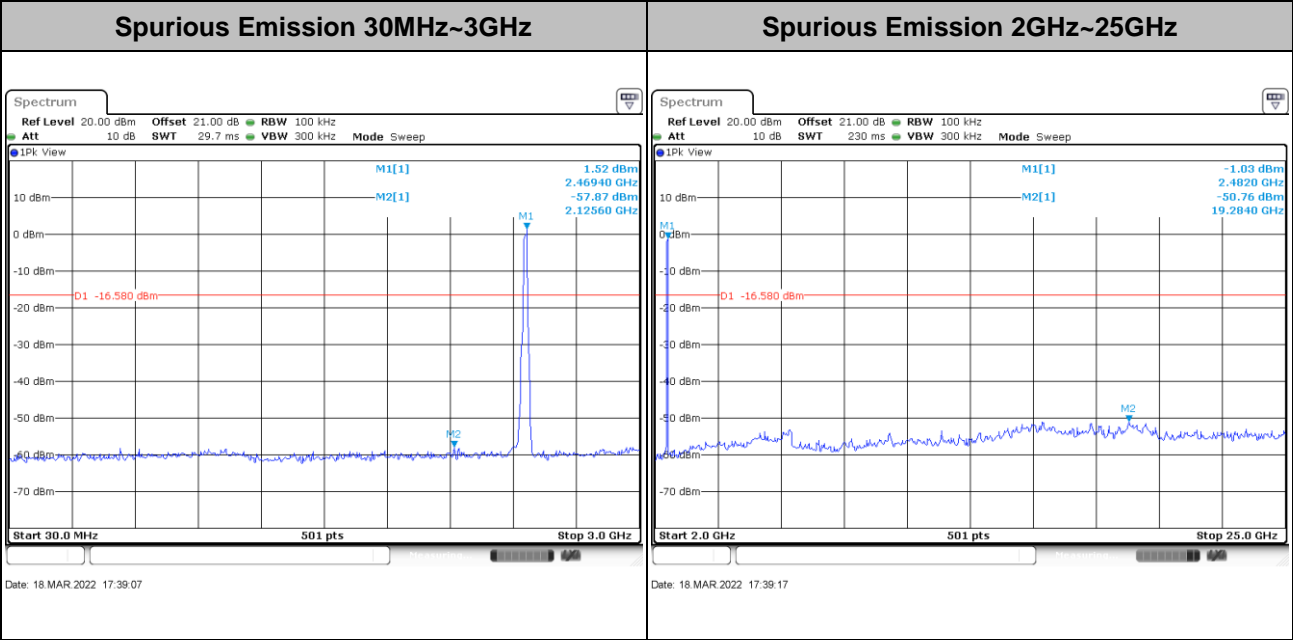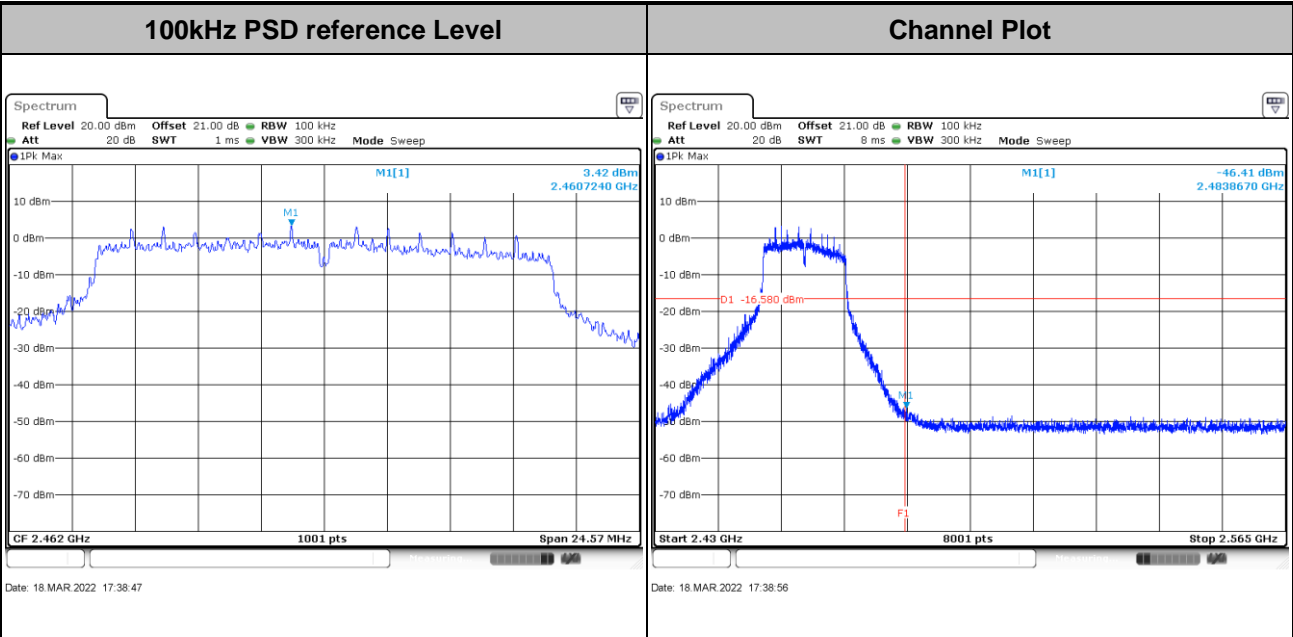





Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

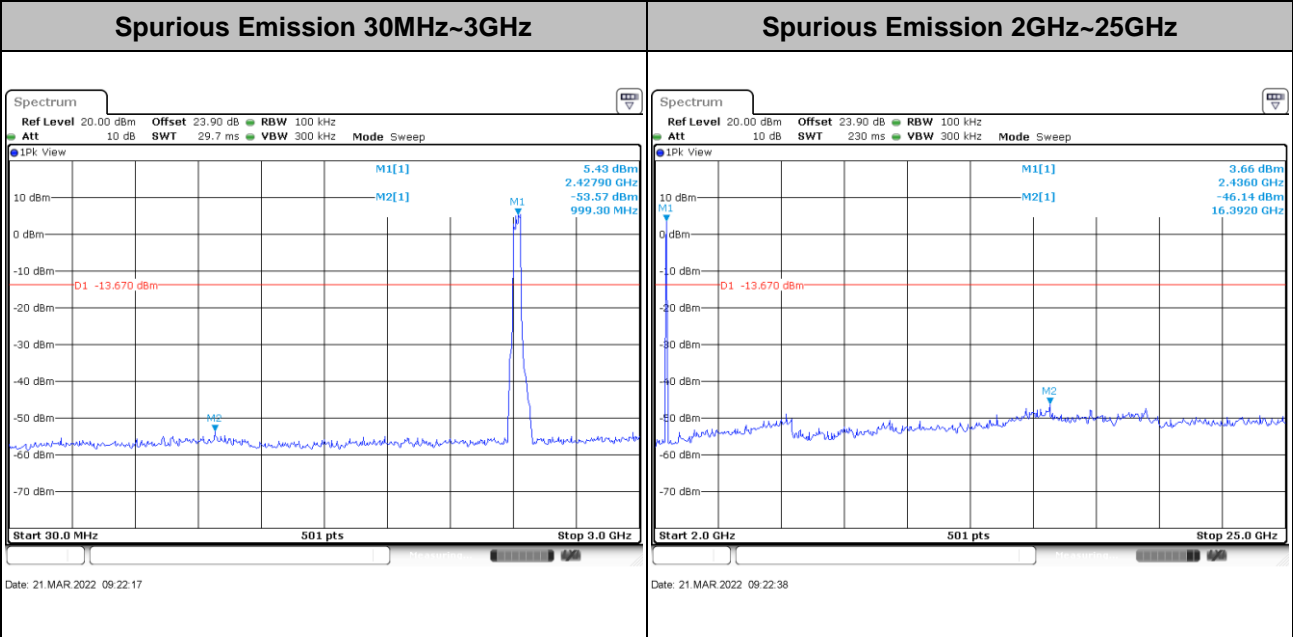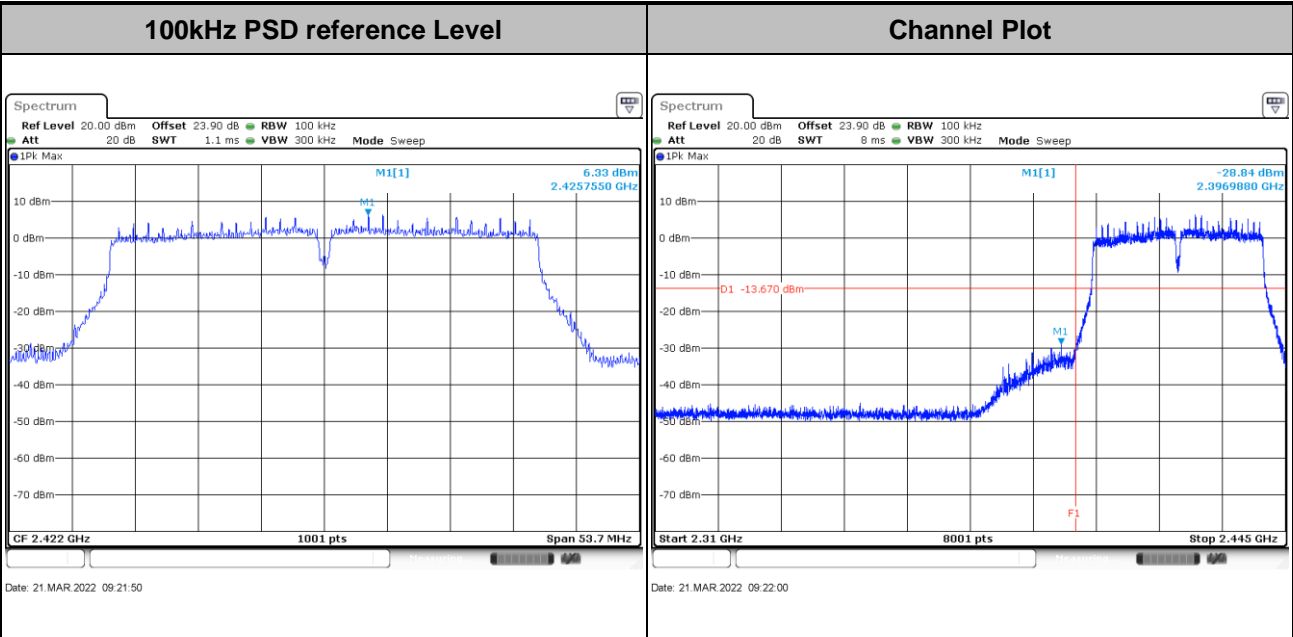





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

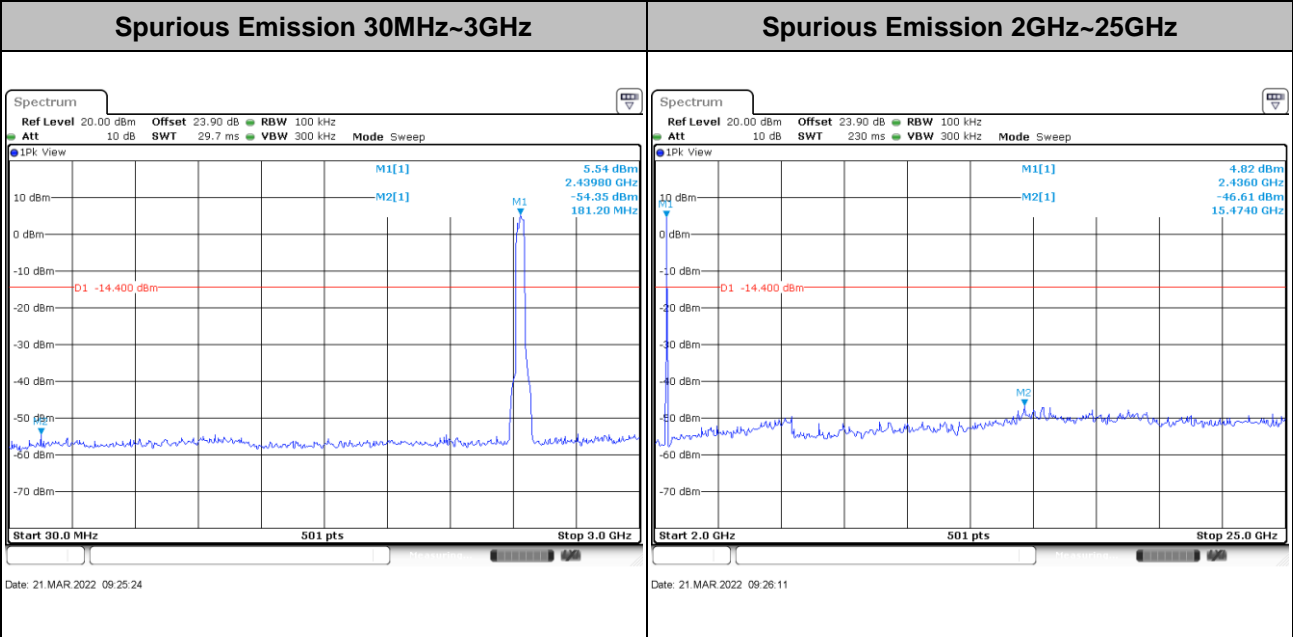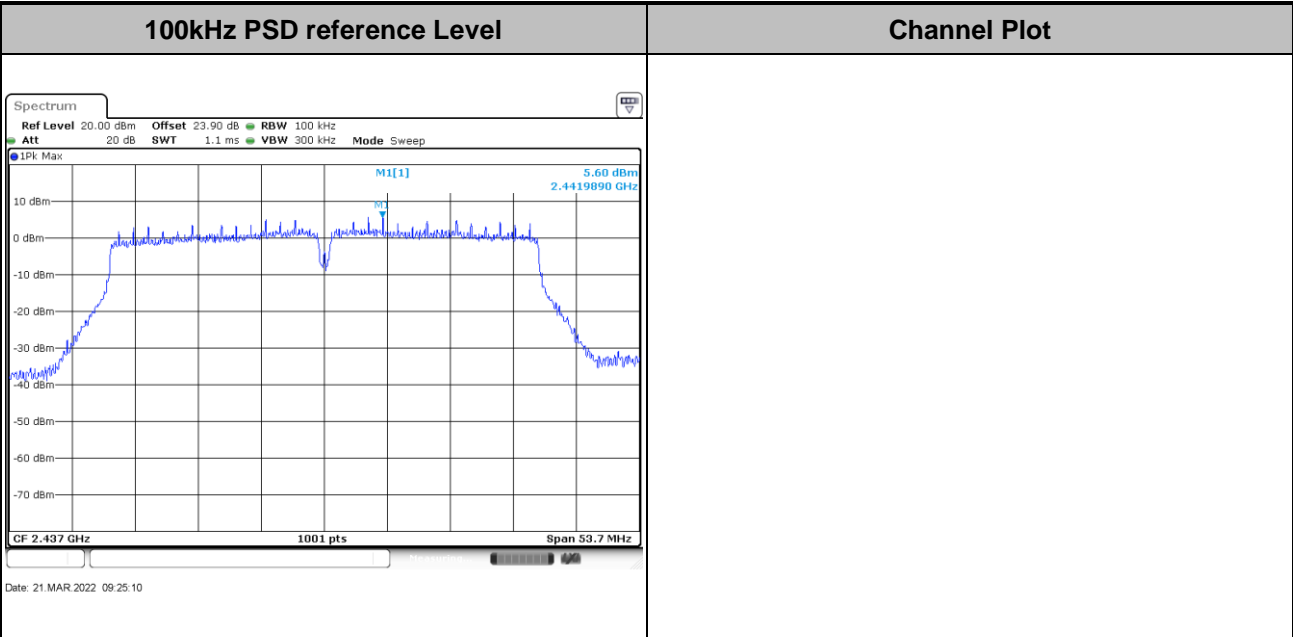



Test Mode : 802.11n HT40	Test Channel : 09
---------------------------------	--------------------------

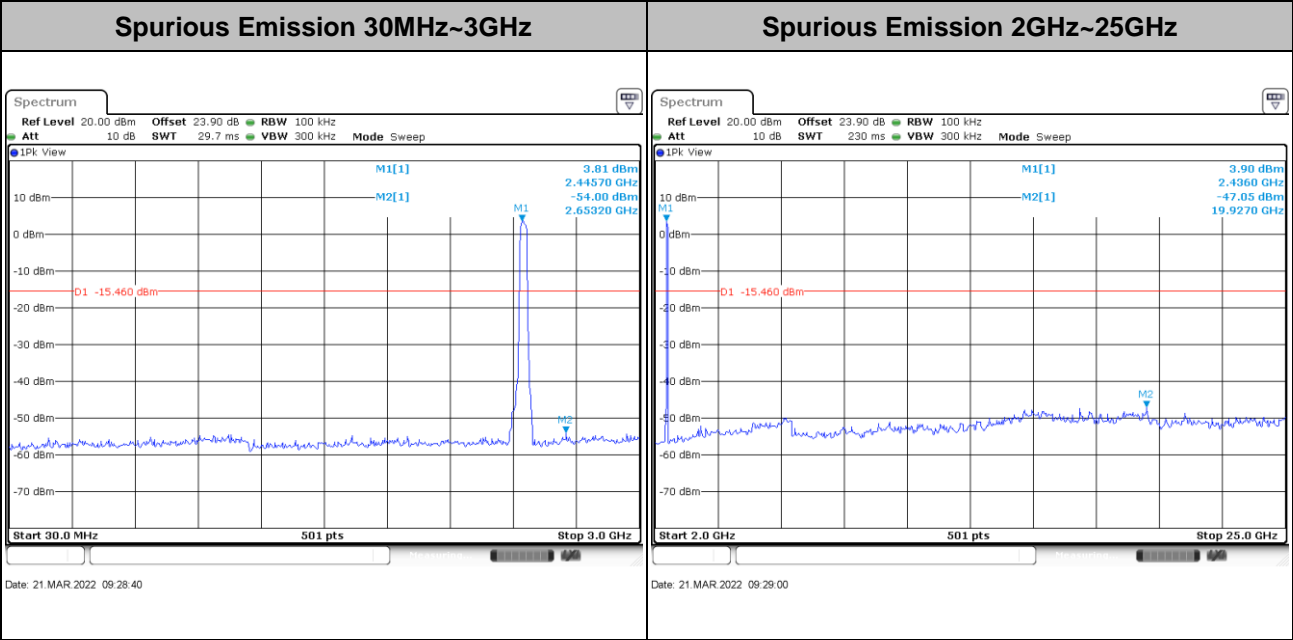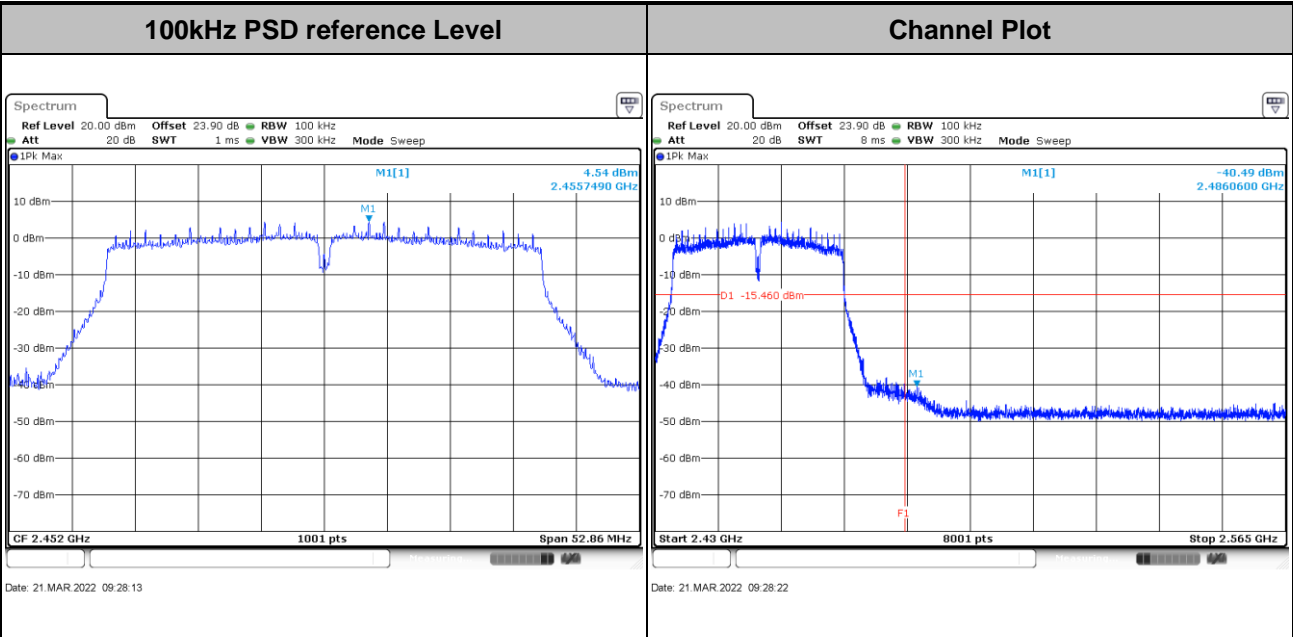



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

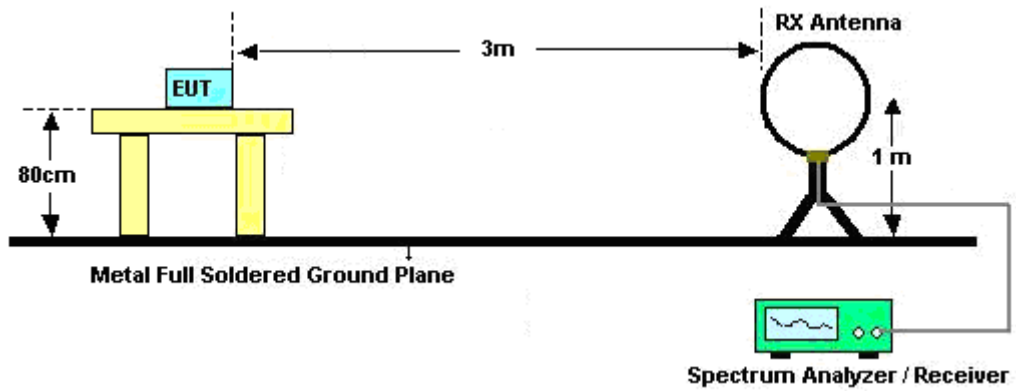


For radiated emissions from 30MHz to 1GHz

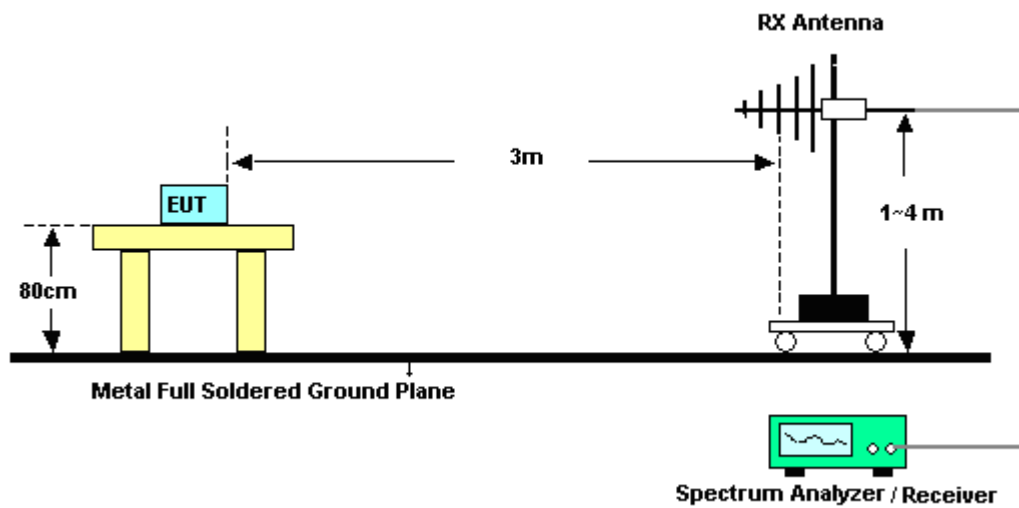

For radiated test from 1GHz to 18GHz

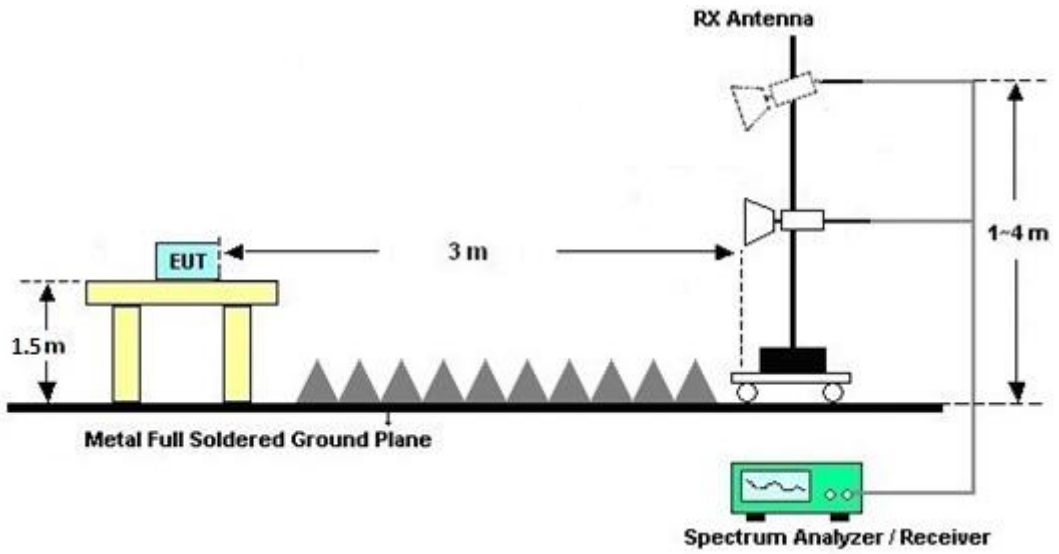

For radiated test above 18GHz

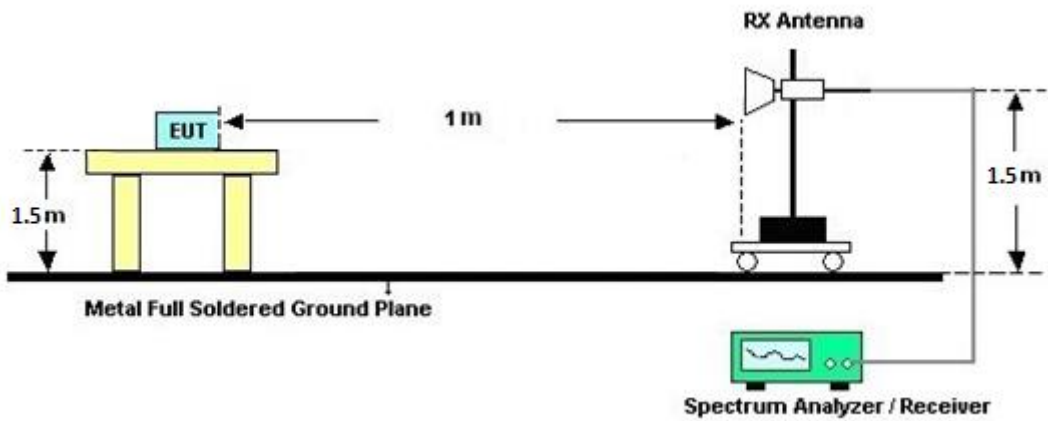



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

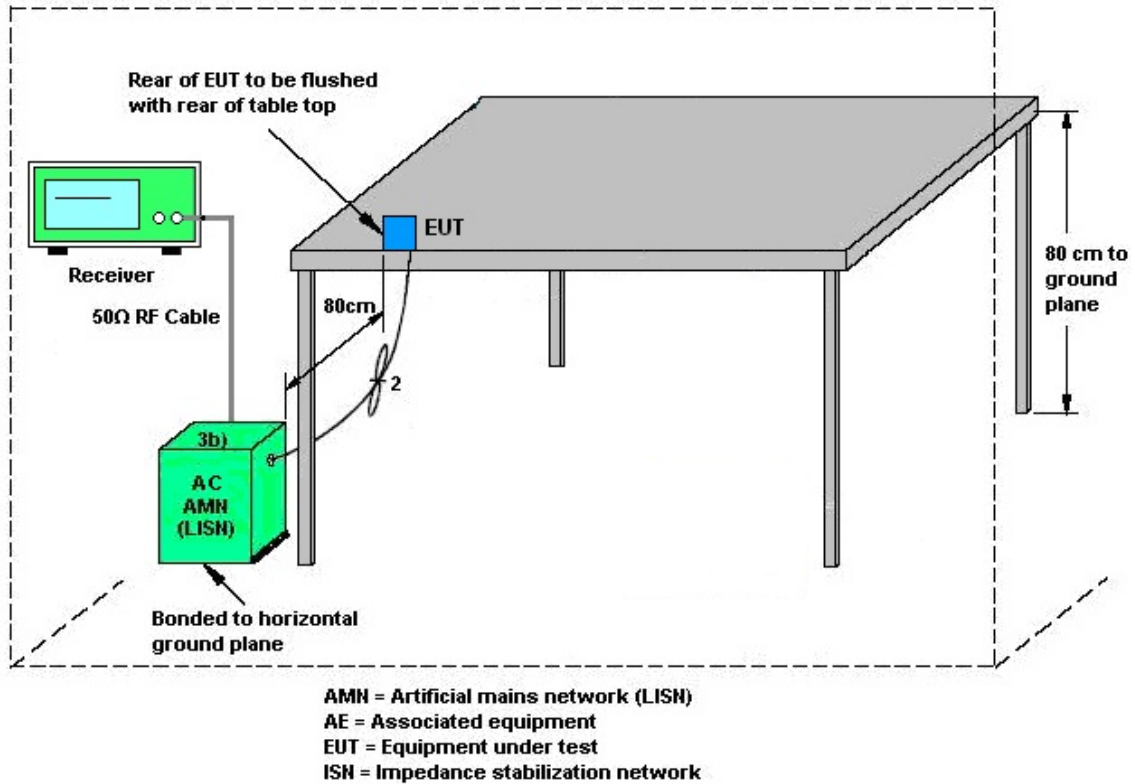

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	Mar. 15, 2022~ Mar. 23, 2022	Sep. 06, 2022	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz to 1GHz	Oct. 09, 2021	Mar. 15, 2022~ Mar. 23, 2022	Oct. 08, 2022	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02114	1G~18GHz	Aug. 04, 2021	Mar. 15, 2022~ Mar. 23, 2022	Aug. 03, 2022	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00993	18GHz ~40GHz	Nov. 30, 2021	Mar. 15, 2022~ Mar. 23, 2022	Nov. 29, 2022	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Jul. 05, 2021	Mar. 15, 2022~ Mar. 23, 2022	Jul. 04, 2022	Radiation (03CH16-HY)
Amplifier	EMCI	EMC051845S E	980729	1-18GHz	Jul. 09, 2021	Mar. 15, 2022~ Mar. 23, 2022	Jul. 08, 2022	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Mar. 15, 2022~ Mar. 23, 2022	Jun. 21, 2022	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 09, 2021	Mar. 15, 2022~ Mar. 23, 2022	Dec. 08, 2022	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec.15, 2021	Mar. 15, 2022~ Mar. 23, 2022	Dec. 14, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/4P E	NA	Aug. 28, 2021	Mar. 15, 2022~ Mar. 23, 2022	Aug. 27, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/4P E	NA	Aug. 28, 2021	Mar. 15, 2022~ Mar. 23, 2022	Aug. 27, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-5 757	NA	Aug. 28, 2021	Mar. 15, 2022~ Mar. 23, 2022	Aug. 27, 2022	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Mar. 15, 2022~ Mar. 23, 2022	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Mar. 15, 2022~ Mar. 23, 2022	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 15, 2022~ Mar. 23, 2022	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 15, 2022~ Mar. 23, 2022	N/A	Radiation (03CH16-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 14, 2022	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 14, 2022	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 29, 2021	Mar. 14, 2022	Oct. 28, 2022	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	N/A	Mar. 14, 2022	N/A	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Feb. 16, 2022	Mar. 14, 2022	Feb. 15, 2023	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2021	Mar. 14, 2022	Oct. 20, 2022	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16. 2021	Mar. 02, 2022~ Mar. 22, 2022	Nov. 15. 2022	Conducted (TH05-HY)
Power Meter	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 16, 2021	Mar. 02, 2022~ Mar. 22, 2022	Dec. 15, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Mar. 02, 2022~ Mar. 22, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Switch Control Manframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12,2021	Mar. 02, 2022~ Mar. 22, 2022	Aug. 11,2022	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	24.6~26.3°C
		Relative Humidity :	48.2~52.7%

EUT Information

Report NO : 1N2513
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

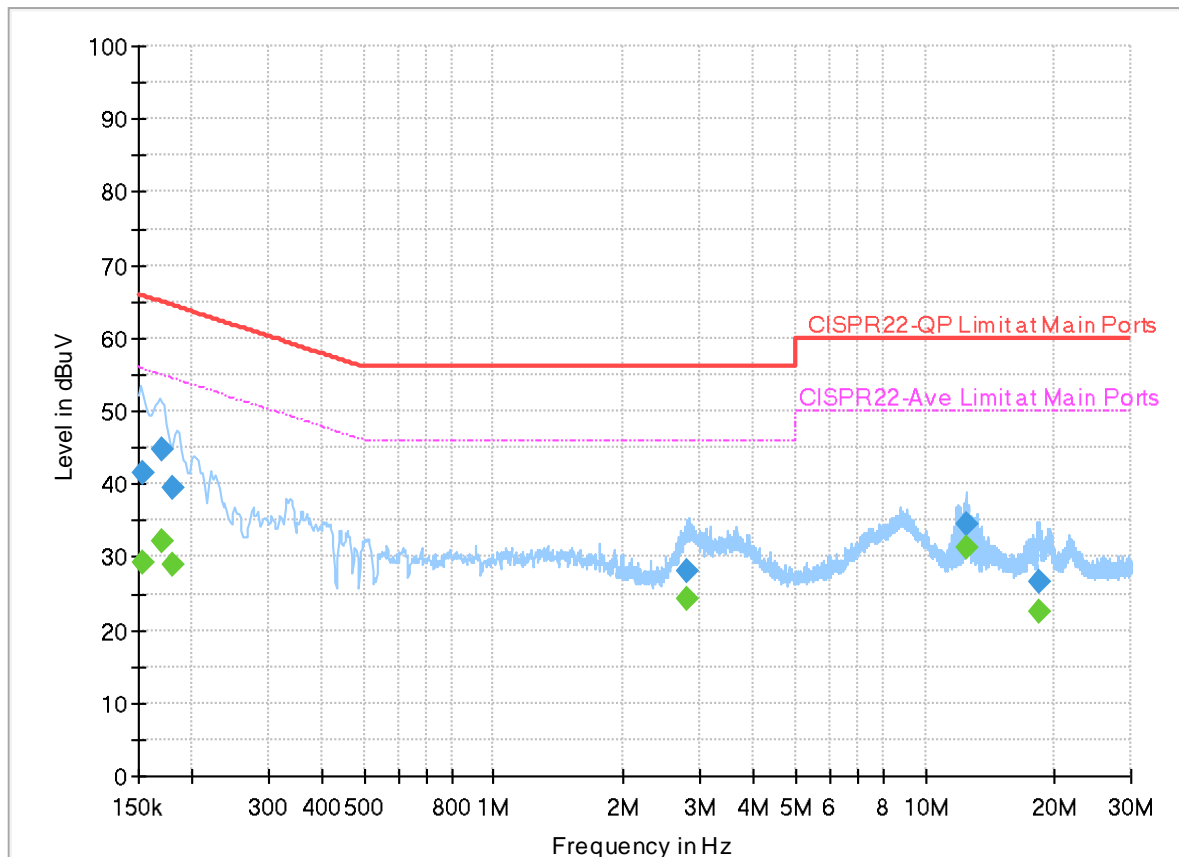


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152700	---	29.14	55.85	26.71	L1	OFF	20.0
0.152700	41.51	---	65.85	24.34	L1	OFF	20.0
0.169170	---	32.12	55.00	22.88	L1	OFF	20.0
0.169170	44.82	---	65.00	20.18	L1	OFF	20.0
0.179250	---	28.89	54.52	25.63	L1	OFF	20.0
0.179250	39.54	---	64.52	24.98	L1	OFF	20.0
2.808600	---	24.26	46.00	21.74	L1	OFF	20.0
2.808600	28.13	---	56.00	27.87	L1	OFF	20.0
12.417000	---	31.31	50.00	18.69	L1	OFF	20.2
12.417000	34.57	---	60.00	25.43	L1	OFF	20.2
18.391290	---	22.37	50.00	27.63	L1	OFF	20.2
18.391290	26.51	---	60.00	33.49	L1	OFF	20.2

EUT Information

Report NO : 1N2513
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

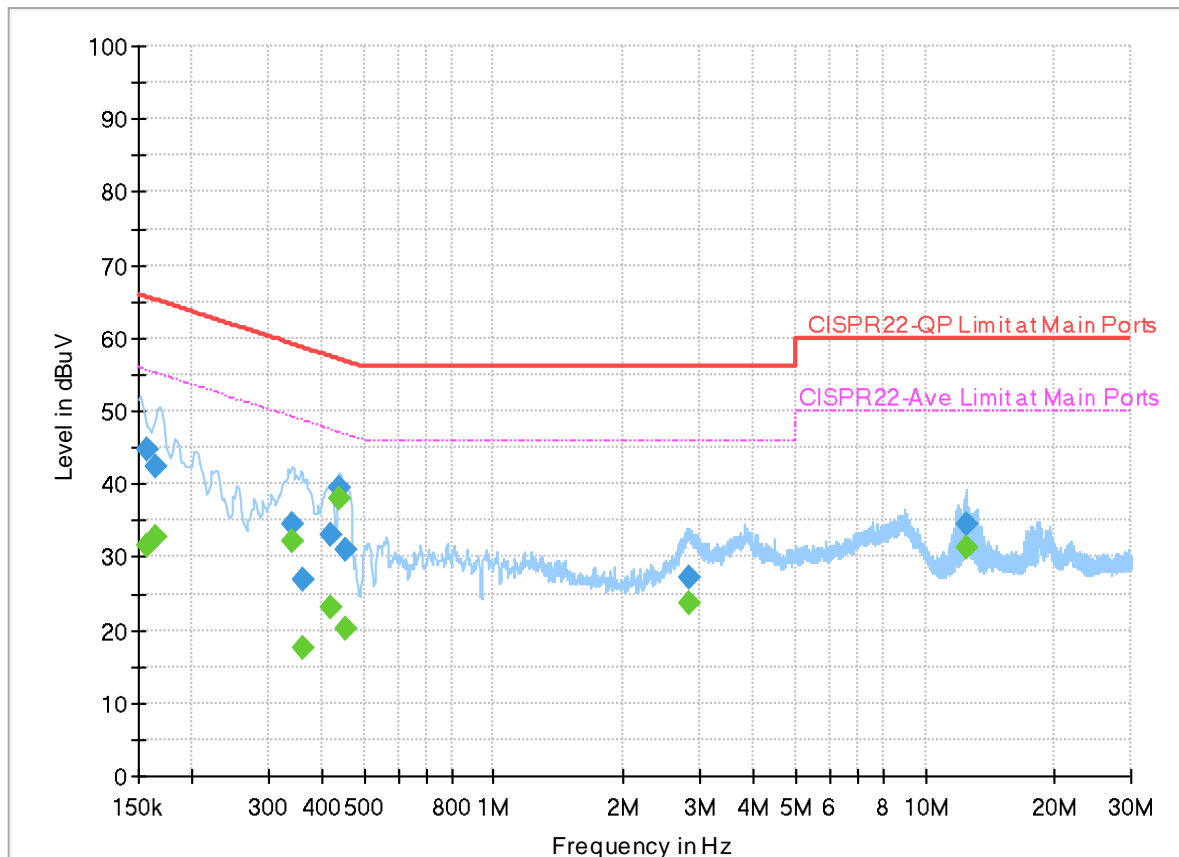

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	31.46	55.63	24.17	N	OFF	20.0
0.156750	44.71	---	65.63	20.92	N	OFF	20.0
0.164310	---	32.82	55.24	22.42	N	OFF	20.0
0.164310	42.43	---	65.24	22.81	N	OFF	20.0
0.342600	---	32.18	49.14	16.96	N	OFF	20.0
0.342600	34.51	---	59.14	24.63	N	OFF	20.0
0.360330	---	17.63	48.72	31.09	N	OFF	20.0
0.360330	26.80	---	58.72	31.92	N	OFF	20.0
0.417750	---	23.02	47.49	24.47	N	OFF	20.0
0.417750	32.90	---	57.49	24.59	N	OFF	20.0
0.440250	---	38.15	47.06	8.91	N	OFF	20.0
0.440250	39.46	---	57.06	17.60	N	OFF	20.0
0.453750	---	20.23	46.81	26.58	N	OFF	20.0
0.453750	30.86	---	56.81	25.95	N	OFF	20.0
2.838480	---	23.78	46.00	22.22	N	OFF	20.0
2.838480	27.08	---	56.00	28.92	N	OFF	20.0
12.417810	---	31.20	50.00	18.80	N	OFF	20.2
12.417810	34.55	---	60.00	25.45	N	OFF	20.2



Appendix B. Radiated Spurious Emission

Test Engineer :	Andy Yang, Karl Hou and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%

<Sample 1>

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		2336.46	56.03	-17.97	74	40.84	27.17	18.11	30.09	292	67	P	H	
		2390	44.29	-9.71	54	28.78	27.36	18.22	30.07	292	67	A	H	
	*	2412	105.24	-	-	89.6	27.45	18.26	30.07	292	67	P	H	
	*	2412	102.17	-	-	86.51	27.46	18.27	30.07	292	67	A	H	
													H	
														H
			2385.705	55.86	-18.14	74	40.38	27.34	18.21	30.07	100	120	P	V
			2386.755	44.26	-9.74	54	28.77	27.35	18.21	30.07	100	120	A	V
	*		2412	104.5	-	-	88.86	27.45	18.26	30.07	100	120	P	V
	*		2412	101.48	-	-	85.84	27.45	18.26	30.07	100	120	A	V
													V	
802.11b CH 06 2437MHz		2358.86	56.58	-17.42	74	41.26	27.24	18.16	30.08	258	71	P	H	
		2389.94	44.24	-9.76	54	28.73	27.36	18.22	30.07	258	71	A	H	
	*	2437	108.3	-	-	92.5	27.55	18.31	30.06	258	71	P	H	
	*	2437	105.18	-	-	89.38	27.55	18.31	30.06	258	71	A	H	
			2483.62	56.78	-17.22	74	40.63	27.8	18.39	30.04	258	71	P	H
			2495.17	45.2	-8.8	54	28.96	27.87	18.41	30.04	258	71	A	H
			2385.32	55.86	-18.14	74	40.38	27.34	18.21	30.07	100	117	P	V
			2389.8	44.2	-9.8	54	28.69	27.36	18.22	30.07	100	117	A	V
	*		2437	107.88	-	-	92.08	27.55	18.31	30.06	100	117	P	V
	*		2437	104.89	-	-	89.09	27.55	18.31	30.06	100	117	A	V
		2496.29	56.77	-17.23	74	40.52	27.88	18.41	30.04	100	117	P	V	
		2487.4	45.39	-8.61	54	29.21	27.82	18.4	30.04	100	117	A	V	



802.11b CH 11 2462MHz	*	2462	108.53	-	-	92.56	27.67	18.35	30.05	319	68	P	H
	*	2462	105.42	-	-	89.45	27.67	18.35	30.05	319	68	A	H
		2487	57.17	-16.83	74	40.99	27.82	18.4	30.04	319	68	P	H
		2487.52	46.43	-7.57	54	30.24	27.83	18.4	30.04	319	68	A	H
													H
													H
	*	2462	108.45	-	-	92.48	27.67	18.35	30.05	100	125	P	V
	*	2462	105.4	-	-	89.43	27.67	18.35	30.05	100	125	A	V
		2485.64	57.94	-16.06	74	41.78	27.81	18.39	30.04	100	125	P	V
		2483.52	47.62	-6.38	54	31.47	27.8	18.39	30.04	100	125	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		4824	51.71	-22.29	74	62.19	32.45	12.34	55.27	100	17	P	H	
		4824	49.12	-4.88	54	59.6	32.45	12.34	55.27	100	17	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4824	51.46	-22.54	74	61.94	32.45	12.34	55.27	100	238	P	V
			4824	49.22	-4.78	54	59.7	32.45	12.34	55.27	100	238	A	V
														V
														V
														V
														V
														V
														V
													V	



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 06 2437MHz		4874	48.13	-25.87	74	58.54	32.6	12.32	55.33	105	22	P	H	
		4874	44.89	-9.11	54	55.3	32.6	12.32	55.33	105	22	A	H	
		7311	46	-28	74	49.04	36.78	15.83	55.65	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4874	47.49	-26.51	74	57.9	32.6	12.32	55.33	-	-	P	V
			7311	45.85	-28.15	74	48.89	36.78	15.83	55.65	-	-	P	V
														V
														V
														V
														V
														V
														V
														V



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz		4924	45.89	-28.11	74	56.14	32.84	12.3	55.39	-	-	P	H
		7386	46.08	-27.92	74	49.08	36.41	16.25	55.66	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4924	45.27	-28.73	74	55.52	32.84	12.3	55.39	-	-	P
		7386	45.83	-28.17	74	48.83	36.41	16.25	55.66	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 01 2412MHz		2390	57.66	-16.34	74	42.15	27.36	18.22	30.07	328	67	P	H	
		2390	47.33	-6.67	54	31.82	27.36	18.22	30.07	328	67	A	H	
	*	2412	107.16	-	-	91.52	27.45	18.26	30.07	328	67	P	H	
	*	2412	98.75	-	-	83.11	27.45	18.26	30.07	328	67	A	H	
													H	
														H
			2389.59	56.78	-17.22	74	41.27	27.36	18.22	30.07	100	121	P	V
			2390	46.8	-7.2	54	31.29	27.36	18.22	30.07	100	121	A	V
	*		2412	105.76	-	-	90.12	27.45	18.26	30.07	100	121	P	V
	*		2412	97.58	-	-	81.94	27.45	18.26	30.07	100	121	A	V
														V
														V
802.11g CH 06 2437MHz		2368.66	56.2	-17.8	74	40.83	27.27	18.18	30.08	258	72	P	H	
		2389.52	44.3	-9.7	54	28.79	27.36	18.22	30.07	258	72	A	H	
	*	2437	108.9	-	-	93.1	27.55	18.31	30.06	258	72	P	H	
	*	2437	101.46	-	-	85.66	27.55	18.31	30.06	258	72	A	H	
			2497.41	58.27	-15.73	74	42.01	27.88	18.42	30.04	258	72	P	H
			2485.65	45.51	-8.49	54	29.35	27.81	18.39	30.04	258	72	A	H
			2366.84	55.64	-18.36	74	40.28	27.27	18.17	30.08	101	116	P	V
			2388.4	44.24	-9.76	54	28.74	27.35	18.22	30.07	101	116	A	V
	*		2437	108.3	-	-	92.5	27.55	18.31	30.06	101	116	P	V
	*		2437	100.94	-	-	85.14	27.55	18.31	30.06	101	116	A	V
			2484.67	57.76	-16.24	74	41.6	27.81	18.39	30.04	101	116	P	V
			2484.88	46.35	-7.65	54	30.19	27.81	18.39	30.04	101	116	A	V



802.11g CH 11 2462MHz	*	2462	108.65	-	-	92.68	27.67	18.35	30.05	317	72	P	H
	*	2462	101.13	-	-	85.16	27.67	18.35	30.05	317	72	A	H
		2483.68	58.56	-15.44	74	42.41	27.8	18.39	30.04	317	72	P	H
		2483.52	48.62	-5.38	54	32.47	27.8	18.39	30.04	317	72	A	H
													H
													H
	*	2462	109.74	-	-	93.77	27.67	18.35	30.05	108	125	P	V
	*	2462	101.36	-	-	85.39	27.67	18.35	30.05	108	125	A	V
		2484.84	60.07	-13.93	74	43.91	27.81	18.39	30.04	108	125	P	V
		2483.52	49.49	-4.51	54	33.34	27.8	18.39	30.04	108	125	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	44.49	-29.51	74	54.97	32.45	12.34	55.27	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4824	45.69	-28.31	74	56.17	32.45	12.34	55.27	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 06 2437MHz		4874	43.4	-30.6	74	53.81	32.6	12.32	55.33	-	-	P	H
		7311	46.87	-27.13	74	49.91	36.78	15.83	55.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4874	42.99	-31.01	74	53.4	32.6	12.32	55.33	-	-	P
		7311	46.71	-27.29	74	49.75	36.78	15.83	55.65	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 11 2462MHz		4924	42.53	-31.47	74	52.78	32.84	12.3	55.39	-	-	P	H
		7386	46.73	-27.27	74	49.73	36.41	16.25	55.66	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4924	41.73	-32.27	74	51.98	32.84	12.3	55.39	-	-	P
		7386	46.37	-27.63	74	49.37	36.41	16.25	55.66	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 01 2412MHz		2389.8	59.69	-14.31	74	44.18	27.36	18.22	30.07	329	70	P	H	
		2390	50.12	-3.88	54	34.61	27.36	18.22	30.07	329	70	A	H	
	*	2412	105.62	-	-	89.98	27.45	18.26	30.07	329	70	P	H	
	*	2412	98.1	-	-	82.46	27.45	18.26	30.07	329	70	A	H	
													H	
													H	
			2389.275	58.89	-15.11	74	43.38	27.36	18.22	30.07	100	117	P	V
			2390	49.1	-4.9	54	33.59	27.36	18.22	30.07	100	117	A	V
		*	2412	104.76	-	-	89.12	27.45	18.26	30.07	100	117	P	V
		*	2412	96.99	-	-	81.35	27.45	18.26	30.07	100	117	A	V
													V	
													V	
802.11n HT20 CH 06 2437MHz		2389.38	55.79	-18.21	74	40.28	27.36	18.22	30.07	259	70	P	H	
		2387.98	45.43	-8.57	54	29.93	27.35	18.22	30.07	259	70	A	H	
	*	2437	109.15	-	-	93.35	27.55	18.31	30.06	259	70	P	H	
	*	2437	101.26	-	-	85.46	27.55	18.31	30.06	259	70	A	H	
			2487.47	57.22	-16.78	74	41.04	27.82	18.4	30.04	259	70	P	H
			2485.51	46.71	-7.29	54	30.55	27.81	18.39	30.04	259	70	A	H
			2387	56.5	-17.5	74	41.01	27.35	18.21	30.07	100	119	P	V
			2385.74	45.32	-8.68	54	29.84	27.34	18.21	30.07	100	119	A	V
		*	2437	108.99	-	-	93.19	27.55	18.31	30.06	100	119	P	V
		*	2437	100.94	-	-	85.14	27.55	18.31	30.06	100	119	A	V
		2484.88	57.46	-16.54	74	41.3	27.81	18.39	30.04	100	119	P	V	
		2484.74	47.46	-6.54	54	31.3	27.81	18.39	30.04	100	119	A	V	



802.11n HT20 CH 11 2462MHz	*	2462	108.62	-	-	92.65	27.67	18.35	30.05	319	69	P	H
	*	2462	100.84	-	-	84.87	27.67	18.35	30.05	319	69	A	H
		2483.68	61.21	-12.79	74	45.06	27.8	18.39	30.04	319	69	P	H
		2483.52	50.27	-3.73	54	34.12	27.8	18.39	30.04	319	69	A	H
													H
													H
	*	2462	109.22	-	-	93.25	27.67	18.35	30.05	101	120	P	V
	*	2462	101	-	-	85.03	27.67	18.35	30.05	101	120	A	V
		2484.12	62.64	-11.36	74	46.49	27.8	18.39	30.04	101	120	P	V
		2483.6	52.26	-1.74	54	36.11	27.8	18.39	30.04	101	120	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 01 2412MHz		4824	43.92	-30.08	74	54.4	32.45	12.34	55.27			P	H	
													H	
													H	
													H	
													H	
													H	
			4824	42.54	-31.46	74	53.02	32.45	12.34	55.27			P	V
														V
														V
														V



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 06 2437MHz		4874	41.09	-32.91	74	51.5	32.6	12.32	55.33	-	-	P	H
		7311	45.76	-28.24	74	48.8	36.78	15.83	55.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4874	42.14	-31.86	74	52.55	32.6	12.32	55.33	-	-	P
		7311	45.82	-28.18	74	48.86	36.78	15.83	55.65	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 11 2462MHz		4924	40.93	-33.07	74	51.18	32.84	12.3	55.39	-	-	P	H
		7386	45.48	-28.52	74	48.48	36.41	16.25	55.66	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.24	60.67	-13.33	74	45.16	27.36	18.22	30.07	336	66	P	H
		2389.8	52.57	-1.43	54	37.06	27.36	18.22	30.07	336	66	A	H
	*	2422	105.09	-	-	89.38	27.49	18.28	30.06	325	69	P	H
	*	2422	97.14	-	-	81.43	27.49	18.28	30.06	325	69	A	H
		2486.35	58.37	-15.63	74	42.19	27.82	18.4	30.04	325	69	P	H
		2486.98	47.64	-6.36	54	31.46	27.82	18.4	30.04	325	69	A	H
		2389.24	59.99	-14.01	74	44.48	27.36	18.22	30.07	100	4	P	V
		2389.94	51.5	-2.5	54	35.99	27.36	18.22	30.07	100	4	A	V
	*	2422	105.53	-	-	89.82	27.49	18.28	30.06	100	118	P	V
	*	2422	97.15	-	-	81.44	27.49	18.28	30.06	100	118	A	V
		2487.19	57.66	-16.34	74	41.48	27.82	18.4	30.04	100	118	P	V
		2485.3	48.64	-5.36	54	32.48	27.81	18.39	30.04	100	118	A	V
802.11n HT40 CH 06 2437MHz		2379.16	56.68	-17.32	74	41.24	27.32	18.2	30.08	302	298	P	H
		2347.8	46.58	-7.42	54	31.33	27.2	18.14	30.09	302	298	A	H
	*	2437	103.71	-	-	87.91	27.55	18.31	30.06	302	298	P	H
	*	2437	96.11	-	-	80.31	27.55	18.31	30.06	302	298	A	H
		2483.62	58.04	-15.96	74	41.89	27.8	18.39	30.04	302	298	P	H
		2483.5	49.05	-4.95	54	32.9	27.8	18.39	30.04	302	298	A	H
		2376.5	56.63	-17.37	74	41.21	27.31	18.19	30.08	100	121	P	V
		2389.52	46.62	-7.38	54	31.11	27.36	18.22	30.07	100	121	A	V
	*	2437	105.72	-	-	89.92	27.55	18.31	30.06	100	121	P	V
	*	2437	97.51	-	-	81.71	27.55	18.31	30.06	100	121	A	V
		2483.76	61.04	-12.96	74	44.89	27.8	18.39	30.04	100	121	P	V
		2484.04	52.52	-1.48	54	36.37	27.8	18.39	30.04	100	121	A	V



802.11n HT40 CH 09 2452MHz		2389.52	55.96	-18.04	74	40.45	27.36	18.22	30.07	320	69	P	H
		2383.5	46.17	-7.83	54	30.7	27.33	18.21	30.07	320	69	A	H
	*	2452	104.4	-	-	88.51	27.61	18.33	30.05	320	69	P	H
	*	2452	96.37	-	-	80.48	27.61	18.33	30.05	320	69	A	H
		2484.25	59.68	-14.32	74	43.52	27.81	18.39	30.04	320	69	P	H
		2483.97	50.17	-3.83	54	34.02	27.8	18.39	30.04	320	69	A	H
		2348.08	55.8	-18.2	74	40.55	27.2	18.14	30.09	100	114	P	V
		2376.08	46.36	-7.64	54	30.95	27.3	18.19	30.08	100	114	A	V
	*	2452	104.3	-	-	88.41	27.61	18.33	30.05	100	114	P	V
	*	2452	97.04	-	-	81.15	27.61	18.33	30.05	100	114	A	V
		2483.55	60.92	-13.08	74	44.77	27.8	18.39	30.04	100	114	P	V
		2484.74	52.72	-1.28	54	36.56	27.81	18.39	30.04	100	114	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT40 CH 03 2422MHz		4844	40.62	-33.38	74	51.09	32.49	12.33	55.29	100	0	P	H	
		7266	46.03	-27.97	74	49.21	36.87	15.59	55.64	100	0	P	H	
													H	
													H	
													H	
													H	



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 06 2437MHz		4874	40.16	-33.84	74	50.57	32.6	12.32	55.33	-	-	P	H
		7311	46.41	-27.59	74	49.45	36.78	15.83	55.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4874	40.53	-33.47	74	50.94	32.6	12.32	55.33	-	-	P
		7311	45.59	-28.41	74	48.63	36.78	15.83	55.65	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 09 2452MHz		4904	40.57	-33.43	74	50.92	32.72	12.3	55.37	-	-	P	H
		7356	46.11	-27.89	74	49.04	36.65	16.08	55.66	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11n HT40 LF		92.08	32.45	-11.05	43.5	48.19	14.82	1.74	32.3	-	-	P	H	
		567.38	28.94	-17.06	46	31.26	25.97	4.18	32.47	-	-	P	H	
		769.14	30.82	-15.18	46	30.21	28.09	4.83	32.31	-	-	P	H	
		896.21	38.36	-7.64	46	35.72	28.94	5.27	31.57	-	-	P	H	
		903.97	38.46	-7.54	46	35.6	29.08	5.29	31.51	-	-	P	H	
		959.26	34.83	-11.17	46	29.59	30.88	5.48	31.12	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
														H
														H
														H
														H
														H
														H
			38.73	33.13	-6.87	40	44.26	20.15	1.02	32.3	-	-	P	V
		50.37	33.48	-6.52	40	50.39	14.14	1.25	32.3	-	-	P	V	
		91.11	31.75	-11.75	43.5	47.61	14.7	1.74	32.3	-	-	P	V	
		896.21	38.76	-7.24	46	36.12	28.94	5.27	31.57	-	-	P	V	
		903.97	38.36	-7.64	46	35.5	29.08	5.29	31.51	-	-	P	V	
		957.32	34.92	-11.08	46	29.8	30.79	5.47	31.14	-	-	P	V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



<Sample 2>

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 09 2452MHz		2382.1	55.64	-18.36	74	40.19	27.33	18.2	30.08	287	63	P	H
		2385.04	45.94	-8.06	54	30.46	27.34	18.21	30.07	287	63	A	H
	*	2452	102.65	-	-	86.76	27.61	18.33	30.05	287	63	P	H
	*	2452	95.18	-	-	79.29	27.61	18.33	30.05	287	63	A	H
		2483.97	58.92	-15.08	74	42.77	27.8	18.39	30.04	287	63	P	H
		2483.76	50.19	-3.81	54	34.04	27.8	18.39	30.04	287	63	A	H
		2336.46	56.29	-17.71	74	41.1	27.17	18.11	30.09	100	115	P	V
		2384.9	46.05	-7.95	54	30.57	27.34	18.21	30.07	100	115	A	V
	*	2452	104.02	-	-	88.13	27.61	18.33	30.05	100	115	P	V
	*	2452	95.94	-	-	80.05	27.61	18.33	30.05	100	115	A	V
		2484.25	61.78	-12.22	74	45.62	27.81	18.39	30.04	100	115	P	V
	2483.5	52.82	-1.3	54	36.67	27.8	18.39	30.04	100	115	A	V	

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.
---------------	---



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT40 CH 09 2452MHz		4904	40.31	-33.69	74	50.66	32.72	12.3	55.37	-	-	P	H	
		7356	45.41	-28.59	74	48.34	36.65	16.08	55.66	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4904	40.69	-33.31	74	51.04	32.72	12.3	55.37	-	-	P	V
			7356	45.4	-28.6	74	48.33	36.65	16.08	55.66	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11n HT40 LF		93.05	30.56	-12.94	43.5	46.18	14.94	1.75	32.31	-	-	P	H	
		183.26	26.08	-17.42	43.5	40.96	14.9	2.45	32.23	-	-	P	H	
		721.61	38.91	-7.09	46	39.37	27.24	4.67	32.37	-	-	P	H	
		746.83	39.11	-6.89	46	38.61	28.09	4.75	32.34	-	-	P	H	
		783.69	34.51	-11.49	46	33.86	28.04	4.89	32.28	-	-	P	H	
		922.4	33.88	-12.12	46	30.39	29.52	5.36	31.39	-	-	P	H	
														H
														H
														H
														H
														H
														H
			38.73	32.83	-7.17	40	43.96	20.15	1.02	32.3	-	-	P	V
			52.31	29.6	-10.4	40	47.3	13.32	1.27	32.29	-	-	P	V
			74.62	33.84	-6.16	40	51.75	12.84	1.56	32.31	-	-	P	V
			187.14	25.22	-18.28	43.5	40.15	14.83	2.47	32.23	-	-	P	V
			746.83	37.73	-8.27	46	37.23	28.09	4.75	32.34	-	-	P	V
			925.31	34	-12	46	30.42	29.57	5.38	31.37	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Andy Yang, Karl Hou and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%





Note symbol

-L	Low channel location
-R	High channel location



<Sample 1>





**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Band Edge @ 3m)**

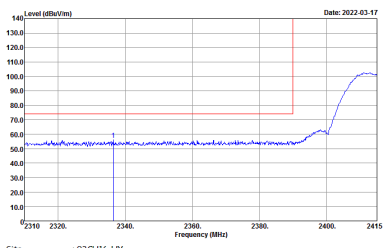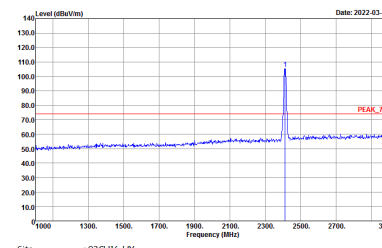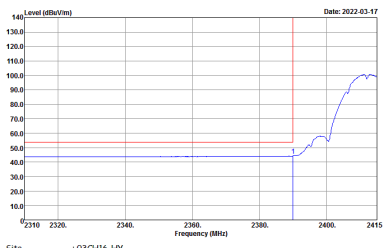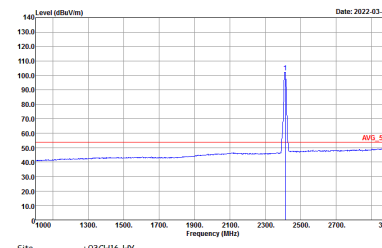WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
7	Vertical	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

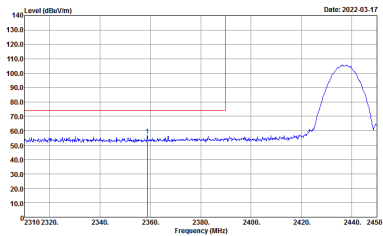
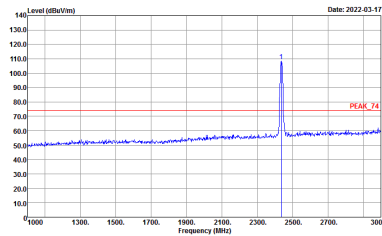
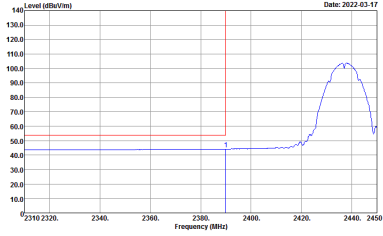
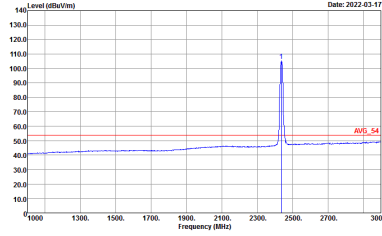


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
7	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank

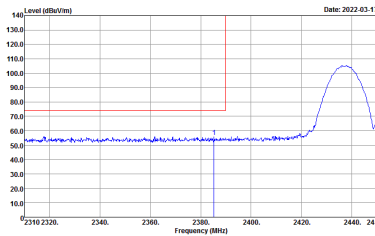
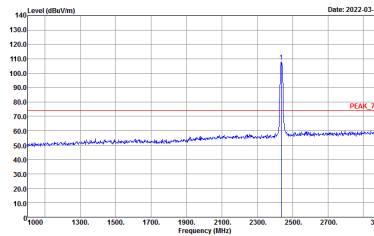
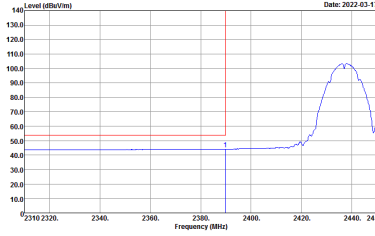
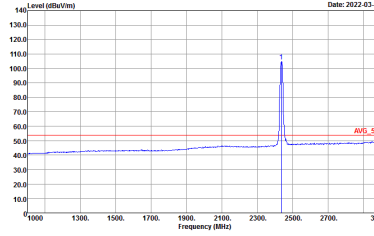


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



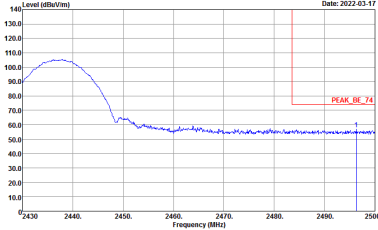
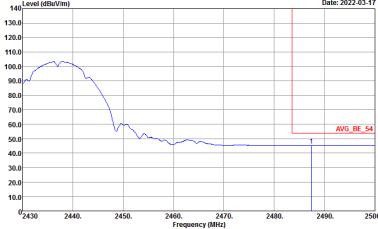


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank

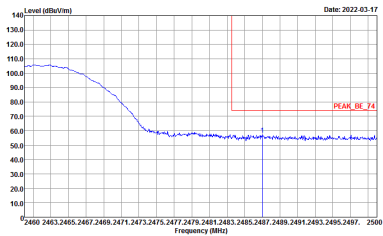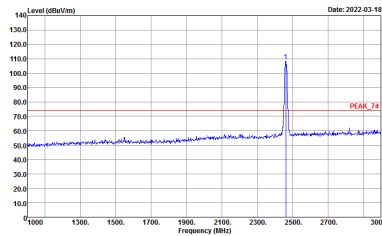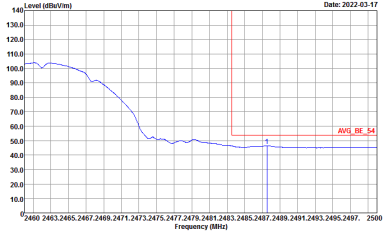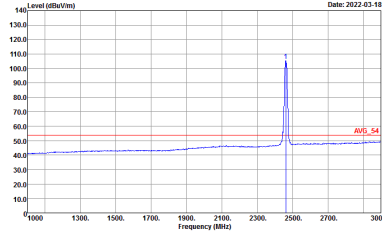





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
7	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2462 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the peak level at approximately 75 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2462 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the peak level at approximately 75 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red line indicates the average level at approximately 50 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the average level at approximately 50 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

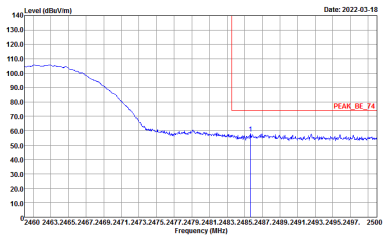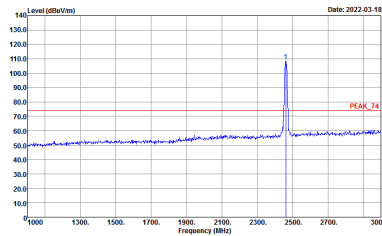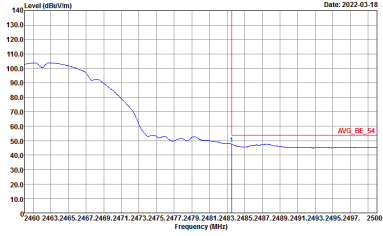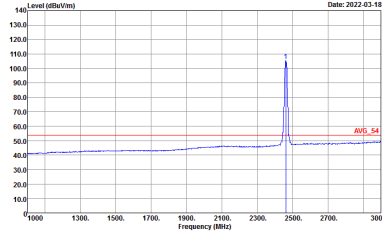





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
7	Vertical	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Vertical. The plot shows a signal level starting at approximately 100 dBuV/m at 2400 MHz and decreasing to about 60 dBuV/m at 2462 MHz. A red vertical line marks the peak at 2462 MHz, labeled 'PEAK_BE_74'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a signal level around 60 dBuV/m with a sharp peak at 2462 MHz, labeled 'PEAK_74'. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Avg Vertical. The plot shows a signal level starting at approximately 100 dBuV/m at 2400 MHz and decreasing to about 50 dBuV/m at 2462 MHz. A red vertical line marks the average level at 2462 MHz, labeled 'AVG_BE_54'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Avg Fundamental. The plot shows a signal level around 50 dBuV/m with a sharp peak at 2462 MHz, labeled 'AVG_54'. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

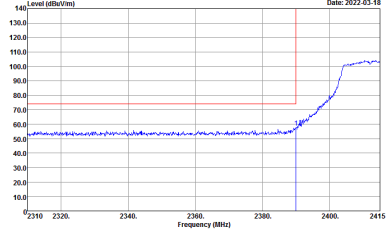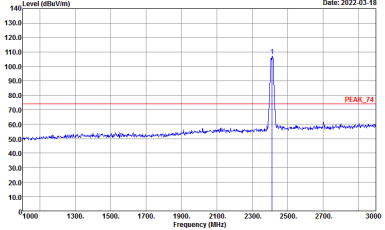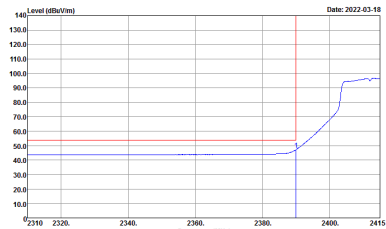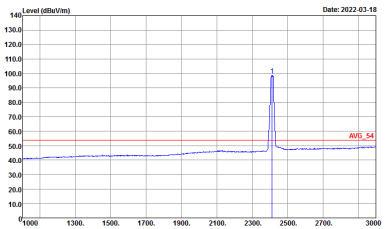WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
7	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal Peak. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line is at 2412 MHz. The signal level is flat at ~60 dBuV/m until 2400 MHz, then rises to ~100 dBuV/m at 2412 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Peak. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line is at 2412 MHz. A sharp peak is visible at 2412 MHz, reaching ~100 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal Avg. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line is at 2412 MHz. The signal level is flat at ~60 dBuV/m until 2400 MHz, then rises to ~100 dBuV/m at 2412 MHz.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Avg. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line is at 2412 MHz. A sharp peak is visible at 2412 MHz, reaching ~100 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

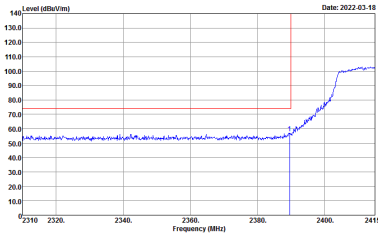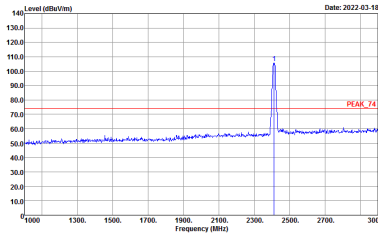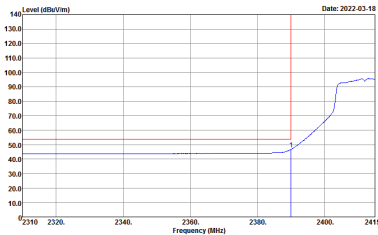
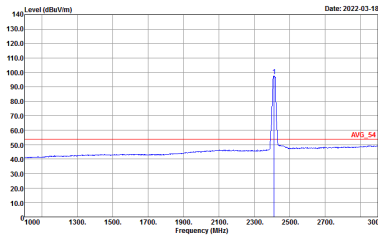


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

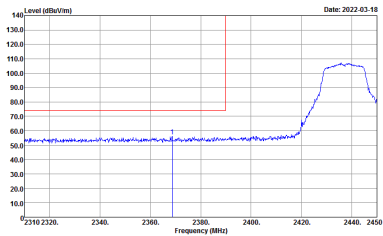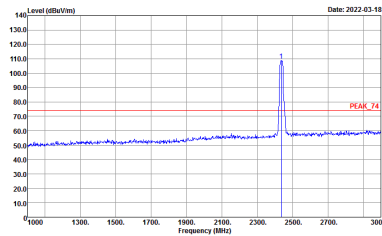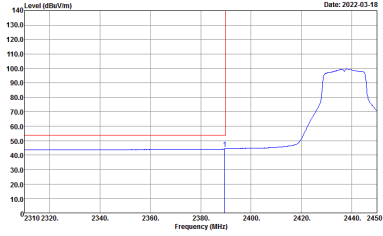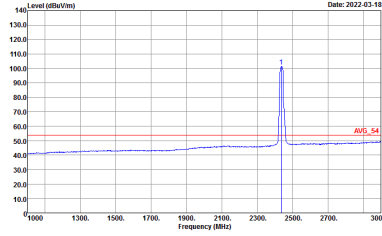

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

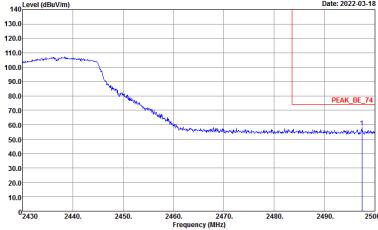
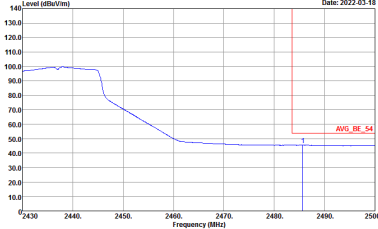


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
7	Vertical	Fundamental
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Peak. The plot shows a baseline around 50 dBuV/m with a sharp peak at approximately 2437 MHz reaching about 110 dBuV/m. A red vertical line marks the peak. The x-axis ranges from 2310 to 2450 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a baseline around 50 dBuV/m with a sharp peak at approximately 2437 MHz reaching about 110 dBuV/m. A red vertical line marks the peak. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
	Avg.	<p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Avg. The plot shows a baseline around 50 dBuV/m with a peak at approximately 2437 MHz reaching about 100 dBuV/m. A red vertical line marks the peak. The x-axis ranges from 2310 to 2450 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



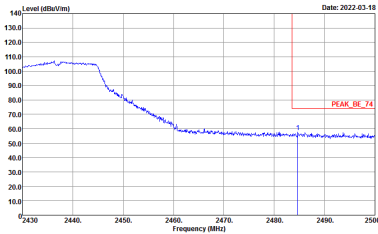
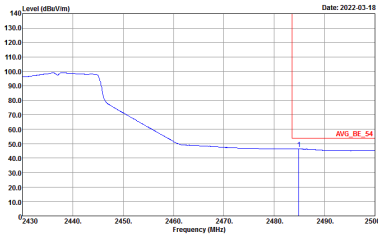


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left Blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left Blank

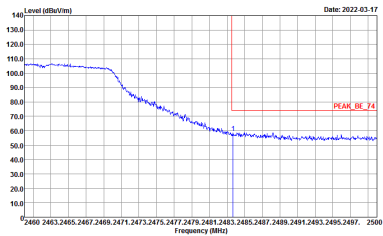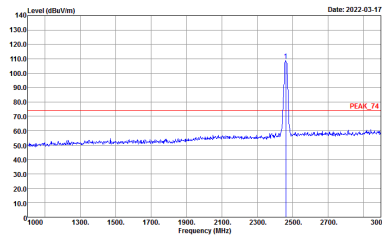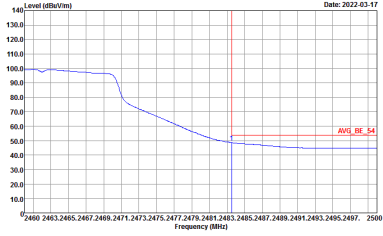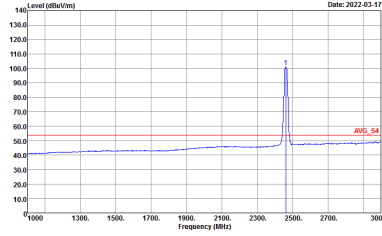





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

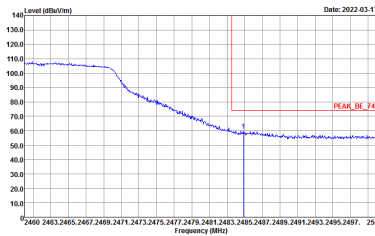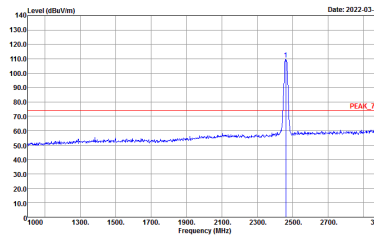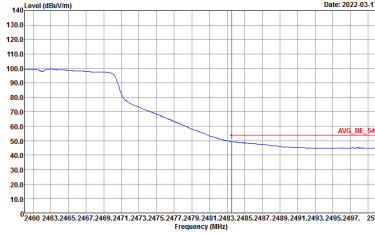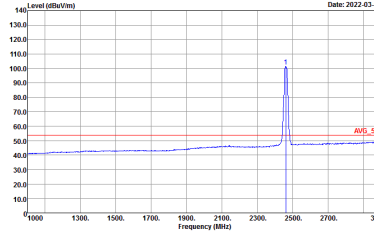





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

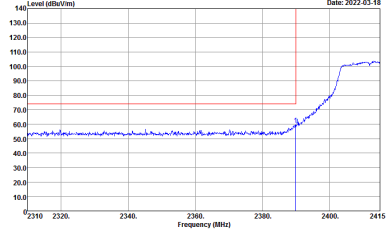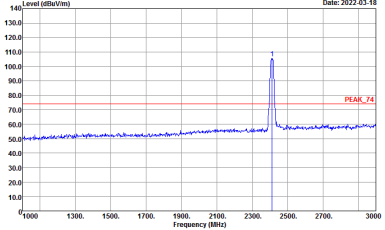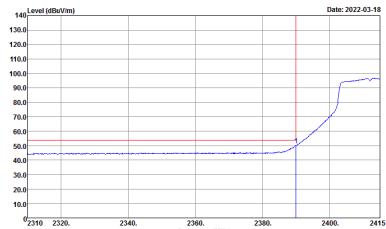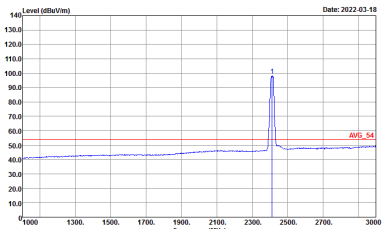WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
7	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal Peak. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line is at approximately 2412 MHz. The signal level is flat at ~50 dBuV/m until 2380 MHz, then rises to ~100 dBuV/m at 2412 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Peak. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A sharp peak is visible at 2412 MHz, reaching ~100 dBuV/m. A red horizontal line labeled 'PEAK_74' is at ~75 dBuV/m.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal Avg. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line is at approximately 2412 MHz. The signal level is flat at ~50 dBuV/m until 2380 MHz, then rises to ~90 dBuV/m at 2412 MHz.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Avg. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A sharp peak is visible at 2412 MHz, reaching ~90 dBuV/m. A red horizontal line labeled 'AVG_54' is at ~55 dBuV/m.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>

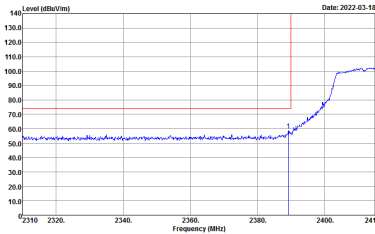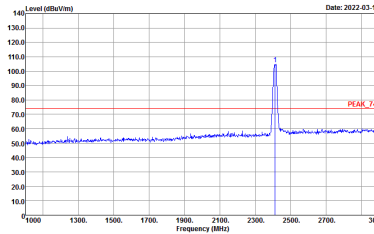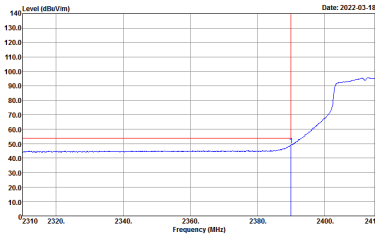
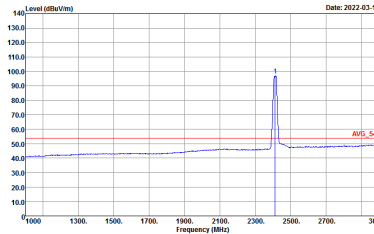


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>

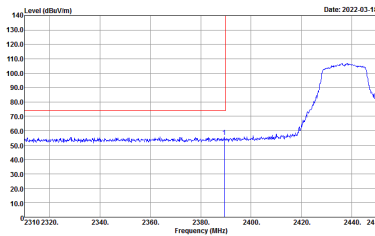
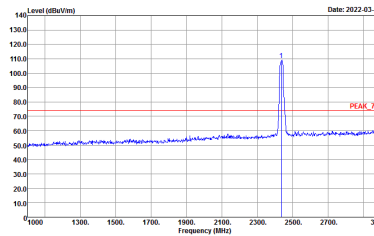
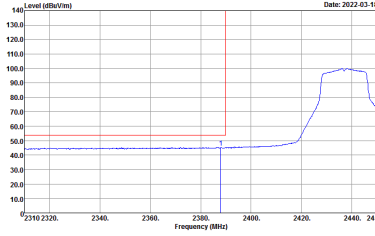
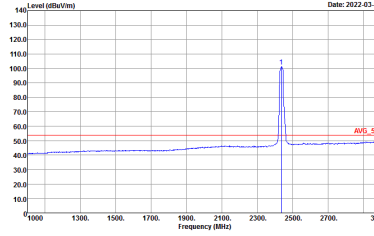


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>

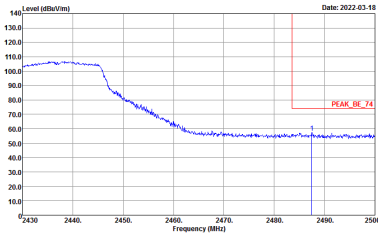
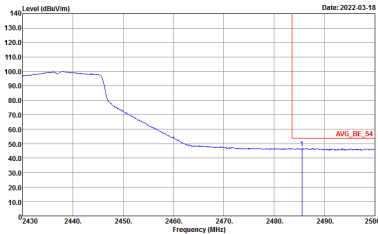


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	Left blank

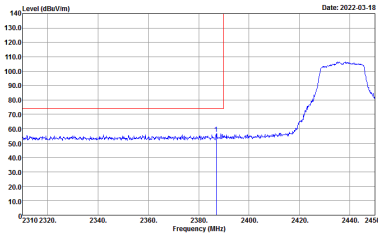
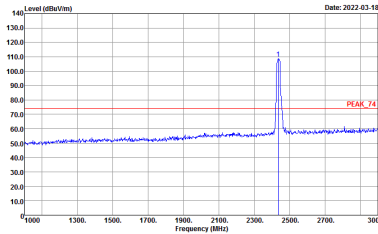
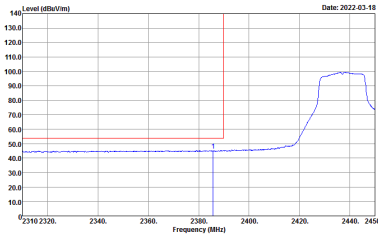
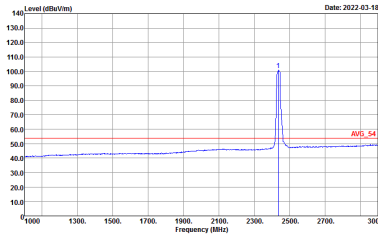


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>



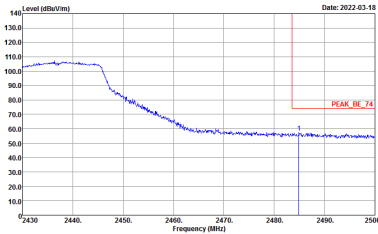
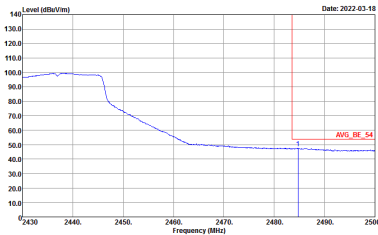


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left Blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	Left Blank

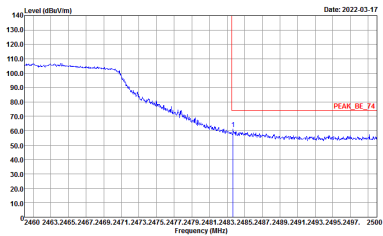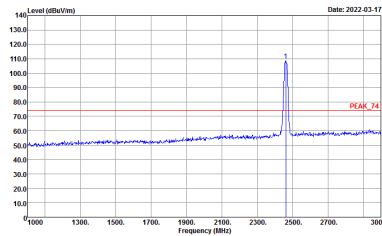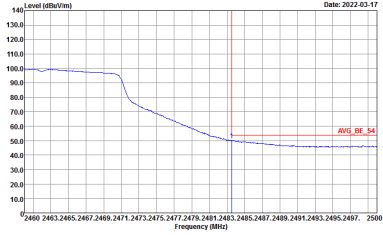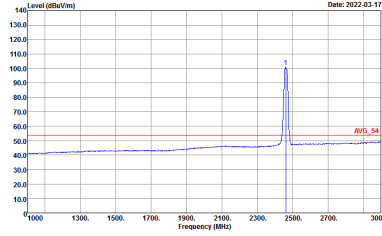





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>

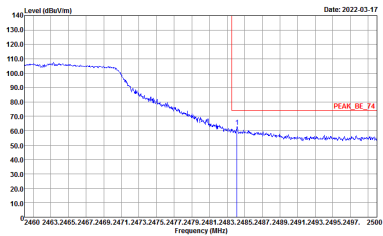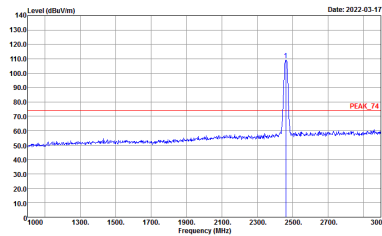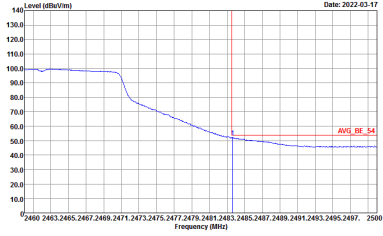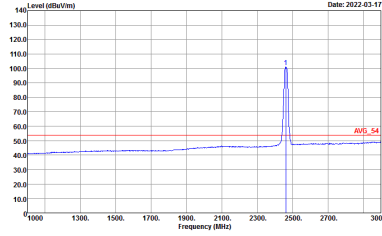



WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

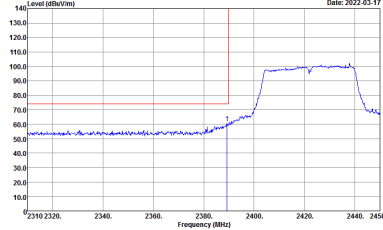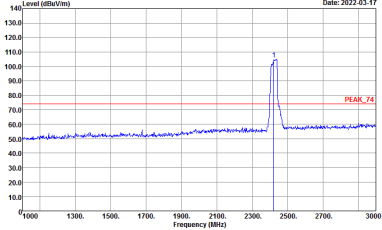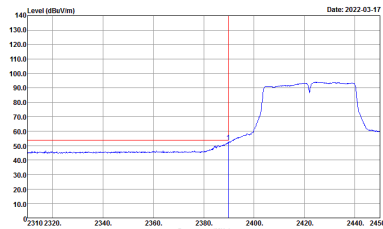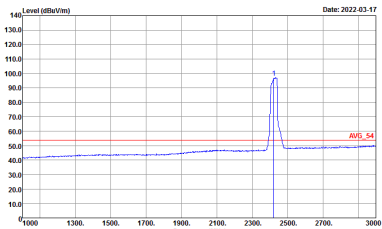WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - L	
7	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2450 MHz. A red vertical line is at 2422 MHz. The signal level rises from ~50 dBuV/m at 2400 MHz to ~100 dBuV/m at 2422 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental orientation. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is at ~80 dBuV/m, labeled 'PEAK_74'. A sharp peak is visible at 2422 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2450 MHz. A red vertical line is at 2422 MHz. The signal level rises from ~45 dBuV/m at 2400 MHz to ~90 dBuV/m at 2422 MHz.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental orientation. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is at ~55 dBuV/m, labeled 'AVG_54'. A peak is visible at 2422 MHz.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

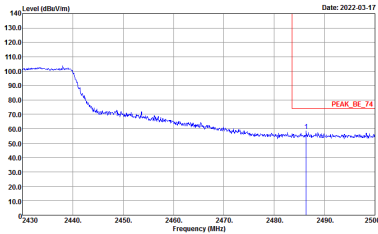
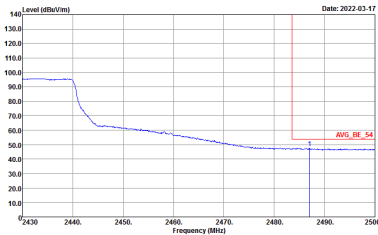


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - R	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left Blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left Blank

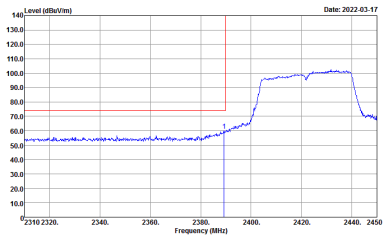
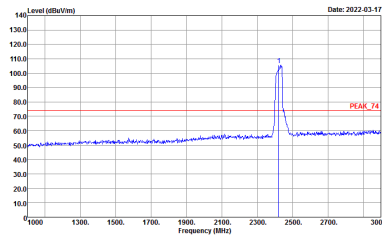
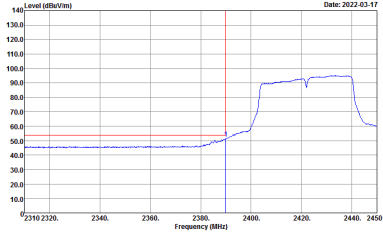
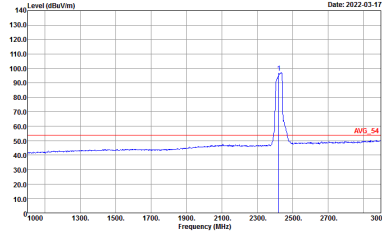


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - L	
7	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Vertical Peak. The plot shows a signal level rising from approximately 50 dBm/100kHz at 2380 MHz to about 100 dBm/100kHz at 2422 MHz, then falling back to 50 dBm/100kHz by 2440 MHz. A red vertical line marks the peak at 2422 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a sharp peak at 2422 MHz with a level of approximately 100 dBm/100kHz. A red horizontal line labeled 'PEAK 74' is drawn at this level.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Vertical Avg. The plot shows a signal level rising from approximately 50 dBm/100kHz at 2380 MHz to about 100 dBm/100kHz at 2422 MHz, then falling back to 50 dBm/100kHz by 2440 MHz. A red vertical line marks the peak at 2422 MHz.</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot for Fundamental Avg. The plot shows a sharp peak at 2422 MHz with a level of approximately 100 dBm/100kHz. A red horizontal line labeled 'AVG 54' is drawn at this level.</p> <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

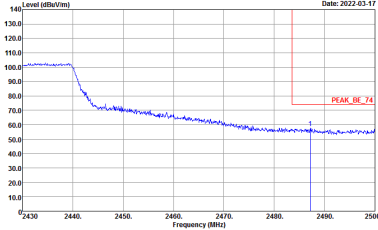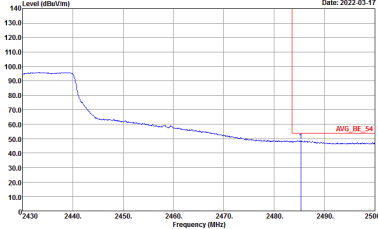

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - R	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	Left blank

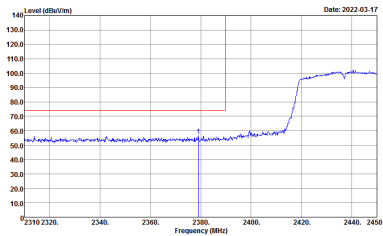
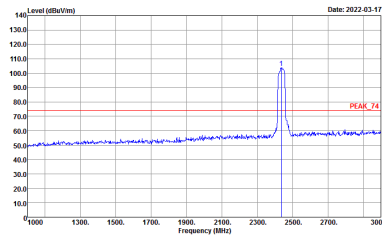
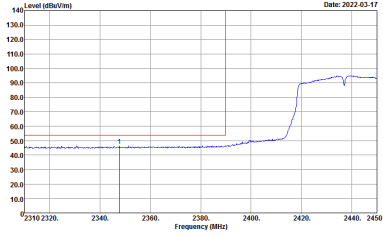
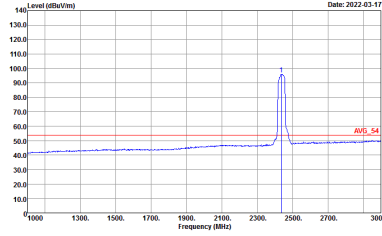


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH06 2437MHz - L	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH06 2437MHz - R	
7	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	Left blank

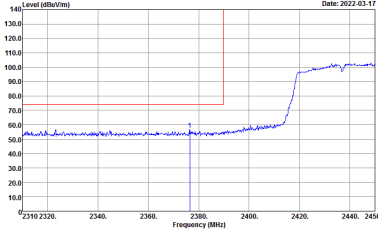
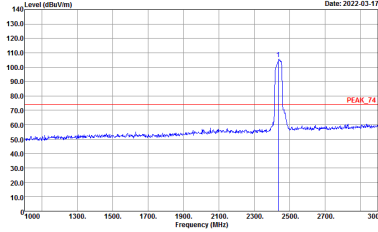
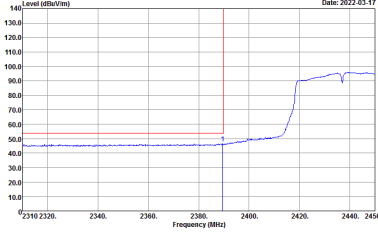
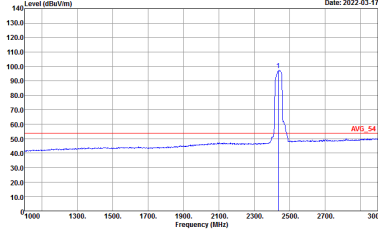


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH06 2437MHz - L	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

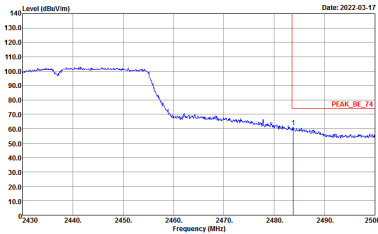
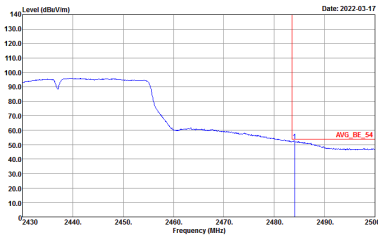


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH06 2437MHz - R	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank

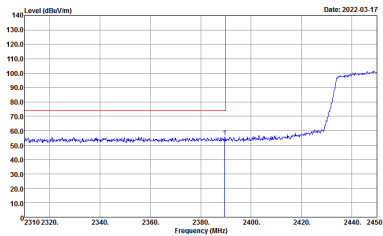
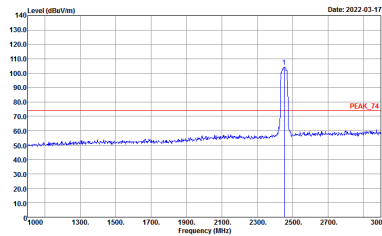
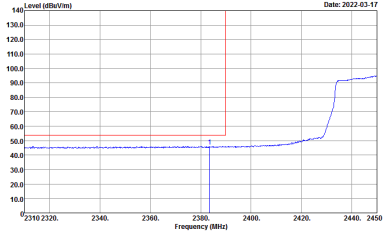
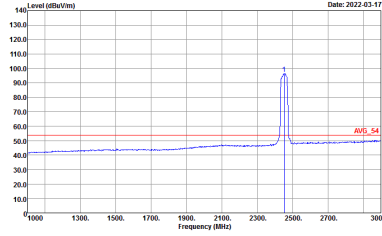


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - L	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

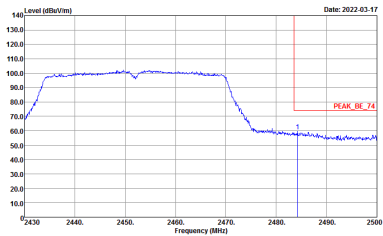
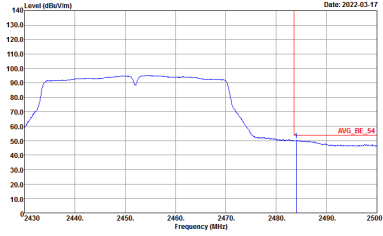


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - R	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	Left blank

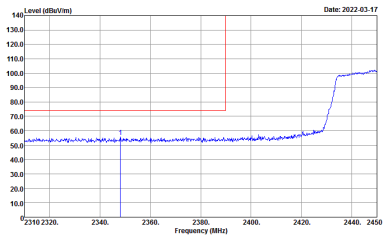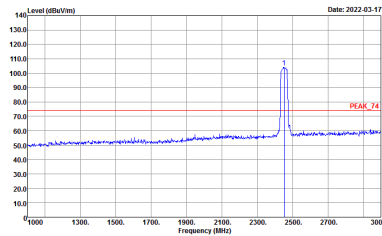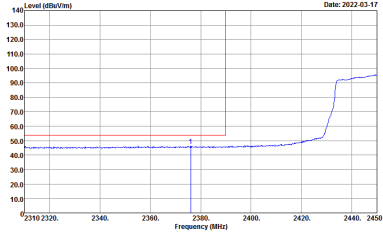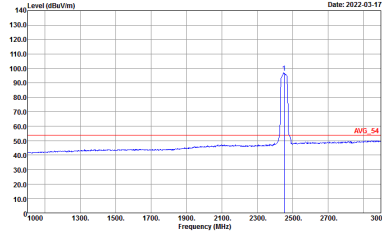

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - L	
7	Vertical	Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2452 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2450 MHz. A red vertical line marks the peak at 2452 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2452 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2452 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average level at 2452 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2450 MHz. A red vertical line marks the average level at 2452 MHz.</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average level at 2452 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the average level at 2452 MHz.</p> <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

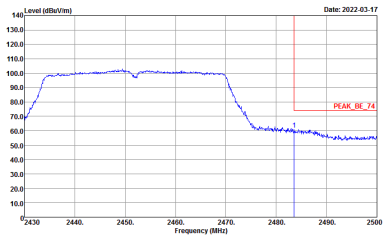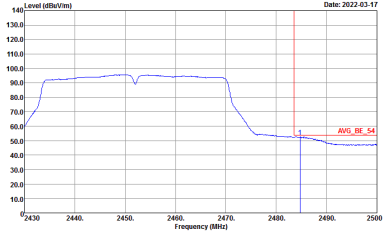



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - R	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL Detector : Peak</p>

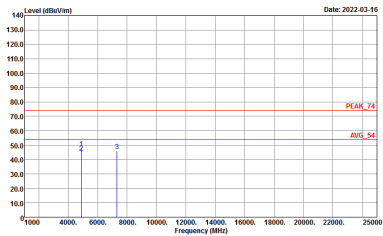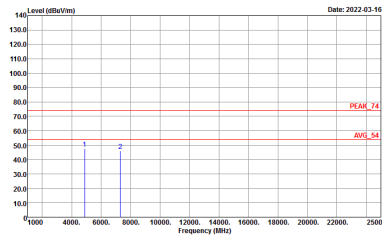

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
7	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 3 columns: WIFI (2.4GHz 2400~2483.5MHz Harmonic @ 3m), ANT (802.11g CH01 2412MHz), and 7 (Horizontal/Vertical). It contains two graphs showing Level (dBuV/m) vs Frequency (MHz) for Peak and Avg. measurements.

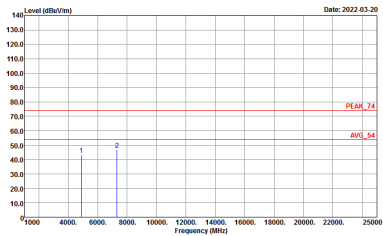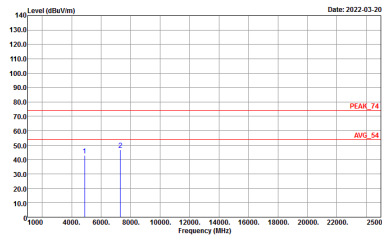

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
7	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>





2.4GHz 2400~2483.5MHz
 WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>

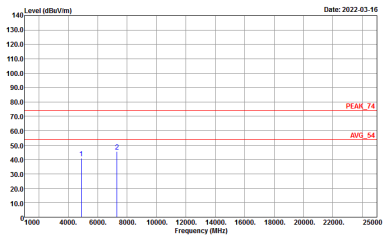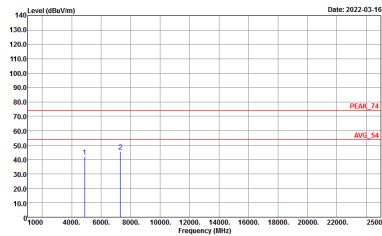

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
7	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>

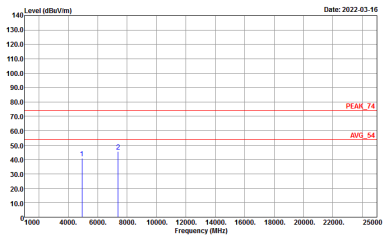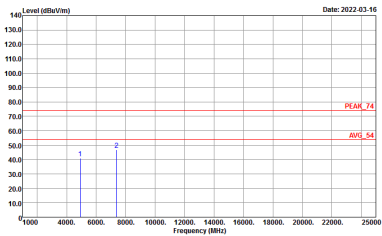



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
7	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>



2.4GHz 2400~2483.5MHz
 WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT40 CH03 2422MHz	
7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>

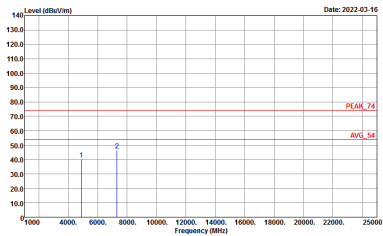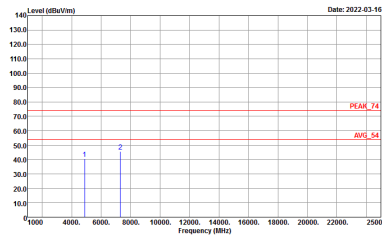

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT40 CH06 2437MHz	
7	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT40 CH09 2452MHz	
7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>







Emission below 1GHz
2.4GHz WIFI 802.11n HT40 (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT40 LF	
7	Horizontal	Vertical
QP / Peak	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020_211009 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020_211009 VERTICAL Detector : Peak</p>





<Sample 2>





2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

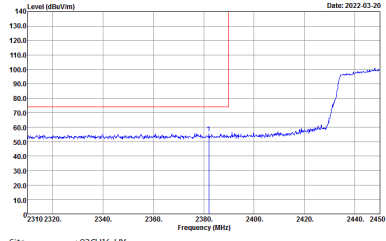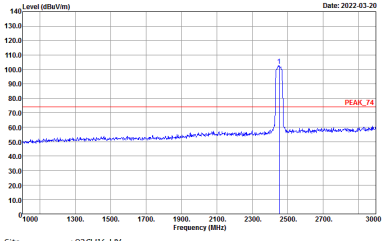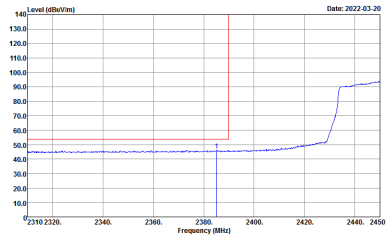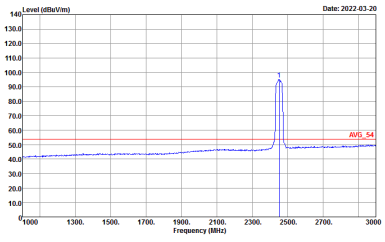WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - L	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

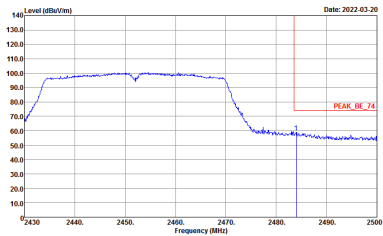
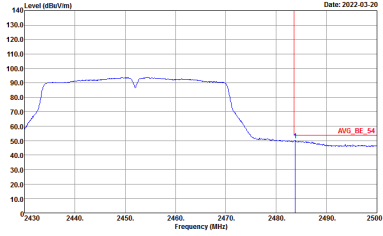


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - R	
7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank

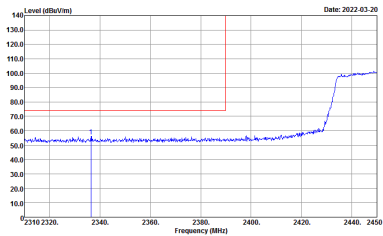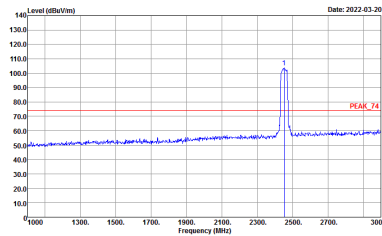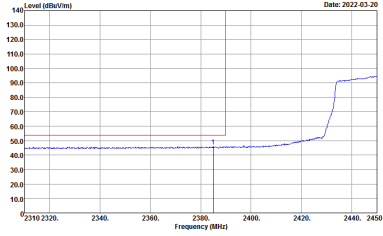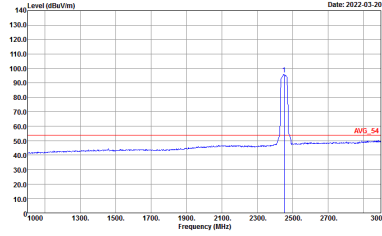

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - L	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

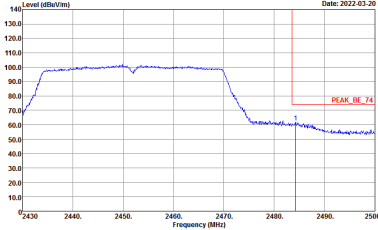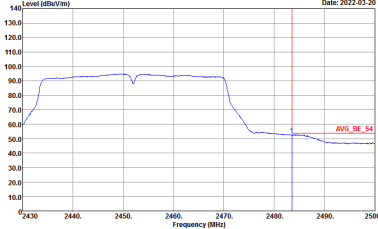

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH09 2452MHz - R	
7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_02114_210804 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_02114_210804 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	Left blank



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT40 CH09 2452MHz	
7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL Detector : Peak</p>



Emission below 1GHz
2.4GHz WIFI 802.11n HT40 (LF)



WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT40 LF	
7	Horizontal	Vertical
QP / Peak	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020_211009 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020_211009 VERTICAL Detector : Peak</p>



Appendix D. Duty Cycle Plots

<Sample 1>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	99.27	-	-	10Hz
802.11g	98.06	-	-	10Hz
2.4GHz 802.11n HT20	97.92	1885	0.53	1kHz
2.4GHz 802.11n HT40	94.69	928	1.08	3kHz

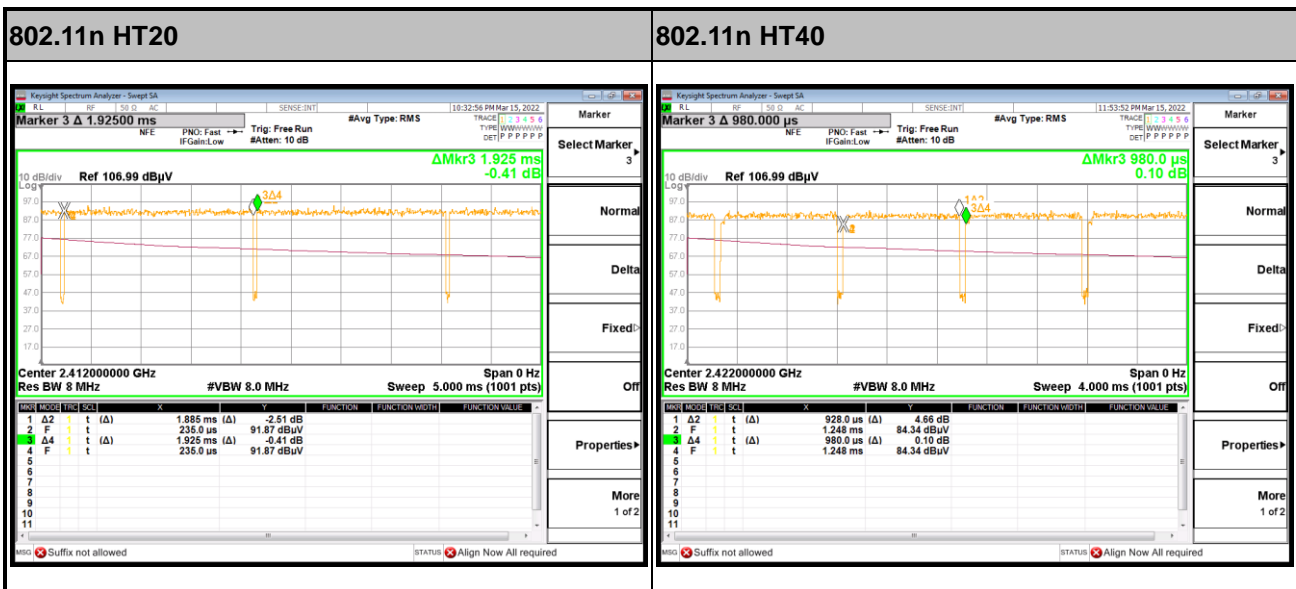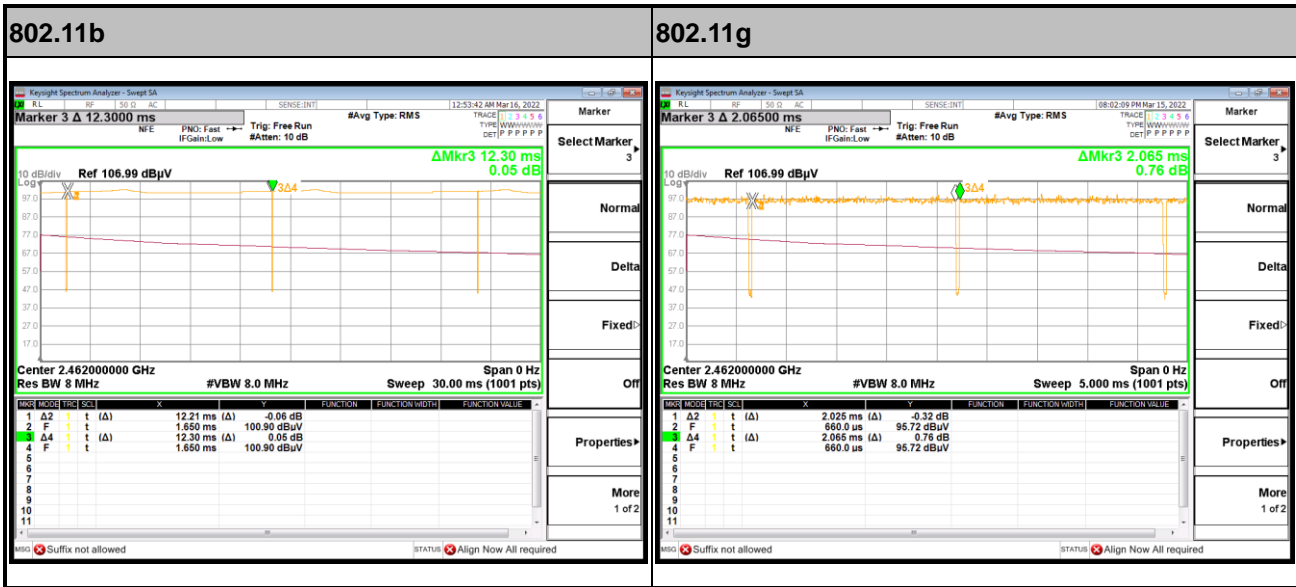



<Sample 2>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
2.4GHz 802.11n HT40	94.79	927	1.08	3kHz

