





Conducted Band Edge

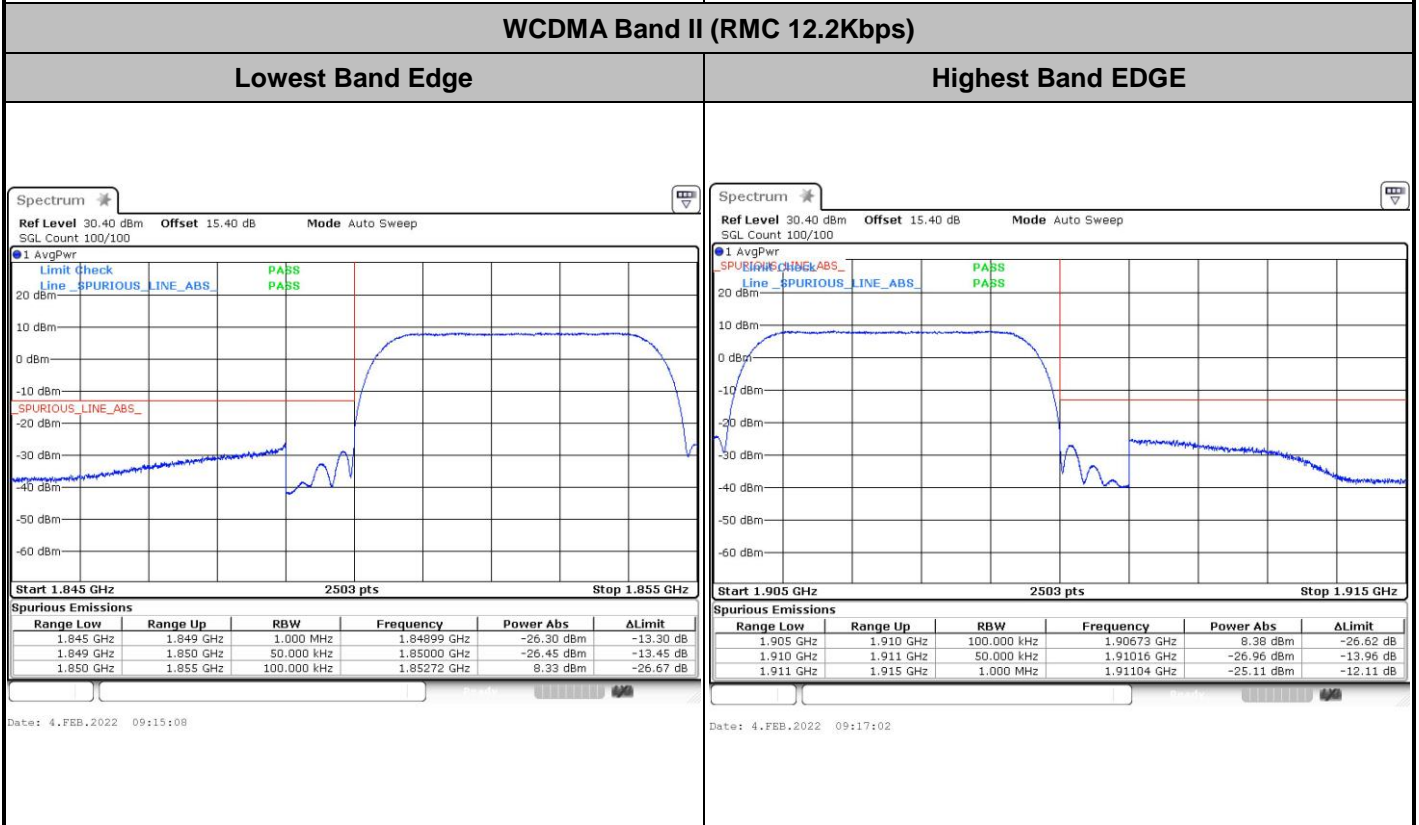


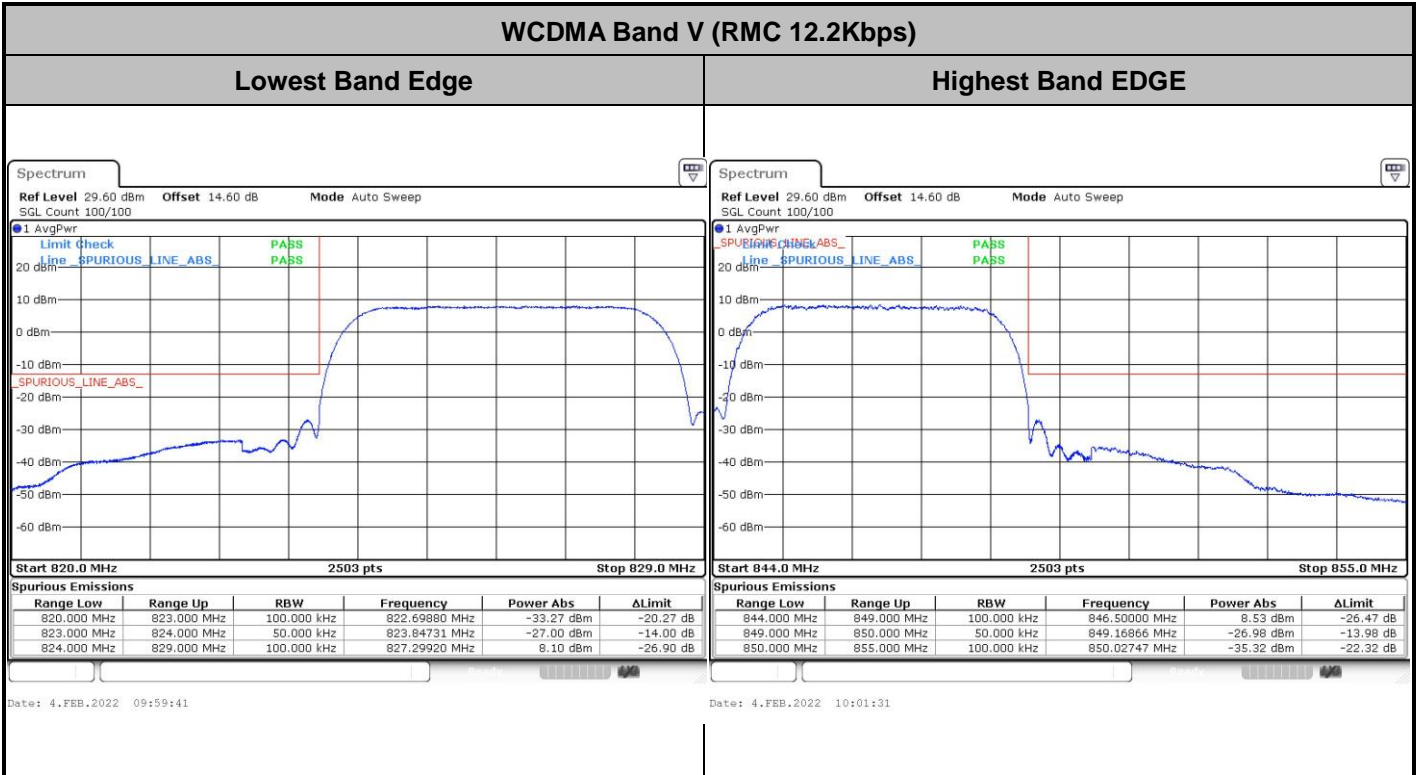

WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band EDGE

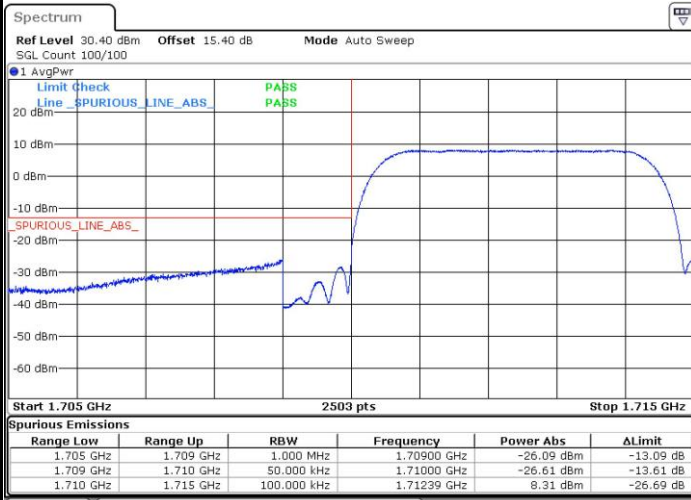


Date: 4.FEB.2022 09:35:29



Date: 4.FEB.2022 09:37:09




Conducted Spurious Emission

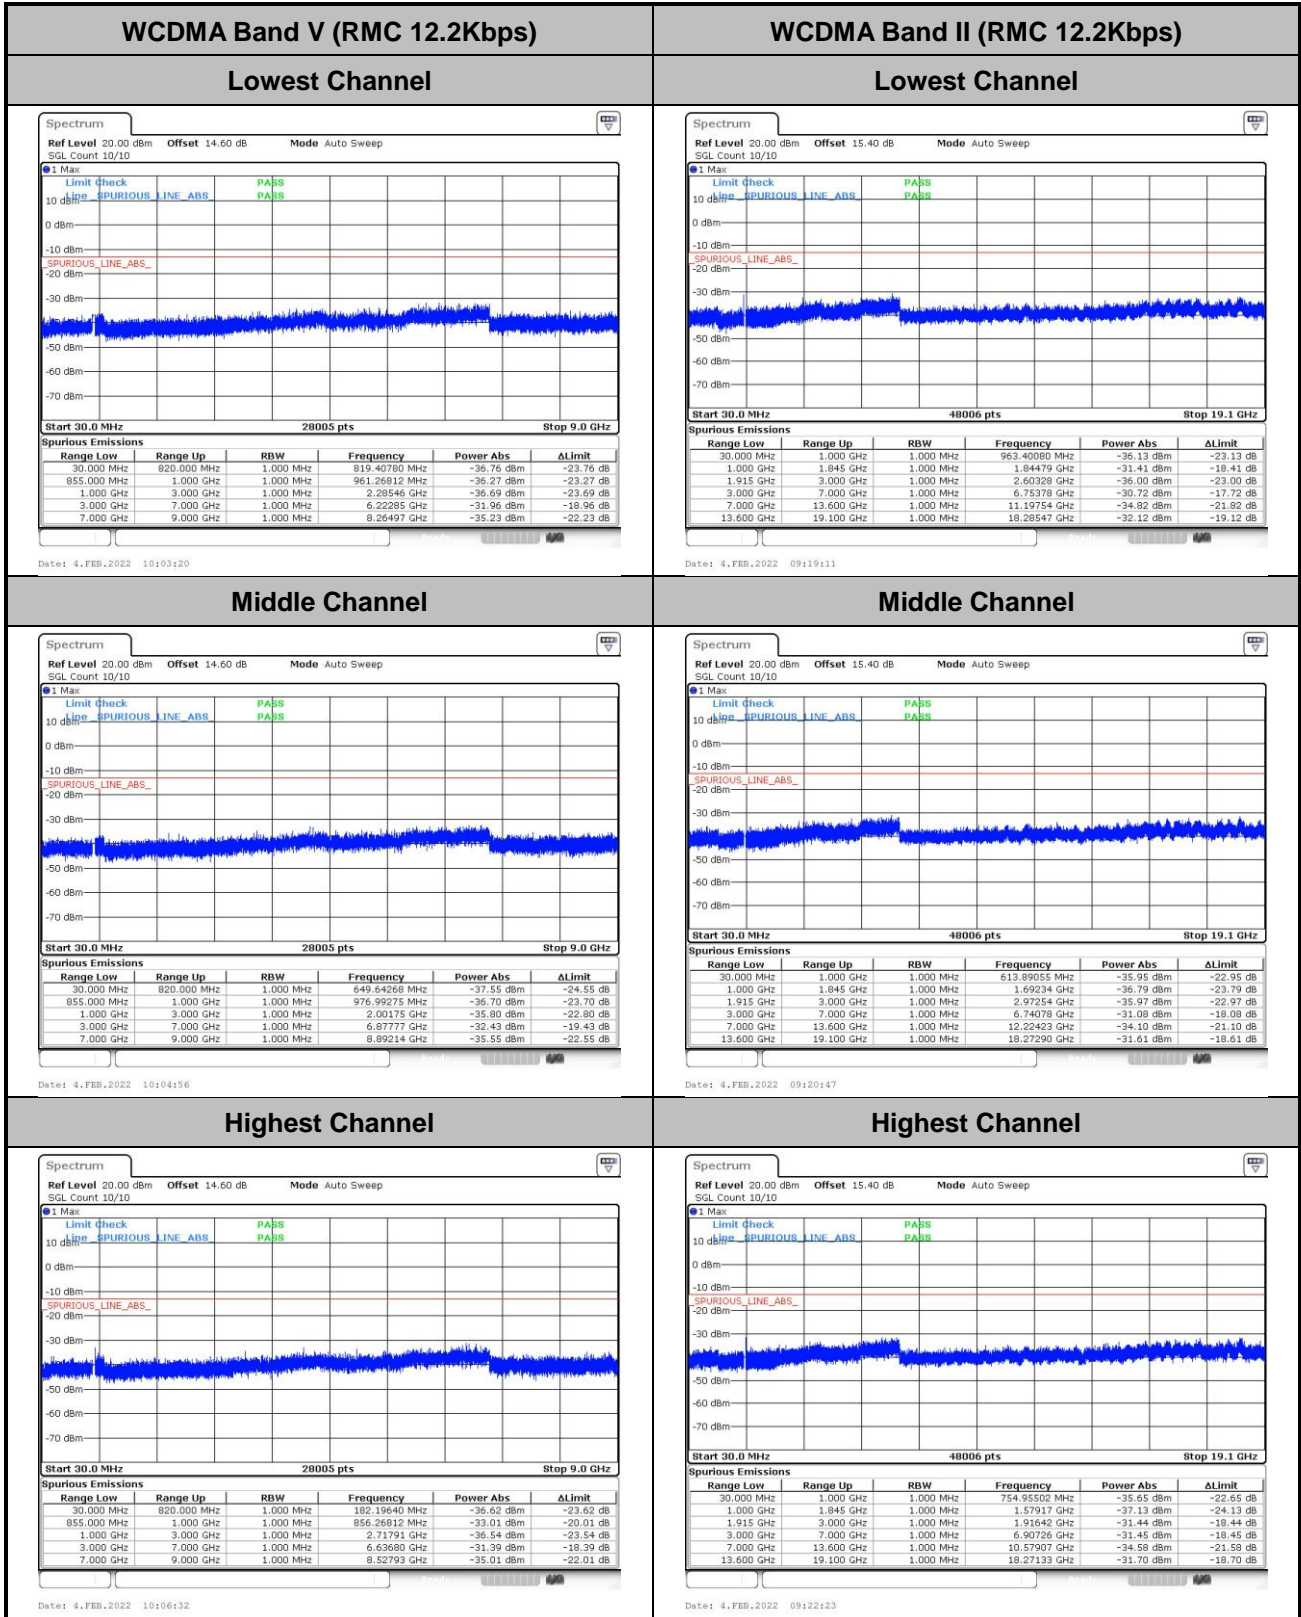




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

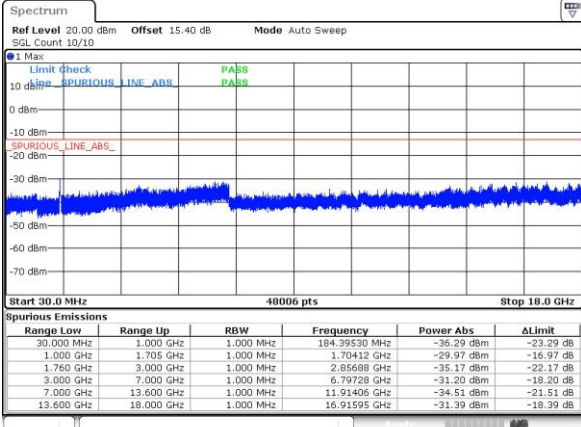


Date: 4.FEB.2022 09:13:15

Middle Channel

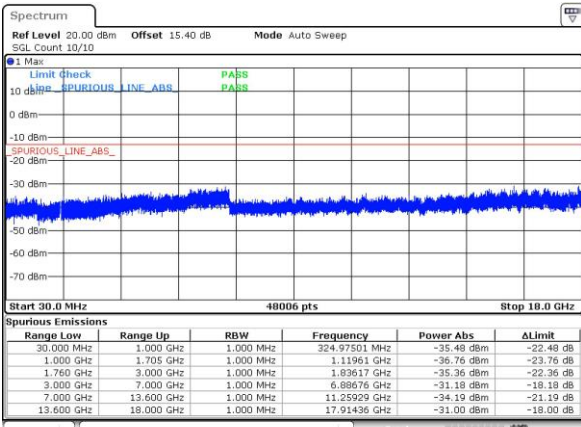

Date: 4.FEB.2022 09:40:53

Highest Channel

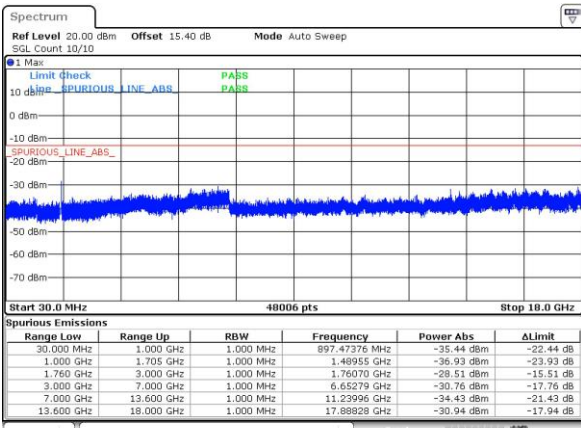

Date: 4.FEB.2022 09:42:46



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0018	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0026	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0030	
0	Normal Voltage	0.0026	
-10	Normal Voltage	0.0014	
-20	Normal Voltage	0.0020	
-30	Normal Voltage	0.0023	
20	Maximum Voltage	0.0019	
20	Normal Voltage	0.0016	
20	Battery End Point	0.0008	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0019	PASS
40	Normal Voltage	0.0016	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0026	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0009	
-20	Normal Voltage	0.0014	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0019	
20	Battery End Point	0.0014	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0025	PASS
40	Normal Voltage	0.0019	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0025	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0009	
-20	Normal Voltage	0.0019	
-30	Normal Voltage	0.0033	
20	Maximum Voltage	0.0026	
20	Normal Voltage	0.0015	
20	Battery End Point	0.0027	

Note:

1. Normal Voltage = 3.87V ; Battery End Point (BEP) =3.65V. ; Maximum Voltage =4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of ERP/EIRP and Radiated

Test Conducted Output Power (Average power) and ERP/EIRP

GSM850 TX Channel	Burst Average Power (dBm)			ERP(W)		
	128	189	251	L	M	H
Frequency (MHz)	824.2	836.4	848.8			
GSM 1 Tx slot	32.31	32.36	32.42	0.9036	0.9141	0.9268
GPRS 1 Tx slot	32.26	32.34	32.40	0.8933	0.9099	0.9226
GPRS 2 Tx slots	30.57	30.46	30.51	0.6053	0.5902	0.5970
GPRS 3 Tx slots	28.51	28.56	28.53	0.3767	0.3811	0.3784
GPRS 4 Tx slots	26.35	26.48	26.52	0.2291	0.2360	0.2382
EDGE 1 Tx slot	26.11	26.03	26.12	0.2168	0.2128	0.2173
EDGE 2 Tx slots	25.96	25.91	25.92	0.2094	0.2070	0.2075
EDGE 3 Tx slots	25.79	25.76	25.71	0.2014	0.2000	0.1977
EDGE 4 Tx slots	25.65	25.52	25.52	0.1950	0.1892	0.1892

GSM1900 TX Channel	Burst Average Power (dBm)			EIRP(W)		
	512	661	810	L	M	H
Frequency (MHz)	1850.2	1880	1909.8			
GSM 1 Tx slot	29.58	29.79	29.57	1.1995	1.2589	1.1967
GPRS 1 Tx slot	29.63	29.79	29.59	1.2134	1.2589	1.2023
GPRS 2 Tx slots	27.73	27.84	27.74	0.7834	0.8035	0.7852
GPRS 3 Tx slots	25.79	25.79	25.57	0.5012	0.5012	0.4764
GPRS 4 Tx slots	23.67	23.62	23.36	0.3076	0.3041	0.2864
EDGE 1 Tx slot	25.15	25.48	25.31	0.4325	0.4667	0.4487
EDGE 2 Tx slots	25.02	25.34	25.28	0.4198	0.4519	0.4457
EDGE 3 Tx slots	24.86	25.23	25.06	0.4046	0.4406	0.4236
EDGE 4 Tx slots	24.77	25.08	24.87	0.3963	0.4256	0.4055



Band		WCDMA V			ERP(W)		
TX Channel		4132	4182	4233			
Rx Channel		4357	4407	4458			
Frequency (MHz)		826.4	836.4	846.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.97	23.06	23.03	0.1052	0.1074	0.1067
3GPP Rel 99	RMC 12.2Kbps	23.04	23.14	23.11	0.1069	0.1094	0.1086
3GPP Rel 6	HSDPA Subtest-1	22.04	22.10	22.09	0.0849	0.0861	0.0859
3GPP Rel 6	HSDPA Subtest-2	22.01	22.13	22.07	0.0843	0.0867	0.0855
3GPP Rel 6	HSDPA Subtest-3	21.54	21.66	21.55	0.0757	0.0778	0.0759
3GPP Rel 6	HSDPA Subtest-4	21.52	21.62	21.59	0.0753	0.0771	0.0766
3GPP Rel 8	DC-HSDPA Subtest-1	22.13	22.19	21.99	0.0867	0.0879	0.0839
3GPP Rel 8	DC-HSDPA Subtest-2	21.91	22.09	21.98	0.0824	0.0859	0.0838
3GPP Rel 8	DC-HSDPA Subtest-3	21.55	21.63	21.56	0.0759	0.0773	0.0760
3GPP Rel 8	DC-HSDPA Subtest-4	21.58	21.59	21.53	0.0764	0.0766	0.0755
3GPP Rel 6	HSUPA Subtest-1	22.01	22.07	22.04	0.0843	0.0855	0.0849
3GPP Rel 6	HSUPA Subtest-2	19.97	20.12	19.99	0.0527	0.0546	0.0530
3GPP Rel 6	HSUPA Subtest-3	20.95	21.04	21.01	0.0661	0.0675	0.0670
3GPP Rel 6	HSUPA Subtest-4	19.96	20.05	20.03	0.0526	0.0537	0.0535
3GPP Rel 6	HSUPA Subtest-5	22.00	22.10	22.00	0.0841	0.0861	0.0841



Band		WCDMA IV			EIRP(W)		
TX Channel		1312	1413	1513			
Rx Channel		1537	1638	1738			
Frequency (MHz)		1712.4	1732.6	1752.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.93	22.96	22.89	0.1656	0.1667	0.1641
3GPP Rel 99	RMC 12.2Kbps	23.07	23.09	23.03	0.1710	0.1718	0.1694
3GPP Rel 6	HSDPA Subtest-1	21.97	22.02	21.92	0.1327	0.1343	0.1312
3GPP Rel 6	HSDPA Subtest-2	21.95	22.01	21.90	0.1321	0.1340	0.1306
3GPP Rel 6	HSDPA Subtest-3	21.44	21.49	21.42	0.1175	0.1189	0.1169
3GPP Rel 6	HSDPA Subtest-4	21.18	21.52	21.39	0.1107	0.1197	0.1161
3GPP Rel 8	DC-HSDPA Subtest-1	21.91	22.02	21.95	0.1309	0.1343	0.1321
3GPP Rel 8	DC-HSDPA Subtest-2	22.03	22.07	21.87	0.1346	0.1358	0.1297
3GPP Rel 8	DC-HSDPA Subtest-3	21.41	21.53	21.49	0.1167	0.1199	0.1189
3GPP Rel 8	DC-HSDPA Subtest-4	21.23	21.46	21.43	0.1119	0.1180	0.1172
3GPP Rel 6	HSUPA Subtest-1	21.90	21.87	21.91	0.1306	0.1297	0.1309
3GPP Rel 6	HSUPA Subtest-2	19.83	19.97	19.88	0.0811	0.0838	0.0820
3GPP Rel 6	HSUPA Subtest-3	20.90	20.93	20.87	0.1038	0.1045	0.1030
3GPP Rel 6	HSUPA Subtest-4	19.90	19.98	19.92	0.0824	0.0839	0.0828
3GPP Rel 6	HSUPA Subtest-5	21.90	22.00	21.90	0.1306	0.1337	0.1306



Band		WCDMA II			EIRP(W)		
TX Channel		9262	9400	9538			
Rx Channel		9662	9800	9938			
Frequency (MHz)		1852.4	1880	1907.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	23.09	23.11	23.06	0.2692	0.2704	0.2673
3GPP Rel 99	RMC 12.2Kbps	23.18	23.25	23.19	0.2748	0.2793	0.2754
3GPP Rel 6	HSDPA Subtest-1	22.01	22.05	22.08	0.2099	0.2118	0.2133
3GPP Rel 6	HSDPA Subtest-2	22.00	22.09	22.08	0.2094	0.2138	0.2133
3GPP Rel 6	HSDPA Subtest-3	21.52	21.59	21.58	0.1875	0.1905	0.1901
3GPP Rel 6	HSDPA Subtest-4	21.46	21.61	21.58	0.1849	0.1914	0.1901
3GPP Rel 8	DC-HSDPA Subtest-1	21.93	22.00	22.11	0.2061	0.2094	0.2148
3GPP Rel 8	DC-HSDPA Subtest-2	22.09	22.02	22.04	0.2138	0.2104	0.2113
3GPP Rel 8	DC-HSDPA Subtest-3	21.56	21.50	21.67	0.1892	0.1866	0.1941
3GPP Rel 8	DC-HSDPA Subtest-4	21.53	21.54	21.59	0.1879	0.1884	0.1905
3GPP Rel 6	HSUPA Subtest-1	21.91	22.06	22.11	0.2051	0.2123	0.2148
3GPP Rel 6	HSUPA Subtest-2	19.96	20.05	20.05	0.1309	0.1337	0.1337
3GPP Rel 6	HSUPA Subtest-3	20.94	21.06	21.10	0.1641	0.1687	0.1702
3GPP Rel 6	HSUPA Subtest-4	20.02	20.05	20.05	0.1327	0.1337	0.1337
3GPP Rel 6	HSUPA Subtest-5	22.00	22.10	22.10	0.2094	0.2143	0.2143



Radiated Spurious Emission

GSM850 (GSM)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-47.88	-13	-34.88	-54.85	1.58	10.70	H
	2472	-56.96	-13	-43.96	-65.21	2.102	12.50	H
	3296	-59.81	-13	-46.81	-68.70	2.856	13.90	H
	1648	-51.72	-13	-38.72	-58.69	1.58	10.70	V
	2472	-53.29	-13	-40.29	-61.54	2.10	12.50	V
	3296	-59.95	-13	-46.95	-68.84	2.86	13.90	V
Middle	1672	-46.08	-13	-33.08	-53.05	1.58	10.70	H
	2512	-55.77	-13	-42.77	-64.02	2.102	12.50	H
	3344	-59.93	-13	-46.93	-68.82	2.856	13.90	H
	1672	-50.42	-13	-37.42	-57.39	1.58	10.70	V
	2512	-52.72	-13	-39.72	-60.97	2.10	12.50	V
	3344	-60.03	-13	-47.03	-68.92	2.86	13.90	V
Highest	1696	-50.97	-13	-37.97	-57.94	1.58	10.70	H
	2544	-48.90	-13	-35.90	-57.15	2.102	12.50	H
	3392	-58.82	-13	-45.82	-67.71	2.856	13.90	H
	1696	-50.38	-13	-37.38	-57.35	1.58	10.70	V
	2544	-46.93	-13	-33.93	-55.18	2.10	12.50	V
	3392	-60.00	-13	-47.00	-68.89	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-59.91	-13	-46.91	-66.88	1.58	10.70	H
	2472	-56.96	-13	-43.96	-65.21	2.102	12.50	H
	3296	-59.84	-13	-46.84	-68.73	2.856	13.90	H
	1648	-56.31	-13	-43.31	-63.28	1.58	10.70	V
	2472	-54.86	-13	-41.86	-63.11	2.10	12.50	V
	3296	-59.55	-13	-46.55	-68.44	2.86	13.90	V
Middle	1672	-46.92	-13	-33.92	-53.89	1.58	10.70	H
	2512	-55.16	-13	-42.16	-63.41	2.102	12.50	H
	3344	-60.05	-13	-47.05	-68.94	2.856	13.90	H
	1672	-52.59	-13	-39.59	-59.56	1.58	10.70	V
	2512	-52.41	-13	-39.41	-60.66	2.10	12.50	V
	3344	-59.45	-13	-46.45	-68.34	2.86	13.90	V
Highest	1696	-50.16	-13	-37.16	-57.13	1.58	10.70	H
	2544	-51.59	-13	-38.59	-59.84	2.102	12.50	H
	3392	-59.27	-13	-46.27	-68.16	2.856	13.90	H
	1696	-51.97	-13	-38.97	-58.94	1.58	10.70	V
	2544	-51.89	-13	-38.89	-60.14	2.10	12.50	V
	3392	-59.90	-13	-46.90	-68.79	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3705	-55.61	-13	-42.61	-67.87	2.64	14.90	H
	5550	-47.25	-13	-34.25	-59.11	2.94	14.80	H
	7400	-51.98	-13	-38.98	-61.75	3.39	13.16	H
	3705	-55.35	-13	-42.35	-67.61	2.64	14.90	V
	5550	-51.64	-13	-38.64	-63.50	2.94	14.80	V
	7395	-52.33	-13	-39.33	-62.10	3.39	13.16	V
Middle	3765	-49.87	-13	-36.87	-62.13	2.64	14.90	H
	5640	-44.29	-13	-31.29	-56.15	2.94	14.80	H
	7515	-51.10	-13	-38.10	-60.87	3.39	13.16	H
	3765	-49.48	-13	-36.48	-61.74	2.64	14.90	V
	5640	-44.98	-13	-31.98	-56.84	2.94	14.80	V
	7515	-51.89	-13	-38.89	-61.66	3.39	13.16	V
Highest	3825	-57.25	-13	-44.25	-69.51	2.64	14.90	H
	5730	-54.39	-13	-41.39	-66.25	2.94	14.80	H
	7635	-52.04	-13	-39.04	-61.81	3.39	13.16	H
	3825	-56.33	-13	-43.33	-68.59	2.64	14.90	V
	5730	-53.18	-13	-40.18	-65.04	2.94	14.80	V
	7635	-51.87	-13	-38.87	-61.64	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3705	-56.73	-13	-43.73	-68.99	2.64	14.90	H
	5550	-54.58	-13	-41.58	-66.44	2.94	14.80	H
	7395	-52.24	-13	-39.24	-62.01	3.39	13.16	H
	3705	-56.32	-13	-43.32	-68.58	2.64	14.90	V
	5550	-53.91	-13	-40.91	-65.77	2.94	14.80	V
	7395	-51.80	-13	-38.80	-61.57	3.39	13.16	V
Middle	3765	-49.81	-13	-36.81	-62.07	2.64	14.90	H
	5640	-42.59	-13	-29.59	-54.45	2.94	14.80	H
	7515	-51.70	-13	-38.70	-61.47	3.39	13.16	H
	3765	-54.07	-13	-41.07	-66.33	2.64	14.90	V
	5640	-49.14	-13	-36.14	-61.00	2.94	14.80	V
	7515	-51.40	-13	-38.40	-61.17	3.39	13.16	V
Highest	3825	-56.98	-13	-43.98	-69.24	2.64	14.90	H
	5730	-54.21	-13	-41.21	-66.07	2.94	14.80	H
	7635	-51.62	-13	-38.62	-61.39	3.39	13.16	H
	3825	-56.28	-13	-43.28	-68.54	2.64	14.90	V
	5730	-53.78	-13	-40.78	-65.64	2.94	14.80	V
	7635	-51.58	-13	-38.58	-61.35	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-65.05	-13	-52.05	-72.02	1.58	10.70	H
	2480	-60.38	-13	-47.38	-68.63	2.102	12.50	H
	3304	-60.09	-13	-47.09	-68.98	2.856	13.90	H
	1656	-63.65	-13	-50.65	-70.62	1.58	10.70	V
	2480	-59.21	-13	-46.21	-67.46	2.10	12.50	V
	3304	-60.30	-13	-47.30	-69.19	2.86	13.90	V
Middle	1672	-66.15	-13	-53.15	-73.12	1.58	10.70	H
	2508	-60.69	-13	-47.69	-68.94	2.102	12.50	H
	3348	-60.53	-13	-47.53	-69.42	2.856	13.90	H
	1672	-65.20	-13	-52.20	-72.17	1.58	10.70	V
	2508	-59.69	-13	-46.69	-67.94	2.10	12.50	V
	3348	-60.34	-13	-47.34	-69.23	2.86	13.90	V
Highest	1696	-64.97	-13	-51.97	-71.94	1.58	10.70	H
	2536	-59.56	-13	-46.56	-67.81	2.102	12.50	H
	3384	-59.98	-13	-46.98	-68.87	2.856	13.90	H
	1696	-64.45	-13	-51.45	-71.42	1.58	10.70	V
	2536	-59.17	-13	-46.17	-67.42	2.10	12.50	V
	3384	-60.06	-13	-47.06	-68.95	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3705	-56.98	-13	-43.98	-69.24	2.64	14.90	H
	5550	-54.48	-13	-41.48	-66.34	2.94	14.80	H
	7410	-52.57	-13	-39.57	-62.34	3.39	13.16	H
	3705	-56.79	-13	-43.79	-69.05	2.64	14.90	V
	5550	-54.84	-13	-41.84	-66.70	2.94	14.80	V
	7410	-52.59	-13	-39.59	-62.36	3.39	13.16	V
Middle	3765	-55.82	-13	-42.82	-68.08	2.64	14.90	H
	5640	-53.62	-13	-40.62	-65.48	2.94	14.80	H
	7515	-51.64	-13	-38.64	-61.41	3.39	13.16	H
	3765	-55.54	-13	-42.54	-67.80	2.64	14.90	V
	5640	-54.21	-13	-41.21	-66.07	2.94	14.80	V
	7515	-51.58	-13	-38.58	-61.35	3.39	13.16	V
Highest	3810	-57.34	-13	-44.34	-69.60	2.64	14.90	H
	5730	-54.60	-13	-41.60	-66.46	2.94	14.80	H
	7635	-52.57	-13	-39.57	-62.34	3.39	13.16	H
	3810	-56.61	-13	-43.61	-68.87	2.64	14.90	V
	5730	-55.07	-13	-42.07	-66.93	2.94	14.80	V
	7635	-52.49	-13	-39.49	-62.26	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3420	-57.94	-13	-44.94	-68.68	2.604	13.34	H
	5130	-54.54	-13	-41.54	-65.05	3.011	13.52	H
	6855	-53.92	-13	-40.92	-64.12	3.271	13.47	H
	3420	-57.28	-13	-44.28	-68.02	2.604	13.34	V
	5130	-54.85	-13	-41.85	-65.36	3.011	13.52	V
	6855	-54.09	-13	-41.09	-64.29	3.271	13.47	V
Middle	3465	-57.87	-13	-44.87	-68.61	2.604	13.34	H
	5190	-53.39	-13	-40.39	-63.90	3.011	13.52	H
	6930	-53.46	-13	-40.46	-63.66	3.271	13.47	H
	3465	-57.99	-13	-44.99	-68.73	2.604	13.34	V
	5190	-54.70	-13	-41.70	-65.21	3.011	13.52	V
	6930	-53.59	-13	-40.59	-63.79	3.271	13.47	V
Highest	3510	-57.40	-13	-44.40	-68.14	2.604	13.34	H
	5265	-55.03	-13	-42.03	-65.54	3.011	13.52	H
	7005	-53.74	-13	-40.74	-63.94	3.271	13.47	H
	3510	-56.89	-13	-43.89	-67.63	2.604	13.34	V
	5265	-54.91	-13	-41.91	-65.42	3.011	13.52	V
	7005	-53.75	-13	-40.75	-63.95	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<For Sample 2>

GSM850 (GSM)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-63.94	-13	-50.94	-70.91	1.58	10.70	H
	2512	-60.43	-13	-47.43	-68.68	2.102	12.50	H
	3344	-60.49	-13	-47.49	-69.38	2.856	13.90	H
	1672	-62.85	-13	-49.85	-69.82	1.58	10.70	V
	2512	-58.99	-13	-45.99	-67.24	2.10	12.50	V
	3344	-60.58	-13	-47.58	-69.47	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (GSM)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3765	-55.95	-13	-42.95	-68.21	2.64	14.90	H
	5640	-54.61	-13	-41.61	-66.47	2.94	14.80	H
	7515	-53.00	-13	-40.00	-62.77	3.39	13.16	H
	3765	-55.64	-13	-42.64	-67.90	2.64	14.90	V
	5640	-55.36	-13	-42.36	-67.22	2.94	14.80	V
	7515	-52.77	-13	-39.77	-62.54	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.