

### #01\_HAC\_E\_LTE Band 48\_20M\_QPSK\_1\_0\_Ch55340

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 3560 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 3560 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.045 V/m; Power Drift = -0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.68 dBV/m

**Emission category: M4**

MIF scaled E-field


Grid 1 <b>M4</b> <b>14.35 dBV/m</b>	Grid 2 <b>M4</b> <b>17.34 dBV/m</b>	Grid 3 <b>M4</b> <b>17.47 dBV/m</b>
Grid 4 <b>M4</b> <b>12.57 dBV/m</b>	Grid 5 <b>M4</b> <b>16.68 dBV/m</b>	Grid 6 <b>M4</b> <b>17.91 dBV/m</b>
Grid 7 <b>M4</b> <b>16.76 dBV/m</b>	Grid 8 <b>M4</b> <b>17.32 dBV/m</b>	Grid 9 <b>M4</b> <b>18.68 dBV/m</b>

**Cursor:**

Total = 18.68 dBV/m

E Category: M4

Location: -16, 15.5, 8.7 mm

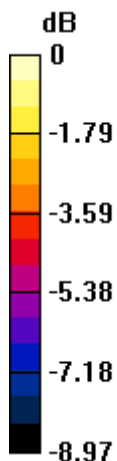

0 dB = 8.590 V/m = 18.68 dBV/m

## #02\_HAC\_E\_LTE Band 48\_20M\_QPSK\_1\_0\_Ch55830

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 3609 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 3609 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.979 V/m; Power Drift = -0.17 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.04 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>12.73 dBV/m</b>	Grid 2 <b>M4</b> <b>15.42 dBV/m</b>	Grid 3 <b>M4</b> <b>15.41 dBV/m</b>
Grid 4 <b>M4</b> <b>15.3 dBV/m</b>	Grid 5 <b>M4</b> <b>15.12 dBV/m</b>	Grid 6 <b>M4</b> <b>16.78 dBV/m</b>
Grid 7 <b>M4</b> <b>16.21 dBV/m</b>	Grid 8 <b>M4</b> <b>15.48 dBV/m</b>	Grid 9 <b>M4</b> <b>17.04 dBV/m</b>

**Cursor:**

Total = 17.04 dBV/m

E Category: M4

Location: -16, 14, 8.7 mm

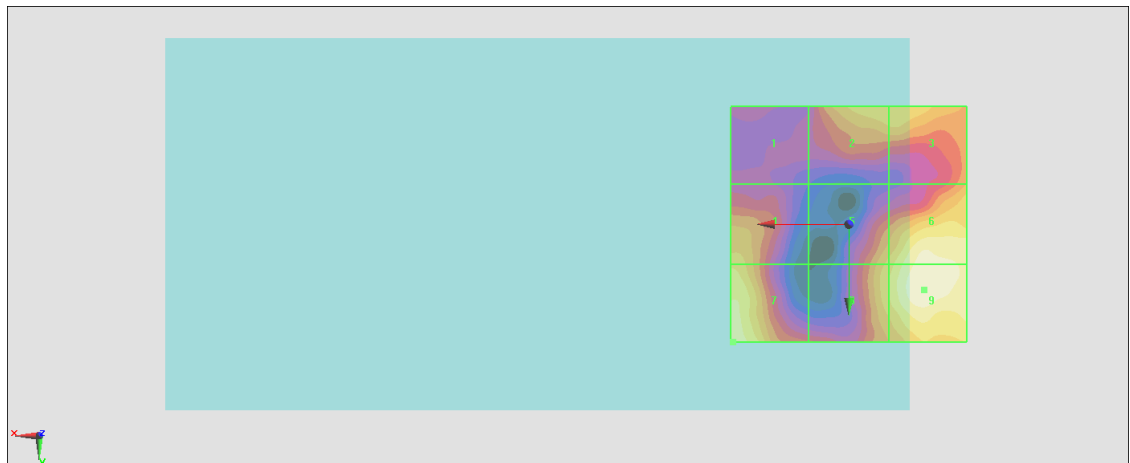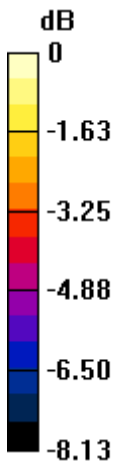

0 dB = 7.108 V/m = 17.03 dBV/m

### #03\_HAC\_E\_LTE Band 48\_20M\_QPSK\_1\_0\_Ch56150

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 3641 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 3641 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.809 V/m; Power Drift = -0.13 dB

Applied MIF = -1.44 dB

RF audio interference level = 16.40 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>13.77 dBV/m</b>	Grid 2 <b>M4</b> <b>16.39 dBV/m</b>	Grid 3 <b>M4</b> <b>16.4 dBV/m</b>
Grid 4 <b>M4</b> <b>14.32 dBV/m</b>	Grid 5 <b>M4</b> <b>14.54 dBV/m</b>	Grid 6 <b>M4</b> <b>15.68 dBV/m</b>
Grid 7 <b>M4</b> <b>16 dBV/m</b>	Grid 8 <b>M4</b> <b>14.79 dBV/m</b>	Grid 9 <b>M4</b> <b>15.97 dBV/m</b>

**Cursor:**

Total = 16.40 dBV/m

E Category: M4

Location: -9, -25, 8.7 mm

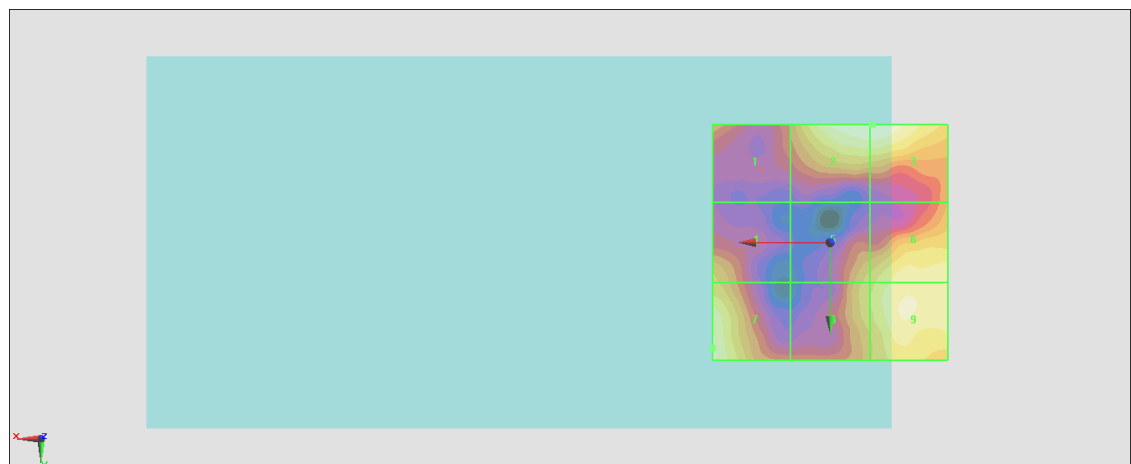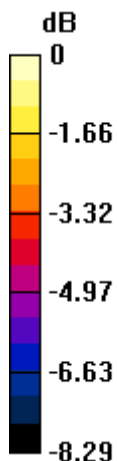

0 dB = 6.609 V/m = 16.40 dBV/m

### #04\_HAC\_E\_LTE Band 48\_20M\_QPSK\_1\_0\_Ch56640

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 3690 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 3690 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.588 V/m; Power Drift = -0.16 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.29 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>15.42 dBV/m</b>	Grid 2 <b>M4</b> <b>17.25 dBV/m</b>	Grid 3 <b>M4</b> <b>17.29 dBV/m</b>
Grid 4 <b>M4</b> <b>14.98 dBV/m</b>	Grid 5 <b>M4</b> <b>14.7 dBV/m</b>	Grid 6 <b>M4</b> <b>16.4 dBV/m</b>
Grid 7 <b>M4</b> <b>15.82 dBV/m</b>	Grid 8 <b>M4</b> <b>14.95 dBV/m</b>	Grid 9 <b>M4</b> <b>16.62 dBV/m</b>

**Cursor:**

Total = 17.29 dBV/m

E Category: M4

Location: -11.5, -25, 8.7 mm

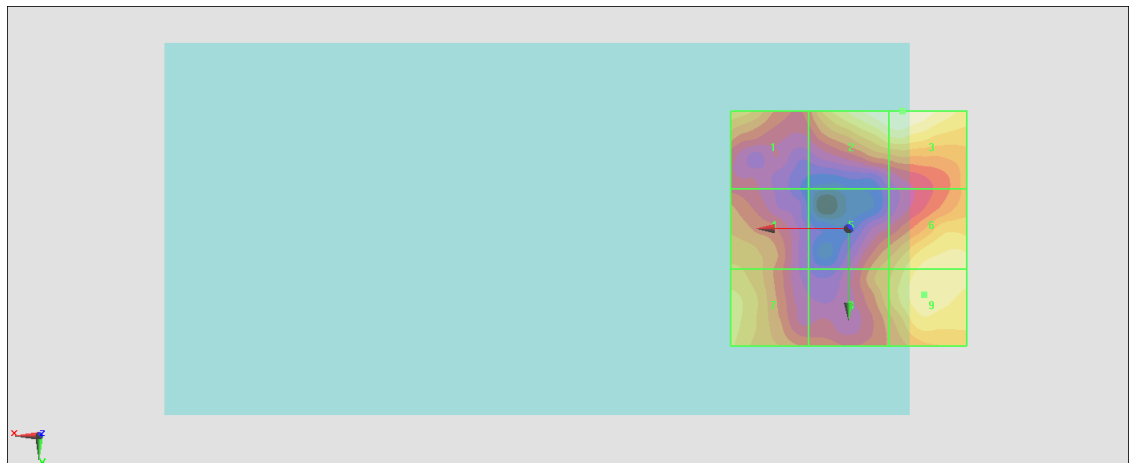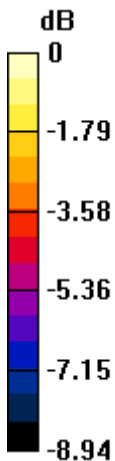

0 dB = 7.320 V/m = 17.29 dBV/m

### #05\_HAC\_E\_WLAN 2.4GHz\_802.11g 6Mbps\_Ch1;Ant 1

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.37 V/m; Power Drift = 0.04 dB

Applied MIF = 0.12 dB

RF audio interference level = 26.00 dBV/m

**Emission category: M4**

MIF scaled E-field


Grid 1 <b>M4</b> <b>22.09 dBV/m</b>	Grid 2 <b>M4</b> <b>25.1 dBV/m</b>	Grid 3 <b>M4</b> <b>25.22 dBV/m</b>
Grid 4 <b>M4</b> <b>23.44 dBV/m</b>	Grid 5 <b>M4</b> <b>25.82 dBV/m</b>	Grid 6 <b>M4</b> <b>25.91 dBV/m</b>
Grid 7 <b>M4</b> <b>24.68 dBV/m</b>	Grid 8 <b>M4</b> <b>26 dBV/m</b>	Grid 9 <b>M4</b> <b>25.97 dBV/m</b>

**Cursor:**

Total = 26.00 dBV/m

E Category: M4

Location: -7, 25, 8.7 mm

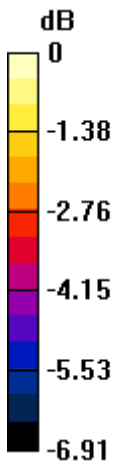

0 dB = 19.95 V/m = 26.00 dBV/m

## #06\_HAC\_E\_WLAN 2.4GHz\_802.11g 6Mbps\_Ch6;Ant 1

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 2437 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 44.04 V/m; Power Drift = 0.05 dB

Applied MIF = 0.12 dB

RF audio interference level = 31.14 dBV/m

**Emission category: M3**

MIF scaled E-field



Grid 1 <b>M4</b> <b>26.73 dBV/m</b>	Grid 2 <b>M3</b> <b>30.26 dBV/m</b>	Grid 3 <b>M3</b> <b>30.45 dBV/m</b>
Grid 4 <b>M4</b> <b>28.2 dBV/m</b>	Grid 5 <b>M3</b> <b>31.02 dBV/m</b>	Grid 6 <b>M3</b> <b>31.14 dBV/m</b>
Grid 7 <b>M4</b> <b>29.52 dBV/m</b>	Grid 8 <b>M3</b> <b>30.9 dBV/m</b>	Grid 9 <b>M3</b> <b>30.98 dBV/m</b>

**Cursor:**

Total = 31.14 dBV/m

E Category: M3

Location: -12, 3, 8.7 mm

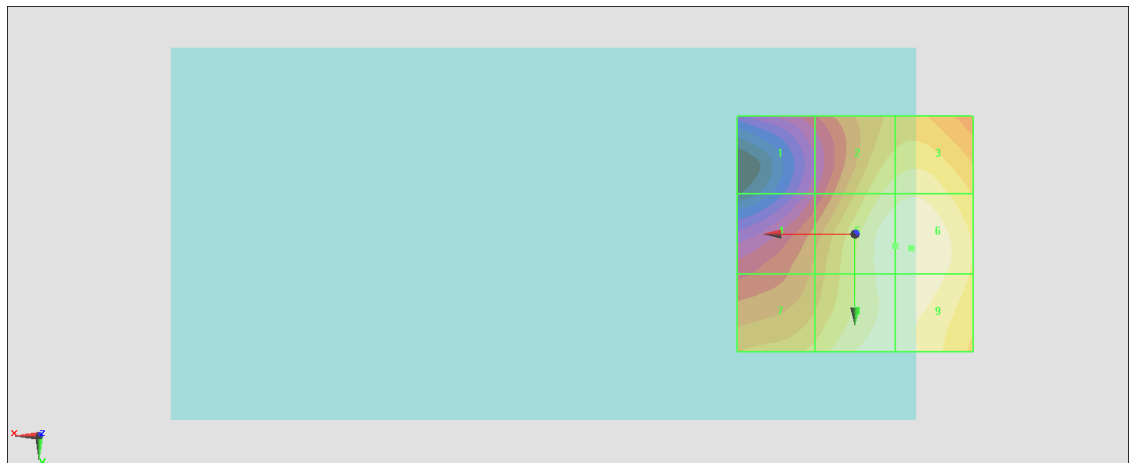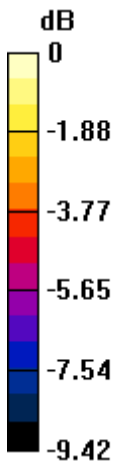

0 dB = 36.06 V/m = 31.14 dBV/m

### #07\_HAC\_E\_WLAN 2.4GHz\_802.11g 6Mbps\_Ch11;Ant 1

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2462 MHz;Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 2462 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.91 V/m; Power Drift = 0.01 dB

Applied MIF = 0.12 dB

RF audio interference level = 26.33 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>22.45 dBV/m</b>	Grid 2 <b>M4</b> <b>25.54 dBV/m</b>	Grid 3 <b>M4</b> <b>25.73 dBV/m</b>
Grid 4 <b>M4</b> <b>23.64 dBV/m</b>	Grid 5 <b>M4</b> <b>26.24 dBV/m</b>	Grid 6 <b>M4</b> <b>26.33 dBV/m</b>
Grid 7 <b>M4</b> <b>25.29 dBV/m</b>	Grid 8 <b>M4</b> <b>26.24 dBV/m</b>	Grid 9 <b>M4</b> <b>26.18 dBV/m</b>

**Cursor:**

Total = 26.33 dBV/m

E Category: M4

Location: -12, 2, 8.7 mm

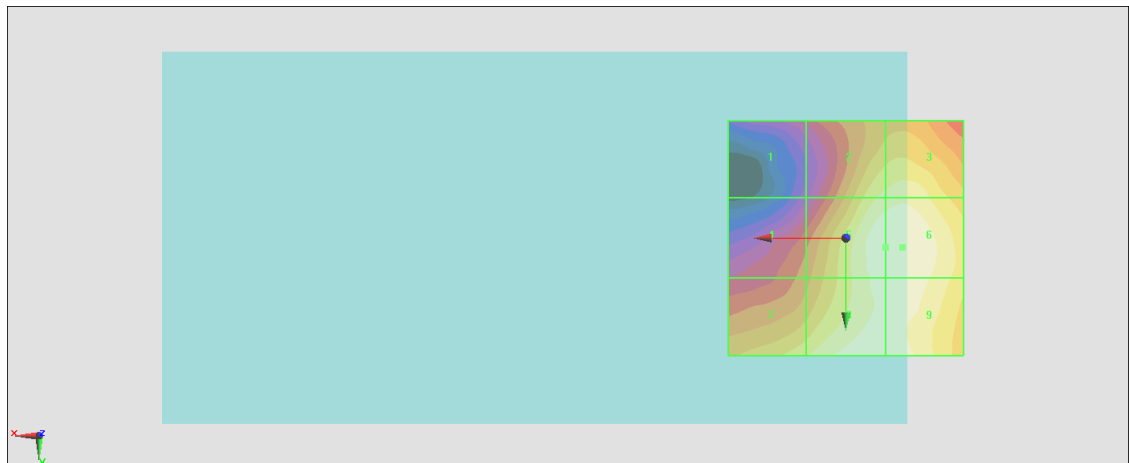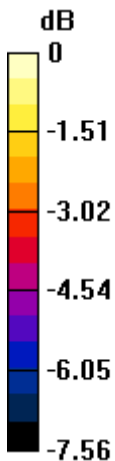

0 dB = 20.73 V/m = 26.33 dBV/m

### #08\_HAC\_E\_WLAN 5GHz\_802.11a 6Mbps\_Ch52;Ant 1

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps); Frequency: 5260 MHz; Duty Cycle: 1:11.3789

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 5260 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.34 V/m; Power Drift = -0.07 dB

Applied MIF = -3.15 dB

RF audio interference level = 23.68 dBV/m

**Emission category: M4**

MIF scaled E-field



<b>Grid 1 M4</b> <b>20.68 dBV/m</b>	<b>Grid 2 M4</b> <b>20.62 dBV/m</b>	<b>Grid 3 M4</b> <b>19.77 dBV/m</b>
<b>Grid 4 M4</b> <b>22.1 dBV/m</b>	<b>Grid 5 M4</b> <b>21.63 dBV/m</b>	<b>Grid 6 M4</b> <b>18.9 dBV/m</b>
<b>Grid 7 M4</b> <b>23.68 dBV/m</b>	<b>Grid 8 M4</b> <b>23.19 dBV/m</b>	<b>Grid 9 M4</b> <b>19.45 dBV/m</b>

**Cursor:**

Total = 23.68 dBV/m

E Category: M4

Location: 14.5, 25, 8.7 mm

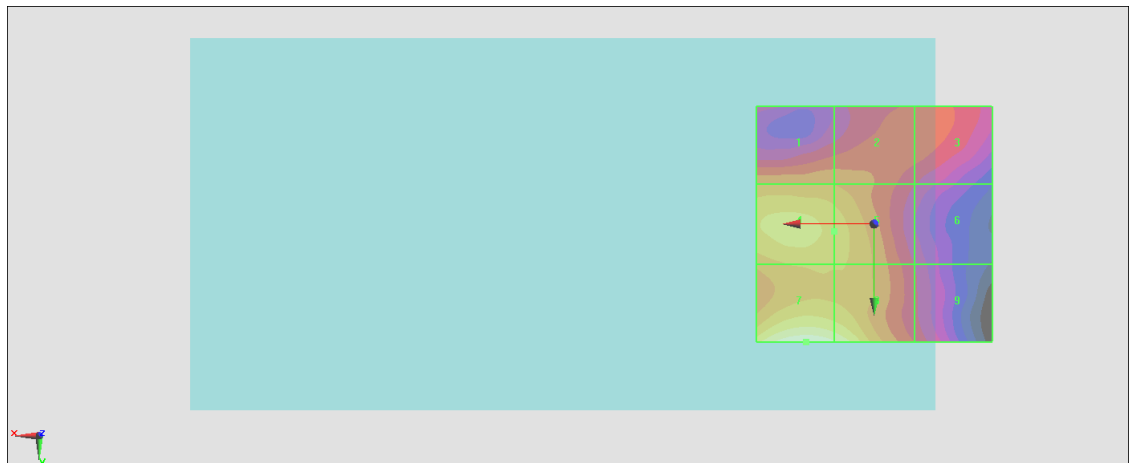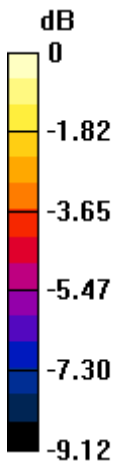

0 dB = 15.27 V/m = 23.68 dBV/m



### #09\_HAC\_E\_WLAN 5GHz\_802.11a 6Mbps\_Ch56;Ant 1

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps); Frequency: 5280 MHz; Duty Cycle: 1:11.3789

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 5280 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.93 V/m; Power Drift = -0.06 dB

Applied MIF = -3.15 dB

RF audio interference level = 23.71 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>20.89 dBV/m</b>	Grid 2 <b>M4</b> <b>20.89 dBV/m</b>	Grid 3 <b>M4</b> <b>19.76 dBV/m</b>
Grid 4 <b>M4</b> <b>22.3 dBV/m</b>	Grid 5 <b>M4</b> <b>21.83 dBV/m</b>	Grid 6 <b>M4</b> <b>18.8 dBV/m</b>
Grid 7 <b>M4</b> <b>23.71 dBV/m</b>	Grid 8 <b>M4</b> <b>23.37 dBV/m</b>	Grid 9 <b>M4</b> <b>19.98 dBV/m</b>

**Cursor:**

Total = 23.71 dBV/m

E Category: M4

Location: 13.5, 25, 8.7 mm

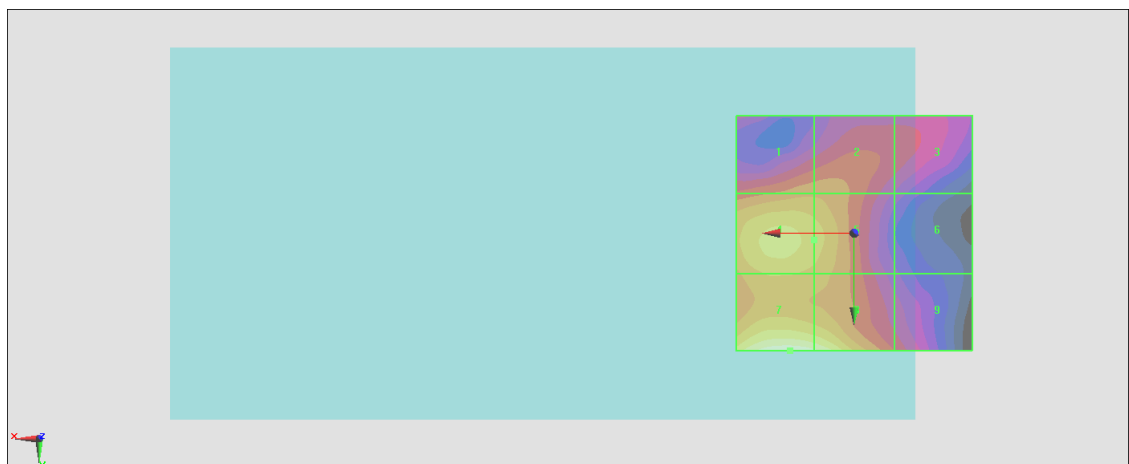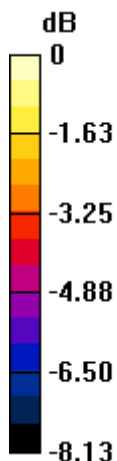

0 dB = 15.33 V/m = 23.71 dBV/m

### #10\_HAC\_E\_WLAN 5GHz\_802.11a 6Mbps\_Ch60;Ant 1

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps); Frequency: 5300 MHz; Duty Cycle: 1:11.3789

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 5300 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 16.84 V/m; Power Drift = -0.13 dB

Applied MIF = -3.15 dB

RF audio interference level = 23.84 dBV/m

**Emission category: M4**

MIF scaled E-field


Grid 1 <b>M4</b> <b>20.93 dBV/m</b>	Grid 2 <b>M4</b> <b>20.81 dBV/m</b>	Grid 3 <b>M4</b> <b>19.02 dBV/m</b>
Grid 4 <b>M4</b> <b>22.23 dBV/m</b>	Grid 5 <b>M4</b> <b>21.57 dBV/m</b>	Grid 6 <b>M4</b> <b>18.03 dBV/m</b>
Grid 7 <b>M4</b> <b>23.84 dBV/m</b>	Grid 8 <b>M4</b> <b>23.43 dBV/m</b>	Grid 9 <b>M4</b> <b>19.7 dBV/m</b>

**Cursor:**

Total = 23.84 dBV/m

E Category: M4

Location: 14, 25, 8.7 mm

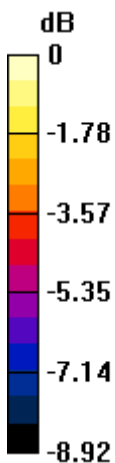

0 dB = 15.55 V/m = 23.83 dBV/m

### #11\_HAC\_E\_WLAN 5GHz\_802.11a 6Mbps\_Ch64;Ant 1

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps); Frequency: 5320 MHz; Duty Cycle: 1:11.3789

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1) @ 5320 MHz; Calibrated: 2020/12/18
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.52 V/m; Power Drift = -0.13 dB

Applied MIF = -3.15 dB

RF audio interference level = 24.30 dBV/m

**Emission category: M4**

MIF scaled E-field


<b>Grid 1 M4</b> <b>20.94 dBV/m</b>	<b>Grid 2 M4</b> <b>20.74 dBV/m</b>	<b>Grid 3 M4</b> <b>19.61 dBV/m</b>
<b>Grid 4 M4</b> <b>22.09 dBV/m</b>	<b>Grid 5 M4</b> <b>21.43 dBV/m</b>	<b>Grid 6 M4</b> <b>18.93 dBV/m</b>
<b>Grid 7 M4</b> <b>24.3 dBV/m</b>	<b>Grid 8 M4</b> <b>23.98 dBV/m</b>	<b>Grid 9 M4</b> <b>20.43 dBV/m</b>

**Cursor:**

Total = 24.30 dBV/m

E Category: M4

Location: 13.5, 25, 8.7 mm

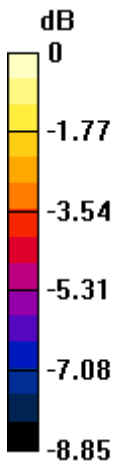

0 dB = 16.40 V/m = 24.30 dBV/m