

FCC SAR TEST REPORT

FCC ID : UZ7TC530R
Equipment : Touch Computer
Brand Name : Zebra
Model Name : TC530R
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on May 21, 2024 and testing was started from Jun. 04, 2024 and completed on Jul. 11, 2024. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
4. RF Exposure Limits.....	6
4.1 Uncontrolled Environment.....	6
4.2 Controlled Environment.....	6
4.3 RF Exposure limit for above 6GHz.....	7
5. Specific Absorption Rate (SAR).....	8
5.1 Introduction	8
5.2 SAR Definition.....	8
6. System Description and Setup	9
6.1 Test Site Location	9
6.2 E-Field Probe	10
6.3 Data Acquisition Electronics (DAE).....	10
6.4 Phantom.....	11
6.5 Device Holder.....	12
7. Measurement Procedures	13
7.1 Spatial Peak SAR Evaluation.....	13
7.2 Power Reference Measurement.....	14
7.3 Area Scan	14
7.4 Zoom Scan.....	15
7.5 Volume Scan Procedures	15
7.6 Power Drift Monitoring.....	15
8. Test Equipment List.....	16
9. System Verification	17
9.1 Tissue Verification.....	17
9.2 System Performance Check Results.....	17
9.3 PD System Performance Check Results.....	18
10. RF Exposure Positions	19
10.1 Ear and handset reference point.....	19
10.2 Definition of the cheek position	20
10.3 Definition of the tilt position	21
10.4 Body Worn Accessory.....	22
10.5 Product Specific Exposure	22
10.6 Wireless Router.....	22
11. WiFi/Bluetooth Output Power (Unit: dBm).....	23
12. Antenna Location	42
13. SAR Test Results	43
13.1 Head SAR	45
13.2 Hotspot SAR	47
13.3 Body Worn Accessory SAR.....	49
13.4 Product Specific SAR.....	51
13.5 6GHz PD SAR Result	53
13.6 Repeated SAR Measurement	54
13.7 Supplemental SAR Results.....	54
14. Simultaneous Transmission Analysis.....	55
14.1 Head Exposure Conditions	55
14.2 Hotspot Exposure Conditions.....	56
14.3 Body-Worn Accessory Exposure Conditions.....	56
14.4 Product Specific Exposure Conditions	58
15. Uncertainty Assessment	59
16. References.....	62
Appendix A. Plots of SAR System Performance Check	
Appendix B. Plots of PD System Performance Check	
Appendix C. Plots of High SAR Measurement	
Appendix D. Plots of High PD Measurement	
Appendix E. DASY Calibration Certificate	
Appendix F. Proximity sensor validation and Power reduction mechanism verification	
Appendix G. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA430824	01	Initial issue of report	Jul. 18, 2024.



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Zebra Technologies Corporation, Touch Computer, TC530R, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
		Head	Body-worn	Hotspot	Product Specific		
		1g SAR (W/kg)			10g SAR (W/kg)		
DTS	2.4GHz WLAN	0.53	0.40	0.87		1.59	
NII	5GHz WLAN	1.09	0.72		3.18	1.59	3.45
6CD	6GHz WLAN	0.69	0.09		0.31	1.59	3.45
DSS	Bluetooth	0.01	< 0.01	< 0.01		1.58	
LXI	RFID		0.19	0.30	0.46	1.49	3.45
DXX	NFC				< 0.01		3.45
Equipment Class	Frequency Band	Head	Body-worn	Product Specific	Reported PD (mW/cm^2)		
		Reported APD (mW/cm^2)	Reported APD (mW/cm^2)	Reported APD (mW/cm^2)			
6CD	6GHz WLAN	0.54	0.07	0.77	0.75		
Date of Testing:		2024/06/04 ~ 2024/07/11					

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm²=10 W/m²) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r0
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Touch Computer
Brand Name	Zebra
Model Name	TC530R
FCC ID	UZ7TC530R
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 6E: 5925 MHz~6425 MHz, 6425 MHz~ 6525 MHz, 6525 MHz~6875 MHz, 6875 MHz~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz RFID: 902 MHz ~ 928 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK RFID: ASK
HW Version	DV2-2
SW Version	nemesis_A13_userdebug_nonGMS_RelKey_2024-05-25-0412_main_SE
FW Version(WLAN)	FUSION_QA_6_1.3.0.001_T
FW Version(NFC)	PN7221_AR_13.21.00
MFD	23APR24
EUT Stage	Identical Prototype
Remark: 1. There are four batteries. RF exposure evaluation selects battery 1 as the main test and battery 2/3/4 spot check worst case found in battery 1. 2. The device implements sensor detection for SAR compliance at different exposure conditions and the power verification include in appendix F. 3. The device support DBS mode (Dual band simultaneous) for WLAN operation. 4. The device 2.4GHz support hotspot operation via 5/6GHz receive signal. 5. The device support sensor detection and the power verification include in appendix F, more information refer to operational description.	

Specification of Accessories				
Adapter	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Battery 1 (1x)	Brand Name	Zebra	Model	BT-000442
			Part Number	BT-000442-0020
Battery 2 (1.5x)	Brand Name	Zebra	Model	BT-000442A
			Part Number	BT-000442-0820
Battery 3 (BLE battery)	Brand Name	Zebra	Model	BT-000442B
			Part Number	BT-000442-002B
Battery 4 (Wireless Battery)	Brand Name	Zebra	Model	BT-000442
			Part Number	BT-000442-002A
Battery 5 (1x)	Brand Name	Zebra	Model	BT-000442
			Part Number	BT-000442-1020
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB TYPE C to 3.5mm audio connector	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm Earphone	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-01
Rugged Headset	Brand Name	Zebra	Part Number	HS2100-OTH
USB TYPE C Earphone	Brand Name	Zebra	Part Number	HPST-USBC-PTT1-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-NGTC5-ELEC-01
Soft Holster	Brand Name	Zebra	Part Number	SG-NGTC5TC7-HLSTR-01
TC53/TC58 RUGGED BOOT	Brand Name	Zebra	Part Number	SG-NGTC5EXO1-01

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

4.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

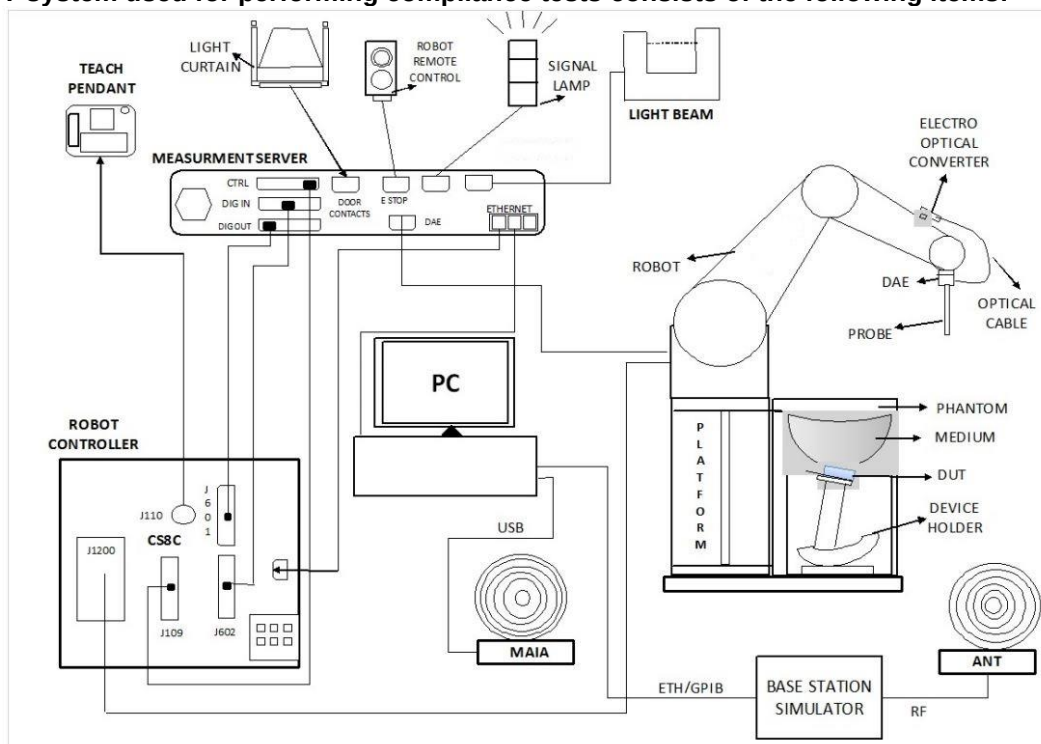

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory			Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan			TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY	
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY		

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

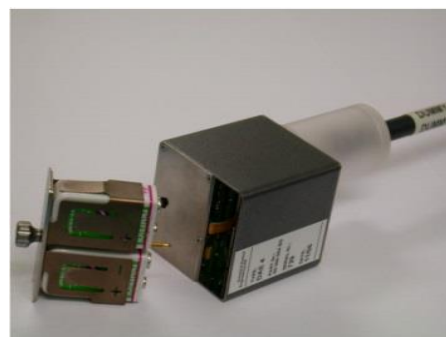


Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

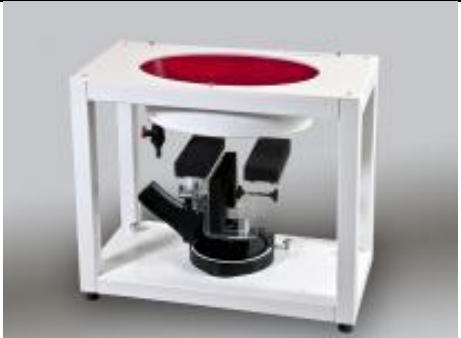Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	900MHz System Validation Kit ⁽²⁾	D900V2	1d171	Mar. 24, 2022	Mar. 21, 2025
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	736	Aug. 17, 2021	Aug. 14, 2024
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2022	Nov. 18, 2025
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1171	Apr. 19, 2024	Apr. 16, 2027
SPEAG	6500MHz System Validation Kit ⁽²⁾	D6.5GHzV2	1003	Mar. 15, 2024	Mar. 14, 2025
SPEAG	13MHz System Validation Kit ⁽²⁾	CLA13	1022	Sep. 01, 2022	Aug. 30, 2024
SPEAG	5G Verification Source	10GHz	1020	Jan. 18, 2024	Jan. 17, 2025
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9461	Oct. 12, 2023	Oct. 11, 2024
SPEAG	Data Acquisition Electronics	DAE4	778	Jan. 22, 2024	Jan. 21, 2025
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 14, 2023	Jul. 13, 2024
SPEAG	Data Acquisition Electronics	DAE4	1311	Sep. 13, 2023	Sep. 12, 2024
SPEAG	Data Acquisition Electronics	DAE4	1512	Mar. 14, 2024	Mar. 13, 2025
SPEAG	Data Acquisition Electronics	DAE4ip	1823	Jul. 31, 2023	Jul. 30, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	3642	Apr. 25, 2024	Apr. 24, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 18, 2023	Jul. 17, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7692	Jul. 18, 2023	Jul. 17, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7814	Jun. 20, 2024	Jun. 19, 2025
Testo	Hygro meter	608-H1	45196600	Nov. 02, 2023	Nov. 01, 2024
R&S	BT Base Station	CBT	101136	Oct. 22, 2023	Oct. 21, 2024
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 27, 2023	Sep. 26, 2024
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 30, 2023	Oct. 29, 2024
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2023	Sep. 18, 2024
SPEAG	Dielectric Probe Kit	DAK-12	1156	Jul. 17, 2023	Jul. 16, 2024
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 09, 2023	Aug. 08, 2024
Anritsu	Power Meter	ML2495A	1419002	Aug. 17, 2023	Aug. 16, 2024
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2023	Aug. 17, 2024
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 10, 2024	Jan. 09, 2025
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2023	Oct. 15, 2024
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
13	22.1	0.728	54.685	0.75	55.00	-2.93	-0.57	± 5	2024/6/18
900	22.5	0.954	42.036	0.97	41.50	-1.65	1.29	± 5	2024/7/11
2450	22.6	1.806	40.030	1.80	39.20	0.33	2.12	± 5	2024/6/8
2450	22.2	1.817	40.102	1.80	39.20	0.94	2.30	± 5	2024/7/5
5250	22.5	4.595	36.969	4.71	35.95	-2.44	2.83	± 5	2024/6/5
5600	22.5	4.934	36.482	5.07	35.50	-2.68	2.77	± 5	2024/6/5
5800	22.5	5.437	35.413	5.27	35.30	3.17	0.32	± 5	2024/6/4
6500	22.5	6.190	35.300	6.07	34.50	1.98	2.32	± 5	2024/6/9

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
SAR-01	2024/6/18	13	1000	CLA13-1022	EX3DV4 - SN7306	DAE4 Sn853	0.612	0.560	0.612	9.29	0.367	0.349	0.367	4.86
SAR-06	2024/7/11	900	50	D900V2-1d171	EX3DV4 - SN7814	DAE4 Sn1512	0.542	11.000	10.84	-1.45	0.354	7.090	7.08	-0.14
SAR-05	2024/6/8	2450	50	D2450V2-929	EX3DV4 - SN3642	DAE4 Sn778	2.430	52.400	48.6	-7.25	1.140	24.700	22.8	-7.69
SAR-05	2024/7/5	2450	50	D2450V2-736	EX3DV4 - SN3642	DAE4 Sn778	2.480	54.200	49.6	-8.49	1.170	25.300	23.4	-7.51
SAR-05	2024/6/5	5250	50	D5GHzV2-1171-5250	EX3DV4 - SN3642	DAE4 Sn778	4.190	78.700	83.8	6.48	1.190	22.700	23.8	4.85
SAR-05	2024/6/5	5600	50	D5GHzV2-1171-5600	EX3DV4 - SN3642	DAE4 Sn778	4.460	81.400	89.2	9.58	1.270	23.400	25.4	8.55
SAR-05	2024/6/4	5800	50	D5GHzV2-1171-5800	EX3DV4 - SN3642	DAE4 Sn778	4.270	78.900	85.4	8.24	1.220	22.400	24.4	8.93
SAR-04	2024/6/9	6500	100	D6.5GHzV2-1003	EX3DV4 - SN7692	DAE4 Sn1311	29.300	293.000	293	0.00	5.310	53.800	53.1	-1.30

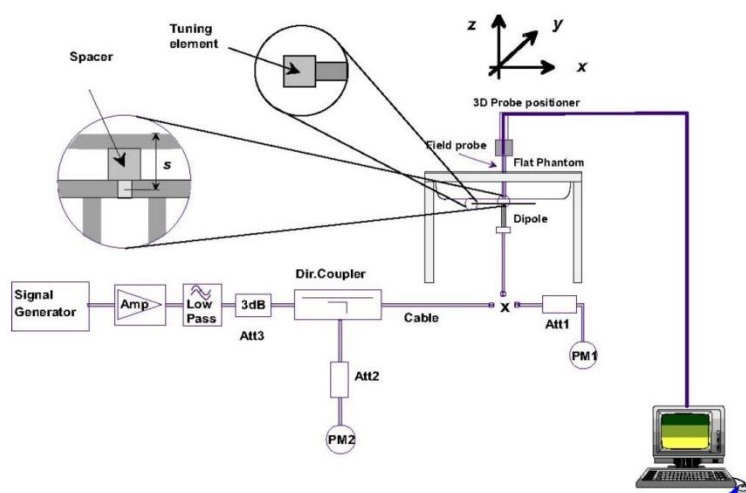


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

9.3 PD System Performance Check Results

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes

Test Location	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)	Date
SAR04	10G	10GHz_1020	EUmmWV4-9461	DAE4-1823	10mm	55.8	55.8	0	2024/6/4

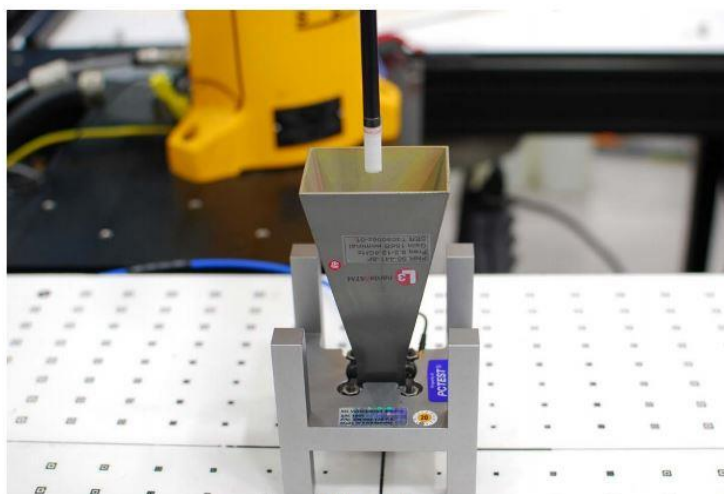


Figure 4-3
System Verification Setup Photo

System Performance Check Setup

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

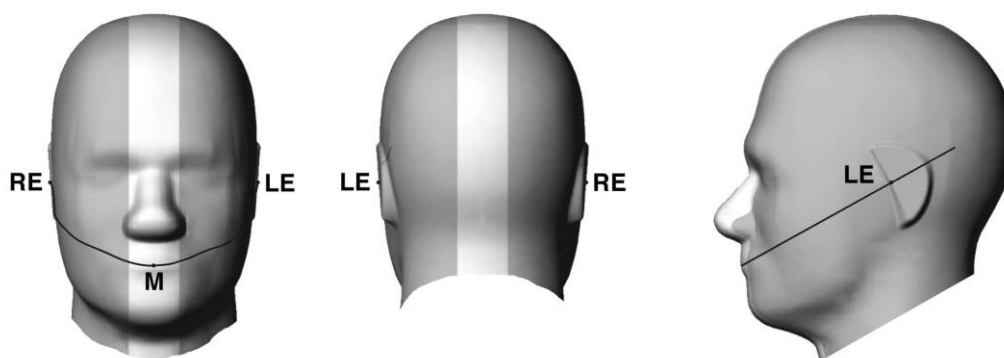


Fig 9.1.1 Front, back, and side views of SAM twin phantom

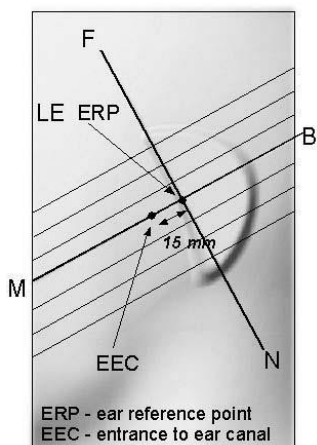


Fig 9.1.2 Close-up side view of phantom showing the ear region.

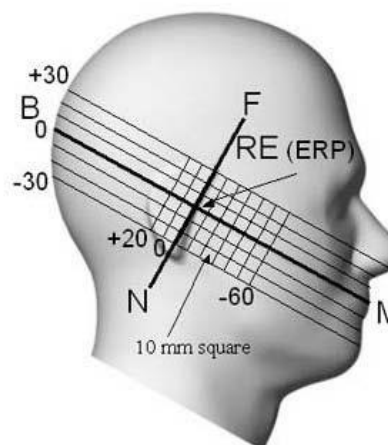


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

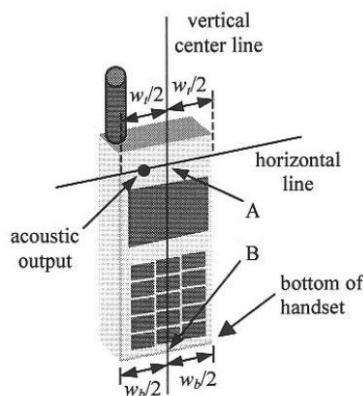


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

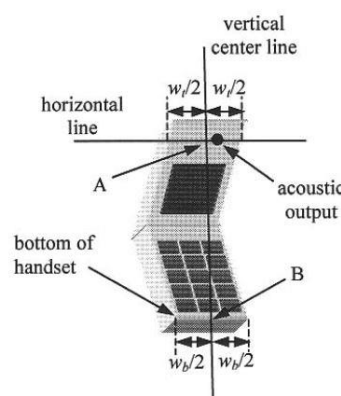


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

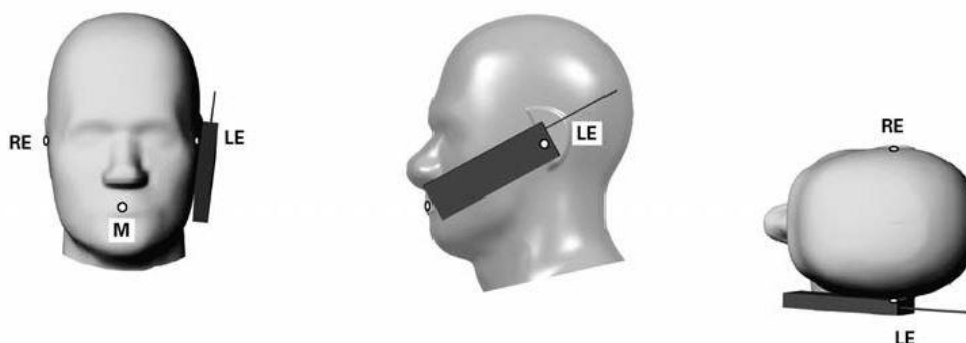


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

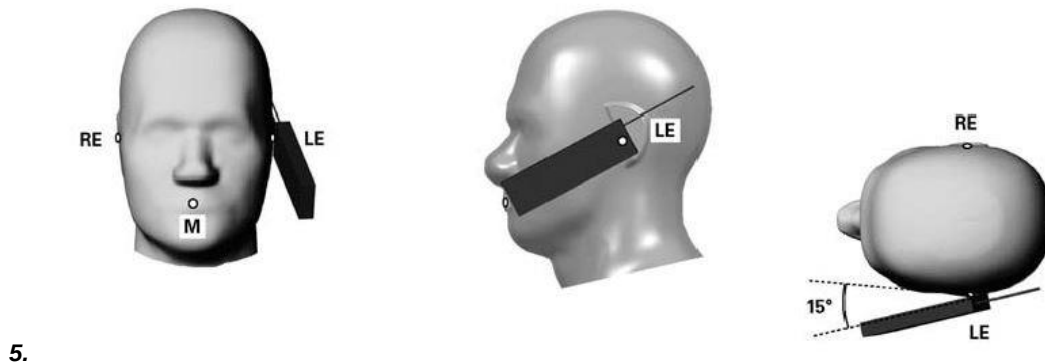


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

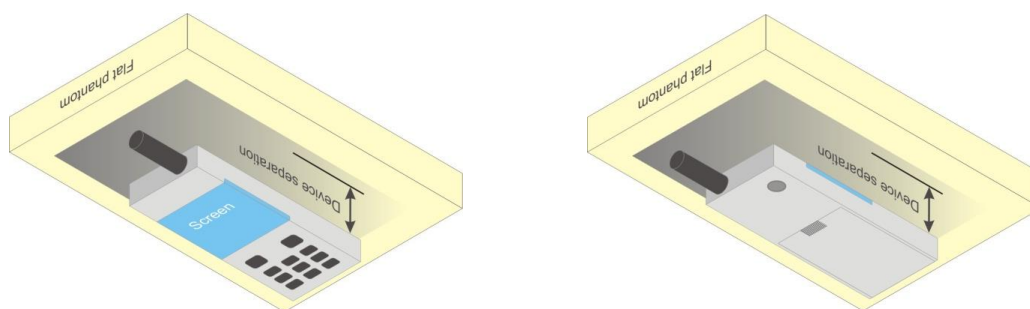


Fig 9.4 Body Worn Position

10.5 Product Specific Exposure

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$.

10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. The power table DSI 0 as head, DSI 1 as hotspot, DSI 2 as body-worn and Product specific conditions
2. For each antenna, transmit power in MIMO operation is equal to the power in SISO operation, RF exposure is performed MIMO operation only except for 2.4GHz WLAN.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
8. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
9. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
10. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
11. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<2.4GHz WLAN_CTL>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.70	21.00	98.57	20.60	21.00	98.57	20.00	21.00	20.10	21.00	23.06	24.00	97.76
		6	2437	20.70	21.00		20.70	21.00		20.60	21.00	20.60	21.00	23.61	24.00	
		11	2462	18.70	19.00		18.50	19.00		18.80	19.00	19.00	19.00	21.91	22.00	
	802.11g 6Mbps	1	2412	Not Required	19.50	Not Required	Not Required	19.50	Not Required	Not Required	19.50	Not Required	19.50	Not Required	22.50	Not Required
		6	2437		22.00			22.00			22.00		22.00		25.00	
		11	2462		19.00			19.00			19.00		19.00		22.00	
	802.11n-HT20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11n-HT40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	
	802.11ac-VHT20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11ac-VHT40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	
	802.11ax-HE20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11ax-HE40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	

**<5.2GHz WLAN_CTL>**

	Mode	Channel	Frequency (MHz)	Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		40	5200		19.50			19.50			19.50		19.50		22.50	
		44	5220		19.50			19.50			19.50		19.50		22.50	
		48	5240		18.00			18.00			18.00		18.00		21.00	
	802.11n-HT20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
		48	5240		19.50			19.50			19.50		19.50		22.50	
	802.11n-HT40 MCS0	38	5190		17.50			17.50			17.50		17.50		20.50	
		46	5230		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT40 MCS0	48	5240		19.50			19.50			19.50		19.50		22.50	
		38	5190		17.50			17.50			17.50		17.50		20.50	
	802.11ac-VHT80 MCS0	46	5230		20.00			20.00			20.00		20.00		23.00	
		42	5210		17.00			17.00			17.00		17.00		20.00	
	802.11ax-HE20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
		48	5240		19.50			19.50			19.50		19.50		22.50	
	802.11ax-HE40 MCS0	38	5190		17.50			17.50			17.50		17.50		20.50	
		46	5230		20.00			20.00			20.00		20.00		23.00	
	802.11ax-HE80 MCS0	42	5210		17.00			17.00			17.00		17.00		20.00	



<5.3GHz WLAN_CTL>

	Mode	Channel	Frequency (MHz)	Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		56	5280		19.00			19.00			19.00		19.00		22.00	
		60	5300		19.00			19.00			19.00		19.00		22.00	
		64	5320		19.00			19.00			19.00		19.00		22.00	
	802.11n-HT20 MCS0	52	5260		19.00			19.00		Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		56	5280		19.00			19.00			19.00		19.00		22.00	
		60	5300		19.00			19.00			19.00		19.00		22.00	
		64	5320		19.00			19.00			19.00		19.00		22.00	
	802.11n-HT40 MCS0	54	5270		20.00			20.00			19.70	20.00	19.40	20.00	22.56	23.00
		62	5310		16.00			16.00			15.60	16.00	15.30	16.00	18.46	19.00
	802.11ac-VHT20 MCS0	52	5260		19.00			19.00		Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		56	5280		19.00			19.00			19.00		19.00		22.00	
		60	5300		19.00			19.00			19.00		19.00		22.00	
		64	5320		19.00			19.00			19.00		19.00		22.00	
	802.11ac-VHT40 MCS0	54	5270		20.00			20.00			20.00		20.00		23.00	
		62	5310		16.00			16.00			16.00		16.00		19.00	
	802.11ac-VHT80 MCS0	58	5290		15.00			15.00			15.00		15.00		18.00	
		50	5250		14.00			14.00			14.00		14.00		17.00	
	802.11ax-HE20 MCS0	52	5260		19.00			19.00			19.00		19.00		22.00	
		56	5280		19.00			19.00			19.00		19.00		22.00	
		60	5300		19.00			19.00			19.00		19.00		22.00	
		64	5320		19.00			19.00			19.00		19.00		22.00	
	802.11ax-HE40 MCS0	54	5270		20.00			20.00			20.00		20.00		23.00	
		62	5310		16.00			16.00			16.00		16.00		19.00	
	802.11ax-HE80 MCS0	58	5290		15.00			15.00			15.00		15.00		18.00	
		50	5250		14.00			14.00			14.00		14.00		17.00	



<5.5GHz WLAN_CTL>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
5.5GHz WLAN	802.11a 6Mbps	100	5500	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	19.00	Not Required	19.00	Not Required	22.00	Not Required			
		116	5580		19.00			19.00			19.00	22.00								
		124	5620		19.00			19.00			19.00	22.00								
		132	5660		19.00			19.00			19.00	22.00								
		144	5720		19.50			19.50			19.50	22.50								
	802.11n-HT20 MCS0	100	5500		20.00			20.00			20.00	20.00		23.00						
		116	5580		20.00			20.00			20.00	20.00		23.00						
		124	5620		20.00			20.00			20.00	20.00		23.00						
		132	5660		18.00			18.00			18.00	18.00		21.00						
		144	5720		20.00			20.00			20.00	20.00		23.00						
	802.11n-HT40 MCS0	102	5510		18.50			18.50			18.50	18.50		21.50						
		110	5550		20.50			20.50			20.50	20.50		23.50						
		126	5630		20.50			20.50			20.50	20.50		23.50						
		134	5670		19.50			19.50			19.50	19.50		22.50						
		142	5710		20.50			20.50			20.50	20.50		23.50						
	802.11ac-VHT20 MCS0	100	5500		20.00			20.00			20.00	20.00		23.00						
		116	5580		20.00			20.00			20.00	20.00		23.00						
		124	5620		20.00			20.00			20.00	20.00		23.00						
		132	5660		18.00			18.00			18.00	18.00		21.00						
		144	5720		20.00			20.00			20.00	20.00		23.00						
	802.11ac-VHT40 MCS0	102	5510		18.50			18.50			18.50	18.50		21.50						
		110	5550		20.50			20.50			20.50	20.50		23.50						
		126	5630		20.50			20.50			20.50	20.50		23.50						
		134	5670		19.50			19.50			19.50	19.50		22.50						
		142	5710		20.50			20.50			20.50	20.50		23.50						
	802.11ac-VHT80 MCS0	106	5530		17.50			17.50			17.20	17.50		16.70		17.50		19.97	20.50	86.26
		122	5610		20.50			20.50			20.10	20.50		19.70		20.50		22.91	23.50	
		138	5690		20.50			20.50			20.10	20.50		20.10		20.50		23.11	23.50	
	802.11ac-VHT160 MCS0	114	5570		17.00			17.00			Not Required	17.00		Not Required		17.00		Not Required	20.00	Not Required
	802.11ax-HE20 MCS0	100	5500		20.00			20.00				20.00				20.00			23.00	
		116	5580		20.00			20.00				20.00				20.00			23.00	
		124	5620		20.00			20.00				20.00				20.00			23.00	
		132	5660		18.00			18.00				18.00				18.00			21.00	
		144	5720		20.00			20.00				20.00				20.00			23.00	
	802.11ax-HE40 MCS0	102	5510		18.50			18.50				18.50				18.50			21.50	
		110	5550		20.50			20.50				20.50				20.50			23.50	
		126	5630		20.50			20.50				20.50				20.50			23.50	
		134	5670		19.50			19.50				19.50				19.50			22.50	
		142	5710		20.50			20.50				20.50				20.50			23.50	
	802.11ax-HE80 MCS0	106	5530		17.50			17.50				17.50				17.50			20.50	
		122	5610		20.50			20.50				20.50				20.50			23.50	
		138	5690		20.50			20.50				20.50				20.50			23.50	
	802.11ax-HE160 MCS0	114	5570		17.00			17.00				17.00				17.00			20.00	



<5.8GHz WLAN_CTL>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	20.00	Not Required	Not Required	20.00	Not Required	Not Required	20.00	Not Required	20.00	Not Required	23.00	Not Required
		157	5785		20.00			20.00			20.00		20.00		23.00	
		165	5825		20.00			20.00			20.00		20.00		23.00	
	802.11n-HT20 MCS0	149	5745		20.00			20.00			20.00		20.00		23.00	
		157	5785		20.00			20.00			20.00		20.00		23.00	
		165	5825		20.00			20.00			20.00		20.00		23.00	
	802.11n-HT40 MCS0	151	5755		20.00			20.00			20.00		20.00		23.00	
		159	5795		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT20 MCS0	149	5745		20.00			20.00			20.00		20.00		23.00	
		157	5785		20.00			20.00			20.00		20.00		23.00	
		165	5825		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT40 MCS0	151	5755		20.00			20.00			20.00		20.00		23.00	
		159	5795		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT80 MCS0	155	5775		20.00			20.00		19.30	20.00	19.20	20.00	22.26	23.00	86.26
	802.11ax-HE20 MCS0	149	5745		20.00			20.00		Not Required	20.00	Not Required	20.00	Not Required	23.00	Not Required
		157	5785		20.00			20.00			20.00		20.00		23.00	
		165	5825		20.00			20.00			20.00		20.00		23.00	
	802.11ax-HE40 MCS0	151	5755		20.00			20.00			20.00		20.00		23.00	
		159	5795		20.00			20.00			20.00		20.00		23.00	
	802.11ax-HE80 MCS0	155	5775		20.00			20.00			20.00		20.00		23.00	

<WiFi 6E_CTL>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
WiFi 6E	802.11a 6Mbps	1	5955	Not Required	17.00	Not Required	Not Required	17.00	Not Required	Not Required	17.00	Not Required	17.00	Not Required	20.00	Not Required
		57	6235		17.00			17.00			17.00		17.00		20.00	
		113	6515		0.50			0.50			0.50		0.50		3.50	
		173	6815		16.00			16.00			16.00		16.00		19.00	
		233	7115		1.00			1.00			1.00		1.00		4.00	
	802.11ax-HE20 MCS0	1	5955		17.00			17.00			17.00		17.00		20.00	
		57	6235		17.00			17.00			17.00		17.00		20.00	
		113	6515		4.00			4.00			4.00		4.00		7.00	
		173	6815		16.00			16.00			16.00		16.00		19.00	
		233	7115		4.50			4.50			4.50		4.50		7.50	
	802.11ax-HE40 MCS0	3	5965		17.00			17.00			17.00		17.00		20.00	
		59	6245		17.00			17.00			17.00		17.00		20.00	
		107	6485		6.00			6.00			6.00		6.00		9.00	
		171	6805		16.00			16.00			16.00		16.00		19.00	
		227	7085		7.00			7.00			7.00		7.00		10.00	
	802.11ax-HE80 MCS0	7	5985		17.00			17.00			17.00		17.00		20.00	
		71	6305		17.00			17.00			17.00		17.00		20.00	
		119	6545		8.50			8.50			8.50		8.50		11.50	
		167	6785		16.00			16.00			16.00		16.00		19.00	
		215	7025		9.00			9.00			9.00		9.00		12.00	
	802.11ax-HE160 MCS0	15	6025		17.00			17.00		16.10	17.00	16.10	17.00	19.11	20.00	85.76
		47	6185		17.00			17.00		16.40	17.00	16.40	17.00	19.41	20.00	
		111	6505		11.00			11.00		10.70	11.00	10.60	11.00	13.66	14.00	
		143	6665		16.00			16.00		16.00	16.00	15.40	16.00	18.72	19.00	
		207	6985		12.00			12.00		11.90	12.00	11.40	12.00	14.67	15.00	



<2.4GHz WLAN_DSI 0>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.70	21.00	98.57	20.60	21.00	98.57	20.00	21.00	20.10	21.00	23.06	24.00	97.76
		6	2437	20.70	21.00		20.70	21.00		20.60	21.00	20.60	21.00	23.61	24.00	
		11	2462	18.70	19.00		18.50	19.00		18.80	19.00	19.00	19.00	21.91	22.00	
	802.11g 6Mbps	1	2412	Not Required	19.50	Not Required	Not Required	19.50	Not Required	Not Required	19.50	Not Required	19.50	Not Required	22.50	Not Required
		6	2437		22.00			22.00			22.00		22.00		25.00	
		11	2462		19.00			19.00			19.00		19.00		22.00	
	802.11n-HT20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11n-HT40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	
	802.11ac-VHT20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11ac-VHT40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	
	802.11ax-HE20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11ax-HE40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	



<5.2GHz WLAN_DSI 0>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		40	5200		19.50			19.50			19.50		19.50		22.50	
		44	5220		19.50			19.50			19.50		19.50		22.50	
		48	5240		18.00			18.00			18.00		18.00		21.00	
	802.11n-HT20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
		48	5240		19.50			19.50			19.50		19.50		22.50	
	802.11n-HT40 MCS0	38	5190		17.50			17.50			17.50		17.50		20.50	
		46	5230		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT40 MCS0	48	5240		19.50			19.50			19.50		19.50		22.50	
		38	5190		17.50			17.50			17.50		17.50		20.50	
	802.11ac-VHT80 MCS0	46	5230		20.00			20.00			20.00		20.00		23.00	
		42	5210		17.00			17.00			17.00		17.00		20.00	
	802.11ax-HE20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
		48	5240		19.50			19.50			19.50		19.50		22.50	
	802.11ax-HE40 MCS0	38	5190		17.50			17.50			17.50		17.50		20.50	
		46	5230		20.00			20.00			20.00		20.00		23.00	
	802.11ax-HE80 MCS0	42	5210		17.00			17.00			17.00		17.00		20.00	



<5.3GHz WLAN_DSI 0>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		56	5280		19.00			19.00			19.00		22.00			
		60	5300		19.00			19.00			19.00		22.00			
		64	5320		19.50			19.50			19.50		22.50			
	802.11n-HT20 MCS0	52	5260		19.00			19.00		Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		56	5280		19.00			19.00			19.00		22.00			
		60	5300		19.00			19.00			19.00		22.00			
		64	5320		19.00			19.00			19.00		22.00			
	802.11n-HT40 MCS0	54	5270		20.00			20.00		19.70	20.00	19.40	20.00	22.56	23.00	85.92
		62	5310		16.00			16.00		15.60	16.00	15.30	16.00	18.46	19.00	
	802.11ac-VHT20 MCS0	52	5260		19.00			19.00		Not Required	Not Required	19.00	Not Required	Not Required	22.00	Not Required
		56	5280		19.00			19.00				19.00			22.00	
		60	5300		19.00			19.00				19.00			22.00	
		64	5320		19.00			19.00				19.00			22.00	
	802.11ac-VHT40 MCS0	54	5270		20.00			20.00			20.00	23.00				
		62	5310		16.00			16.00			16.00	19.00				
	802.11ac-VHT80 MCS0	58	5290		15.00			15.00			15.00	18.00				
	802.11ac-VHT160 MCS0	50	5250		14			14			Not Required	Not Required	Not Required	Not Required	17.00	Not Required
		802.11ax-HE20 MCS0	52		5260			19.00							19.00	
	56		5280		19.00			19.00							22.00	
	60		5300		19.00			19.00							22.00	
	64		5320		19.00			19.00							22.00	
	802.11ax-HE40 MCS0	54	5270		20.00			20.00						23.00		
		62	5310		16.00			16.00						19.00		
	802.11ax-HE80 MCS0	58	5290		15.00			15.00						18.00		
	802.11ax-HE160 MCS0	50	5250		14			14						17.00		



<5.5GHz WLAN_DSI 0>

	Mode	Channel	Frequency (MHz)	Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		116	5580		19.00			19.00			19.00		19.00		22.00	
		124	5620		19.00			19.00			19.00		19.00		22.00	
		132	5660		19.00			19.00			19.00		19.00		22.00	
		144	5720		19.50			19.50			19.50		19.50		22.50	
	802.11n-HT20 MCS0	100	5500		20.00			20.00			20.00		20.00		23.00	
		116	5580		20.00			20.00			20.00		20.00		23.00	
		124	5620		20.00			20.00			20.00		20.00		23.00	
		132	5660		18.00			18.00			18.00		18.00		21.00	
		144	5720		20.00			20.00			20.00		20.00		23.00	
	802.11n-HT40 MCS0	102	5510		18.50			18.50			18.50		18.50		21.50	
		110	5550		21.00			21.00			21.00		21.00		24.00	
		126	5630		21.00			21.00		Not Required	21.00	Not Required	21.00	Not Required	24.00	Not Required
		134	5670		19.50			19.50			19.50		19.50		22.50	
		142	5710		21.00			21.00			21.00		21.00		24.00	
	802.11ac-VHT20 MCS0	100	5500		20.00			20.00			20.00		20.00		23.00	
		116	5580		20.00			20.00			20.00		20.00		23.00	
		124	5620		20.00			20.00			20.00		20.00		23.00	
		132	5660		18.00			18.00			18.00		18.00		21.00	
		144	5720		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT40 MCS0	102	5510		18.50			18.50			18.50		18.50		21.50	
		110	5550		21.00			21.00			21.00		21.00		24.00	
		126	5630		21.00			21.00			21.00		21.00		24.00	
		134	5670		19.50			19.50			19.50		19.50		22.50	
		142	5710		21.00			21.00			21.00		21.00		24.00	
	802.11ac-VHT80 MCS0	106	5530		17.50			17.50			17.20	17.50	16.70	17.50	19.97	20.50
		122	5610		21.00			21.00			20.60	21.00	20.20	21.00	23.41	24.00
		138	5690		21.00			21.00			20.60	21.00	20.60	21.00	23.61	24.00
	802.11ac-VHT160 MCS0	114	5570		17.00			17.00			Not Required	17.00	Not Required	17.00	Not Required	20.00
	802.11ax-HE20 MCS0	100	5500		20.00			20.00				20.00		20.00		23.00
		116	5580		20.00			20.00				20.00		20.00		23.00
		124	5620		20.00			20.00				20.00		20.00		23.00
		132	5660		18.00			18.00				18.00		18.00		21.00
		144	5720		20.00			20.00				20.00		20.00		23.00
	802.11ax-HE40 MCS0	102	5510		18.50			18.50				18.50		18.50		21.50
		110	5550		21.00			21.00				21.00		21.00		24.00
		126	5630		21.00			21.00				21.00		21.00		24.00
		134	5670		19.50			19.50				19.50		19.50		22.50
		142	5710		21.00			21.00				21.00		21.00		24.00
	802.11ax-HE80 MCS0	106	5530		17.50			17.50				17.50		17.50		20.50
		122	5610		21.00			21.00				21.00		21.00		24.00
		138	5690		21.00			21.00				21.00		21.00		24.00
	802.11ax-HE160 MCS0	114	5570		17.00			17.00				17.00		17.00		20.00



<5.8GHz WLAN_DSI 0>

	Mode	Channel	Frequency (MHz)	Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	21.50	Not Required	Not Required	21.50	Not Required	Not Required	21.50	Not Required	21.50	Not Required	24.50	Not Required
		157	5785		21.50			21.50			21.50		21.50		24.50	
		165	5825		21.50			21.50			21.50		21.50		24.50	
	802.11n-HT20 MCS0	149	5745		21.50			21.50			21.50		21.50		24.50	
		157	5785		21.50			21.50			21.50		21.50		24.50	
		165	5825		21.50			21.50			21.50		21.50		24.50	
	802.11n-HT40 MCS0	151	5755		21.50			21.50		20.90	21.50	20.50	21.50	23.71	24.50	85.97
		159	5795		21.50			21.50		21.00	21.50	21.00	21.50	24.01	24.50	
	802.11ac-VHT20 MCS0	149	5745		21.50			21.50		Not Required	21.50	Not Required	21.50	Not Required	24.50	Not Required
		157	5785		21.50			21.50			21.50		21.50		24.50	
		165	5825		21.50			21.50			21.50		21.50		24.50	
	802.11ac-VHT40 MCS0	151	5755		21.50			21.50			21.50		21.50		24.50	
		159	5795		21.50			21.50			21.50		21.50		24.50	
	802.11ac-VHT80 MCS0	155	5775		21.50			21.50		20.10	21.50	21.10	21.50	23.06	24.50	86.26
	802.11ax-HE20 MCS0	149	5745		21.50			21.50		Not Required	21.50	Not Required	21.50	Not Required	24.50	Not Required
		157	5785		21.50			21.50			21.50		21.50		24.50	
		165	5825		21.50			21.50			21.50		21.50		24.50	
	802.11ax-HE40 MCS0	151	5755		21.50			21.50			21.50		21.50		24.50	
		159	5795		21.50			21.50			21.50		21.50		24.50	
	802.11ax-HE80 MCS0	155	5775		21.50			21.50			21.50		21.50		24.50	

<WiFi 6E_DSI 0>

	Mode	Channel	Frequency (MHz)	Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
WiFi 6E	802.11a 6Mbps	1	5955	Not Required	18.50	Not Required	Not Required	18.50	Not Required	Not Required	18.50	Not Required	18.50	Not Required	21.50	Not Required
		57	6235		18.50			18.50			18.50		18.50		21.50	
		113	6515		0.50			0.50			0.50		0.50		3.50	
		173	6815		17.50			17.50			17.50		17.50		20.50	
		233	7115		1.00			1.00			1.00		1.00		4.00	
	802.11ax-HE20 MCS0	1	5955		18.50			18.50			18.50		18.50		21.50	
		57	6235		18.50			18.50			18.50		18.50		21.50	
		113	6515		4.00			4.00			4.00		4.00		7.00	
		173	6815		17.50			17.50			17.50		17.50		20.50	
		233	7115		4.50			4.50			4.50		4.50		7.50	
	802.11ax-HE40 MCS0	3	5965		18.50			18.50			18.50		18.50		21.50	
		59	6245		18.50			18.50			18.50		18.50		21.50	
		107	6485		6.00			6.00			6.00		6.00		9.00	
		171	6805		17.50			17.50			17.50		17.50		20.50	
		227	7085		7.00			7.00			7.00		7.00		10.00	
	802.11ax-HE80 MCS0	7	5985		18.50			18.50			18.50		18.50		21.50	
		71	6305		18.50			18.50			18.50		18.50		21.50	
		119	6545		8.50			8.50			8.50		8.50		11.50	
		167	6785		17.50			17.50			17.50		17.50		20.50	
		215	7025		9.00			9.00			9.00		9.00		12.00	
	802.11ax-HE160 MCS0	15	6025		18.50			18.50		18.10	18.50	18.20	18.50	21.16	21.50	85.76
		47	6185		18.50			18.50		18.20	18.50	18.30	18.50	21.26	21.50	
		111	6505		11.00			11.00		10.70	11.00	10.60	11.00	13.66	14.00	
		143	6665		17.50			17.50		17.20	17.50	16.80	17.50	20.01	20.50	
		207	6985		12.00			12.00		11.90	12.00	11.40	12.00	14.67	15.00	



<2.4GHz WLAN_DSI 1>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.70	21.00	98.57	20.60	21.00	98.57	20.00	21.00	20.10	21.00	23.06	24.00	97.76
		6	2437	20.70	21.00		20.70	21.00		20.60	21.00	20.60	21.00	23.61	24.00	
		11	2462	18.70	19.00		18.50	19.00		18.80	19.00	19.00	19.00	21.91	22.00	
	802.11g 6Mbps	1	2412	Not Required	19.50	Not Required	Not Required	19.50	Not Required	Not Required	19.50	Not Required	19.50	Not Required	22.50	Not Required
		6	2437		22.00			22.00			22.00		22.00		25.00	
		11	2462		19.00			19.00			19.00		19.00		22.00	
	802.11n-HT20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11n-HT40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	
	802.11ac-VHT20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11ac-VHT40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	
	802.11ax-HE20 MCS0	1	2412		19.00			19.00			19.00		19.00		22.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		11	2462		18.00			18.00			18.00		18.00		21.00	
	802.11ax-HE40 MCS0	3	2422		15.00			15.00			15.00		15.00		18.00	
		6	2437		21.00			21.00			21.00		21.00		24.00	
		9	2452		16.00			16.00			16.00		16.00		19.00	



<2.4GHz WLAN_DSI 2>

	Mode	Channel	Frequency (MHz)	Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.70	21.00	98.57	20.60	21.00	98.57	20.00	21.00	20.10	21.00	23.06	24.00	97.76
		6	2437	20.70	21.00		20.70	21.00		20.60	21.00	20.60	21.00	23.61	24.00	
		11	2462	18.70	19.00		18.50	19.00		18.80	19.00	19.00	19.00	21.91	22.00	
	802.11g 6Mbps	1	2412	Not Required	19.50	Not Required	19.50	Not Required	Not Required	Not Required	19.50	Not Required	19.50	Not Required	22.50	Not Required
		6	2437		22.00		22.00				22.00		22.00		25.00	
		11	2462		19.00		19.00				19.00		19.00		22.00	
	802.11n-HT20 MCS0	1	2412		19.00		19.00				19.00		19.00		22.00	
		6	2437		21.00		21.00				21.00		21.00		24.00	
		11	2462		18.00		18.00				18.00		18.00		21.00	
	802.11n-HT40 MCS0	3	2422		15.00		15.00				15.00		15.00		18.00	
		6	2437		21.00		21.00				21.00		21.00		24.00	
		9	2452		16.00		16.00				16.00		16.00		19.00	
	802.11ac-VHT20 MCS0	1	2412		19.00		19.00				19.00		19.00		22.00	
		6	2437		21.00		21.00				21.00		21.00		24.00	
		11	2462		18.00		18.00				18.00		18.00		21.00	
	802.11ac-VHT40 MCS0	3	2422		15.00		15.00				15.00		15.00		18.00	
		6	2437		21.00		21.00				21.00		21.00		24.00	
		9	2452		16.00		16.00				16.00		16.00		19.00	
	802.11ax-HE20 MCS0	1	2412		19.00		19.00				19.00		19.00		22.00	
		6	2437		21.00		21.00				21.00		21.00		24.00	
		11	2462		18.00		18.00				18.00		18.00		21.00	
	802.11ax-HE40 MCS0	3	2422		15.00		15.00				15.00		15.00		18.00	
		6	2437		21.00		21.00				21.00		21.00		24.00	
		9	2452		16.00		16.00				16.00		16.00		19.00	

**<5.2GHz WLAN_DSI 2>**

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		40	5200		19.50			19.50			19.50		19.50		22.50	
		44	5220		19.50			19.50			19.50		19.50		22.50	
		48	5240		18.00			18.00			18.00		18.00		21.00	
	802.11n-HT20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
		48	5240		19.50			19.50			19.50		19.50		22.50	
	802.11n-HT40 MCS0	38	5190		17.50			17.50			17.50		17.50		20.50	
		46	5230		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT40 MCS0	48	5240		19.50			19.50			19.50		19.50		22.50	
		38	5190		17.50			17.50			17.50		17.50		20.50	
		46	5230		20.00			20.00			20.00		20.00		23.00	
	802.11ac-VHT80 MCS0	42	5210		17.00			17.00			17.00		17.00		20.00	
	802.11ax-HE20 MCS0	36	5180		18.00			18.00			18.00		18.00		21.00	
		40	5200		20.00			20.00			20.00		20.00		23.00	
		44	5220		20.00			20.00			20.00		20.00		23.00	
		48	5240		19.50			19.50			19.50		19.50		22.50	
	802.11ax-HE40 MCS0	38	5190		17.50			17.50			17.50		17.50		20.50	
		46	5230		20.00			20.00			20.00		20.00		23.00	
	802.11ax-HE80 MCS0	42	5210		17.00			17.00			17.00		17.00		20.00	

**<5.3GHz WLAN_DSI 2>**

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	19.00	Not Required	Not Required	19.00	Not Required	18.40	19.00	17.70	19.00	21.07	22.00	86.14
		56	5280		19.00			19.00		18.20	19.00	18.20	19.00	21.21	22.00	
		60	5300		19.00			19.00		18.50	19.00	18.10	19.00	21.31	22.00	
		64	5320		19.00			19.00		18.60	19.00	18.10	19.00	21.37	22.00	
	802.11n-HT20 MCS0	52	5260		19.00			19.00		Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		56	5280		19.00			19.00			19.00		19.00		22.00	
		60	5300		19.00			19.00			19.00		19.00		22.00	
		64	5320		19.00			19.00			19.00		19.00		22.00	
	802.11n-HT40 MCS0	54	5270		20.00			20.00		19.70	20.00	19.40	20.00	22.56	23.00	85.92
		62	5310		16.00			16.00		15.60	16.00	15.30	16.00	18.46	19.00	
	802.11ac-VHT20 MCS0	52	5260		19.00			19.00	Not Required	Not Required	Not Required	Not Required	19.00	Not Required	22.00	Not Required
		56	5280		19.00			19.00					19.00		22.00	
		60	5300		19.00			19.00					19.00		22.00	
		64	5320		19.00			19.00					19.00		22.00	
	802.11ac-VHT40 MCS0	54	5270		20.00			20.00					20.00	Not Required	23.00	
		62	5310		16.00			16.00					16.00		19.00	
	802.11ac-VHT80 MCS0	58	5290		15.00			15.00					15.00	Not Required	18.00	
	802.11ac-VHT160 MCS0	50	5250		14			14					14.00		17.00	
	802.11ax-HE20 MCS0	52	5260		19.00			19.00			Not Required	Not Required	19.00		22.00	
		56	5280		19.00			19.00					19.00		22.00	
		60	5300		19.00			19.00					19.00		22.00	
		64	5320		19.00			19.00					19.00		22.00	
	802.11ax-HE40 MCS0	54	5270		20.00			20.00					20.00	Not Required	23.00	
		62	5310		16.00			16.00					16.00		19.00	
	802.11ax-HE80 MCS0	58	5290		15.00			15.00					15.00	Not Required	18.00	
	802.11ax-HE160 MCS0	50	5250		14			14					14.00		17.00	



<5.5GHz WLAN_DSI 2>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7			
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.5GHz WLAN	802.11a 6Mbps	100	5500	Not Required	18.00	Not Required	Not Required	18.00	Not Required	Not Required	18.00	Not Required	18.00	Not Required	21.00	Not Required	
		116	5580		18.00			18.00			18.00		18.00		21.00		
		124	5620		18.00			18.00			18.00		18.00		21.00		
		132	5660		18.00			18.00			18.00		18.00		21.00		
		144	5720		18.00			18.00			18.00		18.00		21.00		
	802.11n-HT20 MCS0	100	5500		18.00			18.00			18.00		18.00		21.00		
		116	5580		18.00			18.00			18.00		18.00		21.00		
		124	5620		18.00			18.00			18.00		18.00		21.00		
		132	5660		18.00			18.00			18.00		18.00		21.00		
		144	5720		18.00			18.00			18.00		18.00		21.00		
	802.11n-HT40 MCS0	102	5510		18.00			18.00			18.00		18.00		21.00		
		110	5550		18.00			18.00			18.00		18.00		21.00		
		126	5630		18.00			18.00			18.00		18.00		21.00		
		134	5670		18.00			18.00			18.00		18.00		21.00		
		142	5710		18.00			18.00			18.00		18.00		21.00		
	802.11ac-VHT20 MCS0	100	5500		18.00			18.00			18.00		18.00		21.00		
		116	5580		18.00			18.00			18.00		18.00		21.00		
		124	5620		18.00			18.00			18.00		18.00		21.00		
		132	5660		18.00			18.00			18.00		18.00		21.00		
		144	5720		18.00			18.00			18.00		18.00		21.00		
	802.11ac-VHT40 MCS0	102	5510		18.00			18.00			18.00		18.00		21.00		
		110	5550		18.00			18.00			18.00		18.00		21.00		
		126	5630		18.00			18.00			18.00		18.00		21.00		
		134	5670		18.00			18.00			18.00		18.00		21.00		
		142	5710		18.00			18.00			18.00		18.00		21.00		
	802.11ac-VHT80 MCS0	106	5530		17.50			17.50			17.20	17.50	16.70	17.50	19.97	20.50	86.26
		122	5610		18.00			18.00			17.10	18.00	16.70	18.00	19.91	21.00	
		138	5690		18.00			18.00			17.10	18.00	17.10	18.00	20.11	21.00	
	802.11ac-VHT160 MCS0	114	5570		17.00			17.00			16.70	17.00	16.40	17.00	19.56	20.00	85.29
	802.11ax-HE20 MCS0	100	5500		18.00			18.00		Not Required	18.00	Not Required	18.00	Not Required	21.00	Not Required	
		116	5580		18.00			18.00			18.00		18.00		21.00		
		124	5620		18.00			18.00			18.00		18.00		21.00		
		132	5660		18.00			18.00			18.00		18.00		21.00		
		144	5720		18.00			18.00			18.00		18.00		21.00		
	802.11ax-HE40 MCS0	102	5510		18.00			18.00			18.00		18.00		21.00		
		110	5550		18.00			18.00			18.00		18.00		21.00		
		126	5630		18.00			18.00			18.00		18.00		21.00		
		134	5670		18.00			18.00			18.00		18.00		21.00		
		142	5710		18.00			18.00			18.00		18.00		21.00		
	802.11ax-HE80 MCS0	106	5530		17.50			17.50			17.50		17.50		20.50		
		122	5610		18.00			18.00			18.00		18.00		21.00		
		138	5690		18.00			18.00			18.00		18.00		21.00		
	802.11ax-HE160 MCS0	114	5570		17.00			17.00			17.00		17.00		20.00		

**<5.8GHz WLAN_DSI 2>**

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	19.50	Not Required	Not Required	19.50	Not Required	Not Required	19.50	Not Required	19.50	Not Required	22.50	Not Required
		157	5785		19.50			19.50			19.50		19.50		22.50	
		165	5825		19.50			19.50			19.50		19.50		22.50	
	802.11n-HT20 MCS0	149	5745		19.50			19.50			19.50		19.50		22.50	
		157	5785		19.50			19.50			19.50		19.50		22.50	
		165	5825		19.50			19.50			19.50		19.50		22.50	
	802.11n-HT40 MCS0	151	5755		19.50			19.50		19.30	19.50	18.90	19.50	22.11	22.50	85.97
		159	5795		19.50			19.50		19.30	19.50	19.30	19.50	22.31	22.50	
	802.11ac-VHT20 MCS0	149	5745		19.50			19.50		Not Required	19.50	Not Required	19.50	Not Required	22.50	Not Required
		157	5785		19.50			19.50			19.50		19.50		22.50	
		165	5825		19.50			19.50			19.50		19.50		22.50	
	802.11ac-VHT40 MCS0	151	5755		19.50			19.50			19.50		19.50		22.50	
		159	5795		19.50			19.50			19.50		19.50		22.50	
	802.11ac-VHT80 MCS0	155	5775		19.50			19.50		19.30	19.50	19.20	19.50	22.26	22.50	86.26
	802.11ax-HE20 MCS0	149	5745		19.50			19.50		Not Required	19.50	Not Required	19.50	Not Required	22.50	Not Required
		157	5785		19.50			19.50			19.50		19.50		22.50	
		165	5825		19.50			19.50			19.50		19.50		22.50	
	802.11ax-HE40 MCS0	151	5755		19.50			19.50			19.50		19.50		22.50	
		159	5795		19.50			19.50			19.50		19.50		22.50	
	802.11ax-HE80 MCS0	155	5775		19.50			19.50			19.50		19.50		22.50	

<WiFi 6E_DSI 2>

				Ant 6			Ant 7			Ant 6+7 (6)		Ant 6+7 (7)		Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
WiFi 6E	802.11a 6Mbps	1	5955	Not Required	10.50	Not Required	Not Required	10.50	Not Required	Not Required	10.50	Not Required	10.50	Not Required	13.50	Not Required
		57	6235		10.50			10.50			10.50		10.50		13.50	
		113	6515		0.50			0.50			0.50		0.50		3.50	
		173	6815		10.00			10.00			10.00		10.00		13.00	
		233	7115		1.00			1.00			1.00		1.00		4.00	
	802.11ax-HE20 MCS0	1	5955		10.50			10.50			10.50		10.50		13.50	
		57	6235		10.50			10.50			10.50		10.50		13.50	
		113	6515		4.00			4.00			4.00		4.00		7.00	
		173	6815		10.00			10.00			10.00		10.00		13.00	
		233	7115		4.50			4.50			4.50		4.50		7.50	
	802.11ax-HE40 MCS0	3	5965		10.50			10.50			10.50		10.50		13.50	
		59	6245		10.50			10.50			10.50		10.50		13.50	
		107	6485		6.00			6.00			6.00		6.00		9.00	
		171	6805		10.00			10.00			10.00		10.00		13.00	
		227	7085		7.00			7.00			7.00		7.00		10.00	
	802.11ax-HE80 MCS0	7	5985		10.50			10.50			10.50		10.50		13.50	
		71	6305		10.50			10.50			10.50		10.50		13.50	
		119	6545		8.50			8.50			8.50		8.50		11.50	
		167	6785		10.00			10.00			10.00		10.00		13.00	
		215	7025		9.00			9.00			9.00		9.00		12.00	
	802.11ax-HE160 MCS0	15	6025		10.50			10.50		9.00	10.50	9.00	10.50	12.01	13.50	85.76
		47	6185		10.50			10.50		10.10	10.50	10.20	10.50	13.16	13.50	
		111	6505		11.00			11.00		10.70	11.00	10.60	11.00	13.66	14.00	
		143	6665		10.00			10.00		9.70	10.00	9.60	10.00	12.66	13.00	
		207	6985		12.00			12.00		11.90	12.00	11.40	12.00	14.67	15.00	

<RFID>

RFID	Ant 6				Ant 7		
	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	902.75	24.07	24.50	87.28	24.11	24.50	86.92
	914.75	24.04	24.50		24.06	24.50	
	927.25	24.01	24.50		24.01	24.50	

<Bluetooth_DSI 2>



Bluetooth	Ant 6									Ant 7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	BR / EDR 1Mbps	0	2402	5.01	6.00	76.68	6.54	7.00	77.07	6.52	7.00	77.07
		39	2441	5.76	6.00		6.52	7.00				
		78	2480	5.16	6.00		6.40	7.00				
Bluetooth	BR / EDR 2Mbps	0	2402	Not Required	4.00	Not Required	Not Required	5.00	Not Required	5.00	7.00	Not Required
		39	2441		4.00			5.00				
		78	2480		4.00			5.00				
	BR / EDR 3Mbps	0	2402		4.00			5.00				
		39	2441		4.00			5.00				
		78	2480		4.00			5.00				
	LE 1Mbps	0	2402		6.00			7.00				
		19	2440		6.00			7.00				
		39	2480		6.00			7.00				
	LE 2Mbps	0	2402		6.00			7.00				
		19	2440		6.00			7.00				
		39	2480		6.00			7.00				

<Bluetooth_CTL>


Bluetooth	Ant 6									Ant 7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	BR / EDR 1Mbps	0	2402	5.01	6.00	76.68	6.54	7.00	77.07	6.52	7.00	77.07
		39	2441	5.76	6.00		6.52	7.00				
		78	2480	5.16	6.00		6.40	7.00				
Bluetooth	BR / EDR 2Mbps	0	2402	Not Required	4.00	Not Required	Not Required	5.00	Not Required	5.00	7.00	Not Required
		39	2441		4.00			5.00				
		78	2480		4.00			5.00				
	BR / EDR 3Mbps	0	2402		4.00			5.00				
		39	2441		4.00			5.00				
		78	2480		4.00			5.00				
	LE 1Mbps	0	2402		6.00			7.00				
		19	2440		6.00			7.00				
		39	2480		6.00			7.00				
	LE 2Mbps	0	2402		6.00			7.00				
		19	2440		6.00			7.00				
		39	2480		6.00			7.00				

General Note:

- For 2.4GHz Bluetooth SAR ant 6/ ant 7 testing was selected 1Mbps due to its highest average power and duty cycle is 76.68% / 77.07% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

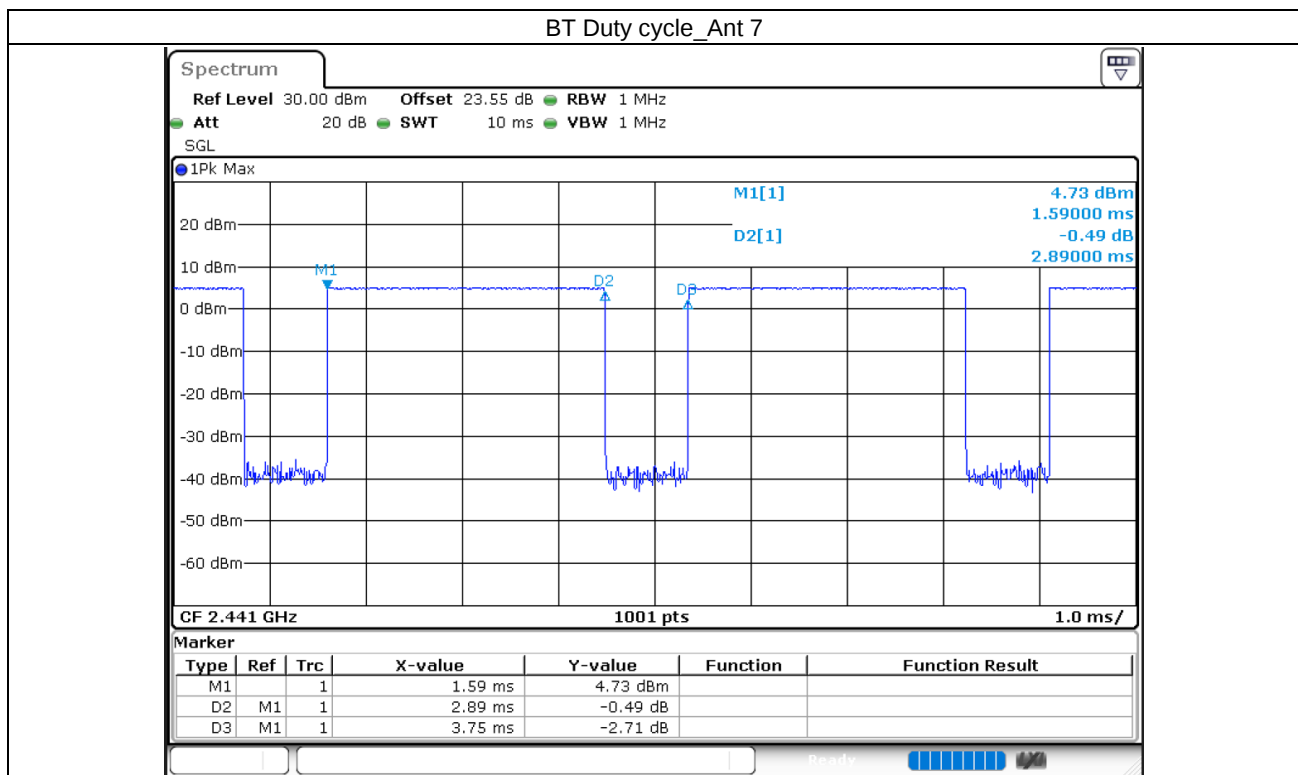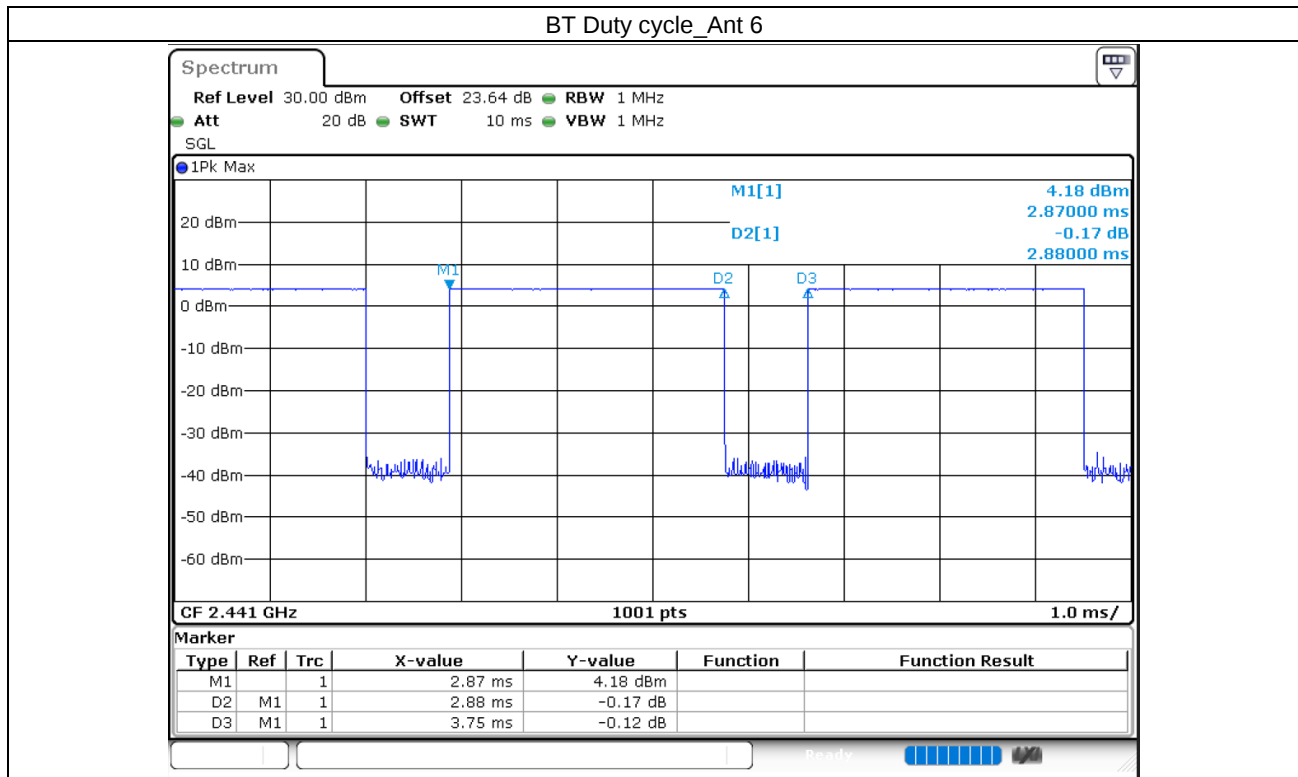

12. Antenna Location

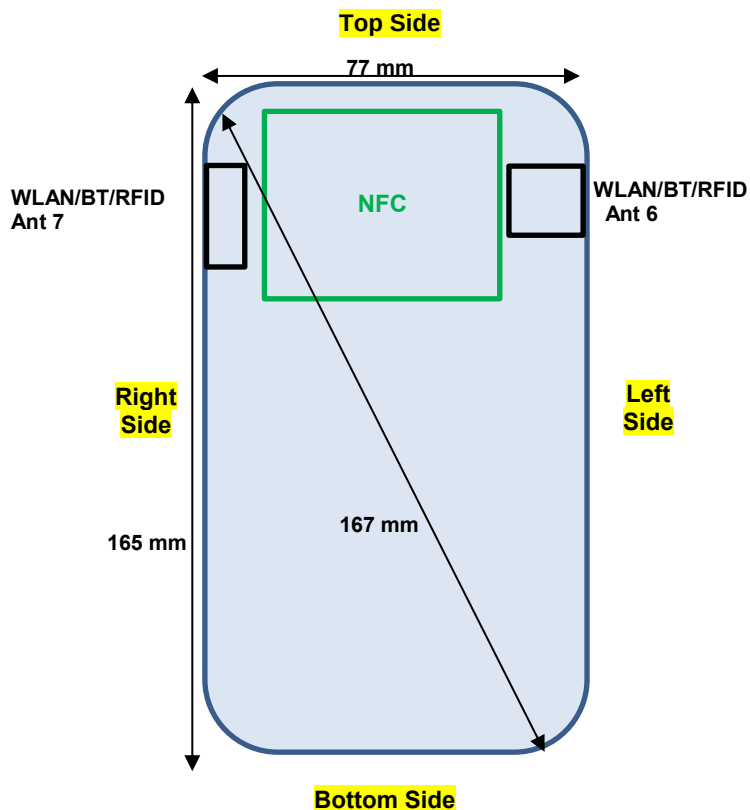

Back View

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WLAN/BT/RFID Antenna 6	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
WLAN/BT/RFID Antenna 7	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WLAN/BT/RFID Antenna 6	Yes	Yes	Yes	No	Yes	Yes
WLAN/BT/RFID Antenna 7	Yes	Yes	Yes	No	Yes	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. The 2.4GHz product specific SAR is not required, due to hotspot mode the measured SAR scaled to the maximum output power, including tolerance is less than 1.2 W/kg.
5. For 5G/6GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.
6. when the RFID is active will continue scan and only evaluation on hotspot, body-worn and product specific exposure condition for Sim-Tx analysis, when the device operate on head RFID was not perform due to the sensor if detect used on head that RFID is turn off.

WLAN Note:

1. Additional 2.4GHz SISO mode is used for Sim-Tx analysis
2. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
3. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
4. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
5. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

WLAN PD Note:

1. The WiFi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
2. First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method.
3. Per Interim Procedures. The power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor
4. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. The WiFi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report section 14.
6. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
7. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
8. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
9. The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and $\lambda/5$. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1 dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

NFC Note:

1. NFC was evaluated for extremity based on hand usage conditions.
2. NFC 13.56MHz antenna port is not available on the device to support conducted power measurement, therefore the measured results are referred to as reported SAR.
3. NFC SAR test tissue-simulating liquid parameter: refer to IEC/IEEE 62209-1528 2020.

**13.1 Head SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 6	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.05	0.291	0.316
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 6	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.19	0.238	0.259
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.04	0.478	0.520
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.13	0.308	0.335
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	DSI 0	Battery 2	6	2437	20.70	21.00	1.072	98.57	1.015	0.1	0.468	0.509
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	DSI 0	Battery 3	6	2437	20.70	21.00	1.072	98.57	1.015	0.01	0.474	0.516
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	DSI 0	Battery 4	6	2437	20.70	21.00	1.072	98.57	1.015	-0.14	0.471	0.512
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 7	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.04	0.404	0.439
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 7	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.06	0.255	0.277
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 7	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.16	0.201	0.219
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 7	DSI 0	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.01	0.147	0.160
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 7	DSI 0	Battery 2	6	2437	20.70	21.00	1.072	98.57	1.015	0.17	0.384	0.418
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 7	DSI 0	Battery 3	6	2437	20.70	21.00	1.072	98.57	1.015	0.11	0.390	0.424
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 7	DSI 0	Battery 4	6	2437	20.70	21.00	1.072	98.57	1.015	0.11	0.387	0.421
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	0.18	0.447	0.501
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 6+7(7)	DSI 0	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	0.03	0.426	0.478
01	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	-0.05	0.468	0.525
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6+7(7)	DSI 0	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	-0.04	0.319	0.358
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 2	6	2437	20.60	21.00	1.096	97.76	1.023	0.14	0.448	0.503
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 3	6	2437	20.60	21.00	1.096	97.76	1.023	0.16	0.459	0.515
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 4	6	2437	20.60	21.00	1.096	97.76	1.023	0.19	0.453	0.508
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	0.13	0.372	0.497
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 6+7(7)	DSI 0	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	0.17	0.241	0.322
02	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.16	0.588	0.786
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 6+7(7)	DSI 0	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.06	0.267	0.357
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 2	54	5270	19.40	20.00	1.148	85.92	1.164	0.02	0.561	0.750
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 3	54	5270	19.40	20.00	1.148	85.92	1.164	-0.1	0.547	0.731
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 4	54	5270	19.40	20.00	1.148	85.92	1.164	0.12	0.529	0.707
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 1	138	5690	20.60	21.00	1.096	86.26	1.159	-0.05	0.593	0.754
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6+7(7)	DSI 0	Battery 1	138	5690	20.60	21.00	1.096	86.26	1.159	-0.02	0.339	0.431
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 1	138	5690	20.60	21.00	1.096	86.26	1.159	-0.02	0.682	0.867
03	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 1	122	5610	20.20	21.00	1.202	86.26	1.159	0.02	0.762	1.062
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6+7(7)	DSI 0	Battery 1	138	5690	20.60	21.00	1.096	86.26	1.159	-0.08	0.357	0.454
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 2	122	5610	20.20	21.00	1.202	86.26	1.159	0.01	0.699	0.974
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 3	122	5610	20.20	21.00	1.202	86.26	1.159	-0.07	0.730	1.017
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6+7(7)	DSI 0	Battery 4	122	5610	20.20	21.00	1.202	86.26	1.159	-0.05	0.708	0.987
04	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6+7(6)	DSI 0	Battery 1	155	5775	20.10	21.50	1.380	86.26	1.159	-0.07	0.678	1.085
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 6+7(6)	DSI 0	Battery 1	159	5795	21.00	21.50	1.122	85.97	1.163	0.05	0.643	0.839
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 6+7(6)	DSI 0	Battery 1	155	5775	20.10	21.50	1.380	86.26	1.159	0.01	0.619	0.990
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 6+7(6)	DSI 0	Battery 1	159	5795	21.00	21.50	1.122	85.97	1.163	0.06	0.588	0.767
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 6+7(6)	DSI 0	Battery 1	155	5775	20.10	21.50	1.380	86.26	1.159	-0.15	0.595	0.952
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 6+7(6)	DSI 0	Battery 1	159	5795	21.00	21.50	1.122	85.97	1.163	-0.11	0.562	0.733
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6+7(6)	DSI 0	Battery 1	155	5775	20.10	21.50	1.380	86.26	1.159	-0.11	0.506	0.810
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 6+7(6)	DSI 0	Battery 1	159	5795	21.00	21.50	1.122	85.97	1.163	0.14	0.481	0.628
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6+7(6)	DSI 0	Battery 2	155	5775	20.10	21.50	1.380	86.26	1.159	-0.09	0.606	0.970
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6+7(6)	DSI 0	Battery 3	155	5775	20.10	21.50	1.380	86.26	1.159	-0.09	0.629	1.006
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 6+7(6)	DSI 0	Battery 4	155	5775	20.10	21.50	1.380	86.26	1.159	0.1	0.621	0.994



<Bluetooth SAR>

TEL : 886-3-327-3456
FAX : 886-3-328-4978
Template version: 240125

**13.2 Hotspot SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 6	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.1	0.253	0.275
07	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.1	0.799	0.869
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	DSI 1	Battery 1	1	2412	20.70	21.00	1.072	98.57	1.015	0.02	0.786	0.855
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	DSI 1	Battery 1	11	2462	18.70	19.00	1.072	98.57	1.015	0.11	0.500	0.544
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 6	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.03	0.053	0.058
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 6	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.18	0.478	0.520
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 6	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.14	0.248	0.270
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	DSI 1	Battery 2	6	2437	20.70	21.00	1.072	98.57	1.015	0.02	0.770	0.837
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	DSI 1	Battery 3	6	2437	20.70	21.00	1.072	98.57	1.015	-0.13	0.762	0.829
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	DSI 1	Battery 4	6	2437	20.70	21.00	1.072	98.57	1.015	0.06	0.766	0.833
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 7	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.04	0.111	0.121
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0	0.292	0.318
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 7	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.09	0.255	0.277
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 7	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0	0.052	0.057
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 7	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.07	0.096	0.104
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	DSI 1	Battery 2	6	2437	20.70	21.00	1.072	98.57	1.015	-0.03	0.281	0.306
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	DSI 1	Battery 3	6	2437	20.70	21.00	1.072	98.57	1.015	0	0.279	0.303
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 7	DSI 1	Battery 4	6	2437	20.70	21.00	1.072	98.57	1.015	-0.14	0.271	0.295

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 6	DSI 1	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	-0.1	0.001	0.001
	Bluetooth	1Mbps	Back	10mm	Ant 6	DSI 1	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	-0.18	0.001	0.001
	Bluetooth	1Mbps	Left Side	10mm	Ant 6	DSI 1	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	-0.19	0.001	0.001
	Bluetooth	1Mbps	Right Side	10mm	Ant 6	DSI 1	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	0.07	0.001	0.001
	Bluetooth	1Mbps	Top Side	10mm	Ant 6	DSI 1	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	0.12	0.001	0.001
	Bluetooth	1Mbps	Left Side	10mm	Ant 6	DSI 1	Battery 2	39	2441	5.76	6.00	1.056	76.8	1.085	-0.11	0.001	0.001
	Bluetooth	1Mbps	Left Side	10mm	Ant 6	DSI 1	Battery 3	39	2441	5.76	6.00	1.056	76.8	1.085	0.14	0.001	0.001
	Bluetooth	1Mbps	Left Side	10mm	Ant 6	DSI 1	Battery 4	39	2441	5.76	6.00	1.056	76.8	1.085	-0.19	0.001	0.001
	Bluetooth	1Mbps	Front	10mm	Ant 7	DSI 1	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	-0.08	0.001	0.001
	Bluetooth	1Mbps	Back	10mm	Ant 7	DSI 1	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	-0.11	0.001	0.001
	Bluetooth	1Mbps	Left Side	10mm	Ant 7	DSI 1	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	0.1	0.001	0.001
08	Bluetooth	1Mbps	Right Side	10mm	Ant 7	DSI 1	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	-0.08	0.002	0.002
	Bluetooth	1Mbps	Top Side	10mm	Ant 7	DSI 1	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	0.18	0.001	0.001
	Bluetooth	1Mbps	Right Side	10mm	Ant 7	DSI 1	Battery 2	0	2402	6.54	7.00	1.111	77.07	1.081	0.06	0.001	0.001
	Bluetooth	1Mbps	Right Side	10mm	Ant 7	DSI 1	Battery 3	0	2402	6.54	7.00	1.111	77.07	1.081	0.16	0.001	0.001
	Bluetooth	1Mbps	Right Side	10mm	Ant 7	DSI 1	Battery 4	0	2402	6.54	7.00	1.111	77.07	1.081	0.08	0.001	0.001

**<RFID SAR>**

Plot No.	Band	Test Position	Gap (mm)	Antenna	Battery	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Actual Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	RFID	Front	10mm	Ant 6	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0	0.327	0.124
	RFID	Back	10mm	Ant 6	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.03	0.492	0.187
	RFID	Left Side	10mm	Ant 6	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0.11	0.108	0.041
	RFID	Right Side	10mm	Ant 6	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0.07	0.419	0.159
	RFID	Top Side	10mm	Ant 6	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.05	0.359	0.136
	RFID	Back	10mm	Ant 6	Battery 2	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.13	0.490	0.186
	RFID	Back	10mm	Ant 6	Battery 3	902.75	24.07	24.50	1.104	87.28	30	0.344	0	0.487	0.185
	RFID	Back	10mm	Ant 6	Battery 4	902.75	24.07	24.50	1.104	87.28	30	0.344	0.01	0.485	0.184
	RFID	Front	10mm	Ant 7	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	-0.04	0.262	0.099
09	RFID	Back	10mm	Ant 7	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	-0.03	0.799	0.302
	RFID	Left Side	10mm	Ant 7	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.02	0.307	0.116
	RFID	Right Side	10mm	Ant 7	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.03	0.051	0.019
	RFID	Top Side	10mm	Ant 7	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.08	0.060	0.023
	RFID	Back	10mm	Ant 7	Battery 2	902.75	24.11	24.50	1.094	86.92	30	0.345	0	0.793	0.299
	RFID	Back	10mm	Ant 7	Battery 3	902.75	24.11	24.50	1.094	86.92	30	0.345	-0.13	0.790	0.298
	RFID	Back	10mm	Ant 7	Battery 4	902.75	24.11	24.50	1.094	86.92	30	0.345	0.05	0.791	0.299

**13.3 Body Worn Accessory SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 6	-	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.1	0.253	0.275
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 6	-	DSI 2	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.14	0.152	0.165
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 6	-	DSI 2	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.1	0.283	0.308
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Holster	DSI 2	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.09	0.304	0.331
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Holster	DSI 2	Battery 2	6	2437	20.70	21.00	1.072	98.57	1.015	-0.17	0.297	0.323
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Holster	DSI 2	Battery 3	6	2437	20.70	21.00	1.072	98.57	1.015	-0.12	0.295	0.321
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Holster	DSI 2	Battery 4	6	2437	20.70	21.00	1.072	98.57	1.015	0.17	0.298	0.324
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 7	-	DSI 1	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.04	0.111	0.121
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 7	-	DSI 2	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	0.08	0.002	0.002
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 7	-	DSI 2	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.07	0.182	0.198
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 7	Holster	DSI 2	Battery 1	6	2437	20.70	21.00	1.072	98.57	1.015	-0.16	0.184	0.200
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 7	Holster	DSI 2	Battery 2	6	2437	20.70	21.00	1.072	98.57	1.015	-0.16	0.178	0.194
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 7	Holster	DSI 2	Battery 3	6	2437	20.70	21.00	1.072	98.57	1.015	-0.04	0.174	0.189
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 7	Holster	DSI 2	Battery 4	6	2437	20.70	21.00	1.072	98.57	1.015	0.12	0.173	0.188
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 6+7(7)	-	DSI 1	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	0.15	0.245	0.275
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	-0.15	0.144	0.162
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	-0.02	0.342	0.384
10	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	-0.09	0.360	0.404
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 2	6	2437	20.60	21.00	1.096	97.76	1.023	0.16	0.349	0.391
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 3	6	2437	20.60	21.00	1.096	97.76	1.023	-0.06	0.352	0.395
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 4	6	2437	20.60	21.00	1.096	97.76	1.023	-0.03	0.356	0.399
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 6+7(7)	-	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.13	0.174	0.233
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	0.12	0.101	0.135
	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.04	0.346	0.462
11	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.12	0.536	0.716
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 2	54	5270	19.40	20.00	1.148	85.92	1.164	0.14	0.514	0.687
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 3	54	5270	19.40	20.00	1.148	85.92	1.164	0.16	0.498	0.666
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 4	54	5270	19.40	20.00	1.148	85.92	1.164	0.19	0.501	0.670
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 6+7(7)	-	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	-0.02	0.221	0.314
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	0.15	0.144	0.205
12	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	0.03	0.390	0.556
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	0.04	0.237	0.338
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 2	138	5690	17.10	18.00	1.230	86.26	1.159	-0.17	0.366	0.522
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 3	138	5690	17.10	18.00	1.230	86.26	1.159	0.05	0.374	0.533
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 4	138	5690	17.10	18.00	1.230	86.26	1.159	0.06	0.368	0.525
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 6+7(7)	-	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	0.06	0.286	0.355
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	-0.14	0.222	0.275
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	-0.01	0.460	0.571
13	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	-0.13	0.578	0.718
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 2	155	5775	19.20	19.50	1.072	86.26	1.159	-0.17	0.572	0.710
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 3	155	5775	19.20	19.50	1.072	86.26	1.159	0.04	0.571	0.709
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 4	155	5775	19.20	19.50	1.072	86.26	1.159	-0.15	0.570	0.708



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m ²)	Reported APD (W/m ²)
	WLAN6GHz	802.11ax-HE160 MCS0	Front	10mm	Ant 6+7(7)	-	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.05	0.030	0.040	0.230	0.308
	WLAN6GHz	802.11ax-HE160 MCS0	Front	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	-0.05	0.024	0.032	0.128	0.171
	WLAN6GHz	802.11ax-HE160 MCS0	Back	15mm	Ant 6+7(7)	-	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.14	0.053	0.071	0.432	0.578
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	-0.03	0.063	0.084	0.456	0.610
14	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(6)	Holster	DSI 2	Battery 1	15	6025	9.00	10.50	1.413	85.76	1.166	-0.02	0.053	0.087	0.445	0.733
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(6)	Holster	DSI 2	Battery 1	47	6185	10.10	10.50	1.096	85.76	1.166	0.07	0.055	0.070	0.453	0.579
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 1	111	6505	10.60	11.00	1.096	85.76	1.166	-0.04	0.056	0.072	0.463	0.592
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(7)	Holster	DSI 2	Battery 1	143	6665	9.60	10.00	1.096	85.76	1.166	-0.07	0.044	0.056	0.328	0.419
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(6)	Holster	DSI 2	Battery 2	15	6025	9.00	10.50	1.413	85.76	1.166	0.17	0.048	0.079	0.438	0.721
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(6)	Holster	DSI 2	Battery 3	15	6025	9.00	10.50	1.413	85.76	1.166	-0.11	0.051	0.084	0.436	0.718
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(6)	Holster	DSI 2	Battery 4	15	6025	9.00	10.50	1.413	85.76	1.166	0.13	0.050	0.082	0.425	0.700

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Accessories	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 6	-	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	-0.1	0.001	0.001
	Bluetooth	1Mbps	Front	15mm	Ant 6	-	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	-0.11	0.001	0.001
	Bluetooth	1Mbps	Back	15mm	Ant 6	-	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	0.1	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 6	Holster	Battery 1	39	2441	5.76	6.00	1.056	76.8	1.085	-0.08	0.002	0.002
	Bluetooth	1Mbps	Back	0mm	Ant 6	Holster	Battery 2	39	2441	5.76	6.00	1.056	76.8	1.085	-0.15	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 6	Holster	Battery 3	39	2441	5.76	6.00	1.056	76.8	1.085	0.01	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 6	Holster	Battery 4	39	2441	5.76	6.00	1.056	76.8	1.085	-0.11	0.001	0.001
	Bluetooth	1Mbps	Front	10mm	Ant 7	-	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	-0.08	0.001	0.001
	Bluetooth	1Mbps	Front	15mm	Ant 7	-	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	0.11	0.001	0.001
	Bluetooth	1Mbps	Back	15mm	Ant 7	-	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	-0.07	0.001	0.001
15	Bluetooth	1Mbps	Back	0mm	Ant 7	Holster	Battery 1	0	2402	6.54	7.00	1.111	77.07	1.081	0	0.004	0.005
	Bluetooth	1Mbps	Back	0mm	Ant 7	Holster	Battery 2	0	2402	6.54	7.00	1.111	77.07	1.081	-0.17	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 7	Holster	Battery 3	0	2402	6.54	7.00	1.111	77.07	1.081	-0.14	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 7	Holster	Battery 4	0	2402	6.54	7.00	1.111	77.07	1.081	-0.19	0.001	0.001

<RFID SAR>

Plot No.	Band	Test Position	Gap (mm)	Antenna	Accessories	Battery	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Actual Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	RFID	Front	10mm	Ant 6	-	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0	0.327	0.124
	RFID	Front	15mm	Ant 6	-	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.1	0.219	0.083
	RFID	Back	15mm	Ant 6	-	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0.05	0.188	0.071
	RFID	Front	0mm	Ant 6	Holster	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.13	0.397	0.151
	RFID	Front	0mm	Ant 6	Holster	Battery 2	902.75	24.07	24.50	1.104	87.28	30	0.344	0.04	0.390	0.148
	RFID	Front	0mm	Ant 6	Holster	Battery 3	902.75	24.07	24.50	1.104	87.28	30	0.344	0.15	0.385	0.146
	RFID	Front	0mm	Ant 6	Holster	Battery 4	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.08	0.389	0.148
	RFID	Front	10mm	Ant 7	-	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0	0.262	0.099
	RFID	Front	15mm	Ant 7	-	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.04	0.165	0.062
	RFID	Back	15mm	Ant 7	-	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.19	0.495	0.187
16	RFID	Back	0mm	Ant 7	Holster	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0	0.501	0.189
	RFID	Back	0mm	Ant 7	Holster	Battery 2	902.75	24.11	24.50	1.094	86.92	30	0.345	0.11	0.498	0.188
	RFID	Back	0mm	Ant 7	Holster	Battery 3	902.75	24.11	24.50	1.094	86.92	30	0.345	0.17	0.492	0.186
	RFID	Back	0mm	Ant 7	Holster	Battery 4	902.75	24.11	24.50	1.094	86.92	30	0.345	0.07	0.490	0.185

**13.4 Product Specific SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 6+7(7)	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.02	0.361	0.482
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 6+7(7)	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	0.17	1.280	1.711
17	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.1	2.380	3.181
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	64	5320	18.10	19.00	1.230	86.14	1.161	0.09	1.740	2.485
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.09	1.630	2.178
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	0.04	0.303	0.405
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 2	54	5270	19.40	20.00	1.148	85.92	1.164	-0.14	2.320	3.101
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 3	54	5270	19.40	20.00	1.148	85.92	1.164	0.04	2.290	3.060
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 4	54	5270	19.40	20.00	1.148	85.92	1.164	0.05	2.340	3.127
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 6+7(7)	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	0.14	0.208	0.297
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6+7(7)	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	0.05	0.715	1.020
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	-0.16	1.990	2.838
18	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	122	5610	16.70	18.00	1.349	86.26	1.159	-0.1	2.020	3.158
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	-0.14	0.841	1.199
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	138	5690	17.10	18.00	1.230	86.26	1.159	-0.19	0.112	0.160
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 2	122	5610	16.70	18.00	1.349	86.26	1.159	-0.01	1.870	2.924
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 3	122	5610	16.70	18.00	1.349	86.26	1.159	0.11	1.910	2.986
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 4	122	5610	16.70	18.00	1.349	86.26	1.159	0.07	1.890	2.955
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 6+7(7)	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	-0.14	0.313	0.389
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 6+7(7)	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	-0.09	0.772	0.959
19	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	-0.02	2.350	2.918
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	159	5795	19.30	19.50	1.047	85.97	1.163	0.04	2.300	2.801
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	0.09	1.790	2.223
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	0.1	0.280	0.348
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 2	155	5775	19.20	19.50	1.072	85.97	1.163	0.14	2.240	2.791
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 3	155	5775	19.20	19.50	1.072	85.97	1.163	0.16	2.190	2.729
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 4	155	5775	19.20	19.50	1.072	85.97	1.163	-0.06	2.270	2.829



FCC SAR TEST REPORT

Report No. : FA430824

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Measured APD (W/m^2)	Reported APD (W/m^2)
	WLAN6GHZ	802.11ax-HE160 MCS0	Front	0mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	-0.13	0.019	0.025	0.442	0.592
	WLAN6GHZ	802.11ax-HE160 MCS0	Back	0mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.05	0.117	0.157	2.750	3.682
	WLAN6GHZ	802.11ax-HE160 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	-0.09	0.156	0.209	3.680	4.927
	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0	0.155	0.208	4.810	6.439
20	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(6)	DSI 2	Battery 1	15	6025	9.00	10.50	1.413	85.76	1.166	-0.02	0.190	0.313	4.670	7.692
	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(6)	DSI 2	Battery 1	47	6185	10.10	10.50	1.096	85.76	1.166	-0.15	0.212	0.271	5.200	6.648
	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	111	6505	10.60	11.00	1.096	85.76	1.166	0.19	0.243	0.311	5.960	7.620
	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	143	6665	9.60	10.00	1.096	85.76	1.166	-0.11	0.206	0.263	5.160	6.597
	WLAN6GHZ	802.11ax-HE160 MCS0	Top Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	-0.07	0.022	0.029	0.509	0.681
	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(6)	DSI 2	Battery 2	15	6025	9.00	10.50	1.413	85.76	1.166	-0.17	0.174	0.287	4.200	6.917
	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(6)	DSI 2	Battery 3	15	6025	9.00	10.50	1.413	85.76	1.166	-0.15	0.168	0.277	4.120	6.786
	WLAN6GHZ	802.11ax-HE160 MCS0	Right Side	0mm	Ant 6+7(6)	DSI 2	Battery 4	15	6025	9.00	10.50	1.413	85.76	1.166	-0.19	0.179	0.295	4.390	7.230

<RFID SAR>

Plot No.	Band	Test Position	Gap (mm)	Antenna	Power State	Battery	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Actual Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	RFID	Front	0mm	Ant 6	DSI 2	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0.01	0.701	0.266
	RFID	Back	0mm	Ant 6	DSI 2	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.08	0.655	0.249
	RFID	Left Side	0mm	Ant 6	DSI 2	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0.05	0.225	0.085
	RFID	Right Side	0mm	Ant 6	DSI 2	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0.07	0.623	0.237
	RFID	Top Side	0mm	Ant 6	DSI 2	Battery 1	902.75	24.07	24.50	1.104	87.28	30	0.344	0.18	0.638	0.242
	RFID	Front	0mm	Ant 6	DSI 2	Battery 2	902.75	24.07	24.50	1.104	87.28	30	0.344	-0.04	0.698	0.265
	RFID	Front	0mm	Ant 6	DSI 2	Battery 3	902.75	24.07	24.50	1.104	87.28	30	0.344	0.05	0.690	0.262
	RFID	Front	0mm	Ant 6	DSI 2	Battery 4	902.75	24.07	24.50	1.104	87.28	30	0.344	0.09	0.689	0.262
	RFID	Front	0mm	Ant 7	DSI 2	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0	0.378	0.143
21	RFID	Back	0mm	Ant 7	DSI 2	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.02	1.220	0.460
	RFID	Left Side	0mm	Ant 7	DSI 2	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.17	0.698	0.263
	RFID	Right Side	0mm	Ant 7	DSI 2	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.01	0.099	0.037
	RFID	Top Side	0mm	Ant 7	DSI 2	Battery 1	902.75	24.11	24.50	1.094	86.92	30	0.345	0.05	0.128	0.048
	RFID	Back	0mm	Ant 7	DSI 2	Battery 2	902.75	24.11	24.50	1.094	86.92	30	0.345	0.03	1.201	0.453
	RFID	Back	0mm	Ant 7	DSI 2	Battery 3	902.75	24.11	24.50	1.094	86.92	30	0.345	0	1.199	0.453
	RFID	Back	0mm	Ant 7	DSI 2	Battery 4	902.75	24.11	24.50	1.094	86.92	30	0.345	0.05	1.203	0.454

<NFC SAR>

Plot No.	Band	Test Position	Gap (mm)	Battery	Freq. (MHz)	Power Drift (dB)	Measured 10g SAR (W/kg)
22	NFC	Front	0mm	Battery 1	13.56	-0.07	0.003
	NFC	Back	0mm	Battery 1	13.56	0.15	0.001
	NFC	Left Side	0mm	Battery 1	13.56	0.11	0.001
	NFC	Right Side	0mm	Battery 1	13.56	-0.16	0.001
	NFC	Top Side	0mm	Battery 1	13.56	0.1	0.001
	NFC	Front	0mm	Battery 2	13.56	0.13	0.001
	NFC	Front	0mm	Battery 3	13.56	0.05	0.001
	NFC	Front	0mm	Battery 4	13.56	-0.04	0.001

**13.5 6GHz PD SAR Result**

Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Grid Step (λ)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m ²)	Total psPD (W/m ²)
WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(6)	DSI 0	Battery 1	15	6025	18.10	0.0625	8.20	0.02	3.260	3.480
WLAN6GHz	802.11ax-HE160 MCS0	Front	10mm	Ant 6+7(6)	DSI 0	Battery 1	15	6025	18.10	0.25	8.16		1.910	2.160
WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(6)	DSI 0	Battery 1	207	6985	11.40	0.0625	2.91	-0.09	1.410	1.500
WLAN6GHz	802.11ax-HE160 MCS0	Front	8.59mm	Ant 6+7(6)	DSI 0	Battery 1	207	6985	11.40	0.25	2.97		0.868	0.899

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (λ)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)
01	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(6)	DSI 0	Battery 1	15	6025	18.10	18.50	1.096	85.76	1.166	0.0625	1.55	0.09	3.260	6.475	3.480	6.912
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(6)	DSI 0	Battery 1	47	6185	18.20	18.50	1.072	85.76	1.166	0.0625	1.55	0.15	3.220	6.250	3.850	7.473
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(7)	DSI 0	Battery 1	111	6505	10.60	11.00	1.096	85.76	1.166	0.0625	1.55	0.08	0.615	1.221	0.752	1.494
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(7)	DSI 0	Battery 1	143	6665	16.80	17.50	1.175	85.76	1.166	0.0625	1.55	-0.04	3.410	7.257	3.490	7.427
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(7)	DSI 0	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.0625	1.55	-0.05	1.410	2.932	1.500	3.120
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(6)	DSI 0	Battery 2	47	6185	18.20	18.50	1.072	85.76	1.166	0.0625	1.55	0.08	3.160	6.133	3.770	7.317
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(6)	DSI 0	Battery 3	47	6185	18.20	18.50	1.072	85.76	1.166	0.0625	1.55	0.01	3.180	6.172	3.790	7.356
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(6)	DSI 0	Battery 4	47	6185	18.20	18.50	1.072	85.76	1.166	0.0625	1.55	0.03	3.100	6.017	3.700	7.181
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.0625	1.55	-0.03	0.633	1.316	0.681	1.416
	WLAN6GHz	802.11ax-HE160 MCS0	Back	2mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.0625	1.55	-0.05	1.610	3.348	1.780	3.702
	WLAN6GHz	802.11ax-HE160 MCS0	Left Side	2mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.0625	1.55	0.06	1.990	4.139	2.400	4.991
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.0625	1.55	0.01	3.390	7.050	3.530	7.341
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(6)	DSI 2	Battery 1	15	6025	9.00	10.50	1.413	85.76	1.166	0.0625	1.55	-0.03	2.520	6.448	2.650	6.780
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(6)	DSI 2	Battery 1	47	6185	10.10	10.50	1.096	85.76	1.166	0.0625	1.55	-0.02	3.280	6.515	3.660	7.269
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(7)	DSI 2	Battery 1	111	6505	10.60	11.00	1.096	85.76	1.166	0.0625	1.55	0.13	3.340	6.634	3.710	7.369
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(7)	DSI 2	Battery 1	143	6665	9.60	10.00	1.096	85.76	1.166	0.0625	1.55	-0.01	3.440	6.832	3.670	7.289
	WLAN6GHz	802.11ax-HE160 MCS0	Top Side	2mm	Ant 6+7(7)	DSI 2	Battery 1	207	6985	11.40	12.00	1.148	85.76	1.166	0.0625	1.55	-0.06	0.718	1.493	0.757	1.574
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(7)	DSI 2	Battery 2	111	6505	10.60	11.00	1.096	85.76	1.166	0.0625	1.55	-0.08	3.140	6.236	3.480	6.912
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(7)	DSI 2	Battery 3	111	6505	10.60	11.00	1.096	85.76	1.166	0.0625	1.55	0.10	3.100	6.157	3.460	6.872
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 6+7(7)	DSI 2	Battery 4	111	6505	10.60	11.00	1.096	85.76	1.166	0.0625	1.55	-0.18	3.050	6.058	3.380	6.713



13.6 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.1	2.380	-	3.181
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	-0.1	2.360	1.008	3.154
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	122	5610	16.70	18.00	1.349	86.26	1.159	-0.1	2.020	-	3.158
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	122	5610	16.70	18.00	1.349	86.26	1.159	-0.1	2.000	1.01	3.127
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	-0.02	2.350	-	2.918
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 6+7(7)	DSI 2	Battery 1	155	5775	19.20	19.50	1.072	86.26	1.159	0.06	2.310	1.017	2.869

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

13.7 Supplemental SAR Results

General Note:

1. Guidance is here provided in regard to RF devices that use sensors to detect a "on-body" use conditions, in order to control the RF conducted power to maintain RF exposure compliance. For these cases, it is also necessary to address "off-body, but close" use condition, such as the device on a stationary surface (e.g., a table), thus with the sensors not triggered and therefore operating at maximum power, but close enough to a person's body to pose RF exposure compliance concerns.
2. Accordingly, it is possible to consider that, if the particular device under test (DUT) is shown to be RF-exposure-compliant at 25 mm without any power reduction, then any off-body use will also lead to an exposure that, on average, is within the compliance threshold. This argument is based on the fact that, for this particular DUT under consideration, operations at distances closer than 25 mm will likely lead to contact with the DUT, even temporary or accidental, thus triggering the sensor-based power reduction feature.

<WLAN SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN2.4GHz	802.11b 1Mbps	Back	25mm	Ant 6+7(7)	CTL	Battery 1	6	2437	20.60	21.00	1.096	97.76	1.023	-0.14	0.209	0.234
WLAN5GHz	802.11n-HT40 MCS0	Left Side	25mm	Ant 6+7(7)	CTL	Battery 1	54	5270	19.40	20.00	1.148	85.92	1.164	0.06	0.423	0.565
WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	25mm	Ant 6+7(7)	CTL	Battery 1	138	5690	20.10	20.50	1.096	86.26	1.159	0.12	0.927	1.178
WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	25mm	Ant 6+7(7)	CTL	Battery 1	155	5775	19.20	20.00	1.202	86.26	1.159	-0.16	0.792	1.104
WLAN6GHz	802.11ax-HE160 MCS0	Right Side	25mm	Ant 6+7(6)	CTL	Battery 1	15	6025	16.10	17.00	1.230	85.76	1.166	-0.01	0.573	0.822

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Product Specific
Non-DBS					
1.	2.4GHz WLAN Ant 6+7 (5/6GHz WLAN Rx) + RFID			Yes	
2.	2.4GHz WLAN Ant 7 + Bluetooth Ant 6 (5/6GHz WLAN Rx) + RFID			Yes	
3.	2.4GHz WLAN Ant 6 + Bluetooth Ant 7 (5/6GHz WLAN Rx) + RFID			Yes	
4.	2.4GHz WLAN Ant 7 + Bluetooth Ant 6 + NFC + RFID	Yes	Yes		Yes
5.	2.4GHz WLAN Ant 6 + Bluetooth Ant 7 + NFC + RFID	Yes	Yes		Yes
6.	5/6GHz WLAN Ant 6+7 + Bluetooth Ant 6 / 7 + NFC + RFID	Yes	Yes		Yes
DBS					
7.	WLAN2.4GHz Ant 6+7 + WLAN5/6GHz Ant 6+7 + NFC + RFID	Yes	Yes		Yes
8.	WLAN2.4GHz Ant 6 + WLAN5/6GHz Ant 6+7 + Bluetooth Ant 7 + NFC + RFID	Yes	Yes		Yes
9.	WLAN2.4GHz Ant 7 + WLAN5/6GHz Ant 6+7 + Bluetooth Ant 6 + NFC + RFID	Yes	Yes		Yes

General Note:

- The device 2.4GHz support hotspot operation via 5/6GHz receive signal.
- The worst case reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.

14.1 Head Exposure Conditions

<Non-DBS>

RFID OFF

Exposure Position	1	2	3	4	5	6	1+6 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)	4+6 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN2.4GHz Ant 7 1g SAR (W/kg)	WLAN2.4GHz Ant 6+7 1g SAR (W/kg)	WLAN5/6GHz Ant 6+7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)				
Right Cheek at 0mm	0.316	0.439	0.501	1.085	0.001	0.013	0.329	0.440	1.086	1.098
Right Tilted at 0mm	0.259	0.277	0.478	0.990	0.001	0.001	0.260	0.278	0.991	0.991
Left Cheek at 0mm	0.520	0.219	0.525	1.062	0.001	0.001	0.521	0.220	1.063	1.063
Left Tilted at 0mm	0.335	0.160	0.358	0.810	0.001	0.001	0.336	0.161	0.811	0.811

<DBS>

RFID OFF

Exposure Position	1	2	3	4	5	6	3+4 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	2+4+5 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN2.4GHz Ant 7 1g SAR (W/kg)	WLAN2.4GHz Ant 6+7 1g SAR (W/kg)	WLAN5/6GHz Ant 6+7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)			
Right Cheek at 0mm	0.316	0.439	0.501	1.085	0.001	0.013	1.586	1.414	1.525
Right Tilted at 0mm	0.259	0.277	0.478	0.990	0.001	0.001	1.468	1.250	1.268
Left Cheek at 0mm	0.520	0.219	0.525	1.062	0.001	0.001	1.587	1.583	1.282
Left Tilted at 0mm	0.335	0.160	0.358	0.810	0.001	0.001	1.168	1.146	0.971

14.2 Hotspot Exposure Conditions

<Non-DBS>

RFID OFF

Exposure Position	1	2	5	6	1+6 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN2.4GHz Ant 7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)			
Front at 10mm -	0.275	0.121	0.001	0.001	0.276	0.122	0.396
Back at 10mm -	0.869	0.318	0.001	0.001	0.870	0.319	1.187
Left side at 10mm -	0.058	0.277	0.001	0.001	0.059	0.278	0.335
Right side at 10mm -	0.520	0.057	0.001	0.002	0.522	0.058	0.577
Top side at 10mm -	0.270	0.104	0.001	0.001	0.271	0.105	0.374

RFID ON

Exposure Position	1	2	5	6	7	8	1+5+8 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	2+5+7 Summed 1g SAR (W/kg)	2+6+7 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+2+6 Summed 1g SAR (W/kg)
	WLAN 2.4GHz Ant 6 1g SAR (W/kg)	WLAN 2.4GHz Ant 7 1g SAR (W/kg)	RFID Ant 6 1g SAR (W/kg)	RFID Ant 7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)						
Front at 10mm	0.275	0.121	0.124	0.099	0.001	0.001	0.400	0.375	0.246	0.221	0.520	0.495
Back at 10mm	0.869	0.318	0.187	0.302	0.001	0.001	1.057	1.172	0.506	0.621	1.374	1.489
Left side at 10mm	0.058	0.277	0.041	0.116	0.001	0.001	0.100	0.175	0.319	0.394	0.376	0.451
Right side at 10mm	0.520	0.057	0.159	0.019	0.001	0.002	0.681	0.541	0.217	0.077	0.736	0.596
Top side at 10mm	0.270	0.104	0.136	0.023	0.001	0.001	0.407	0.294	0.241	0.128	0.510	0.397

14.3 Body-Worn Accessory Exposure Conditions

<Non-DBS>

RFID OFF

Exposure Position	1	2	3	4	5	6	1+6 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)	4+6 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN2.4GHz Ant 7 1g SAR (W/kg)	WLAN2.4GHz Ant 6+7 1g SAR (W/kg)	WLAN5/6GHz Ant 6+7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)				
Front at 10mm -	0.275	0.121	0.275	0.355	0.001	0.001	0.276	0.122	0.356	0.356
Front at 15mm -	0.165	0.002	0.162	0.275	0.001	0.001	0.166	0.003	0.276	0.276
Back at 15mm -	0.308	0.198	0.384	0.571	0.001	0.001	0.309	0.199	0.572	0.572
Back at 0mm Holster	0.331	0.200	0.404	0.718	0.002	0.005	0.336	0.202	0.720	0.723

RFID ON

Exposure Position	1	2	3	4	5	6	7	8	1+5+8 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	2+5+7 Summed 1g SAR (W/kg)	2+6+7 Summed 1g SAR (W/kg)	4+5+7 Summed 1g SAR (W/kg)	4+5+8 Summed 1g SAR (W/kg)	4+6+7 Summed 1g SAR (W/kg)	4+6+8 Summed 1g SAR (W/kg)
	WLAN 2.4GHz Ant 6 1g SAR (W/kg)	WLAN 2.4GHz Ant 7 1g SAR (W/kg)	WLAN 2.4GHz Ant 6+7 1g SAR (W/kg)	WLAN 5/6GHz Ant 6+7 1g SAR (W/kg)	RFID Ant 6 1g SAR (W/kg)	RFID Ant 7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)								
Front at 10mm	0.275	0.121	0.275	0.355	0.124	0.099	0.001	0.001	0.400	0.375	0.246	0.221	0.480	0.480	0.455	0.455
Front at 15mm	0.165	0.002	0.162	0.275	0.083	0.062	0.001	0.001	0.249	0.228	0.086	0.065	0.359	0.359	0.338	0.338
Back at 15mm	0.308	0.198	0.384	0.571	0.071	0.187	0.001	0.001	0.380	0.496	0.270	0.386	0.643	0.643	0.759	0.759
Back at 0mm Holster	0.331	0.200	0.404	0.718	0.151	0.189	0.002	0.005	0.487	0.525	0.353	0.391	0.871	0.874	0.909	0.912

<DBS>
RFID OFF

Exposure Position	1	2	3	4	5	6	3+4 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	2+4+5 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 6 1g SAR (W/kg)	WLAN2.4GHz Ant 7 1g SAR (W/kg)	WLAN2.4GHz Ant 6+7 1g SAR (W/kg)	WLAN5/6GHz Ant 6+7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)			
Front at 10mm -	0.275	0.121	0.275	0.355	0.001	0.001	0.630	0.631	0.477
Front at 15mm -	0.165	0.002	0.162	0.275	0.001	0.001	0.437	0.441	0.278
Back at 15mm -	0.308	0.198	0.384	0.571	0.001	0.001	0.955	0.880	0.770
Back at 0mm Holster	0.331	0.200	0.404	0.718	0.002	0.005	1.122	1.054	0.920

RFID ON

Exposure Position	1	2	3	4	5	6	7	8	3+4+5 Summed 1g SAR (W/kg)	3+4+6 Summed 1g SAR (W/kg)	1+4+5+8 Summed 1g SAR (W/kg)	1+4+6+8 Summed 1g SAR (W/kg)	2+4+5+7 Summed 1g SAR (W/kg)	2+4+6+7 Summed 1g SAR (W/kg)
	WLAN 2.4GHz Ant 6 1g SAR (W/kg)	WLAN 2.4GHz Ant 7 1g SAR (W/kg)	WLAN 2.4GHz Ant 6+7 1g SAR (W/kg)	WLAN 5/6GHz Ant 6+7 1g SAR (W/kg)	RFID Ant 6 1g SAR (W/kg)	RFID Ant 7 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)						
Front at 10mm -	0.275	0.121	0.275	0.355	0.124	0.099	0.001	0.001	0.754	0.729	0.755	0.730	0.601	0.576
Front at 15mm -	0.165	0.002	0.162	0.275	0.083	0.062	0.001	0.001	0.520	0.499	0.524	0.503	0.361	0.340
Back at 15mm -	0.308	0.198	0.384	0.571	0.071	0.187	0.001	0.001	1.026	1.142	0.951	1.067	0.841	0.957
Back at 0mm Holster	0.331	0.200	0.404	0.718	0.151	0.189	0.002	0.005	1.273	1.311	1.205	1.240	1.071	1.109

14.4 Product Specific Exposure Conditions

<Non-DBS&DBS>

RFID OFF

Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
	WLAN5/6GHz Ant 6+7	NFC	
	10g SAR (W/kg)	10g SAR (W/kg)	
Front at 0mm -	0.482	0.003	0.485
Back at 0mm -	1.711	0.001	1.712
Left side at 0mm -	3.181	0.001	3.182
Right side at 0mm -	2.223	0.001	2.224
Top side at 0mm -	0.405	0.001	0.406

RFID ON

Exposure Position	1	2	3	4	1+2+4 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)
	WLAN5/6GHz Ant 6+7	RFID Ant 6	RFID Ant 7	NFC		
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
Front at 0mm -	0.482	0.266	0.143	0.003	0.751	0.628
Back at 0mm -	1.711	0.249	0.460	0.001	1.961	2.172
Left side at 0mm -	3.181	0.085	0.263	0.001	3.267	3.445
Right side at 0mm -	2.223	0.237	0.037	0.001	2.461	2.261
Top side at 0mm -	0.405	0.242	0.048	0.001	0.648	0.454

Test Engineer : Ben Wang, EN Liu, Carter Jhuang and Dennis Hsieh

15. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%

Applicable for Power Density Measurements:

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependance	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [9] FCC KDB 941225 D07 v01r02, "SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [12] IEC/IEEE 62209-1528:2020, "Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)", Oct. 2020
- [13] SPEAG DASY6 System Handbook
- [14] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)