

FCC RF Test Report

APPLICANT : Motorola Solutions, Inc.
EQUIPMENT : Touch Computer
BRAND NAME : Motorola
MODEL NAME : TC55AH
FCC ID : UZ7TC55AH
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jun. 13, 2013 and completely tested on Jul. 09, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Louis Wu

Reviewed by: Louis Wu / Manager

Jones Tsai

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Site..... 6

 1.7 Applied Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 Descriptions of Test Mode 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 11

 2.5 Description of RF Function Operation Test Setup..... 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 13

 3.1 6dB and 99% Bandwidth Measurement 13

 3.2 Peak Output Power Measurement 18

 3.3 Power Spectral Density Measurement 20

 3.4 Conducted Band Edges and Spurious Emission Measurement 25

 3.5 Radiated Band Edges and Spurious Emission Measurement 33

 3.6 AC Conducted Emission Measurement..... 49

 3.7 Antenna Requirements 57

4 LIST OF MEASURING EQUIPMENT..... 58

5 UNCERTAINTY OF EVALUATION..... 59

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR322304-07B	Rev. 01	Initial issue of report	Aug. 14, 2013



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	≤ 8dBm	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.49 dB at 47.820 MHz
3.6	15.207	RSS-210 Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 5.40 dB at 13.558 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Solutions, Inc.
One Motorola Plaza, Holtsville, NY 11742-1300 USA

1.2 Manufacturer

Motorola Solutions, Inc.
One Motorola Plaza, Holtsville, NY 11742-1300 USA

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Motorola
Model Name	TC55AH
FCC ID	UZ7TC55AH
Sample 1	EUT with Scanner
Sample 2	EUT without Scanner
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE WLAN 11abgn / Bluetooth 2.1/3.0/4.0 / NFC
HW Version	DV1
SW Version	Android 4.1.2
FW Version	BSP 1.27
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	3.51 dBm (0.0022 W)
99% Occupied Bandwidth	1.056MHz
Antenna Type	PIFA Antenna type with gain 0.20 dBi(Battery1) PIFA Antenna type with gain 0.08 dBi(Battery2)
Type of Modulation	Bluetooth 4.0 - LE : GFSK

The wifi antenna is not changed while using battery cover 1 or 2. The antenna gain difference is due to antenna gain measurement result by using different battery covers.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH07-HY	722060/4086B-1

The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ANSI C63.10-2009



Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	3.03 dBm	
Ch19	2440MHz	3.51 dBm	
Ch39	2480MHz	3.09 dBm	

- a. The EUT has been associated with peripherals pursuant to ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + NFC active + Scanner + Battery 2 + USB Cable (USB File transfer) for Sample 1 Mode 2 :WCDMA band V Idle + Bluetooth Link + WLAN (5G) Link + NFC active + Scanner + Battery 1 + USB Cable (USB File transfer) for Sample 1 Mode 3 :LTE Band 5 Idle + Bluetooth Link + WLAN (5G) Link + NFC active + Battery 1 + USB Cable (USB File transfer) for Sample 2
Remark: <ol style="list-style-type: none"> For Radiated TCs, The tests were performed with Battery 2 and Sample 1. “Bluetooth Link” means EUT linked with Bluetooth headset. “WLAN Link” means EUT associated with AP at 2.4GHz or 5GHz band. “Scanner” means scanning and decoding a barcode by scanner. “USB File transfer” means data application transferred mode between EUT and Notebook through USB port. “NFC active” means turning on NFC function of EUT. 	

2.3 Connection Diagram of Test System

<Bluetooth 4.0 – LE Tx Mode>

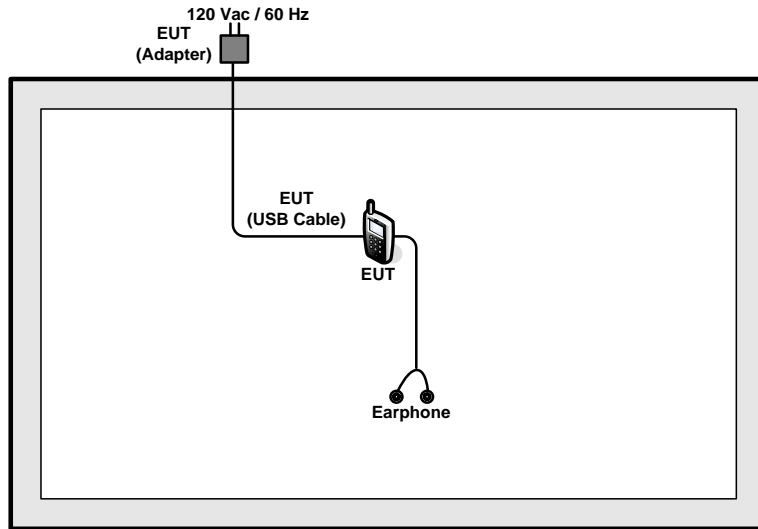

<AC Conducted Emission Mode>

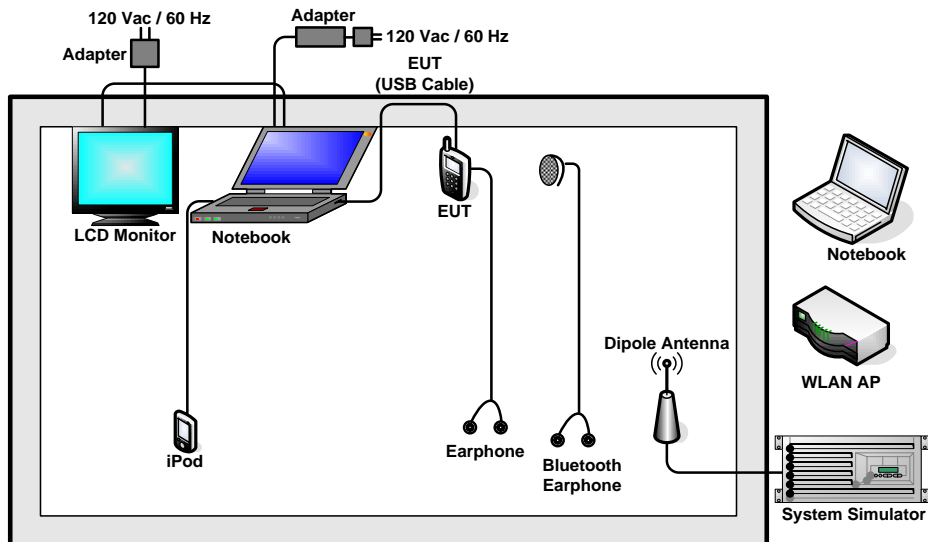

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
6.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
7.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
8.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
9.	Earphone	Cotron	MAX-300	N/A	Unshielded, 1.2 m	N/A



2.5 Description of RF Function Operation Test Setup

For Bluetooth function, programmed RF utility, "ADB" installed in the notebook make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

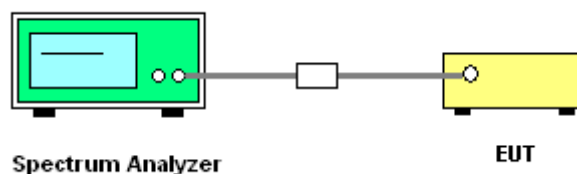




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Coyote Lin	Relative Humidity :	51~55%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.67	0.5	Pass
19	2440	0.67	0.5	Pass
39	2480	0.68	0.5	Pass


6 dB Bandwidth Plot on Channel 00

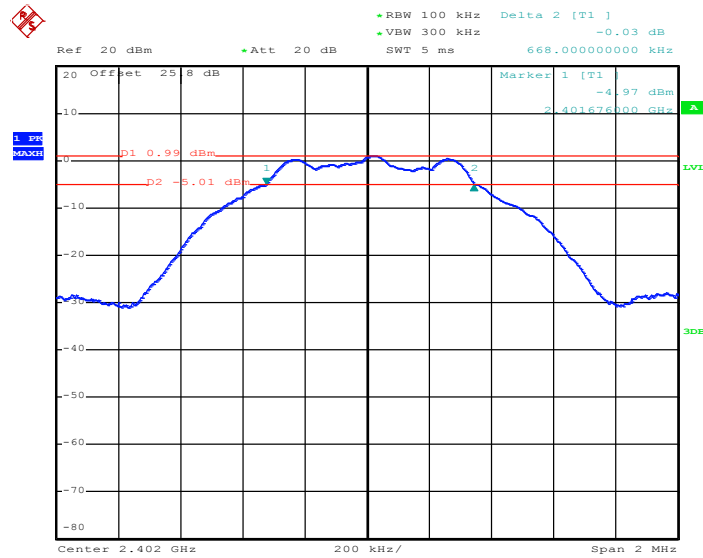

Date: 21.JUN.2013 10:44:59




6 dB Bandwidth Plot on Channel 19

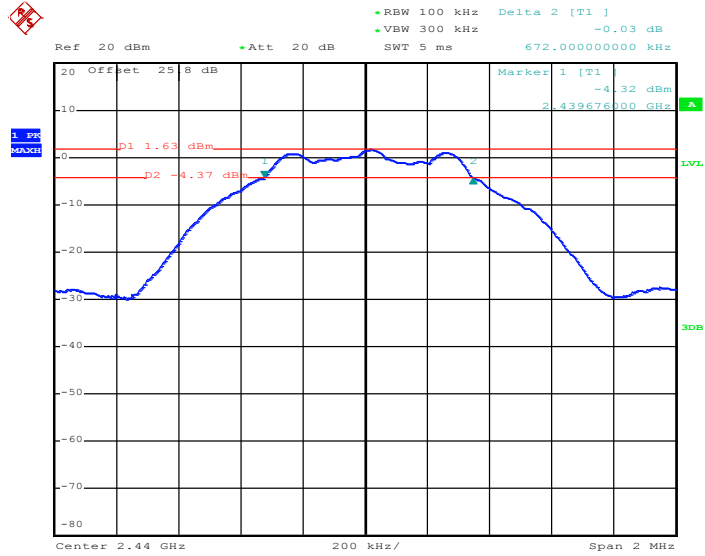

Date: 21.JUN.2013 10:53:31

6 dB Bandwidth Plot on Channel 39

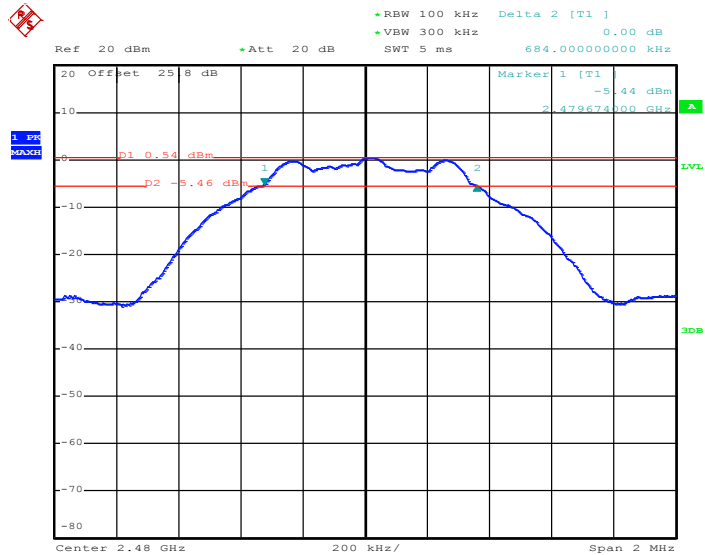

Date: 21.JUN.2013 10:57:12




3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Coyote Lin	Relative Humidity :	51~55%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.056
19	2440	1.056
39	2480	1.056


99% Bandwidth Plot on Channel 00

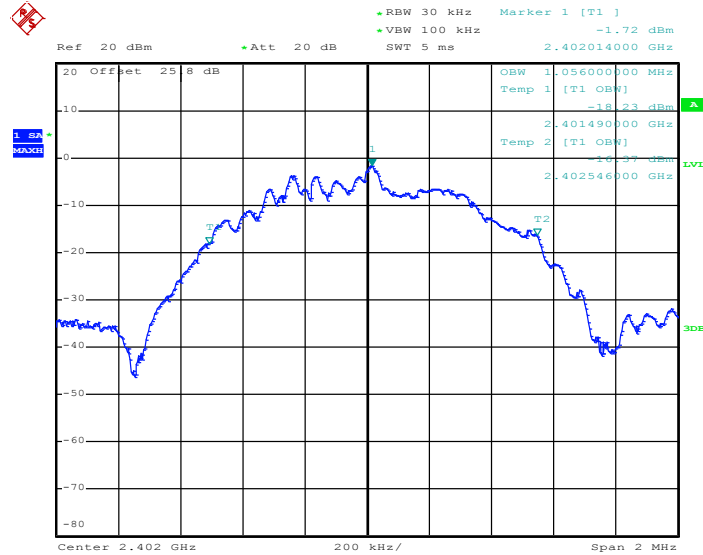

Date: 21.JUN.2013 10:50:44




99% Occupied Bandwidth Plot on Channel 19

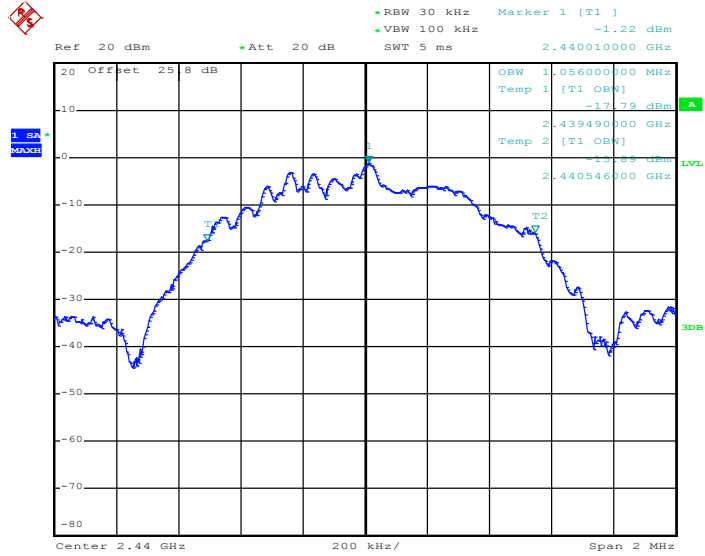

Date: 21.JUN.2013 10:55:38

99% Occupied Bandwidth Plot on Channel 39

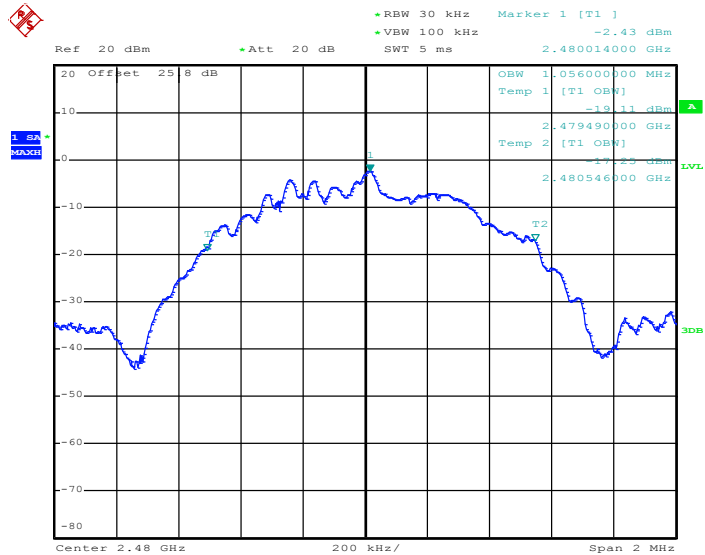

Date: 21.JUN.2013 11:01:49

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

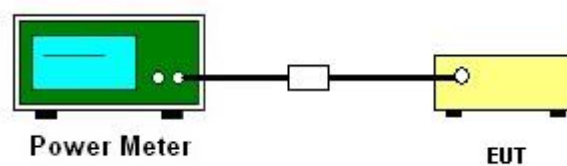



3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Coyote Lin	Relative Humidity :	51~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	3.03	30.00	Pass
19	2440	3.51	30.00	Pass
39	2480	3.09	30.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

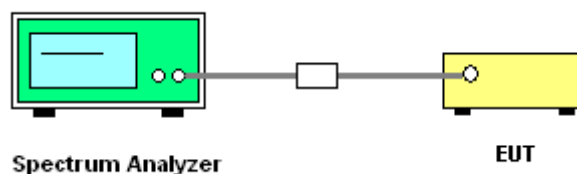

3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Coyote Lin	Relative Humidity :	51~55%


Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3kHz)	Pass/Fail
		PSD/100kHz (dBm)	PSD/3kHz (dBm)		
00	2402	1.05	-14.06	8	Pass
19	2440	1.62	-13.43	8	Pass
39	2480	0.49	-14.70	8	Pass

Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

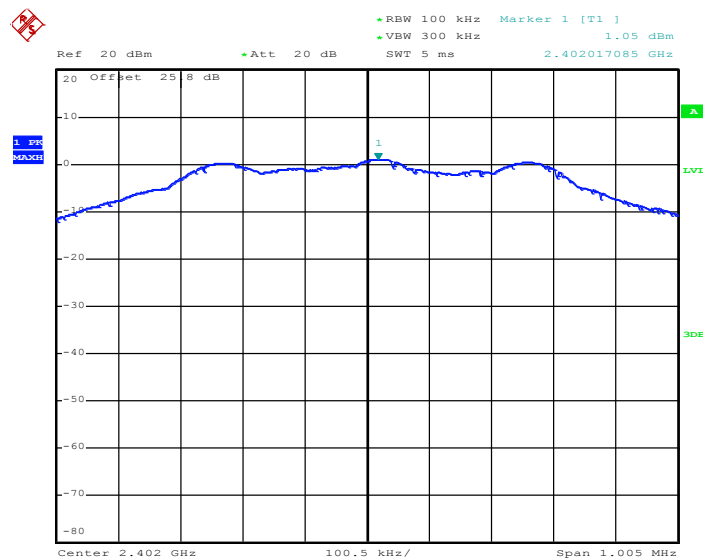

Date: 21.JUN.2013 10:47:35




PSD 100kHz Plot on Channel 19

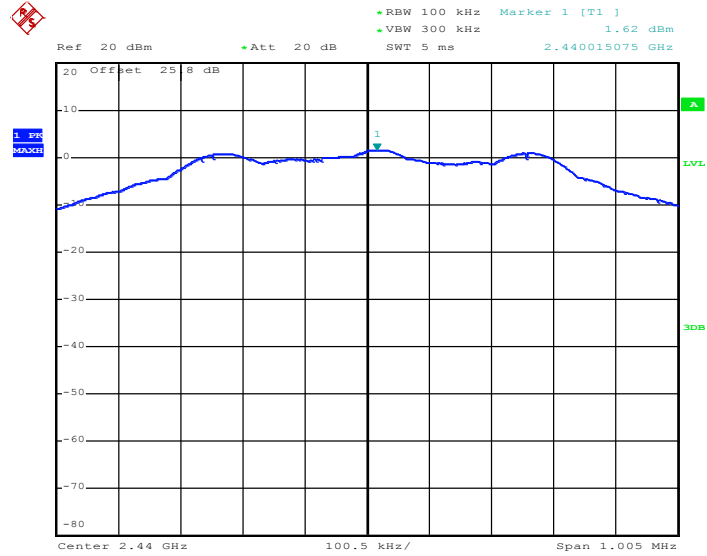

Date: 21.JUN.2013 10:54:32

PSD 100kHz Plot on Channel 39

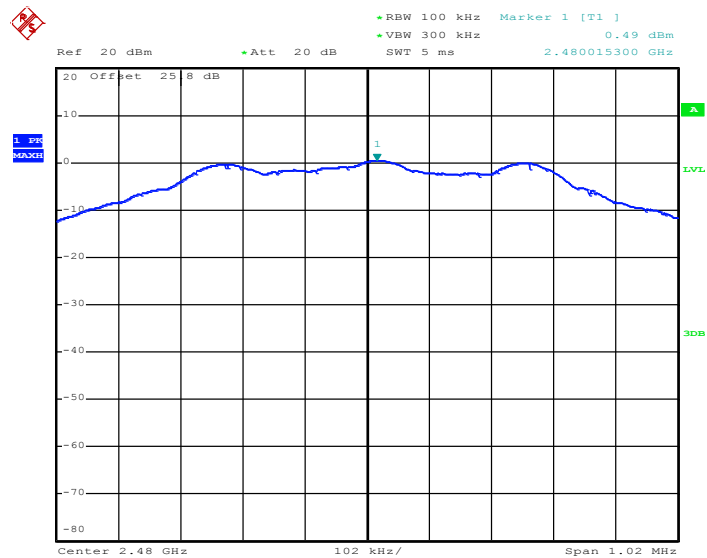


Date: 21.JUN.2013 10:58:22




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

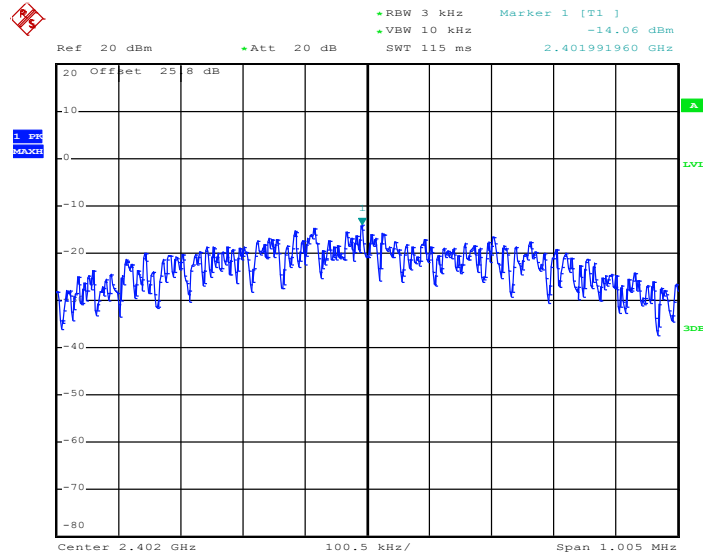

Date: 21.JUN.2013 10:47:22


PSD 3kHz Plot on Channel 19

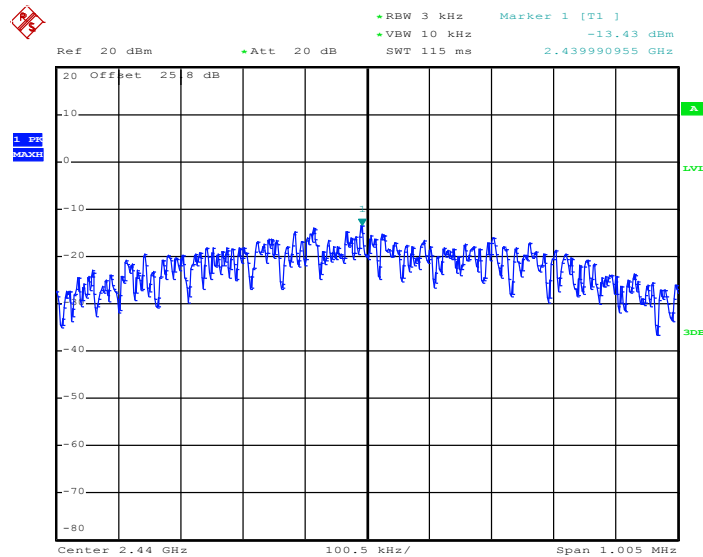

Date: 21.JUN.2013 10:54:02



PSD 3kHz Plot on Channel 39

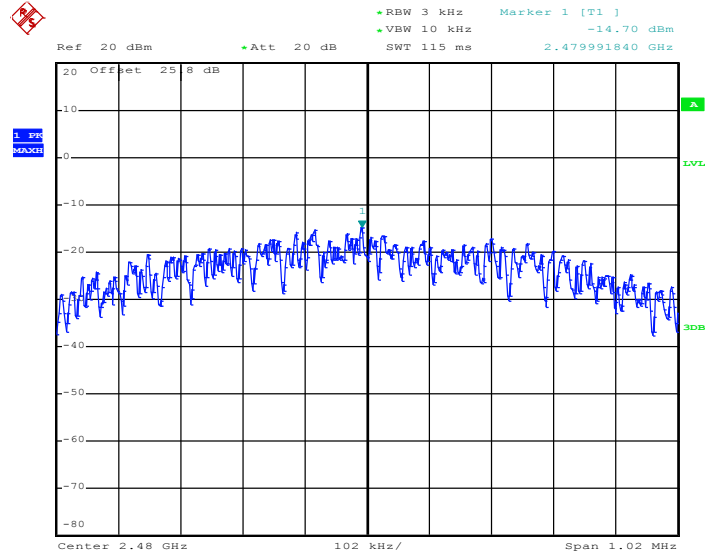

Date: 21.JUN.2013 10:57:38

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

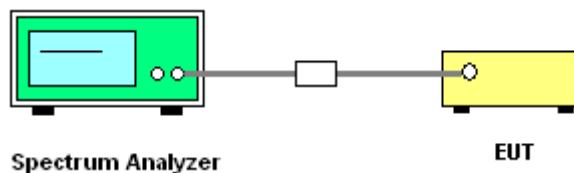




3.4.5 Test Result of Conducted Band Edges


Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	00 and 39	Relative Humidity :	51~55%
		Test Engineer :	Coyote Lin

Low Band Edge Plot on Channel 00

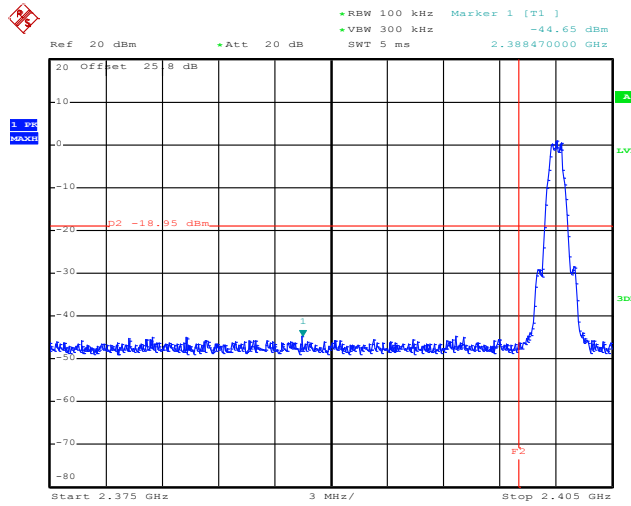

Date: 21.JUN.2013 10:48:11

High Band Edge Plot on Channel 39

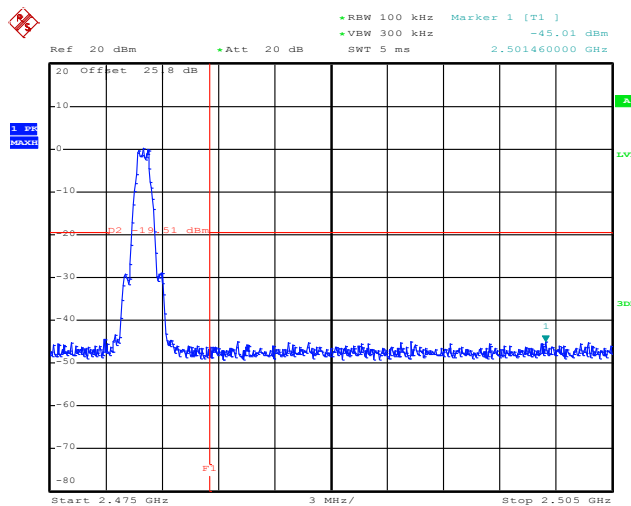


Date: 21.JUN.2013 10:58:46



3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~55%
		Test Engineer :	Coyote Lin


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

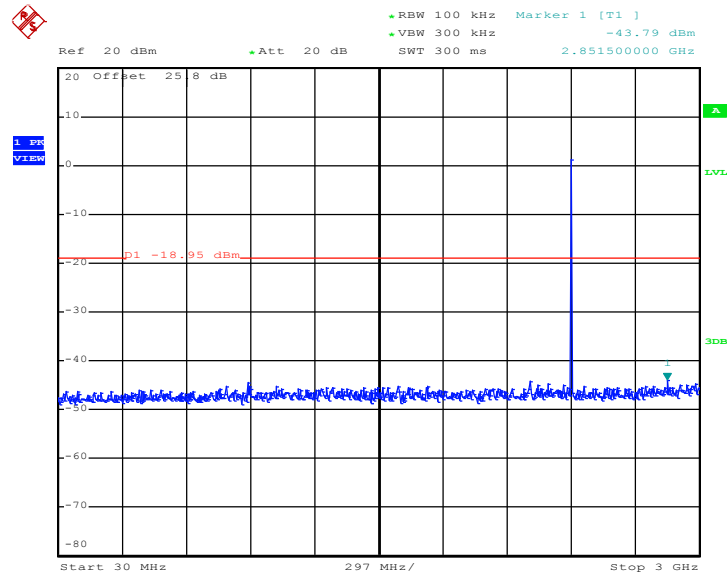

Date: 21.JUN.2013 10:49:33



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

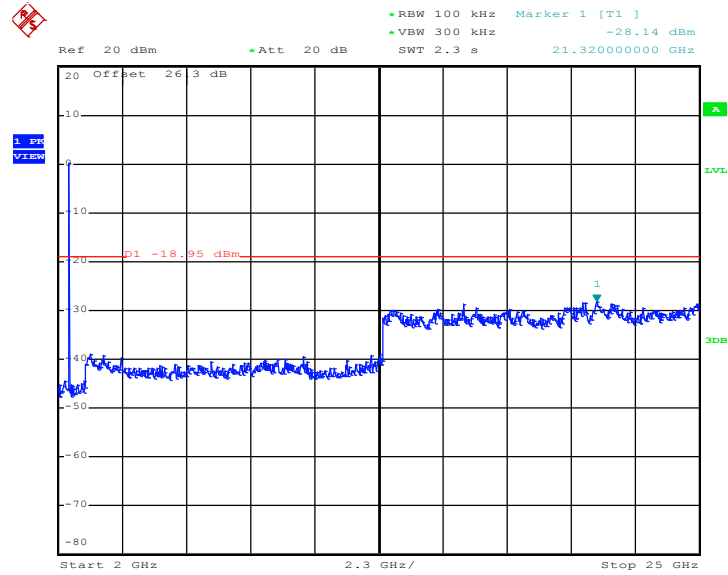


Date: 21.JUN.2013 10:49:52



Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	19	Relative Humidity :	51~55%
		Test Engineer :	Coyote Lin


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

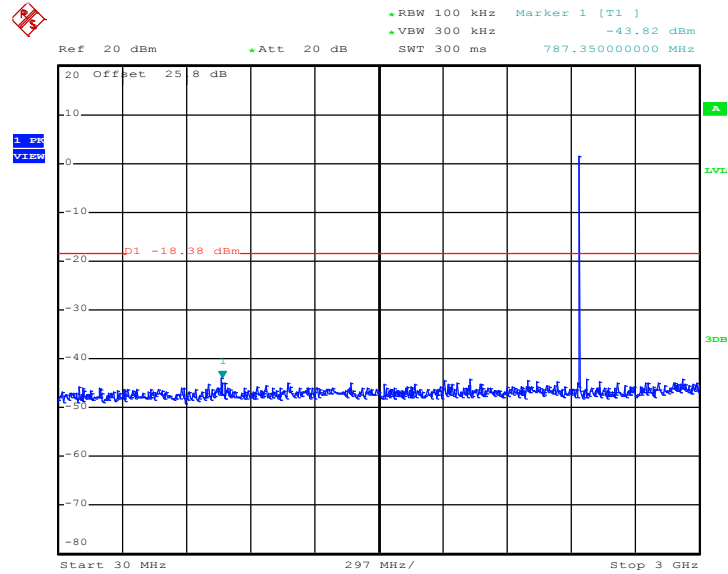

Date: 21.JUN.2013 10:54:58



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

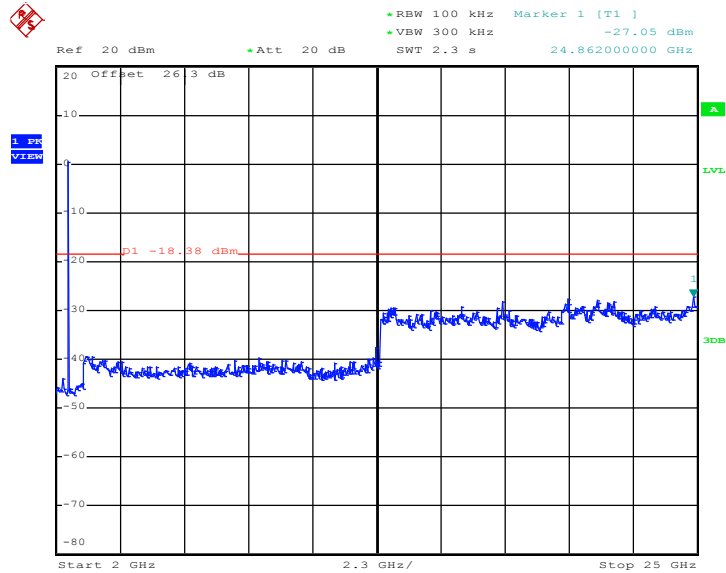


Date: 21.JUN.2013 10:55:16



Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	39	Relative Humidity :	51~55%
		Test Engineer :	Coyote Lin


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

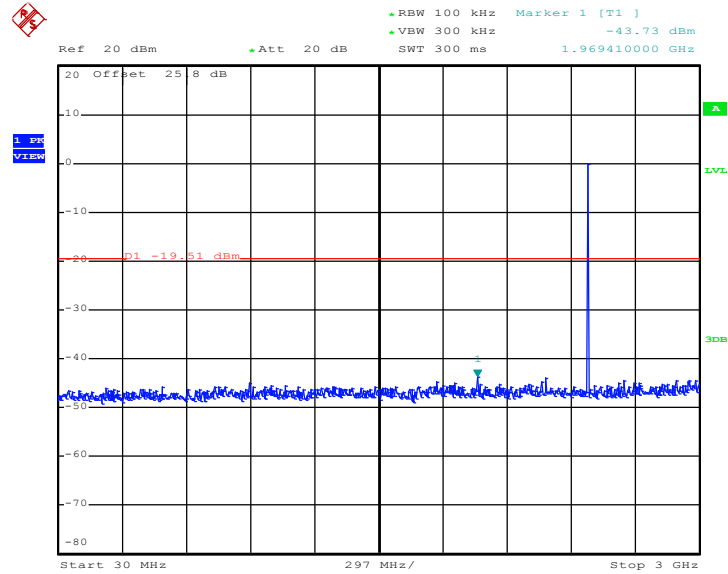

Date: 21.JUN.2013 11:01:03



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

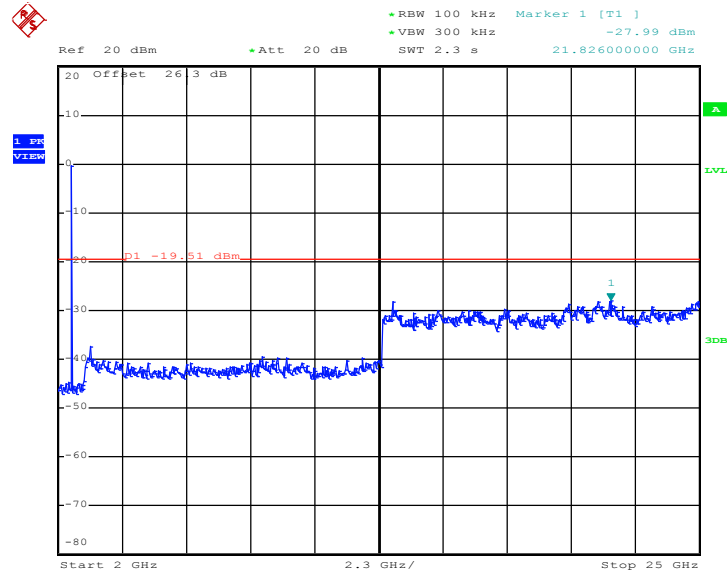

Date: 21.JUN.2013 11:01:22

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
 For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth 4.0 - LE	64.33	404.00	2.48	3kHz

Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

Marker-Delta method :

- (1) Set RBW = 1 MHz, VBW = 3 MHz, peak detector.

Repeat the measurement with an average detector, use RBW = 1MHz

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW $\geq 1/T$, when duty cycle is less than 98 percent


- (2) Set span = 10MHz, that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set RBW = 100kHz, 1% of the total span. Set VBW = 100kHz \geq RBW.

- (3) Subtract the delta measured in step (2) from the field strengths measured in step (1).


The resultant field strengths (peak/average) are then used to determine band-edge compliance as required by Section 15.205.

3.5.4 Test Setup


For radiated emissions below 30MHz

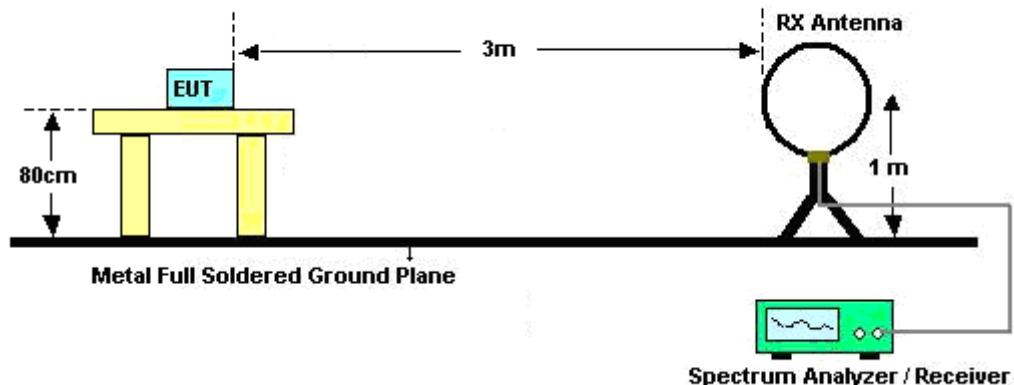

For radiated emissions from 30MHz to 1GHz

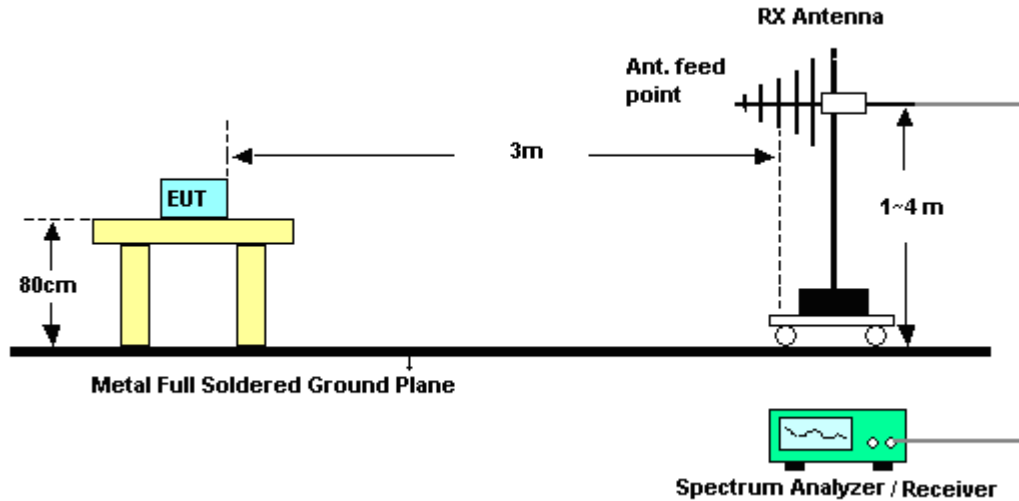

For radiated emissions above 1GHz

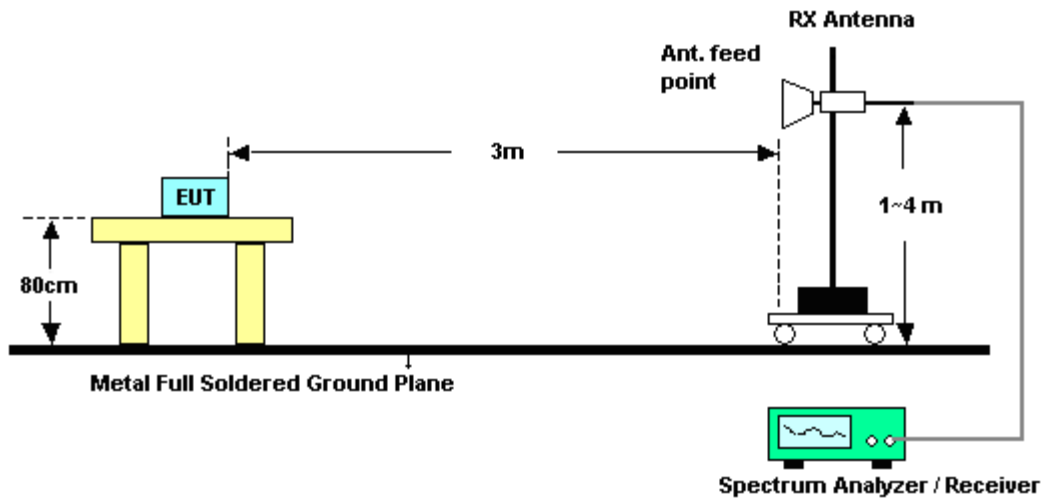

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	51~53%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dB μ V /m)	Over Limit (dB)	Limit Line (dB μ V /m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2321.34	47.29	-26.71	74	42.48	32.23	6.8	34.22	126	165	Peak
2313.42	35.72	-18.28	54	30.93	32.21	6.8	34.22	126	165	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dB μ V /m)	Over Limit (dB)	Limit Line (dB μ V /m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2356.89	47.9	-26.1	74	43.01	32.26	6.88	34.25	100	308	Peak
2370.21	35.96	-18.04	54	31.07	32.28	6.88	34.27	100	308	Average



Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	64.35	-9.65	74	59.34	32.38	7.06	34.43	122	58	Peak
2483.5	61.47	*7.47	54	56.46	32.38	7.06	34.43	122	58	Average
2483.5	44.30	-29.70	74	-	-	-	-	-	-	Peak
2483.5	44.26	*-9.74	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	102.07	57.77	44.30	74	-29.70	Pass
Average	102.03	57.77	44.26	54	-9.74	Pass

Note:

1. Measurement result = Maximum field strength – Delta result
2. Delta-Marker Method is used for the 2483.5MHz average measurement as described in the test procedure of this report and the test result is under 9.74dB.

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	61.63	-12.37	74	56.62	32.38	7.06	34.43	158	104	Peak
2483.5	58.75	*4.75	54	53.74	32.38	7.06	34.43	158	104	Average
2483.5	43.21	-30.79	74	-	-	-	-	-	-	Peak
2483.5	42.19	*-11.81	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:


Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	99.20	55.99	43.21	74	-30.79	Pass
Average	98.18	55.99	42.19	54	-11.81	Pass

Note:

1. Measurement result = Maximum field strength – Delta result
2. Delta-Marker Method is used for the 2483.5MHz average measurement as described in the test procedure of this report and the test result is under 11.81dB.



Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal

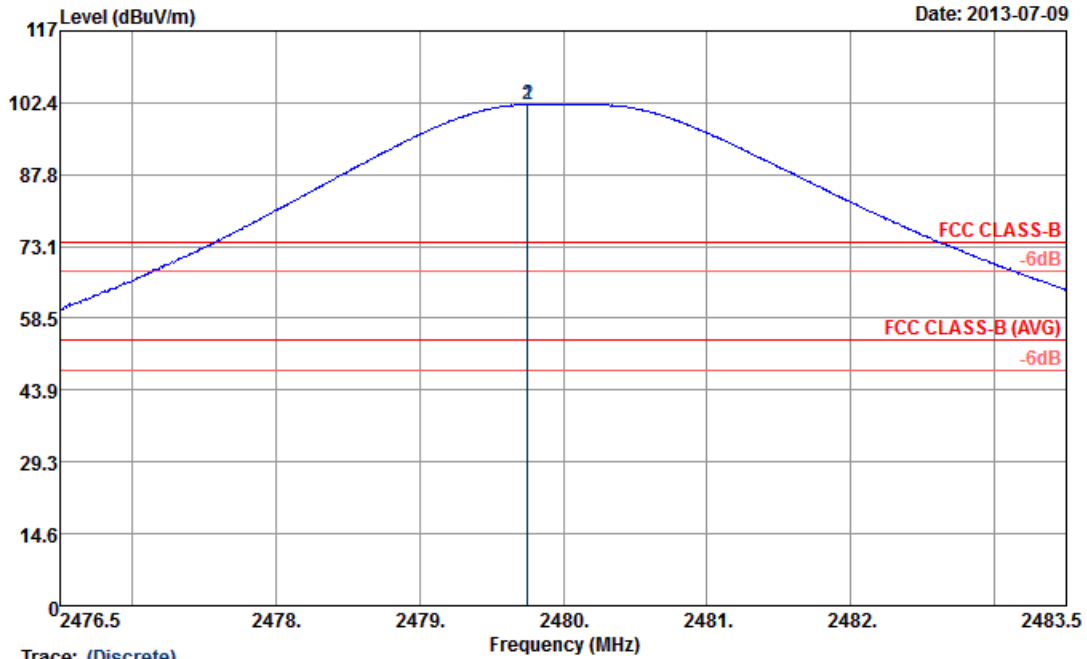


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
 : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2479.76	102.03	48.03	54.00	97.02	32.38	7.06	34.43	122	58	Average
2 *	2479.76	102.07	28.07	74.00	97.06	32.38	7.06	34.43	122	58	Peak

* Maximum field strength of the fundamental emission



Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal

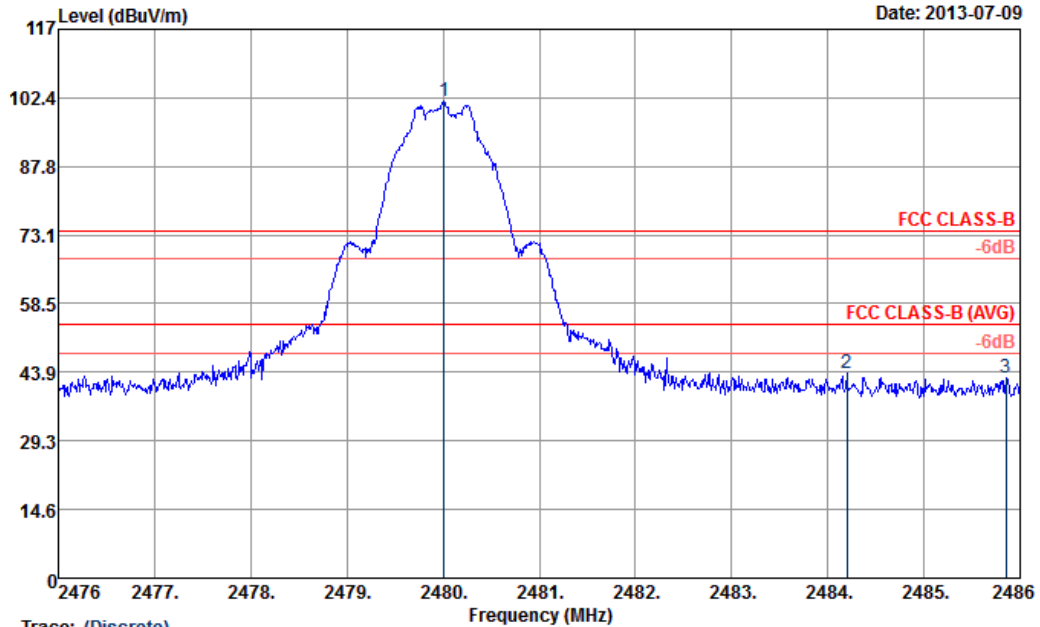


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
 : RBW:100.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	cm	deg	
1 *	2480.01	101.57	27.57	74.00	96.56	32.38	7.06	34.43	122	58	Peak
2	2484.20	43.80	-30.20	74.00	38.79	32.38	7.06	34.43	122	58	Peak
3	2485.85	42.84	-31.16	74.00	37.83	32.38	7.06	34.43	122	58	Peak

* Marker-Delta Method (RBW/VBW=100kHz): 57.77 dB , single carrier Mode



Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical

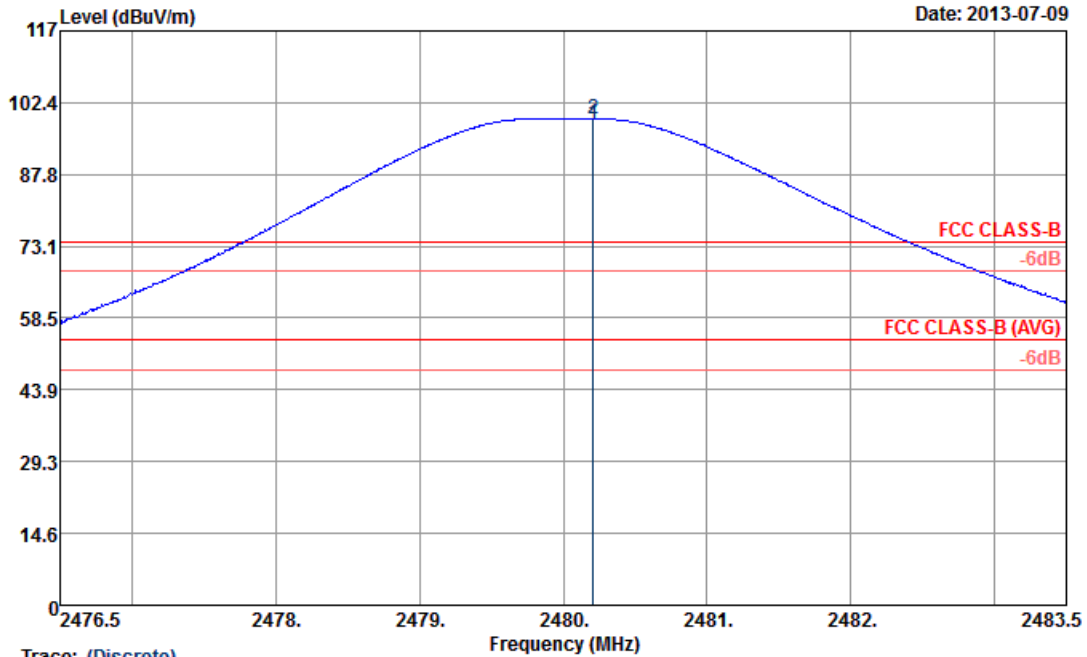


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
 : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.21	98.18	44.18	54.00	93.17	32.38	7.06	34.43	158	104	Average
2 *	2480.21	99.20	25.20	74.00	94.19	32.38	7.06	34.43	158	104	Peak

* Maximum field strength of the fundamental emission



Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical

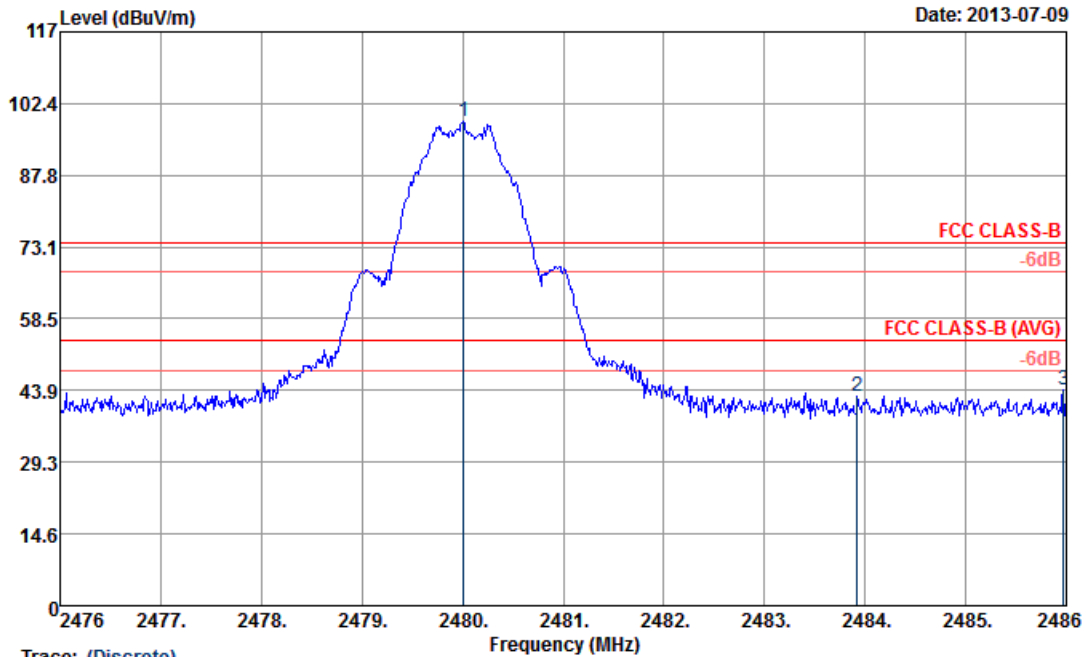

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_120823 VERTICAL
 : RBW:100.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.01	98.63	24.63	74.00	93.62	32.38	7.06	34.43	158	104	Peak
2	2483.92	42.64	-31.36	74.00	37.63	32.38	7.06	34.43	158	104	Peak
3	2485.97	43.93	-30.07	74.00	38.92	32.38	7.06	34.43	158	104	Peak

* Marker-Delta Method (RBW/VBW=100kHz): 55.99 dB , single carrier Mode



3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 101.82 dB μ V/m - 20dB = 81.82dB μ V/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
47.82	32.51	-7.49	40	53.74	9.3	0.67	31.2	125	40	Peak
147.99	26.59	-16.91	43.5	45.24	11.24	1.21	31.1	-	-	Peak
253.29	22.73	-23.27	46	39.54	12.64	1.55	31	-	-	Peak
435.8	20.48	-25.52	46	32.19	16.75	2.26	30.72	-	-	Peak
584.2	25.13	-20.87	46	33.63	19.52	2.64	30.66	-	-	Peak
803.3	24.52	-21.48	46	29.55	22.13	3.15	30.31	-	-	Peak
2402	100.81	-	-	95.9	32.3	6.91	34.3	126	165	Average
2402	101.82	-	-	96.9	32.31	6.91	34.3	126	165	Peak
4803	41.12	-32.88	74	57.35	33.98	8.75	58.96	100	0	Peak
7206	42.96	-38.86	81.82	54.22	35.56	10.81	57.63	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	29.75	-10.25	40	41.39	19.28	0.54	31.46	-	-	Peak
47.82	31.93	-8.07	40	53.16	9.3	0.67	31.2	122	83	Peak
214.95	20.27	-23.23	43.5	39.75	10.18	1.39	31.05	-	-	Peak
370.7	15.75	-30.25	46	29.51	15.21	2.08	31.05	-	-	Peak
584.2	23.8	-22.2	46	32.3	19.52	2.64	30.66	-	-	Peak
911.8	25.23	-20.77	46	28.91	23.27	3.37	30.32	-	-	Peak
2402	91.71	-	-	86.8	32.3	6.91	34.3	100	308	Average
2402	92.32	-	-	87.4	32.31	6.91	34.3	100	308	Peak
4803	41.37	-32.63	74	57.6	33.98	8.75	58.96	100	0	Peak
7206	43.1	-29.22	72.32	54.36	35.56	10.81	57.63	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	19	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	30.28	-9.72	40	41.92	19.28	0.54	31.46	142	80	Peak
47.82	29.63	-10.37	40	50.86	9.3	0.67	31.2	-	-	Peak
145.29	24.63	-18.87	43.5	43.23	11.29	1.21	31.1	-	-	Peak
456.8	20.79	-25.21	46	32.07	17.19	2.31	30.78	-	-	Peak
542.2	22.83	-23.17	46	32.26	18.81	2.53	30.77	-	-	Peak
855.8	25.79	-20.21	46	30.25	22.65	3.28	30.39	-	-	Peak
2440	101.25	-	-	96.26	32.35	6.99	34.35	102	161	Average
2440	102.12	-	-	97.13	32.35	6.99	34.35	102	161	Peak
4881	41.84	-32.16	74	57.87	33.95	8.85	58.83	100	0	Peak
7320	42.14	-31.86	74	53.44	35.53	10.91	57.74	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	19	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	29.08	-10.92	40	40.72	19.28	0.54	31.46	-	-	Peak
48.9	29.94	-10.06	40	51.56	8.9	0.68	31.2	147	63	Peak
213.6	20.88	-22.62	43.5	40.53	10.04	1.38	31.07	-	-	Peak
365.1	15.51	-30.49	46	29.46	15.06	2.07	31.08	-	-	Peak
584.2	23.1	-22.9	46	31.6	19.52	2.64	30.66	-	-	Peak
770.4	23.57	-22.43	46	29.19	21.65	3.09	30.36	-	-	Peak
2440	96.43	-	-	91.48	32.35	6.99	34.39	131	262	Average
2440	97.45	-	-	92.5	32.35	6.99	34.39	131	262	Peak
4881	42.6	-31.4	74	58.63	33.95	8.85	58.83	100	0	Peak
7320	42.8	-31.2	74	54.1	35.53	10.91	57.74	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2482 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
47.82	28.38	-11.62	40	49.61	9.3	0.67	31.2	128	22	Peak
152.04	23.7	-19.8	43.5	42.55	11.06	1.21	31.12	-	-	Peak
252.75	21.65	-24.35	46	38.46	12.64	1.55	31	-	-	Peak
382.6	17.63	-28.37	46	30.96	15.55	2.11	30.99	-	-	Peak
542.2	23.92	-22.08	46	33.35	18.81	2.53	30.77	-	-	Peak
820.1	23.98	-22.02	46	28.83	22.3	3.19	30.34	-	-	Peak
2482	102.04	-	-	97.03	32.38	7.06	34.43	122	58	Average
2482	102.25	-	-	97.24	32.38	7.06	34.43	122	58	Peak
4959	41.43	-32.57	74	57.26	33.91	8.92	58.66	100	0	Peak
7440	43.04	-30.96	74	54.34	35.51	11.04	57.85	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	28.66	-11.34	40	40.3	19.28	0.54	31.46	-	-	Peak
47.82	30.77	-9.23	40	52	9.3	0.67	31.2	142	27	Peak
213.87	20.72	-22.78	43.5	40.29	10.11	1.38	31.06	-	-	Peak
395.2	16.34	-29.66	46	29.26	15.87	2.13	30.92	-	-	Peak
605.9	22.51	-23.49	46	30.54	19.85	2.71	30.59	-	-	Peak
882.4	25.49	-20.51	46	29.58	22.93	3.32	30.34	-	-	Peak
2480	98.08	-	-	93.07	32.38	7.06	34.43	158	104	Average
2480	98.89	-	-	93.88	32.38	7.06	34.43	158	104	Peak
4959	41.3	-32.7	74	57.13	33.91	8.92	58.66	100	0	Peak
7440	42.63	-31.37	74	53.93	35.51	11.04	57.85	100	0	Peak

Note: Other harmonics are lower than background noise.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

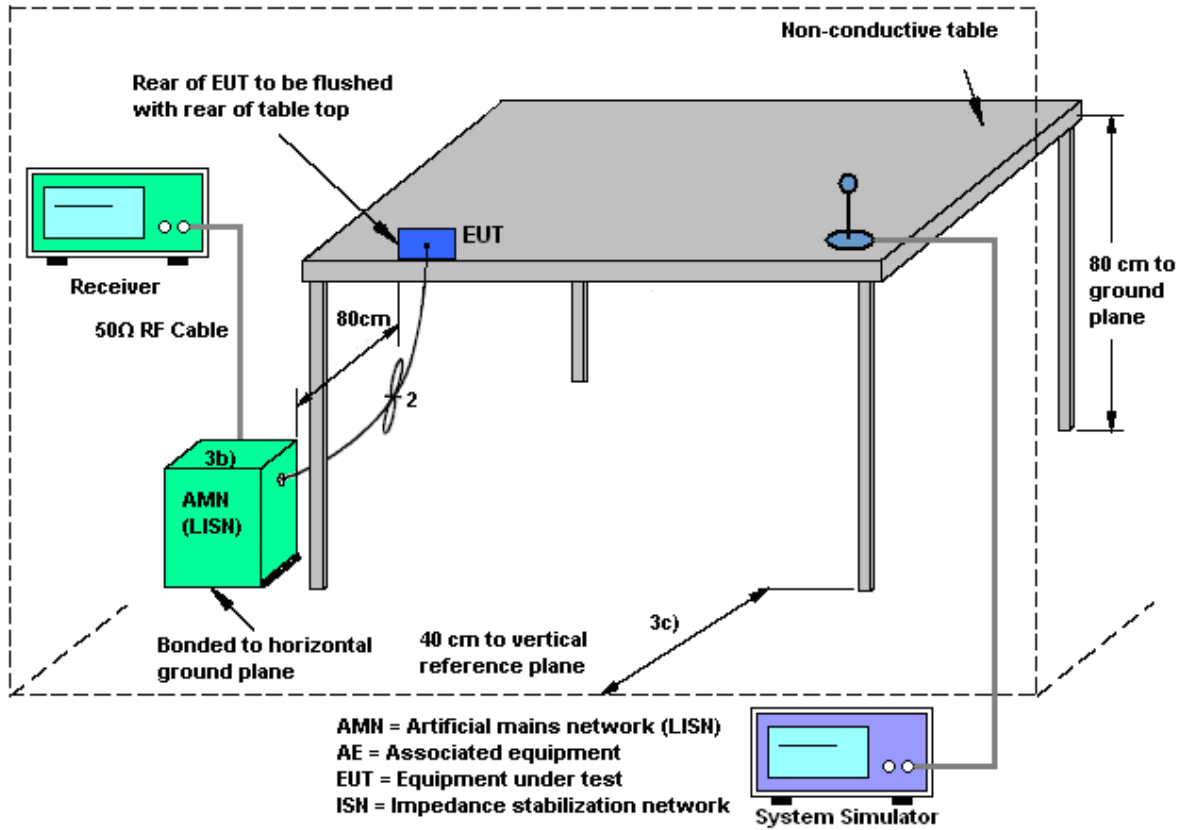

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + NFC active + Scanner + Battery 2 + USB Cable (USB File transfer) for Sample 1		

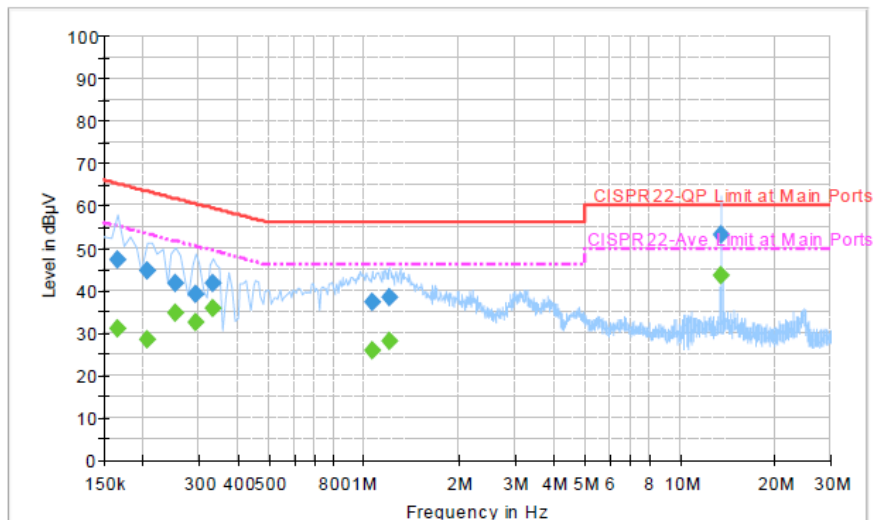


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	47.2	Off	L1	19.4	18.0	65.2
0.206000	44.6	Off	L1	19.4	18.8	63.4
0.254000	41.6	Off	L1	19.5	20.0	61.6
0.294000	39.3	Off	L1	19.4	21.1	60.4
0.334000	41.6	Off	L1	19.4	17.8	59.4
1.062000	37.3	Off	L1	19.4	18.7	56.0
1.206000	38.3	Off	L1	19.5	17.7	56.0
13.558000	53.3	Off	L1	19.8	6.7	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	31.1	Off	L1	19.4	24.1	55.2
0.206000	28.2	Off	L1	19.4	25.2	53.4
0.254000	34.7	Off	L1	19.5	16.9	51.6
0.294000	32.4	Off	L1	19.4	18.0	50.4
0.334000	35.7	Off	L1	19.4	13.7	49.4
1.062000	25.8	Off	L1	19.4	20.2	46.0
1.206000	28.2	Off	L1	19.5	17.8	46.0
13.558000	43.4	Off	L1	19.8	6.6	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + NFC active + Scanner + Battery 2 + USB Cable (USB File transfer) for Sample 1		

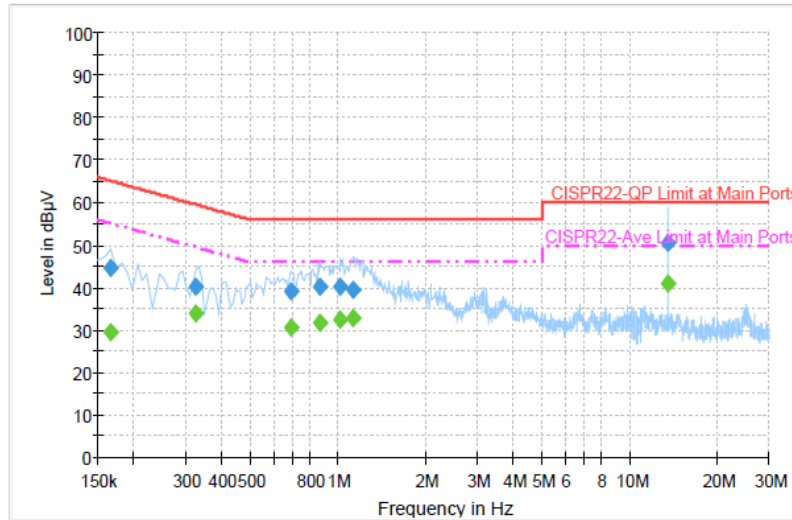

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	44.5	Off	N	19.4	20.7	65.2
0.326000	40.2	Off	N	19.4	19.4	59.6
0.694000	39.3	Off	N	19.5	16.7	56.0
0.870000	40.1	Off	N	19.5	15.9	56.0
1.022000	40.3	Off	N	19.4	15.7	56.0
1.126000	39.5	Off	N	19.5	16.5	56.0
13.558000	50.6	Off	N	19.9	9.4	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	29.5	Off	N	19.4	25.7	55.2
0.326000	34.0	Off	N	19.4	15.6	49.6
0.694000	30.5	Off	N	19.5	15.5	46.0
0.870000	31.9	Off	N	19.5	14.1	46.0
1.022000	32.5	Off	N	19.4	13.5	46.0
1.126000	32.8	Off	N	19.5	13.2	46.0
13.558000	41.1	Off	N	19.9	8.9	50.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA band V Idle + Bluetooth Link + WLAN (5G) Link + NFC active + Scanner + Battery 1 + USB Cable (USB File transfer) for Sample 1		

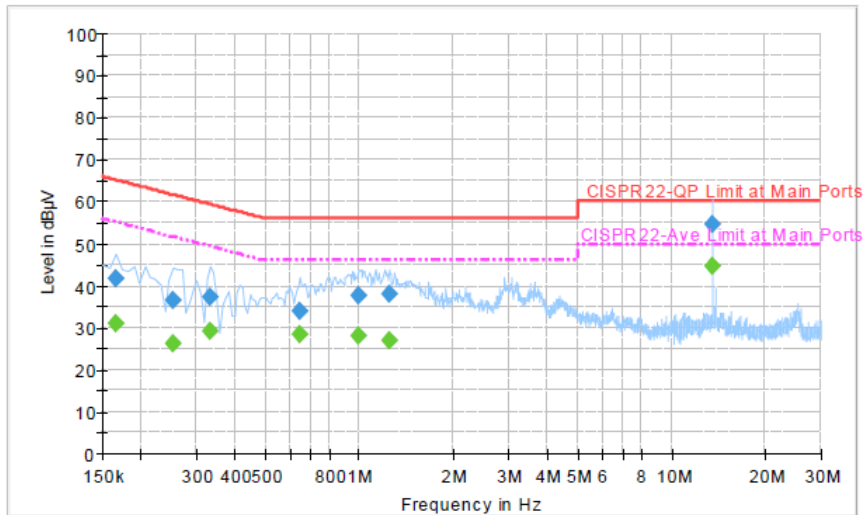

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	41.7	Off	L1	19.4	23.5	65.2
0.254000	36.4	Off	L1	19.5	25.2	61.6
0.334000	37.4	Off	L1	19.4	22.0	59.4
0.646000	34.0	Off	L1	19.4	22.0	56.0
0.998000	37.7	Off	L1	19.4	18.3	56.0
1.246000	38.0	Off	L1	19.5	18.0	56.0
13.558000	54.6	Off	L1	19.8	5.4	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	31.0	Off	L1	19.4	24.2	55.2
0.254000	26.3	Off	L1	19.5	25.3	51.6
0.334000	29.0	Off	L1	19.4	20.4	49.4
0.646000	28.4	Off	L1	19.4	17.6	46.0
0.998000	28.1	Off	L1	19.4	17.9	46.0
1.246000	26.9	Off	L1	19.5	19.1	46.0
13.558000	44.5	Off	L1	19.8	5.5	50.0



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA band V Idle + Bluetooth Link + WLAN (5G) Link + NFC active + Scanner + Battery 1 + USB Cable (USB File transfer) for Sample 1		

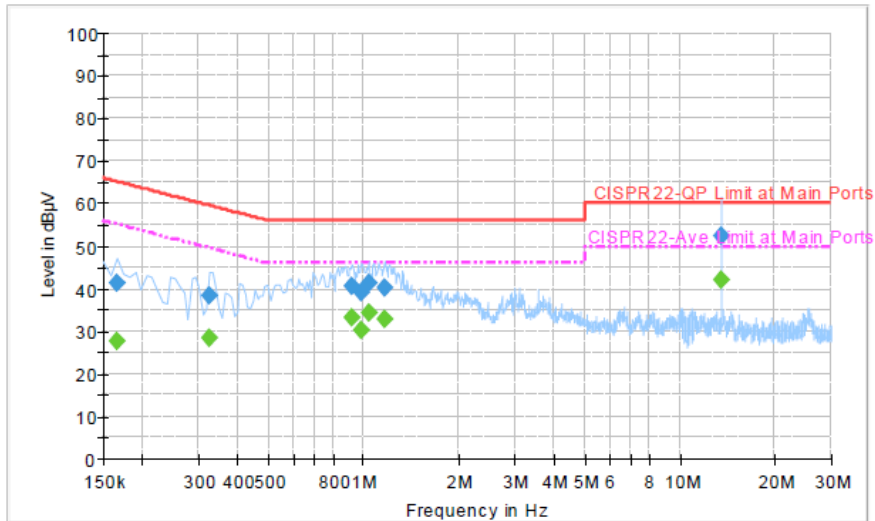


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	41.3	Off	N	19.4	23.9	65.2
0.326000	38.4	Off	N	19.4	21.2	59.6
0.918000	40.7	Off	N	19.4	15.3	56.0
0.982000	39.0	Off	N	19.5	17.0	56.0
1.038000	41.3	Off	N	19.5	14.7	56.0
1.166000	40.3	Off	N	19.5	15.7	56.0
13.558000	52.5	Off	N	19.9	7.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	27.8	Off	N	19.4	27.4	55.2
0.326000	28.3	Off	N	19.4	21.3	49.6
0.918000	33.1	Off	N	19.4	12.9	46.0
0.982000	30.2	Off	N	19.5	15.8	46.0
1.038000	34.2	Off	N	19.5	11.8	46.0
1.166000	32.8	Off	N	19.5	13.2	46.0
13.558000	42.2	Off	N	19.9	7.8	50.0

Test Mode :	Mode 3	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 5 Idle + Bluetooth Link + WLAN (5G) Link + NFC active + Battery 1 + USB Cable (USB File transfer) for Sample 2		

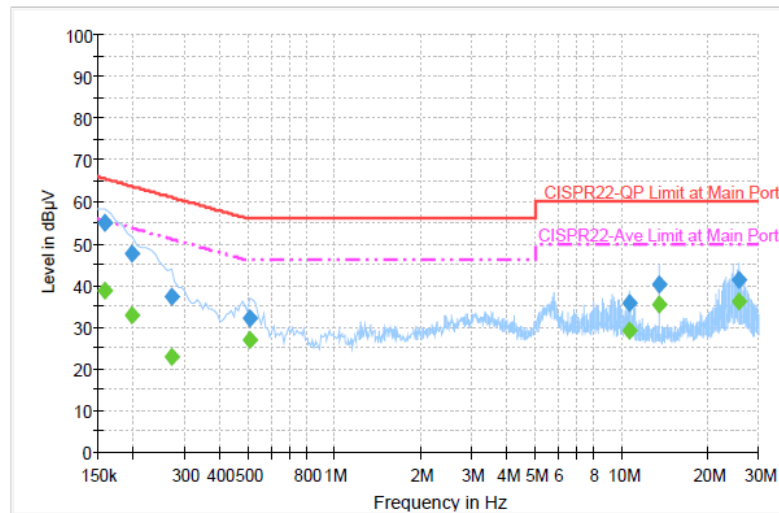


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	54.9	Off	L1	19.3	10.7	65.6
0.198000	47.8	Off	L1	19.3	15.9	63.7
0.270000	37.1	Off	L1	19.3	24.0	61.1
0.510000	32.1	Off	L1	19.4	23.9	56.0
10.638000	35.8	Off	L1	19.7	24.2	60.0
13.558000	40.4	Off	L1	19.8	19.6	60.0
25.574000	41.5	Off	L1	19.9	18.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	38.9	Off	L1	19.3	26.7	55.6
0.198000	32.7	Off	L1	19.3	21.0	53.7
0.270000	22.9	Off	L1	19.3	28.2	51.1
0.510000	27.0	Off	L1	19.4	19.0	46.0
10.638000	29.2	Off	L1	19.7	20.8	50.0
13.558000	35.5	Off	L1	19.8	14.5	50.0
25.574000	36.2	Off	L1	19.9	13.8	50.0

Test Mode :	Mode 3	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 5 Idle + Bluetooth Link + WLAN (5G) Link + NFC active + Battery 1 + USB Cable (USB File transfer) for Sample 2		

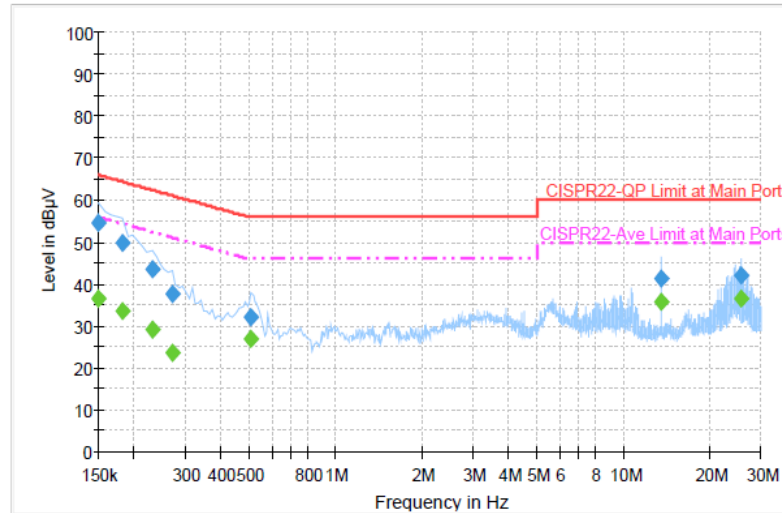

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	54.5	Off	N	19.4	11.5	66.0
0.182000	49.9	Off	N	19.4	14.5	64.4
0.230000	43.7	Off	N	19.4	18.7	62.4
0.270000	37.6	Off	N	19.4	23.5	61.1
0.510000	32.2	Off	N	19.4	23.8	56.0
13.558000	41.3	Off	N	19.9	18.7	60.0
25.574000	42.0	Off	N	20.0	18.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	36.7	Off	N	19.4	19.3	56.0
0.182000	33.5	Off	N	19.4	20.9	54.4
0.230000	29.1	Off	N	19.4	23.3	52.4
0.270000	23.5	Off	N	19.4	27.6	51.1
0.510000	27.0	Off	N	19.4	19.0	46.0
13.558000	35.8	Off	N	19.9	14.2	50.0
25.574000	36.6	Off	N	20.0	13.4	50.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Jun. 20, 2013~ Jun. 21, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Feb. 05, 2013	Jun. 20, 2013~ Jun. 21, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Feb. 05, 2013	Jun. 20, 2013~ Jun. 21, 2013	Feb. 04, 2014	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 13, 2012	Jun. 13, 2013	Nov. 12, 2013	Conduction (CO05-HY)
Two-LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2012	Jun. 13, 2013	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 06, 2012	Jun. 13, 2013	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Jun. 13, 2013	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9k~7G	Sep. 03, 2012	Jul. 09, 2013	Sep. 02, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9k~30G	Nov. 30, 2012	Jul. 09, 2013	Nov. 29, 2013	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30M~1G	Oct. 06, 2012	Jul. 09, 2013	Oct. 05, 2013	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1G~18G	Aug. 22, 2012	Jul. 09, 2013	Aug. 21, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18G~40G	Sep. 28, 2012	Jul. 09, 2013	Sep. 27, 2013	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30M~1G	Feb. 26, 2013	Jul. 09, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1G~26.5G	Dec. 01, 2012	Jul. 09, 2013	Nov. 30, 2013	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jul. 09, 2013	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Jul. 09, 2013	N/A	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/00 01	9 kHz~30 MHz	Jul. 03, 2012	Jul. 09, 2013	Jul. 02, 2014	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------