



Variant FCC RF Test Report

APPLICANT : Symbol Technologies, Inc.
EQUIPMENT : Touch Computer
BRAND NAME : Symbol
MODEL NAME : TC55AH
FCC ID : UZ7TC55AH
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

This is a variant report which is only valid together with the original test report. The product was received on Jun. 11, 2013 and testing was completed on Jun. 24, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Louis Wu / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant5

 1.2 Manufacturer.....5

 1.3 Feature of Equipment Under Test5

 1.4 Product Specification of Equipment Under Test.....6

 1.5 Modification of EUT6

 1.6 Testing Location6

 1.7 Applicable Standards.....6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....7

 2.1 Carrier Frequency and Channel7

 2.2 RF Power.....8

 2.3 Test Mode.....9

 2.4 Connection Diagram of Test System.....10

 2.5 EUT Operation Test Setup10

 2.6 Measurement Results Explanation Example.....10

3 TEST RESULT.....11

 3.1 6dB Bandwidth Measurement11

 3.2 Maximum Conducted Output Power Measurement13

 3.3 Power Spectral Density Measurement15

 3.4 Unwanted Emissions Measurement.....18

 3.5 Frequency Stability Measurement.....43

 3.6 Automatically Discontinue Transmission45

 3.7 Antenna Requirements.....46

4 LIST OF MEASURING EQUIPMENT47

5 UNCERTAINTY OF EVALUATION48

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|--|--------------------------------|--------|-------------------------------------|
| 3.1 | 15.403(i) | 6dB Bandwidth | > 500kHz | Pass | - |
| 3.2 | 15.407(a) | Maximum Conducted Output Power | ≤ 30 dBm | Pass | - |
| 3.3 | 15.407(a) | Power Spectral Density | ≤ 30 dBm/500kHz | Pass | - |
| 3.4 | 15.407(b) | Unwanted Emissions | ≤ -17, -27 dBm/MHz & 15.209(a) | Pass | Under limit 1.07 dB at 5724.040 MHz |
| 3.5 | 15.407(g) | Frequency Stability | Within Operation Band | Pass | - |
| 3.6 | 15.407(c) | Automatically Discontinue Transmission | Discontinue Transmission | Pass | - |
| 3.7 | 15.203 & 15.407(a) | Antenna Requirement | N/A | Pass | - |



1 General Description

1.1 Applicant

Symbol Technologies, Inc.
One Motorola Plaza, Holtsville, NY 11742-1300 USA

1.2 Manufacturer

Symbol Technologies, Inc.
One Motorola Plaza, Holtsville, NY 11742-1300 USA

1.3 Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|--|
| Equipment | Touch Computer |
| Brand Name | Symbol |
| Model Name | TC55AH |
| FCC ID | UZ7TC55AH |
| Sample 1 | EUT with Scanner |
| Sample 2 | EUT without Scanner |
| EUT supports Radios application | GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11b/g/n (HT20) WLAN 11a/n (HT20/HT40) Bluetooth v4.0 EDR/LE |
| HW Version | DV1 |
| SW Version | Android 4.1.2 |
| FW Version | BSP 1.27 |
| EUT Stage | Identical Prototype |

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. All tests were performed with sample 1.



1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard | |
|---|--|
| Tx/Rx Channel Frequency Range | 5725 MHz ~ 5850 MHz |
| Maximum Output Power | 802.11a : 16.63 dBm / 0.0460 W 802.11n HT20 : 15.44 dBm / 0.0350 W 802.11n HT40 : 14.24 dBm / 0.0265 W |
| Type of Modulation | OFDM (BPSK / QPSK / 16QAM / 64QAM) |
| Antenna Type | PIFA Antenna |
| Antenna Gain | 0.81 dBi (Battery 1) 1.30 dBi (Battery 2) |

Remark: The WLAN antenna is not changed while using battery cover 1 or 2. The antenna gain difference is due to antenna gain measurement result by using different battery covers.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

| | | |
|---------------------------|---|-----------|
| Test Site | SPORTON INTERNATIONAL INC. | |
| Test Site Location | No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978 | |
| Test Site No. | Sporton Site No. | |
| | TH02-HY | 03CH07-HY |

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ ANSI C63.4-2003

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|--------------------------------------|------------|-------------|------------|-------------|
| 5725-5850 MHz Band 4 (U-NII-3) | 149 | 5745 | 157 | 5785 |
| | 151 | 5755 | 159 | 5795 |
| | 153 | 5765 | 161 | 5805 |
| | 155 | 5775 | 165 | 5825 |

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables.

| Channel | Frequency | 5GHz 802.11a RF Power (dBm) | | | | | | | |
|---------|-----------|-----------------------------|--------|---------|---------|---------|---------|---------|---------|
| | | OFDM Data Rate | | | | | | | |
| | | 6M bps | 9M bps | 12M bps | 18M bps | 24M bps | 36M bps | 48M bps | 54M bps |
| CH 149 | 5745 MHz | 13.47 | 13.11 | 13.10 | 13.13 | 13.15 | 13.11 | 13.14 | 13.06 |
| CH 157 | 5785 MHz | 16.63 | 16.61 | 16.60 | 16.57 | 16.56 | 16.62 | 16.60 | 16.57 |
| CH 165 | 5825 MHz | 16.53 | 16.51 | 16.47 | 16.52 | 16.48 | 16.51 | 15.51 | 15.43 |

| Channel | Frequency | 5GHz 802.11n HT20 RF Power (dBm) | | | | | | | |
|---------|-----------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | OFDM Data Rate | | | | | | | |
| | | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
| CH 149 | 5745 MHz | 13.49 | 13.26 | 13.27 | 13.28 | 13.33 | 13.15 | 13.03 | 13.01 |
| CH 157 | 5785 MHz | 15.41 | 15.36 | 15.33 | 15.35 | 15.35 | 15.39 | 15.35 | 15.21 |
| CH 165 | 5825 MHz | 15.44 | 15.40 | 15.34 | 15.36 | 15.30 | 15.35 | 15.33 | 15.20 |

| Channel | Frequency | 5GHz 802.11n HT40 RF Power (dBm) | | | | | | | |
|---------|-----------|----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | OFDM Data Rate | | | | | | | |
| | | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
| CH 151 | 5755 MHz | 10.18 | 10.16 | 10.15 | 10.07 | 10.15 | 10.16 | 10.06 | 10.11 |
| CH 159 | 5795 MHz | 14.24 | 14.15 | 14.23 | 14.20 | 14.14 | 14.19 | 14.17 | 14.09 |



2.3 Test Mode


Final results of test modes, data rates and test channels are shown as following table.

| Test Cases | | | | | |
|---------------------|-------------------------------|---|--------------|--------------|-------|
| Conducted TCs | Test Items | Mode | Data rate | Test Channel | |
| | Radiated TCs | 6dB Bandwidth Power Spectral Density | 802.11a | 6 Mbps | L/M/H |
| 802.11n HT20 | | | MCS0 | L/M/H | |
| 802.11n HT40 | | | MCS0 | L/H | |
| Output Power | | 802.11a | 6 Mbps | L/M/H | |
| | | 802.11n HT20 | MCS0 | L/M/H | |
| | | 802.11n HT40 | MCS0 | L/H | |
| Frequency Stability | | 802.11a | 6 Mbps | L | |
| Radiated TCs | | Radiated Band Edge | 802.11a | 6 Mbps | L/H |
| | | | 802.11n HT20 | MCS0 | L/H |
| | 802.11n HT40 | | MCS0 | L/H | |
| | Radiated Spurious Emission | 802.11a | 6 Mbps | L/M/H | |
| | | 802.11n HT20 | MCS0 | L/M/H | |
| | | 802.11n HT40 | MCS0 | L/H | |

Remark: For Radiated TCs, all tests performed with Battery 2.

| Ch. # | | Band IV : 5725-5850 MHz | | |
|-------|--------|-------------------------|--------------|--------------|
| | | 802.11a | 802.11n HT20 | 802.11n HT40 |
| L | Low | 149 | 149 | 151 |
| M | Middle | 157 | 157 | - |
| H | High | 165 | 165 | 159 |

2.4 Connection Diagram of Test System

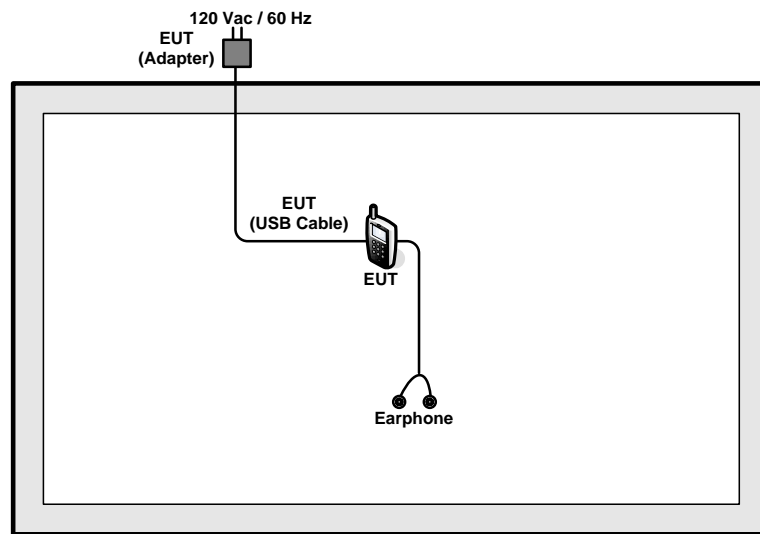

2.5 EUT Operation Test Setup

The programmed RF utility “QRCT”, is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Description of 6dB Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

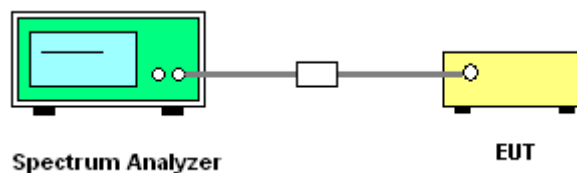




3.1.5 Test Result of 6dB Bandwidth

| | | | |
|-----------------|-------------|---------------------|---------|
| Test Band : | 5GHz band 4 | Temperature : | 21~26°C |
| Test Engineer : | Bill Kuo | Relative Humidity : | 45~54% |

| Mod. | Data Rate | N _{TX} | Channel | Freq. (MHz) | 6 dB Bandwidth (MHz) | FCC 6 dB Bandwidth Min. Limit (MHz) | Pass/Fail |
|------|-----------|-----------------|---------|-------------|----------------------|-------------------------------------|-----------|
| 11a | 6Mbps | 1 | 149 | 5745 | 16.32 | 0.5 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 16.32 | 0.5 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 16.32 | 0.5 | Pass |
| HT20 | MCS0 | 1 | 149 | 5745 | 17.56 | 0.5 | Pass |
| HT20 | MCS0 | 1 | 157 | 5785 | 17.56 | 0.5 | Pass |
| HT20 | MCS0 | 1 | 165 | 5825 | 17.54 | 0.5 | Pass |
| HT40 | MCS0 | 1 | 151 | 5755 | 35.12 | 0.5 | Pass |
| HT40 | MCS0 | 1 | 159 | 5795 | 35.44 | 0.5 | Pass |

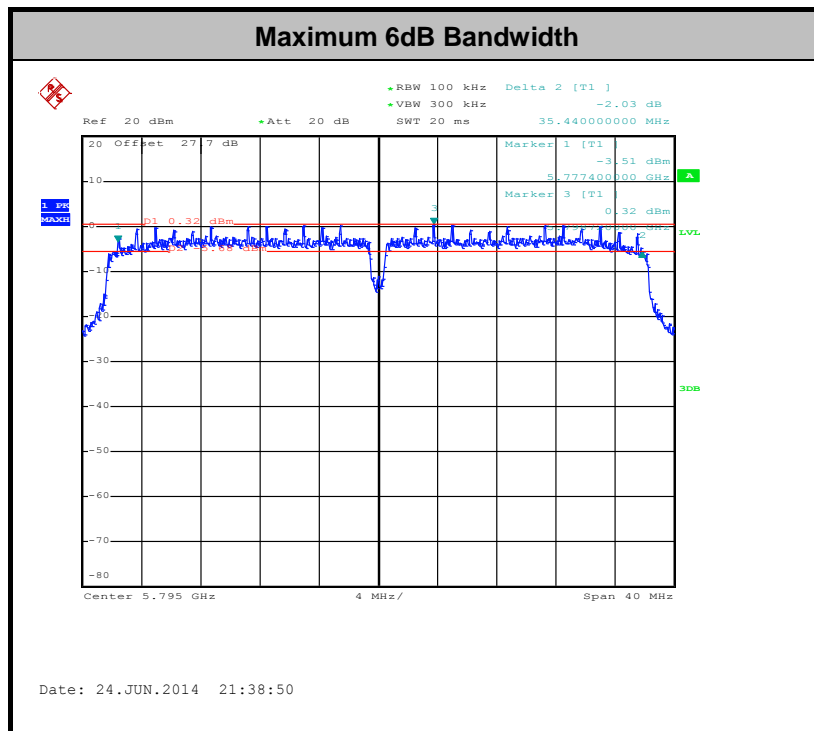

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

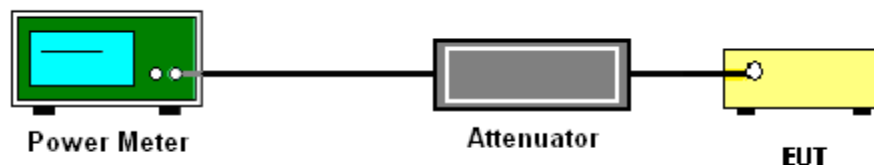



3.2.5 Test Result of Maximum Conducted Output Power

| | | | |
|-----------------|-------------|---------------------|---------|
| Test Band : | 5GHz band 4 | Temperature : | 21~26°C |
| Test Engineer : | Bill Kuo | Relative Humidity : | 45~54% |

| Mod. | Data Rate | Ntx | Channel | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | Pass /Fail |
|------|-----------|-----|---------|-------------|------------------|-------------------------------|---------------------------------|----------|------------|
| 11a | 6Mbps | 1 | 149 | 5745 | 0.59 | 13.47 | 30.00 | 1.30 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 0.59 | 16.63 | 30.00 | 1.30 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 0.59 | 16.53 | 30.00 | 1.30 | Pass |
| HT20 | MCS0 | 1 | 149 | 5745 | 0.63 | 13.49 | 30.00 | 1.30 | Pass |
| HT20 | MCS0 | 1 | 157 | 5785 | 0.63 | 15.41 | 30.00 | 1.30 | Pass |
| HT20 | MCS0 | 1 | 165 | 5825 | 0.63 | 15.44 | 30.00 | 1.30 | Pass |
| HT40 | MCS0 | 1 | 151 | 5755 | 0.63 | 10.18 | 30.00 | 1.30 | Pass |
| HT40 | MCS0 | 1 | 159 | 5795 | 0.63 | 14.24 | 30.00 | 1.30 | Pass |



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

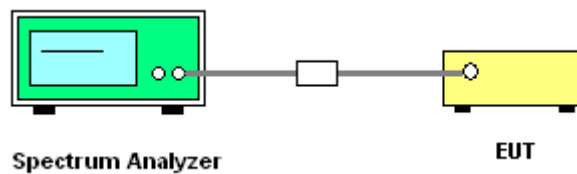




3.3.5 Test Result of Power Spectral Density

| | | | |
|-----------------|-------------|---------------------|---------|
| Test Band : | 5GHz band 4 | Temperature : | 21~26°C |
| Test Engineer : | Bill Kuo | Relative Humidity : | 45~54% |

| Mod. | Data Rate | N _{TX} | Channel | Freq. (MHz) | Duty Factor (dB) | 10log (500kHz /RBW) Factor (dB) | Average Power Density (dBm/500kHz) | Average PSD Limit (dBm/500kHz) | DG (dBi) | Pass /Fail |
|------|-----------|-----------------|---------|-------------|------------------|---------------------------------|------------------------------------|--------------------------------|----------|------------|
| 11a | 6Mbps | 1 | 149 | 5745 | 0.59 | 2.22 | -2.91 | 30.00 | 1.30 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 0.59 | 2.22 | 0.72 | 30.00 | 1.30 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 0.59 | 2.22 | -0.02 | 30.00 | 1.30 | Pass |
| HT20 | MCS0 | 1 | 149 | 5745 | 0.63 | 2.22 | -3.02 | 30.00 | 1.30 | Pass |
| HT20 | MCS0 | 1 | 157 | 5785 | 0.63 | 2.22 | -0.55 | 30.00 | 1.30 | Pass |
| HT20 | MCS0 | 1 | 165 | 5825 | 0.63 | 2.22 | -0.60 | 30.00 | 1.30 | Pass |
| HT40 | MCS0 | 1 | 151 | 5755 | 0.63 | 2.22 | -8.99 | 30.00 | 1.30 | Pass |
| HT40 | MCS0 | 1 | 159 | 5795 | 0.63 | 2.22 | -4.60 | 30.00 | 1.30 | Pass |

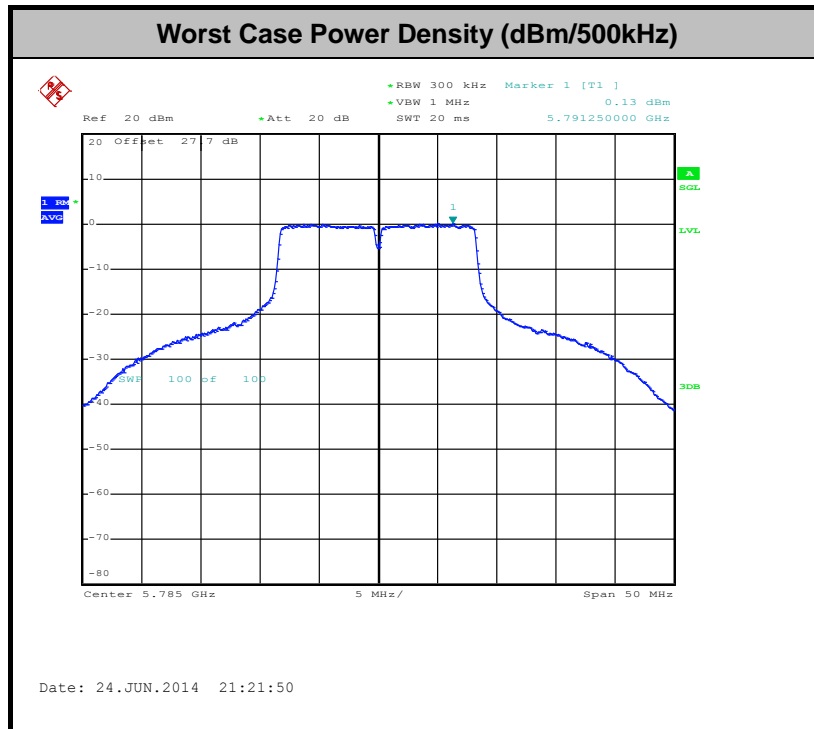



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBµV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBµV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

| EIRP (dBm) | Field Strength at 3m (dBµV/m) |
|------------|-------------------------------|
| -17 | 78.3 |
| - 27 | 68.3 |

- (3) KDB789033 v01r03 H)2)c)(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold



(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

| Antenna | Band | Duty Cycle(%) | T(us) | 1/T(kHz) | VBW Setting |
|---------|--------------|---------------|---------|----------|-------------|
| 1 | 802.11a | 87.26 | 1370.00 | 0.73 | 1kHz |
| 1 | 802.11n HT20 | 86.49 | 1280.00 | 0.78 | 1kHz |
| 1 | 802.11n HT40 | 86.49 | 640.00 | 1.56 | 3kHz |


- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
- For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
- For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

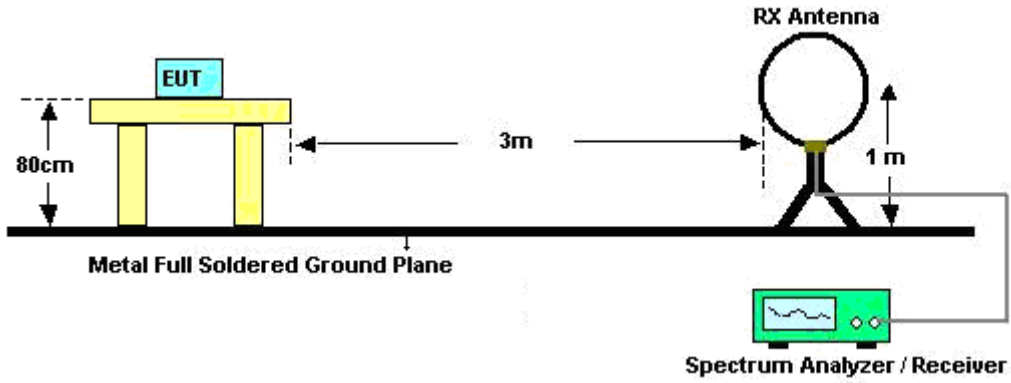

For radiated emissions from 30MHz to 1GHz

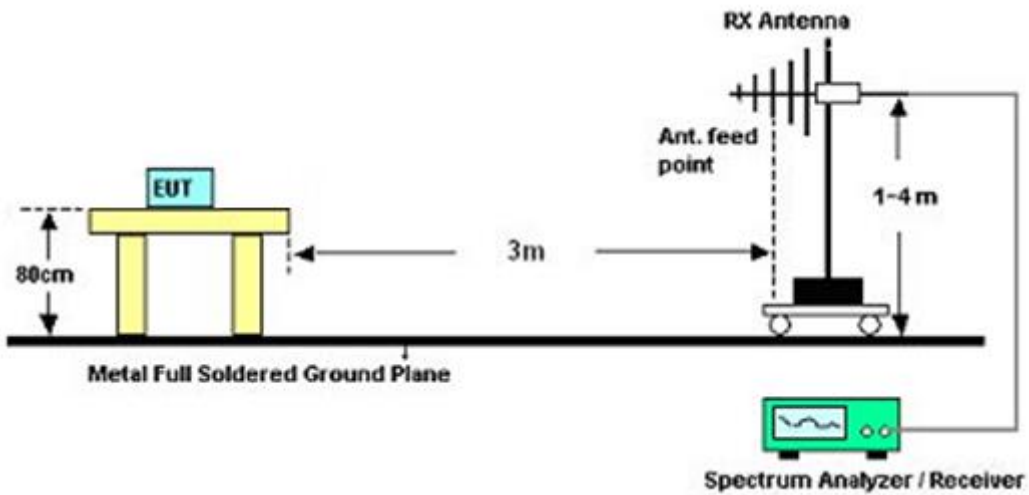

For radiated emissions above 1GHz

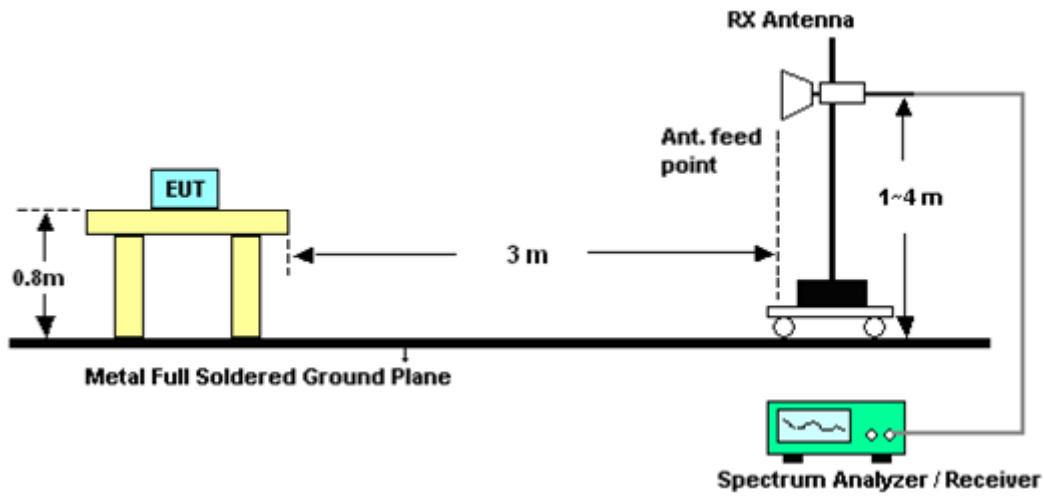

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.4.6 Test Result of Radiated Band Edges

| | | | |
|-----------------|------------|---------------------|---------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 149 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | | |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5711.88 | 59.17 | -9.13 | 68.3 | 48.08 | 35.22 | 10.02 | 34.15 | 148 | 247 | Peak |
| 5724.12 | 76.32 | -1.98 | 78.3 | 65.2 | 35.23 | 10.04 | 34.15 | 148 | 247 | Peak |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5713.88 | 57.92 | -10.38 | 68.3 | 46.83 | 35.22 | 10.02 | 34.15 | 142 | 255 | Peak |
| 5724.92 | 74.33 | -3.97 | 78.3 | 63.21 | 35.23 | 10.04 | 34.15 | 142 | 255 | Peak |

| | | | |
|-----------------|------------|---------------------|---------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 165 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | | |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5851.84 | 73.08 | -5.22 | 78.3 | 61.95 | 35.31 | 10.13 | 34.31 | 100 | 148 | Peak |
| 5860.24 | 66.87 | -1.43 | 68.3 | 55.75 | 35.32 | 10.15 | 34.35 | 100 | 148 | Peak |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|------------------|-------------------|-----------------------|---------------------|-----------------------|-------------------|----------------------|----------------|-------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5850.96 | 74.96 | -3.34 | 78.3 | 63.83 | 35.31 | 10.13 | 34.31 | 179 | 113 | Peak |
| 5861.84 | 66.83 | -1.47 | 68.3 | 55.71 | 35.32 | 10.15 | 34.35 | 179 | 113 | Peak |



| | | | |
|-----------------|--------------|---------------------|---------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 149 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | | |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5713.48 | 60.24 | -8.06 | 68.3 | 49.15 | 35.22 | 10.02 | 34.15 | 147 | 256 | Peak |
| 5724.92 | 75.91 | -2.39 | 78.3 | 64.79 | 35.23 | 10.04 | 34.15 | 147 | 256 | Peak |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5714.76 | 61.03 | -7.27 | 68.3 | 49.94 | 35.22 | 10.02 | 34.15 | 141 | 255 | Peak |
| 5724.04 | 77.23 | -1.07 | 78.3 | 66.11 | 35.23 | 10.04 | 34.15 | 141 | 255 | Peak |

| | | | |
|-----------------|--------------|---------------------|---------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 165 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | | |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5850.8 | 73.65 | -4.65 | 78.3 | 62.52 | 35.31 | 10.13 | 34.31 | 144 | 262 | Peak |
| 5861.2 | 66.77 | -1.53 | 68.3 | 55.65 | 35.32 | 10.15 | 34.35 | 144 | 262 | Peak |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5850.08 | 73.71 | -4.59 | 78.3 | 62.58 | 35.31 | 10.13 | 34.31 | 158 | 278 | Peak |
| 5860.56 | 67.17 | -1.13 | 68.3 | 56.05 | 35.32 | 10.15 | 34.35 | 158 | 278 | Peak |



| | | | |
|-----------------|--------------|---------------------|---------|
| Test Mode : | 802.11n HT40 | Temperature : | 23~25°C |
| Test Channel : | 151 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | | |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5714.92 | 64.58 | -3.72 | 68.3 | 53.49 | 35.22 | 10.02 | 34.15 | 124 | 223 | Peak |
| 5724.6 | 69.54 | -8.76 | 78.3 | 58.42 | 35.23 | 10.04 | 34.15 | 124 | 223 | Peak |
| 5857.36 | 54.61 | -23.69 | 78.3 | 43.47 | 35.32 | 10.13 | 34.31 | 124 | 223 | Peak |
| 5875.12 | 54.38 | -13.92 | 68.3 | 43.25 | 35.33 | 10.15 | 34.35 | 124 | 223 | Peak |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5714.84 | 65.87 | -2.43 | 68.3 | 54.78 | 35.22 | 10.02 | 34.15 | 156 | 268 | Peak |
| 5725 | 70.94 | -7.36 | 78.3 | 59.82 | 35.23 | 10.04 | 34.15 | 156 | 268 | Peak |
| 5859.12 | 53.85 | -24.45 | 78.3 | 42.75 | 35.32 | 10.13 | 34.35 | 156 | 268 | Peak |
| 5868.8 | 55.07 | -13.23 | 68.3 | 43.95 | 35.32 | 10.15 | 34.35 | 156 | 268 | Peak |



| | | | |
|-----------------|--------------|---------------------|---------|
| Test Mode : | 802.11n HT40 | Temperature : | 23~25°C |
| Test Channel : | 159 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | | |

| ANTENNA POLARITY : HORIZONTAL | | | | | | | | | | |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5706.68 | 56.6 | -11.7 | 68.3 | 45.51 | 35.22 | 10.02 | 34.15 | 135 | 263 | Peak |
| 5723.24 | 57.94 | -20.36 | 78.3 | 46.82 | 35.23 | 10.04 | 34.15 | 135 | 263 | Peak |
| 5850.72 | 62.35 | -15.95 | 78.3 | 51.22 | 35.31 | 10.13 | 34.31 | 135 | 263 | Peak |
| 5864.08 | 62.03 | -6.27 | 68.3 | 50.91 | 35.32 | 10.15 | 34.35 | 135 | 263 | Peak |

| ANTENNA POLARITY : VERTICAL | | | | | | | | | | |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
| 5710.28 | 56.97 | -11.33 | 68.3 | 45.88 | 35.22 | 10.02 | 34.15 | 161 | 249 | Peak |
| 5719.48 | 59.48 | -18.82 | 78.3 | 48.36 | 35.23 | 10.04 | 34.15 | 161 | 249 | Peak |
| 5850.48 | 62.43 | -15.87 | 78.3 | 51.3 | 35.31 | 10.13 | 34.31 | 161 | 249 | Peak |
| 5861.76 | 60.31 | -7.99 | 68.3 | 49.19 | 35.32 | 10.15 | 34.35 | 161 | 249 | Peak |



3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

| | | | |
|-----------------|--|---------------------|------------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 149 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5747 MHz is fundamental signal which can be ignored.. 2. 17235 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 81.3 | 20.06 | -19.94 | 40 | 42.55 | 7.79 | 0.89 | 31.17 | - | - | Peak |
| 133.68 | 23.64 | -19.86 | 43.5 | 42.05 | 11.52 | 1.17 | 31.1 | - | - | Peak |
| 222.24 | 24.85 | -21.15 | 46 | 43.77 | 10.65 | 1.43 | 31 | - | - | Peak |
| 333.6 | 23 | -23 | 46 | 37.92 | 14.22 | 1.86 | 31 | - | - | Peak |
| 604.5 | 26.23 | -19.77 | 46 | 34.29 | 19.83 | 2.7 | 30.59 | - | - | Peak |
| 902.7 | 30.01 | -15.99 | 46 | 33.83 | 23.14 | 3.35 | 30.31 | 163 | 75 | Peak |
| 5747 | 95.86 | - | - | 84.73 | 35.24 | 10.06 | 34.17 | 148 | 247 | Average |
| 5747 | 105.3 | - | - | 94.17 | 35.24 | 10.06 | 34.17 | 148 | 247 | Peak |
| 11490 | 46.3 | -27.7 | 74 | 50.75 | 38.19 | 14.33 | 56.97 | 100 | 0 | Peak |
| 17235 | 49.74 | -18.56 | 68.3 | 47.12 | 42.21 | 16.6 | 56.19 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 149 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5747 MHz is fundamental signal which can be ignored.. 2. 17235 MHz is not within a restricted band, and satisfies 68.3 dB μ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dB μ V/m) | Over Limit (dB) | Limit Line (dB μ V/m) | Read Level (dB μ V) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------------|-------------------------|-----------------------------------|---------------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 58.08 | 22.03 | -17.97 | 40 | 46.04 | 6.5 | 0.75 | 31.26 | 100 | 95 | Peak |
| 159.6 | 24.33 | -19.17 | 43.5 | 43.81 | 10.5 | 1.22 | 31.2 | - | - | Peak |
| 280.56 | 23.99 | -22.01 | 46 | 40.22 | 13.03 | 1.64 | 30.9 | - | - | Peak |
| 303.5 | 22.05 | -23.95 | 46 | 37.87 | 13.4 | 1.78 | 31 | - | - | Peak |
| 530.3 | 25.12 | -20.88 | 46 | 34.72 | 18.61 | 2.51 | 30.72 | - | - | Peak |
| 899.9 | 25.4 | -20.6 | 46 | 29.26 | 23.1 | 3.34 | 30.3 | - | - | Peak |
| 5747 | 93.9 | - | - | 82.77 | 35.24 | 10.06 | 34.17 | 142 | 255 | Average |
| 5747 | 103.97 | - | - | 92.84 | 35.24 | 10.06 | 34.17 | 142 | 255 | Peak |
| 11490 | 47.9 | -26.1 | 74 | 52.35 | 38.19 | 14.33 | 56.97 | 100 | 0 | Peak |
| 17235 | 49.84 | -18.46 | 68.3 | 47.22 | 42.21 | 16.6 | 56.19 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 157 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5783 MHz is fundamental signal which can be ignored.. 2. 17346 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.16 | 25.54 | -14.46 | 40 | 37.85 | 18.56 | 0.55 | 31.42 | 100 | 129 | Peak |
| 98.31 | 14.53 | -28.97 | 43.5 | 35.08 | 9.56 | 0.99 | 31.1 | - | - | Peak |
| 156.9 | 21.98 | -21.52 | 43.5 | 41.22 | 10.71 | 1.22 | 31.17 | - | - | Peak |
| 351.1 | 19.41 | -26.59 | 46 | 33.79 | 14.69 | 1.98 | 31.05 | - | - | Peak |
| 666.8 | 25.74 | -20.26 | 46 | 33.01 | 20.33 | 2.87 | 30.47 | - | - | Peak |
| 871.9 | 27.52 | -18.48 | 46 | 31.75 | 22.82 | 3.3 | 30.35 | - | - | Peak |
| 5783 | 99.49 | - | - | 88.38 | 35.27 | 10.07 | 34.23 | 135 | 251 | Average |
| 5783 | 109.62 | - | - | 98.51 | 35.27 | 10.07 | 34.23 | 135 | 251 | Peak |
| 11565 | 47.26 | -26.74 | 74 | 51.4 | 38.27 | 14.41 | 56.82 | 100 | 0 | Peak |
| 17346 | 51.37 | -16.93 | 68.3 | 48.72 | 42.12 | 16.75 | 56.22 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 157 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5783 MHz is fundamental signal which can be ignored.. 2. 17346 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30.27 | 22.73 | -17.27 | 40 | 33.7 | 20 | 0.53 | 31.5 | - | - | Peak |
| 79.95 | 24.81 | -15.19 | 40 | 47.56 | 7.57 | 0.88 | 31.2 | 100 | 72 | Peak |
| 195.78 | 20.57 | -22.93 | 43.5 | 41.31 | 9.06 | 1.3 | 31.1 | - | - | Peak |
| 423.9 | 22.24 | -23.76 | 46 | 34.3 | 16.5 | 2.22 | 30.78 | - | - | Peak |
| 646.5 | 25.32 | -20.68 | 46 | 32.83 | 20.17 | 2.83 | 30.51 | - | - | Peak |
| 880.3 | 29.31 | -16.69 | 46 | 33.43 | 22.91 | 3.31 | 30.34 | - | - | Peak |
| 5783 | 96.57 | - | - | 85.46 | 35.27 | 10.07 | 34.23 | 144 | 268 | Average |
| 5783 | 107.12 | - | - | 96.01 | 35.27 | 10.07 | 34.23 | 144 | 268 | Peak |
| 11565 | 49.04 | -24.96 | 74 | 53.18 | 38.27 | 14.41 | 56.82 | 100 | 0 | Peak |
| 17346 | 50.26 | -18.04 | 68.3 | 47.61 | 42.12 | 16.75 | 56.22 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 165 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5825 MHz is fundamental signal which can be ignored.. 2. 17475 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 37.29 | 23.43 | -16.57 | 40 | 39.41 | 14.66 | 0.6 | 31.24 | 106 | 169 | Peak |
| 100.47 | 19.28 | -24.22 | 43.5 | 39.49 | 9.89 | 1 | 31.1 | - | - | Peak |
| 288.66 | 21.49 | -24.51 | 46 | 37.71 | 13.15 | 1.69 | 31.06 | - | - | Peak |
| 369.3 | 23.29 | -22.71 | 46 | 37.08 | 15.19 | 2.08 | 31.06 | - | - | Peak |
| 631.1 | 26.5 | -19.5 | 46 | 34.21 | 20.05 | 2.78 | 30.54 | - | - | Peak |
| 875.4 | 23.89 | -22.11 | 46 | 28.07 | 22.86 | 3.31 | 30.35 | - | - | Peak |
| 5825 | 99.03 | - | - | 87.89 | 35.3 | 10.11 | 34.27 | 132 | 238 | Average |
| 5825 | 108.84 | - | - | 97.7 | 35.3 | 10.11 | 34.27 | 132 | 238 | Peak |
| 11649 | 46.59 | -27.41 | 74 | 50.29 | 38.39 | 14.52 | 56.61 | 100 | 0 | Peak |
| 17475 | 50.84 | -17.46 | 68.3 | 48.17 | 42.03 | 16.89 | 56.25 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11a | Temperature : | 23~25°C |
| Test Channel : | 165 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5825 MHz is fundamental signal which can be ignored.. 2. 17475 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30.54 | 25.01 | -14.99 | 40 | 36.65 | 19.28 | 0.54 | 31.46 | 100 | 345 | Peak |
| 78.87 | 24.18 | -15.82 | 40 | 47.06 | 7.45 | 0.87 | 31.2 | - | - | Peak |
| 134.22 | 24.23 | -19.27 | 43.5 | 42.64 | 11.52 | 1.17 | 31.1 | - | - | Peak |
| 412 | 20.82 | -25.18 | 46 | 33.22 | 16.26 | 2.18 | 30.84 | - | - | Peak |
| 638.8 | 24.35 | -21.65 | 46 | 31.95 | 20.11 | 2.81 | 30.52 | - | - | Peak |
| 920.2 | 27.87 | -18.13 | 46 | 31.41 | 23.41 | 3.39 | 30.34 | - | - | Peak |
| 5825 | 99.75 | - | - | 88.61 | 35.3 | 10.11 | 34.27 | 141 | 261 | Average |
| 5825 | 109.08 | - | - | 97.94 | 35.3 | 10.11 | 34.27 | 141 | 261 | Peak |
| 11649 | 47.86 | -26.14 | 74 | 51.56 | 38.39 | 14.52 | 56.61 | 100 | 0 | Peak |
| 17475 | 51.36 | -16.94 | 68.3 | 48.69 | 42.03 | 16.89 | 56.25 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 149 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5745 MHz is fundamental signal which can be ignored.. 2. 17235 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30.54 | 22.69 | -17.31 | 40 | 34.33 | 19.28 | 0.54 | 31.46 | 116 | 85 | Peak |
| 146.37 | 22.67 | -20.83 | 43.5 | 41.29 | 11.27 | 1.21 | 31.1 | - | - | Peak |
| 214.95 | 22.38 | -21.12 | 43.5 | 41.86 | 10.18 | 1.39 | 31.05 | - | - | Peak |
| 322.4 | 19.23 | -26.77 | 46 | 34.51 | 13.9 | 1.82 | 31 | - | - | Peak |
| 426.7 | 24.21 | -21.79 | 46 | 36.18 | 16.57 | 2.23 | 30.77 | - | - | Peak |
| 727.7 | 24.46 | -21.54 | 46 | 30.84 | 21.01 | 3.01 | 30.4 | - | - | Peak |
| 5745 | 95.55 | - | - | 84.42 | 35.24 | 10.06 | 34.17 | 147 | 256 | Average |
| 5745 | 104.84 | - | - | 93.71 | 35.24 | 10.06 | 34.17 | 147 | 256 | Peak |
| 11490 | 46.87 | -27.13 | 74 | 51.32 | 38.19 | 14.33 | 56.97 | 100 | 0 | Peak |
| 17235 | 49.57 | -18.73 | 68.3 | 46.95 | 42.21 | 16.6 | 56.19 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 149 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5744 MHz is fundamental signal which can be ignored.. 2. 17235 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30 | 21.64 | -18.36 | 40 | 32.61 | 20 | 0.53 | 31.5 | - | - | Peak |
| 76.17 | 22.2 | -17.8 | 40 | 45.35 | 7.19 | 0.86 | 31.2 | 155 | 123 | Peak |
| 128.82 | 23.12 | -20.38 | 43.5 | 41.46 | 11.62 | 1.14 | 31.1 | - | - | Peak |
| 426.7 | 20.73 | -25.27 | 46 | 32.7 | 16.57 | 2.23 | 30.77 | - | - | Peak |
| 748 | 24.3 | -21.7 | 46 | 30.33 | 21.31 | 3.06 | 30.4 | - | - | Peak |
| 961.5 | 26.84 | -27.16 | 54 | 29.7 | 24.02 | 3.47 | 30.35 | - | - | Peak |
| 5744 | 96.3 | - | - | 85.17 | 35.24 | 10.06 | 34.17 | 141 | 255 | Average |
| 5744 | 105.94 | - | - | 94.81 | 35.24 | 10.06 | 34.17 | 141 | 255 | Peak |
| 11490 | 47.52 | -26.48 | 74 | 51.97 | 38.19 | 14.33 | 56.97 | 100 | 0 | Peak |
| 17235 | 49.72 | -18.58 | 68.3 | 47.1 | 42.21 | 16.6 | 56.19 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 157 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5785 MHz is fundamental signal which can be ignored.. 2. 17355 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 31.89 | 24.47 | -15.53 | 40 | 36.78 | 18.56 | 0.55 | 31.42 | 149 | 325 | Peak |
| 154.2 | 23.72 | -19.78 | 43.5 | 42.74 | 10.92 | 1.21 | 31.15 | - | - | Peak |
| 245.19 | 19.11 | -26.89 | 46 | 36.32 | 12.26 | 1.53 | 31 | - | - | Peak |
| 442.1 | 24.71 | -21.29 | 46 | 36.25 | 16.89 | 2.28 | 30.71 | - | - | Peak |
| 644.4 | 25.91 | -20.09 | 46 | 33.45 | 20.15 | 2.82 | 30.51 | - | - | Peak |
| 862.1 | 28.24 | -17.76 | 46 | 32.6 | 22.72 | 3.29 | 30.37 | - | - | Peak |
| 5785 | 98.12 | - | - | 87.01 | 35.27 | 10.07 | 34.23 | 156 | 268 | Average |
| 5785 | 107.92 | - | - | 96.81 | 35.27 | 10.07 | 34.23 | 156 | 268 | Peak |
| 11571 | 48.54 | -25.46 | 74 | 52.61 | 38.3 | 14.41 | 56.78 | 100 | 0 | Peak |
| 17355 | 50.46 | -17.84 | 68.3 | 47.81 | 42.12 | 16.75 | 56.22 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 157 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5785 MHz is fundamental signal which can be ignored.. 2. 17355 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 34.05 | 23.05 | -16.95 | 40 | 36.7 | 17.12 | 0.57 | 31.34 | - | - | Peak |
| 79.14 | 24.5 | -15.5 | 40 | 47.25 | 7.57 | 0.88 | 31.2 | 100 | 112 | Peak |
| 160.68 | 25.34 | -18.16 | 43.5 | 44.9 | 10.41 | 1.22 | 31.19 | - | - | Peak |
| 493.2 | 18.31 | -27.69 | 46 | 28.59 | 17.96 | 2.43 | 30.67 | - | - | Peak |
| 696.9 | 21.6 | -24.4 | 46 | 28.5 | 20.58 | 2.93 | 30.41 | - | - | Peak |
| 941.9 | 26.4 | -19.6 | 46 | 29.61 | 23.73 | 3.44 | 30.38 | - | - | Peak |
| 5785 | 99.41 | - | - | 88.3 | 35.27 | 10.07 | 34.23 | 112 | 298 | Average |
| 5785 | 108.8 | - | - | 97.69 | 35.27 | 10.07 | 34.23 | 112 | 298 | Peak |
| 11568 | 50 | -24 | 74 | 54.07 | 38.3 | 14.41 | 56.78 | 100 | 0 | Peak |
| 17355 | 50.62 | -17.68 | 68.3 | 47.97 | 42.12 | 16.75 | 56.22 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 165 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5825 MHz is fundamental signal which can be ignored.. 2. 17475 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 31.62 | 25.35 | -14.65 | 40 | 37.66 | 18.56 | 0.55 | 31.42 | 100 | 27 | Peak |
| 127.2 | 21.52 | -21.98 | 43.5 | 39.83 | 11.66 | 1.13 | 31.1 | - | - | Peak |
| 214.68 | 23.02 | -20.48 | 43.5 | 42.58 | 10.11 | 1.38 | 31.05 | - | - | Peak |
| 331.5 | 18.68 | -27.32 | 46 | 33.65 | 14.17 | 1.86 | 31 | - | - | Peak |
| 576.5 | 25.3 | -20.7 | 46 | 33.98 | 19.39 | 2.62 | 30.69 | - | - | Peak |
| 842.5 | 27.27 | -18.73 | 46 | 31.87 | 22.53 | 3.25 | 30.38 | - | - | Peak |
| 5825 | 98.29 | - | - | 87.15 | 35.3 | 10.11 | 34.27 | 144 | 262 | Average |
| 5825 | 108.05 | - | - | 96.91 | 35.3 | 10.11 | 34.27 | 144 | 262 | Peak |
| 11649 | 46.07 | -27.93 | 74 | 49.77 | 38.39 | 14.52 | 56.61 | 100 | 0 | Peak |
| 17475 | 50.63 | -17.67 | 68.3 | 47.96 | 42.03 | 16.89 | 56.25 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11n HT20 | Temperature : | 23~25°C |
| Test Channel : | 165 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5825 MHz is fundamental signal which can be ignored.. 2. 17475 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 31.35 | 23.77 | -16.23 | 40 | 35.37 | 19.28 | 0.54 | 31.42 | - | - | Peak |
| 81.57 | 24.46 | -15.54 | 40 | 46.95 | 7.79 | 0.89 | 31.17 | 100 | 47 | Peak |
| 125.04 | 25.76 | -17.74 | 43.5 | 44.04 | 11.7 | 1.12 | 31.1 | - | - | Peak |
| 416.2 | 22.66 | -23.34 | 46 | 34.94 | 16.34 | 2.2 | 30.82 | - | - | Peak |
| 594.7 | 24.27 | -21.73 | 46 | 32.52 | 19.7 | 2.67 | 30.62 | - | - | Peak |
| 802.6 | 27.22 | -18.78 | 46 | 32.26 | 22.12 | 3.15 | 30.31 | - | - | Peak |
| 5825 | 99.11 | - | - | 87.97 | 35.3 | 10.11 | 34.27 | 158 | 278 | Average |
| 5825 | 108.49 | - | - | 97.35 | 35.3 | 10.11 | 34.27 | 158 | 278 | Peak |
| 11649 | 47.95 | -26.05 | 74 | 51.65 | 38.39 | 14.52 | 56.61 | 100 | 0 | Peak |
| 17475 | 50.48 | -17.82 | 68.3 | 47.81 | 42.03 | 16.89 | 56.25 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 802.11n HT40 | Temperature : | 23~25°C |
| Test Channel : | 151 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5755 MHz is fundamental signal which can be ignored.. 2. 17265 MHz is not within a restricted band, and satisfies 68.3 dB μ V /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dB μ V/m) | Over Limit (dB) | Limit Line (dB μ V/m) | Read Level (dB μ V) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------------|-------------------------|-----------------------------------|---------------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 33.78 | 26.3 | -13.7 | 40 | 39.95 | 17.12 | 0.57 | 31.34 | 100 | 92 | Peak |
| 99.12 | 28.79 | -14.71 | 43.5 | 49.22 | 9.68 | 0.99 | 31.1 | - | - | Peak |
| 217.38 | 26.33 | -19.67 | 46 | 45.65 | 10.31 | 1.4 | 31.03 | - | - | Peak |
| 430.2 | 24.96 | -21.04 | 46 | 36.81 | 16.65 | 2.25 | 30.75 | - | - | Peak |
| 658.4 | 26.04 | -19.96 | 46 | 33.39 | 20.27 | 2.86 | 30.48 | - | - | Peak |
| 910.4 | 29.3 | -16.7 | 46 | 32.99 | 23.26 | 3.37 | 30.32 | - | - | Peak |
| 5755 | 90.77 | - | - | 79.62 | 35.26 | 10.06 | 34.17 | 124 | 223 | Average |
| 5755 | 99.81 | - | - | 88.66 | 35.26 | 10.06 | 34.17 | 124 | 223 | Peak |
| 11511 | 45.56 | -28.44 | 74 | 49.96 | 38.2 | 14.35 | 56.95 | 100 | 0 | Peak |
| 17265 | 50.63 | -17.67 | 68.3 | 47.98 | 42.19 | 16.66 | 56.2 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11n HT40 | Temperature : | 23~25°C |
| Test Channel : | 151 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5755 MHz is fundamental signal which can be ignored.. 2. 17265 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30.27 | 23.73 | -16.27 | 40 | 34.7 | 20 | 0.53 | 31.5 | 134 | 246 | Peak |
| 113.7 | 24.58 | -18.92 | 43.5 | 43.6 | 11.07 | 1.07 | 31.16 | - | - | Peak |
| 193.89 | 25.5 | -18 | 43.5 | 46.26 | 9.04 | 1.3 | 31.1 | - | - | Peak |
| 428.8 | 24 | -22 | 46 | 35.91 | 16.61 | 2.24 | 30.76 | - | - | Peak |
| 615.7 | 26.5 | -19.5 | 46 | 34.41 | 19.92 | 2.74 | 30.57 | - | - | Peak |
| 841.1 | 27.57 | -18.43 | 46 | 32.19 | 22.51 | 3.25 | 30.38 | - | - | Peak |
| 5755 | 91.6 | - | - | 80.45 | 35.26 | 10.06 | 34.17 | 156 | 268 | Average |
| 5755 | 101.21 | - | - | 90.06 | 35.26 | 10.06 | 34.17 | 156 | 268 | Peak |
| 11511 | 46.56 | -27.44 | 74 | 50.96 | 38.2 | 14.35 | 56.95 | 100 | 0 | Peak |
| 17265 | 49.85 | -18.45 | 68.3 | 47.2 | 42.19 | 16.66 | 56.2 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|------------|
| Test Mode : | 802.11n HT40 | Temperature : | 23~25°C |
| Test Channel : | 159 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Horizontal |
| Remark : | 1. 5795 MHz is fundamental signal which can be ignored.. 2. 17385 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 37.02 | 24.72 | -15.28 | 40 | 40.14 | 15.24 | 0.6 | 31.26 | 100 | 136 | Peak |
| 138.54 | 24.12 | -19.38 | 43.5 | 42.6 | 11.42 | 1.2 | 31.1 | - | - | Peak |
| 260.04 | 23.83 | -22.17 | 46 | 40.5 | 12.74 | 1.59 | 31 | - | - | Peak |
| 419.7 | 22.81 | -23.19 | 46 | 34.98 | 16.42 | 2.21 | 30.8 | - | - | Peak |
| 590.5 | 26.63 | -19.37 | 46 | 34.98 | 19.63 | 2.66 | 30.64 | - | - | Peak |
| 853.7 | 27.76 | -18.24 | 46 | 32.24 | 22.63 | 3.28 | 30.39 | - | - | Peak |
| 5795 | 94.84 | - | - | 83.7 | 35.28 | 10.09 | 34.23 | 135 | 263 | Average |
| 5795 | 103.85 | - | - | 92.71 | 35.28 | 10.09 | 34.23 | 135 | 263 | Peak |
| 11589 | 46.25 | -27.75 | 74 | 50.23 | 38.32 | 14.44 | 56.74 | 100 | 0 | Peak |
| 17385 | 51.09 | -17.21 | 68.3 | 48.43 | 42.09 | 16.8 | 56.23 | 100 | 0 | Peak |



| | | | |
|------------------------|--|----------------------------|----------|
| Test Mode : | 802.11n HT40 | Temperature : | 23~25°C |
| Test Channel : | 159 | Relative Humidity : | 44~48% |
| Test Engineer : | Stan Hsieh | Polarization : | Vertical |
| Remark : | 1. 5795 MHz is fundamental signal which can be ignored.. 2. 17385 MHz is not within a restricted band, and satisfies 68.3 dBµV /m peak emission limit. 3. Average measurement was not performed if peak level went lower than the average limit. | | |

| Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Remark |
|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.16 | 25.15 | -14.85 | 40 | 37.46 | 18.56 | 0.55 | 31.42 | 100 | 265 | Peak |
| 82.11 | 21.62 | -18.38 | 40 | 44 | 7.88 | 0.89 | 31.15 | - | - | Peak |
| 202.8 | 20.11 | -23.39 | 43.5 | 40.58 | 9.3 | 1.33 | 31.1 | - | - | Peak |
| 361.6 | 23.84 | -22.16 | 46 | 37.9 | 14.98 | 2.06 | 31.1 | - | - | Peak |
| 603.1 | 24.12 | -21.88 | 46 | 32.19 | 19.82 | 2.7 | 30.59 | - | - | Peak |
| 913.9 | 28.68 | -17.32 | 46 | 32.34 | 23.3 | 3.37 | 30.33 | - | - | Peak |
| 5795 | 95.59 | - | - | 84.45 | 35.28 | 10.09 | 34.23 | 161 | 249 | Average |
| 5795 | 104.55 | - | - | 93.41 | 35.28 | 10.09 | 34.23 | 161 | 249 | Peak |
| 11589 | 46.69 | -27.31 | 74 | 50.67 | 38.32 | 14.44 | 56.74 | 100 | 0 | Peak |
| 17385 | 50.06 | -18.24 | 68.3 | 47.4 | 42.09 | 16.8 | 56.23 | 100 | 0 | Peak |

3.5 Frequency Stability Measurement

3.5.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.5.4 Test Setup

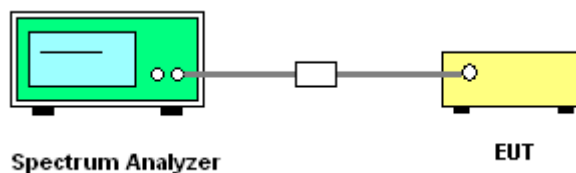



3.5.5 Test Result of Frequency Stability

| | | | |
|-------------|-------------|-----------------|----------|
| Test Band : | 5GHz band 4 | Test Engineer : | Bill Kuo |
|-------------|-------------|-----------------|----------|

| Mod. | Data Rate | N _{TX} | Channel | Freq. (MHz) | Center Frequency (MHz) | Frequency Deviation (MHz) | Frequency Stability (ppm) | Temperature (°C) | Voltage (V) |
|------|-----------|-----------------|---------|-------------|------------------------|---------------------------|---------------------------|------------------|-------------|
| 11a | 6Mbps | 1 | 149 | 5745 | 5744.950 | -0.050 | -8.70 | 20 | 3.55 |
| 11a | 6Mbps | 1 | 149 | 5745 | 5744.975 | -0.025 | -4.35 | 20 | 4.20 |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.000 | 0.000 | 0.00 | 20 | 3.70 |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.050 | 0.050 | 8.70 | -30 | 3.70 |
| 11a | 6Mbps | 1 | 149 | 5745 | 5744.950 | -0.050 | -8.70 | 50 | 3.70 |

Note: Center Frequency = (Low Frequency + High Frequency) / 2.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------------|-----------------|----------------------------|-------------|-------------------------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 100055 | 9kHz~40GHz | Jun. 09, 2014 | Jun. 20, 2014~ Jun. 24, 2014 | Jun. 08, 2015 | Conducted (TH02-HY) |
| Power Meter | Anritsu | ML2495A | 1036004 | 300MHz~40GHz | Aug. 17, 2013 | Jun. 20, 2014~ Jun. 24, 2014 | Aug. 16, 2014 | Conducted (TH02-HY) |
| Power Sensor | Anritsu | MA2411B | 1027253 | 300MHz~40GHz | Aug. 17, 2013 | Jun. 20, 2014~ Jun. 24, 2014 | Aug. 16, 2014 | Conducted (TH02-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSV30 | 101749 | 10Hz ~ 30GHz | Feb. 10, 2014 | Jun. 16, 2014~ Jun. 18, 2014 | Feb. 09, 2015 | Radiation (03CH07-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESCI 7 | 100724 | 9kHz~7GHz | Sep. 06, 2013 | Jun. 16, 2014~ Jun. 18, 2014 | Sep. 05, 2014 | Radiation (03CH07-HY) |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 860004/0001 | 9 kHz~30 MhZ | Jul. 03, 2012 | Jun. 16, 2014~ Jun. 18, 2014 | Jul. 03, 2014 | Radiation (03CH07-HY) |
| Bilog Antenna | Schaffner | CBL6111C | 2726 | 30MHz ~ 1GHz | Oct. 10, 2013 | Jun. 16, 2014~ Jun. 18, 2014 | Oct. 09, 2014 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna | ESCO | 3117 | 75962 | 1GHz~18GHz | Aug. 22, 2013 | Jun. 16, 2014~ Jun. 18, 2014 | Aug. 21, 2014 | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170251 | 15GHz- 40GHz | Oct. 03, 2013 | Jun. 16, 2014~ Jun. 18, 2014 | Oct. 02, 2014 | Radiation (03CH07-HY) |
| Preamplifier | COM-POWER | PA-103A | 161241 | 10 MHz ~ 1000MHz 32dB GAIN | Mar. 17, 2014 | Jun. 16, 2014~ Jun. 18, 2014 | Mar. 16, 2015 | Radiation (03CH07-HY) |
| Preamplifier | Agilent | 8449B | 3008A02362 | 1 GHz~26.5 GHz | Nov. 29, 2013 | Jun. 16, 2014~ Jun. 18, 2014 | Nov. 28, 2014 | Radiation (03CH07-HY) |
| Preamplifier | MITEQ | AMF-7D-0010 1800-30-10P | 1590074 | DC~18 G High Gain | Jul. 09, 2013 | Jun. 16, 2014~ Jun. 18, 2014 | Jul. 08, 2014 | Radiation (03CH07-HY) |
| Turn Table | ChainTek | ChainTek 3000 | N/A | 0 ~ 360 degree | N/A | Jun. 16, 2014~ Jun. 18, 2014 | N/A | Radiation (03CH07-HY) |
| Antenna Mast | ChainTek | ChainTek 3000 | N/A | N/A | N/A | Jun. 16, 2014~ Jun. 18, 2014 | N/A | Radiation (03CH07-HY) |



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.50 |
|---|------|