



# FCC RF Test Report

**APPLICANT** : Zebra Technologies Corporation  
**EQUIPMENT** : Touch computer  
**BRAND NAME** : Zebra  
**MODEL NAME** : TC56CJ  
**FCC ID** : UZ7TC56CJ  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DSS) Spread Spectrum Transmitter

The product was received on Oct. 13, 2016 and testing was completed on Nov. 22, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer..... 5

1.3 Product Feature of Equipment Under Test..... 5

1.4 Product Specification of Equipment Under Test..... 6

1.5 Modification of EUT ..... 6

1.6 Testing Location ..... 7

1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

2.1 Descriptions of Test Mode ..... 8

2.2 Test Mode..... 10

2.3 Connection Diagram of Test System..... 11

2.4 Support Unit used in test configuration and system ..... 12

2.5 EUT Operation Test Setup ..... 12

2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

3.1 Number of Channel Measurement ..... 13

3.2 Hopping Channel Separation Measurement ..... 15

3.3 Dwell Time Measurement..... 22

3.4 20dB and 99% Bandwidth Measurement ..... 25

3.5 Peak Output Power Measurement ..... 38

3.6 Conducted Band Edges Measurement..... 40

3.7 Conducted Spurious Emission Measurement ..... 47

3.8 Radiated Band Edges and Spurious Emission Measurement ..... 57

3.9 AC Conducted Emission Measurement..... 63

3.10 Antenna Requirements..... 67

**4 LIST OF MEASURING EQUIPMENT..... 68**

**5 UNCERTAINTY OF EVALUATION..... 69**

**APPENDIX A. RADIATED SPURIOUS EMISSION**

**APPENDIX B. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX C. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR672014-10A	Rev. 01	Initial issue of report	Dec. 22, 2016

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15$ Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4$ sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125$ mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20$ dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20$ dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.80 dB at 36.750 MHz for Quasi-Peak
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.80 dB at 0.286 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Zebra Technologies Corporation**  
1 Zebra Plaza Holtsville, NY 11742

## 1.2 Manufacturer

**Wistron Corporation**  
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan R.O.C.

## 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Touch computer
<b>Brand Name</b>	Zebra
<b>Model Name</b>	TC56CJ
<b>FCC ID</b>	UZ7TC56CJ
<b>EUT supports Radios application</b>	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
<b>HW Version</b>	DV1
<b>SW Version</b>	91-12-04.4-MG-00
<b>FW Version</b>	91-12-04.4-MG-00
<b>MFD</b>	17OCT16
<b>EUT Stage</b>	Engineering sample

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessories				
<b>Adapter (5V/2.5A)</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b>	SAWA-65-20005A
<b>Headset Jumper 1</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	CBL-TC51-HDST25-01
<b>Headset Jumper 2</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	CBL-TC51-HDST35-01
<b>Battery</b>	<b>Brand Name</b>	Zebra	<b>Model Number</b>	BT-000314
<b>2.5mm Earphone</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	HDST-25MM-PTVP-01
<b>3.5mm Earphone</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	HDST-35MM-PTVP-01
<b>Trigger Handle</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	TRG-TC51-SNP1-01
<b>Rugged Charge/USB cable</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	CBL-TC51-USB1-01
<b>Soft Holster</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	SG-TC51-HLSTR1-01
<b>Exoskeleton</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	SG-TC51-EX01-01
<b>Hand strap</b>	<b>Brand Name</b>	Zebra	<b>Part Number</b>	SG-TC51-BHDSTP1-03



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Maximum Output Power to Antenna</b>	Bluetooth BR(1Mbps) : 4.33 dBm (0.0027 W) Bluetooth EDR (2Mbps) : 3.85 dBm (0.0024 W) Bluetooth EDR (3Mbps) : 4.20 dBm (0.0026 W)
<b>99% Occupied Bandwidth</b>	Bluetooth BR(1Mbps) : 0.884MHz Bluetooth EDR (2Mbps) : 1.208MHz Bluetooth EDR (3Mbps) : 1.184MHz
<b>Antenna Type / Gain</b>	Loop Antenna type with gain 1.40 dBi
<b>Type of Modulation</b>	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH12-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth Average Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	3.74 dBm	3.70 dBm	3.69 dBm
Ch39	2441MHz	<b>3.78 dBm</b>	3.72 dBm	3.71 dBm
Ch78	2480MHz	3.57 dBm	3.46 dBm	3.51 dBm

Channel	Frequency	Bluetooth Average Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	-0.03 dBm	-0.07 dBm	-0.07 dBm
Ch39	2441MHz	<b>1.16 dBm</b>	1.15 dBm	1.14 dBm
Ch78	2480MHz	0.57 dBm	0.50 dBm	0.50 dBm

Channel	Frequency	Bluetooth Average Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	-0.09 dBm	-0.10 dBm	-0.15 dBm
Ch39	2441MHz	<b>1.17 dBm</b>	1.15 dBm	1.15 dBm
Ch78	2480MHz	0.57 dBm	0.54 dBm	0.51 dBm





Channel	Frequency	Bluetooth Peak Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	4.32 dBm	4.31 dBm	4.31 dBm
Ch39	2441MHz	4.33 dBm	4.31 dBm	4.32 dBm
Ch78	2480MHz	4.20 dBm	4.17 dBm	4.19 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	2.75 dBm	2.73 dBm	2.70 dBm
Ch39	2441MHz	3.85 dBm	3.83 dBm	3.81 dBm
Ch78	2480MHz	3.25 dBm	3.23 dBm	3.21 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	2.85 dBm	2.82 dBm	2.81 dBm
Ch39	2441MHz	4.20 dBm	3.96 dBm	4.15 dBm
Ch78	2480MHz	3.67 dBm	3.45 dBm	3.49 dBm

**Remark:**The data rate was set in 1Mbps for all the test items due to the highest RF output power.

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
<b>Conducted Test Cases</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated Test Cases</b>	<b>Bluetooth BR 1Mbps GFSK</b>		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
<b>AC Conducted Emission</b>	Mode 1 :GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + NFC active + Battery + Scanner + without Exoskeleton + Rugged Charge/USB Cable + Adapter (SAWA-65-20005A (5V/2.5A)) + Headset Jumper (CBL-TC51-HDST25-01) + Earphone (HDST-25MM-PTVP-01)		
<b>Remark:</b>			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.			

## 2.3 Connection Diagram of Test System

### <Bluetooth Tx Mode>

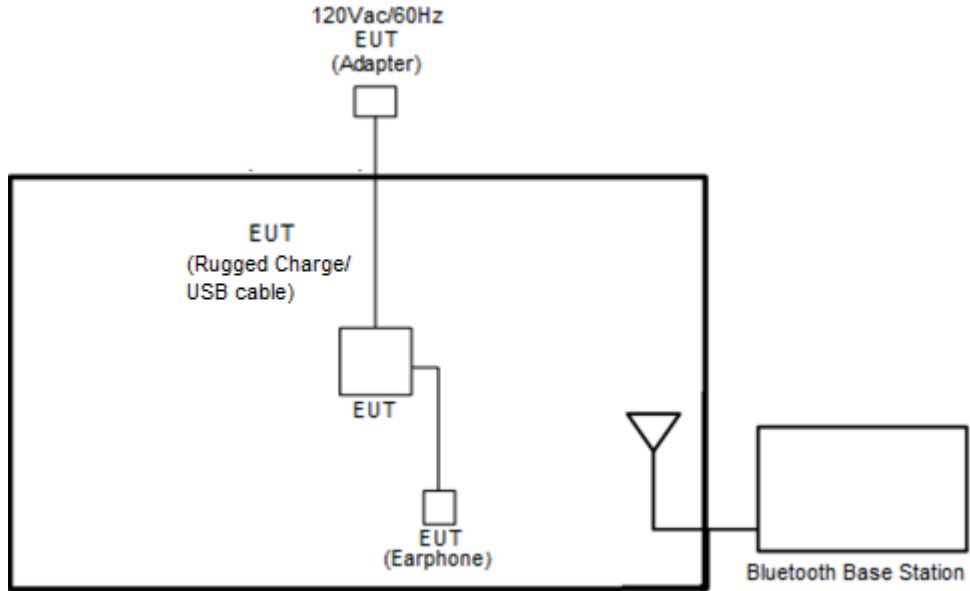

### <AC Conducted Emission Mode>

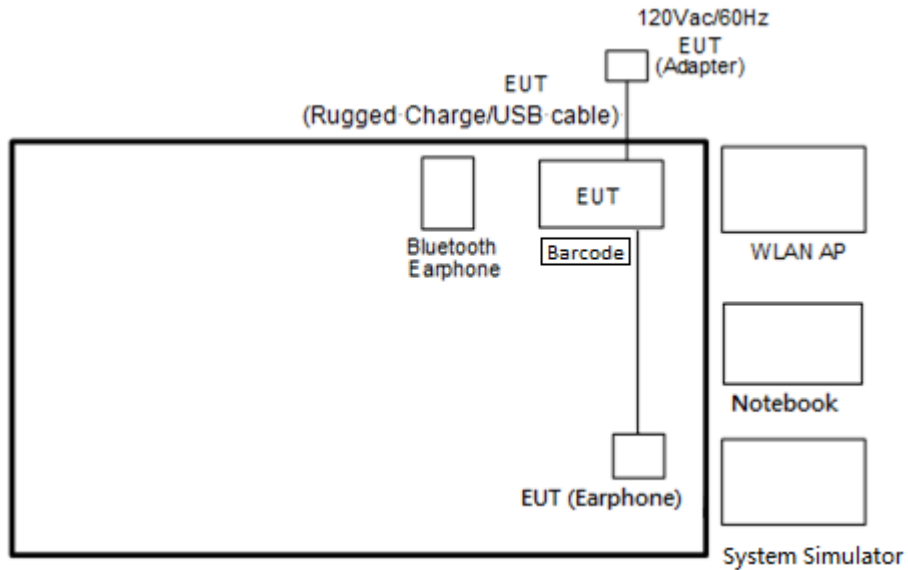



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
7.	Barcode	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, the RF utility, “ADB” was installed in notebook which was programmed in order to make the EUT get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup




##### 3.1.5 Test Result of Number of Hopping Frequency


<b>Test Mode :</b>	1Mbps	<b>Temperature :</b>	24~26°C
<b>Test Engineer :</b>	Aking Chang	<b>Relative Humidity :</b>	48~51%
<b>Number of Hopping (Channel)</b>	<b>Adaptive Frequency Hopping (Channel)</b>	<b>Limits (Channel)</b>	<b>Pass/Fail</b>
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

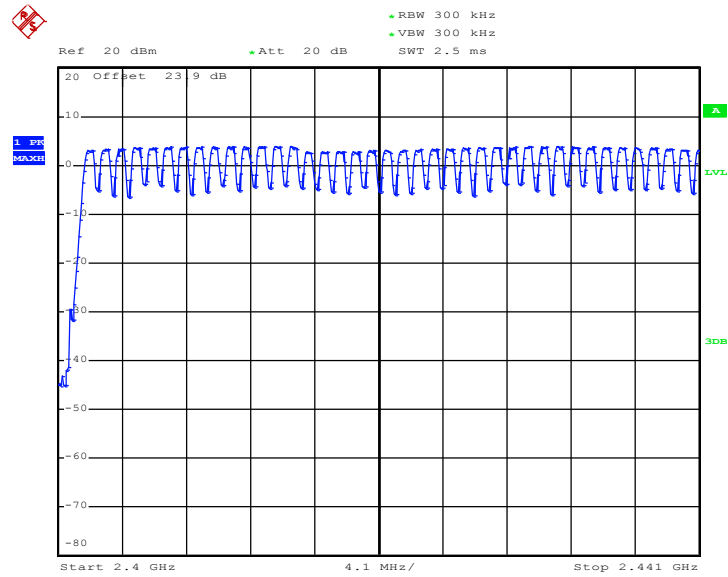

Date: 22.NOV.2016 20:03:17

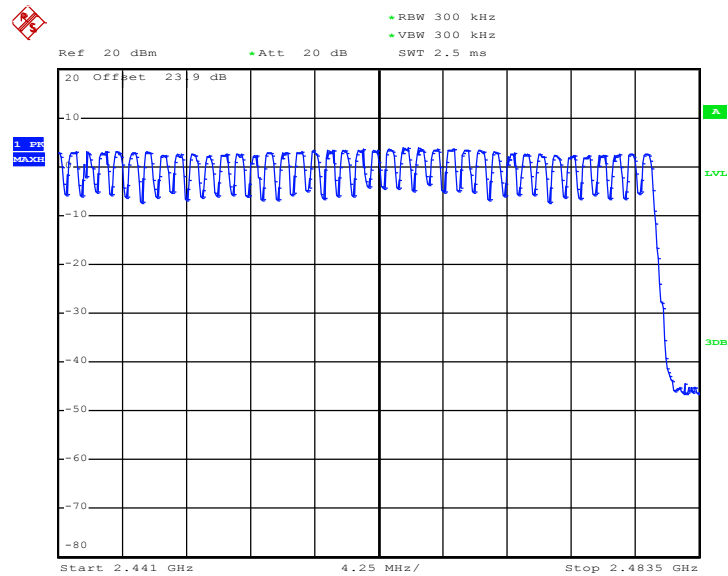

Date: 22.NOV.2016 20:03:56

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup






### 3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	0.996	0.6373	Pass
39	2441	1.332	0.6347	Pass
78	2480	1.008	0.6347	Pass

Channel Separation Plot on Channel 00 - 01

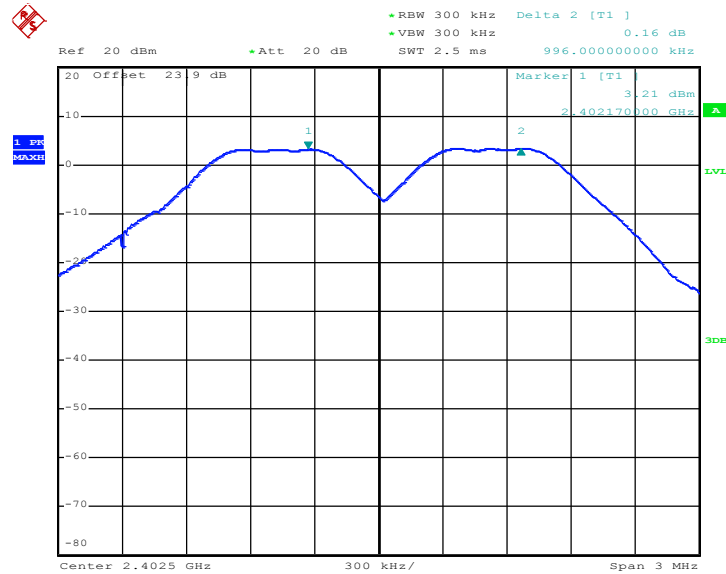


Date: 22.NOV.2016 20:15:57






Channel Separation Plot on Channel 39 - 40

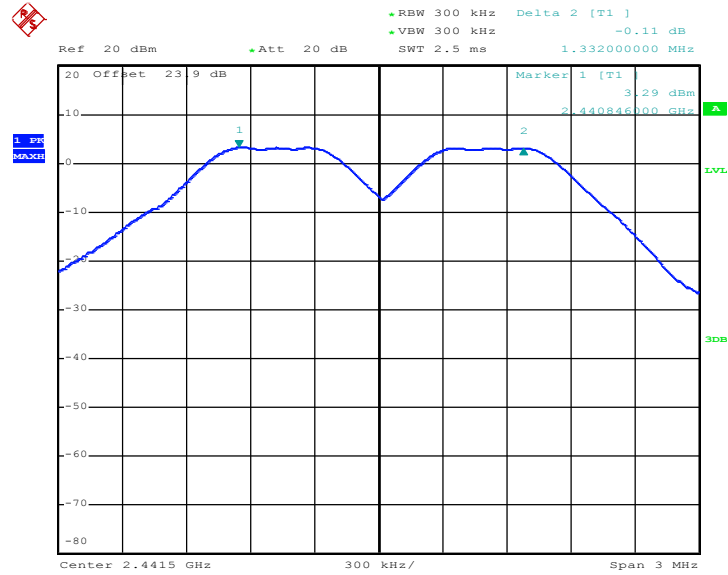

Date: 22.NOV.2016 20:25:26

Channel Separation Plot on Channel 77 - 78

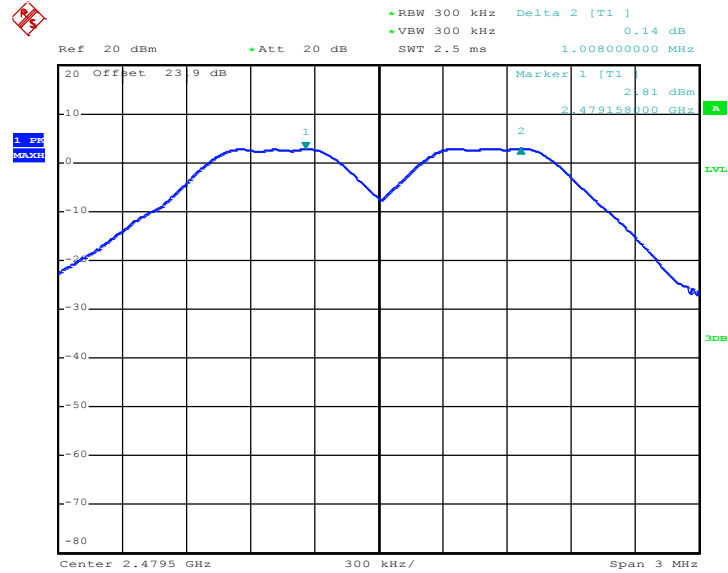


Date: 22.NOV.2016 20:29:04



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.9040	Pass
39	2441	1.002	0.9000	Pass
78	2480	1.038	0.9000	Pass


Channel Separation Plot on Channel 00 - 01

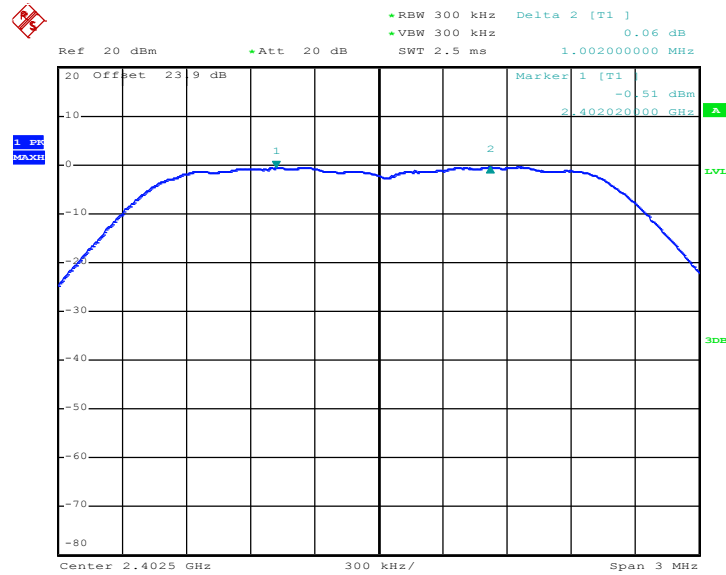

Date: 22.NOV.2016 20:35:06




### Channel Separation Plot on Channel 39 - 40

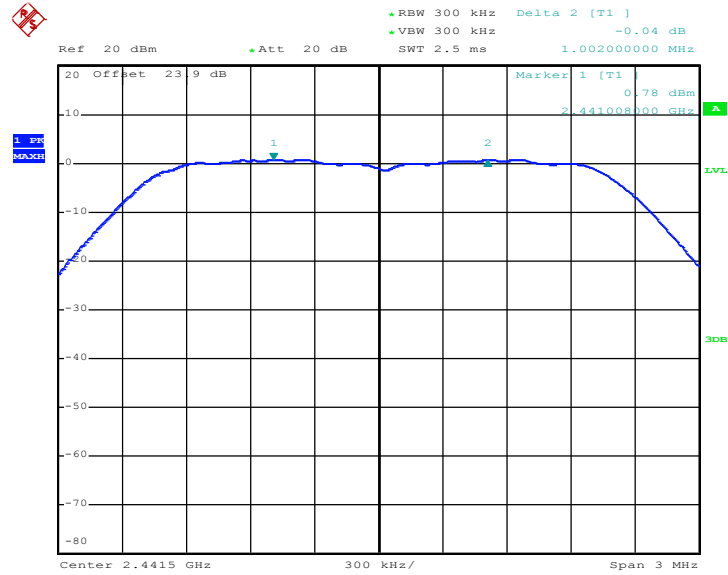

Date: 22.NOV.2016 20:41:14

### Channel Separation Plot on Channel 77 - 78

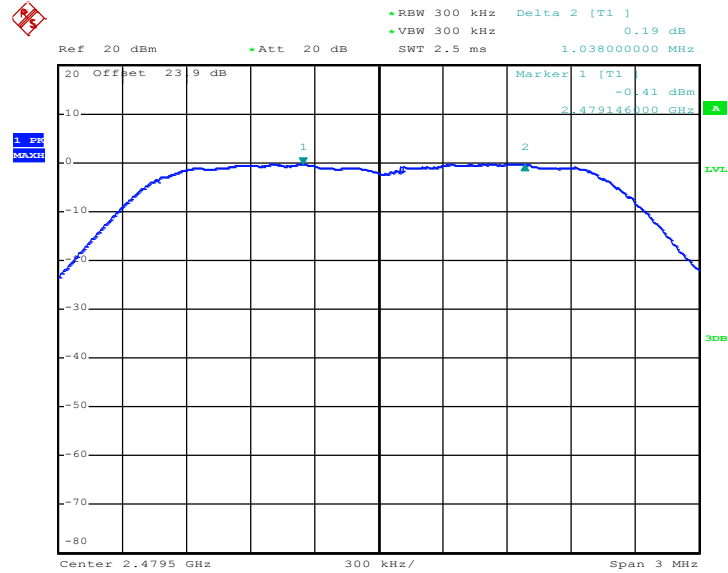


Date: 22.NOV.2016 20:46:48



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8640	Pass
39	2441	1.020	0.8680	Pass
78	2480	1.002	0.8680	Pass


Channel Separation Plot on Channel 00 - 01

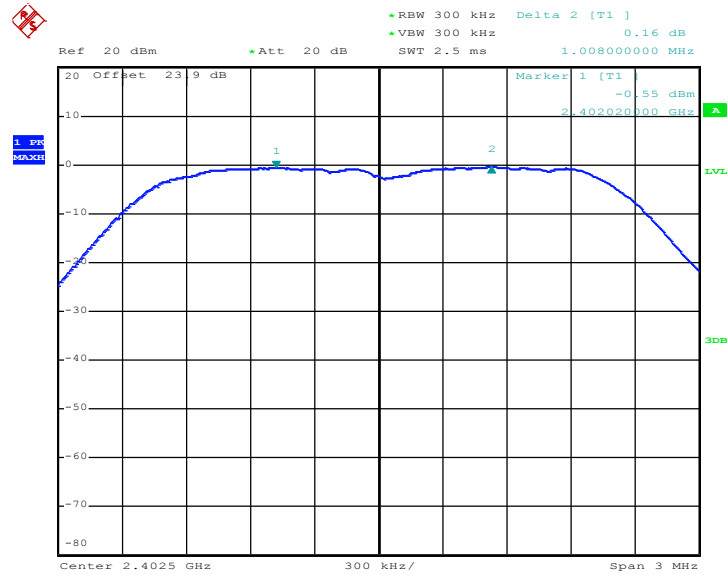

Date: 22.NOV.2016 20:54:32




### Channel Separation Plot on Channel 39 - 40

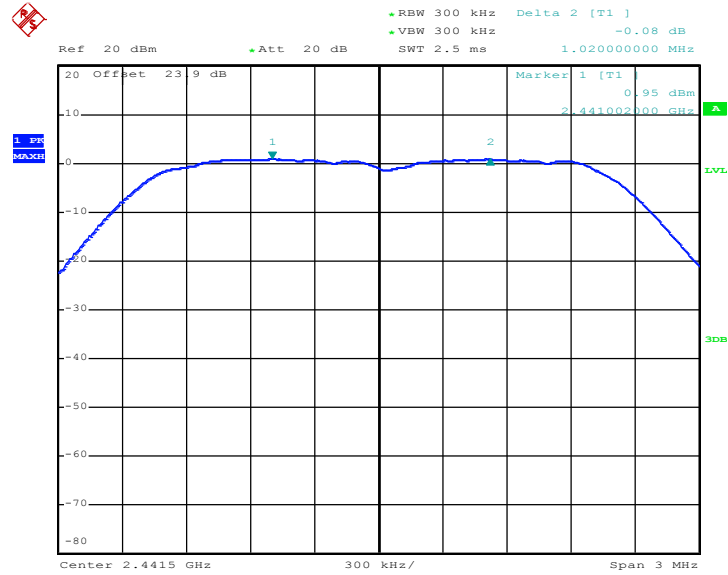

Date: 22.NOV.2016 21:16:44

### Channel Separation Plot on Channel 77 - 78

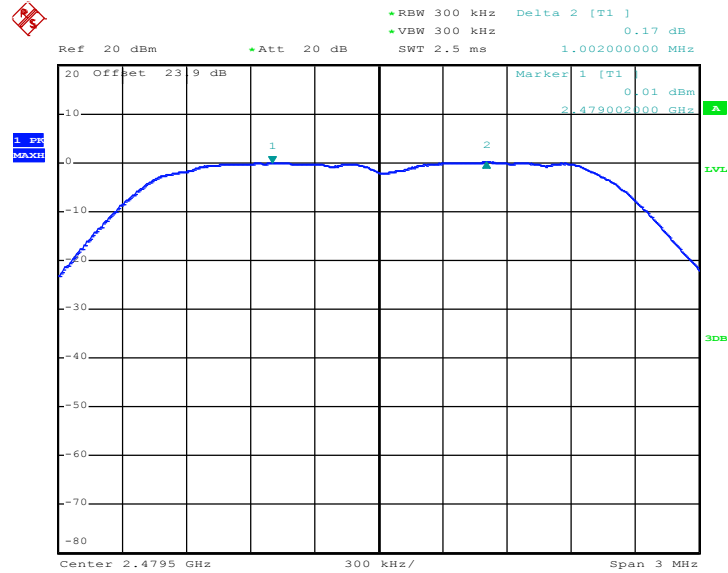

Date: 22.NOV.2016 21:19:55

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup





3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

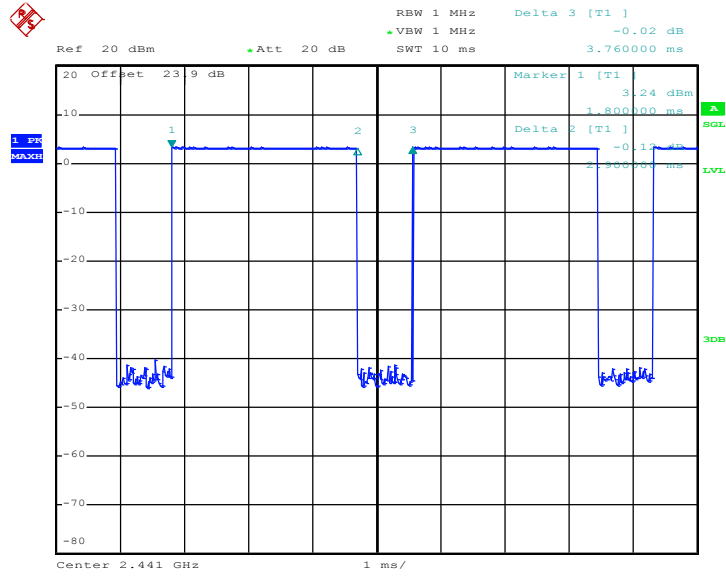

Date: 10.NOV.2016 00:10:48



## 3.4 20dB and 99% Bandwidth Measurement

### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

### 3.4.4 Test Setup

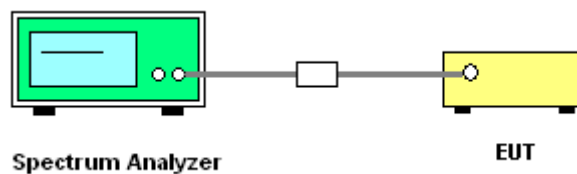




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.956
39	2441	0.952
78	2480	0.952


20 dB Bandwidth Plot on Channel 00

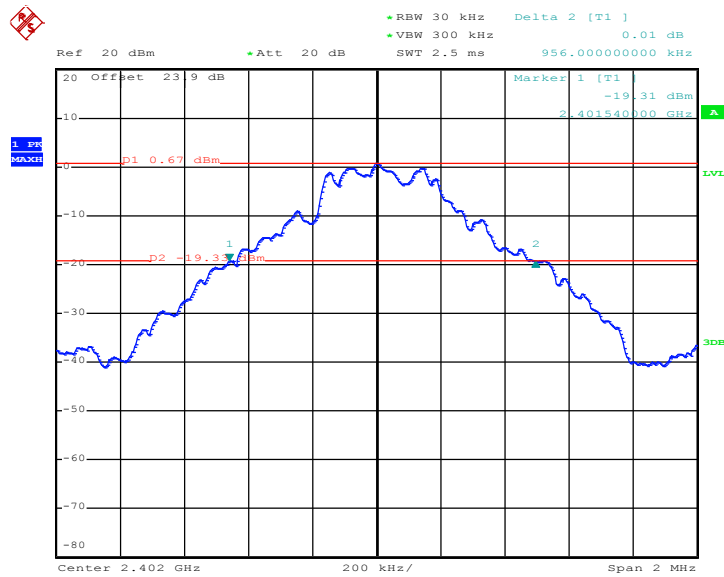

Date: 21.NOV.2016 09:48:10




20 dB Bandwidth Plot on Channel 39

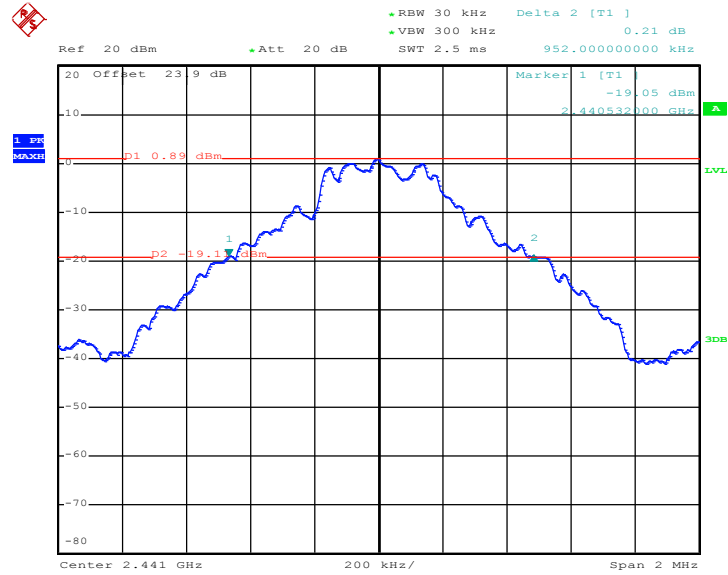

Date: 21.NOV.2016 09:59:47

20 dB Bandwidth Plot on Channel 78

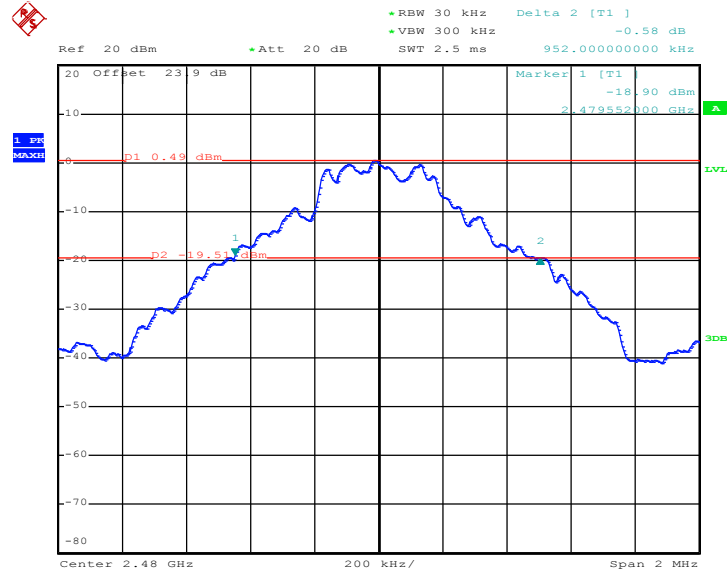


Date: 21.NOV.2016 10:04:38



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.356
39	2441	1.350
78	2480	1.350


20 dB Bandwidth Plot on Channel 00

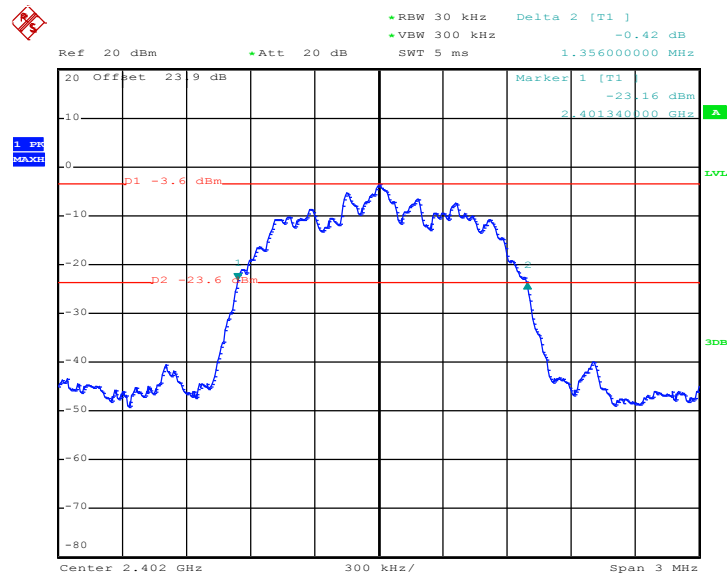

Date: 21.NOV.2016 10:24:16




20 dB Bandwidth Plot on Channel 39

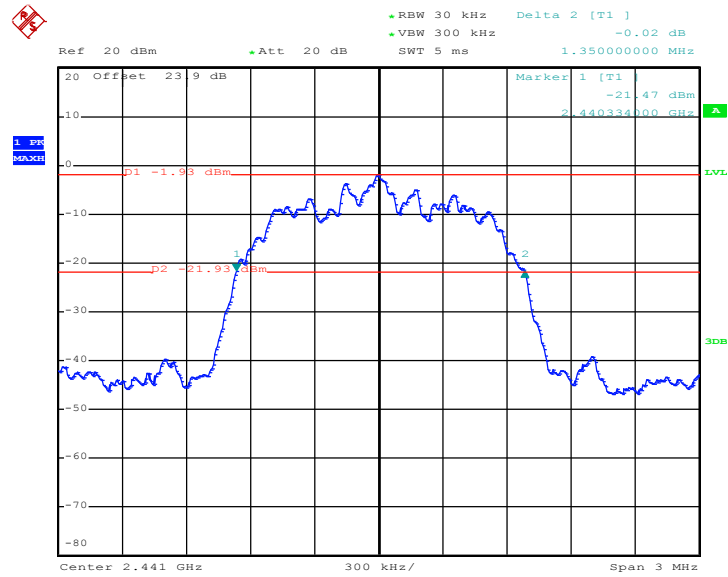

Date: 21.NOV.2016 10:27:27

20 dB Bandwidth Plot on Channel 78

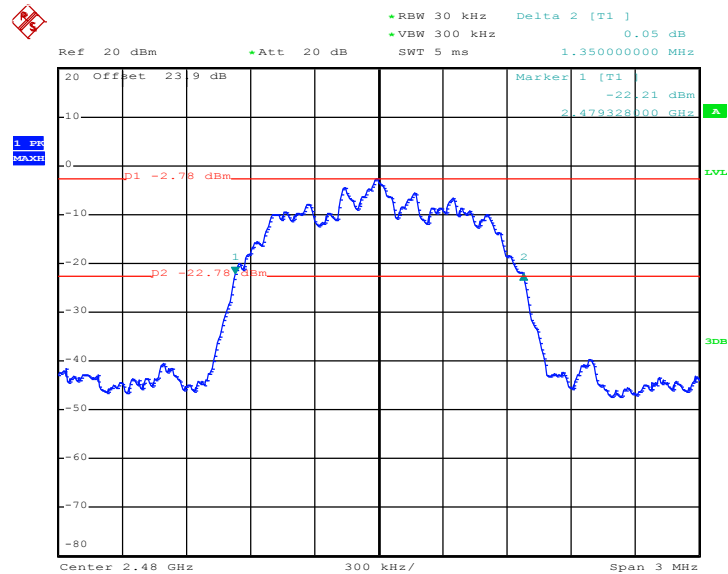


Date: 21.NOV.2016 11:05:05



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.296
39	2441	1.302
78	2480	1.302


20 dB Bandwidth Plot on Channel 00

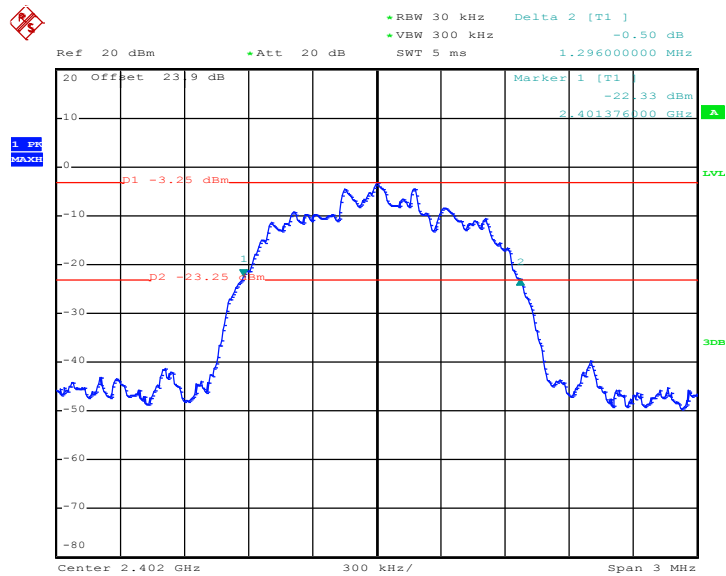

Date: 22.NOV.2016 21:10:32




20 dB Bandwidth Plot on Channel 39

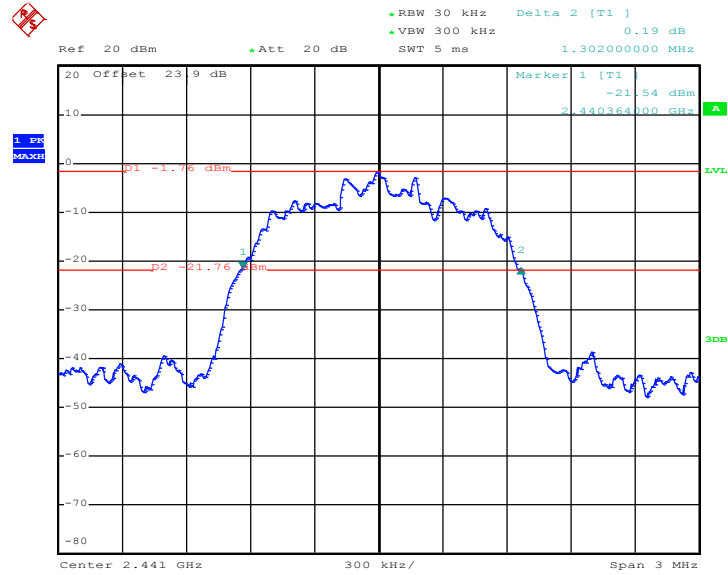

Date: 22.NOV.2016 21:26:51

20 dB Bandwidth Plot on Channel 78

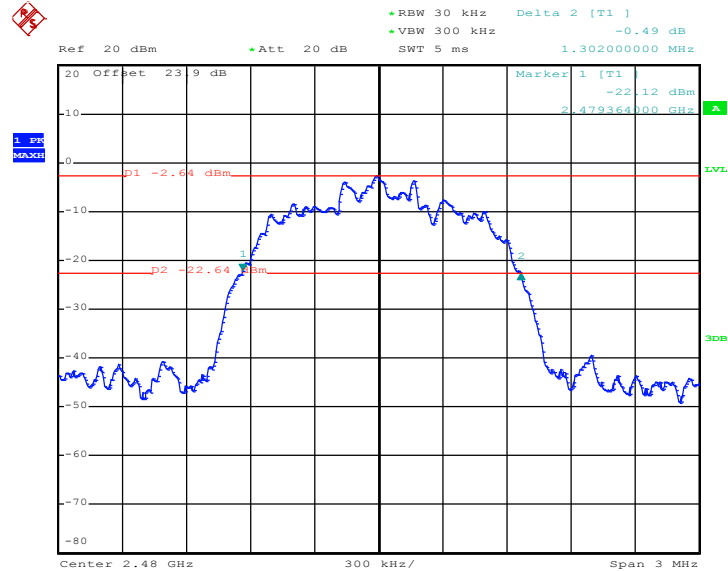

Date: 22.NOV.2016 21:32:56




### 3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.880
39	2441	0.884
78	2480	0.884

99% Occupied Bandwidth Plot on Channel 00

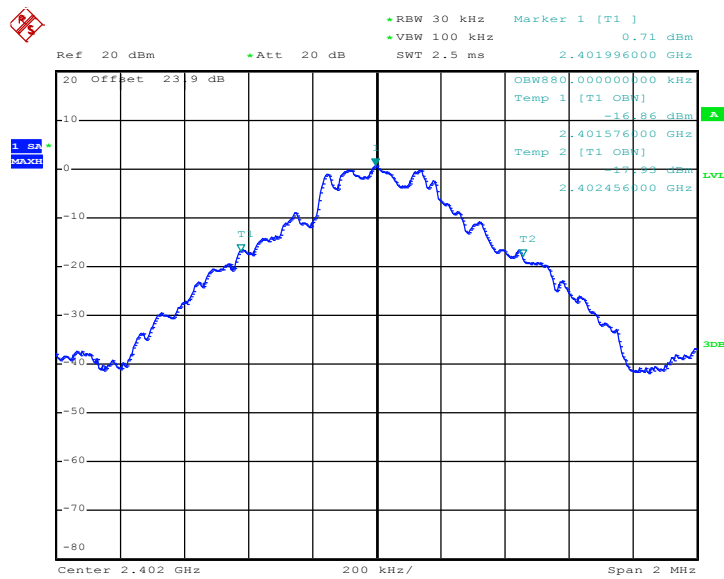


Date: 22.NOV.2016 20:17:35






99% Occupied Bandwidth Plot on Channel 39

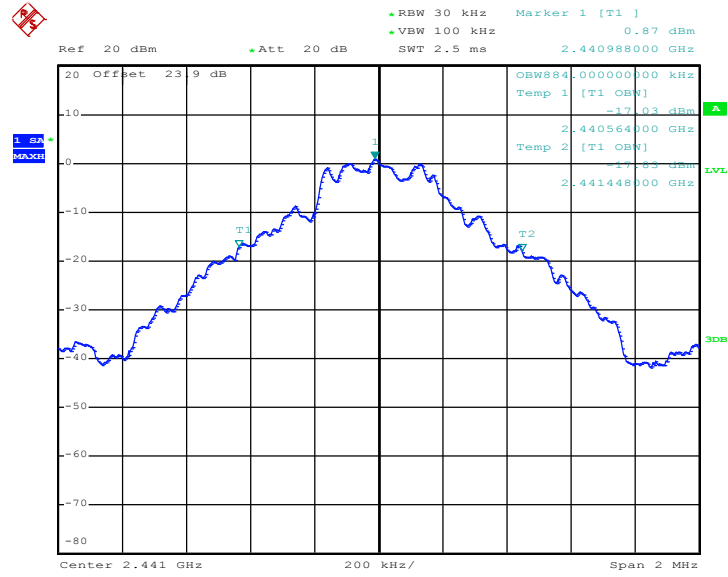

Date: 22.NOV.2016 20:26:11

99% Occupied Bandwidth Plot on Channel 78

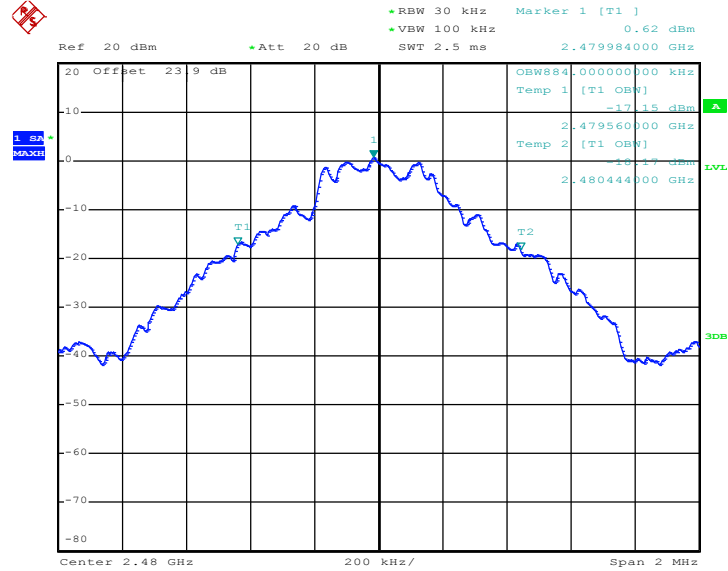


Date: 22.NOV.2016 20:31:11



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.208
39	2441	1.208
78	2480	1.208


99% Occupied Bandwidth Plot on Channel 00

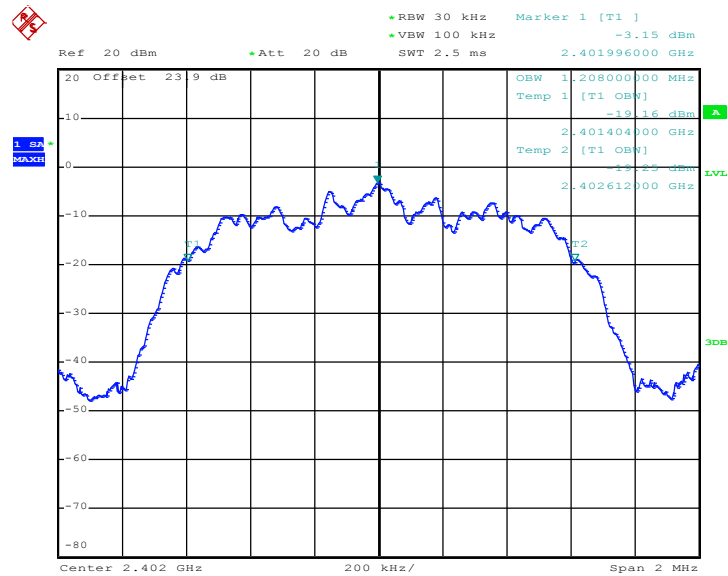

Date: 22.NOV.2016 20:38:07




99% Occupied Bandwidth Plot on Channel 39

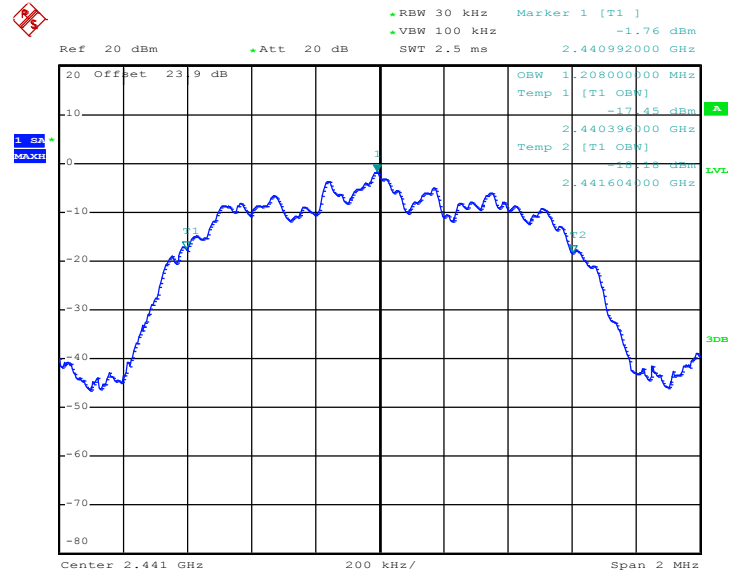

Date: 22.NOV.2016 20:42:18

99% Occupied Bandwidth Plot on Channel 78

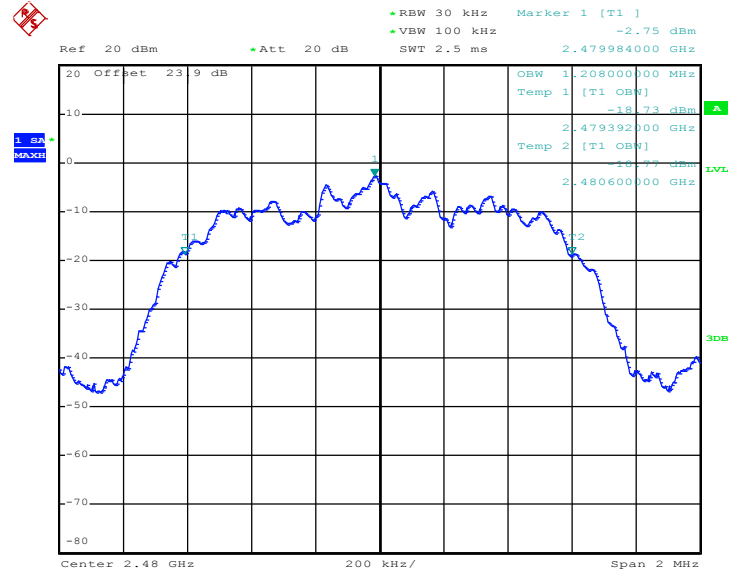


Date: 22.NOV.2016 20:50:26



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.184
78	2480	1.180


99% Occupied Bandwidth Plot on Channel 00

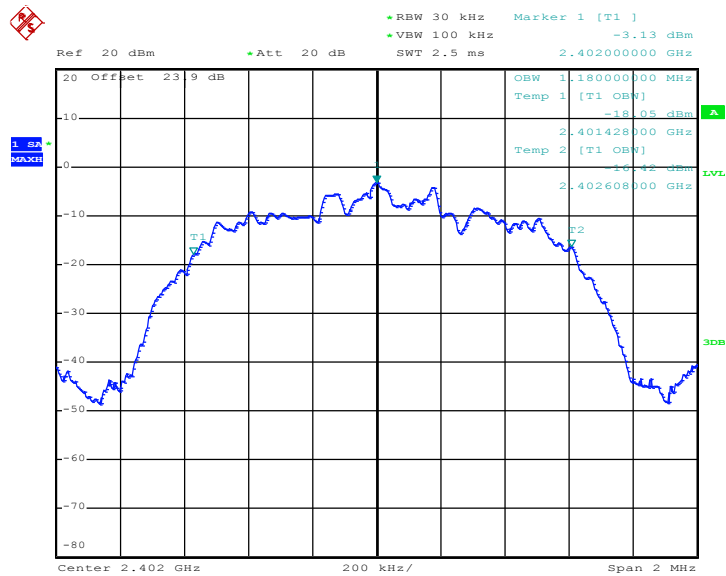

Date: 22.NOV.2016 21:14:04




99% Occupied Bandwidth Plot on Channel 39

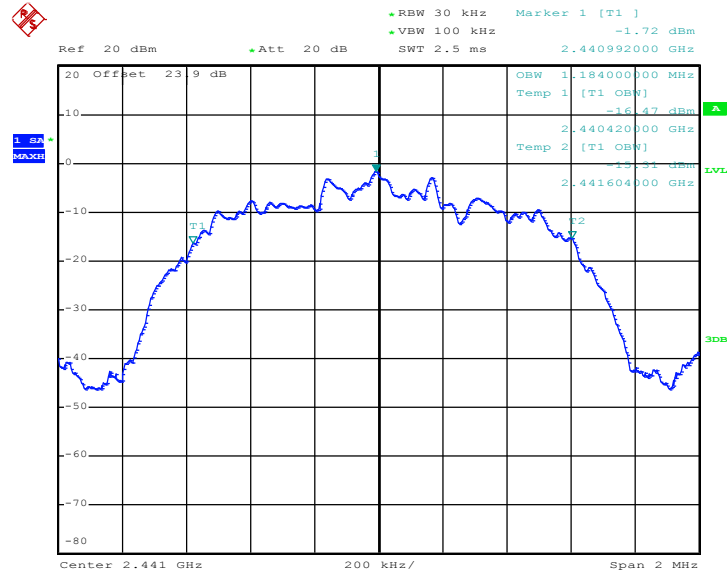

Date: 22.NOV.2016 21:17:32

99% Occupied Bandwidth Plot on Channel 78

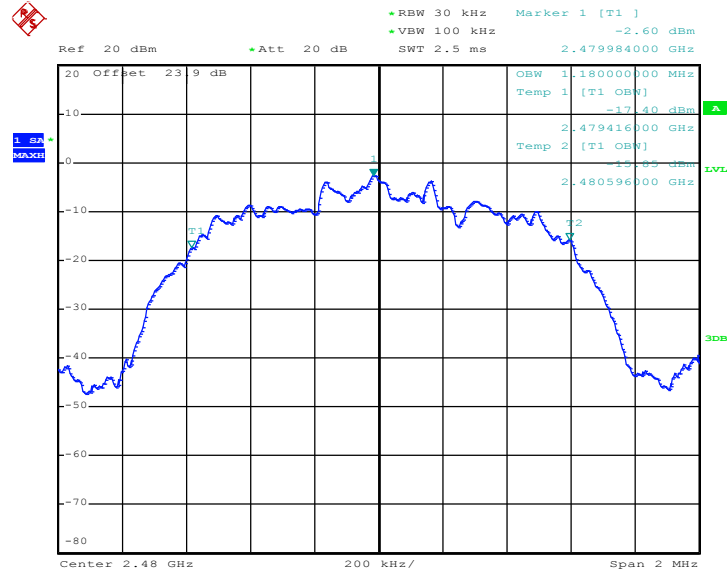

Date: 22.NOV.2016 21:21:11

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.5 Peak Output Power Measurement

### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

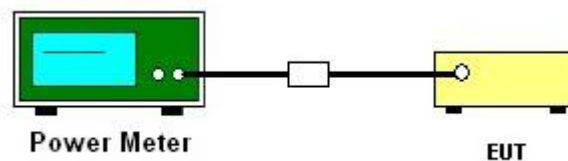



3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	4.32	20.97	Pass
39	2441	4.33	20.97	Pass
78	2480	4.20	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	2.75	20.97	Pass
39	2441	3.85	20.97	Pass
78	2480	3.25	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	2.85	20.97	Pass
39	2441	4.20	20.97	Pass
78	2480	3.67	20.97	Pass

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup








### 3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

Low Band Edge Plot on Channel 00

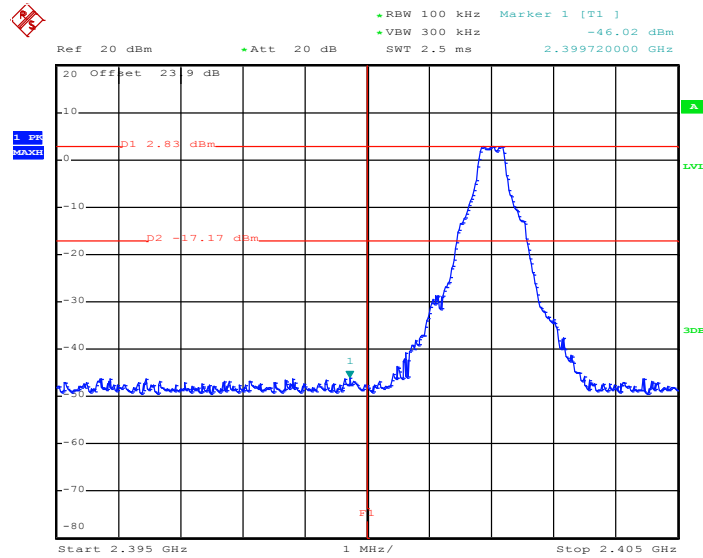

Date: 22.NOV.2016 20:16:57

High Band Edge Plot on Channel 78

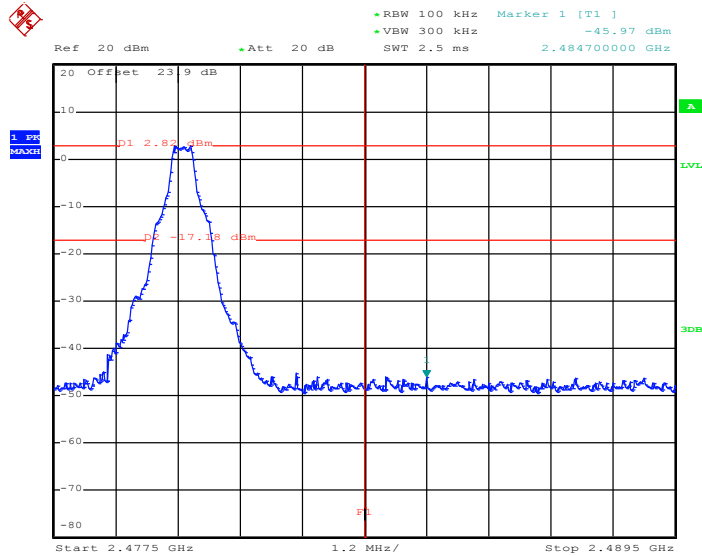


Date: 22.NOV.2016 20:29:34




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

Low Band Edge Plot on Channel 00

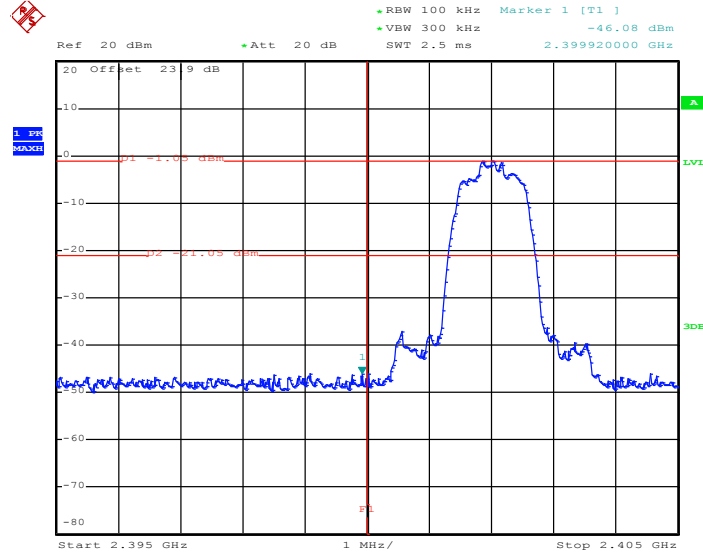

Date: 22.NOV.2016 20:37:09

High Band Edge Plot on Channel 78

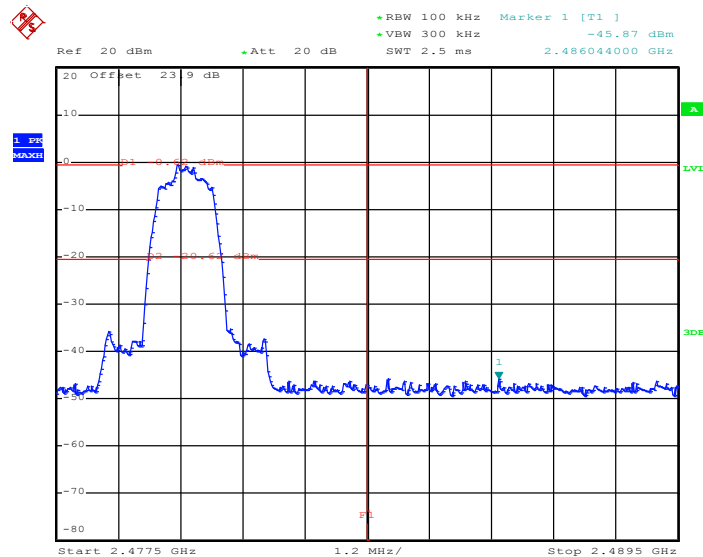


Date: 22.NOV.2016 20:47:30




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

Low Band Edge Plot on Channel 00

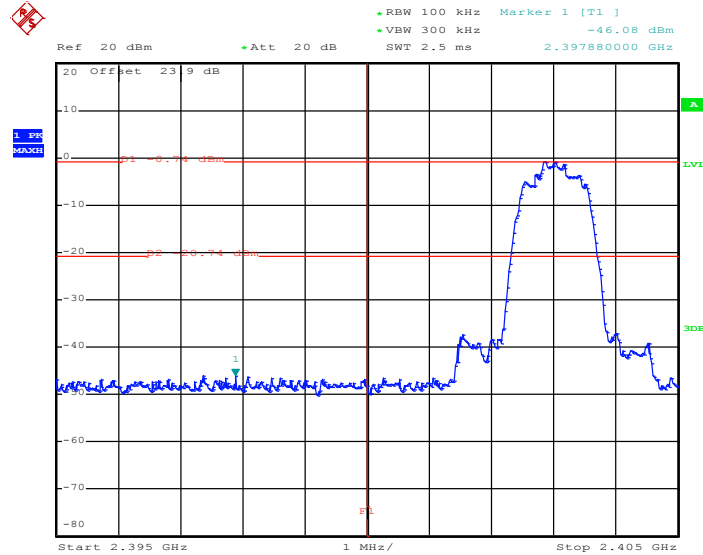

Date: 22.NOV.2016 21:00:30

High Band Edge Plot on Channel 78

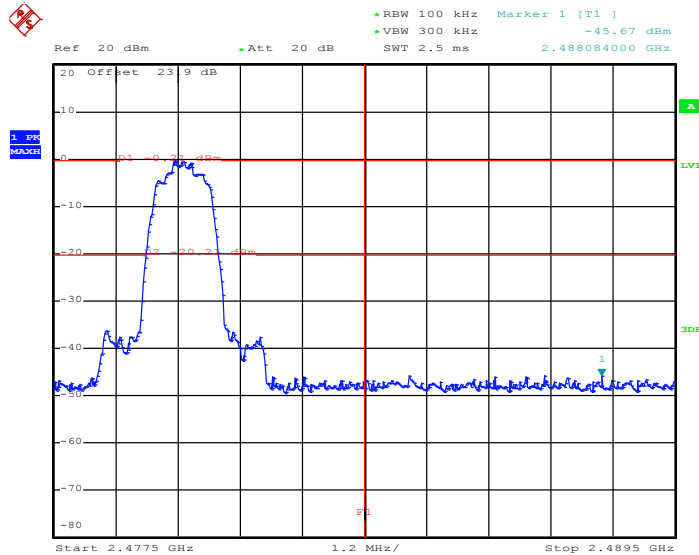


Date: 22.NOV.2016 21:20:33



### 3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

#### 1Mbps Hopping Mode Low Band Edge Plot

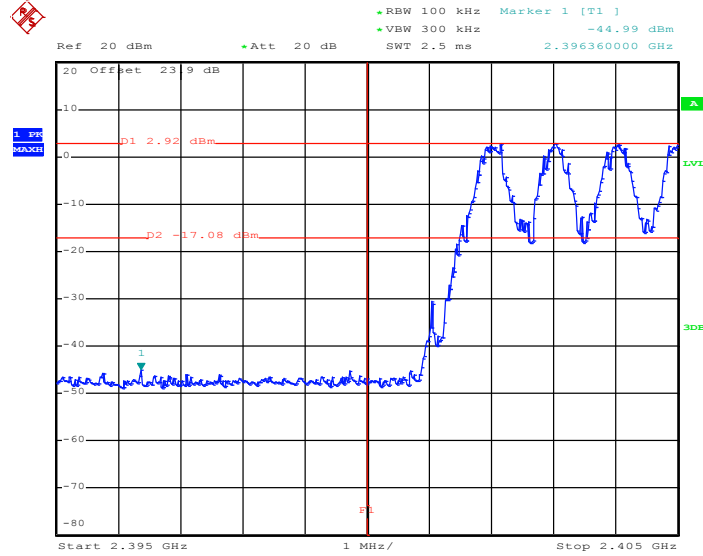

Date: 22.NOV.2016 20:04:55

#### 1Mbps Hopping Mode High Band Edge Plot

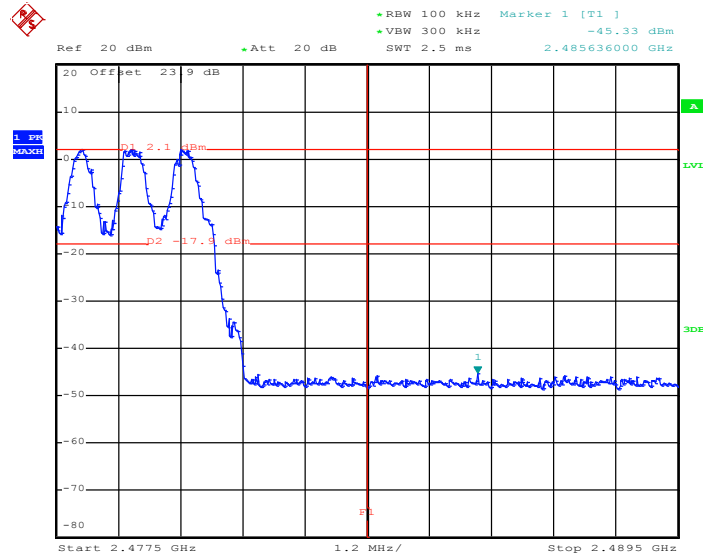


Date: 22.NOV.2016 20:06:08




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

2Mbps Hopping Mode Low Band Edge Plot

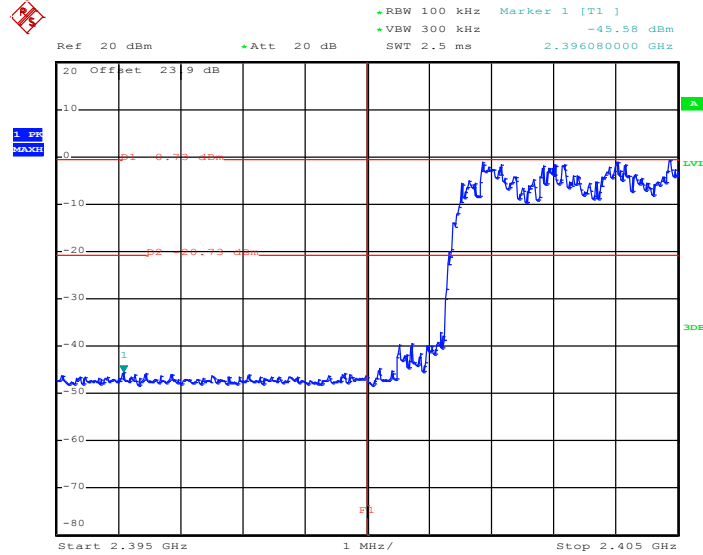

Date: 22.NOV.2016 20:08:11

2Mbps Hopping Mode High Band Edge Plot

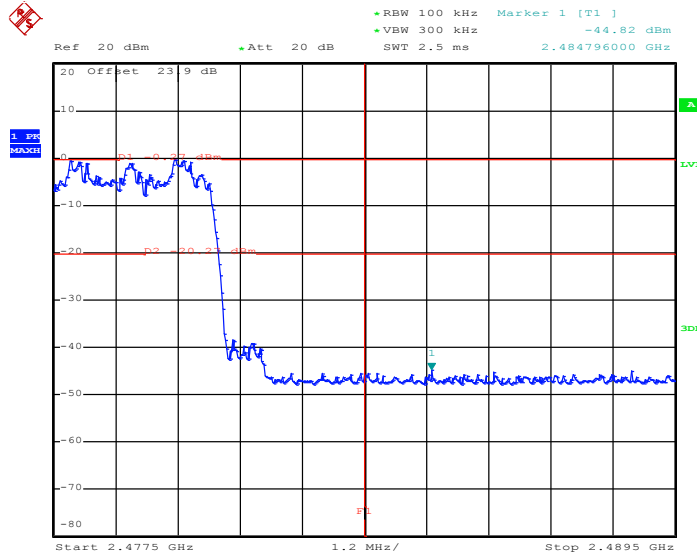


Date: 22.NOV.2016 20:10:32




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

3Mbps Hopping Mode Low Band Edge Plot

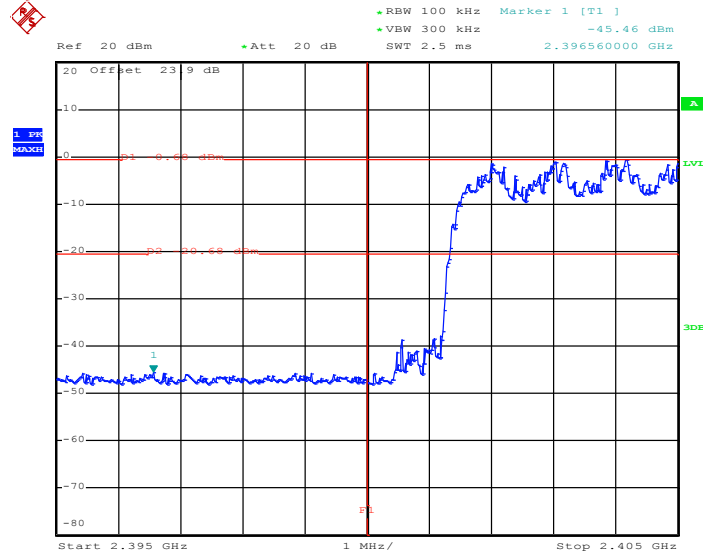

Date: 22.NOV.2016 20:13:12

3Mbps Hopping Mode High Band Edge Plot

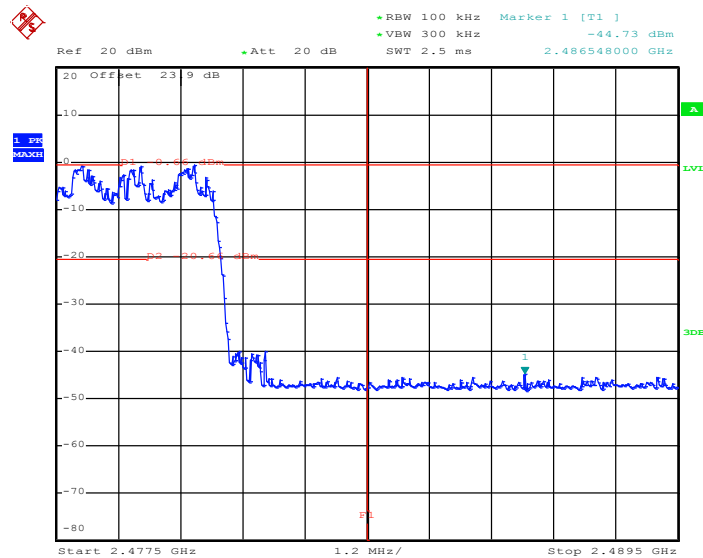

Date: 22.NOV.2016 20:14:36

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup

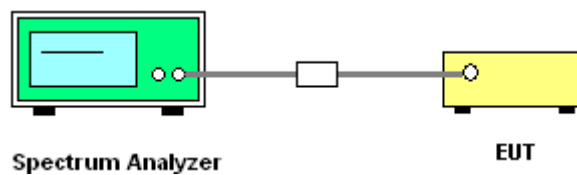




### 3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

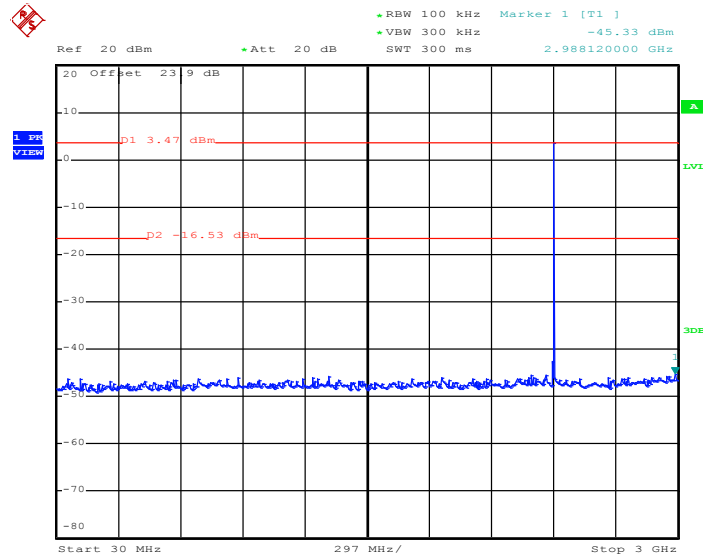

Date: 22.NOV.2016 20:21:31

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

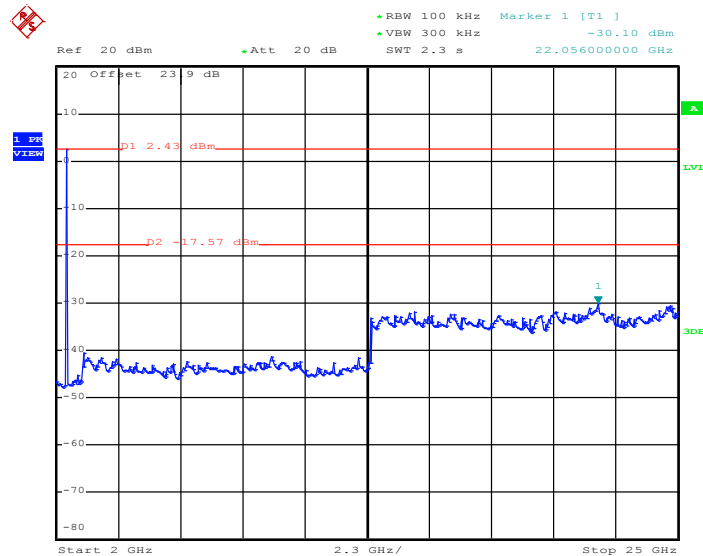


Date: 22.NOV.2016 20:21:53






Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

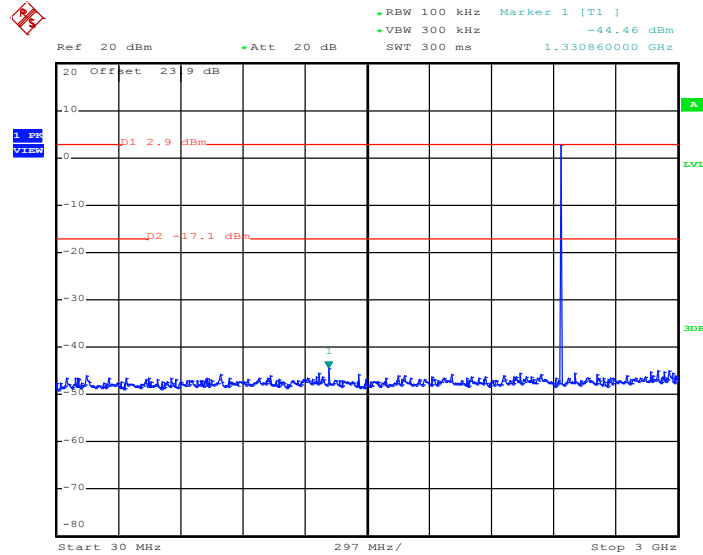

Date: 22.NOV.2016 20:26:48

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

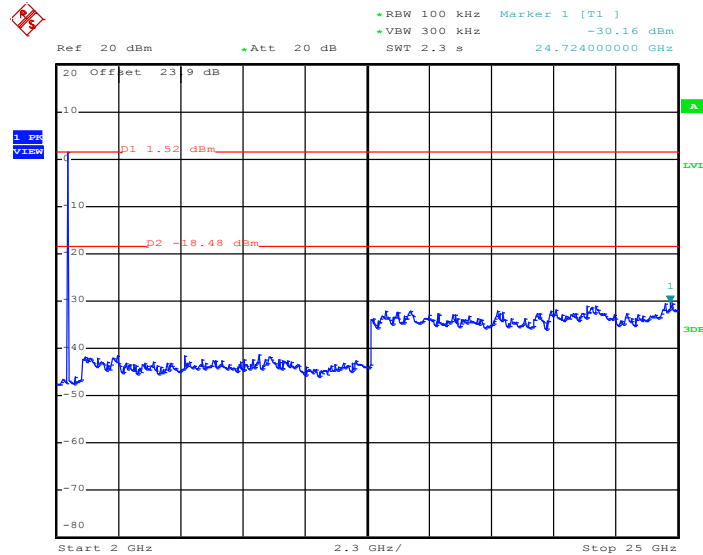


Date: 22.NOV.2016 20:27:10




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

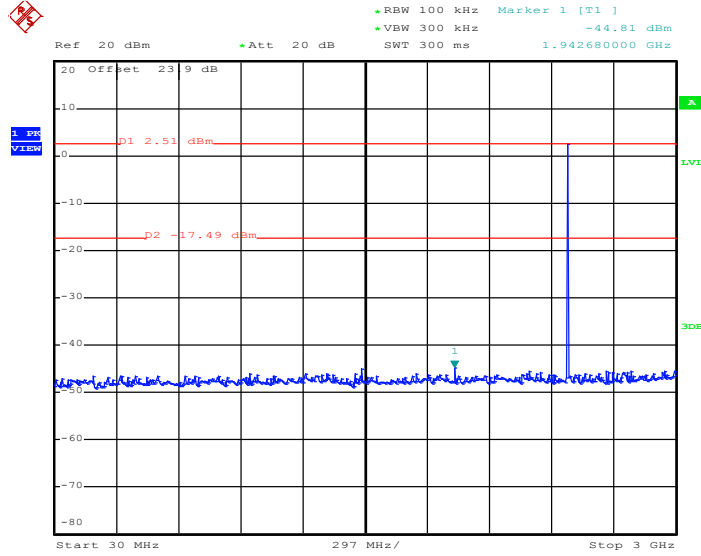

Date: 22.NOV.2016 20:31:55

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

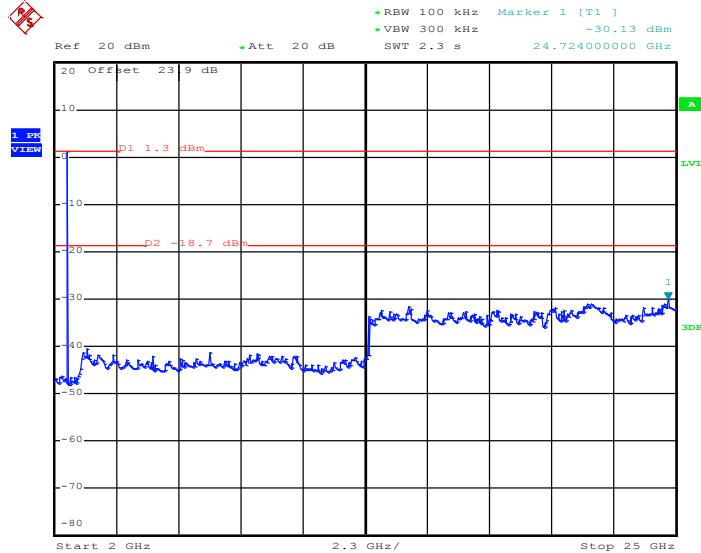


Date: 22.NOV.2016 20:32:17




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

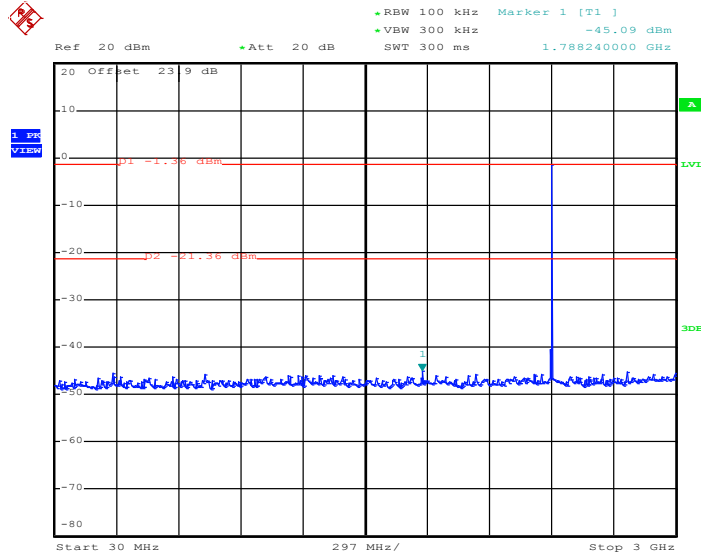

Date: 22.NOV.2016 20:38:37

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

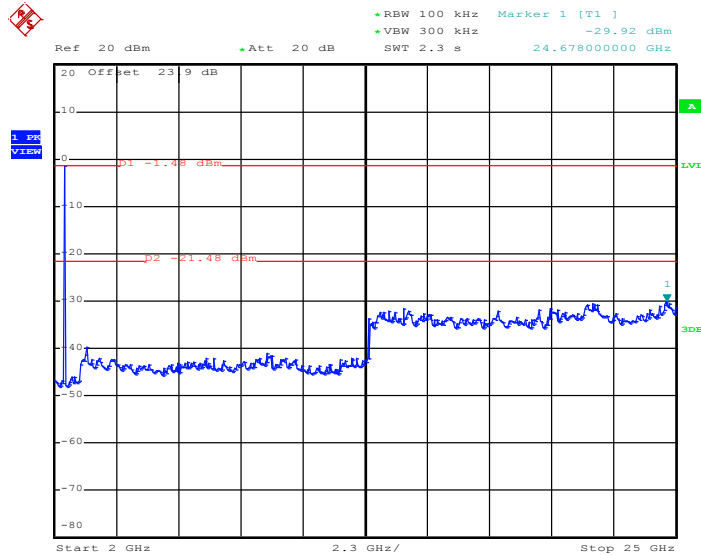


Date: 22.NOV.2016 20:38:59




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

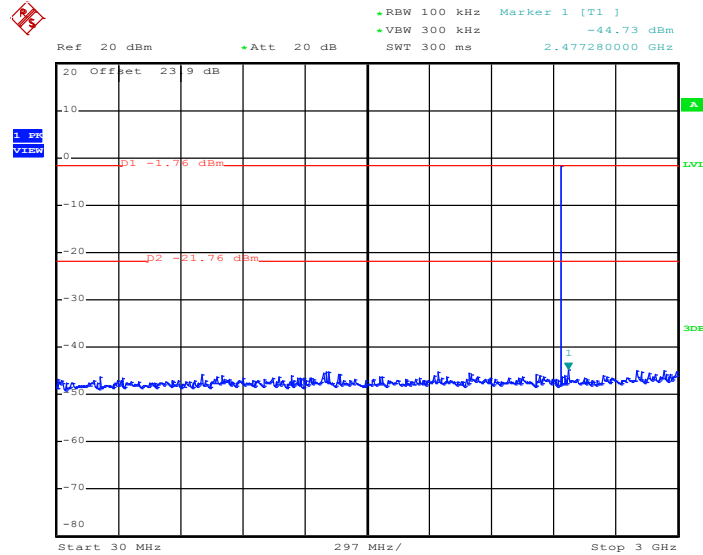

Date: 22.NOV.2016 20:42:50

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

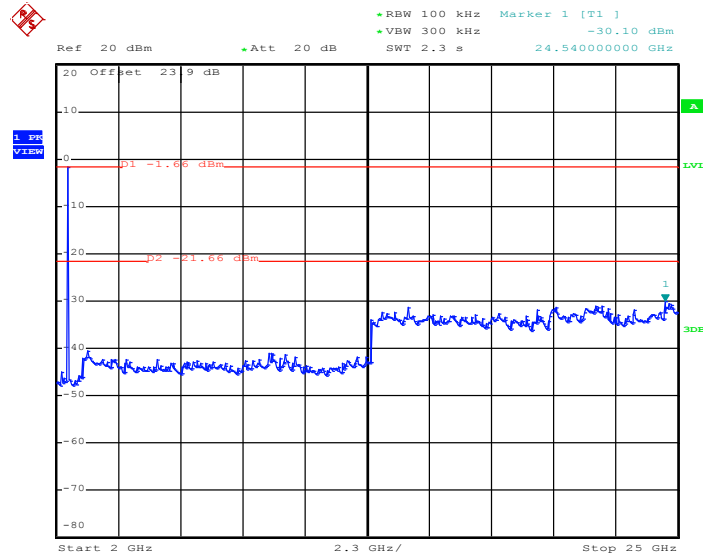


Date: 22.NOV.2016 20:43:12




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

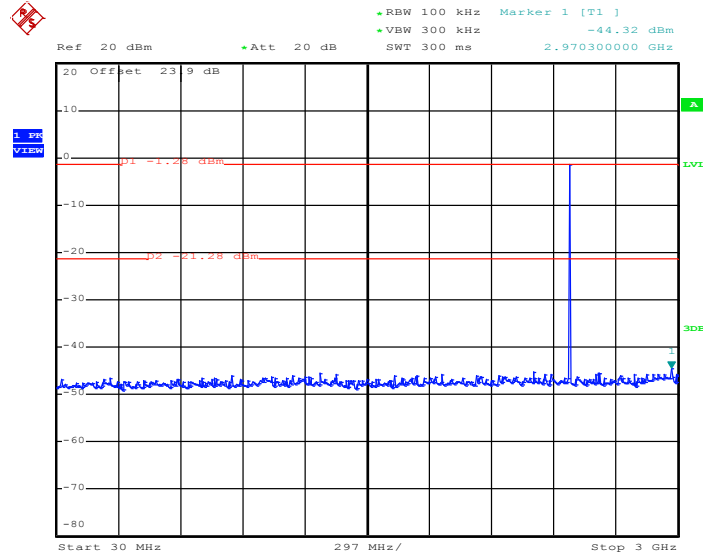

Date: 22.NOV.2016 20:52:07

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

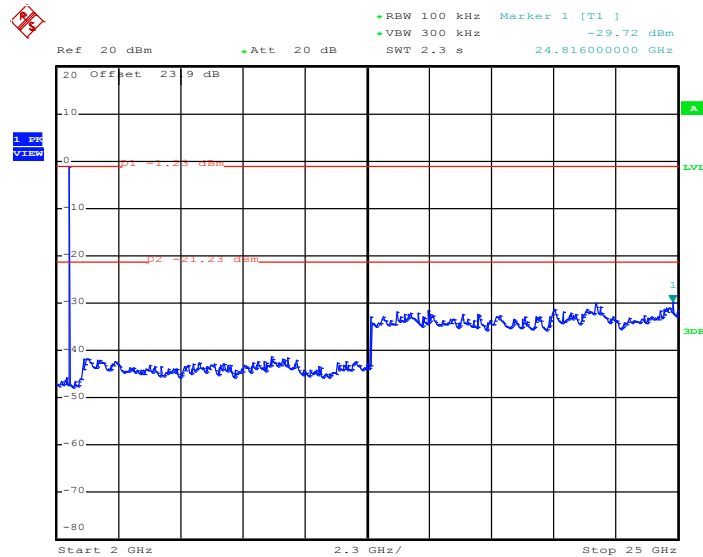


Date: 22.NOV.2016 20:52:29




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

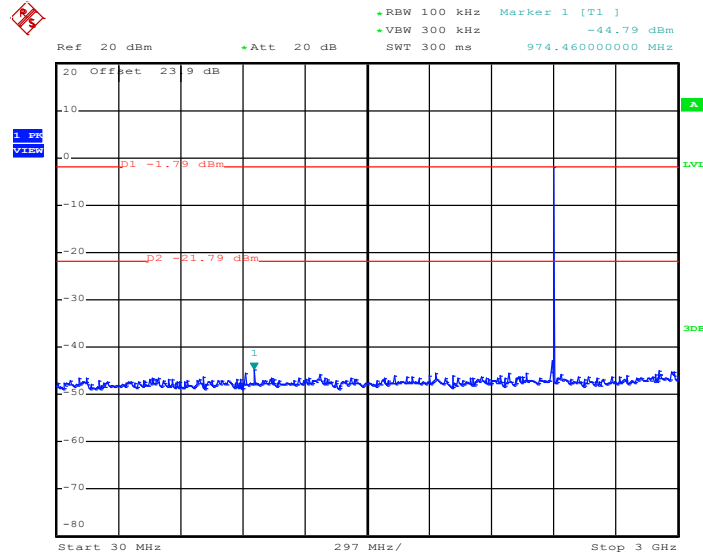

Date: 22.NOV.2016 21:14:35

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

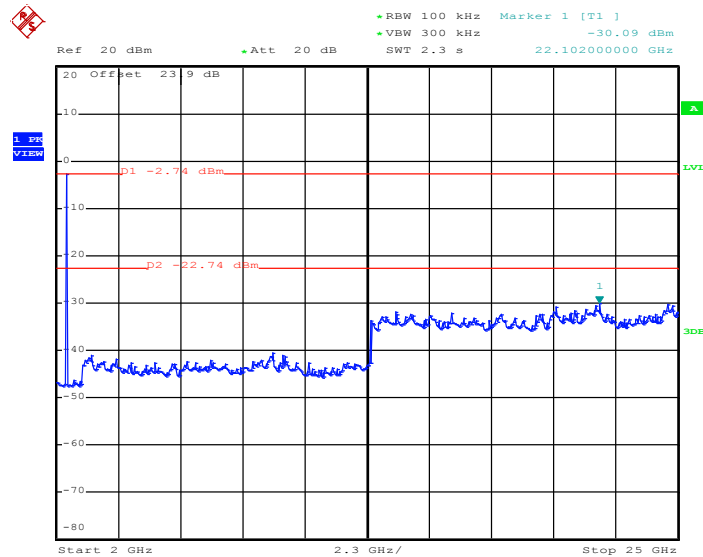


Date: 22.NOV.2016 21:14:56




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

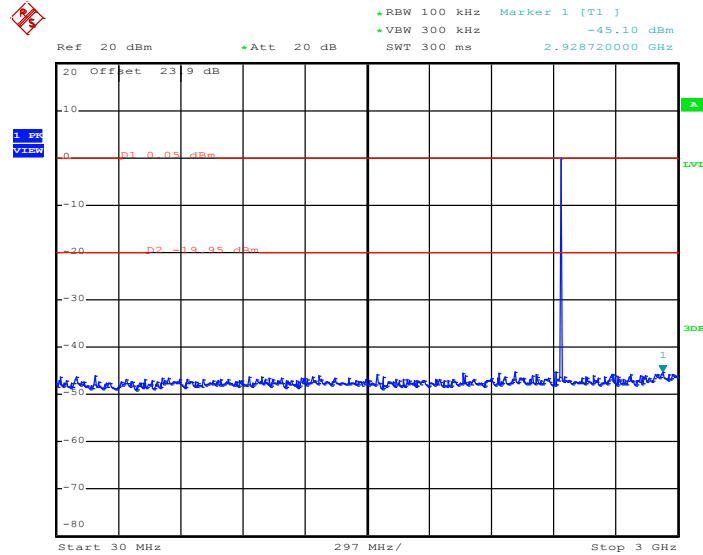

Date: 22.NOV.2016 21:17:59

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

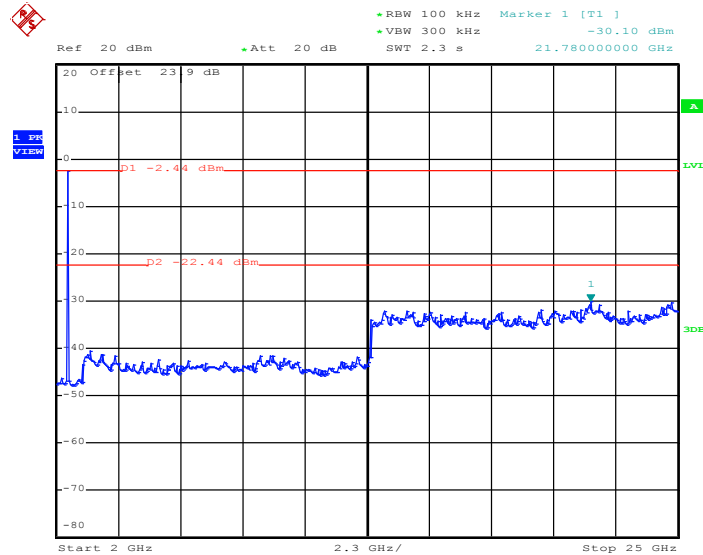


Date: 22.NOV.2016 21:18:21




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

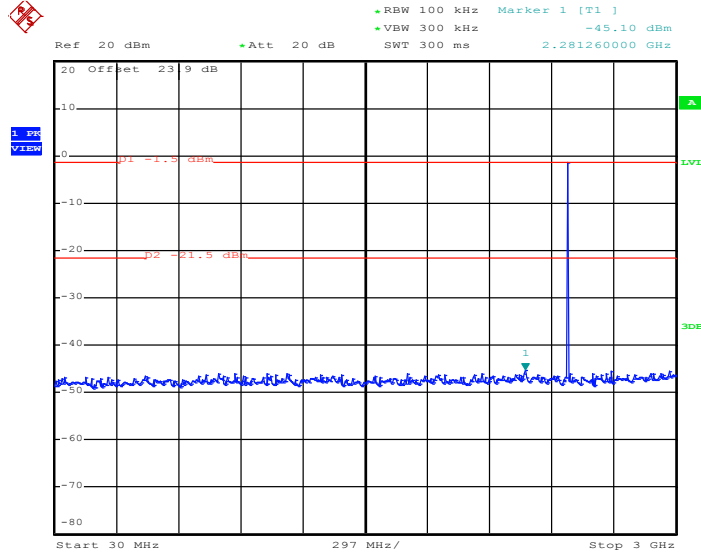

Date: 22.NOV.2016 21:23:47

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

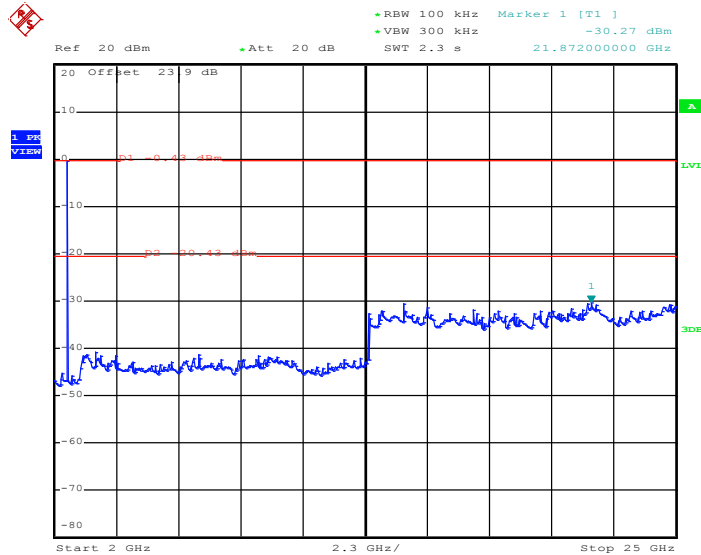

Date: 22.NOV.2016 21:24:14





### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.77dB) derived from  $20 \log (\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

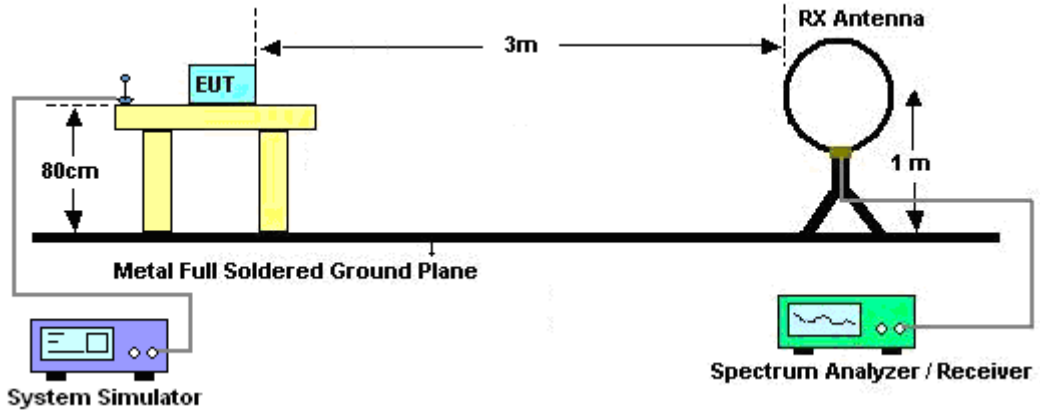

For radiated emissions from 30MHz to 1GHz

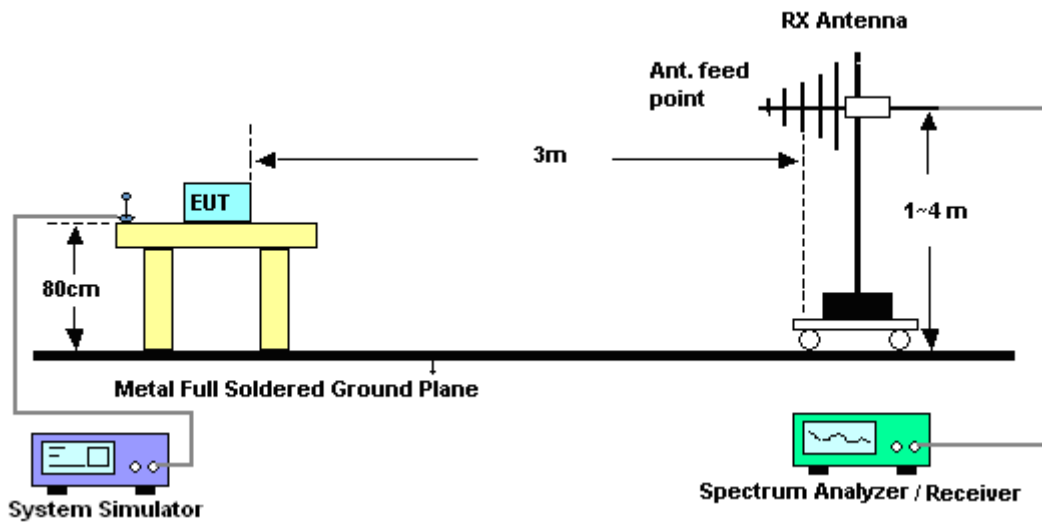

For radiated emissions above 1GHz

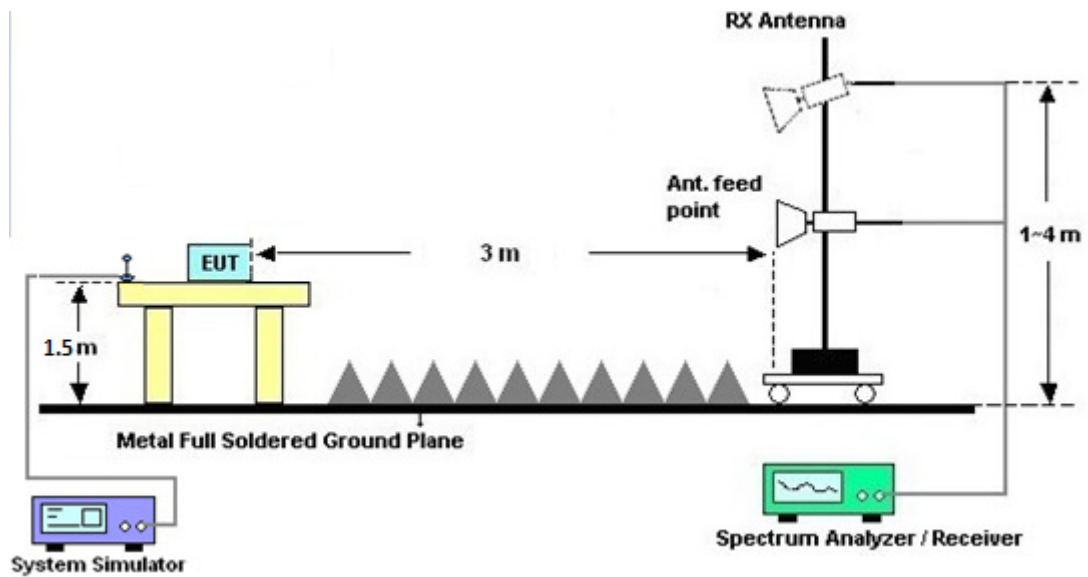


### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.




### 3.8.6 Duty cycle correction factor for average measurement

#### DH5 on time (One Pulse) Plot on Channel 39

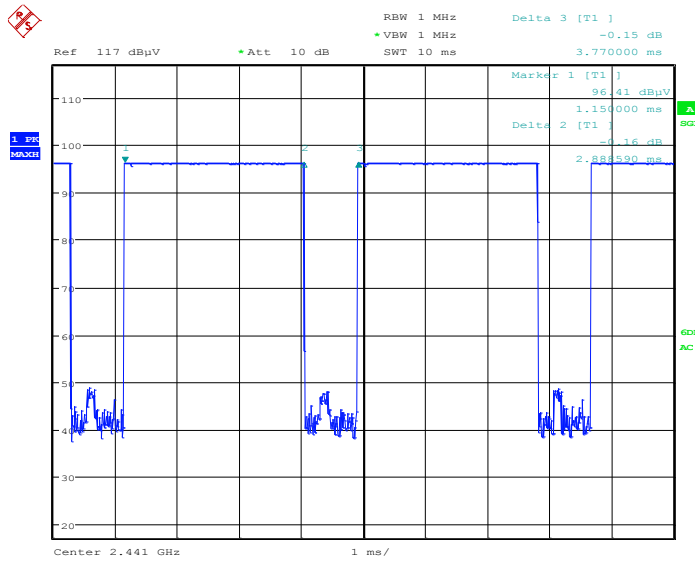

Date: 14.NOV.2016 19:31:21

#### DH5 on time (Count Pulses) Plot on Channel 39

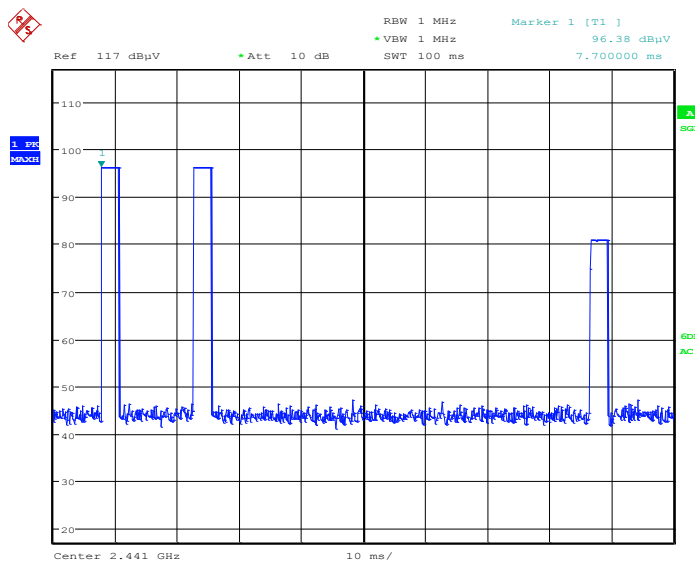

Date: 14.NOV.2016 19:32:09

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.77 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100\text{ms}) = -24.77 \text{ dB}$$

**3.8.7 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix A and B.

**3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix A and B.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

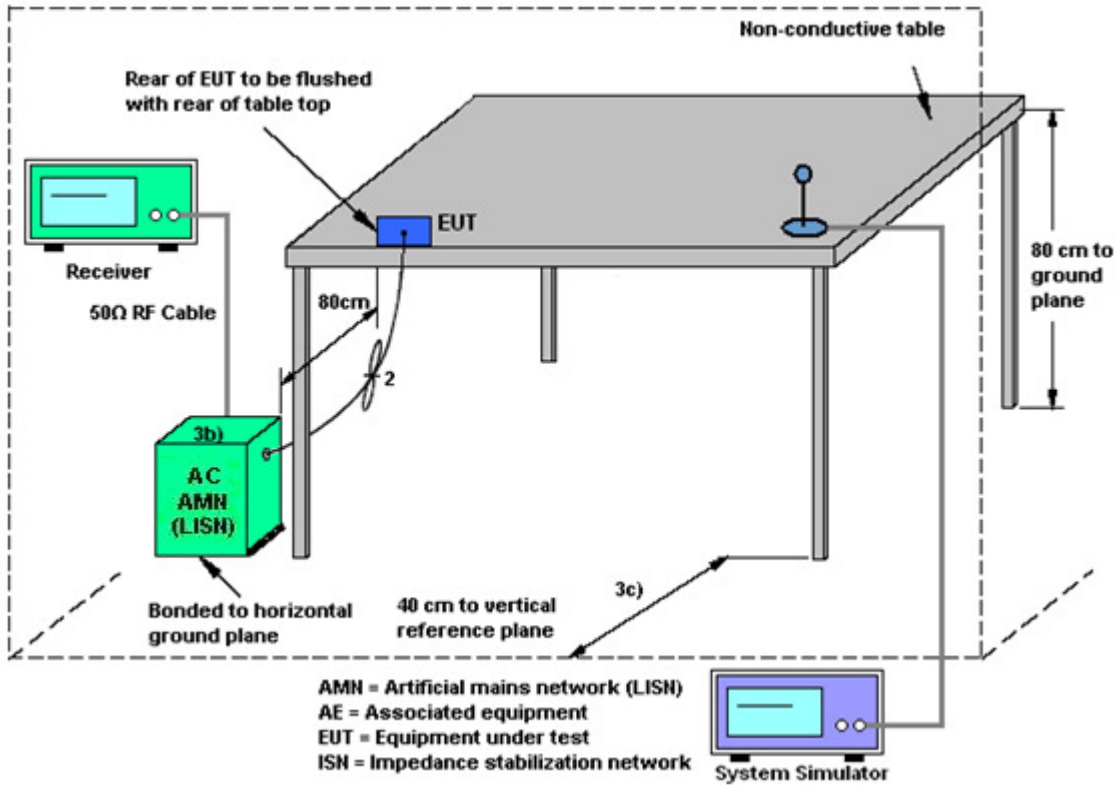






### 3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + NFC active + Battery + Scanner + without Exoskeleton + Rugged Charge/USB Cable + Adapter (SAWA-65-20005A (5V/2.5A)) + Headset Jumper (CBL-TC51-HDST25-01) + Earphone (HDST-25MM-PTVP-01)		

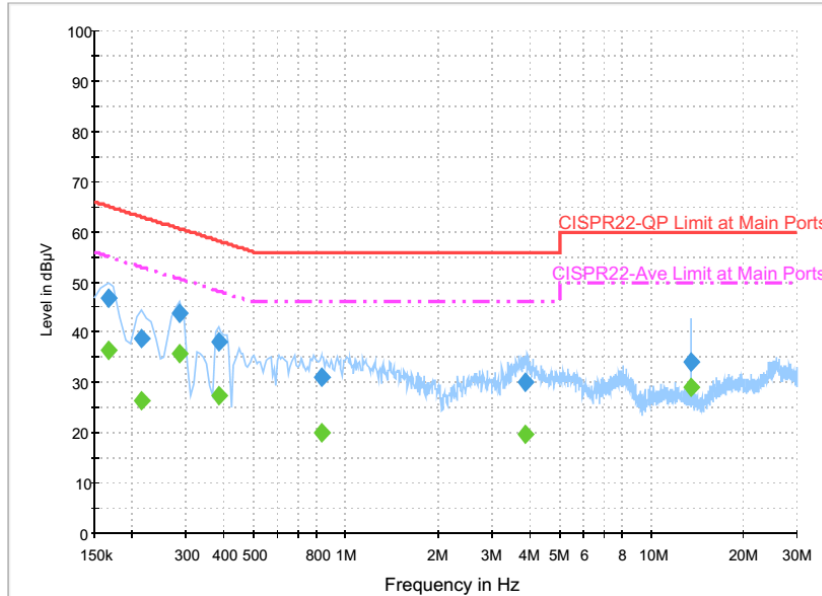

#### Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	46.7	Off	L1	19.6	18.5	65.2
0.214000	38.9	Off	L1	19.6	24.1	63.0
0.286000	43.8	Off	L1	19.6	16.8	60.6
0.382000	38.0	Off	L1	19.6	20.2	58.2
0.830000	31.0	Off	L1	19.6	25.0	56.0
3.854000	30.1	Off	L1	19.8	25.9	56.0
13.558000	34.1	Off	L1	20.3	25.9	60.0

#### Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	36.5	Off	L1	19.6	18.7	55.2
0.214000	26.6	Off	L1	19.6	26.4	53.0
0.286000	35.8	Off	L1	19.6	14.8	50.6
0.382000	27.3	Off	L1	19.6	20.9	48.2
0.830000	20.2	Off	L1	19.6	25.8	46.0
3.854000	19.8	Off	L1	19.8	26.2	46.0
13.558000	29.1	Off	L1	20.3	20.9	50.0



Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + NFC active + Battery + Scanner + without Exoskeleton + Rugged Charge/USB Cable + Adapter (SAWA-65-20005A (5V/2.5A)) + Headset Jumper (CBL-TC51-HDST25-01) + Earphone (HDST-25MM-PTVP-01)		

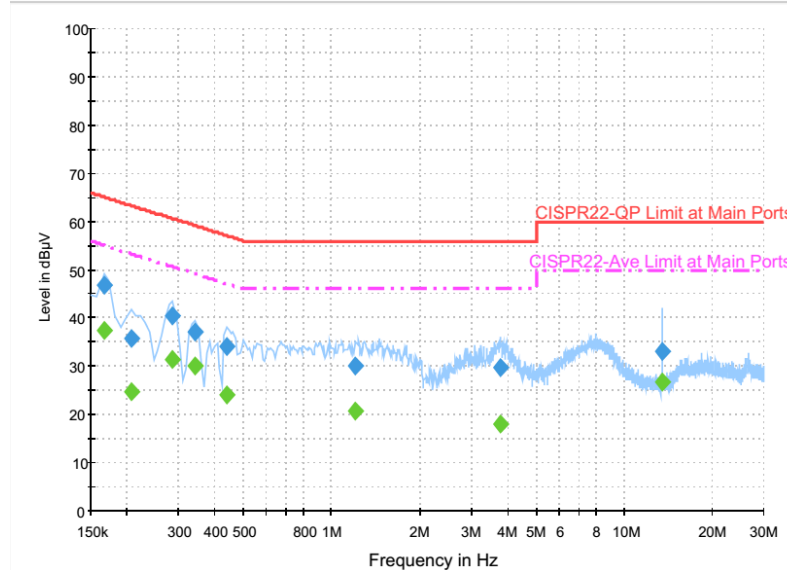

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	46.8	Off	N	19.6	18.4	65.2
0.206000	35.7	Off	N	19.6	27.7	63.4
0.286000	40.3	Off	N	19.6	20.3	60.6
0.342000	37.0	Off	N	19.6	22.2	59.2
0.438000	34.1	Off	N	19.6	23.0	57.1
1.206000	29.9	Off	N	19.6	26.1	56.0
3.774000	29.9	Off	N	19.7	26.1	56.0
13.558000	33.0	Off	N	20.4	27.0	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	37.5	Off	N	19.6	17.7	55.2
0.206000	24.7	Off	N	19.6	28.7	53.4
0.286000	31.3	Off	N	19.6	19.3	50.6
0.342000	30.0	Off	N	19.6	19.2	49.2
0.438000	24.1	Off	N	19.6	23.0	47.1
1.206000	20.9	Off	N	19.6	25.1	46.0
3.774000	18.0	Off	N	19.7	28.0	46.0
13.558000	26.9	Off	N	20.4	23.1	50.0



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 08, 2016	Nov. 08, 2016 ~ Nov. 22, 2016	Jan. 07, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 07, 2016	Nov. 08, 2016 ~ Nov. 22, 2016	Jan. 06, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 17, 2016	Nov. 08, 2016 ~ Nov. 22, 2016	Jun. 16, 2017	Conducted (TH05-HY)
BT Base Station(Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 21, 2016	Nov. 08, 2016 ~ Nov. 22, 2016	Sep. 20, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Oct. 22, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Oct. 22, 2016	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Oct. 22, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Nov. 13, 2016 ~ Nov. 20, 2016	Sep. 01, 2017	Radiation (03CH12-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Nov. 09, 2017	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 12, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Oct. 11, 2017	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	37059&01	30MHz~1GHz	Oct. 15, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Oct. 14, 2017	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 21, 2015	Nov. 13, 2016 ~ Nov. 20, 2016	Dec. 20, 2016	Radiation (03CH12-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Feb. 14, 2017	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-132 8	1GHz ~ 18GHz	Oct. 25, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Oct. 24, 2017	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1815698	1GHz~18GHz	Dec. 14, 2015	Nov. 13, 2016 ~ Nov. 20, 2016	Dec. 13, 2016	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY532701 48	1GHz~26.5GHz	Jan. 30, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Jan. 29, 2017	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Nov. 13, 2016 ~ Nov. 20, 2016	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 13, 2016 ~ Nov. 20, 2016	N/A	Radiation (03CH12-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Feb. 14, 2017	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz ~ 40GHz	Apr. 15, 2016	Nov. 13, 2016 ~ Nov. 20, 2016	Apr. 14, 2017	Radiation (03CH12-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.70
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.10
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.70
---	------



## Appendix A. Radiated Spurious Emission

Test Engineer :	Karl Hou, Citta Ke, Nick Yu and Peter Chiu	Temperature :	23~24°C
		Relative Humidity :	51~54%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	(H/V)	
					Line	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2370.59	50.64	-23.36	74	47.75	27.01	7.37	31.49	175	145	P	H	
		2370.59	25.87	-28.13	54	-	-	-	-	-	-	A	H	
	*	2402	99.52	-	-	96.45	27.11	7.45	31.49	175	145	P	H	
	*	2402	74.75	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2372.16	51.67	-22.33	74	48.78	27.01	7.37	31.49	393	46	P	V
			2372.16	26.9	-27.1	54	-	-	-	-	-	-	A	V
	*		2402	96.34	-	-	93.27	27.11	7.45	31.49	393	46	P	V
	*		2402	71.57	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2349.9	50.97	-23.03	74	48.17	26.93	7.37	31.5	168	145	P	H	
		2349.9	26.2	-27.8	54	-	-	-	-	-	-	A	H	
	*	2441	99.95	-	-	96.71	27.22	7.49	31.47	168	145	P	H	
	*	2441	75.18	-	-	-	-	-	-	-	-	A	H	
			2486.21	50.59	-23.41	74	47.27	27.26	7.53	31.47	168	145	P	H
			2486.21	25.82	-28.18	54	-	-	-	-	-	-	A	H
			2357.04	50.22	-23.78	74	47.38	26.97	7.37	31.5	378	48	P	V
			2357.04	25.45	-28.55	54	-	-	-	-	-	-	A	V
	*		2441	94.83	-	-	91.59	27.22	7.49	31.47	378	48	P	V
	*		2441	70.06	-	-	-	-	-	-	-	-	A	V
			2496.92	51.61	-22.39	74	48.24	27.3	7.53	31.46	378	48	P	V
			2496.92	26.84	-27.16	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	99.17	-	-	95.77	27.34	7.53	31.47	188	143	P	H
	*	2480	74.4	-	-	-	-	-	-	-	-	A	H
		2496.88	51.37	-22.63	74	48	27.3	7.53	31.46	188	143	P	H
		2496.88	26.6	-27.4	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	94.57	-	-	91.17	27.34	7.53	31.47	364	62	P	V
	*	2480	69.8	-	-	-	-	-	-	-	-	A	V
		2487.28	51.43	-22.57	74	48.11	27.26	7.53	31.47	364	62	P	V
		2487.28	26.66	-27.34	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4804	37.16	-36.84	74	52.57	32.15	10.59	58.15	100	0	P	H	
		4804	12.39	-41.61	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	36.8	-37.2	74	52.21	32.15	10.59	58.15	100	0	P	V	
		4804	12.03	-41.97	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	37.17	-36.83	74	52.09	32.29	10.89	58.1	100	0	P	H	
		4882	12.4	-41.6	54	-	-	-	-	-	-	A	H	
		7323	41.77	-32.23	74	50.57	36.12	14.18	59.1	100	0	P	H	
		7323	17	-37	54	-	-	-	-	-	-	A	H	
		4882	36.89	-37.11	74	52.77	31.33	10.89	58.1	100	0	P	V	
		4882	12.12	-41.88	54	-	-	-	-	-	-	-	A	V
		7323	41.41	-32.59	74	50.21	36.12	14.18	59.1	100	0	P	V	
		7323	16.64	-37.36	54	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	37.86	-36.14	74	52.27	32.43	11.19	58.03	100	0	P	H	
		4960	13.09	-40.91	54	-	-	-	-	-	-	A	H	
		7440	43.22	-30.78	74	51.61	36.46	14.32	59.17	100	0	P	H	
		7440	18.45	-35.55	54	-	-	-	-	-	-	A	H	
		4960	37.24	-36.76	74	52.63	31.45	11.19	58.03	100	0	P	V	
		4960	12.47	-41.53	54	-	-	-	-	-	-	A	V	
		7440	42.78	-31.22	74	51.17	36.46	14.32	59.17	100	0	P	V	
		7440	18.01	-35.99	54	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													





Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		37.02	26.68	-13.32	40	36.38	21.98	0.78	32.46	100	0	P	H	
		82.92	22.95	-17.05	40	40.3	14.03	1.06	32.44	-	-	P	H	
		116.94	28.01	-15.49	43.5	41.55	17.46	1.43	32.43	-	-	P	H	
		229.8	19.86	-26.14	46	33.69	16.7	1.83	32.36	-	-	P	H	
		948.2	31.83	-14.17	46	27.96	30.27	4.75	31.15	-	-	P	H	
		988.1	31.54	-22.46	54	28.58	29.84	3.92	30.8	-	-	P	H	
														H
														H
														H
														H
														H
														H
			36.75	34.2	-5.8	40	43.9	21.98	0.78	32.46	100	252	QP	V
			36.75	38.54	-	-	48.24	21.98	0.78	32.46	100	252	P	V
			62.4	28.8	-11.2	40	48.29	11.9	1.06	32.45	-	-	P	V
			119.91	22.57	-20.93	43.5	35.97	17.6	1.43	32.43	-	-	P	V
			205.77	20.72	-22.78	43.5	35.46	15.96	1.7	32.4	-	-	P	V
			885.2	31.27	-14.73	46	29.67	28.81	4.45	31.66	-	-	P	V
			945.4	31.65	-14.35	46	27.88	30.19	4.75	31.17	-	-	P	V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





## Appendix B. Radiated Spurious Emission Plots

<b>Test Engineer :</b>	Karl Hou, Citta Ke, Nick Yu and Peter Chiu	<b>Temperature :</b>	23~24°C
		<b>Relative Humidity :</b>	51~54%





2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

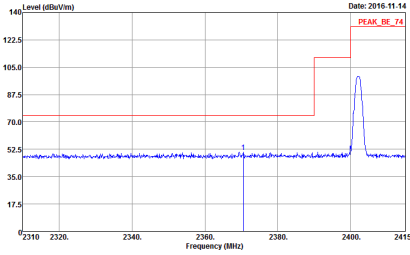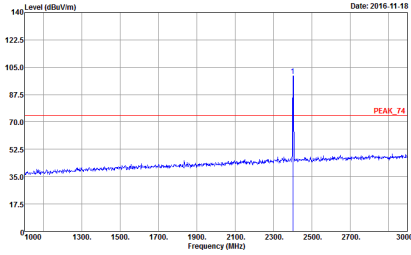BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY  Condition : PEAK_RE_74 3m HORN_9120D_1328 HORIZONTAL  : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Detector : Peak  Project : 672014-10  Mode : 1</p>	 <p>Site : 03CH12-HY  Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL  : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Detector : Peak  Project : 672014-10  Mode : 1</p>


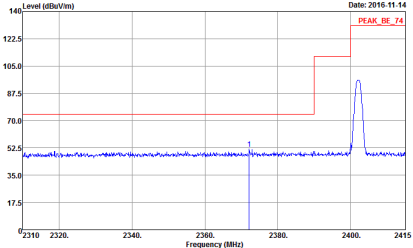
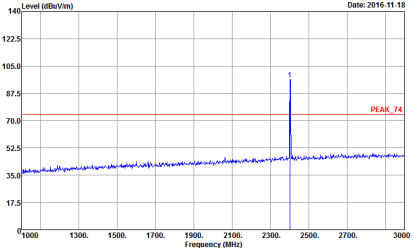


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2016-11-14 PEAK_BE_74</p> <p>Site : 03CH12-FY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 672014-10 Mode : 1</p>	 <p>Date: 2016-11-18 PEAK_74</p> <p>Site : 03CH12-FY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 672014-10 Mode : 1</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	<p style="text-align: center;"><b>Horizontal</b></p> <p style="text-align: right;">Date: 2016.11.14 PEAK_BE_74</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 672014-10 Mode : 2</p>	<p style="text-align: center;"><b>Fundamental</b></p> <p style="text-align: right;">Date: 2016.11.18 PEAK_74</p> <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 672014-10 Mode : 2</p>
Peak	<p style="text-align: right;">Date: 2016.11.14 PEAK_BE_74</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 672014-10 Mode : 2</p>	<p style="text-align: center;">Left blank</p>

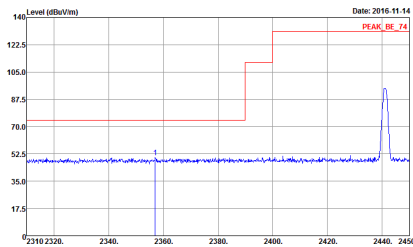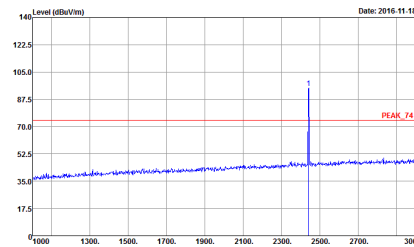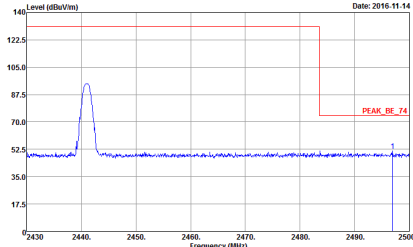



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	<p style="text-align: center;"><b>Vertical</b></p>  <p style="text-align: right;">Date: 2016.11.14</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH12-HY            Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 672014-10            Mode : 2</p>	<p style="text-align: center;"><b>Fundamental</b></p>  <p style="text-align: right;">Date: 2016.11.18</p> <p style="text-align: right;">PEAK_74</p> <p>Site : 03CH12-HY            Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 672014-10            Mode : 2</p>
Peak	 <p style="text-align: right;">Date: 2016.11.14</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH12-HY            Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 672014-10            Mode : 2</p>	Left blank



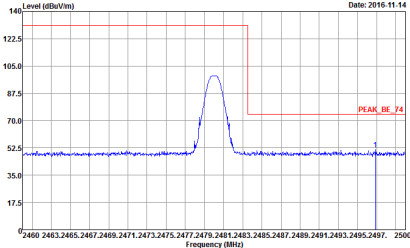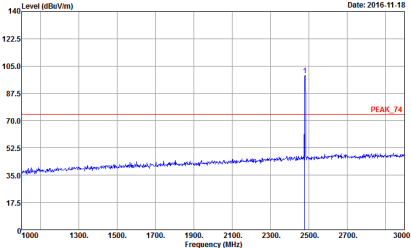

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2016-11-14</p> <p>Site : 03CH12-FY            Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL            Detector : Peak            Project : 672014-10            Mode : 3</p>	 <p>Date: 2016-11-18</p> <p>Site : 03CH12-FY            Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL            Detector : Peak            Project : 672014-10            Mode : 3</p>

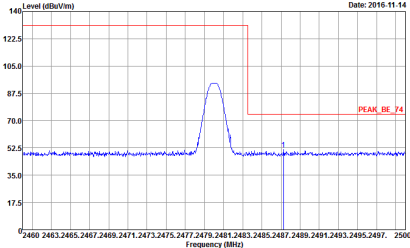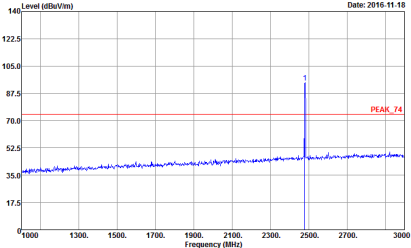

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	<p data-bbox="501 405 587 432">Vertical</p>  <p data-bbox="347 712 759 784">Site : 03CH12-FY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 672014-10 Mode : 3</p>	<p data-bbox="1059 405 1209 432">Fundamental</p>  <p data-bbox="944 712 1356 784">Site : 03CH12-FY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 672014-10 Mode : 3</p>



2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Project : 672014-10 Mode : 1</p>	<p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Project : 672014-10 Mode : 1</p>



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m													
ANT	BT CH39 2441MHz													
1	Horizontal	Vertical												
Peak Avg.	<p>Horizontal Spectrum Plot Data:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Level (dBuV/m)</th> </tr> </thead> <tbody> <tr> <td>4000</td> <td>~40</td> </tr> <tr> <td>6000</td> <td>~45</td> </tr> </tbody> </table>	Frequency (MHz)	Level (dBuV/m)	4000	~40	6000	~45	<p>Vertical Spectrum Plot Data:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Level (dBuV/m)</th> </tr> </thead> <tbody> <tr> <td>4000</td> <td>~40</td> </tr> <tr> <td>6000</td> <td>~45</td> </tr> </tbody> </table>	Frequency (MHz)	Level (dBuV/m)	4000	~40	6000	~45
Frequency (MHz)	Level (dBuV/m)													
4000	~40													
6000	~45													
Frequency (MHz)	Level (dBuV/m)													
4000	~40													
6000	~45													

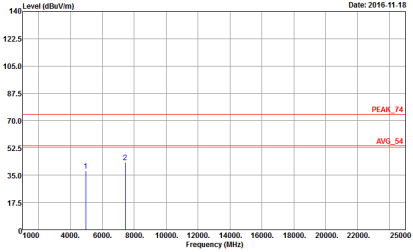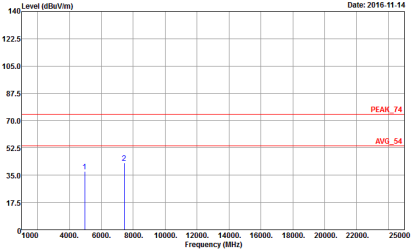

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK_74 Site HORN_9120D_1328 HORIZONTAL Project : 672014-10 Mode : 3</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 Site HORN_9120D_1328 VERTICAL Project : 672014-10 Mode : 3</p>



Emission below 1GHz

2.4GHz BT (LF)

BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
<p>QP / Peak</p>	<p>Site : 03CH12-HY            Condition : QP 3m BIL06_6111D_37059 HORIZONTAL            Detector : Peak            Project : 672014-10            Mode : -4</p>	<p>Site : 03CH12-HY            Condition : QP 3m BIL06_6111D_37059 VERTICAL            Detector : Peak            Project : 672014-10            Mode : -4</p>