





CSE Plot on Ch 78 between 30MHz ~ 3 GHz

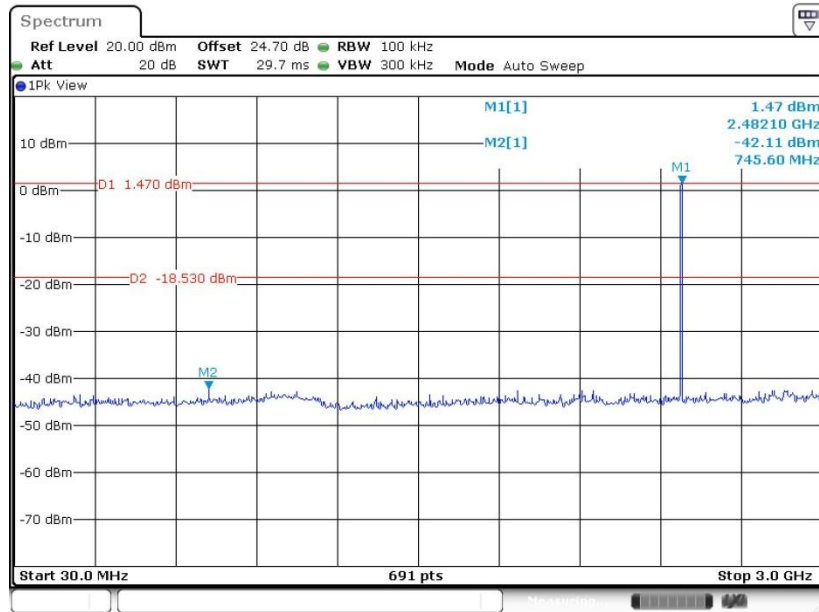

Date: 29.JAN.2019 10:06:27

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

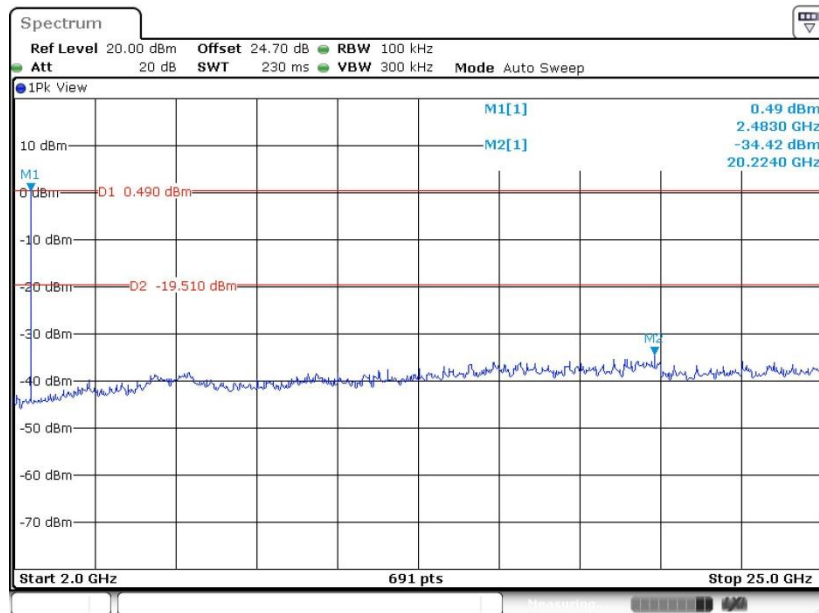


Date: 29.JAN.2019 10:07:04




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

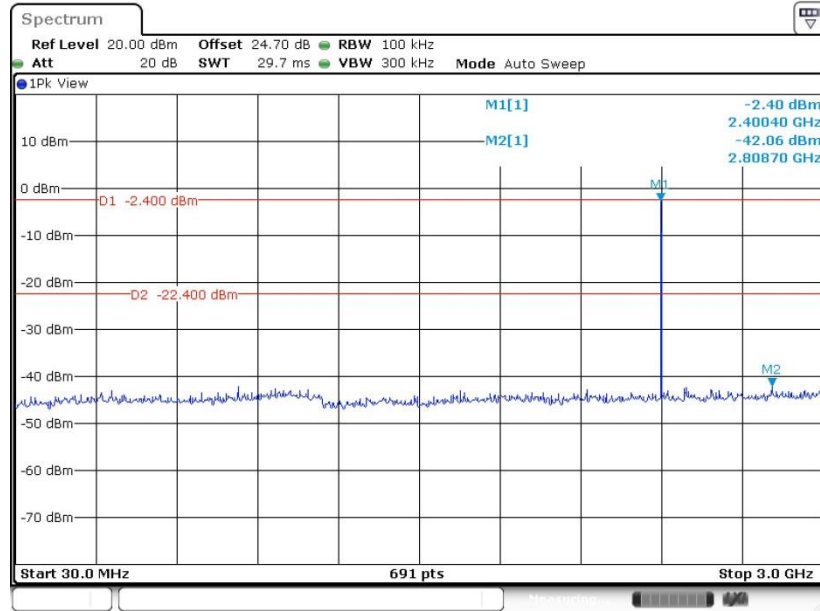

Date: 29.JAN.2019 10:14:21


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

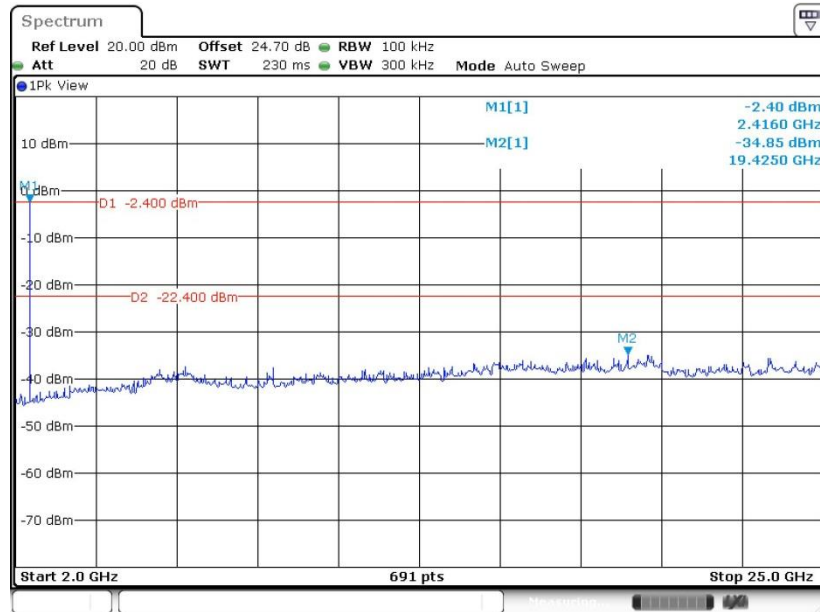

Date: 29.JAN.2019 10:14:59




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

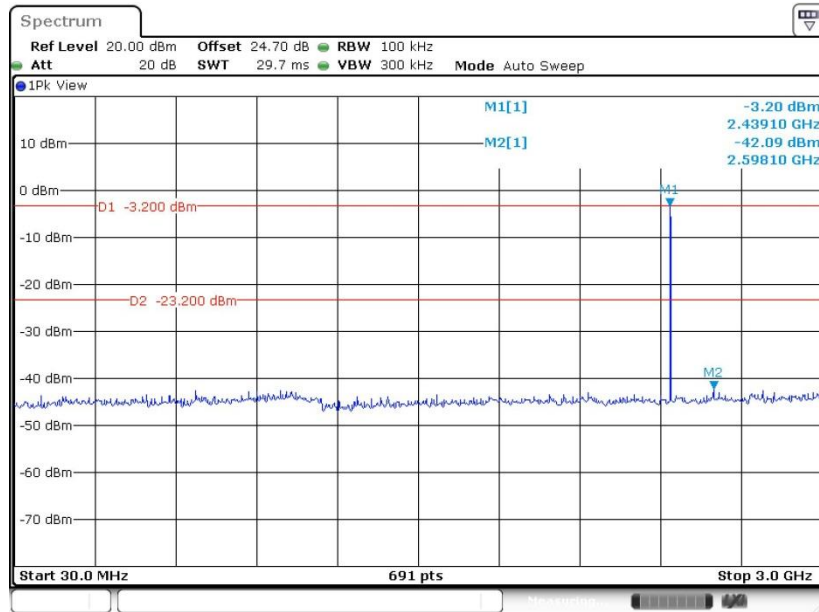

Date: 29.JAN.2019 10:26:45


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

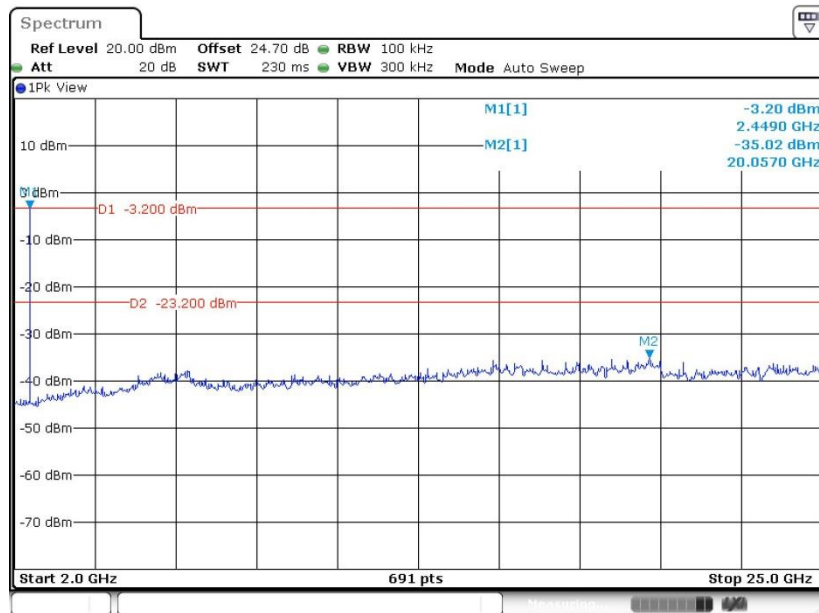

Date: 29.JAN.2019 10:27:13




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

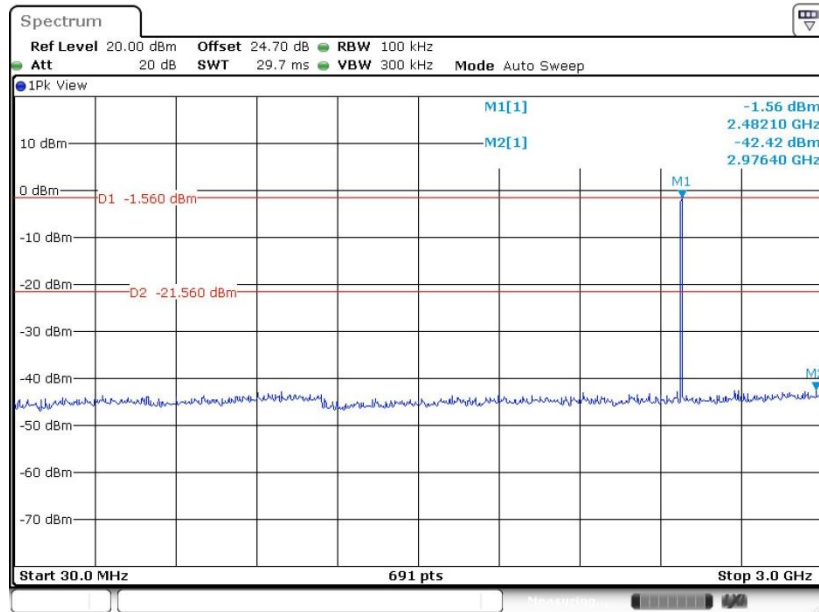

Date: 29.JAN.2019 10:31:44

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

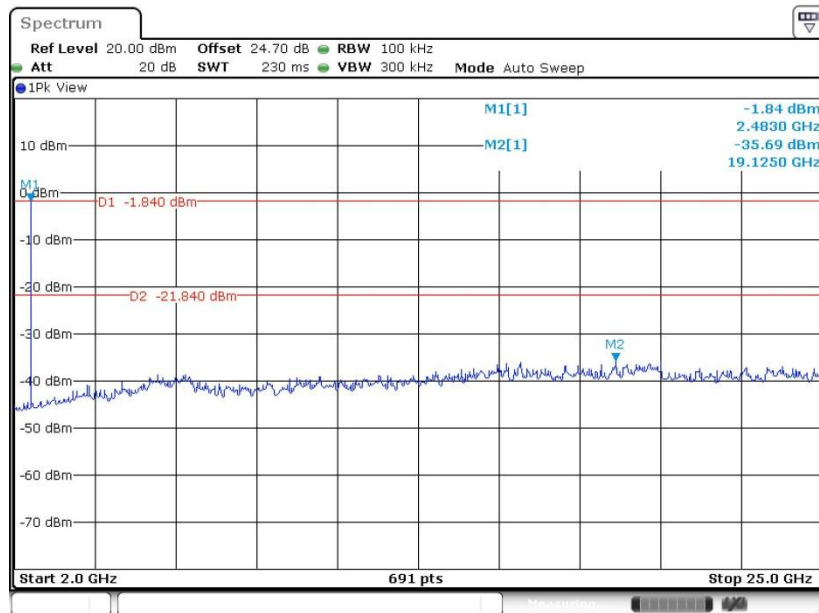


Date: 29.JAN.2019 10:33:14




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

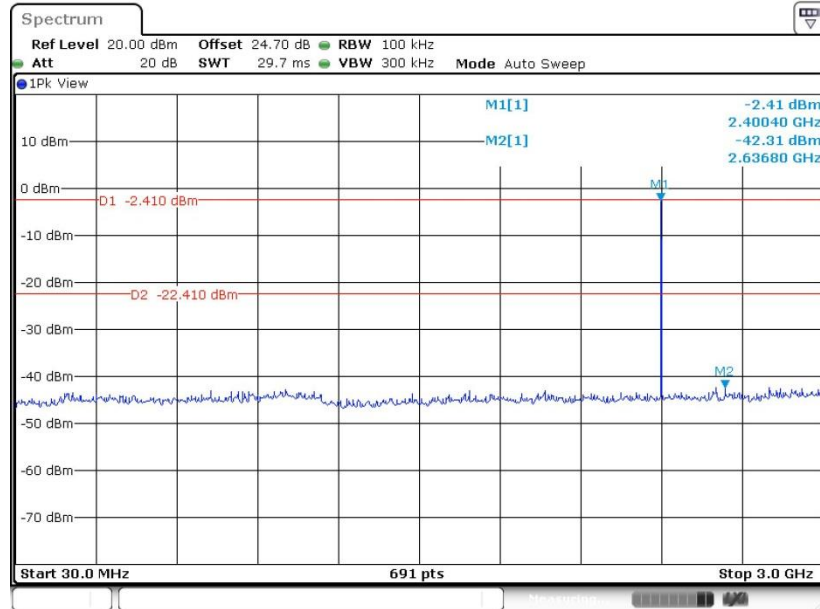

Date: 29.JAN.2019 10:42:55


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

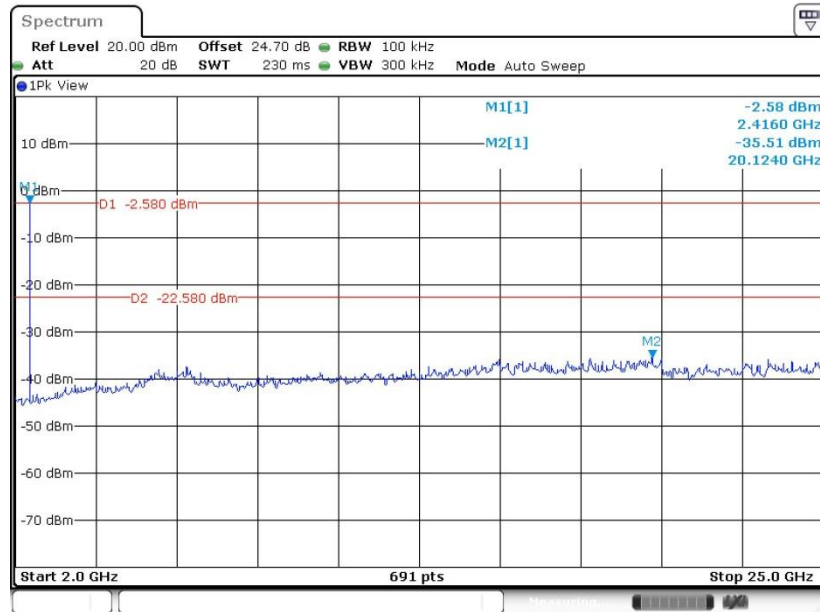

Date: 29.JAN.2019 10:43:24




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

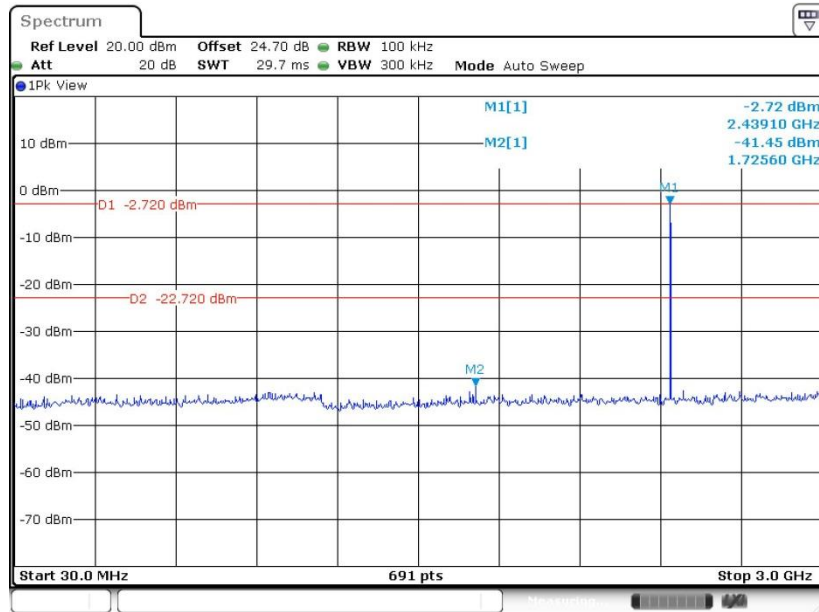

Date: 29.JAN.2019 10:45:24


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

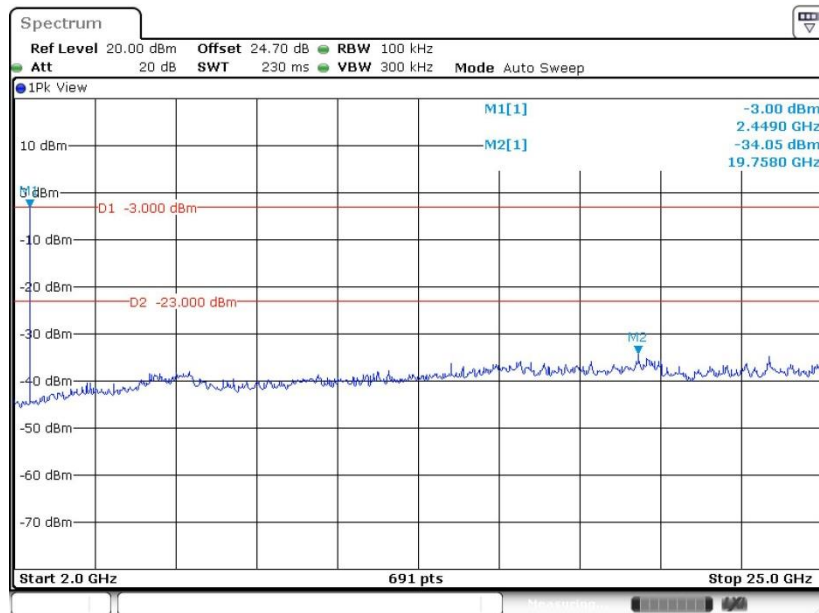

Date: 29.JAN.2019 10:45:51




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

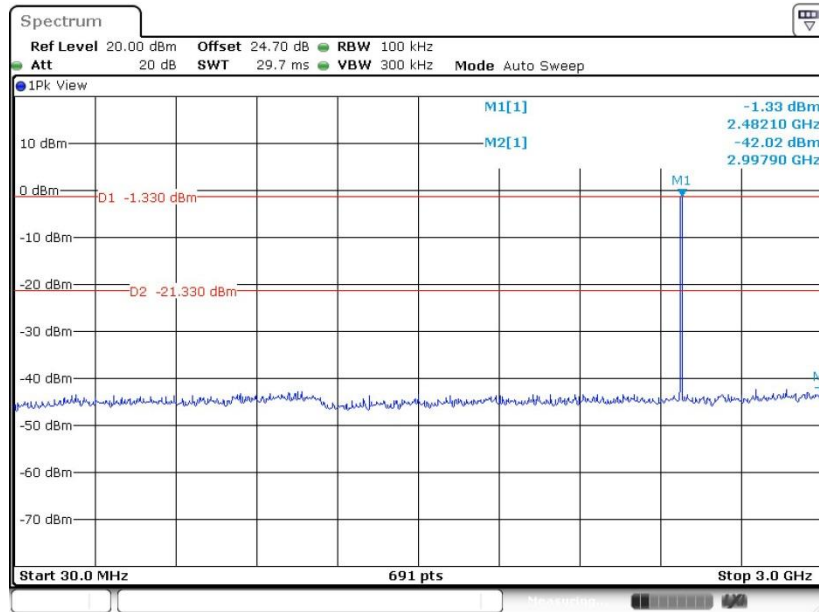

Date: 29.JAN.2019 10:49:04

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

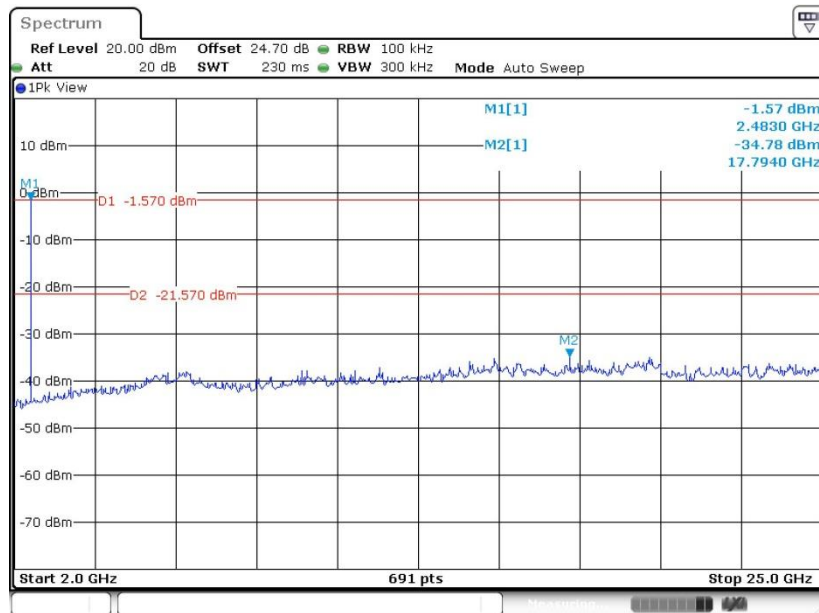

Date: 29.JAN.2019 10:51:20



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring equipment of this test report.




**3.8.3 Test Procedures**

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

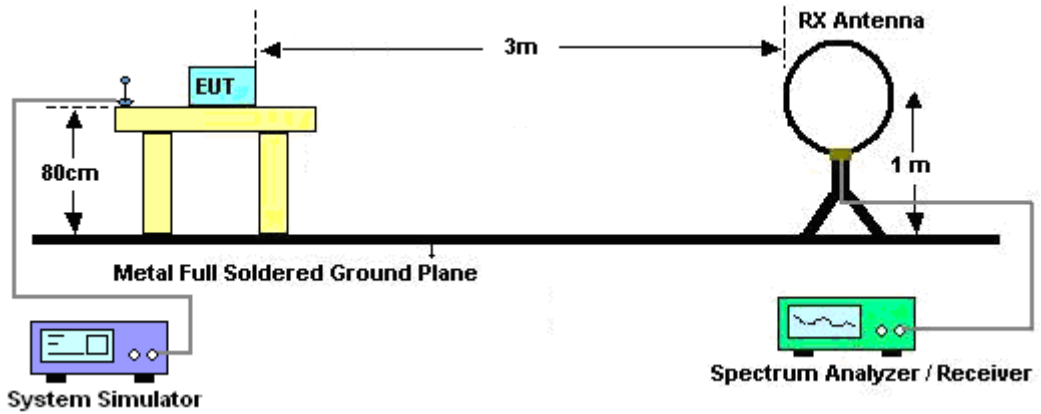

For radiated emissions from 30MHz to 1GHz

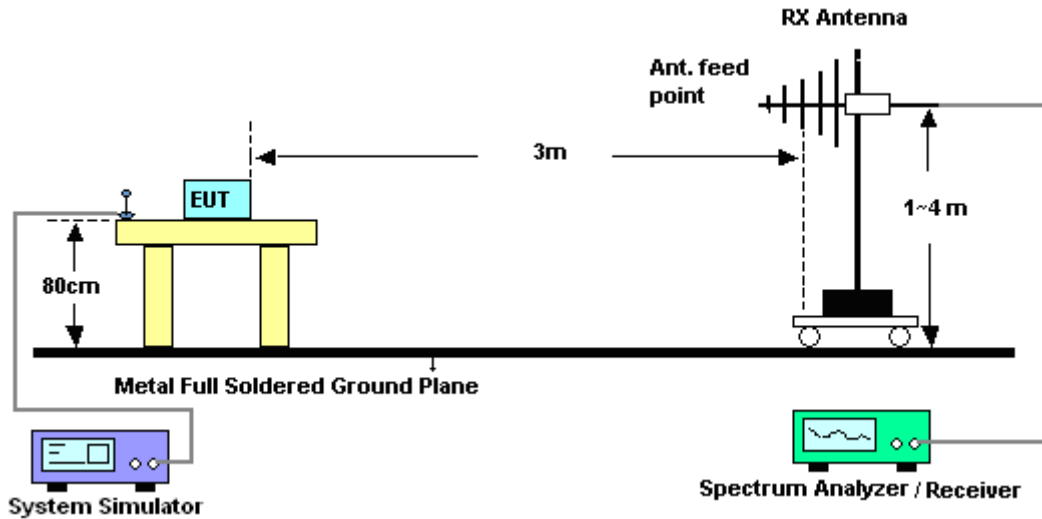

For radiated emissions above 1GHz

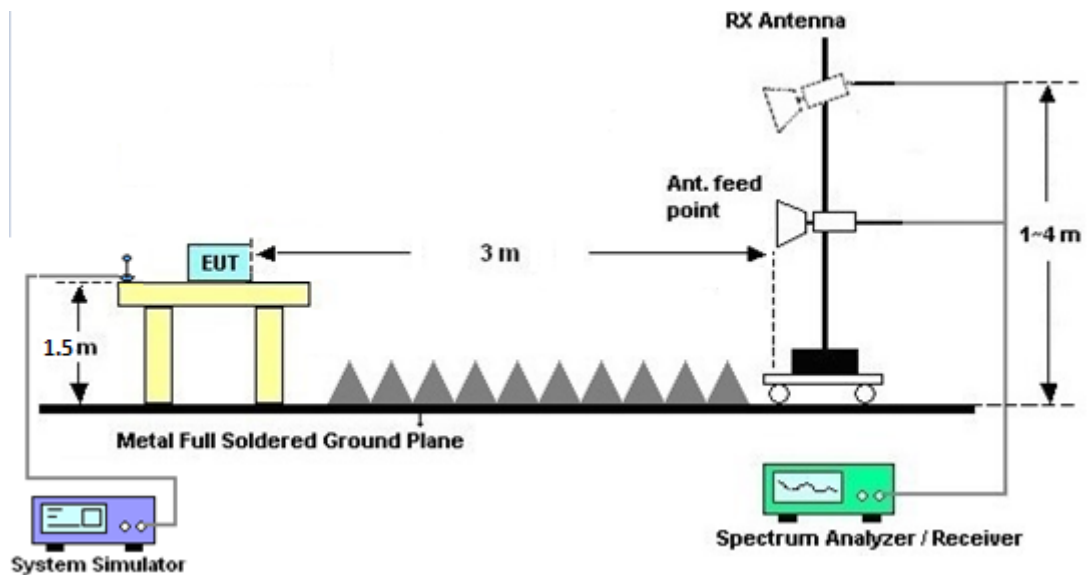

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.8.7 Duty Cycle

Please refer to Appendix D.

### 3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B and C.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

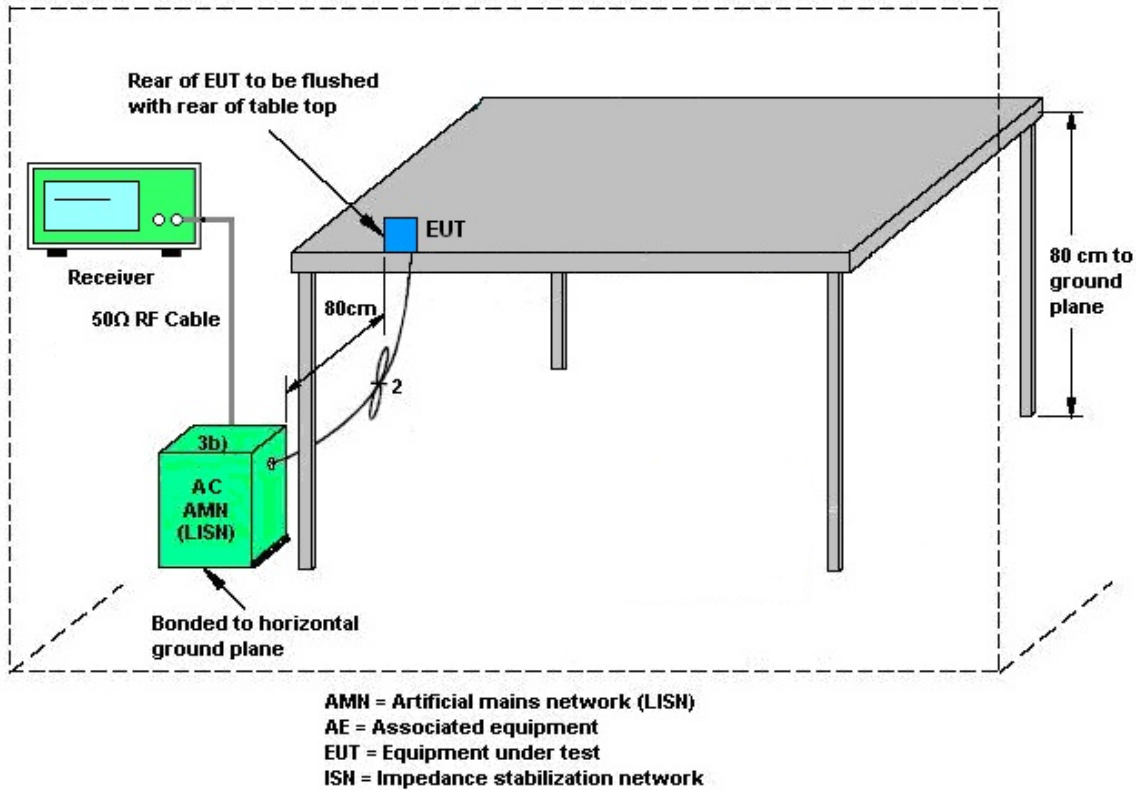

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1132003	N/A	Aug. 16, 2018	Nov. 08, 2018 ~ Jan. 29, 2019	Aug. 15, 2019	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Aug. 16, 2018	Nov. 08, 2018 ~ Jan. 29, 2019	Aug. 15, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 14, 2018	Nov. 08, 2018 ~ Jan. 29, 2019	Jun. 13, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV 30	100895	9kHz~30GHz	Apr. 20, 2018	Nov. 08, 2018 ~ Jan. 29, 2019	Apr. 19, 2019	Conducted (TH05-HY)
BT Base Station(Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 27, 2018	Nov. 08, 2018 ~ Jan. 29, 2019	Sep. 26, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	Nov. 08, 2018 ~ Jan. 29, 2019	Feb. 28, 2019	Conducted (TH05-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Mar. 29, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Mar. 28, 2019	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz ~ 18GHz	Jun. 29, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Jun. 28, 2019	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	37059&01	30MHz~1GHz	Oct. 13, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Oct. 12, 2019	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Dec. 05, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Dec. 04, 2019	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 14, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Nov. 13, 2020	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 21, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	May 20, 2019	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrument	310 N	187312	9KHz~1GHz	Dec. 04, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Dec. 03, 2019	Radiation (03CH13-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Jul. 15, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M~18GHz	Mar. 14, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Mar. 18, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30M~40GHz	Mar. 14, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Mar. 13, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30M~40GHz	Mar. 14, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Mar. 13, 2019	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 15, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Mar. 14, 2019	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Dec. 06, 2018 ~ Mar. 11, 2019	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Dec. 06, 2018 ~ Mar. 11, 2019	N/A	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Dec. 06, 2018 ~ Mar. 11, 2019	N/A	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 01, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Oct. 31, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN2	3G High Pass	Jul. 16, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Jul. 15, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WLKS1200-1 2SS	SN2	1.2G Low Pass	Mar. 23, 2018	Dec. 06, 2018 ~ Mar. 11, 2019	Mar. 22, 2019	Radiation (03CH13-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 06, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 12, 2018	Mar. 06, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Mar. 06, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Mar. 06, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 06, 2019	N/A	Conduction (CO05-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Sep. 14, 2018	Mar. 06, 2019	Sep. 13, 2019	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Nov. 08, 2018	Mar. 06, 2019	Nov. 07, 2019	Conduction (CO05-HY)





## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.2
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.4
---	-----


### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.3
---	-----



## Appendix A. AC Conducted Emission Test Results

Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line

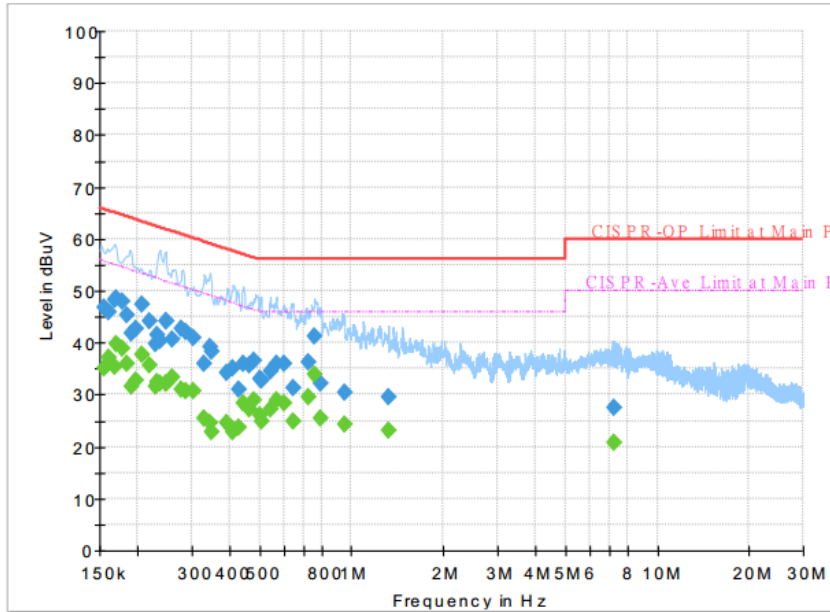


### Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	35.06	55.75	20.69	L1	OFF	19.5
0.154500	46.69	---	65.75	19.06	L1	OFF	19.5
0.161250	---	37.17	55.40	18.23	L1	OFF	19.5
0.161250	45.81	---	65.40	19.59	L1	OFF	19.5
0.168000	---	35.25	55.06	19.81	L1	OFF	19.5
0.168000	48.29	---	65.06	16.77	L1	OFF	19.5
0.170250	---	39.82	54.95	15.13	L1	OFF	19.5
0.170250	48.44	---	64.95	16.51	L1	OFF	19.5
0.177000	---	38.81	54.63	15.82	L1	OFF	19.5
0.177000	47.94	---	64.63	16.69	L1	OFF	19.5
0.183750	---	35.96	54.31	18.35	L1	OFF	19.5
0.183750	45.26	---	64.31	19.05	L1	OFF	19.5
0.190500	---	31.58	54.02	22.44	L1	OFF	19.5
0.190500	41.88	---	64.02	22.14	L1	OFF	19.5
0.197250	---	32.79	53.73	20.94	L1	OFF	19.5
0.197250	42.73	---	63.73	21.00	L1	OFF	19.5
0.206250	---	37.71	53.36	15.65	L1	OFF	19.5
0.206250	47.46	---	63.36	15.90	L1	OFF	19.5
0.217500	---	35.58	52.91	17.33	L1	OFF	19.5
0.217500	44.27	---	62.91	18.64	L1	OFF	19.5
0.228750	---	31.64	52.50	20.86	L1	OFF	19.5
0.228750	39.76	---	62.50	22.74	L1	OFF	19.5
0.231000	---	32.51	52.41	19.90	L1	OFF	19.5
0.231000	41.40	---	62.41	21.01	L1	OFF	19.5
0.235500	---	32.21	52.25	20.04	L1	OFF	19.5
0.235500	40.32	---	62.25	21.93	L1	OFF	19.5



Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line

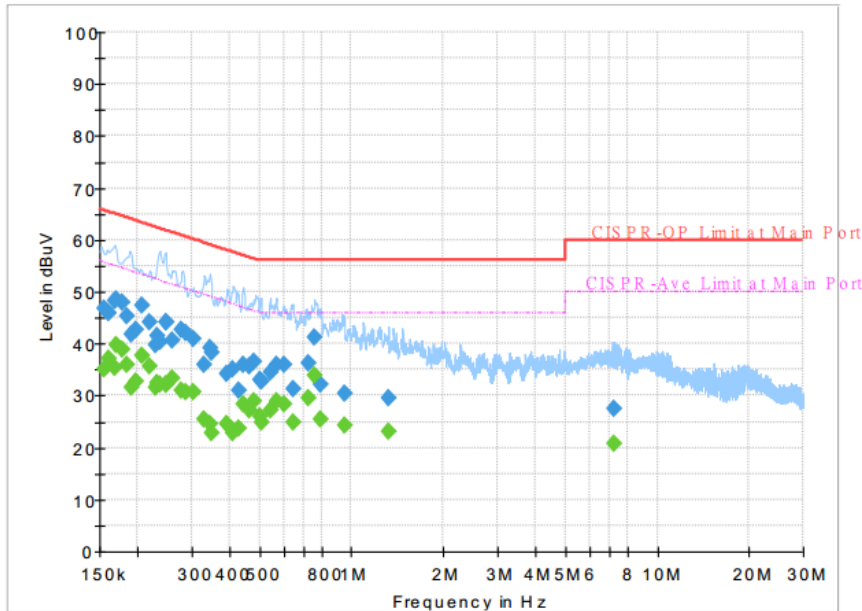


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.246750	---	32.17	51.87	19.70	L1	OFF	19.5
0.246750	44.24	---	61.87	17.63	L1	OFF	19.5
0.249000	---	32.04	51.79	19.75	L1	OFF	19.5
0.249000	44.25	---	61.79	17.54	L1	OFF	19.5
0.258000	---	33.40	51.50	18.10	L1	OFF	19.5
0.258000	40.55	---	61.50	20.95	L1	OFF	19.5
0.278250	---	31.09	50.87	19.78	L1	OFF	19.5
0.278250	42.60	---	60.87	18.27	L1	OFF	19.5
0.287250	---	30.84	50.60	19.76	L1	OFF	19.5
0.287250	42.01	---	60.60	18.59	L1	OFF	19.5
0.305250	---	30.79	50.10	19.31	L1	OFF	19.5
0.305250	40.95	---	60.10	19.15	L1	OFF	19.5
0.330000	---	25.41	49.45	24.04	L1	OFF	19.5
0.330000	35.92	---	59.45	23.53	L1	OFF	19.5
0.345750	---	24.62	49.06	24.44	L1	OFF	19.5
0.345750	39.08	---	59.06	19.98	L1	OFF	19.5
0.348000	---	22.82	49.01	26.19	L1	OFF	19.5
0.348000	38.23	---	59.01	20.78	L1	OFF	19.5
0.390750	---	24.69	48.05	23.36	L1	OFF	19.5
0.390750	34.11	---	58.05	23.94	L1	OFF	19.5
0.411000	---	22.69	47.63	24.94	L1	OFF	19.5
0.411000	35.14	---	57.63	22.49	L1	OFF	19.5
0.426750	---	23.72	47.32	23.60	L1	OFF	19.5
0.426750	31.13	---	57.32	26.19	L1	OFF	19.5
0.442500	---	28.35	47.02	18.67	L1	OFF	19.5
0.442500	36.06	---	57.02	20.96	L1	OFF	19.5
0.465000	---	27.13	46.60	19.47	L1	OFF	19.5
0.465000	35.81	---	56.60	20.79	L1	OFF	19.5



Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line

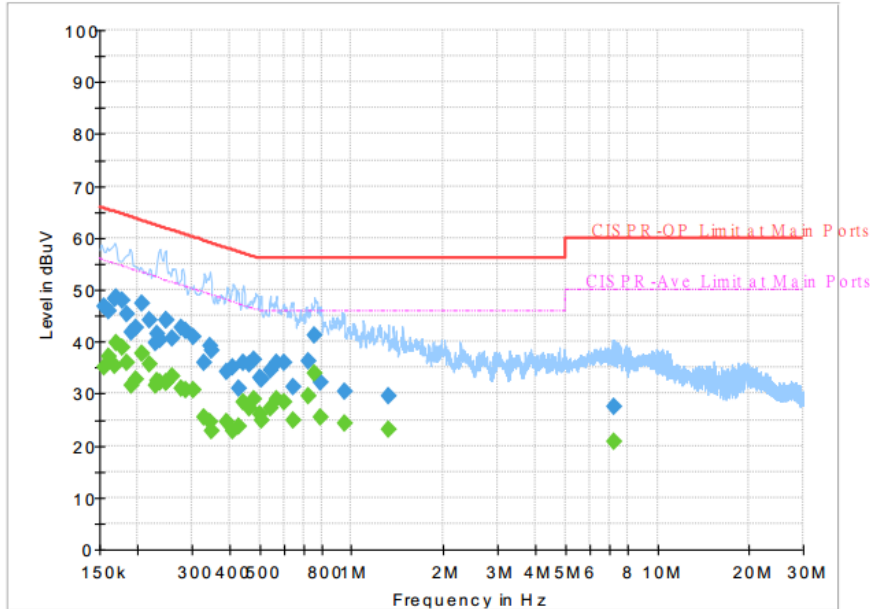


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.478500	---	28.96	46.37	17.41	L1	OFF	19.5
0.478500	36.42	---	56.37	19.95	L1	OFF	19.5
0.503250	---	26.07	46.00	19.93	L1	OFF	19.5
0.503250	33.03	---	56.00	22.97	L1	OFF	19.5
0.507750	---	24.77	46.00	21.23	L1	OFF	19.5
0.507750	32.73	---	56.00	23.27	L1	OFF	19.5
0.543750	---	27.31	46.00	18.69	L1	OFF	19.5
0.543750	34.43	---	56.00	21.57	L1	OFF	19.5
0.568500	---	28.87	46.00	17.13	L1	OFF	19.5
0.568500	35.90	---	56.00	20.10	L1	OFF	19.5
0.602250	---	28.41	46.00	17.59	L1	OFF	19.5
0.602250	36.00	---	56.00	20.00	L1	OFF	19.5
0.645000	---	24.93	46.00	21.07	L1	OFF	19.5
0.645000	31.15	---	56.00	24.85	L1	OFF	19.5
0.719250	---	29.41	46.00	16.59	L1	OFF	19.5
0.719250	36.21	---	56.00	19.79	L1	OFF	19.5
0.755250	---	33.98	46.00	12.02	L1	OFF	19.5
0.755250	41.25	---	56.00	14.75	L1	OFF	19.5
0.793500	---	25.50	46.00	20.50	L1	OFF	19.5
0.793500	32.02	---	56.00	23.98	L1	OFF	19.5
0.946500	---	24.19	46.00	21.81	L1	OFF	19.5
0.946500	30.47	---	56.00	25.53	L1	OFF	19.5
1.322250	---	23.18	46.00	22.82	L1	OFF	19.6
1.322250	29.59	---	56.00	26.41	L1	OFF	19.6
7.199250	---	20.87	50.00	29.13	L1	OFF	19.7
7.199250	27.59	---	60.00	32.41	L1	OFF	19.7



Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

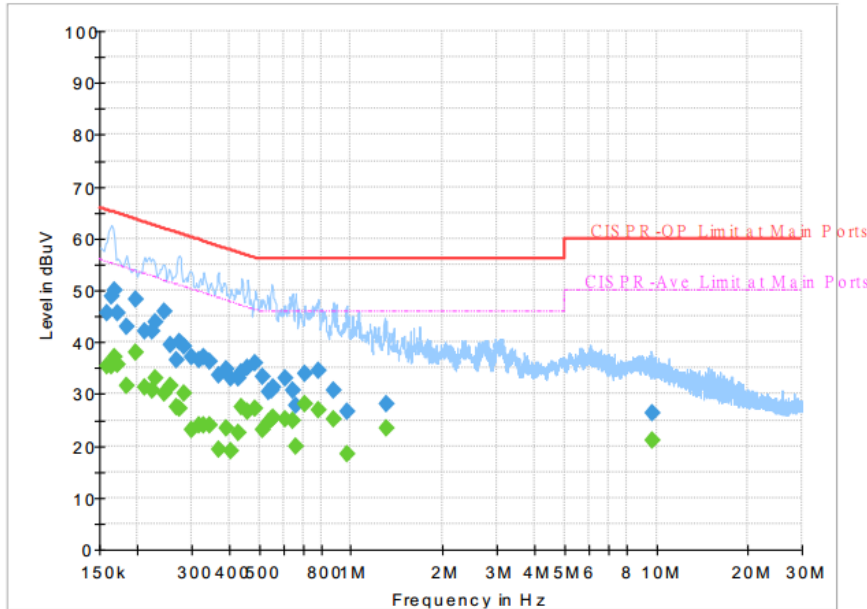


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	35.32	55.52	20.20	N	OFF	19.5
0.159000	45.63	---	65.52	19.89	N	OFF	19.5
0.163500	---	35.43	55.28	19.85	N	OFF	19.5
0.163500	48.90	---	65.28	16.38	N	OFF	19.5
0.168000	---	37.10	55.06	17.96	N	OFF	19.5
0.168000	49.91	---	65.06	15.15	N	OFF	19.5
0.172500	---	35.77	54.84	19.07	N	OFF	19.5
0.172500	45.61	---	64.84	19.23	N	OFF	19.5
0.183750	---	31.59	54.31	22.72	N	OFF	19.5
0.183750	43.10	---	64.31	21.21	N	OFF	19.5
0.197250	---	38.07	53.73	15.66	N	OFF	19.5
0.197250	48.17	---	63.73	15.56	N	OFF	19.5
0.210750	---	31.14	53.18	22.04	N	OFF	19.5
0.210750	41.96	---	63.18	21.22	N	OFF	19.5
0.224250	---	30.79	52.66	21.87	N	OFF	19.5
0.224250	42.13	---	62.66	20.53	N	OFF	19.5
0.228750	---	32.92	52.50	19.58	N	OFF	19.5
0.228750	44.00	---	62.50	18.50	N	OFF	19.5
0.244500	---	30.01	51.94	21.93	N	OFF	19.5
0.244500	46.04	---	61.94	15.90	N	OFF	19.5
0.255750	---	31.57	51.57	20.00	N	OFF	19.5
0.255750	39.59	---	61.57	21.98	N	OFF	19.5
0.269250	---	27.44	51.14	23.70	N	OFF	19.5
0.269250	36.41	---	61.14	24.73	N	OFF	19.5
0.273750	---	27.18	51.00	23.82	N	OFF	19.5
0.273750	39.99	---	61.00	21.01	N	OFF	19.5
0.285000	---	30.03	50.67	20.64	N	OFF	19.5
0.285000	39.18	---	60.67	21.49	N	OFF	19.5



Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

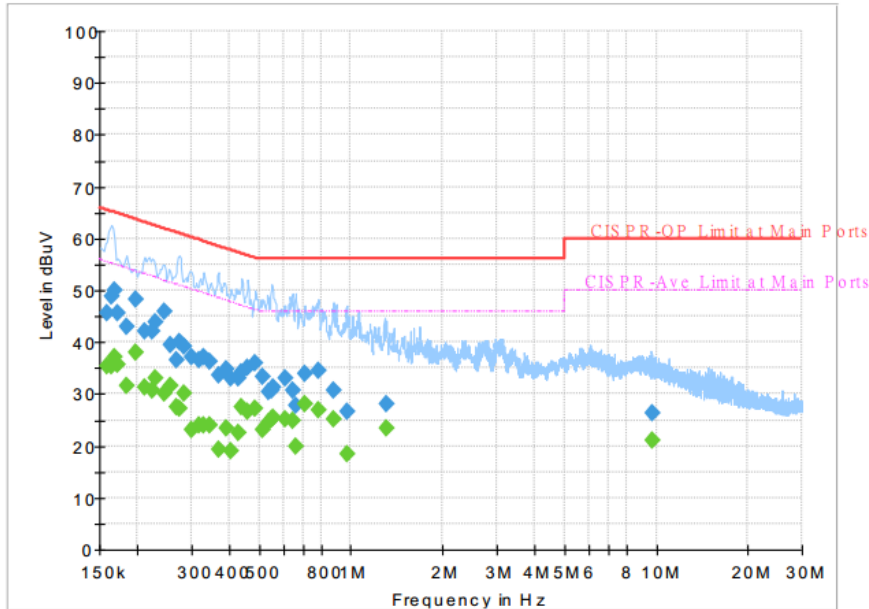


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.300750	---	23.12	50.22	27.10	N	OFF	19.5
0.300750	37.02	---	60.22	23.20	N	OFF	19.5
0.316500	---	23.93	49.80	25.87	N	OFF	19.5
0.316500	36.43	---	59.80	23.37	N	OFF	19.5
0.330000	---	24.00	49.45	25.45	N	OFF	19.5
0.330000	37.25	---	59.45	22.20	N	OFF	19.5
0.343500	---	23.84	49.12	25.28	N	OFF	19.5
0.343500	36.22	---	59.12	22.90	N	OFF	19.5
0.368250	---	19.23	48.54	29.31	N	OFF	19.5
0.368250	33.53	---	58.54	25.01	N	OFF	19.5
0.388500	---	23.40	48.10	24.70	N	OFF	19.5
0.388500	34.94	---	58.10	23.16	N	OFF	19.5
0.406500	---	18.92	47.72	28.80	N	OFF	19.5
0.406500	32.91	---	57.72	24.81	N	OFF	19.5
0.426750	---	22.54	47.32	24.78	N	OFF	19.5
0.426750	33.03	---	57.32	24.29	N	OFF	19.5
0.440250	---	27.45	47.06	19.61	N	OFF	19.5
0.440250	34.15	---	57.06	22.91	N	OFF	19.5
0.460500	---	26.48	46.68	20.20	N	OFF	19.5
0.460500	35.03	---	56.68	21.65	N	OFF	19.5
0.485250	---	27.13	46.25	19.12	N	OFF	19.5
0.485250	35.84	---	56.25	20.41	N	OFF	19.5



Test Engineer :	Jimmy Chang	Temperature :	24~26°C
		Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

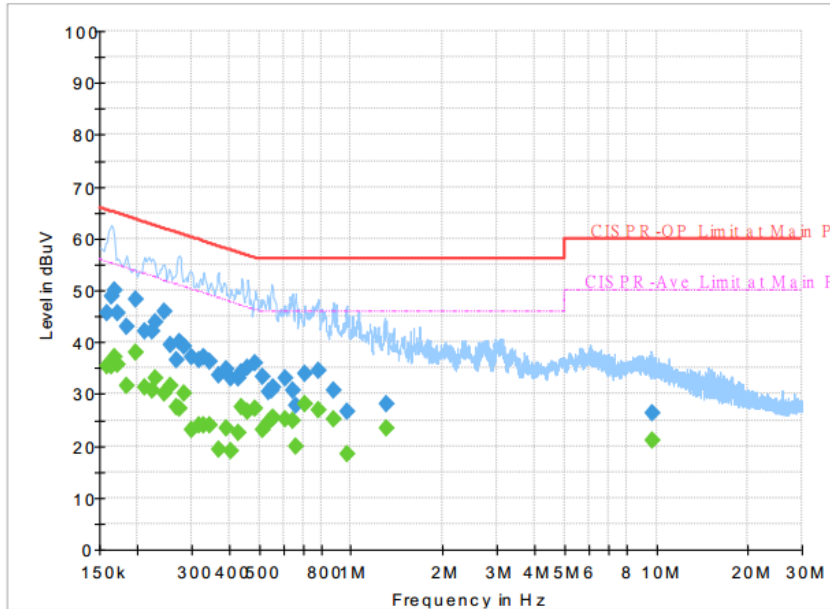

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.514500	---	23.24	46.00	22.76	N	OFF	19.5
0.514500	33.47	---	56.00	22.53	N	OFF	19.5
0.534750	---	24.47	46.00	21.53	N	OFF	19.5
0.534750	30.36	---	56.00	25.64	N	OFF	19.5
0.550500	---	25.05	46.00	20.95	N	OFF	19.5
0.550500	30.68	---	56.00	25.32	N	OFF	19.5
0.555000	---	25.31	46.00	20.69	N	OFF	19.5
0.555000	31.28	---	56.00	24.72	N	OFF	19.5
0.609000	---	25.01	46.00	20.99	N	OFF	19.5
0.609000	33.01	---	56.00	22.99	N	OFF	19.5
0.642750	---	24.72	46.00	21.28	N	OFF	19.5
0.642750	30.63	---	56.00	25.37	N	OFF	19.5
0.660750	---	20.00	46.00	26.00	N	OFF	19.5
0.660750	27.73	---	56.00	28.27	N	OFF	19.5
0.708000	---	28.21	46.00	17.79	N	OFF	19.5
0.708000	34.00	---	56.00	22.00	N	OFF	19.5
0.782250	---	26.92	46.00	19.08	N	OFF	19.5
0.782250	34.54	---	56.00	21.46	N	OFF	19.5
0.874500	---	25.21	46.00	20.79	N	OFF	19.5
0.874500	30.71	---	56.00	25.29	N	OFF	19.5
0.966750	---	18.41	46.00	27.59	N	OFF	19.5
0.966750	26.72	---	56.00	29.28	N	OFF	19.5
1.304250	---	23.30	46.00	22.70	N	OFF	19.5
1.304250	28.18	---	56.00	27.82	N	OFF	19.5
9.656250	---	21.04	50.00	28.96	N	OFF	19.7
9.656250	26.40	---	60.00	33.60	N	OFF	19.7



## Appendix B. Radiated Spurious Emission

Test Engineer :	Alex Jheng, Fu Chen, and Wilson Wu	Temperature :	24~26°C
		Relative Humidity :	49~53%

### 2.4GHz 2400~2483.5MHz

#### BT (Band Edge @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH00 2402MHz		2370.06	44.21	-29.79	74	41.37	27.19	5.55	29.9	180	7	P	H	
		2370.06	19.42	-34.58	54	-	-	-	-	-	-	A	H	
	*	2402	95.54	-	-	92.62	27.23	5.58	29.89	180	7	P	H	
	*	2402	70.75	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2368.065	44.11	-29.89	74	41.33	27.14	5.54	29.9	377	33	P	V
			2368.065	19.32	-34.68	54	-	-	-	-	-	-	A	V
	*		2402	93.64	-	-	90.72	27.23	5.58	29.89	377	33	P	V
	*		2402	68.85	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2341.08	43.36	-30.64	74	40.65	27.1	5.52	29.91	178	6	P	H	
		2341.08	18.57	-35.43	54	-	-	-	-	-	-	A	H	
	*	2441	95.35	-	-	92.23	27.37	5.63	29.88	178	6	P	H	
	*	2441	70.56	-	-	-	-	-	-	-	-	A	H	
			2484.6	44.24	-29.76	74	40.99	27.46	5.67	29.88	178	6	P	H
			2484.6	19.45	-34.55	54	-	-	-	-	-	-	A	H
			2367.4	44.06	-29.94	74	41.28	27.14	5.54	29.9	378	24	P	V
			2367.4	19.27	-34.73	54	-	-	-	-	-	-	A	V
	*		2441	94.32	-	-	91.2	27.37	5.63	29.88	378	24	P	V
	*		2441	69.53	-	-	-	-	-	-	-	-	A	V
			2498.6	43.54	-30.46	74	40.22	27.5	5.69	29.87	378	24	P	V
			2498.6	18.75	-35.25	54	-	-	-	-	-	-	A	V





<b>BT CH 78 2480MHz</b>	*	2480	96.02	-	-	92.77	27.46	5.67	29.88	196	7	P	H
	*	2480	71.23	-	-	-	-	-	-	-	-	A	H
		2497.92	44.2	-29.8	74	40.88	27.5	5.69	29.87	196	7	P	H
		2497.92	19.41	-34.59	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	96.86	-	-	93.61	27.46	5.67	29.88	291	47	P	V
	*	2480	72.07	-	-	-	-	-	-	-	-	A	V
		2483.5	44.5	-29.5	74	41.25	27.46	5.67	29.88	291	47	P	V
		2483.5	19.71	-34.29	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4804	35.97	-38.03	74	54.2	31.22	8.14	57.59	100	0	P	H	
		4804	11.18	-42.82	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	35.01	-38.99	74	53.24	31.22	8.14	57.59	100	0	P	V	
		4804	10.22	-43.78	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	35.61	-38.39	74	53.21	31.36	8.48	57.44	100	0	P	H	
		4882	10.82	-43.18	54	-	-	-	-	-	-	A	H	
		7323	42.31	-31.69	74	52.7	36.22	10.68	57.29	100	0	P	H	
		7323	17.52	-36.48	54	-	-	-	-	-	-	A	H	
		4882	35.95	-38.05	74	53.55	31.36	8.48	57.44	100	0	P	V	
		4882	11.16	-42.84	54	-	-	-	-	-	-	A	V	
		7323	41.51	-32.49	74	51.9	36.22	10.68	57.29	100	0	P	V	
		7323	16.72	-37.28	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4960	37.52	-36.48	74	54.44	31.53	8.83	57.28	100	0	P	H	
		4960	12.73	-41.27	54	-	-	-	-	-	-	A	H	
		7440	42.36	-31.64	74	52.56	36.49	10.84	57.43	100	0	P	H	
		7440	17.57	-36.43	54	-	-	-	-	-	-	A	H	
		4960	36.88	-37.12	74	53.8	31.53	8.83	57.28	100	0	P	V	
		4960	12.09	-41.91	54	-	-	-	-	-	-	A	V	
		7440	41.52	-32.48	74	51.72	36.49	10.84	57.43	100	0	P	V	
		7440	16.73	-37.27	54	-	-	-	-	-	-	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
2.4GHz BT LF		129.36	34.5	-9	43.5	47.89	17.39	1.41	32.19	100	0	P	H	
		215.22	28.3	-15.2	43.5	43.52	15.13	1.79	32.14	-	-	P	H	
		241.14	32.46	-13.54	46	45.43	17.26	1.91	32.14	-	-	P	H	
		598.9	32.96	-13.04	46	36.86	25.43	2.91	32.24	-	-	P	H	
		706.7	32.76	-13.24	46	34.93	26.76	3.15	32.08	-	-	P	H	
		799.1	34.44	-11.56	46	34.89	28.03	3.41	31.89	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			32.16	30.11	-9.89	40	38.43	23.22	0.75	32.29	-	-	P	V
			40.8	30.71	-9.29	40	43.34	18.81	0.85	32.29	100	0	P	V
			60.24	29.43	-10.57	40	48.96	11.78	0.96	32.27	-	-	P	V
			718.6	33.2	-12.8	46	35.02	27.06	3.17	32.05	-	-	P	V
			798.4	33.16	-12.84	46	33.62	28.03	3.4	31.89	-	-	P	V
			998.6	39.44	-14.56	54	35.88	30.41	3.72	30.57	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix C. Radiated Spurious Emission Plots



Test Engineer :	Alex Jheng, Fu Chen, and Wilson Wu	Temperature :	24~26°C
		Relative Humidity :	49~53%

### 2.4GHz 2400~2483.5MHz




#### BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>           Site : 03CH13-HV            Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : 1            Power : Default         </p>	<p>           Site : 03CH13-HV            Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : 1            Power : Default         </p>

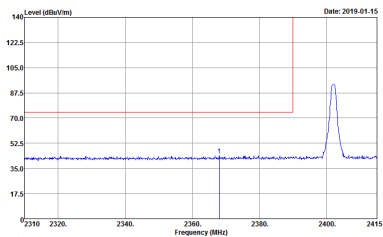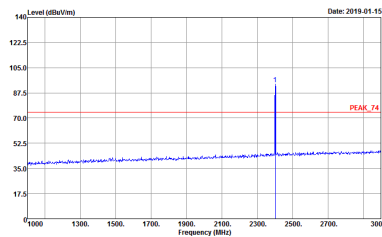




BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Date: 2019-01-15</p> <p>Site : 03CH13-11Y          Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : FR8N0131-01          Mode : 1          Power : default</p>	 <p>Date: 2019-01-15</p> <p>Site : 03CH13-11Y          Condition : PEAK_74 3m HORN_91200_1241 VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : FR8N0131-01          Mode : 1          Power : default</p>

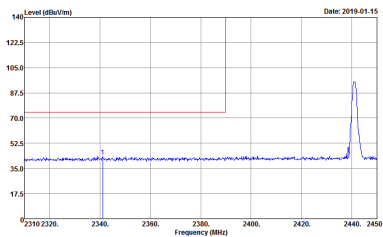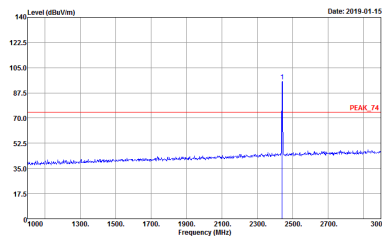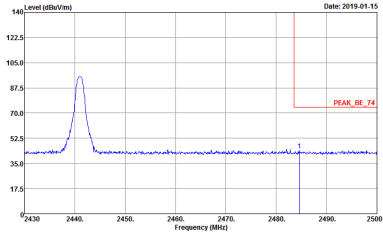



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2019-01-15</p> <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : Z            Power : Default</p>	 <p>Date: 2019-01-15</p> <p>Site : 03CH13-HY            Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : Z            Power : Default</p>
Peak	 <p>Date: 2019-01-15</p> <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : Z            Power : Default</p>	Left blank



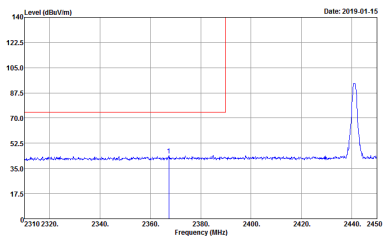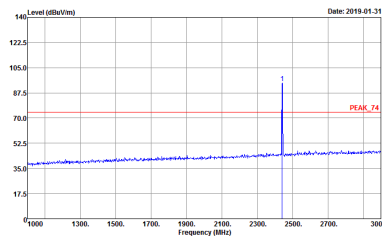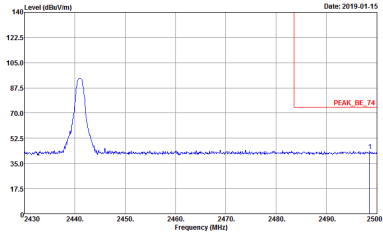

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
Vertical		Fundamental
Peak	 <p>Date: 2019-01-15</p> <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : Z            Power : Default</p>	 <p>Date: 2019-01-31</p> <p>Site : 03CH13-HY            Condition : PEAK_74 3m HORN_91200_1241 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : Z            Power : Default</p>
Peak	 <p>Date: 2019-01-15</p> <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 8N0131-01            Mode : Z            Power : Default</p>	Left blank

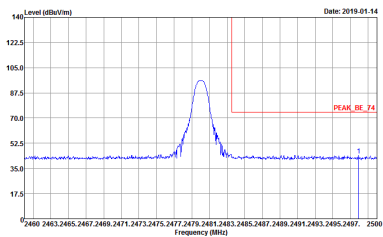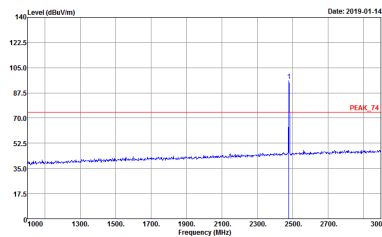

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH78 2480MHz		
Horizontal		Fundamental
Peak	 <p>Site : 03CH13-11Y Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : FR8N0131-01 Mode : 3 Power : Default</p>	 <p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : FR8N0131-01 Mode : 3 Power : Default</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH13-11Y Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : FR8N0131-01 Mode : 3 Power : Default</p>	<p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : FR8N0131-01 Mode : 3 Power : Default</p>





2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

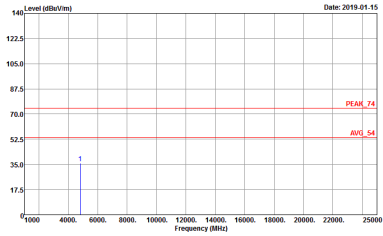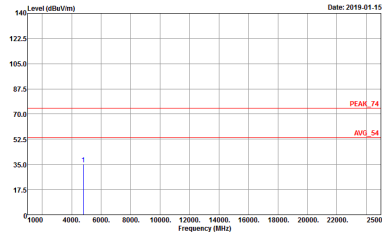BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH00 2402MHz	
	Horizontal	Vertical
<b>Peak</b>  <b>Avg.</b>	 <p>Site : 03CH13-HY  Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL  Detector : Peak  Project : BN0131-01  Mode : 1  Power : Default</p>	 <p>Site : 03CH13-HY  Condition : PEAK_74 3m HORN_91200_1241 VERTICAL  Detector : Peak  Project : BN0131-01  Mode : 1  Power : Default</p>

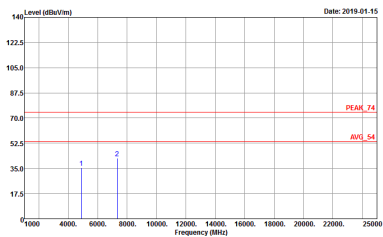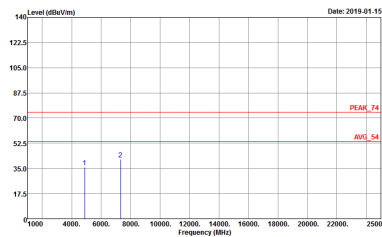

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH39 2441MHz	
	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : BN0131-01 Mode : Z Power : Default</p>	 <p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : BN0131-01 Mode : Z Power : Default</p>





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH78 2480MHz		
Horizontal		Vertical
Peak  Avg.	<p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 8N0131-01 Mode : 3 Power : Default</p>	<p>Site : 03CH13-11Y Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : 8N0131-01 Mode : 3 Power : Default</p>




Emission below 1GHz

2.4GHz BT (LF)

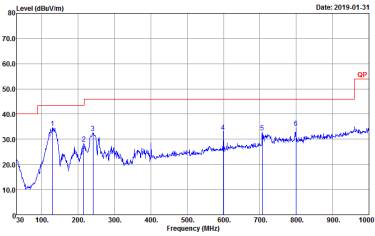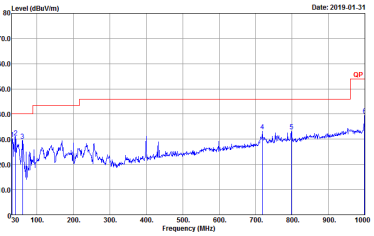
<b>BT</b>	<b>2.4GHz 2400~2483.5MHz</b>	
	<b>BT LF</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<b>QP / Peak</b>	 <p>Site : 03CH13-HY  Condition : QP 3m BTL06_37059401 HORIZONTAL  Detector : Peak  Project : 8N0131-01  Mode : 52</p>	 <p>Site : 03CH13-HY  Condition : QP 3m BTL06_37059401 VERTICAL  Detector : Peak  Project : 8N0131-01  Mode : 52</p>

## Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

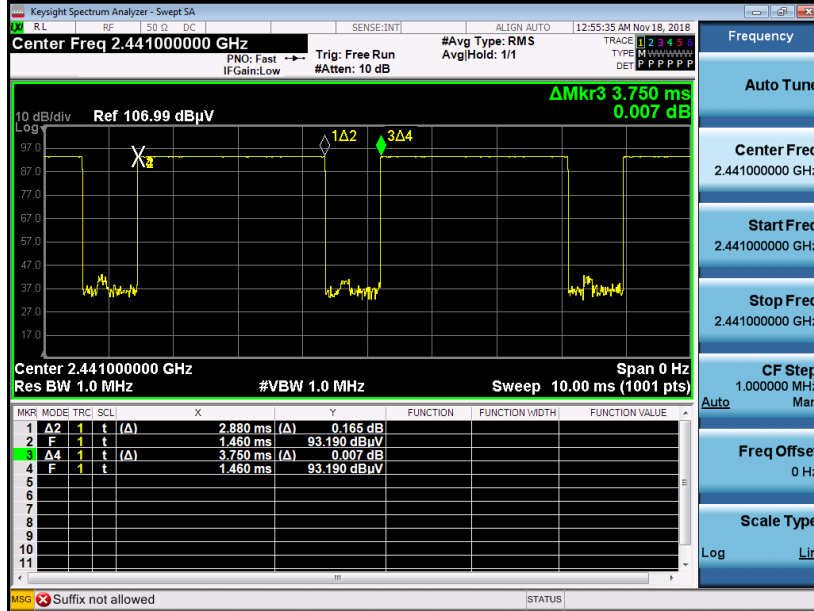

on time (Count Pulses) Plot on Channel 39

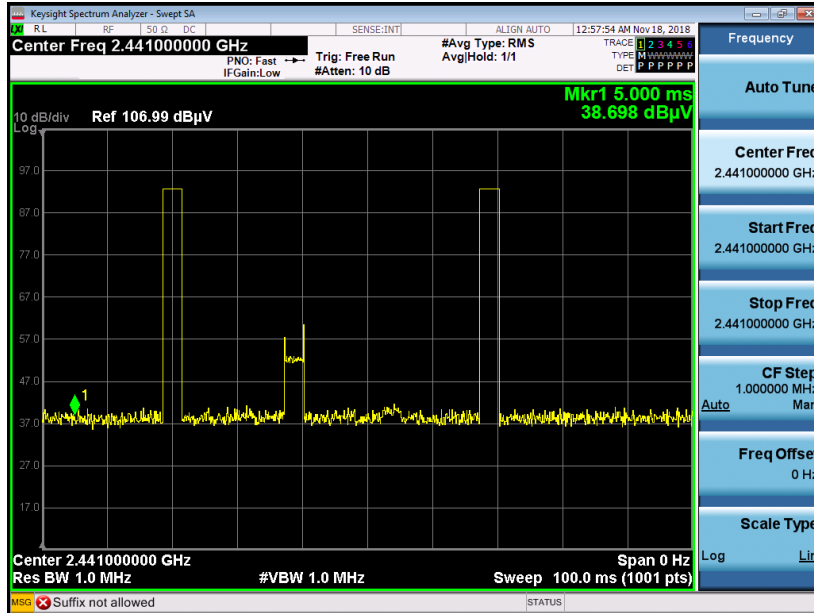

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.





**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$