


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	66%
Test Engineer	Gary Chu	Configurations	2.4GHz + 5GHz

Horizontal

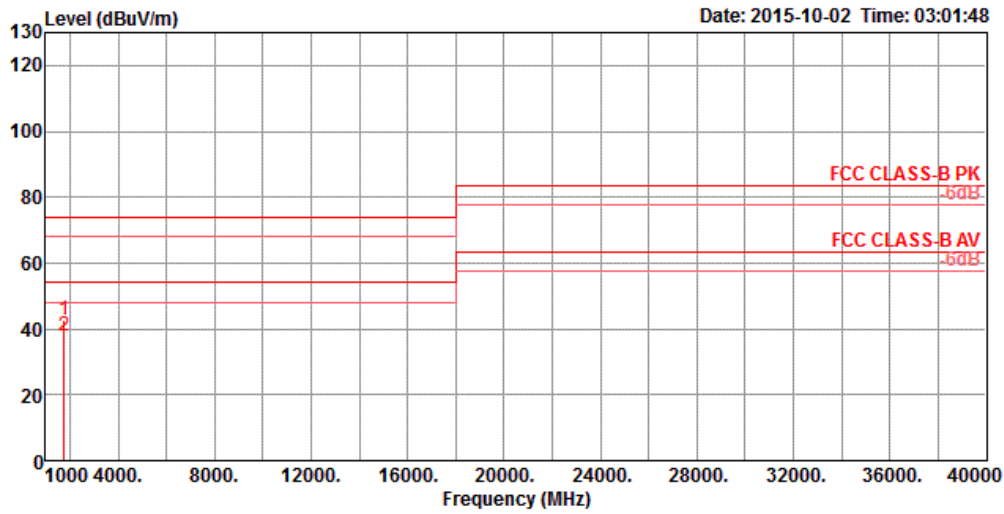

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1749.18	42.76	74.00	-31.24	49.16	3.26	25.72	35.38	106	288	Peak	HORIZONTAL
2	1749.79	37.81	54.00	-16.19	44.20	3.27	25.72	35.38	106	288	Average	HORIZONTAL

Vertical

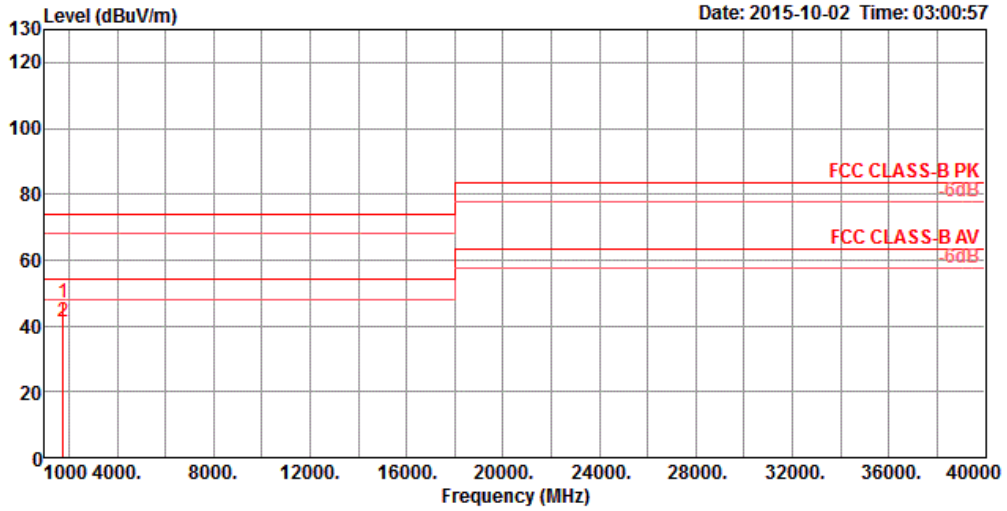

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1748.77	47.00	74.00	-27.00	53.40	3.26	25.72	35.38	103	211 Peak	VERTICAL
2	1749.54	41.22	54.00	-12.78	47.61	3.27	25.72	35.38	103	211 Average	VERTICAL