



# FCC RF Test Report

**APPLICANT** : Zebra Technologies Corporation  
**EQUIPMENT** : Vehicle Computer  
**BRAND NAME** : Zebra  
**MODEL NAME** : VC80x  
**FCC ID** : UZ7VC80X  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on May 24, 2017 and testing was completed on Aug. 24, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer..... 5

1.3 Product Feature of Equipment Under Test..... 5

1.4 Product Specification of Equipment Under Test..... 7

1.5 Modification of EUT ..... 7

1.6 Testing Location ..... 8

1.7 Applicable Standards..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 9**

2.1 Carrier Frequency Channel ..... 9

2.2 Test Mode..... 10

2.3 Connection Diagram of Test System..... 12

2.4 Support Unit used in test configuration and system ..... 13

2.5 EUT Operation Test Setup ..... 13

2.6 Measurement Results Explanation Example..... 13

**3 TEST RESULT ..... 14**

3.1 6dB and 99% Bandwidth Measurement ..... 14

3.2 Peak Output Power Measurement ..... 19

3.3 Power Spectral Density Measurement ..... 21

3.4 Conducted Band Edges and Spurious Emission Measurement ..... 26

3.5 Radiated Band Edges and Spurious Emission Measurement ..... 31

3.6 AC Conducted Emission Measurement..... 35

3.7 Antenna Requirements ..... 37

**4 LIST OF MEASURING EQUIPMENT..... 38**

**5 UNCERTAINTY OF EVALUATION..... 39**

**APPENDIX A. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR752421B	Rev. 01	Initial issue of report	Oct. 11, 2017



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.10 dB at 519.800 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.60 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Zebra Technologies Corporation**  
1 Zebra Plaza, Holtsville, NY 11742-1300, USA

## 1.2 Manufacturer

**Zebra Technologies Corporation**  
1 Zebra Plaza, Holtsville, NY 11742-1300, USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Vehicle Computer
Brand Name	Zebra
Model Name	VC80x
FCC ID	UZ7VC80X
Sample 1	Standard SKU
Sample 2	Outdoor SKU
Sample 3	Freezer SKU
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	EV
SW Version	91-15-01.7-MN-00
FW Version	FUSION_BA_2_00.0.0.033_M
MFD	25May17
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



Accessories Information				
AC Adapter	Brand Name	Zebra	Model Name	FSP150
Car Charger	Brand Name	Zebra	Model Name	CA1210
RJ50/USB cable	Brand Name	Zebra	Model Name	CBA-U01-S07ZAP
Scanner	Brand Name	Zebra	Model Name	DS3508
Scanner	Brand Name	Zebra	Model Name	LS3408
Audio Speaker	Brand Name	Zebra	Model Name	M1000
Ferrite Core	Brand Name	Zebra	Model Name	M1000
Keyboard (ikey)	Brand Name	Zebra	Model Name	iKey
Keyboard (remote keyboard)	Brand Name	Zebra	Model Name	KYBD-QW-VC
External Antenna (Monopole)	Brand Name	Zebra	Model Name	AN2010
External Antenna (Monopole)	Brand Name	Zebra	Model Name	AN2020
External Antenna (Dipole)	Brand Name	Zebra	Model Name	AN2030



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	2.85 dBm (0.0019 W)
99% Occupied Bandwidth	1.054MHz
Type of Modulation	Bluetooth LE : GFSK

Antenna No.	Chain No.	Model	Antenna Type	Antenna Gain (dBi) Exclude Cable loss	Internal Cable loss (dB)	External Cable loss (dB)	Antenna Gain (dBi) Include Cable loss	Frequency (GHz)
1	Int. Chain 0	AN000097A01	Patch	3.96	N/A	N/A	3.96	2.4~2.4835
				5	N/A	N/A	5	5.15~5.85
	Int. Chain 1			3.69	N/A	N/A	3.69	2.4~2.4835
				5	N/A	N/A	5	5.15~5.85
2	Ext. Chain 0	AN2010	Monopole	2	0.6	1.8	-0.4	2.4~2.4835
				2	0.9	2.6	-1.5	5.15~5.85
	Ext. Chain 1			2	0.6	1.8	-0.4	2.4~2.4835
				2	0.9	2.6	-1.5	5.15~5.85
3	Ext. Chain 0	AN2020	Monopole	5	0.6	1.8	2.6	2.4~2.4835
	Ext. Chain 1			5	0.6	1.8	2.6	2.4~2.4835
4	Ext. Chain 0	AN2030	Dipole	2	0.6	N/A	1.4	2.4~2.4835
				3.7	0.9	N/A	2.8	5.15~5.85
	Ext. Chain 1			2	0.6	N/A	1.4	2.4~2.4835
				3.7	0.9	N/A	2.8	5.15~5.85

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH02-HY	CO05-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode

Channel	Frequency	Bluetooth – LE RF Average Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	0.72 dBm
Ch19	2440MHz	2.09 dBm
Ch39	2480MHz	2.33 dBm

Channel	Frequency	Bluetooth – LE RF Peak Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	1.46 dBm
Ch19	2440MHz	2.68 dBm
Ch39	2480MHz	2.85 dBm




- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for Antenna No. 1 and Antenna No. 4, Y Plane for Antenna No. 3) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


<b>Summary table of Test Cases</b>	
<b>Test Item</b>	<b>Data Rate / Modulation</b>
	<b>Bluetooth – LE / GFSK</b>
<b>Conducted TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>Radiated TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>AC Conducted Emission</b>	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + Audio Speaker (M1000) + Keyboard (ikey) + Scanner (DS3508) + RS-232 (cable load)* 2 + Ext. Antenna AN2020 + AC/DC Adapter + MPEG4 for Sample 1

## 2.3 Connection Diagram of Test System

<EUT + Internal Antenna with Accessory Mode>

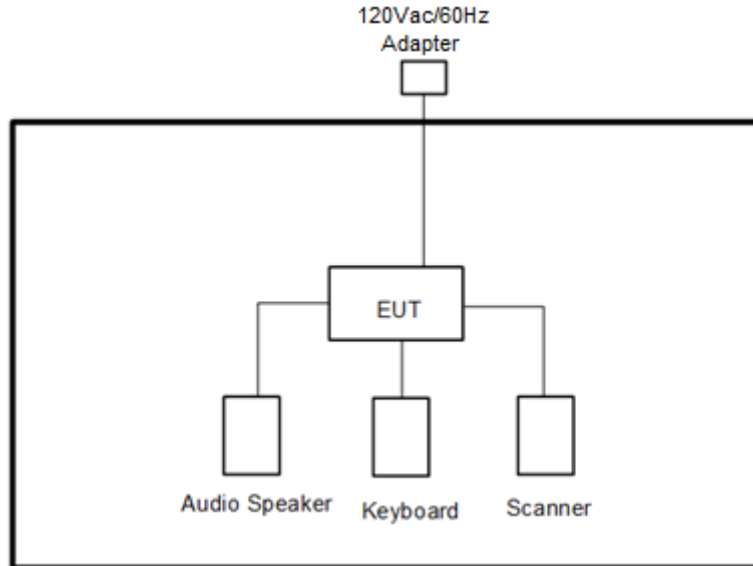

<EUT + External Antenna with Accessory Mode>

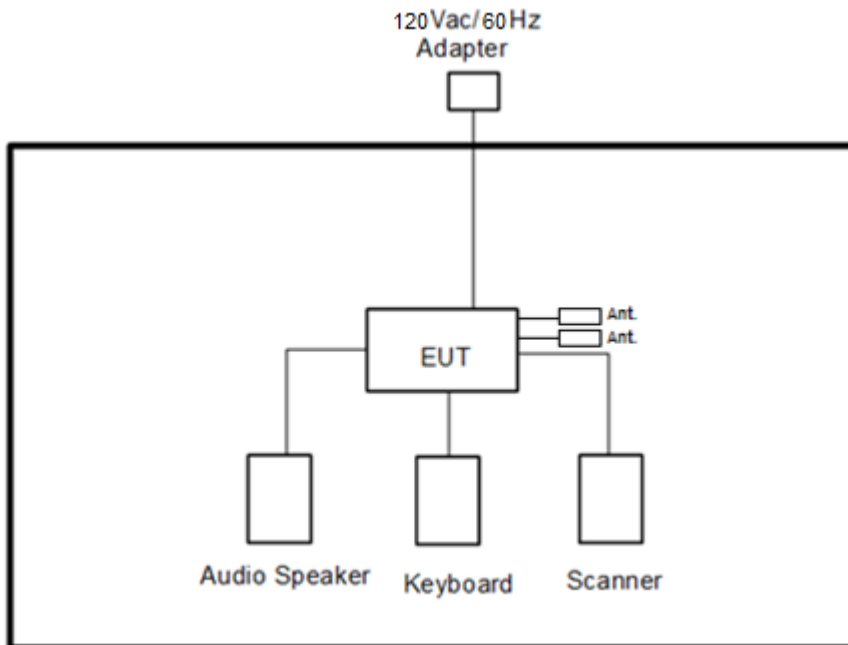



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Notebook	Lenovo	M490S	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, “command” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

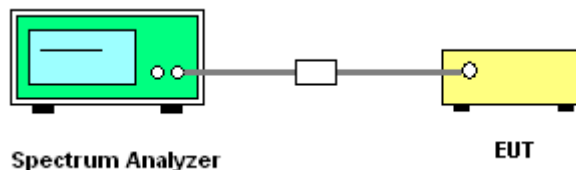




3.1.5 Test Result of 6dB Bandwidth

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.710	0.50	Pass
BLE	1Mbps	1	19	2440	0.712	0.50	Pass
BLE	1Mbps	1	39	2480	0.710	0.50	Pass


6 dB Bandwidth Plot on Channel 00

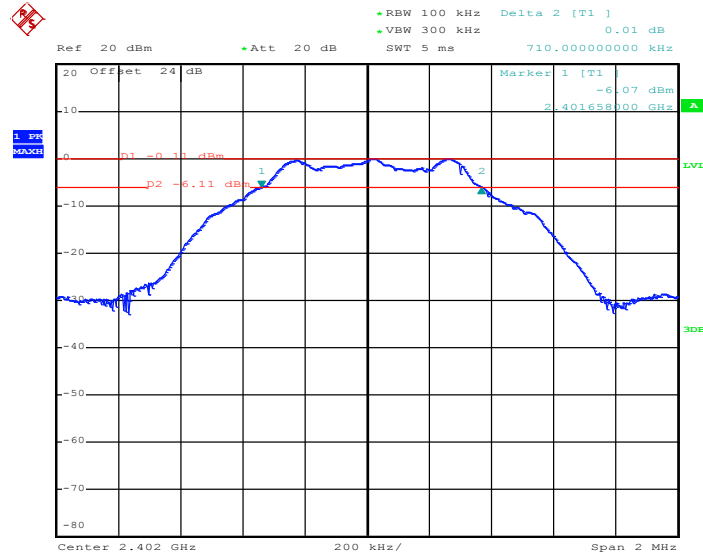

Date: 4.JUL.2017 01:36:22




6 dB Bandwidth Plot on Channel 19

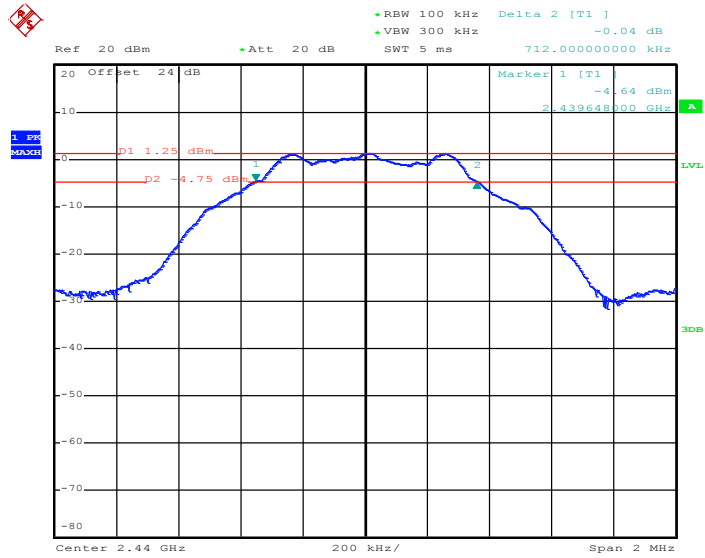

Date: 4.JUL.2017 01:33:44

6 dB Bandwidth Plot on Channel 39

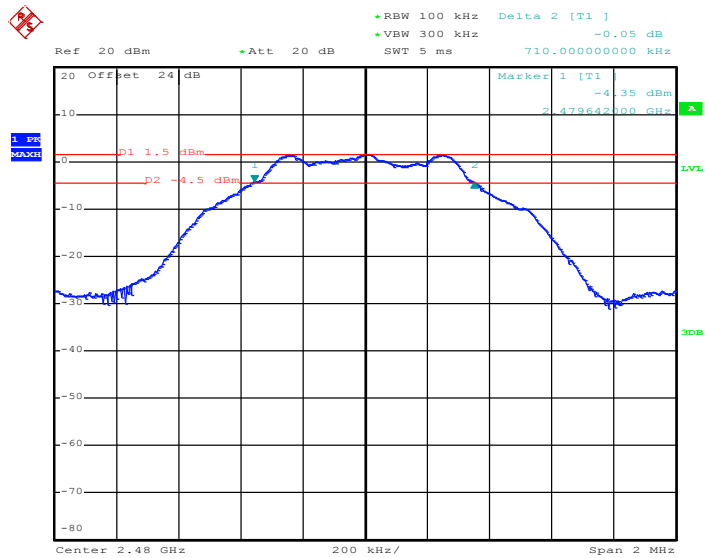

Date: 4.JUL.2017 01:39:15






3.1.6 Test Result of 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.054	Pass
BLE	1Mbps	1	19	2440	1.052	Pass
BLE	1Mbps	1	39	2480	1.052	Pass


99% Bandwidth Plot on Channel 00

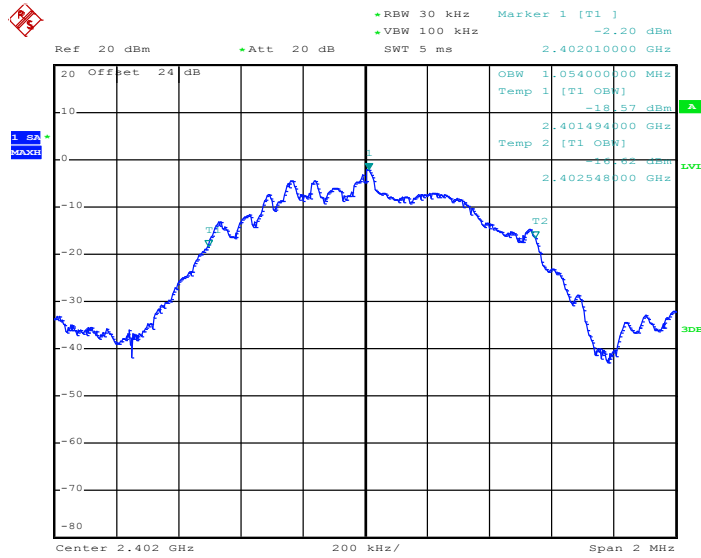

Date: 4.JUL.2017 01:37:37




99% Occupied Bandwidth Plot on Channel 19

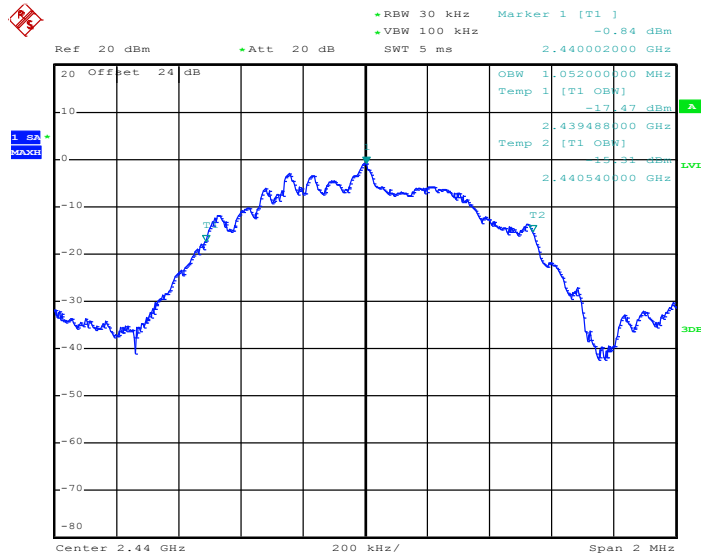

Date: 4.JUL.2017 01:34:45

99% Occupied Bandwidth Plot on Channel 39

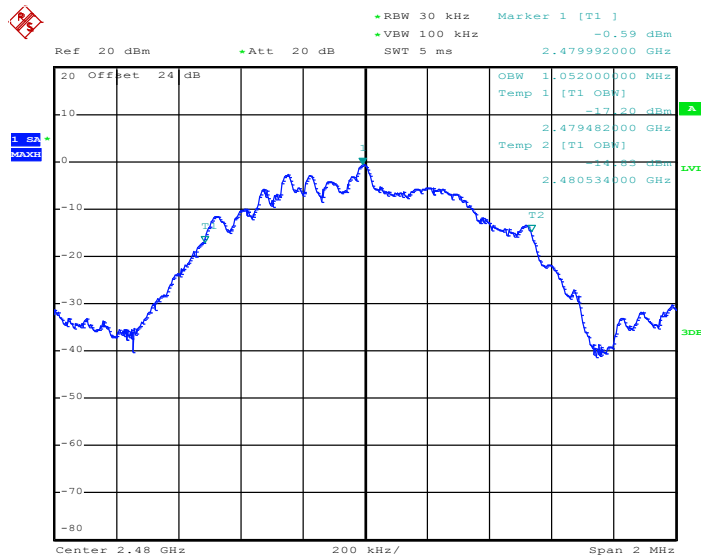

Date: 4.JUL.2017 01:40:19

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

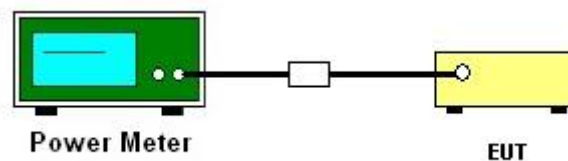



3.2.5 Test Result of Peak Output Power

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.46	30.00	3.96	5.42	36.00	Pass
BLE	1Mbps	1	19	2440	2.68	30.00	3.96	6.64	36.00	Pass
BLE	1Mbps	1	39	2480	2.85	30.00	3.96	6.81	36.00	Pass

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup






3.3.5 Test Result of Power Spectral Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-0.11	-14.15	3.96	8.00	Pass
BLE	1Mbps	1	19	2440	1.22	-12.79	3.96	8.00	Pass
BLE	1Mbps	1	39	2480	1.51	-12.61	3.96	8.00	Pass

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

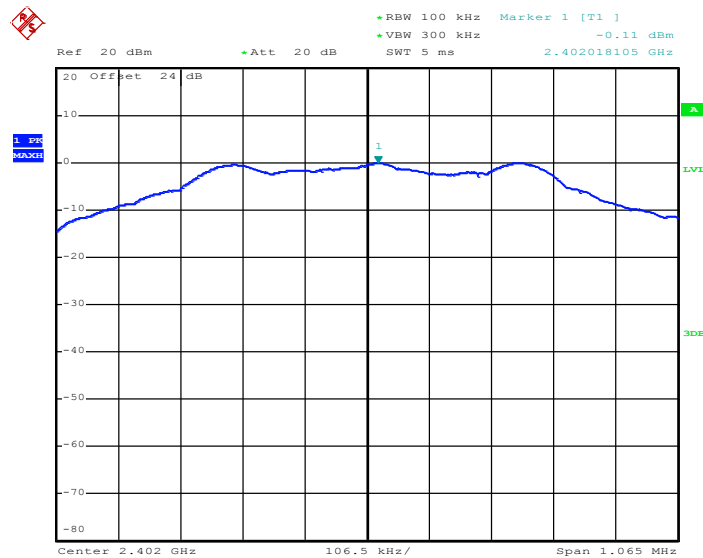

Date: 4.JUL.2017 01:36:50




PSD 100kHz Plot on Channel 19

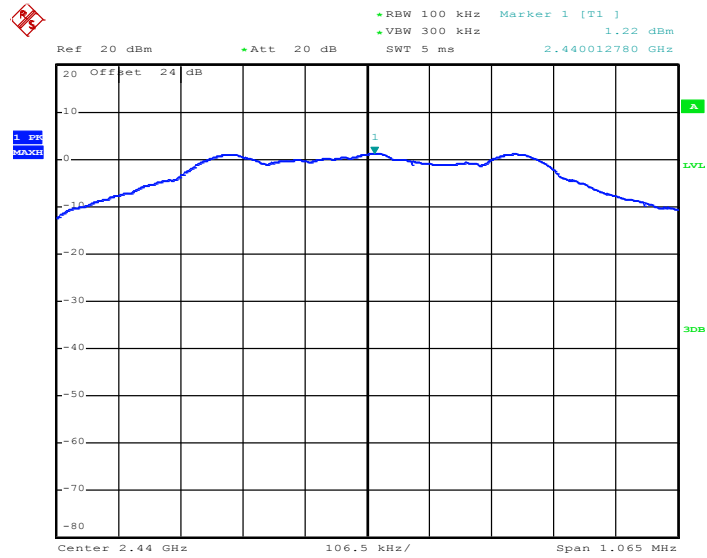

Date: 4.JUL.2017 01:34:13

PSD 100kHz Plot on Channel 39

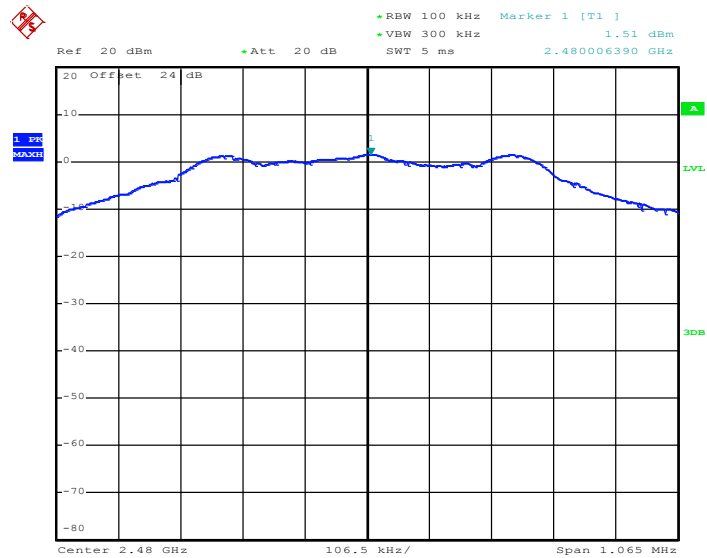


Date: 4.JUL.2017 01:39:38




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

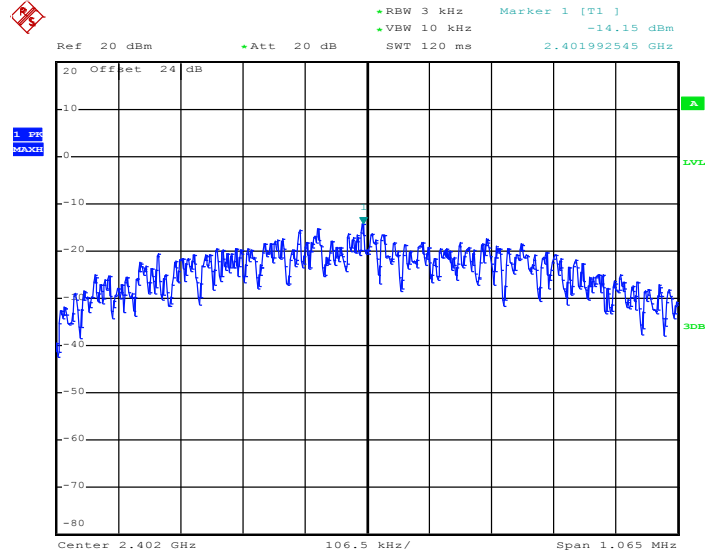

Date: 4.JUL.2017 01:36:34

PSD 3kHz Plot on Channel 19

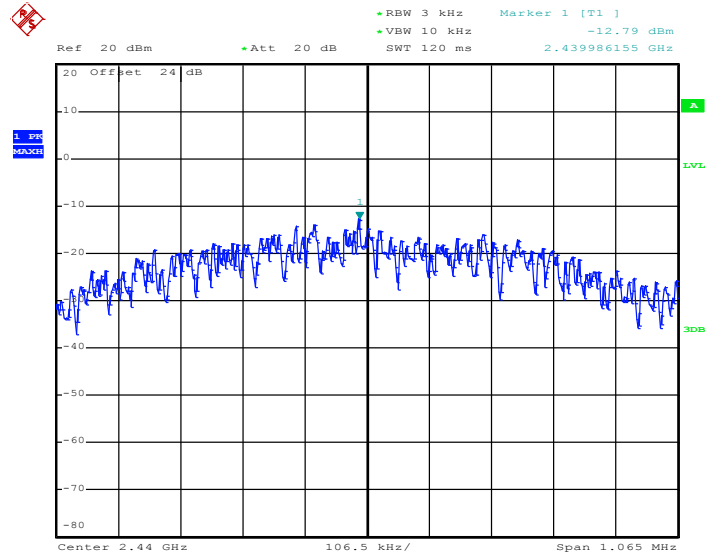


Date: 4.JUL.2017 01:34:00





PSD 3kHz Plot on Channel 39

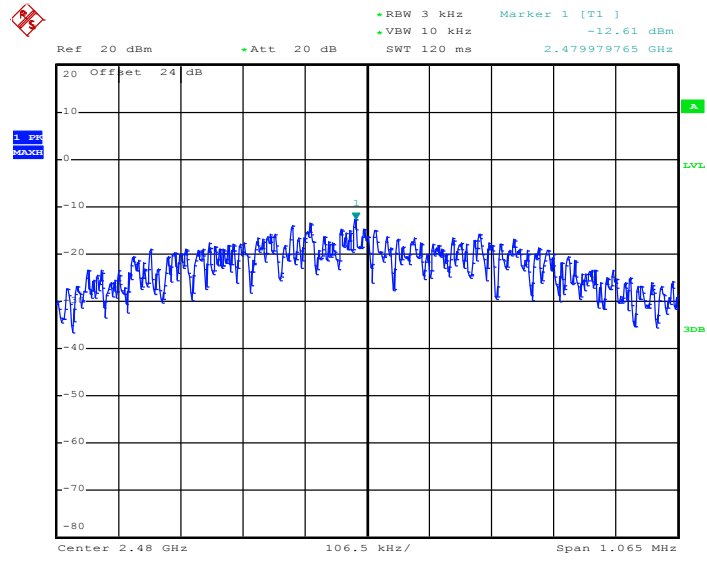

Date: 4.JUL.2017 01:39:28

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

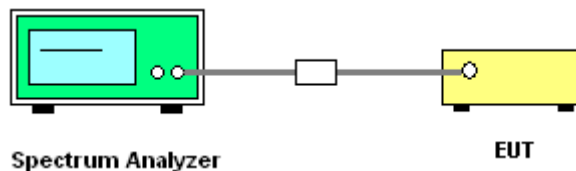




### 3.4.5 Test Result of Conducted Band Edges Plots

#### Low Band Edge Plot on Channel 00

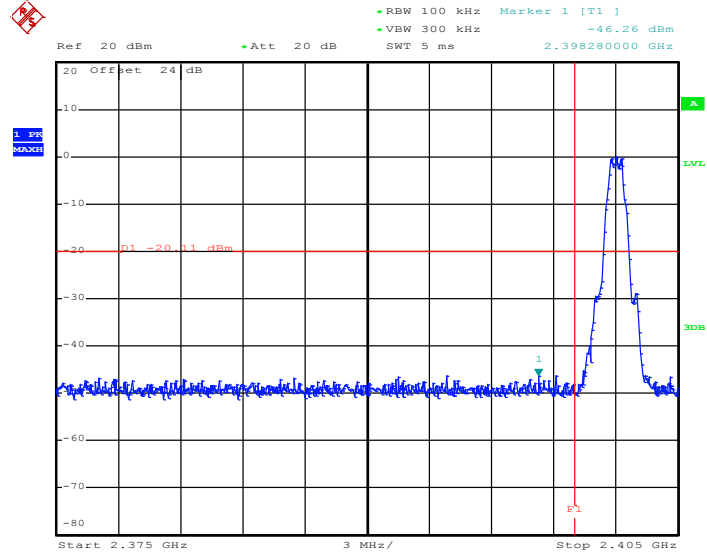

Date: 4.JUL.2017 01:37:01

#### High Band Edge Plot on Channel 39

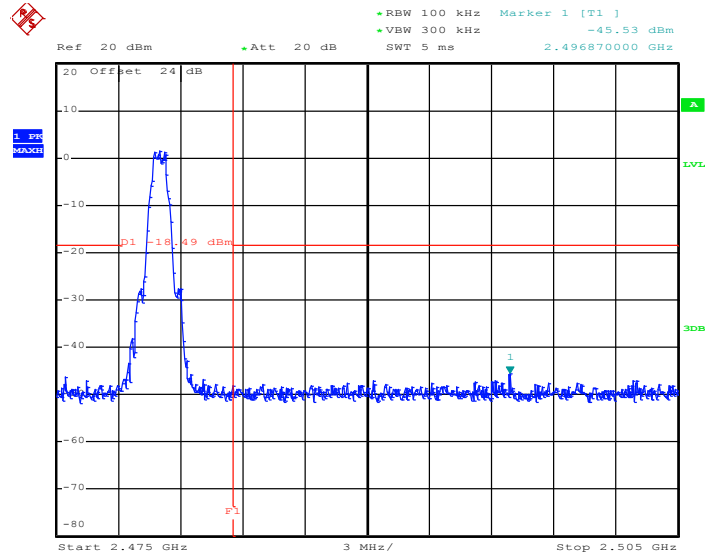


Date: 4.JUL.2017 01:39:47




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

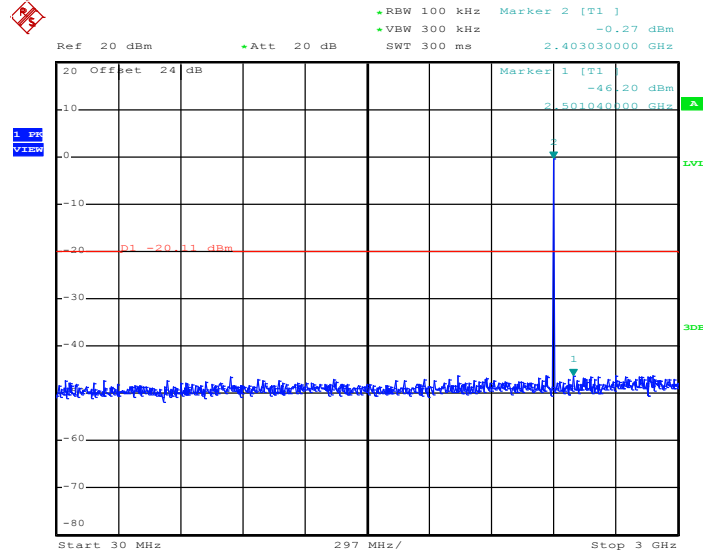

Date: 4.JUL.2017 01:37:17


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

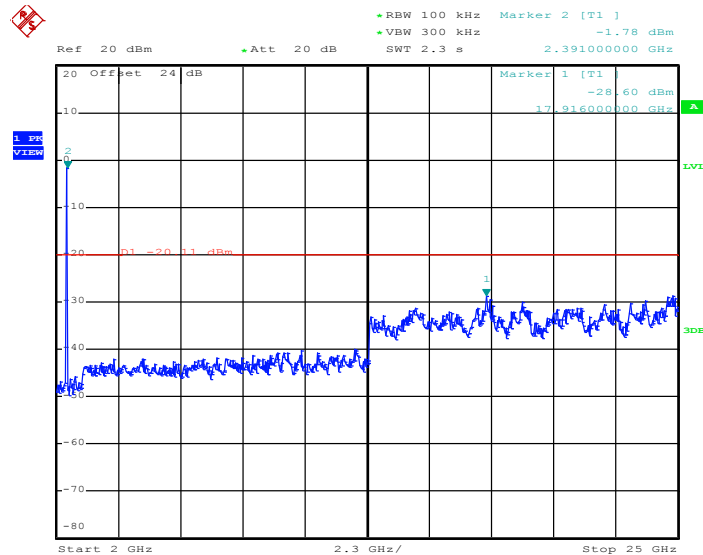

Date: 4.JUL.2017 01:37:25




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

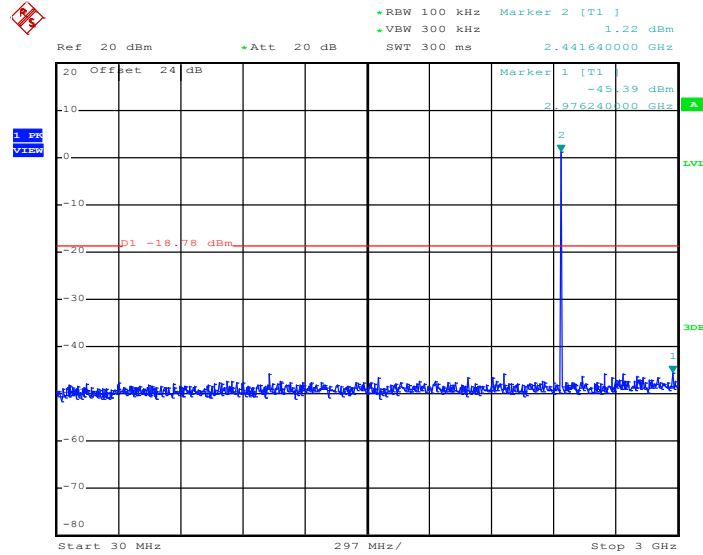

Date: 4.JUL.2017 01:34:26


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

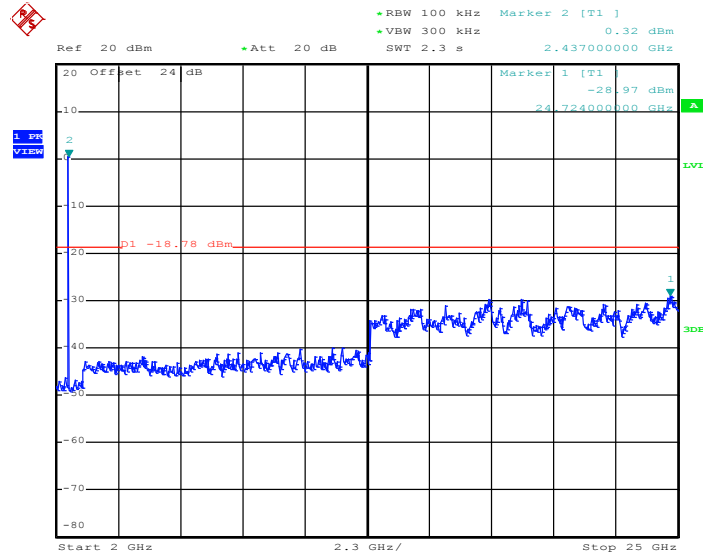

Date: 4.JUL.2017 01:34:35




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

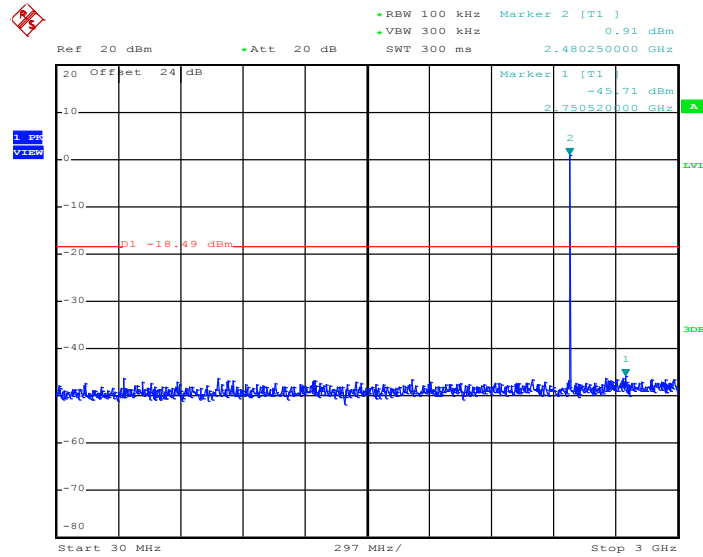

Date: 4.JUL.2017 01:40:01

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

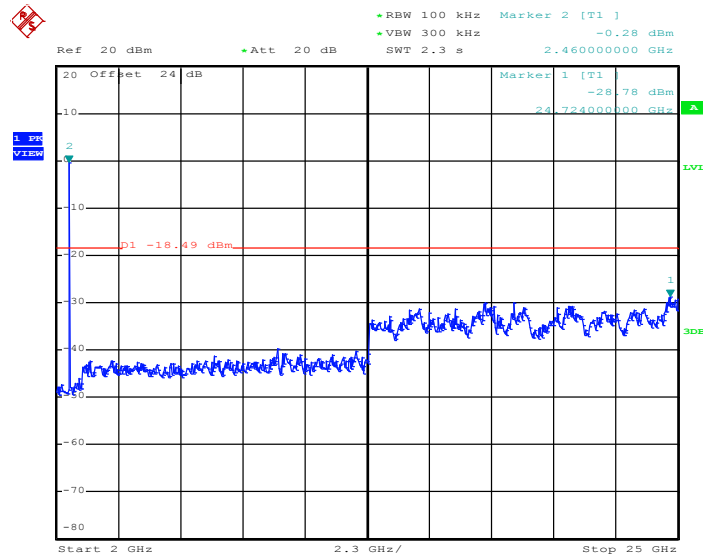

Date: 4.JUL.2017 01:40:09



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

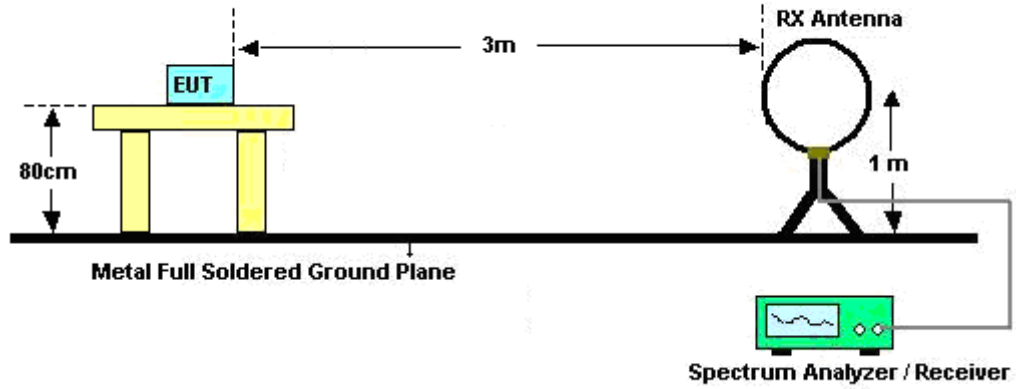

For radiated emissions from 30MHz to 1GHz

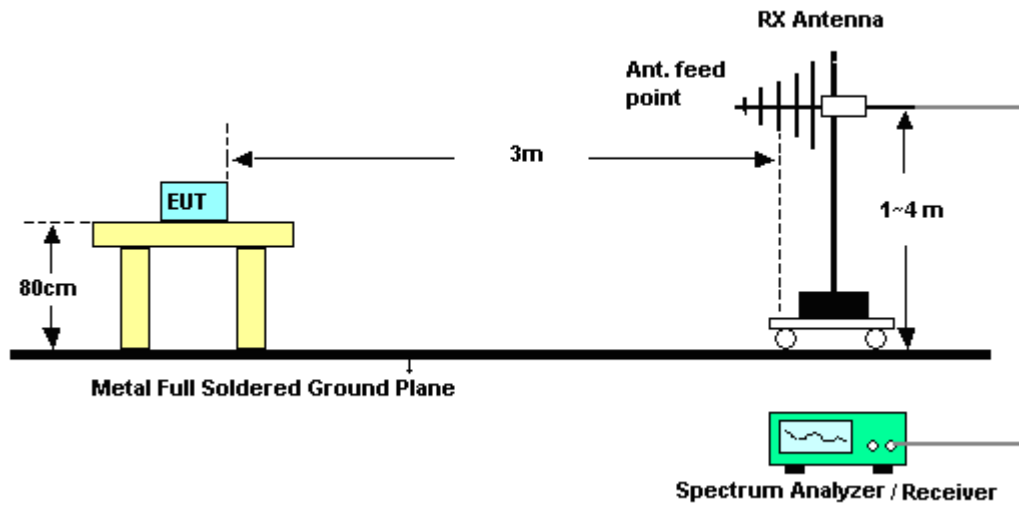

For radiated emissions above 1GHz

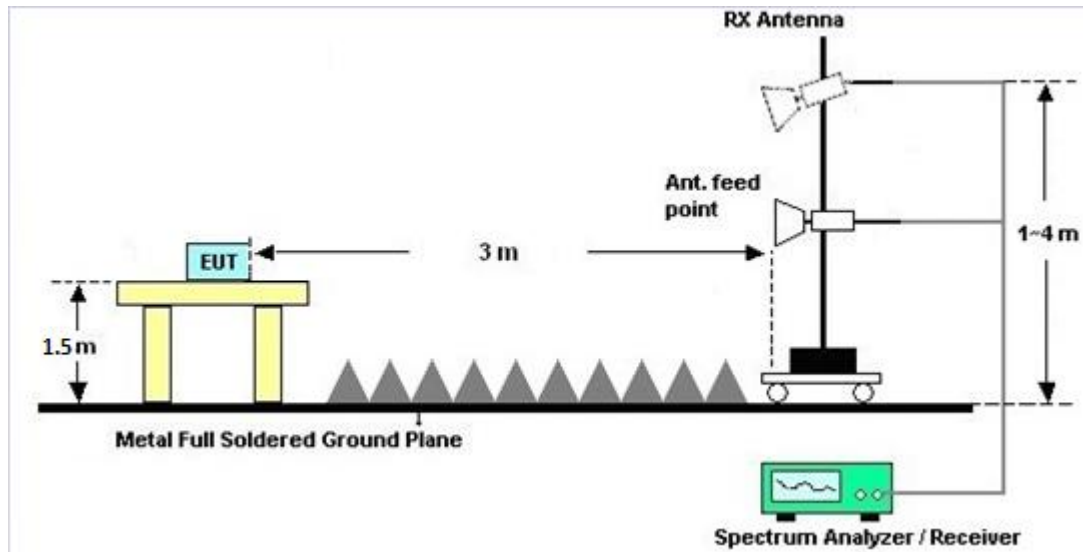

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

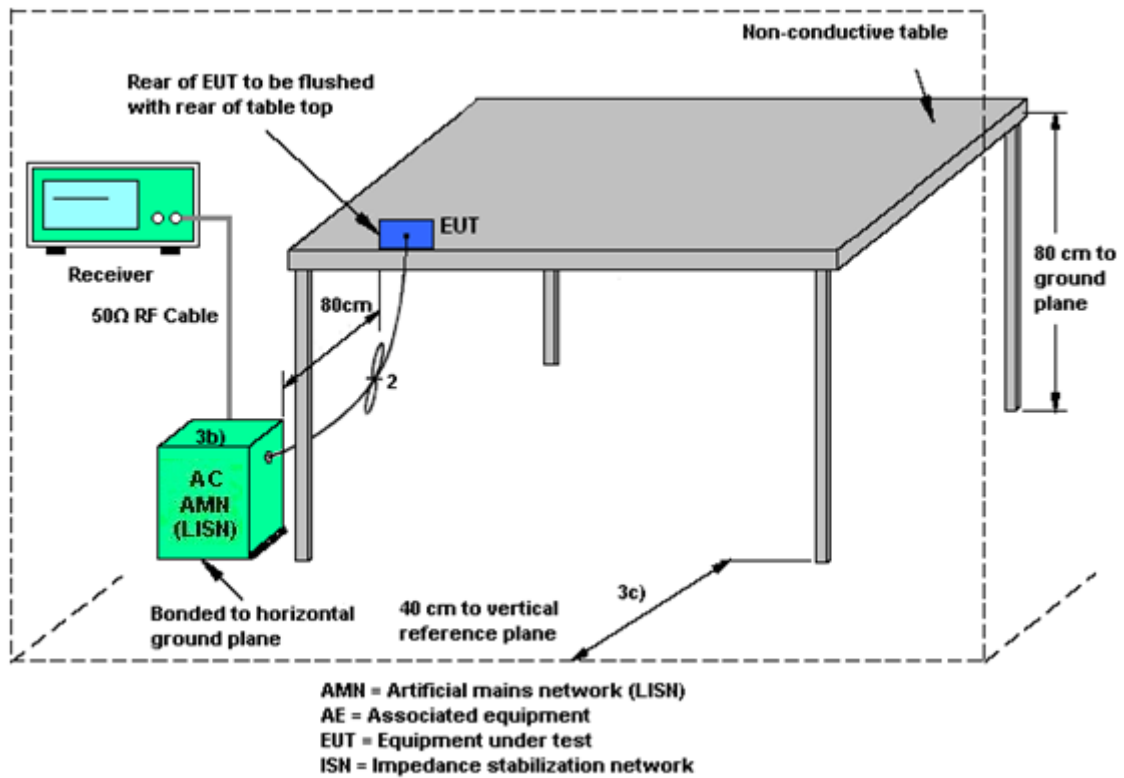

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	NA	Dec. 26, 2016	Jun. 14, 2017 ~ Jun. 30, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 26, 2016	Jun. 14, 2017 ~ Jun. 30, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Jun. 14, 2017 ~ Jun. 30, 2017	Jul. 16, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 02, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jul. 02, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jul. 02, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Jan. 07, 2017	Jun. 08, 2017 ~ Aug. 24, 2017	Jan. 06, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2016	Jun. 08, 2017 ~ Aug. 17, 2017	Aug. 18, 2017	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz ~ 18GHz	Sep. 02, 2016	Aug. 18, 2017 ~ Aug. 24, 2017	Sep. 01, 2017	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	May 15, 2017	Jun. 08, 2017 ~ Aug. 24, 2017	May 14, 2019	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 25, 2017	Jun. 08, 2017 ~ Aug. 24, 2017	Apr. 24, 2018	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 14, 2017	Jun. 08, 2017 ~ Aug. 24, 2017	Mar. 13, 2018	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~ 26.5GHz	Oct. 12, 2016	Jun. 08, 2017 ~ Aug. 24, 2017	Oct. 11, 2017	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jun. 08, 2017 ~ Aug. 24, 2017	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 08, 2017 ~ Aug. 24, 2017	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jun. 08, 2017	Jun. 08, 2017 ~ Aug. 24, 2017	Jun. 07, 2018	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 08, 2016	Jun. 08, 2017 ~ Aug. 24, 2017	Nov. 07, 2017	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY532900 53	20Hz to 26.5GHz	Jan. 12, 2017	Jun. 08, 2017 ~ Aug. 24, 2017	Jan. 11, 2018	Radiation (03CH07-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.70
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.70
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.50
---	------


### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------



## Appendix A. AC Conducted Emission Test Results

Test Engineer :	Arthur Hsieh	Temperature :	22~25°C
		Relative Humidity :	51~55%

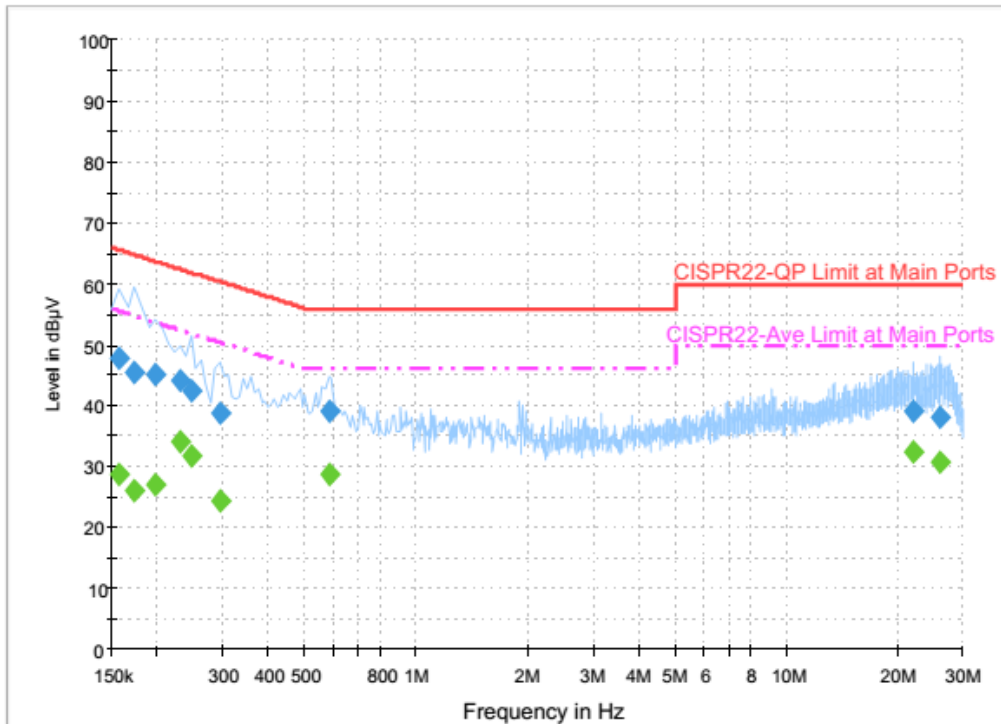


### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	47.8	Off	L1	19.5	17.8	65.6
0.174000	45.6	Off	L1	19.5	19.2	64.8
0.198000	45.2	Off	L1	19.5	18.5	63.7
0.230000	44.0	Off	L1	19.5	18.4	62.4
0.246000	42.5	Off	L1	19.5	19.4	61.9
0.294000	38.9	Off	L1	19.5	21.5	60.4
0.582000	39.0	Off	L1	19.5	17.0	56.0
21.910000	39.2	Off	L1	19.8	20.8	60.0
26.150000	38.1	Off	L1	19.8	21.9	60.0

### Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	28.7	Off	L1	19.5	26.9	55.6
0.174000	26.2	Off	L1	19.5	28.6	54.8
0.198000	27.0	Off	L1	19.5	26.7	53.7
0.230000	34.1	Off	L1	19.5	18.3	52.4
0.246000	31.8	Off	L1	19.5	20.1	51.9
0.294000	24.4	Off	L1	19.5	26.0	50.4
0.582000	28.9	Off	L1	19.5	17.1	46.0
21.910000	32.5	Off	L1	19.8	17.5	50.0
26.150000	30.8	Off	L1	19.8	19.2	50.0



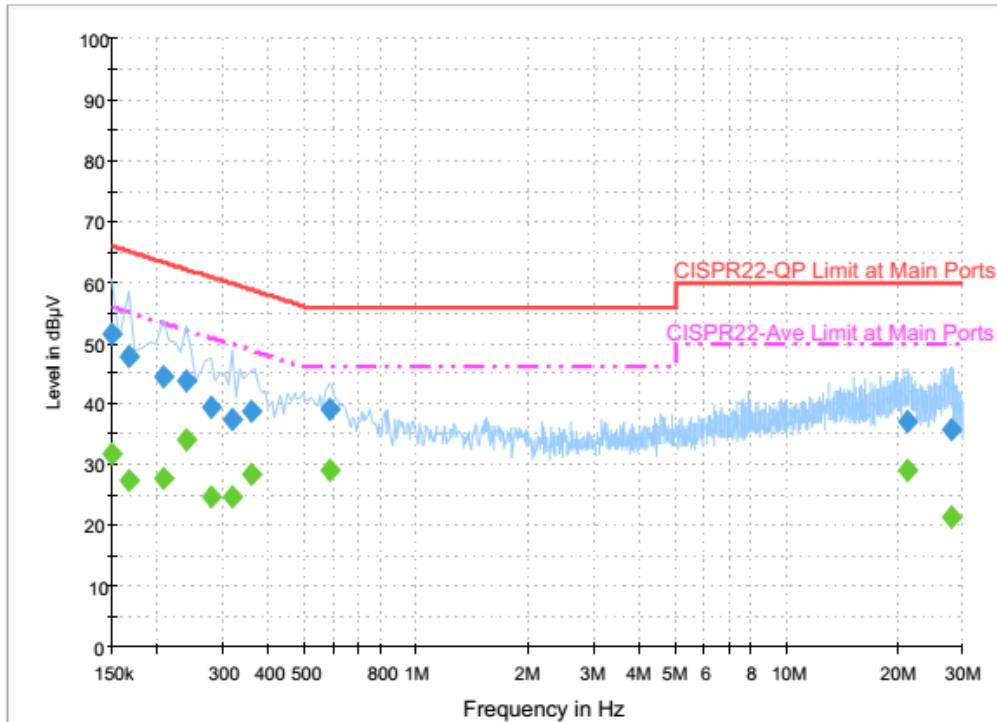

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	51.4	Off	N	19.5	14.6	66.0
0.166000	47.8	Off	N	19.5	17.4	65.2
0.206000	44.5	Off	N	19.5	18.9	63.4
0.238000	43.7	Off	N	19.5	18.5	62.2
0.278000	39.4	Off	N	19.5	21.5	60.9
0.318000	37.3	Off	N	19.5	22.5	59.8
0.358000	38.7	Off	N	19.5	20.1	58.8
0.582000	39.0	Off	N	19.5	17.0	56.0
21.358000	37.2	Off	N	19.9	22.8	60.0
28.054000	35.9	Off	N	20.0	24.1	60.0

### Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	31.7	Off	N	19.5	24.3	56.0
0.166000	27.5	Off	N	19.5	27.7	55.2
0.206000	27.9	Off	N	19.5	25.5	53.4
0.238000	34.2	Off	N	19.5	18.0	52.2
0.278000	24.7	Off	N	19.5	26.2	50.9
0.318000	24.7	Off	N	19.5	25.1	49.8
0.358000	28.5	Off	N	19.5	20.3	48.8
0.582000	29.1	Off	N	19.5	16.9	46.0



## Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, James Chiu and Potter Liu	Temperature :	22~26°C
		Relative Humidity :	52~58%

<For Sample 1>

<Ant. No. 1>

### 2.4GHz 2400~2483.5MHz

#### BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		2310.21	56.86	-17.14	74	51.6	31.93	8.28	34.95	100	193	P	H
		2389.7	46.87	-7.13	54	41.41	32.19	8.24	34.97	100	193	A	H
	*	2402	100.14	-	-	94.69	32.19	8.24	34.98	100	193	P	H
	*	2402	99.2	-	-	93.75	32.19	8.24	34.98	100	193	A	H
		2332.16	56.27	-17.73	74	50.97	31.98	8.28	34.96	258	179	P	V
		2367.44	46.91	-7.09	54	41.53	32.09	8.26	34.97	258	179	A	V
	*	2402	93.32	-	-	87.87	32.19	8.24	34.98	258	179	P	V
	*	2402	92.75	-	-	87.3	32.19	8.24	34.98	258	179	A	V
BLE CH 19 2440MHz		2369.5	56.57	-17.43	74	51.14	32.14	8.26	34.97	100	191	P	H
		2352.14	46.73	-7.27	54	41.35	32.09	8.26	34.97	100	191	A	H
	*	2440	102.55	-	-	96.93	32.34	8.27	34.99	100	191	P	H
	*	2440	102.01	-	-	96.39	32.34	8.27	34.99	100	191	A	H
		2485.09	55.69	-18.31	74	49.94	32.45	8.3	35	100	191	P	H
		2494.47	47.09	-6.91	54	41.3	32.5	8.3	35.01	100	191	A	H
		2378.18	55.45	-18.55	74	50.02	32.14	8.26	34.97	241	179	P	V
		2354.8	46.79	-7.21	54	41.41	32.09	8.26	34.97	241	179	A	V
	*	2440	96.65	-	-	91.03	32.34	8.27	34.99	241	179	P	V
	*	2440	96.13	-	-	90.51	32.34	8.27	34.99	241	179	A	V
		2497.97	56.11	-17.89	74	50.32	32.5	8.3	35.01	241	179	P	V
		2497.9	46.98	-7.02	54	41.19	32.5	8.3	35.01	241	179	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	101.08	-	-	95.33	32.45	8.3	35	100	190	P	H
	*	2480	100.48	-	-	94.73	32.45	8.3	35	100	190	A	H
		2485.52	56.27	-17.73	74	50.52	32.45	8.3	35	100	190	P	H
		2487.56	47.16	-6.84	54	41.36	32.5	8.3	35	100	190	A	H
													H
													H
	*	2480	95.54	-	-	89.79	32.45	8.3	35	241	178	P	V
	*	2480	94.85	-	-	89.1	32.45	8.3	35	241	178	A	V
		2499.88	55.93	-18.07	74	50.14	32.5	8.3	35.01	241	178	P	V
		2491.68	47.26	-6.74	54	41.46	32.5	8.3	35	241	178	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		4804	40.37	-33.63	74	54.13	33.68	11.96	59.4	100	0	P	H	
													H	
													H	
													H	
			4804	40.82	-33.18	74	54.58	33.68	11.96	59.4	100	0	P	V
														V
														V
BLE CH 19 2440MHz		4880	39.9	-34.1	74	53.75	33.54	11.9	59.29	100	0	P	H	
		7320	39.98	-34.02	74	48.45	34.65	14.94	58.06	100	0	P	H	
													H	
													H	
			4880	38.22	-35.78	74	52.07	33.54	11.9	59.29	100	0	P	V
			7320	39.74	-34.26	74	48.21	34.65	14.94	58.06	100	0	P	V
														V
BLE CH 39 2480MHz		4960	39.67	-34.33	74	53.62	33.37	11.84	59.16	100	0	P	H	
		7440	41.2	-32.8	74	49.93	34.33	15.1	58.16	100	0	P	H	
													H	
													H	
			4960	39.57	-34.43	74	53.52	33.37	11.84	59.16	100	0	P	V
			7440	41.16	-32.84	74	49.89	34.33	15.1	58.16	100	0	P	V
														V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		95.88	33.12	-10.38	43.5	46.69	15.88	2.11	31.56	-	-	P	H	
		156.9	34.82	-8.68	43.5	46.49	17.21	2.62	31.5	-	-	P	H	
		241.14	32.06	-13.94	46	42.24	18.18	3.03	31.39	-	-	P	H	
		519.8	38.43	-7.57	46	40.89	24.36	4.13	30.95	-	-	P	H	
		584.9	38.83	-7.17	46	40.14	25.15	4.39	30.85	-	-	P	H	
		650	39.95	-6.05	46	40.22	25.9	4.59	30.76	100	96	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			31.62	35.06	-4.94	40	39.81	24.92	1.71	31.38	-	-	P	V
			129.9	30.34	-13.16	43.5	41.23	18.3	2.34	31.53	-	-	P	V
			260.04	34.84	-11.16	46	42.92	20	3.28	31.36	-	-	P	V
			519.8	37.78	-8.22	46	40.24	24.36	4.13	30.95	-	-	P	V
			584.9	34.27	-11.73	46	35.58	25.15	4.39	30.85	-	-	P	V
			650	41.62	-4.38	46	41.89	25.9	4.59	30.76	100	55	P	V
														V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



<Ant. No. 3>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2388.33	56.02	-17.98	74	50.56	32.19	8.24	34.97	124	128	P	H	
		2361.35	46.71	-7.29	54	41.33	32.09	8.26	34.97	124	128	A	H	
	*	2402	88.42	-	-	82.97	32.19	8.24	34.98	124	128	P	H	
	*	2402	87.56	-	-	82.11	32.19	8.24	34.98	124	128	A	H	
													H	
													H	
			2369.33	55.52	-18.48	74	50.09	32.14	8.26	34.97	118	102	P	V
			2327.22	46.7	-7.3	54	41.4	31.98	8.28	34.96	118	102	A	V
	*		2402	94.98	-	-	89.53	32.19	8.24	34.98	118	102	P	V
	*		2402	94.41	-	-	88.96	32.19	8.24	34.98	118	102	A	V
													V	
												V		
BLE CH 39 2480MHz	*	2480	90.34	-	-	84.59	32.45	8.3	35	120	204	P	H	
	*	2480	89.73	-	-	83.98	32.45	8.3	35	120	204	A	H	
			2487.8	55.7	-18.3	74	49.9	32.5	8.3	35	120	204	P	H
			2492.16	46.91	-7.09	54	41.12	32.5	8.3	35.01	120	204	A	H
													H	
													H	
	*		2480	94.73	-	-	88.98	32.45	8.3	35	111	102	P	V
	*		2480	94.21	-	-	88.46	32.45	8.3	35	111	102	A	V
			2489.92	56.28	-17.72	74	50.48	32.5	8.3	35	111	102	P	V
			2488.96	46.8	-7.2	54	41	32.5	8.3	35	111	102	A	V
													V	
												V		
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 19 2440MHz		4880	38.87	-35.13	74	52.72	33.54	11.9	59.29	100	0	P	H
		7320	39.82	-34.18	74	48.29	34.65	14.94	58.06	100	0	P	H
													H
													H
		4880	38.29	-35.71	74	52.14	33.54	11.9	59.29	100	0	P	V
		7320	39.43	-34.57	74	47.9	34.65	14.94	58.06	100	0	P	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		30.54	27.43	-12.57	40	31.62	25.46	1.71	31.36	-	-	P	H	
		196.32	35.69	-7.81	43.5	48.62	15.8	2.72	31.45	-	-	P	H	
		275.97	33.21	-12.79	46	41.93	19.34	3.28	31.34	-	-	P	H	
		519.8	33.92	-12.08	46	36.38	24.36	4.13	30.95	-	-	P	H	
		650	39.42	-6.58	46	39.69	25.9	4.59	30.76	100	117	P	H	
		715.1	34.93	-11.07	46	34.15	26.64	4.81	30.67	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			31.62	31.86	-8.14	40	36.61	24.92	1.71	31.38	-	-	P	V
			198.75	35.1	-8.4	43.5	47.88	15.95	2.72	31.45	-	-	P	V
			265.71	32.78	-13.22	46	41.21	19.64	3.28	31.35	-	-	P	V
			390.3	34.35	-11.65	46	39.52	22.16	3.82	31.15	-	-	P	V
			519.8	39.8	-6.2	46	42.26	24.36	4.13	30.95	100	271	P	V
			650	36.53	-9.47	46	36.8	25.9	4.59	30.76	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													





<Ant. No. 4>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2369.85	56.04	-17.96	74	50.61	32.14	8.26	34.97	300	35	P	H	
		2376.89	46.86	-7.14	54	41.43	32.14	8.26	34.97	300	35	A	H	
	*	2402	93.11	-	-	87.66	32.19	8.24	34.98	300	35	P	H	
	*	2402	92.56	-	-	87.11	32.19	8.24	34.98	300	35	A	H	
													H	
													H	
			2376.89	56.19	-17.81	74	50.76	32.14	8.26	34.97	325	0	P	V
			2346.33	46.79	-7.21	54	41.47	32.03	8.26	34.97	325	0	A	V
	*		2402	98.18	-	-	92.73	32.19	8.24	34.98	325	0	P	V
	*		2402	97.54	-	-	92.09	32.19	8.24	34.98	325	0	A	V
													V	
BLE CH 39 2480MHz	*	2480	93.27	-	-	87.52	32.45	8.3	35	100	242	P	H	
	*	2480	92.74	-	-	86.99	32.45	8.3	35	100	242	A	H	
		2489.68	56.02	-17.98	74	50.22	32.5	8.3	35	100	242	P	H	
		2487.8	46.97	-7.03	54	41.17	32.5	8.3	35	100	242	A	H	
													H	
													H	
	*	2480	99.09	-	-	93.34	32.45	8.3	35	100	209	P	V	
	*	2480	98.64	-	-	92.89	32.45	8.3	35	100	209	A	V	
		2499.4	56.28	-17.72	74	50.49	32.5	8.3	35.01	100	209	P	V	
		2486.48	47.15	-6.85	54	41.4	32.45	8.3	35	100	209	A	V	
													V	
												V		
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

Table with 14 columns: BLE, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for BLE CH 19 2440MHz at 4880 and 7320 MHz, and a Remark section.



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.		
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )		
2.4GHz BLE LF		65.1	32.05	-7.95	40	49.18	12.35	2.11	31.59	-	-	P	H		
		96.15	30.46	-13.04	43.5	44.03	15.88	2.11	31.56	-	-	P	H		
		186.87	32.79	-10.71	43.5	46.06	15.47	2.72	31.46	-	-	P	H		
		325.2	34.12	-11.88	46	41.45	20.5	3.43	31.26	-	-	P	H		
		519.8	38.81	-7.19	46	41.27	24.36	4.13	30.95	100	11	P	H		
		967.1	35.04	-18.96	54	29.92	30.23	5.4	30.51	-	-	P	H		
														H	
															H
															H
															H
															H
															H
			30.27	35.94	-4.06	40	39.58	26	1.71	31.35	-	-	P	V	
			149.61	32.49	-11.01	43.5	43.65	17.73	2.62	31.51	-	-	P	V	
			187.14	32.99	-10.51	43.5	46.26	15.47	2.72	31.46	-	-	P	V	
			325.2	38.15	-7.85	46	45.48	20.5	3.43	31.26	-	-	P	V	
			519.8	42.9	-3.1	46	45.36	24.36	4.13	30.95	100	222	P	V	
			932.1	35.39	-10.61	46	30.8	29.78	5.33	30.52	-	-	P	V	
															V
															V
														V	
														V	
														V	
														V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.														



<For Sample 2>

<Ant. No. 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 39 2480MHz	*	2480	98.18	-	-	92.21	32.67	8.3	35	100	195	P	H	
	*	2480	97.51	-	-	91.54	32.67	8.3	35	100	195	A	H	
		2497	56.27	-17.73	74	50.28	32.7	8.3	35.01	100	195	P	H	
		2489.48	47.13	-6.87	54	41.13	32.7	8.3	35	100	195	A	H	
													H	
														H
	*	2480	89.66	-	-	83.69	32.67	8.3	35	200	85	P	V	
	*	2480	89.03	-	-	83.06	32.67	8.3	35	200	85	A	V	
		2486.24	56.49	-17.51	74	50.52	32.67	8.3	35	200	85	P	V	
		2495.4	47.3	-6.7	54	41.31	32.7	8.3	35.01	200	85	A	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4960	41.83	-32.17	74	53.68	35.47	11.84	59.16	100	0	P	H
		7440	44.92	-29.08	74	50.38	37.6	15.1	58.16	100	0	P	H
													H
													H
		4960	42.11	-31.89	74	53.96	35.47	11.84	59.16	100	0	P	V
		7440	44.23	-29.77	74	49.69	37.6	15.1	58.16	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<For Sample 3>

<Ant. No. 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 39 2480MHz	*	2480	98.38	-	-	92.41	32.67	8.3	35	100	180	P	H	
	*	2480	97.27	-	-	91.3	32.67	8.3	35	100	180	A	H	
		2495.84	56.56	-17.44	74	50.57	32.7	8.3	35.01	100	180	P	H	
		2492.72	47.25	-6.75	54	41.26	32.7	8.3	35.01	100	180	A	H	
													H	
														H
	*	2480	91.72	-	-	85.75	32.67	8.3	35	300	202	202	P	V
	*	2480	91.14	-	-	85.17	32.67	8.3	35	300	202	202	A	V
		2488.6	56.93	-17.07	74	50.93	32.7	8.3	35	300	202	202	P	V
		2490.4	47.16	-6.84	54	41.16	32.7	8.3	35	300	202	202	A	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4960	41.48	-32.52	74	53.33	35.47	11.84	59.16	100	0	P	H
		7440	43.74	-30.26	74	49.2	37.6	15.1	58.16	100	0	P	H
													H
													H
		4960	41.72	-32.28	74	53.57	35.47	11.84	59.16	100	0	P	V
		7440	43.83	-30.17	74	49.29	37.6	15.1	58.16	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>





A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, James Chiu and Potter Liu	Temperature :	22~26°C
		Relative Humidity :	52~58%

### Note symbol

-L	Low channel location
-R	High channel location







<For Sample 1>





<Ant. No. 1>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

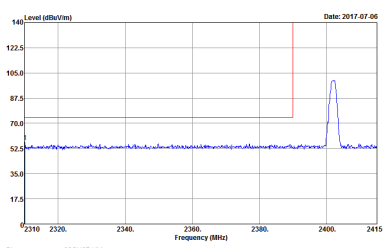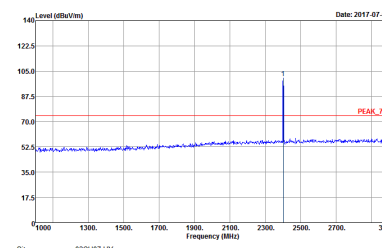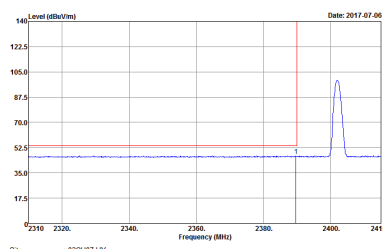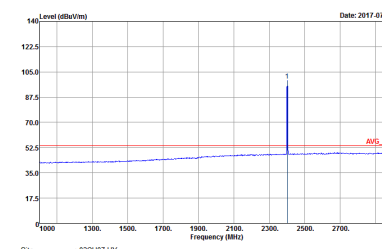BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07HY            Condition : PEAK_05_74 3m HF-ANT_130829 HORIZONTAL            Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Project : 752421            Mode : 5</p>	 <p>Site : 03CH07HY            Condition : PEAK_74 3m HF-ANT_130829 HORIZONTAL            Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Project : 752421            Mode : 5</p>
Avg.	 <p>Site : 03CH07HY            Condition : AVG_05_84 3m HF-ANT_130829 HORIZONTAL            Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Project : 752421            Mode : 5</p>	 <p>Site : 03CH07HY            Condition : AVG_84 3m HF-ANT_130829 HORIZONTAL            Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Project : 752421            Mode : 5</p>

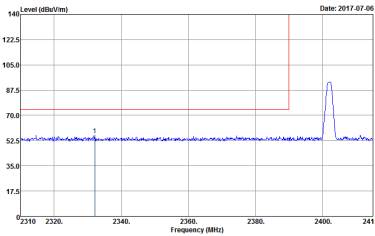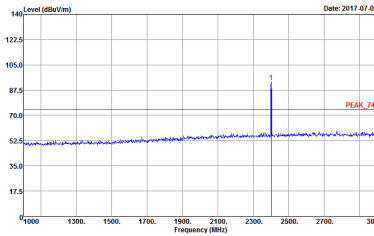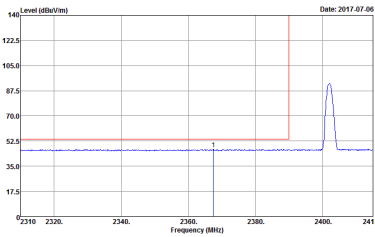
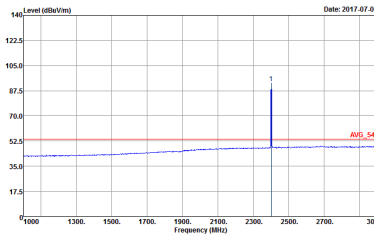


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : S</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : S</p>
Avg	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : S</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : S</p>

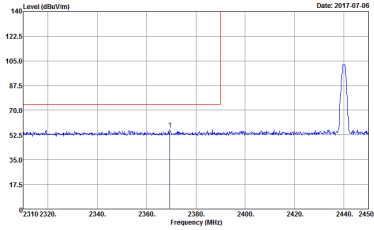
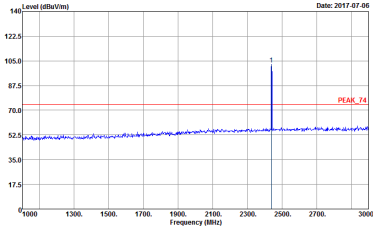
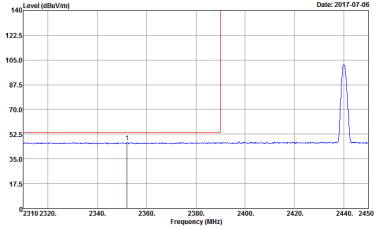
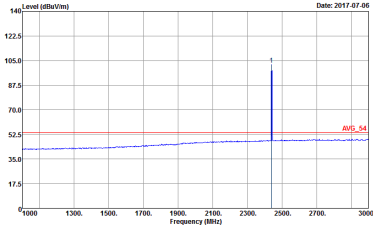


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH17-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 HORIZONTAL            REW:1000 000kHz VBW:3000 000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>	 <p>Site : 03CH17-HY            Condition : PEAK_74 3m HF-ANT_130829 HORIZONTAL            REW:1000 000kHz VBW:3000 000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>
Avg.	 <p>Site : 03CH17-HY            Condition : AVG_BE_54 3m HF-ANT_130829 HORIZONTAL            REW:1000 000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>	 <p>Site : 03CH17-HY            Condition : AVG_54 3m HF-ANT_130829 HORIZONTAL            REW:1000 000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>

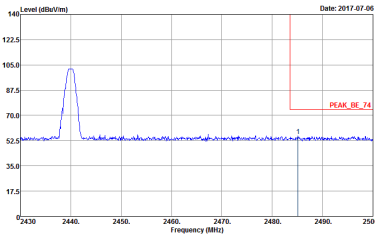
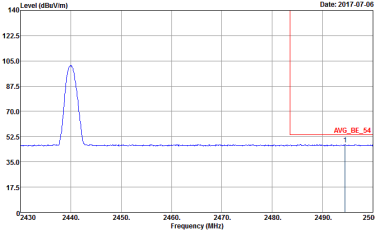


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT_130829 HORIZONTAL            : RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>	<p>Left blank</p>

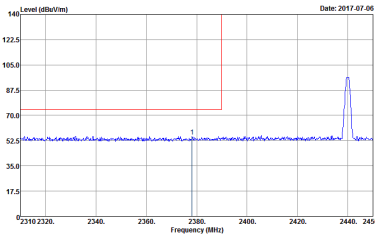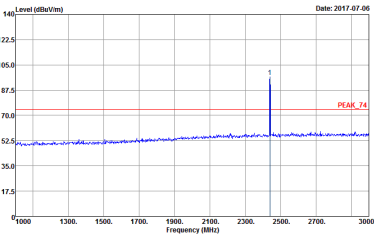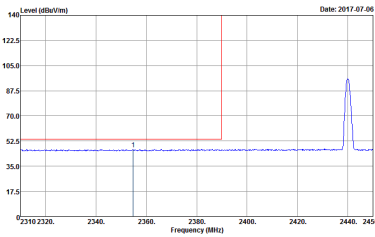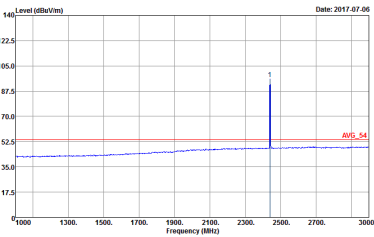





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>
Avg.	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6</p>

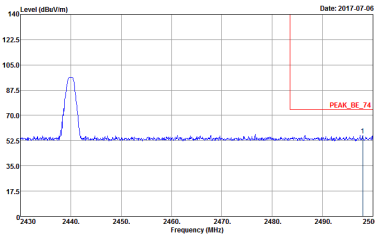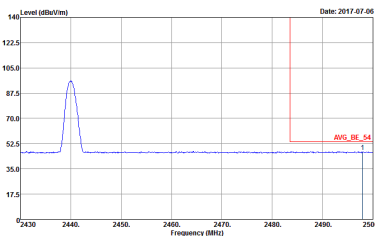





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 <p>           Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6         </p>	Left blank
Avg.	 <p>           Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT_130829 VERTICAL            : RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 6         </p>	Left blank



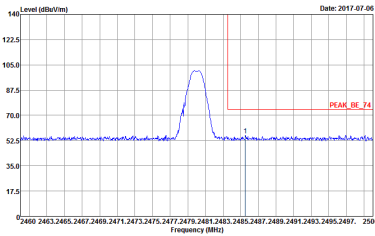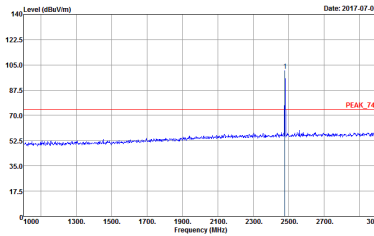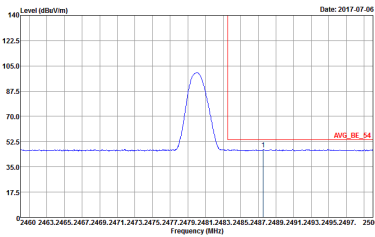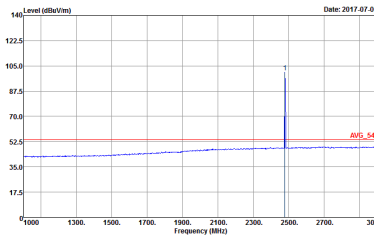

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT_130829 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>
Avg.	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT_130829 HORIZONTAL            : RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT_130829 HORIZONTAL            : RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>

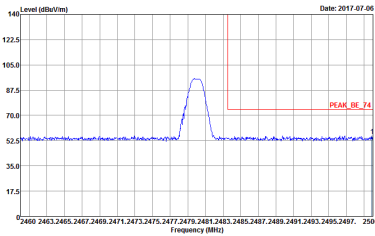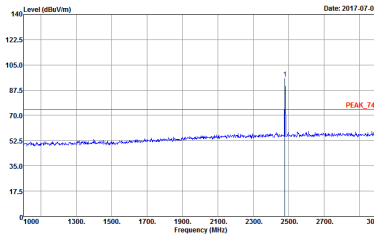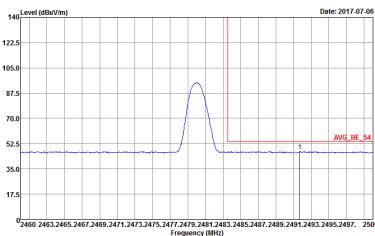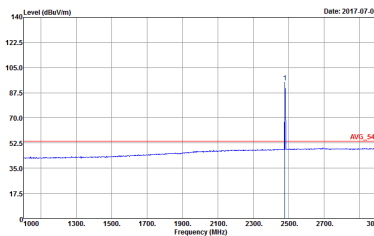

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>
Avg.	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>	 <p>Date: 2017-07-06</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT 130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 7</p>



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p><b>Peak</b> <b>Avg.</b></p>	<p>Site : 03C307-01Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 752421 Mode : 5</p>	<p>Site : 03C307-01Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 752421 Mode : 5</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
Peak Avg.	<p>Horizontal Spectrum Plot (Date: 2017-07-06)</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Peaks labeled: 1, 2</p> <p>Avg. level: AVG_54</p> <p>Peak level: PEAK_74</p> <p>Site : USCH07-111 Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : FR752421 Mode : 6</p>	<p>Vertical Spectrum Plot (Date: 2017-07-06)</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Peaks labeled: 1, 2</p> <p>Avg. level: AVG_54</p> <p>Peak level: PEAK_74</p> <p>Site : USCH07-111 Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : FR752421 Mode : 6</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<p>Horizontal spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays two distinct peaks labeled '1' and '2' at approximately 5.5 MHz and 7.5 MHz respectively. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 0 to 25000 MHz. Two horizontal red lines indicate levels: 'PEAK_74' at approximately 70 dBuV/m and 'AVG_54' at approximately 52.5 dBuV/m. Metadata: Date: 2017-07-06, Site: 03CH07-011, Condition: PEAK_74 3m SHF-EHF_131029 HORIZONTAL, Detector: Peak, Project: 752421, Mode: 7.</p>	<p>Vertical spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays two distinct peaks labeled '1' and '2' at approximately 5.5 MHz and 7.5 MHz respectively. The y-axis ranges from 17.5 to 140 dBuV/m, and the x-axis ranges from 0 to 25000 MHz. Two horizontal red lines indicate levels: 'PEAK_74' at approximately 70 dBuV/m and 'AVG_54' at approximately 52.5 dBuV/m. Metadata: Date: 2017-07-06, Site: 03CH07-011, Condition: PEAK_74 3m SHF-EHF_131029 VERTICAL, Detector: Peak, Project: 752421, Mode: 7.</p>



Emission below 1GHz
2.4GHz BLE (LF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot of Level (dBuV/m) vs Frequency (MHz) for BLE LF. The plots show a blue signal line and a red QP (Quasi Peak) line. The horizontal plot is for HORIZONTAL and the vertical plot is for VERTICAL. Both plots have a date of 2017-07-07.





QP / Peak







<Ant. No. 3>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

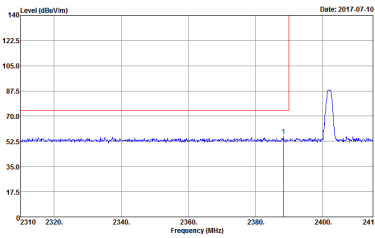
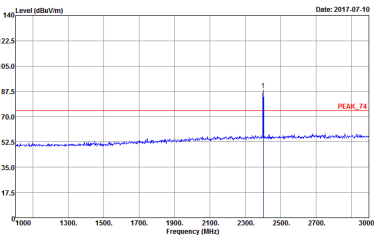
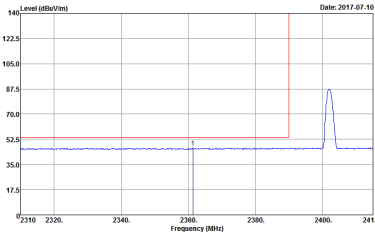
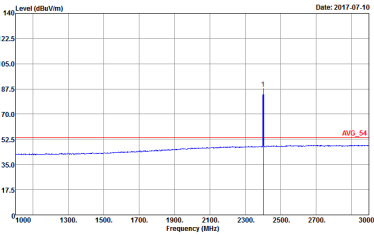
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2017-07-10</p> <p>Site : 03CH07-4Y Condition : PEAK_BE_74 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 752421 Mode : 71</p>	 <p>Date: 2017-07-10</p> <p>Site : 03CH07-4Y Condition : PEAK_74 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 752421 Mode : 71</p>
Avg.	 <p>Date: 2017-07-10</p> <p>Site : 03CH07-4Y Condition : AVG_BE_54 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 752421 Mode : 71</p>	 <p>Date: 2017-07-10</p> <p>Site : 03CH07-4Y Condition : AVG_54 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 752421 Mode : 71</p>

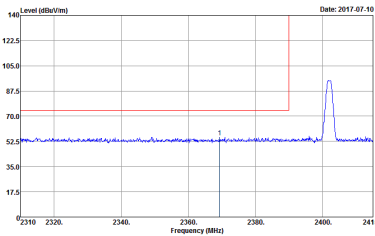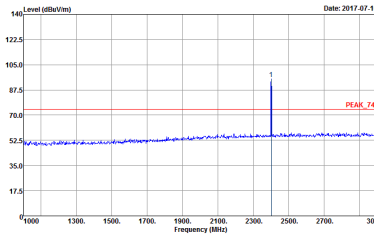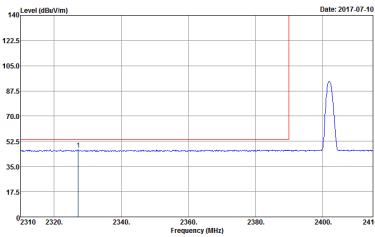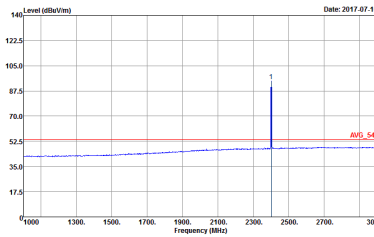





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 71</p>	 <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 71</p>
Avg	 <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 71</p>	 <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 71</p>



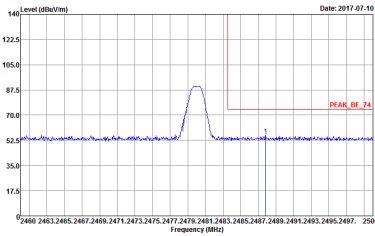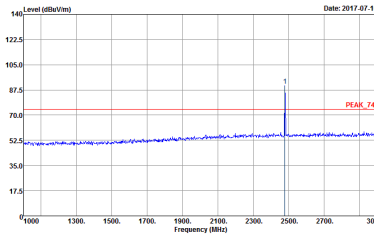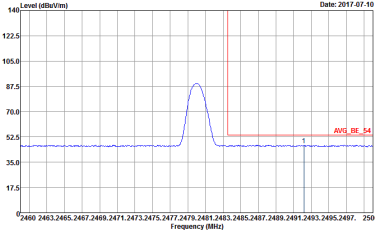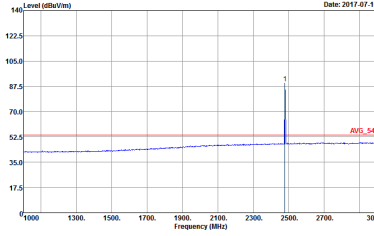

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH074HY            Condition : PEAK_BE_74 3m HF-ANT_13829 HORIZONTAL            Detector : Peak            Project : 752421            Mode : F3</p>	 <p>Site : 03CH074HY            Condition : PEAK_74 3m HF-ANT_13829 HORIZONTAL            Detector : Peak            Project : 752421            Mode : F3</p>
Avg.	 <p>Site : 03CH074HY            Condition : AVG_BE_54 3m HF-ANT_13829 HORIZONTAL            Detector : Peak            Project : 752421            Mode : F3</p>	 <p>Site : 03CH074HY            Condition : AVG_54 3m HF-ANT_13829 HORIZONTAL            Detector : Peak            Project : 752421            Mode : F3</p>

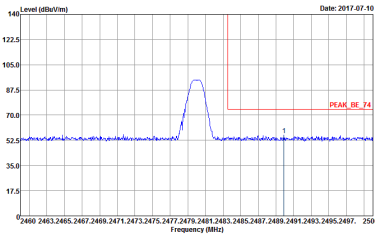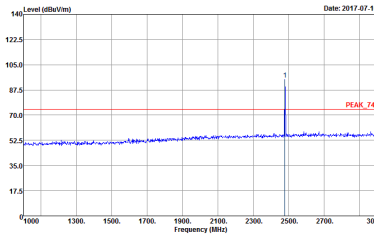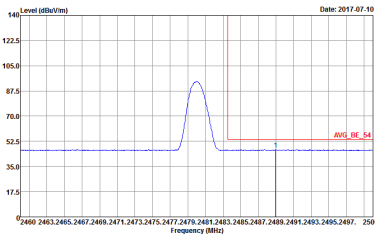
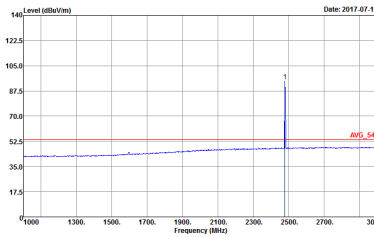


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Level (dBV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 105 dBV/m. The plot includes a red horizontal line labeled 'PEAK_BE_74' at the peak level. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 17.5 to 140 dBV/m.</p> <p>Site : 03CH074HY            Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 73</p>	 <p>Level (dBV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 105 dBV/m. The plot includes a red horizontal line labeled 'PEAK_74' at the peak level. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 17.5 to 140 dBV/m.</p> <p>Site : 03CH074HY            Condition : PEAK_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 73</p>
Avg.	 <p>Level (dBV/m) vs Frequency (MHz) plot showing the average level. The average level is approximately 55 dBV/m. The plot includes a red horizontal line labeled 'AVG_BE_54' at the average level. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 17.5 to 140 dBV/m.</p> <p>Site : 03CH074HY            Condition : AVG_BE_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 73</p>	 <p>Level (dBV/m) vs Frequency (MHz) plot showing the average level. The average level is approximately 55 dBV/m. The plot includes a red horizontal line labeled 'AVG_54' at the average level. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 17.5 to 140 dBV/m.</p> <p>Site : 03CH074HY            Condition : AVG_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 73</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

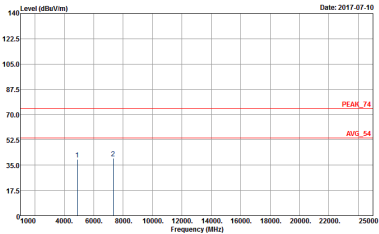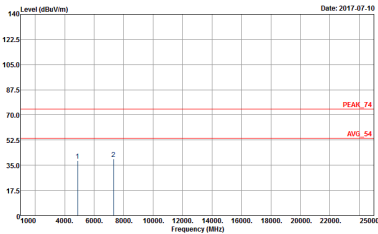BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<b>Peak</b>  <b>Avg.</b>	 <p>Site : 03CH074HY  Condition : PEAK_24.3m SHF-EHF_131029 HORIZONTAL  Detector : Peak  Project : 752421  Mode : 72</p>	 <p>Site : 03CH074HY  Condition : PEAK_24.3m SHF-EHF_131029 VERTICAL  Detector : Peak  Project : 752421  Mode : 72</p>



Emission below 1GHz
2.4GHz BLE (LF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot of Level (dBuV/m) vs Frequency (MHz) for BLE LF. The plots show a blue signal line and a red QP limit line. Metadata includes Site: 03CH074HY, Condition: QP 2m LF ANT-35419(E), Detector: Peak, Project: 752421, Mode: 74.







<Ant. No. 4>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Horizontal		Fundamental
Peak	<p>Date: 2017-07-19</p> <p>Site : 03CH07-HY  Condition : PEAK_BE_74 3m HF-ANT_130829 HORIZONTAL  RBW:1000.000kHz VBW:3000.000kHz SWT:Auto  Detector : Peak  Project : 752421  Mode : 113</p>	<p>Date: 2017-07-19</p> <p>Site : 03CH07-HY  Condition : PEAK_74 3m HF-ANT_130829 HORIZONTAL  RBW:1000.000kHz VBW:3000.000kHz SWT:Auto  Detector : Peak  Project : 752421  Mode : 113</p>
Avg.	<p>Date: 2017-07-19</p> <p>Site : 03CH07-HY  Condition : AVG_BE_54 3m HF-ANT_130829 HORIZONTAL  RBW:1000.000kHz VBW:3.000kHz SWT:Auto  Detector : Peak  Project : 752421  Mode : 113</p>	<p>Date: 2017-07-19</p> <p>Site : 03CH07-HY  Condition : AVG_54 3m HF-ANT_130829 HORIZONTAL  RBW:1000.000kHz VBW:3.000kHz SWT:Auto  Detector : Peak  Project : 752421  Mode : 113</p>

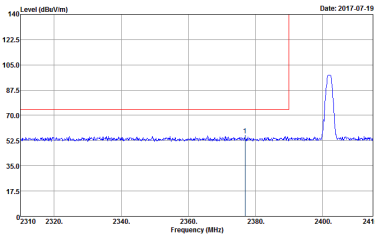
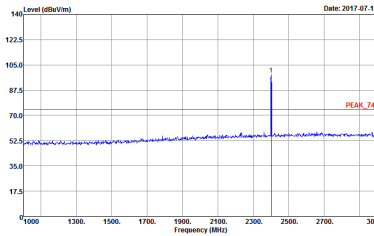
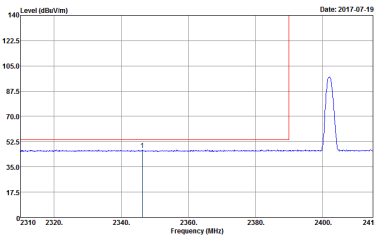
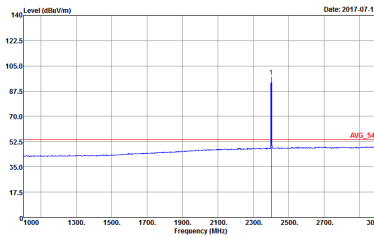


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 113</p>	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 113</p>
Avg	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 113</p>	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 113</p>

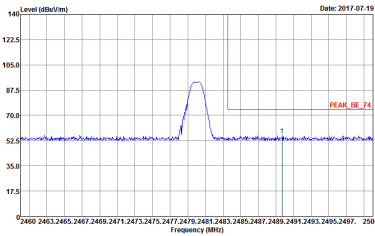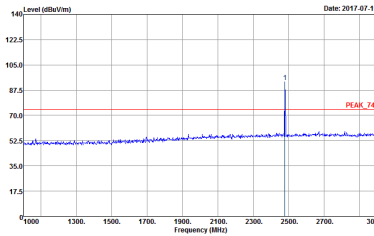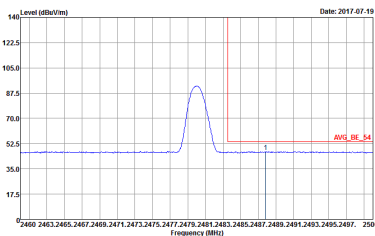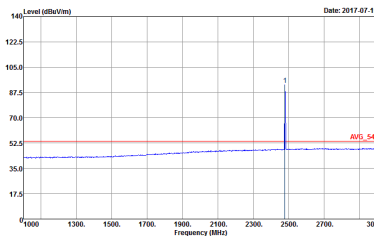

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 105 dBuV/m. The plot includes a red horizontal line labeled 'PEAK_BE_74' at the peak level.</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SVWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 105 dBuV/m. The plot includes a red horizontal line labeled 'PEAK_74' at the peak level.</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SVWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. A peak is visible at 2480 MHz. The plot includes a red horizontal line labeled 'AVG_BE_54' at the peak level.</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3.000kHz SVWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. A sharp peak is visible at 2480 MHz. The plot includes a red horizontal line labeled 'AVG_54' at the peak level.</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3.000kHz SVWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>

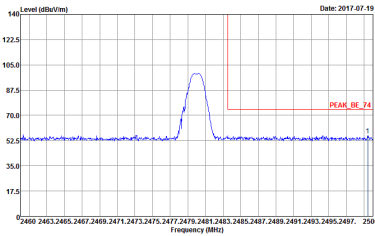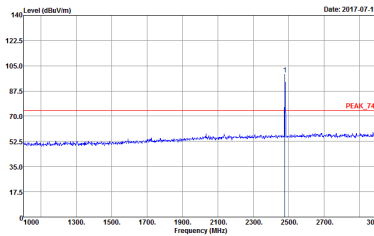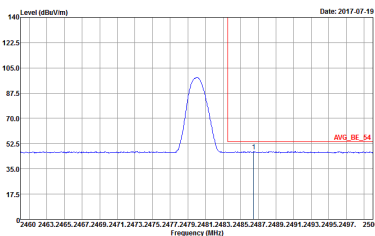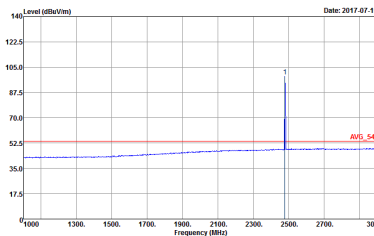

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>
Avg.	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>	 <p>Date: 2017-07-19</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3.000kHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 115</p>





2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH074HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 752421 Mode : 114</p>	<p>Site : 03CH074HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 752421 Mode : 114</p>



Emission below 1GHz  
2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH0741Y Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 752421 Mode : 116</p>	<p>Site : 03CH0741Y Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 752421 Mode : 116</p>







<For Sample 2>





<Ant. No. 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-4Y Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 752421 Mode : 152</p>	 <p>Site : 03CH07-4Y Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 752421 Mode : 152</p>
Avg.	 <p>Site : 03CH07-4Y Condition : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL Detector : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 752421 Mode : 152</p>	 <p>Site : 03CH07-4Y Condition : AVG_54 3m HF_ANT_00066584 HORIZONTAL Detector : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 752421 Mode : 152</p>

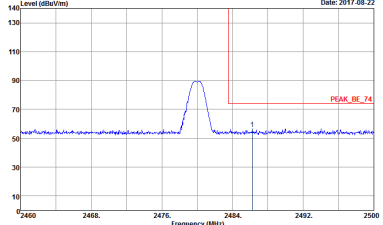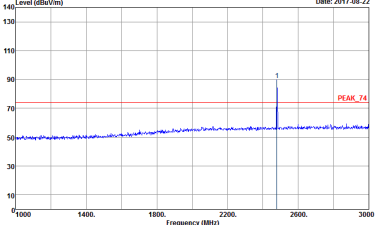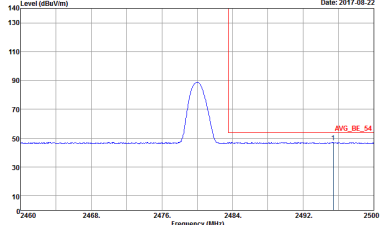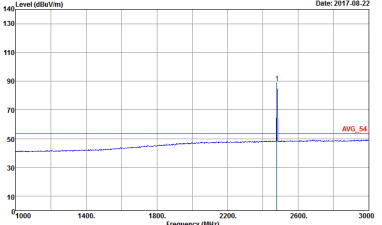

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 152</p>	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 152</p>
Avg.	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 152</p>	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-HY            Condition : AVG_54 3m HF_ANT_00066584 VERTICAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 752421            Mode : 152</p>



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

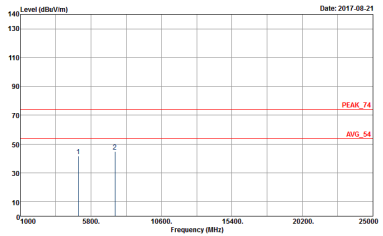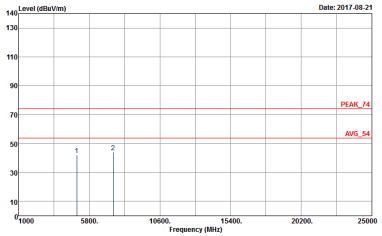BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
<b>Peak</b>	 <p>Site : 03CH07-4Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 752421 Mode : 15Z</p>	 <p>Site : 03CH07-4Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 752421 Mode : 15Z</p>







<For Sample 3>





<Ant. No. 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

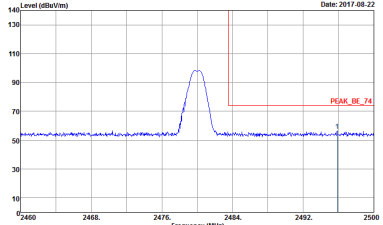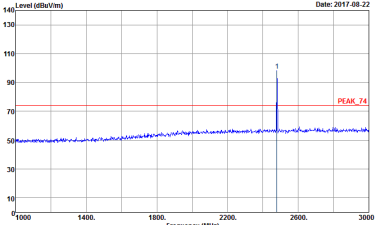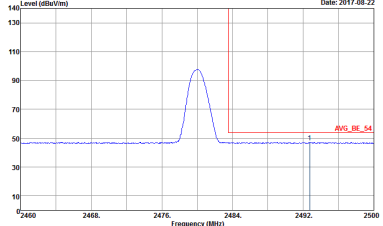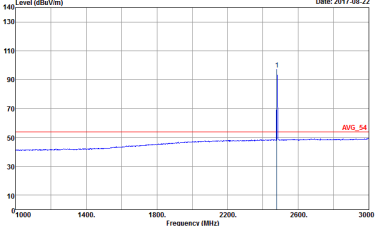BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL            Detector : Peak            Project : 752421            Mode : 155</p>	 <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL            Detector : Peak            Project : 752421            Mode : 155</p>
Avg.	 <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL            Detector : Peak            Project : 752421            Mode : 155</p>	 <p>Site : 03CH07-HY            Condition : AVG_54 3m HF_ANT_00066584 HORIZONTAL            Detector : Peak            Project : 752421            Mode : 155</p>

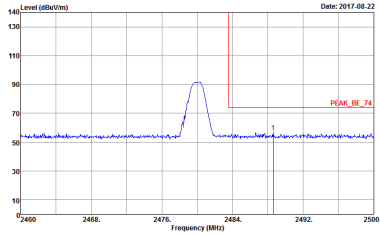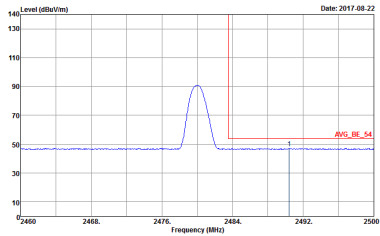



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-4Y            Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL            Detector : Peak            Project : 752421            Mode : 155</p>	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-4Y            Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL            Detector : Peak            Project : 752421            Mode : 155</p>
Avg.	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-4Y            Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL            Detector : Peak            Project : 752421            Mode : 155</p>	 <p>Date: 2017-08-22</p> <p>Site : 03CH07-4Y            Condition : AVG_54 3m HF_ANT_00066584 VERTICAL            Detector : Peak            Project : 752421            Mode : 155</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

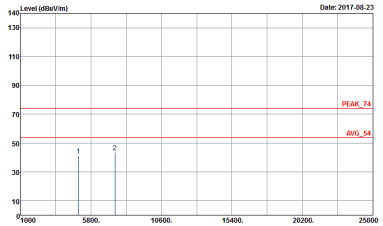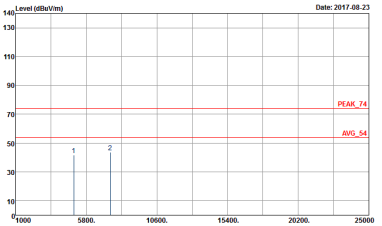
BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
Peak	 <p>Site : 03CH07-4Y  Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL  Detector : Peak  Project : 752421  Mode : 155</p>	 <p>Site : 03CH07-4Y  Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL  Detector : Peak  Project : 752421  Mode : 155</p>



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth -LE	62.18	388.00	2.58	3kHz

### Bluetooth - LE

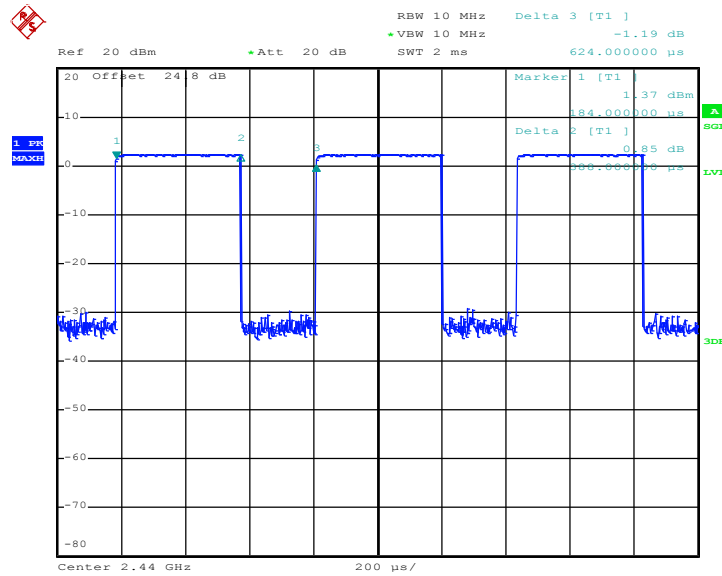

Date: 14.JUN.2017 18:13:45