

FCC SAR TEST REPORT

FCC ID : UZ7WT0
Equipment : WT6400 Wearable Computer
Brand Name : Zebra
Model Name : WT0
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Mar. 05, 2024 and testing was started from Mar. 06, 2024 and completed on Apr. 08, 2024. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information 5
3.1 General Information 5
4. RF Exposure Limits..... 7
4.1 Uncontrolled Environment..... 7
4.2 Controlled Environment..... 7
4.3 RF Exposure limit for above 6GHz..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction 9
5.2 SAR Definition..... 9
6. System Description and Setup10
6.1 Test Site Location.....10
6.2 E-Field Probe11
6.3 Data Acquisition Electronics (DAE).....11
6.4 Phantom.....12
6.5 Device Holder.....13
7. Measurement Procedures14
7.1 Spatial Peak SAR Evaluation.....14
7.2 Power Reference Measurement.....15
7.3 Area Scan15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures.....16
7.6 Power Drift Monitoring.....16
8. Test Equipment List.....17
9. System Verification18
9.1 Tissue Verification18
9.2 System Performance Check Results.....19
9.3 PD System Performance Check Results.....21
10. WiFi/Bluetooth Output Power (Unit: dBm).....22
11. Antenna Location29
12. SAR Test Results30
12.1 Body SAR32
12.2 Extremity SAR.....34
12.3 6GHz PD SAR Result36
12.4 Repeated SAR Measurement36
13. Simultaneous Transmission Analysis.....37
13.1 Body Exposure Conditions37
13.2 Extremity Exposure Conditions37
14. Uncertainty Assessment38
15. References.....41
Appendix A. Plots of SAR System Performance Check
Appendix B. Plots of PD System Performance Check
Appendix C. Plots of High SAR Measurement
Appendix D. Plots of High PD Measurement
Appendix E. DASY Calibration Certificate
Appendix F. Test Setup Photos

History of this test report

Report No.	Version	Description	Issued Date
FA422224	01	Initial issue of report	Apr. 25, 2024



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Zebra Technologies Corporation, WT6400 Wearable Computer, WT0, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
			Body (10mm)	Extremity (0mm)		
			1g SAR (W/kg)	10g SAR (W/kg)		
DTS	WLAN	2.4GHz WLAN	0.49	1.27	1.55	3.51
NII		5GHz WLAN	1.11	2.25	1.55	3.51
6XD		6GHz WLAN	0.22	0.34	1.55	3.51
DSS	2.4GHz Band	Bluetooth	< 0.01	0.03	1.31	2.61
DXX	NFC	13.56MHz		< 0.01		3.51
Equipment Class	Frequency Band		Reported APD (mW/cm^2)	Reported APD (mW/cm^2)	Reported PD (mW/cm^2)	
6XD	WLAN	6GHz WLAN	0.19	0.79	0.72	
Date of Testing:			2024/03/06 ~ 2024/04/08			

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Extremity 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	WT6400 Wearable Computer
Brand Name	Zebra
Model Name	WT0
FCC ID	UZ7WT0
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK
HW Version	EV1.1
SW Version	13-14-19.00-TG-U00-PRD-NEM-04
OS Version	Android 13
EUT Stage	Engineering sample

Remark:

- There are two kinds of samples as below. RF exposure evaluation selects sample 1 as the main test and sample 2 spot check worst case found in sample 1.
- There two battery and four headset, RF exposure select battery 1 and headset1 perform, other battery and headset spot check worst case each operation band configuration.
- Since the device support specially shaped wrist worn accessory, due to the physical limit on the form factor, curve and antenna locations, the inner face of the EUT with wrist mount accessory can't directly touch the flat phantom. In order to address SAR testing issue, we use specific wrist phantom for SAR measurement, the inner surface of the EUT with wrist mount accessory can fit and direct contact against the wrist phantom provide by SPEAG, the test approach is closer to representative of actual use condition, for the device the test plan and use wrist phantom was confirm via KDB inquiry.

Sample List	
Sample 1	Premium
Sample 2	Base



Specification of Accessories				
AC Adapter 1	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Corded Adapter 1	Brand Name	Zebra	Part Number	CBL-RS5X6-ADPWT-01
Corded Adapter 2	Brand Name	Zebra	Part Number	CBL-RS5X6-ADPCT-01
Battery 1	Brand Name	Zebra	Part Number	BT-000490-1020
Battery 2	Brand Name	Zebra	Part Number	BT-000490-1820
USB Cable	Brand Name	Zebra	Part Number	CBL-NGWT-USBCHG-01
Vibrating Cable	Brand Name	Zebra	Part Number	CBL-NGWT-HDVBAP-01
Type-C cable	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
Type-A to Type-C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Audio Cable 1	Brand Name	Zebra	Part Number	CBL-HS2100-12S1-01
Audio Cable 2	Brand Name	Zebra	Part Number	CBL-HS3100-CUC1-01
Training cable	Brand Name	Zebra	Part Number	25-129938-02R
Audio Adapter Cable (Short)	Brand Name	Zebra	Part Number	CBL-NGWT-AUQDST-02
Audio Adapter Cable (Long)	Brand Name	Zebra	Part Number	CBL-NGWT-AUQDLG-01
HEADSET QUICK DISCONNECT CABLE	Brand Name	Zebra	Part Number	CBL-HS2100-QDC1-02
Scanner 1	Brand Name	Zebra	Part Number	RS61B0-KESSXWR
			Model Number	RS6100
Scanner 2	Brand Name	Zebra	Part Number	RS51B0-LCFSWR
			Model Number	RS5100
Scanner 3	Brand Name	Zebra	Part Number	RS4000-HPCSWR
			Model Number	RS4000
Scanner 4	Brand Name	Zebra	Part Number	RS4000-HPCLWR
			Model Number	RS4000
Scanner 5	Brand Name	Zebra	Part Number	RS5000-LCBSWR
			Model Number	RS5000
Earphone 1	Brand Name	Zebra	Part Number	HS2100-OTH
			Model Number	HS2100
Earphone 2	Brand Name	Zebra	Part Number	HS3100-OTH
			Model Number	HS3100
Earphone 3	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
hip mount 1	Brand Name	Zebra	Part Number	SG-WT5X6-HPMNT-01
hip mount 2	Brand Name	Zebra	Part Number	SG-WT5X6-HPMTX-01
Wrist moun + Single dial strap (S)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTSS-01
Wrist moun + Single dial strap (L)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTSL-01
Wrist moun + Single dial strap (XL)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTSX-01
Wrist moun + Dual dial strap (S)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTDS-01
Wrist moun + Dual dial strap (L)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTDL-01
Wrist moun + Dual dial strap (XL)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTDX-01
Wrist moun + Velcro strap (S)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTVS-01
Wrist moun + Velcro strap (L)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTVL-01
Wrist moun + Velcro strap (XL)	Brand Name	Zebra	Part Number	SG-WT5X6-WMTVX-01
Dual dial strap (S)	Brand Name	Zebra	Part Number	SG-WT5X6-WSTDS-01
Dual dial strap (L)	Brand Name	Zebra	Part Number	SG-WT5X6-WSTDL-01
Dual dial strap (XL)	Brand Name	Zebra	Part Number	SG-WT5X6-WSTDX-01
Velcro strap (S)	Brand Name	Zebra	Part Number	SG-WT5X6-WSTVS-01
Velcro strap (L)	Brand Name	Zebra	Part Number	SG-WT5X6-WSTVL-01
Velcro strap (XL)	Brand Name	Zebra	Part Number	SG-WT5X6-WSTVX-01
Single dial strap (S)	Brand Name	Zebra	Part Number	SG-NGWT-WSTPST-01
Single dial strap (L)	Brand Name	Zebra	Part Number	SG-NGWT-WSTPLN-01
Single dial strap (XL)	Brand Name	Zebra	Part Number	SG-NGWT-WSTPXL-01
sleeves for wrist mount	Brand Name	Zebra	Part Number	SG-WT4027050-01R
Screen Protector	Brand Name	Zebra	Part Number	MISC-WT5X6-SCRN-05



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



4.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

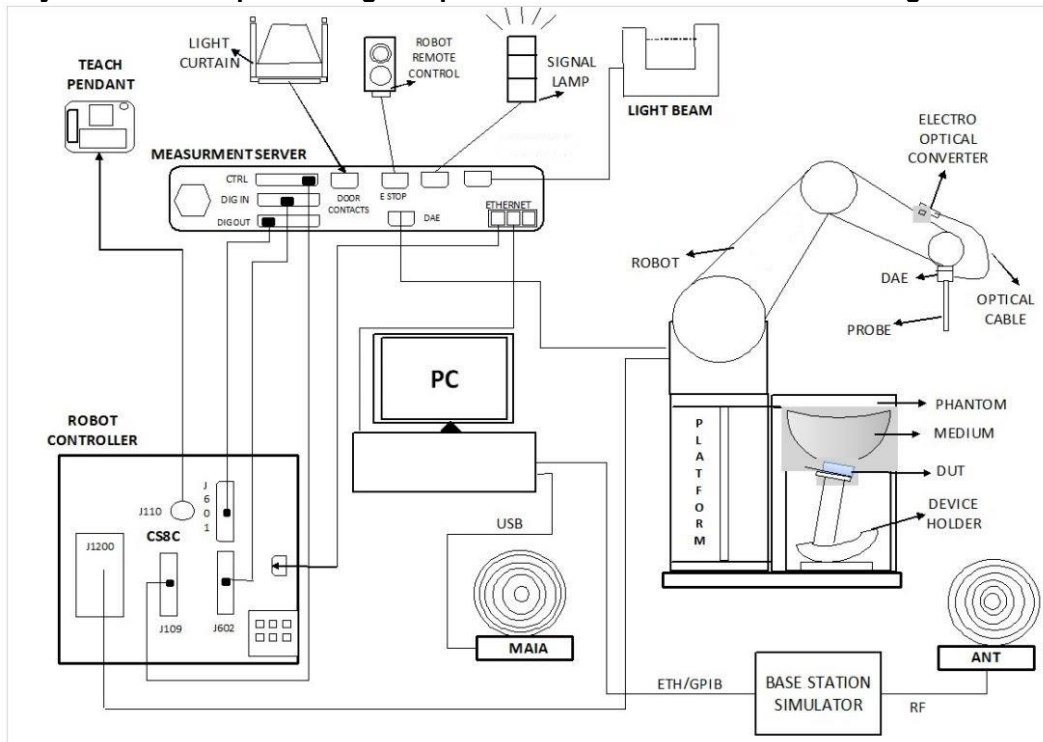

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY	


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	


The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

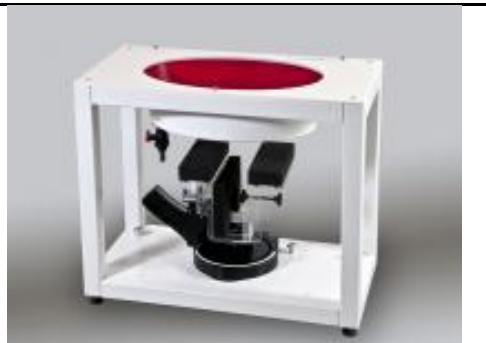Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

<Wrist Phantom>

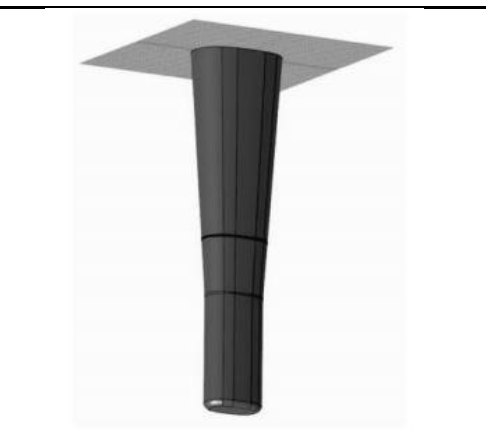Liquid Compatibility	The phantom shell is compatible with SPEAG's tissue simulating liquids both sugar and oil based. Other liquids may be used however liquids that are corrosive, including liquids containing DGBE, must not be used as they will cause damage to the phantom and render the warranty void (see note or consult SPEAG support).	
Shell Thickness	2 ± 0.2 mm	
Wrist Shape	Design compatible with CTIA forearm.	

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	736	Aug. 17, 2021	Aug. 14, 2024
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2022	Nov. 19, 2024
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1006	May. 25, 2023	May. 23, 2025
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1083	Oct. 20, 2023	Oct. 19, 2024
SPEAG	13MHz System Validation Kit ⁽²⁾	CLA13	1022	Sep. 01, 2022	Aug. 30, 2024
SPEAG	5G Verification Source	10GHz	1020	Jan. 18, 2024	Jan. 17, 2025
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9461	Oct. 12, 2023	Oct. 11, 2024
SPEAG	Data Acquisition Electronics	DAE4	778	Jan. 22, 2024	Jan. 21, 2025
SPEAG	Data Acquisition Electronics	DAE4	854	Aug. 17, 2023	Aug. 16, 2024
SPEAG	Data Acquisition Electronics	DAE4ip	1823	Jul. 31, 2023	Jul. 30, 2024
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 19, 2023	May. 18, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Apr. 25, 2023	Apr. 24, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 18, 2023	Jul. 17, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7822	Aug. 02, 2023	Aug. 01, 2024
Testo	Hygro meter	608-H1	45196600	Nov. 02, 2023	Nov. 01, 2024
R&S	BT Base Station	CBT	101136	Oct. 22, 2023	Oct. 21, 2024
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 27, 2023	Sep. 26, 2024
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 30, 2023	Oct. 29, 2024
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2023	Sep. 18, 2024
SPEAG	Dielectric Probe Kit	DAK-12	1156	Jul. 17, 2023	Jul. 16, 2024
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 09, 2023	Aug. 08, 2024
Anritsu	Power Meter	ML2495A	1419002	Aug. 17, 2023	Aug. 16, 2024
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2023	Aug. 17, 2024
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 10, 2023	Jul. 09, 2024
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2023	Oct. 15, 2024
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
13	22.6	0.728	54.685	0.75	55.00	-2.93	-0.57	±5	2024/3/28
2450	22.5	1.820	39.000	1.80	39.20	1.11	-0.51	±5	2024/3/6
2450	22.5	1.854	39.865	1.80	39.20	3.00	1.70	±5	2024/3/15
2450	22.5	1.835	39.735	1.80	39.20	1.94	1.36	±5	2024/3/19
5250	22.5	4.760	36.600	4.71	35.95	1.06	1.81	±5	2024/3/7
5250	22.2	4.588	35.847	4.71	35.95	-2.59	-0.29	±5	2024/3/13
5250	22.5	4.76	36.6	4.71	35.95	1.06	1.81	±5	2024/4/8
5600	22.5	5.130	36.100	5.07	35.50	1.18	1.69	±5	2024/3/7
5600	22.2	4.945	35.365	5.07	35.50	-2.47	-0.38	±5	2024/3/13
5750	22.5	5.290	35.900	5.22	35.35	1.34	1.56	±5	2024/3/7
5750	22.2	5.095	35.089	5.22	35.35	-2.39	-0.74	±5	2024/3/13
6500	22.5	6.180	34.900	6.07	34.50	1.81	1.16	±5	2024/3/8
2450	22.5	1.820	39.000	1.80	39.20	1.11	-0.51	±5	2024/3/6
2450	22.5	1.820	39.000	1.80	39.20	1.11	-0.51	±5	2024/3/6
2450	22.5	1.820	39.000	1.80	39.20	1.11	-0.51	±5	2024/3/6
5800	22.5	5.340	35.800	5.27	35.30	1.33	1.42	±5	2024/3/7
6500	22.7	6.180	34.900	6.07	34.50	1.81	1.16	±5	2024/3/8



9.2 System Performance Check Results

<System Check Results at Flat Phantom>

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 % under the flat phantom. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 15 columns: Date, Frequency (MHz), Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%), Measured 10g SAR (W/kg), Targeted 10g SAR (W/kg), Normalized 10g SAR (W/kg), Deviation (%), Test Site. It contains 20 rows of test data.

<System Check Results at Wrist Phantom>

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 28.5 % under the wrist phantom. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)	Test Site
2024/3/6	2450	240	D2450V2-736	EX3DV4 - SN7822	DAE4ip Sn1823	14.200	53.500	59.2	10.59	6.190	24.200	25.8	6.58	SAR-04
2024/3/6	2450	240	D2450V2-736	EX3DV4 - SN7822	DAE4ip Sn1823	16.300	62.100	67.9	9.37	7.600	26.800	31.7	18.16	SAR-04
2024/3/6	2450	240	D2450V2-736	EX3DV4 - SN7822	DAE4ip Sn1823	10.200	41.300	42.5	2.91	4.630	17.600	19.3	9.61	SAR-04
2024/3/7	5800	100	D5GHzV2-1006-5800	EX3DV4 - SN7822	DAE4ip Sn1823	7.650	78.000	76.5	-1.92	2.110	21.900	21.1	-3.65	SAR-04
2024/3/8	6500	100	D6.5GHzV2-1083	EX3DV4 - SN7822	DAE4ip Sn1823	27.100	305.000	271	-11.15	4.820	52.500	48.2	-8.19	SAR-04

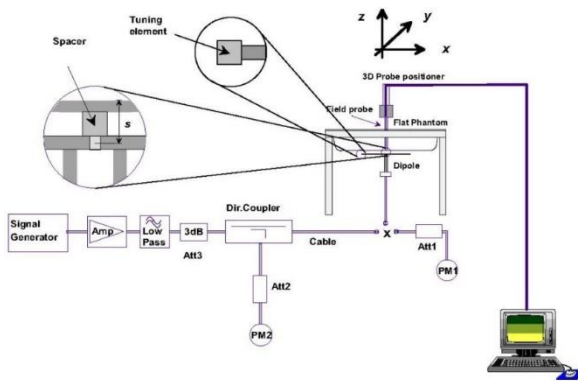


Fig for System Performance Check Setup



Fig for Setup Photo at Flat Phantom

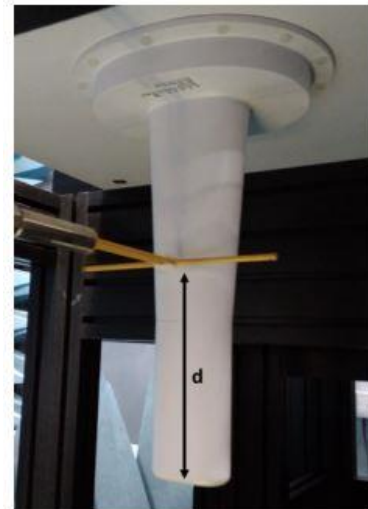


Fig for Setup Photo at Wrist Phantom

9.3 PD System Performance Check Results

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user’s manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG’s mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes

Test Site	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)	Date
SAR-01	10G	10GHz_1020	SN9461	SN854	10	55.1	55.8	-0.05	2024/3/10

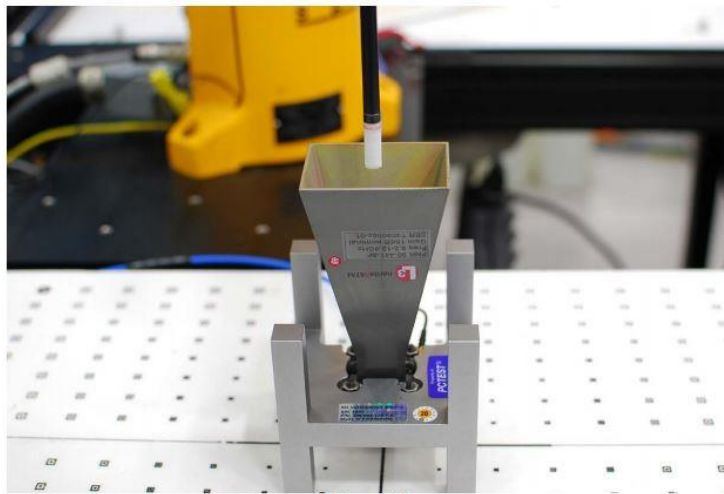


Figure 4-3
System Verification Setup Photo

System Performance Check Setup



10. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
7. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
8. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
9. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<2.4GHz WLAN_NonDBS>																	
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 0			Ant 1			Ant 0+1 (0)		Ant 0+1 (1)		Ant 0+1			
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN	802.11b 1Mbps	1	2412	Not Required	19.00	Not Required	18.80	19.00	97.91	18.78	19.00	18.58	19.00	21.69	22.00	97.91	
		6	2437		22.00		21.98	22.00		21.78	22.00	21.48	22.00	24.64	25.00		
		11	2462		19.00		18.88	19.00		18.58	19.00	18.88	19.00	21.74	22.00		
	802.11g 6Mbps	1	2412		20.00		20.00	Not Required	19.00	20.00	Not Required	19.00	20.00	19.00	20.00	23.00	Not Required
		6	2437		22.00		22.00		22.00	22.00		22.00	22.00	25.00			
		11	2462		20.00		20.00		20.00	20.00		20.00	23.00				
	802.11n-HT20 MCS0	1	2412		20.00		20.00	Not Required	19.00	20.00	Not Required	19.00	20.00	19.00	20.00	23.00	Not Required
		6	2437		22.00		22.00		22.00	22.00		22.00	25.00				
		11	2462		19.00		19.00		19.00	19.00		19.00	22.00				
	802.11ac-VHT20 MCS0	1	2412		19.50		19.50	Not Required	19.50	19.50	Not Required	19.50	19.50	19.50	19.50	22.50	Not Required
		6	2437		22.00		22.00		22.00	22.00		22.00	25.00				
		11	2462		19.00		19.00		19.00	19.00		19.00	22.00				
	802.11ax-HE20 MCS0	1	2412		19.50		19.50	Not Required	19.50	19.50	Not Required	19.50	19.50	19.50	19.50	22.50	Not Required
		6	2437		22.00		22.00		22.00	22.00		22.00	25.00				
		11	2462		19.00		19.00		19.00	19.00		19.00	22.00				

<5.2GHz WLAN_NonDBS >																	
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 0			Ant 1			Ant 0+1 (0)		Ant 0+1 (1)		Ant 0+1			
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	19.00	Not Required	19.00	19.00	Not Required	19.00	19.00	19.00	19.00	22.00	Not Required		
		40	5200		19.50		19.50	19.50		19.50	22.50						
		44	5220		19.50		19.50	19.50		19.50	22.50						
		48	5240		19.50		19.50	19.50		19.50	22.50						
	802.11n-HT20 MCS0	36	5180		17.50		17.50	Not Required	17.50	17.50	Not Required	17.50	17.50	17.50	17.50	20.50	Not Required
		40	5200		19.50		19.50		19.50	19.50		22.50					
		44	5220		19.50		19.50		19.50	19.50		22.50					
	802.11n-HT40 MCS0	38	5190		16.50		16.50	Not Required	16.50	16.50	Not Required	16.50	16.50	16.50	16.50	19.50	Not Required
		46	5230		18.50		18.50		18.50	18.50		21.50					
	802.11ac-VHT20 MCS0	36	5180		17.50		17.50	Not Required	17.50	17.50	Not Required	17.50	17.50	17.50	17.50	20.50	Not Required
		40	5200		19.50		19.50		19.50	19.50		22.50					
		44	5220		19.50		19.50		19.50	19.50		22.50					
	802.11ac-VHT40 MCS0	38	5190		16.50		16.50	Not Required	16.50	16.50	Not Required	16.50	16.50	16.50	16.50	19.50	Not Required
		46	5230		18.50		18.50		18.50	18.50		21.50					
	802.11ac-VHT80 MCS0	42	5210		16.50		16.50	Not Required	16.50	16.50	Not Required	16.50	16.50	16.50	16.50	19.50	Not Required
	802.11ax-HE20 MCS0	36	5180		17.50		17.50		17.50	17.50		20.50					
		40	5200		19.50		19.50		19.50	19.50		22.50					
		44	5220		19.50		19.50		19.50	19.50		22.50					
	802.11ax-HE40 MCS0	48	5240		19.50		19.50		19.50	19.50		22.50					
		38	5190		16.50		16.50		16.50	16.50		19.50					
		46	5230		18.50		18.50		18.50	18.50		21.50					
	802.11ax-HE80 MCS0	42	5210		16.50		16.50		16.50	16.50		19.50					



<5.3GHz WLAN_NonDBS >																					
				Ant 0			Ant 1			Ant 0+1 (0)		Ant 0+1 (1)		Ant 0+1							
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %						
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	Not Required	Not Required	Not Required	Not Required	19.50	19.50	19.30	19.50	19.20	19.50	22.26	22.50					
		56	5280						19.50	19.50	19.30	19.50	19.10	19.50	22.21	22.50					
		60	5300						19.50	19.50	19.30	19.50	19.10	19.50	22.21	22.50					
		64	5320						18.00	18.00	17.70	18.00	17.80	18.00	20.76	21.00					
	802.11n-HT20 MCS0	52	5260						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		56	5280						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		60	5300						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
	802.11n-HT40 MCS0	54	5270						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		62	5310						17.50	17.50	17.50	17.50	17.30	17.50	20.41	20.50					
	802.11ac-VHT20 MCS0	52	5260						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		56	5280						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		60	5300						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
	802.11ac-VHT40 MCS0	54	5270						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		62	5310						18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	21.00	21.00
	802.11ac-VHT80 MCS0	58	5290						14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	17.50	17.50
	802.11ac-VHT160 MCS0	50	5250						14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	17.50	17.50
	802.11ax-HE20 MCS0	52	5260						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		56	5280						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		60	5300						19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50
		64	5320						18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	21.00	21.00
802.11ax-HE40 MCS0	54	5270	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	19.50	22.50	22.50						
	62	5310	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	18.00	21.00	21.00						
802.11ax-HE80 MCS0	58	5290	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	17.50	17.50						
802.11ax-HE160 MCS0	50	5250	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	17.50	17.50						



<5.5GHz WLAN_NonDBS >																	
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 0			Ant 1			Ant 0+1 (0)		Ant 0+1 (1)		Ant 0+1			
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.5GHz WLAN	802.11a 6Mbps	100	5500	Not Required	19.00	Not Required	Not Required	19.00	Not Required	Not Required	19.00	19.00	19.00	22.00	Not Required	Not Required	Not Required
		116	5580		20.00			20.00			20.00	23.00					
		124	5620		20.00			20.00			20.00	23.00					
		132	5660		20.00			20.00			20.00	23.00					
		144	5720		20.00			20.00			20.00	23.00					
	802.11n-HT20 MCS0	100	5500		18.50			18.50			18.50	21.50					
		116	5580		19.00			19.00			19.00	22.00					
		124	5620		19.00			19.00			19.00	22.00					
		132	5660		19.00			19.00			19.00	22.00					
		144	5720		19.00			19.00			19.00	22.00					
	802.11n-HT40 MCS0	102	5510		16.50			16.50			16.50	19.50					
		110	5550		19.50			19.50			19.50	22.50					
		126	5630		19.50			19.50			19.50	22.50					
		134	5670		19.50			19.50			19.50	22.50					
		142	5710		19.50			19.50			19.50	22.50					
	802.11ac-VHT20 MCS0	100	5500		18.50			18.50			18.50	21.50					
		116	5580		19.50			19.50			19.50	22.50					
		124	5620		19.50			19.50			19.50	22.50					
		132	5660		19.50			19.50			19.50	22.50					
		144	5720		19.50			19.50			19.50	22.50					
	802.11ac-VHT40 MCS0	102	5510		16.50			16.50			16.50	19.50					
		110	5550		19.50			19.50			19.50	22.50					
		126	5630		19.50			19.50			19.50	22.50					
		134	5670		19.50			19.50			19.50	22.50					
		142	5710		19.50			19.50			19.50	22.50					
	802.11ac-VHT80 MCS0	106	5530		15.50			15.50			15.50	18.36					
		122	5610		19.50			19.50			19.50	21.83					
		138	5690		20.50			20.50			20.50	22.97					
	802.11ac-VHT160 MCS0	114	5570		17.50			17.50			17.50	20.50					
	802.11ax-HE20 MCS0	100	5500		18.50			18.50			18.50	21.50					
		116	5580		19.50			19.50			19.50	22.50					
		124	5620		19.50			19.50			19.50	22.50					
		132	5660		19.50			19.50			19.50	22.50					
		144	5720		19.50			19.50			19.50	22.50					
	802.11ax-HE40 MCS0	102	5510		16.50			16.50			16.50	19.50					
		110	5550		19.50			19.50			19.50	22.50					
		126	5630		19.50			19.50			19.50	22.50					
		134	5670		19.50			19.50			19.50	22.50					
		142	5710		19.50			19.50			19.50	22.50					
	802.11ax-HE80 MCS0	106	5530		15.50			15.50			15.50	18.50					
		122	5610		19.50			19.50			19.50	22.50					
		138	5690		20.50			20.50			20.50	23.50					
	802.11ax-HE160 MCS0	114	5570		17.50			17.50			17.50	20.50					



<5.8GHz WLAN_NonDBS >																					
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 0			Ant 1			Ant 0+1 (0)		Ant 0+1 (1)		Ant 0+1							
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %					
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	21.50	Not Required	Not Required	Not Required	21.50	Not Required	Not Required	21.50	Not Required	21.50	Not Required	24.50	Not Required				
		157	5785		21.50													21.50	21.50	21.50	24.50
		165	5825		21.50													21.50	21.50	21.50	24.50
	802.11n-HT20 MCS0	149	5745		21.50													21.50	21.50	21.50	24.50
		157	5785		21.50													21.50	21.50	21.50	24.50
		165	5825		21.50													21.50	21.50	21.50	24.50
	802.11n-HT40 MCS0	151	5755		21.50													21.50	21.50	21.50	24.50
		159	5795		21.50													21.50	21.50	21.50	24.50
	802.11ac-VHT20 MCS0	149	5745		21.50													21.50	21.50	21.50	24.50
		157	5785		21.50													21.50	21.50	21.50	24.50
		165	5825		21.50													21.50	21.50	21.50	24.50
	802.11ac-VHT40 MCS0	151	5755		21.50													21.50	21.50	21.50	24.50
		159	5795		21.50													21.50	21.50	21.50	24.50
	802.11ac-VHT80 MCS0	155	5775		21.50													21.50	21.50	21.50	24.50
	802.11ax-HE20 MCS0	149	5745		21.50													21.50	21.50	21.50	24.50
		157	5785		21.50													21.50	21.50	21.50	24.50
		165	5825		21.50													21.50	21.50	21.50	24.50
	802.11ax-HE40 MCS0	151	5755		21.50													21.50	21.50	21.50	24.50
159		5795	21.50	21.50	21.50	21.50	24.50														
802.11ax-HE80 MCS0	155	5775	21.50	21.50	21.50	21.50	24.50														

<WiFi 6E_Standard >																					
WiFi 6E	Mode	Channel	Frequency (MHz)	Ant 0			Ant 1			Ant 0+1 (0)		Ant 0+1 (1)		Ant 0+1							
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %					
WiFi 6E	802.11a 6Mbps	1	5955	Not Required	13.00	Not Required	Not Required	Not Required	13.00	Not Required	Not Required	13.00	Not Required	13.00	Not Required	16.00	Not Required				
		57	6235		13.00													13.00	13.00	13.00	16.00
		173	6815		13.00													13.00	13.00	13.00	16.00
	802.11ax-HE20 MCS0	1	5955		13.00													13.00	13.00	13.00	16.00
		57	6235		13.00													13.00	13.00	13.00	16.00
		173	6815		13.00													13.00	13.00	13.00	16.00
	802.11ax-HE40 MCS0	3	5965		13.00													13.00	13.00	13.00	16.00
		59	6245		13.00													13.00	13.00	13.00	16.00
		171	6805		13.00													13.00	13.00	13.00	16.00
	802.11ax-HE80 MCS0	7	5985		13.00													13.00	13.00	13.00	16.00
		71	6305		13.00													13.00	13.00	13.00	16.00
		167	6785		13.00													13.00	13.00	13.00	16.00
	802.11ax-HE160 MCS0	15	6025		13.00													13.00	13.00	13.00	16.00
		47	6185		13.00													13.00	13.00	13.00	16.00
		143	6665		13.00													13.00	13.00	13.00	16.00



<WiFi 6E>																					
				Ant 0			Ant 1			Ant 0+1 (0)		Ant 0+1 (1)		Ant 0+1							
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Duty Cycle %					
WiFi 6E	802.11a 6Mbps	1	5955	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	100.00					
		57	6235														0.50	0.50	0.50	0.50	3.50
		113	6515														0.50	0.50	0.50	0.50	3.50
		173	6815														1.00	1.00	1.00	1.00	4.00
		233	7115														1.00	1.00	1.00	1.00	4.00
	802.11ax-HE20 MCS0	1	5955														4.50	4.50	4.50	4.50	7.50
		57	6235														4.50	4.50	4.50	4.50	7.50
		113	6515														4.50	4.50	4.50	4.50	7.50
		173	6815														4.00	4.00	4.00	4.00	7.00
		233	7115														4.00	4.00	4.00	4.00	7.00
	802.11ax-HE40 MCS0	3	5965														6.00	6.00	6.00	6.00	9.00
		59	6245														6.00	6.00	6.00	6.00	9.00
		107	6485														7.00	7.00	7.00	7.00	10.00
		171	6805														6.50	6.50	6.50	6.50	9.50
		227	7085														6.00	6.00	6.00	6.00	9.00
	802.11ax-HE80 MCS0	7	5985														9.00	9.00	9.00	9.00	12.00
		71	6305														8.50	8.50	8.50	8.50	11.50
		119	6545														9.00	9.00	9.00	9.00	12.00
		167	6785														9.00	9.00	9.00	9.00	12.00
		215	7025														8.50	8.50	8.50	8.50	11.50
802.11ax-HE160 MCS0	15	6025	11.50	11.50	11.50	11.50	14.50														
	47	6185	11.50	11.50	11.50	11.50	14.50														
	111	6505	12.00	12.00	12.00	12.00	15.00														
	143	6665	12.00	12.00	12.00	12.00	15.00														
	207	6985	12.00	12.00	12.00	12.00	15.00														




<2.4GHz Bluetooth>

<Bluetooth>										
				Ant 0						
Bluetooth	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
	BR / EDR 1Mbps	0	2402	7.37	Not Required	7.50	76.80			
		39	2441	7.06		7.50				
		78	2480	7.00		7.50				
	BR / EDR 2Mbps	0	2402			5.00	Not Required			
		39	2441			5.00				
		78	2480			5.00				
	BR / EDR 3Mbps	0	2402			5.00		Not Required		
		39	2441			5.00				
		78	2480			5.00				
	LE 1Mbps	0	2402			7.50			Not Required	
		19	2440			7.50				
		39	2480			7.50				
	LE 2Mbps	0	2402			7.50				Not Required
		19	2440			7.50				
39		2480		7.50						

General Note:

- For 2.4GHz Bluetooth SAR testing was selected BR/EDR 1Mbps due to its highest average power and duty cycle is 76.80% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

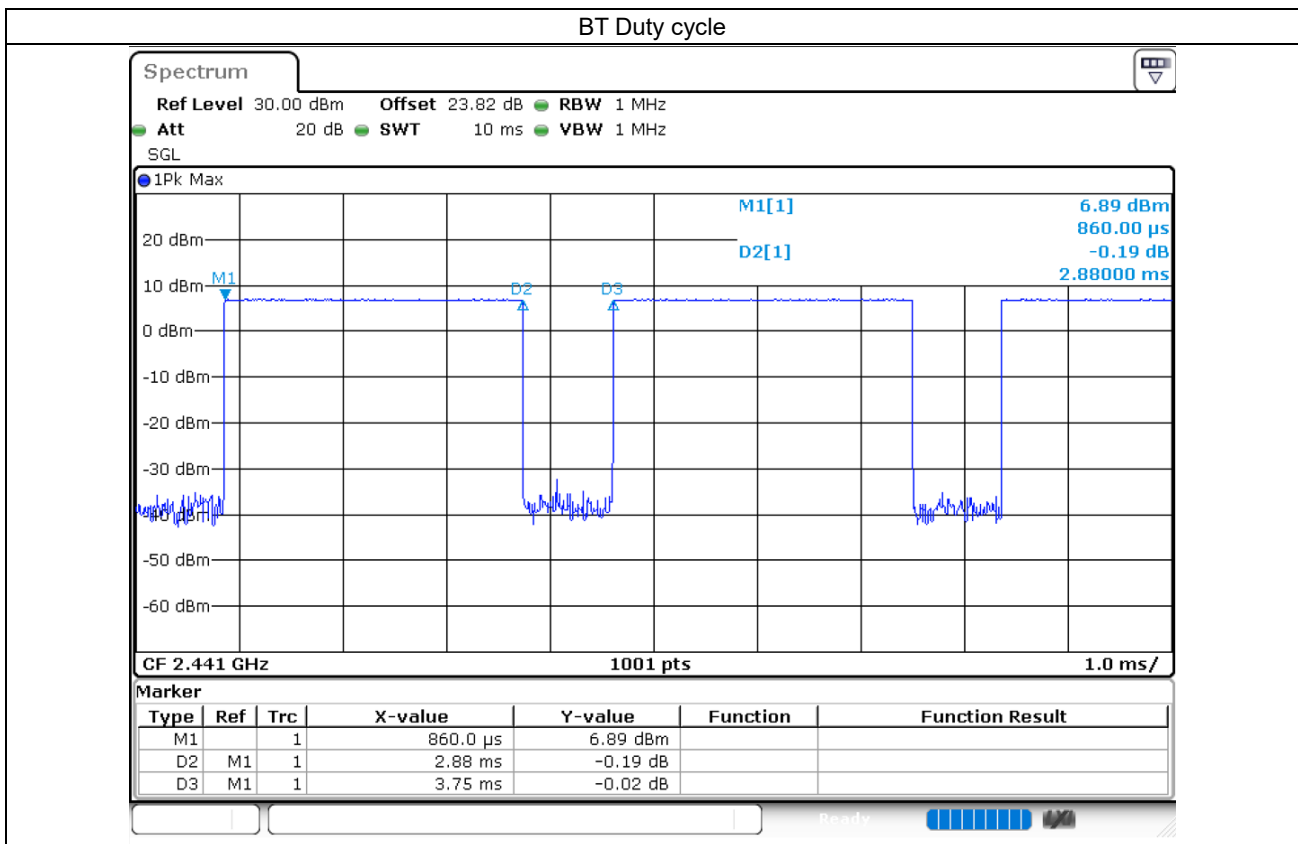

11. Antenna Location





12. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. Additional 2.4GHz SISO ant 1 just perform Sim-Tx analysis.
6. The RF Exposure was performed MIMO mode due to SISO mode in each china output power is equal to MIMO mode per chain output power, For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

WLAN PD Note:

1. The WiFi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
2. First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and using highest SAR test configurations evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method (2 mm closest meas. plane).
3. Per Interim Procedures. The power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor
4. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. The WiFi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report section 13
6. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
7. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
8. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
9. The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and $\lambda/5$. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1 dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

NFC Note:

1. NFC mainly operate in hand-held extremity exposure conditions, therefore Standalone 10-g extremity SAR testing is required.
2. NFC SAR is measured for all surface edges of the device with a transmitting antenna located within 25 mm.
3. NFC 13.56MHz antenna port is not available on the device to support conducted power measurement, therefore the measured results are referred to as reported SAR.
4. NFC SAR test tissue-simulating liquid parameter: refer to IEC/IEEE 62209-1528 2020.



12.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	Sample 1	Battery 1	-	6	2437	21.98	22.00	1.005	97.91	1.021	-0.06	0.223	0.229
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1	Sample 1	Battery 1	-	6	2437	21.98	22.00	1.005	97.91	1.021	0.09	0.185	0.190
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 1	Sample 1	Battery 1	-	6	2437	21.98	22.00	1.005	97.91	1.021	0.11	0.202	0.207
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 1	Sample 1	Battery 1	-	6	2437	21.98	22.00	1.005	97.91	1.021	-0.11	0.128	0.131
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 1	Sample 1	Battery 1	-	6	2437	21.98	22.00	1.005	97.91	1.021	-0.09	0.052	0.053
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	Sample 1	Battery 1	Wrist Mount	6	2437	21.98	22.00	1.005	97.91	1.021	0	0.212	0.217
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Sample 1	Battery 1	Wrist Mount	6	2437	21.98	22.00	1.005	97.91	1.021	-0.11	0.152	0.156
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Sample 1	Battery 1	Hip Mount 1	6	2437	21.98	22.00	1.005	97.91	1.021	0	0.112	0.115
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	Sample 2	Battery 1	-	6	2437	21.98	22.00	1.005	97.91	1.021	-0.13	0.207	0.212
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	Sample 1	Battery 2	-	6	2437	21.98	22.00	1.005	97.91	1.021	0.01	0.210	0.215
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 0+1(0)	Sample 1	Battery 1	-	6	2437	21.78	22.00	1.052	97.91	1.021	-0.19	0.436	0.468
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 0+1(0)	Sample 1	Battery 1	-	6	2437	21.78	22.00	1.052	97.91	1.021	-0.07	0.407	0.437
01	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 0+1(0)	Sample 1	Battery 1	-	6	2437	21.78	22.00	1.052	97.91	1.021	-0.08	0.455	0.489
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 0+1(0)	Sample 1	Battery 1	-	6	2437	21.78	22.00	1.052	97.91	1.021	0.02	0.225	0.242
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 0+1(0)	Sample 1	Battery 1	-	6	2437	21.78	22.00	1.052	97.91	1.021	-0.12	0.164	0.176
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 0+1(0)	Sample 1	Battery 1	Wrist Mount	6	2437	21.78	22.00	1.052	97.91	1.021	-0.17	0.406	0.436
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Sample 1	Battery 1	Wrist Mount	6	2437	21.78	22.00	1.052	97.91	1.021	0.04	0.391	0.420
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Sample 1	Battery 1	Hip Mount 1	6	2437	21.78	22.00	1.052	97.91	1.021	-0.04	0.357	0.383
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 0+1(0)	Sample 2	Battery 1	-	6	2437	21.78	22.00	1.052	97.91	1.021	0.02	0.308	0.331
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 0+1(0)	Sample 1	Battery 2	-	6	2437	21.78	22.00	1.052	97.91	1.021	-0.11	0.437	0.469
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	54	5270	19.10	19.50	1.096	97.2	1.029	0.07	0.350	0.395
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	54	5270	19.10	19.50	1.096	97.2	1.029	-0.17	0.776	0.876
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	54	5270	19.10	19.50	1.096	97.2	1.029	-0.14	0.268	0.302
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	54	5270	19.10	19.50	1.096	97.2	1.029	0.06	0.178	0.201
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	54	5270	19.10	19.50	1.096	97.2	1.029	0.1	0.450	0.508
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	54	5270	19.10	19.50	1.096	97.2	1.029	0.01	0.348	0.393
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	54	5270	19.10	19.50	1.096	97.2	1.029	-0.08	0.768	0.867
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Hip Mount 1	54	5270	19.10	19.50	1.096	97.2	1.029	0.05	0.198	0.223
02	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	54	5270	19.10	19.50	1.096	97.2	1.029	-0.14	0.987	1.114
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	52	5260	19.20	19.50	1.072	99.05	1.010	-0.11	0.933	1.010
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 0+1(1)	Sample 2	Battery 2	-	54	5270	19.10	19.50	1.096	97.2	1.029	-0.07	0.881	0.994
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	138	5690	19.70	20.50	1.202	100	1.000	0.03	0.359	0.432
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	138	5690	19.70	20.50	1.202	100	1.000	-0.01	0.559	0.672
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	138	5690	19.70	20.50	1.202	100	1.000	0.11	0.293	0.352
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	138	5690	19.70	20.50	1.202	100	1.000	0	0.326	0.392
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	138	5690	19.70	20.50	1.202	100	1.000	-0.1	0.436	0.524
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	138	5690	19.70	20.50	1.202	100	1.000	-0.13	0.323	0.388
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	138	5690	19.70	20.50	1.202	100	1.000	0.08	0.521	0.626
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Hip Mount 1	138	5690	19.70	20.50	1.202	100	1.000	0.05	0.290	0.349
03	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	138	5690	19.70	20.50	1.202	100	1.000	0.02	0.657	0.790
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 0+1(1)	Sample 2	Battery 2	-	138	5690	19.70	20.50	1.202	100	1.000	0.03	0.627	0.754
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	155	5775	21.10	21.50	1.096	100	1.000	-0.07	0.505	0.554
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	155	5775	21.10	21.50	1.096	100	1.000	-0.1	0.419	0.459
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	155	5775	21.10	21.50	1.096	100	1.000	0.08	0.287	0.315
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	155	5775	21.10	21.50	1.096	100	1.000	-0.11	0.292	0.320
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	155	5775	21.10	21.50	1.096	100	1.000	-0.05	0.729	0.799
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	155	5775	21.10	21.50	1.096	100	1.000	0.02	0.483	0.530
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	155	5775	21.10	21.50	1.096	100	1.000	0.09	0.402	0.441
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Hip Mount 1	155	5775	21.10	21.50	1.096	100	1.000	-0.04	0.385	0.422
04	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	155	5775	21.10	21.50	1.096	100	1.000	-0.04	0.896	0.982
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	10mm	Ant 0+1(0)	Sample 2	Battery 1	-	151	5755	21.00	21.50	1.122	100	1.000	0.06	0.800	0.898
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 2	-	155	5775	21.10	21.50	1.096	100	1.000	-0.01	0.801	0.878



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m ²)	Reported APD (W/m ²)
	WLAN6GHz	802.11ax-HE160 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	47	6185	12.50	13.00	1.122	99.08	1.009	-0.19	0.090	0.102	0.788	0.892
	WLAN6GHz	802.11ax-HE160 MCS0	Back	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	47	6185	12.50	13.00	1.122	99.08	1.009	-0.14	0.093	0.105	0.811	0.918
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	47	6185	12.50	13.00	1.122	99.08	1.009	0.08	0.102	0.115	0.878	0.994
	WLAN6GHz	802.11ax-HE160 MCS0	Top Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	47	6185	12.50	13.00	1.122	99.08	1.009	0.06	0.038	0.043	0.247	0.280
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	-	47	6185	12.50	13.00	1.122	99.08	1.009	-0.13	0.191	0.216	1.590	1.800
	WLAN6GHz	802.11ax-HE160 MCS0	Front	10mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	47	6185	12.50	13.00	1.122	99.08	1.009	0.09	0.080	0.091	0.878	0.994
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Wrist Mount	47	6185	12.50	13.00	1.122	99.08	1.009	-0.02	0.086	0.097	0.923	1.045
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	Hip Mount 1	47	6185	12.50	13.00	1.122	99.08	1.009	-0.1	0.037	0.042	0.270	0.306
05	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	47	6185	12.50	13.00	1.122	99.08	1.009	-0.03	0.192	0.217	1.690	1.913
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	15	6025	12.50	13.00	1.122	99.08	1.009	-0.06	0.154	0.174	1.390	1.574
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	111	6505	11.50	12.00	1.122	99.08	1.009	-0.11	0.126	0.143	1.590	1.800
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	143	6665	12.20	13.00	1.202	99.08	1.009	-0.03	0.170	0.206	1.260	1.528
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	-	207	6985	11.30	12.00	1.175	99.08	1.009	-0.19	0.142	0.168	1.140	1.351
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 2	-	47	6185	12.50	13.00	1.122	99.08	1.009	0.02	0.178	0.202	1.500	1.698

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Accessory	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 0	Sample 1	Battery 1	-	0	2402	7.37	7.50	1.030	76.8	1.085	-0.09	0.001	0.001
	Bluetooth	1Mbps	Back	10mm	Ant 0	Sample 1	Battery 1	-	0	2402	7.37	7.50	1.030	76.8	1.085	-0.07	0.002	0.002
	Bluetooth	1Mbps	Right Side	10mm	Ant 0	Sample 1	Battery 1	-	0	2402	7.37	7.50	1.030	76.8	1.085	-0.04	0.001	0.001
	Bluetooth	1Mbps	Top Side	10mm	Ant 0	Sample 1	Battery 1	-	0	2402	7.37	7.50	1.030	76.8	1.085	-0.03	0.001	0.001
	Bluetooth	1Mbps	Bottom Side	10mm	Ant 0	Sample 1	Battery 1	-	0	2402	7.37	7.50	1.030	76.8	1.085	-0.1	0.001	0.001
	Bluetooth	1Mbps	Front	10mm	Ant 0	Sample 1	Battery 1	Wrist Mount	0	2402	7.37	7.50	1.030	76.8	1.085	-0.08	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 0	Sample 1	Battery 1	Wrist Mount	0	2402	7.37	7.50	1.030	76.8	1.085	-0.09	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 0	Sample 1	Battery 1	Hip Mount 1	0	2402	7.37	7.50	1.030	76.8	1.085	-0.15	0.001	0.001
06	Bluetooth	1Mbps	Back	10mm	Ant 0	Sample 2	Battery 1	-	0	2402	7.37	7.50	1.030	76.8	1.085	-0.07	0.008	0.009
	Bluetooth	1Mbps	Back	10mm	Ant 0	Sample 1	Battery 2	-	0	2402	7.37	7.50	1.030	76.8	1.085	-0.17	0.001	0.001



12.2 Extremity SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Measured APD (W/m ²)	Reported APD (W/m ²)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Sample 1	Battery 1	6	2437	21.98	22.00	1.005	97.91	1.021	-0.03	0.590	0.605		
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Sample 1	Battery 1	6	2437	21.98	22.00	1.005	97.91	1.021	0.08	0.326	0.334		
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 1	Sample 1	Battery 1	6	2437	21.98	22.00	1.005	97.91	1.021	-0.06	0.634	0.650		
	WLAN2.4GHz	802.11b 1Mbps	Top Side	0mm	Ant 1	Sample 1	Battery 1	6	2437	21.98	22.00	1.005	97.91	1.021	-0.08	0.264	0.271		
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 1	Sample 1	Battery 1	6	2437	21.98	22.00	1.005	97.91	1.021	-0.16	0.069	0.071		
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 1	Sample 2	Battery 1	6	2437	21.98	22.00	1.005	97.91	1.021	-0.11	0.285	0.292		
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 1	Sample 1	Battery 2	6	2437	21.98	22.00	1.005	97.91	1.021	-0.16	0.612	0.628		
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 0+1(0)	Sample 1	Battery 1	6	2437	21.78	22.00	1.052	97.91	1.021	0.06	0.771	0.828		
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Sample 1	Battery 1	6	2437	21.78	22.00	1.052	97.91	1.021	0.03	0.910	0.977		
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 0+1(0)	Sample 1	Battery 1	6	2437	21.78	22.00	1.052	97.91	1.021	-0.1	0.631	0.678		
	WLAN2.4GHz	802.11b 1Mbps	Top Side	0mm	Ant 0+1(0)	Sample 1	Battery 1	6	2437	21.78	22.00	1.052	97.91	1.021	0.01	0.424	0.455		
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Ant 0+1(0)	Sample 1	Battery 1	6	2437	21.78	22.00	1.052	97.91	1.021	0.09	0.368	0.395		
07	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Sample 2	Battery 1	6	2437	21.78	22.00	1.052	97.91	1.021	-0.14	1.180	1.267		
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 0+1(0)	Sample 2	Battery 2	6	2437	21.78	22.00	1.052	97.91	1.021	0.08	1.000	1.074		
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 0+1(1)	Sample 1	Battery 1	54	5270	19.10	19.50	1.096	97.2	1.029	0.06	0.570	0.643		
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	54	5270	19.10	19.50	1.096	97.2	1.029	-0.02	1.728	1.950		
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	54	5270	19.10	19.50	1.096	97.2	1.029	0	0.243	0.274		
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	54	5270	19.10	19.50	1.096	97.2	1.029	0	0.235	0.265		
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	54	5270	19.10	19.50	1.096	97.2	1.029	-0.16	0.773	0.872		
08	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(1)	Sample 2	Battery 1	54	5270	19.10	19.50	1.096	97.2	1.029	-0.04	1.990	2.245		
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 0+1(1)	Sample 2	Battery 1	52	5260	19.20	19.50	1.072	97.2	1.029	-0.04	1.910	2.106		
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 0+1(1)	Sample 2	Battery 2	54	5270	19.10	19.50	1.096	97.2	1.029	0.09	1.713	1.933		
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 0+1(1)	Sample 1	Battery 1	138	5690	19.70	20.50	1.202	100	1.000	-0.03	0.642	0.772		
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	138	5690	19.70	20.50	1.202	100	1.000	-0.16	1.030	1.238		
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	138	5690	19.70	20.50	1.202	100	1.000	-0.18	0.192	0.231		
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	138	5690	19.70	20.50	1.202	100	1.000	-0.05	0.461	0.554		
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	138	5690	19.70	20.50	1.202	100	1.000	-0.02	0.619	0.744		
09	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 2	Battery 1	138	5690	19.70	20.50	1.202	100	1.000	0.01	1.340	1.611		
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 2	Battery 2	138	5690	19.70	20.50	1.202	100	1.000	0.08	1.220	1.467		
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 0+1(1)	Sample 1	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	0	0.996	1.092		
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	-0.16	0.793	0.870		
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	-0.09	0.224	0.246		
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	0.04	0.466	0.511		
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	0.09	1.100	1.206		
10	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	-0.01	1.340	1.469		
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 2	155	5775	21.10	21.50	1.096	100	1.000	-0.09	1.250	1.371		
	WLAN6GHz	802.11ax-HE160 MCS0	Front	0mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	99.08	1.009	-0.01	0.245	0.277	5.660	6.408
	WLAN6GHz	802.11ax-HE160 MCS0	Back	0mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	99.08	1.009	0.06	0.160	0.181	3.690	4.178
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	99.08	1.009	0.02	0.071	0.080	1.640	1.857
	WLAN6GHz	802.11ax-HE160 MCS0	Top Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	99.08	1.009	0.06	0.014	0.016	0.323	0.366
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	99.08	1.009	-0.01	0.252	0.285	6.740	7.630
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 1	47	6185	12.50	13.00	1.122	99.08	1.009	0.07	0.255	0.289	6.900	7.812
11	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 1	15	6025	12.50	13.00	1.122	99.08	1.009	-0.05	0.303	0.343	7.000	7.925
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 1	111	6505	11.50	12.00	1.122	99.08	1.009	0.11	0.233	0.264	5.380	6.091
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 1	143	6665	12.50	13.00	1.122	99.08	1.009	0.11	0.276	0.312	6.370	7.212
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 1	207	6985	11.30	12.00	1.175	99.08	1.009	0.09	0.206	0.244	4.750	5.631
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Ant 0+1(1)	Sample 2	Battery 2	15	6025	12.50	13.00	1.122	99.08	1.009	-0.14	0.281	0.318	6.680	7.563

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	1Mbps	Front	0mm	Ant 0	Sample 1	Battery 1	0	2402	7.37	7.50	1.030	76.8	1.085	-0.08	0.001	0.001
12	Bluetooth	1Mbps	Back	0mm	Ant 0	Sample 1	Battery 1	0	2402	7.37	7.50	1.030	76.8	1.085	-0.13	0.026	0.029
	Bluetooth	1Mbps	Right Side	0mm	Ant 0	Sample 1	Battery 1	0	2402	7.37	7.50	1.030	76.8	1.085	-0.17	0.001	0.001
	Bluetooth	1Mbps	Top Side	0mm	Ant 0	Sample 1	Battery 1	0	2402	7.37	7.50	1.030	76.8	1.085	-0.14	0.001	0.001
	Bluetooth	1Mbps	Bottom Side	0mm	Ant 0	Sample 1	Battery 1	0	2402	7.37	7.50	1.030	76.8	1.085	0.03	0.001	0.001
	Bluetooth	1Mbps	Back	0mm	Ant 0	Sample 2	Battery 1	0	2402	7.37	7.50	1.030	76.8	1.085	0.07	0.024	0.027
	Bluetooth	1Mbps	Back	0mm	Ant 0	Sample 1	Battery 2	0	2402	7.37	7.50	1.030	76.8	1.085	-0.09	0.001	0.001

<NFC SAR>

Plot No.	Band	Test Position	Gap (mm)	Sample	Battery	Freq. (MHz)	Power Drift (dB)	Measured 10g SAR (W/kg)
13	NFC	Front	0mm	Sample 1	Battery 1	13.56	0.07	< 0.001
	NFC	Back	0mm	Sample 1	Battery 1	13.56	0.19	< 0.001
	NFC	Right Side	0mm	Sample 1	Battery 1	13.56	0	< 0.001
	NFC	Top Side	0mm	Sample 1	Battery 1	13.56	-0.15	< 0.001
	NFC	Bottom Side	0mm	Sample 1	Battery 1	13.56	0.03	< 0.001
	NFC	Front	0mm	Sample 2	Battery 1	13.56	-0.06	< 0.001
	NFC	Front	0mm	Sample 1	Battery 2	13.56	-0.14	< 0.001

12.3 6GHz PD SAR Result

Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Grid Step (λ)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m ²)	Total psPD (W/m ²)
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 1	Battery 1	15	6025	12.50	0.0625	2.92	-0.98098234	3.190	3.400
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 1	Battery 1	15	6025	12.50	0.25	3.66		1.760	1.870
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 1	Battery 1	207	6985	12.30	0.0625	3.24	-0.71518353	3.010	3.370
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	8.59mm	Ant 0+1(1)	Sample 1	Battery 1	207	6985	12.30	0.25	3.82		1.300	1.800

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (λ)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)
	WLAN6GHz	802.11ax-HE160 MCS0	Front	2mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	0.19	2.700	4.706	2.990	5.212
	WLAN6GHz	802.11ax-HE160 MCS0	Back	2mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	0.19	1.890	3.294	2.050	3.573
	WLAN6GHz	802.11ax-HE160 MCS0	Right Side	2mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	-0.02	0.840	1.464	0.910	1.586
	WLAN6GHz	802.11ax-HE160 MCS0	Top Side	2mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	0.19	0.160	0.279	0.180	0.314
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 1	Battery 1	47	6185	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	-0.14	3.000	5.229	3.230	5.630
01	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 2	Battery 1	47	6185	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	0.08	3.840	6.693	4.150	7.234
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 2	Battery 1	15	6025	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	0	3.190	5.560	3.400	5.926
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 2	Battery 1	111	6505	11.50	12.00	1.122	100.00	1.000	0.0625	1.5535	0.05	1.480	2.580	2.280	3.974
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 2	Battery 1	143	6665	12.20	13.00	1.202	100.00	1.000	0.0625	1.5535	-0.02	3.120	5.827	3.800	7.097
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 2	Battery 1	207	6985	11.30	12.00	1.175	100.00	1.000	0.0625	1.5535	0.08	1.780	3.249	2.390	4.362
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Ant 0+1(1)	Sample 2	Battery 2	47	6185	12.50	13.00	1.122	100.00	1.000	0.0625	1.5535	0.01	3.010	5.247	3.370	5.874

12.4 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 0+1(1)	Sample 2	Battery 1	54	5270	19.10	19.50	1.096	97.2	1.029	-0.14	0.952	-	1.074
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	-0.04	0.896	1.06	0.982
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	10mm	Ant 0+1(1)	Sample 2	Battery 1	155	5775	21.10	21.50	1.096	100	1.000	0.05	0.882	-	0.967
2nd	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	10mm	Ant 0+1(0)	Sample 2	Battery 1	151	5755	21.00	21.50	1.122	100	1.000	0.06	0.800	1.10	0.898

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body	Extremity
1.	WLAN5/6GHz Ant 0+1 + Bluetooth Ant 0	Yes	Yes
2.	WLAN2.4GHz Ant 1 + WLAN5/6GHz Ant 0+1 + Bluetooth Ant 0	Yes	Yes
3.	WLAN2.4GHz Ant 0+1 + WLAN5/6GHz Ant 0+1	Yes	Yes

General Note:

- The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg. Scalar SAR summation < 1.6W/kg for 1g SAR, < 4.0W/kg for 10g SAR.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

13.1 Body Exposure Conditions

Exposure Position	1	2	3	4	3+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	2+3 Summed 1g SAR (W/kg)
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 0+1 10g SAR (W/kg)	WLAN5/6GHz Ant 0+1 1g SAR (W/kg)	Bluetooth Ant 0 1g SAR (W/kg)			
Front	0.229	0.468	0.554	0.001	0.555	0.784	1.022
Back	0.190	0.437	1.114	0.009	1.123	1.313	1.551
Right Side	0.207	0.489	0.352	0.001	0.353	0.560	0.841
Top Side	0.131	0.242	0.392	0.001	0.393	0.524	0.634
Bottom Side	0.053	0.176	0.982	0.001	0.983	1.036	1.158

13.2 Extremity Exposure Conditions

Exposure Position	1	2	3	4	5	3+4+5 Summed 10g SAR (W/kg)	1+3+4+5 Summed 10g SAR (W/kg)	2+3+5 Summed 10g SAR (W/kg)
	WLAN2.4GHz Ant 1 10g SAR (W/kg)	WLAN2.4GHz Ant 0+1 10g SAR (W/kg)	WLAN5/6GHz Ant 0+1 10g SAR (W/kg)	Bluetooth Ant 0 10g SAR (W/kg)	NFC 10g SAR (W/kg)			
Front	0.605	0.828	1.092	0.001	0.001	1.094	1.699	1.921
Back	0.334	1.267	2.245	0.029	0.001	2.275	2.609	3.513
Right Side	0.650	0.678	0.274	0.001	0.001	0.276	0.926	0.953
Top Side	0.271	0.455	0.554	0.001	0.001	0.556	0.827	1.010
Bottom Side	0.071	0.395	1.469	0.001	0.001	1.471	1.542	1.865

Test Engineer : Carter Jhuang, EN Liu and Dennis Hsieh



14. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg). Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.



Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(C1) 1g	(C1) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%

Applicable for Power Density Measurements:

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependance	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dep endent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68



15. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [10] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [11] SPEAG DASY6 System Handbook
- [12] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)