



FCC RADIO TEST REPORT

FCC ID : UZ7WT63B0
Equipment : WT6300 Wearable Computer
Brand Name : Zebra
Model Name : WT63B0
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on Aug. 12, 2020 and testing was started from Aug. 17, 2020 and completed on Sep. 17, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Reviewed by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	13
3 Test Result.....	14
3.1 Number of Channel Measurement	14
3.2 Hopping Channel Separation Measurement	16
3.3 Dwell Time Measurement.....	22
3.4 20dB and 99% Bandwidth Measurement	24
3.5 Output Power Measurement.....	35
3.6 Conducted Band Edges Measurement.....	37
3.7 Conducted Spurious Emission Measurement	44
3.8 Radiated Band Edges and Spurious Emission Measurement	54
3.9 AC Conducted Emission Measurement.....	59
3.10 Antenna Requirements.....	61
4 List of Measuring Equipment	62
5 Uncertainty of Evaluation.....	64
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR072944A	01	Initial issue of report	Sep. 29, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting only	-
3.5	15.247(b)(1)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 13.45 dB at 42.610 MHz
3.9	15.207	AC Conducted Emission	Pass	Under limit 5.66 dB at 13.560 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Amy Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	WT6300 Wearable Computer
Brand Name	Zebra
Model Name	WT63B0
FCC ID	UZ7WT63B0
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	EV2.5
SW Version	10-14-10.00-QC-U01-PRD-HEL-04
OS Version	Android 10
FW Version	FUSION_QA_2_1.3.0.006_Q
MFD	29JUL20
EUT Stage	Engineering Sample

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
AC Adapter 1	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
AC Adapter 2	Brand Name	Zebra	Part Number	PWR-WUA5V12W0WW
AC Adapter 3	Brand Name	Zebra	Part Number	PWR-BUA5V16W0WW
Battery 1	Brand Name	Zebra	Part Number	BT000262A01
Battery 2	Brand Name	Zebra	Part Number	BT-000262-50
Battery 3	Brand Name	Zebra	Part Number	BT-000362-00
AC Power Cable	Brand Name	Zebra	Part Number	50-16000-182R
DC Cable	Brand Name	Zebra	Part Number	CBL-DC-383A1-01
USB Cable	Brand Name	Zebra	Part Number	CBL-NGWT-USBCHG-01
Vibrating Cable	Brand Name	Zebra	Part Number	CBL-NGWT-HDVBAP-01
Audio Cable 1	Brand Name	Zebra	Part Number	CBL-HS2100-12S1-01
Audio Cable 2	Brand Name	Zebra	Part Number	CBL-HS3100-CUC1-01
Keyboard	Brand Name	Zebra	Part Number	KYPD-WT6XANFASM-01
Scanner 1	Brand Name	Zebra	Part Number	RS51B0-TBSNWR
Scanner 2	Brand Name	Zebra	Part Number	RS60B0-SRSTWR
Scanner 3	Brand Name	Zebra	Part Number	RS4000-HPCSWR
Scanner 4	Brand Name	Zebra	Part Number	RS5000-LCFSWR
Earphone 1	Brand Name	Zebra	Part Number	HS2100-OTH
Earphone 2	Brand Name	Zebra	Part Number	HS3100-OTH
Wrist Mount	Brand Name	Zebra	Part Number	SG-NGWT-WRMTS-01
Wrist Mount	Brand Name	Zebra	Part Number	SG-NGWT-WRMTL-01
Wrist Mount	Brand Name	Zebra	Part Number	SG-NGWT-WRMTXL-01
Hip Mount	Brand Name	Zebra	Part Number	SG-NGWT-HPMNT-01



1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 7.30 dBm (0.0054 W) Bluetooth EDR (2Mbps) : 8.98 dBm (0.0079 W) Bluetooth EDR (3Mbps) : 9.43 dBm (0.0088 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.844 MHz Bluetooth EDR (2Mbps) : 1.168 MHz Bluetooth EDR (3Mbps) : 1.152 MHz
Antenna Type / Gain	Patch Antenna type with gain 2.40 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH16-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Test Mode

Channel	Frequency	Bluetooth Average Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	6.47 dBm	6.43 dBm	6.34 dBm
Ch39	2441MHz	6.96 dBm	6.93 dBm	6.89 dBm
Ch78	2480MHz	6.63 dBm	6.62 dBm	6.51 dBm

Channel	Frequency	Bluetooth Average Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	6.16 dBm	5.98 dBm	5.85 dBm
Ch39	2441MHz	6.65 dBm	6.53 dBm	6.46 dBm
Ch78	2480MHz	6.26 dBm	7.14 dBm	6.07 dBm

Channel	Frequency	Bluetooth Average Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	6.18 dBm	5.99 dBm	5.87 dBm
Ch39	2441MHz	6.67 dBm	6.56 dBm	6.48 dBm
Ch78	2480MHz	6.31 dBm	6.17 dBm	6.08 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	6.68 dBm	6.63 dBm	6.61 dBm
Ch39	2441MHz	7.30 dBm	7.25 dBm	7.23 dBm
Ch78	2480MHz	6.92 dBm	6.88 dBm	6.85 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	8.49 dBm	8.47 dBm	8.46 dBm
Ch39	2441MHz	8.98 dBm	8.97 dBm	8.96 dBm
Ch78	2480MHz	8.56 dBm	8.55 dBm	8.53 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	8.81 dBm	8.72 dBm	8.71 dBm
Ch39	2441MHz	9.43 dBm	9.32 dBm	9.30 dBm
Ch78	2480MHz	8.90 dBm	8.86 dBm	8.84 dBm

Remark: The data rate was set in 3Mbps for all the test items due to the highest RF output power.

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.




The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + NFC On + Color Bar + Battery 1 + Scanner 1 + Earphone 1 + Audio Cable 1 + USB Cable (Data Link with Notebook) + AC Adapter 3		
Remark:			
<ol style="list-style-type: none"> For radiated test cases, the worst mode data rate 3Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 3Mbps, and no other significantly frequencies found in conducted spurious emission. For Radiated Test Cases, the tests were performed with Adapter 1, Battery 1. Data Link with Notebook means data application transferred mode between EUT and Notebook. 			

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

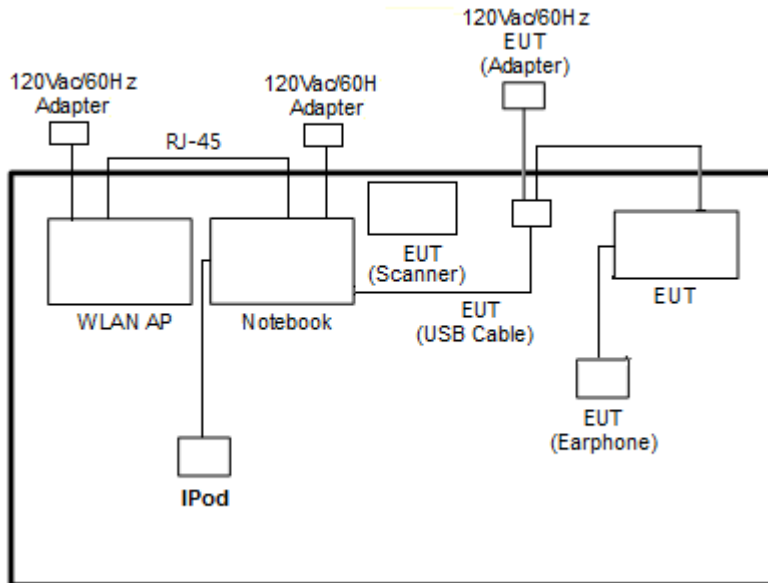

<Bluetooth Tx Mode>

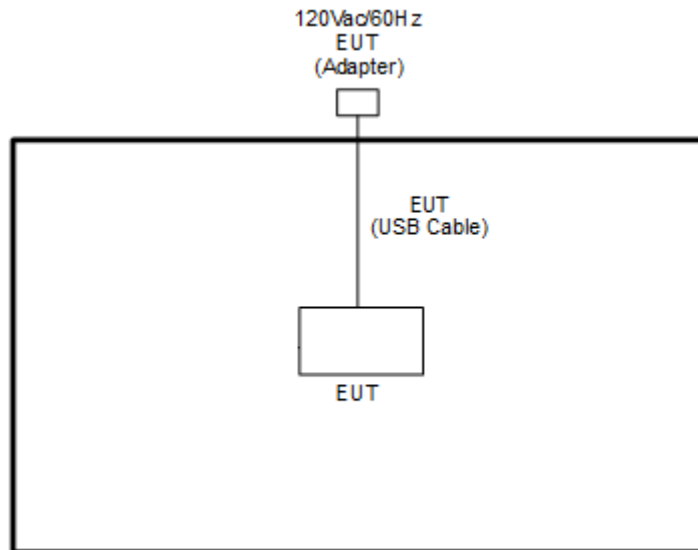



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT V4.0.00142.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

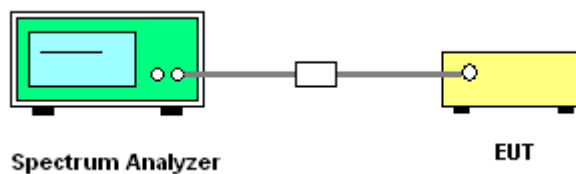




3.1.5 Test Result of Number of Hopping Frequency


Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

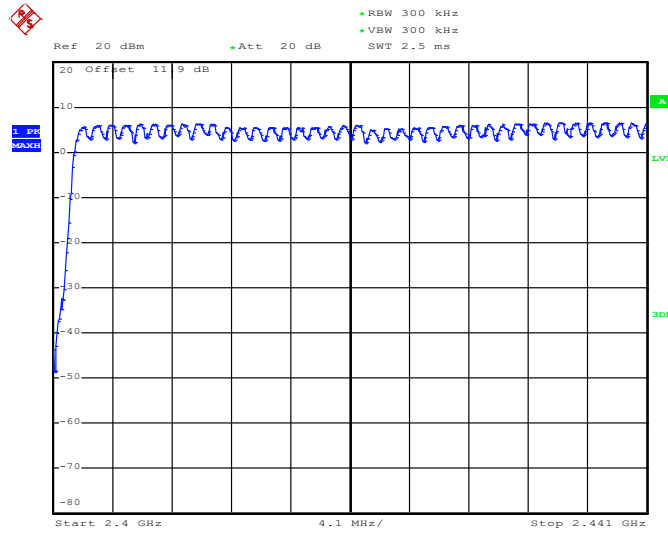

Date: 13.SEP.2020 15:54:58

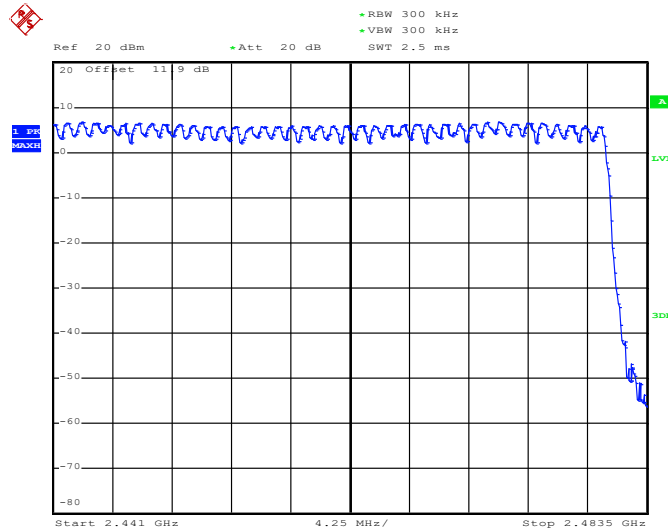

Date: 13.SEP.2020 15:56:24

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

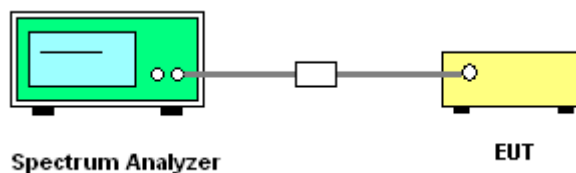




3.2.5 Test Result of Hopping Channel Separation

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.846	0.5973	Pass
DH	1Mbps	1	39	2441	1.014	0.5947	Pass
DH	1Mbps	1	78	2480	0.996	0.5493	Pass
2DH	2Mbps	1	0	2402	1.008	0.8400	Pass
2DH	2Mbps	1	39	2441	0.996	0.8440	Pass
2DH	2Mbps	1	78	2480	0.990	0.8400	Pass
3DH	3Mbps	1	0	2402	1.008	0.8200	Pass
3DH	3Mbps	1	39	2441	0.996	0.8240	Pass
3DH	3Mbps	1	78	2480	1.014	0.8200	Pass

<1Mbps>


Channel Separation Plot on Channel 00 - 01

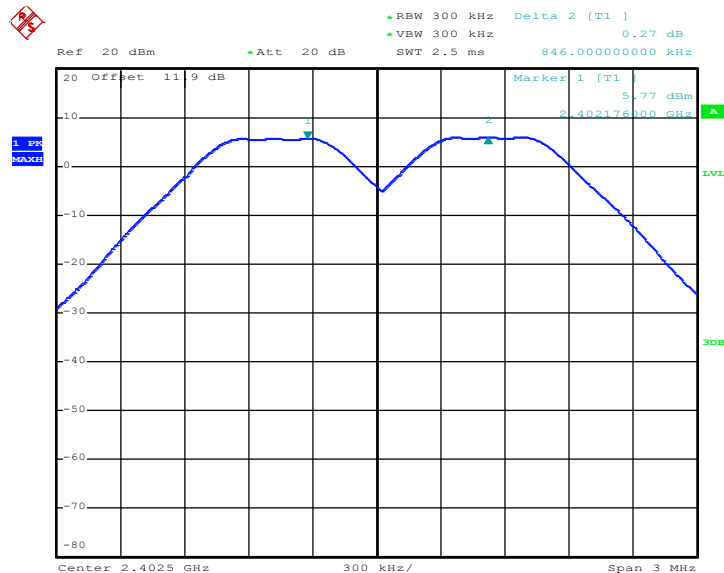

Date: 13.SEP.2020 13:58:59




Channel Separation Plot on Channel 39 - 40

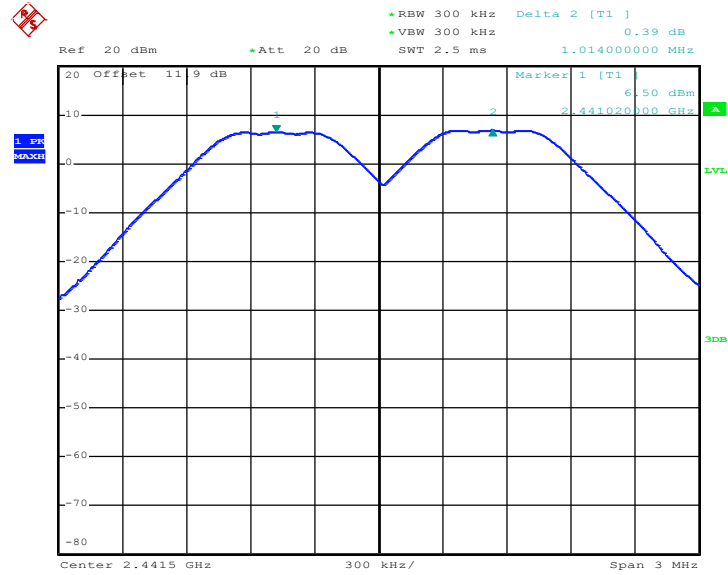

Date: 13.SEP.2020 14:00:54

Channel Separation Plot on Channel 77 - 78

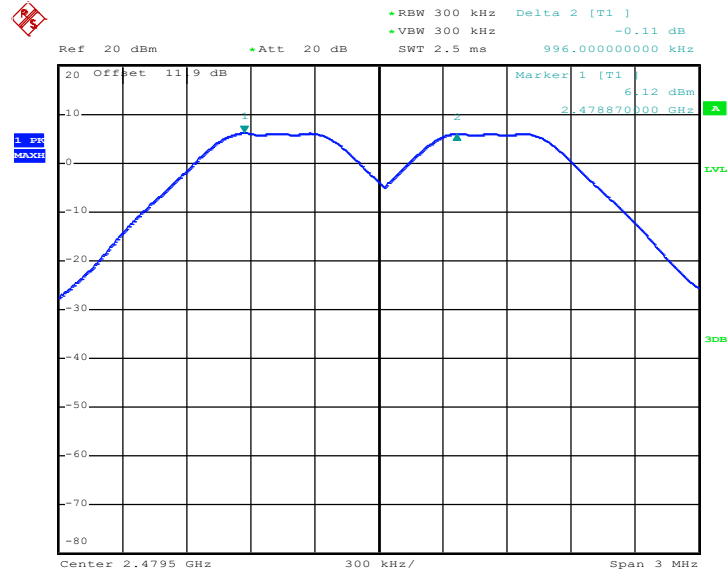


Date: 13.SEP.2020 14:02:18




<2Mbps>

Channel Separation Plot on Channel 00 - 01

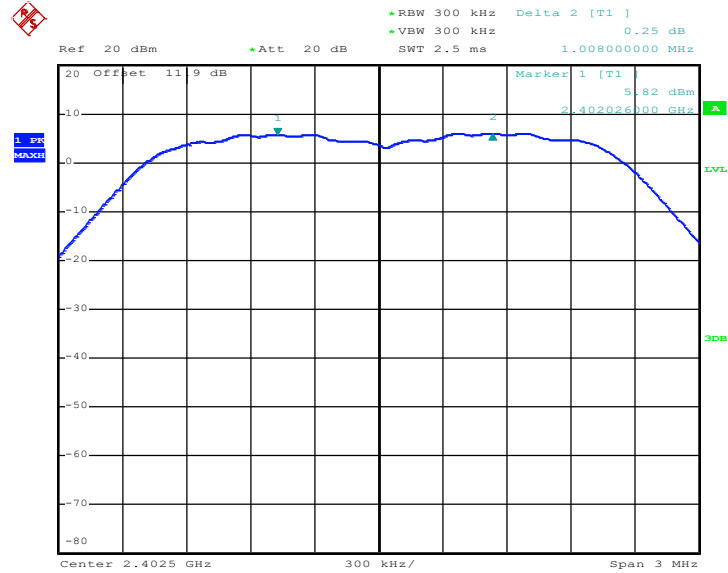

Date: 13.SEP.2020 14:50:27


Channel Separation Plot on Channel 39 - 40

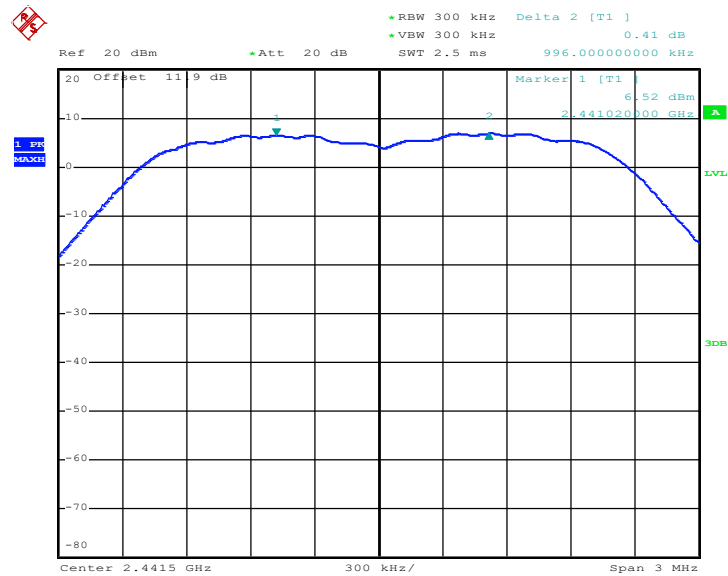

Date: 13.SEP.2020 14:51:53




Channel Separation Plot on Channel 77 - 78

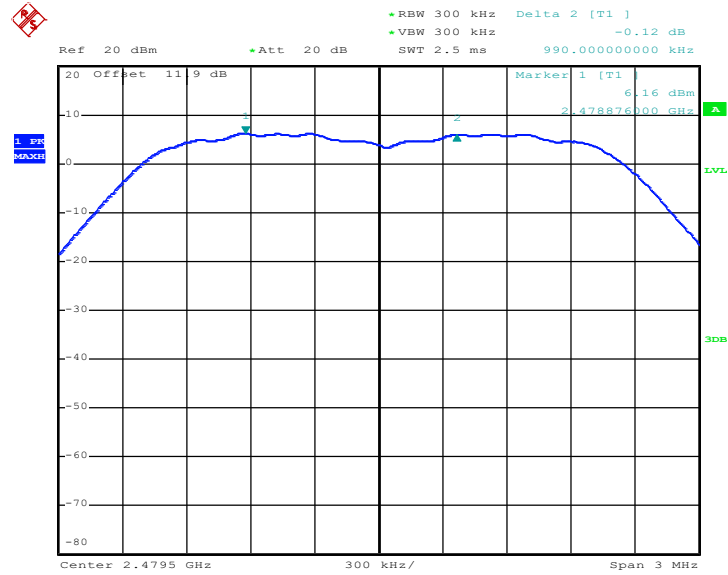

Date: 13.SEP.2020 14:54:47

<3Mbps>


Channel Separation Plot on Channel 00 - 01

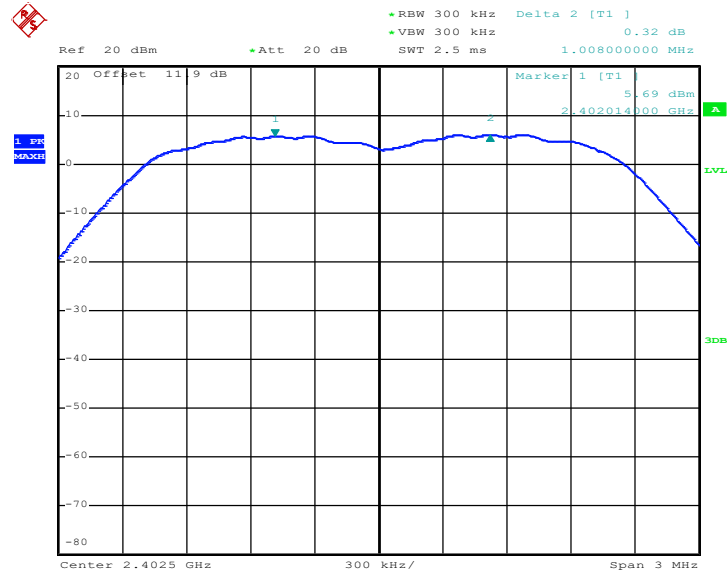

Date: 13.SEP.2020 15:45:00




Channel Separation Plot on Channel 39 - 40

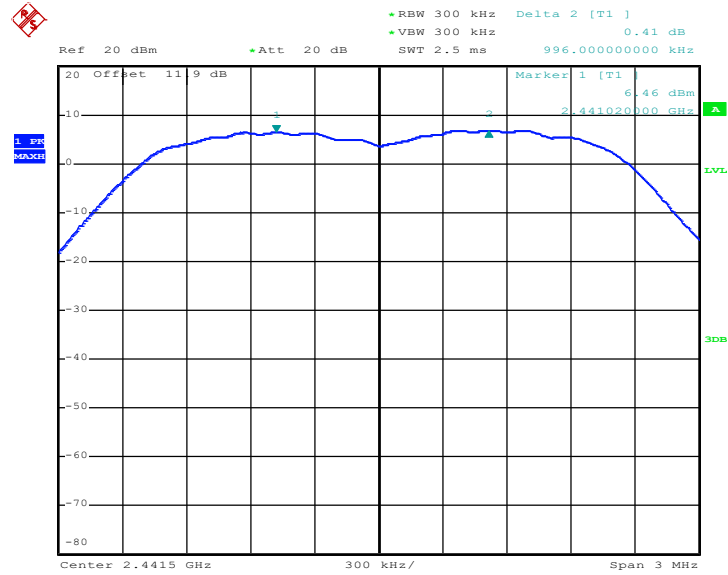

Date: 13.SEP.2020 15:47:06

Channel Separation Plot on Channel 77 - 78

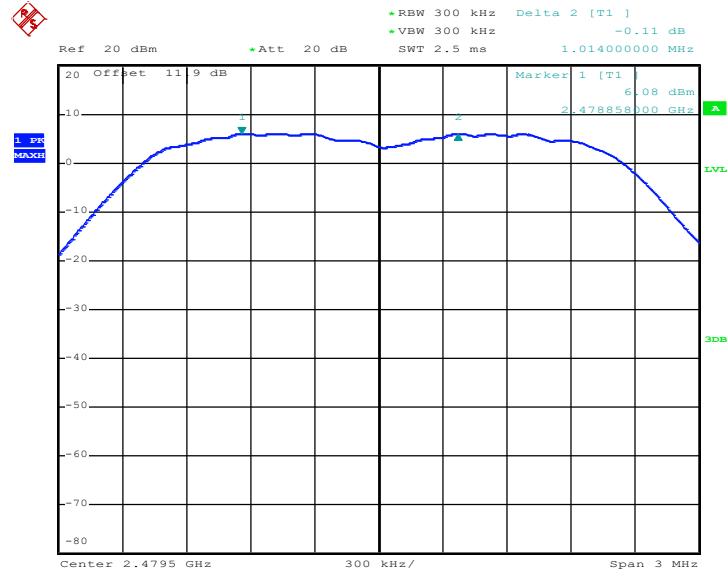

Date: 13.SEP.2020 15:49:42

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

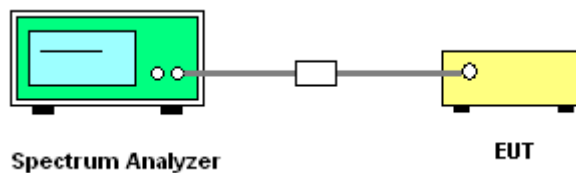




3.3.5 Test Result of Dwell Time

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%

Package Transfer Time Plot

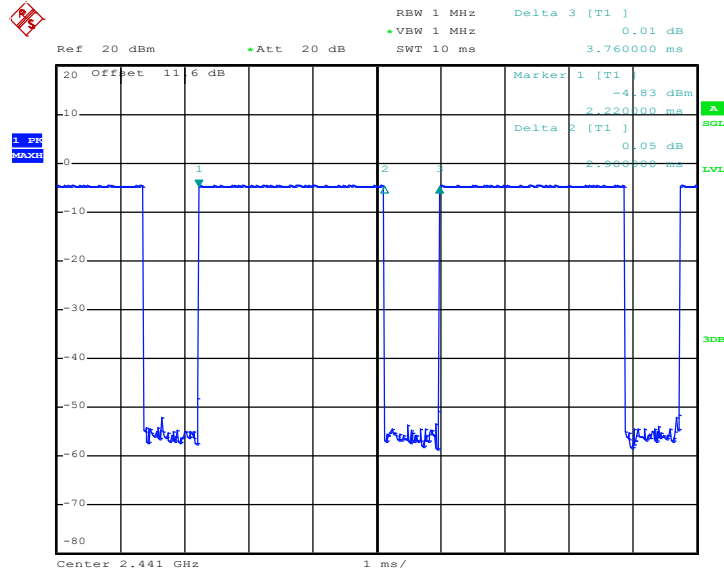

Date: 19.AUG.2020 17:46:23

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1-5% of the 99% bandwidth; VBW \geq 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

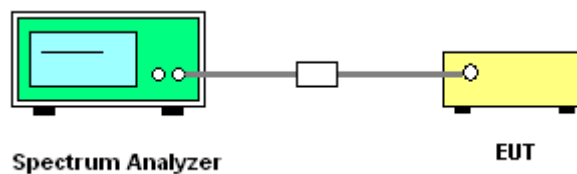




3.4.5 Test Result of 20dB Bandwidth

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.896	Pass
DH	1Mbps	1	39	2441	0.892	Pass
DH	1Mbps	1	78	2480	0.824	Pass
2DH	2Mbps	1	0	2402	1.260	Pass
2DH	2Mbps	1	39	2441	1.266	Pass
2DH	2Mbps	1	78	2480	1.260	Pass
3DH	3Mbps	1	0	2402	1.230	Pass
3DH	3Mbps	1	39	2441	1.236	Pass
3DH	3Mbps	1	78	2480	1.230	Pass

<1Mbps>


20 dB Bandwidth Plot on Channel 00

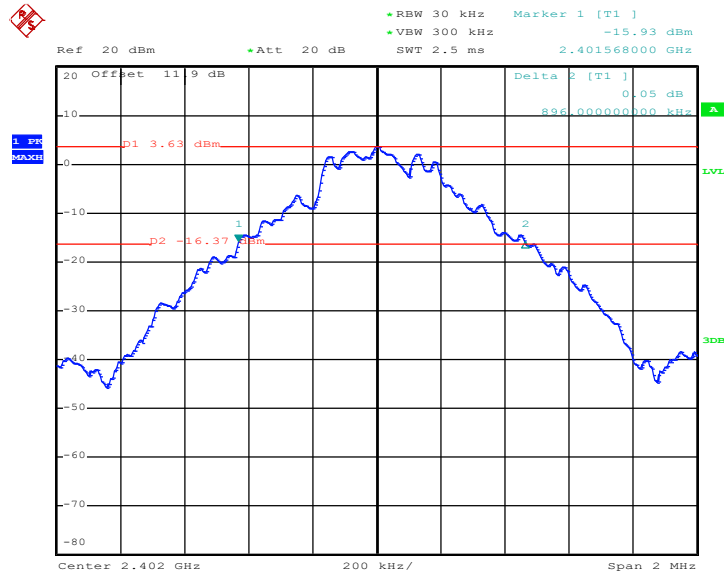

Date: 13.SEP.2020 13:33:51




20 dB Bandwidth Plot on Channel 39

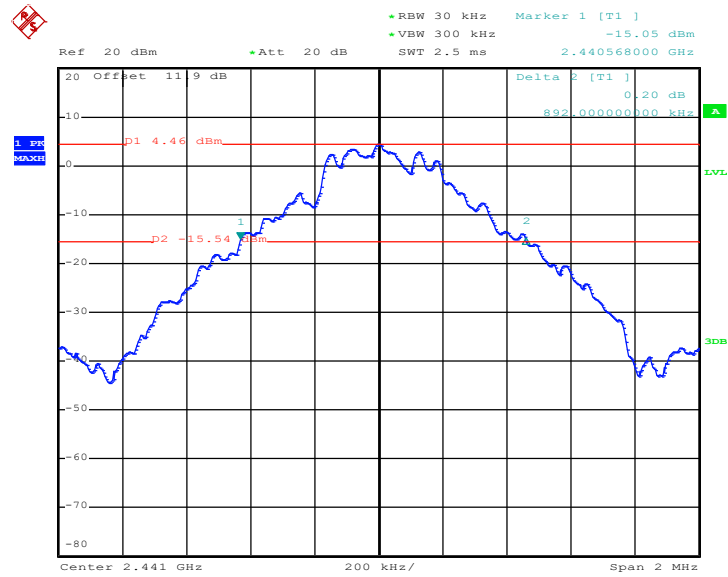

Date: 13.SEP.2020 13:40:56

20 dB Bandwidth Plot on Channel 78

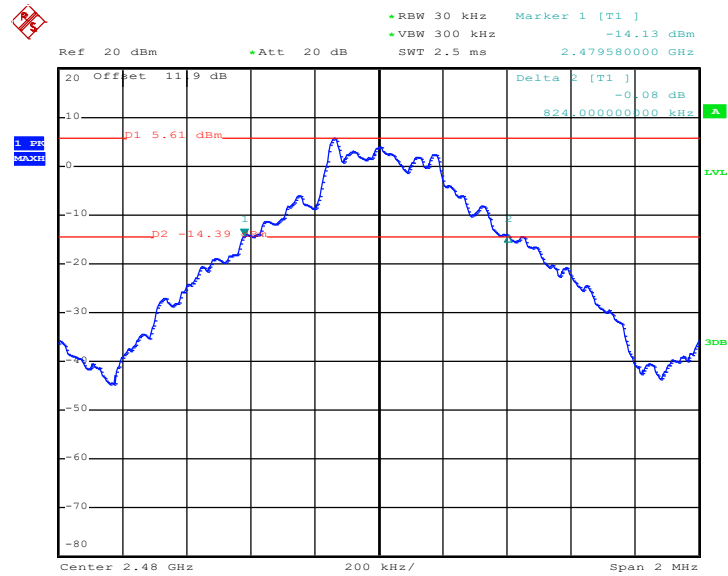


Date: 13.SEP.2020 14:39:40




<2Mbps>

20 dB Bandwidth Plot on Channel 00

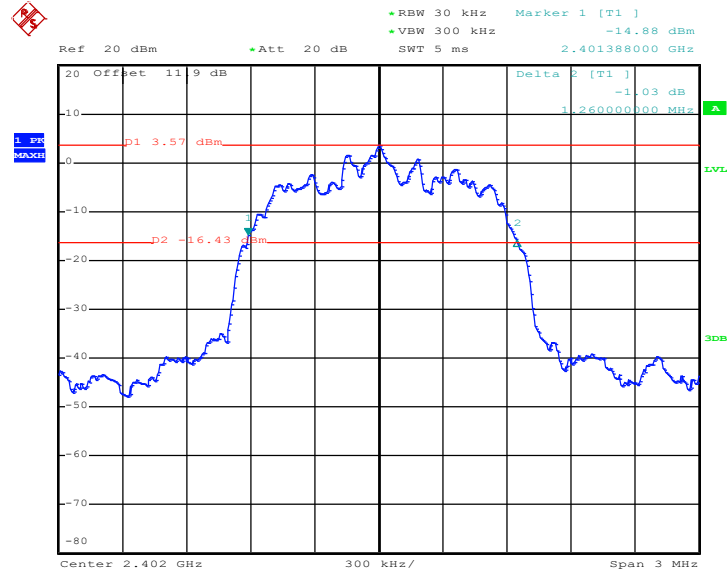

Date: 13.SEP.2020 14:07:36


20 dB Bandwidth Plot on Channel 39

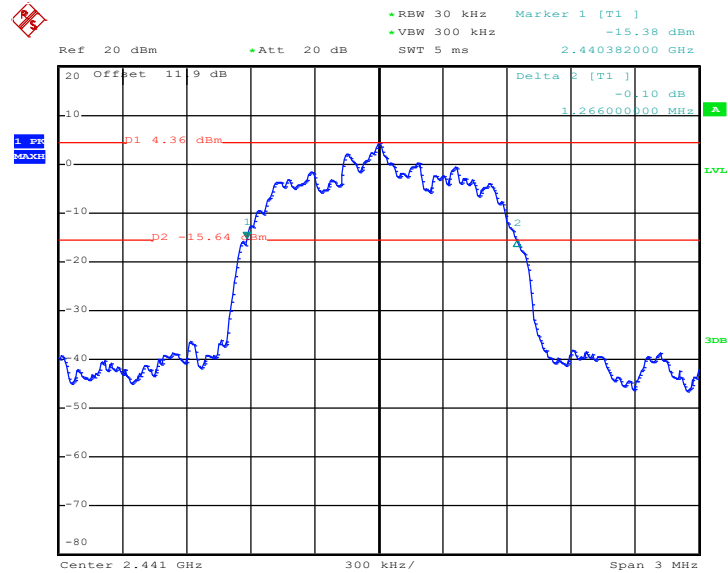

Date: 13.SEP.2020 14:23:55




20 dB Bandwidth Plot on Channel 78

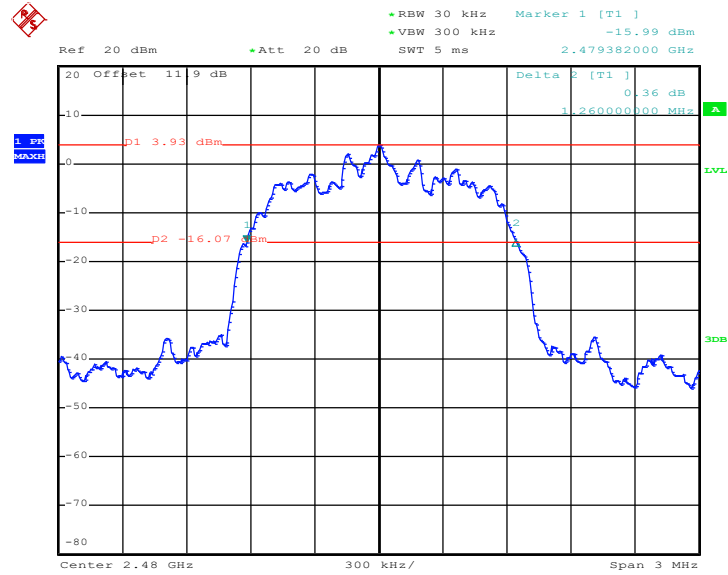

Date: 13.SEP.2020 14:19:19

<3Mbps>


20 dB Bandwidth Plot on Channel 00

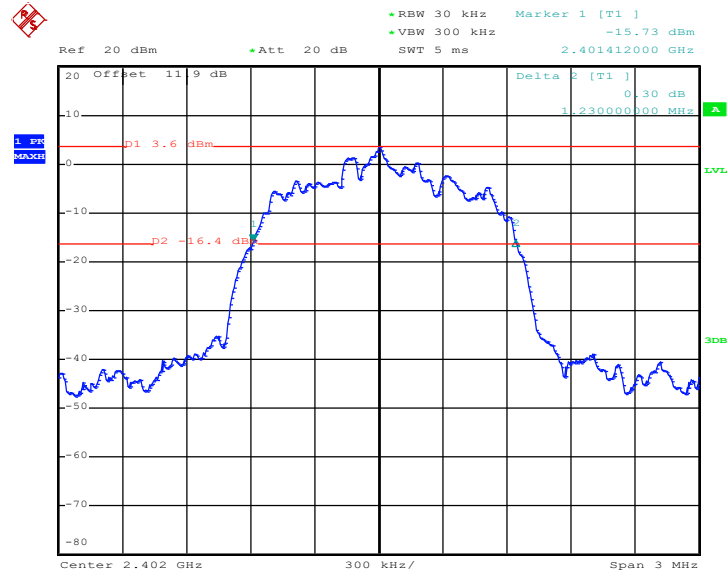

Date: 13.SEP.2020 15:01:56




20 dB Bandwidth Plot on Channel 39

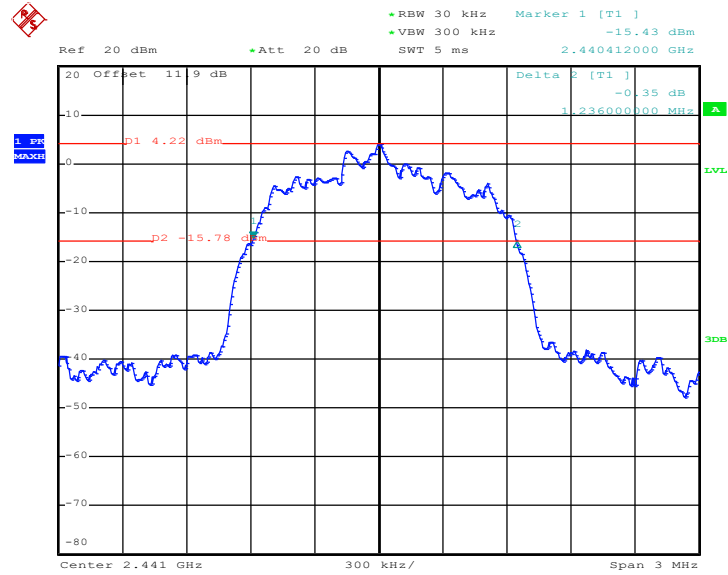

Date: 13.SEP.2020 15:16:33

20 dB Bandwidth Plot on Channel 78

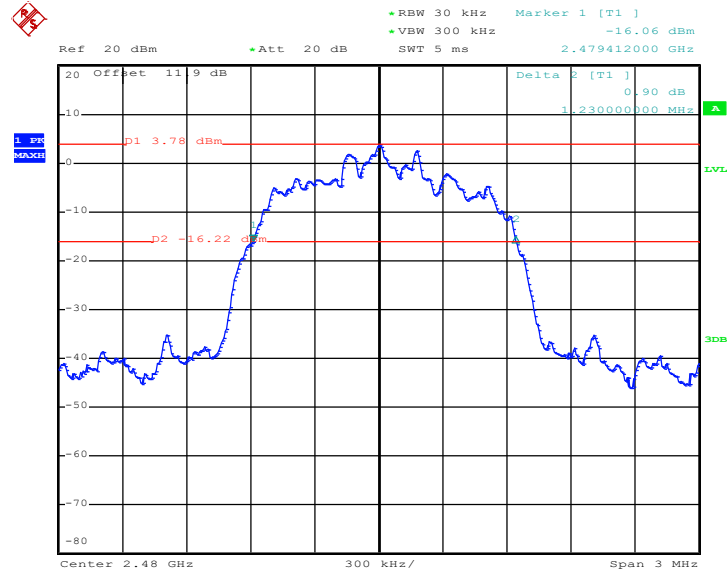

Date: 13.SEP.2020 15:25:56




3.4.6 Test Result of 99% Occupied Bandwidth

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%

Mod.	Data Rate	Nrx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.844	Pass
DH	1Mbps	1	39	2441	0.836	Pass
DH	1Mbps	1	78	2480	0.840	Pass
2DH	2Mbps	1	0	2402	1.168	Pass
2DH	2Mbps	1	39	2441	1.168	Pass
2DH	2Mbps	1	78	2480	1.164	Pass
3DH	3Mbps	1	0	2402	1.148	Pass
3DH	3Mbps	1	39	2441	1.152	Pass
3DH	3Mbps	1	78	2480	1.148	Pass

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

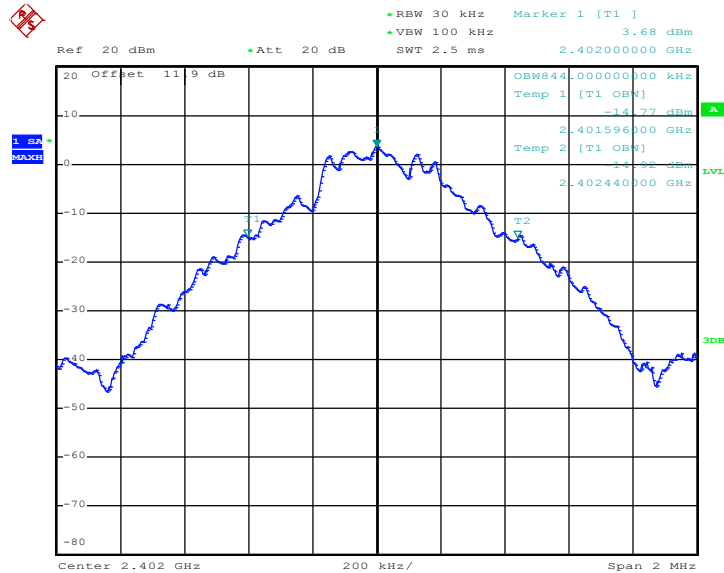

Date: 13.SEP.2020 13:36:21




99% Occupied Bandwidth Plot on Channel 39

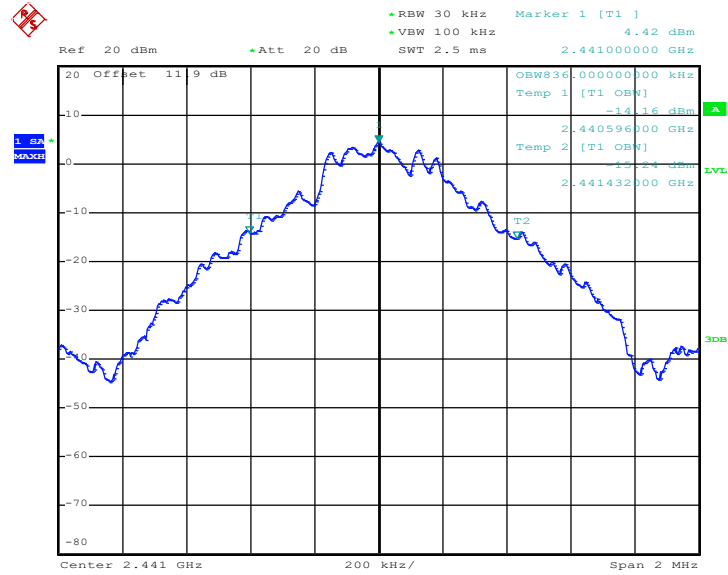

Date: 13.SEP.2020 13:42:17

99% Occupied Bandwidth Plot on Channel 78

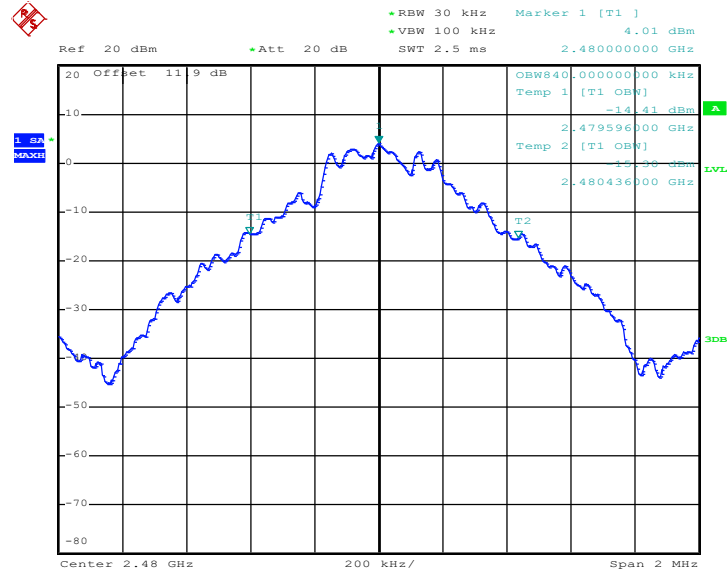


Date: 13.SEP.2020 13:49:37




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

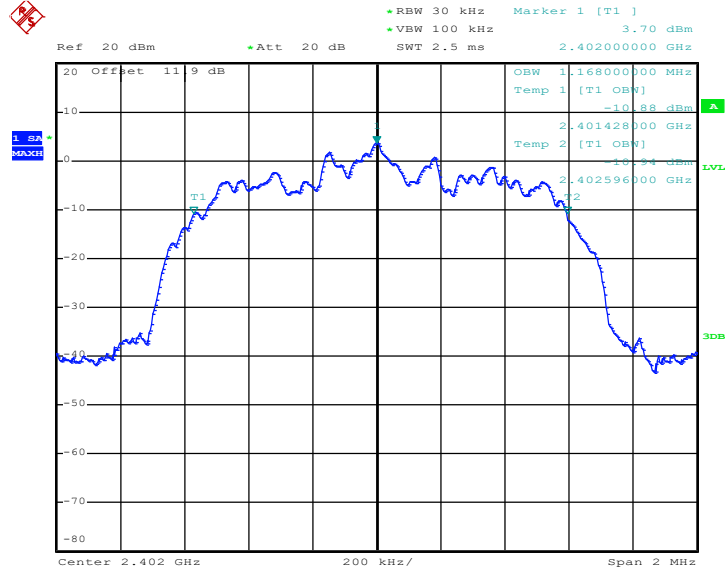

Date: 13.SEP.2020 14:09:11


99% Occupied Bandwidth Plot on Channel 39

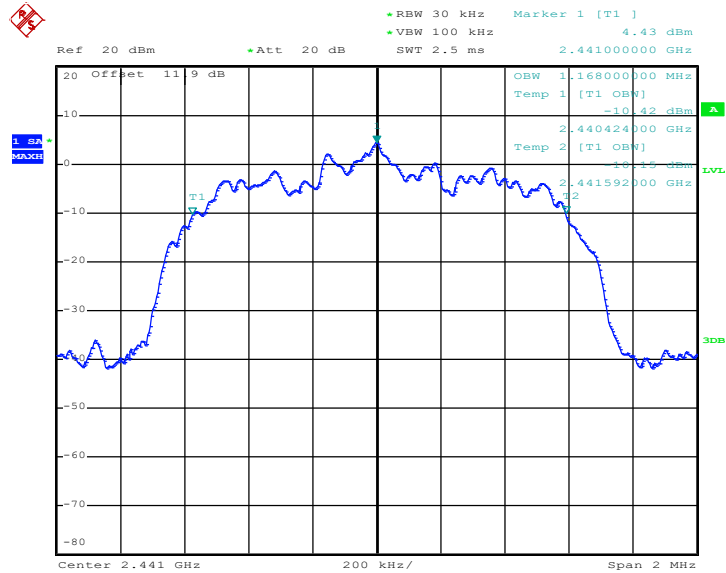

Date: 13.SEP.2020 14:14:43




99% Occupied Bandwidth Plot on Channel 78

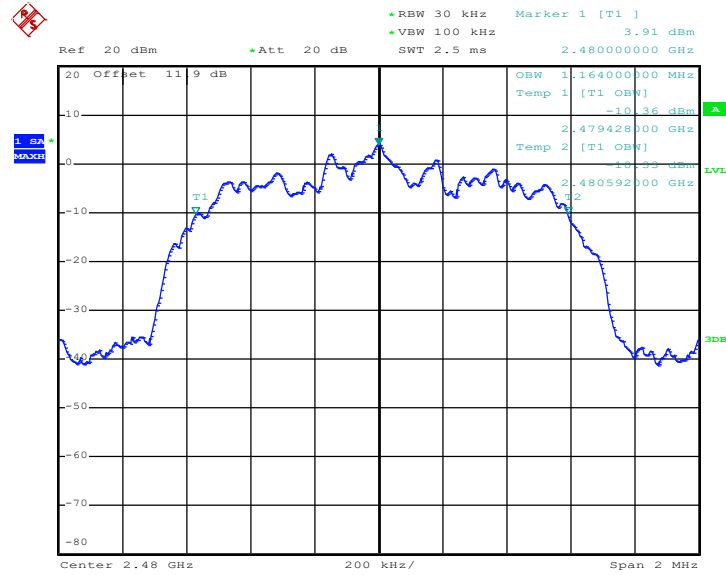

Date: 13.SEP.2020 14:20:49

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

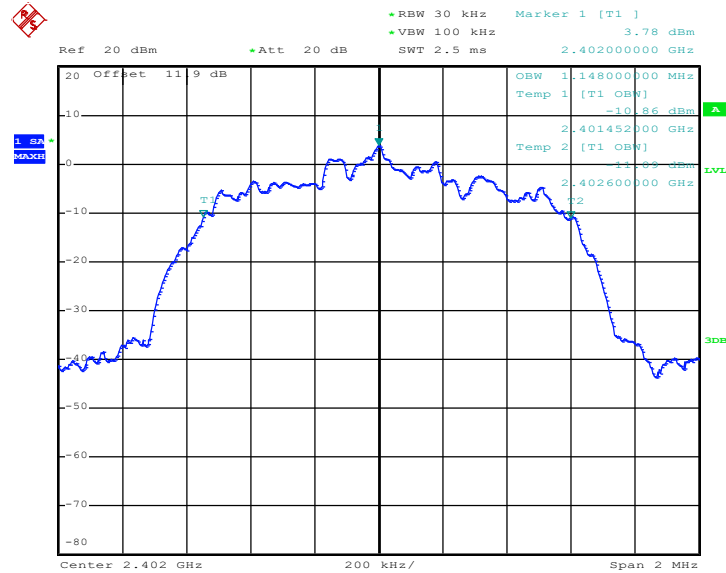

Date: 13.SEP.2020 15:04:26




99% Occupied Bandwidth Plot on Channel 39

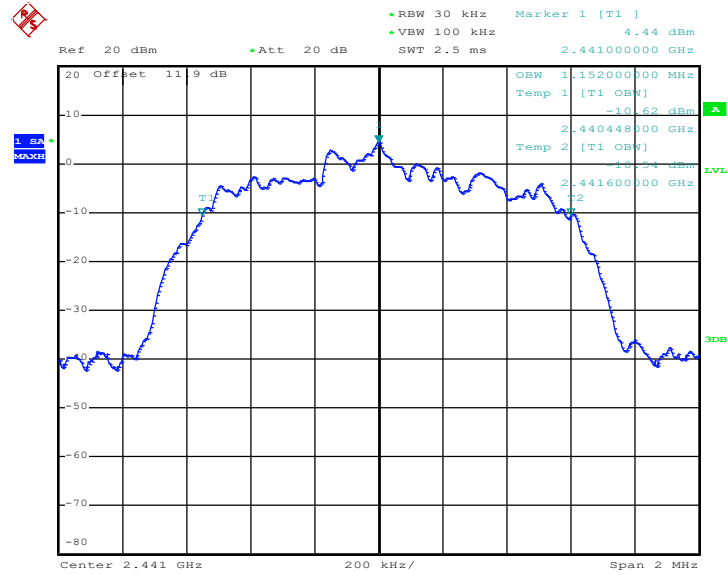

Date: 13.SEP.2020 15:18:03

99% Occupied Bandwidth Plot on Channel 78

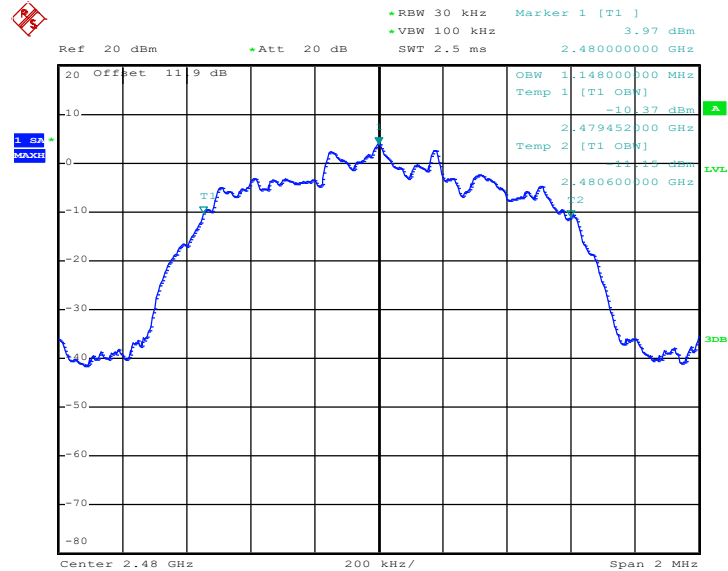

Date: 13.SEP.2020 15:27:54

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

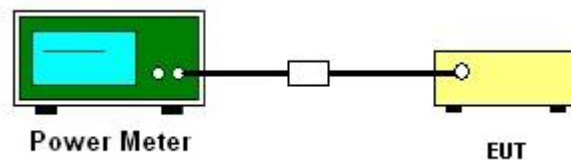



3.5.5 Test Result of Peak Output Power

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%

DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	6.68	20.97	Pass
	39	1	7.30	20.97	Pass
	78	1	6.92	20.97	Pass

2DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	8.49	20.97	Pass
	39	1	8.98	20.97	Pass
	78	1	8.56	20.97	Pass

3DH	CH.	N _{TX}	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	8.81	20.97	Pass
	39	1	9.43	20.97	Pass
	78	1	8.90	20.97	Pass

3.5.6 Test Result of Average Output Power (Reporting Only)

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%

DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	6.47	5.21
	39	1	6.96	5.21
	78	1	6.63	5.21

2DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
2DH1	0	1	5.98	1.87
	39	1	6.53	1.87
	78	1	7.14	1.87

3DH	CH.	N _{TX}	Average Power (dBm)	Duty Factor (dB)
3DH1	0	1	6.18	5.11
	39	1	6.67	5.11
	78	1	6.31	5.11

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

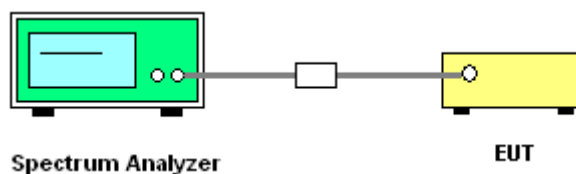




3.6.5 Test Result of Conducted Band Edges

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%


<1Mbps>

Low Band Edge Plot on Channel 00

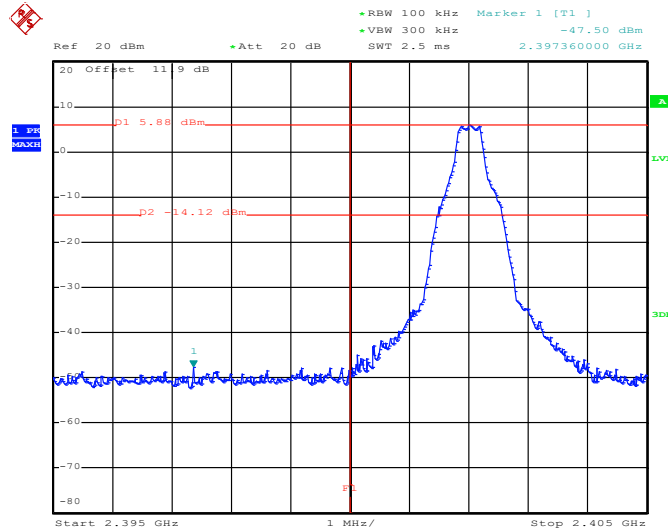

Date: 13.SEP.2020 13:52:08

High Band Edge Plot on Channel 78

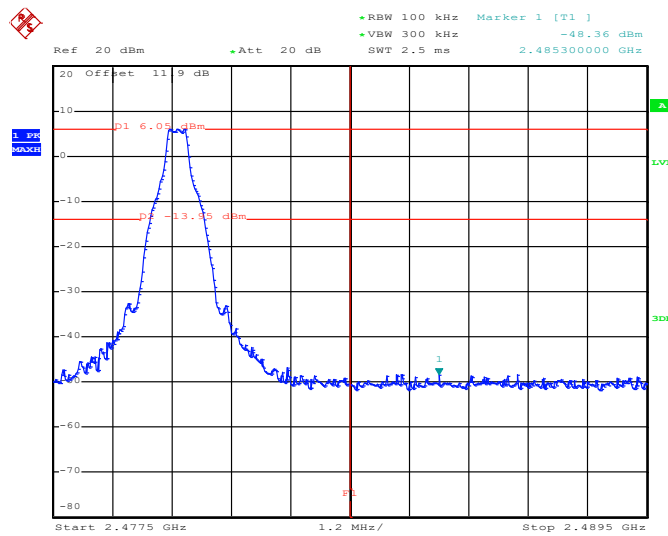


Date: 13.SEP.2020 13:48:30




<2Mbps>

Low Band Edge Plot on Channel 00

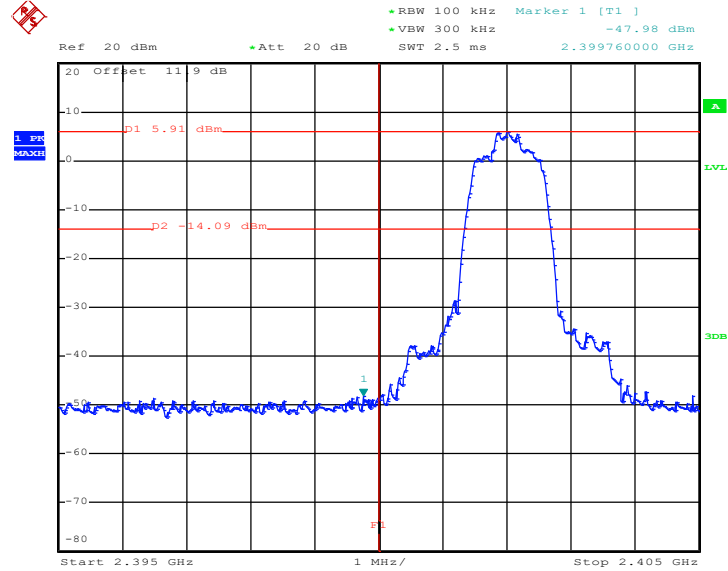

Date: 13.SEP.2020 14:08:34

High Band Edge Plot on Channel 78

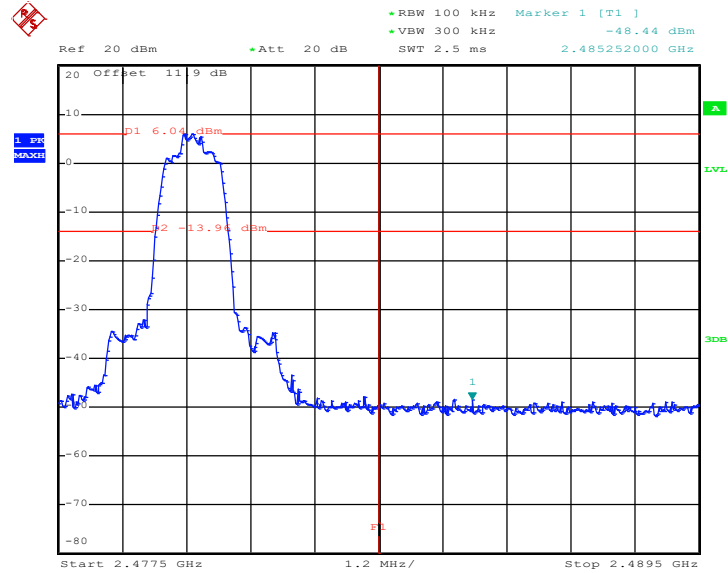


Date: 13.SEP.2020 14:20:11




<3Mbps>

Low Band Edge Plot on Channel 00

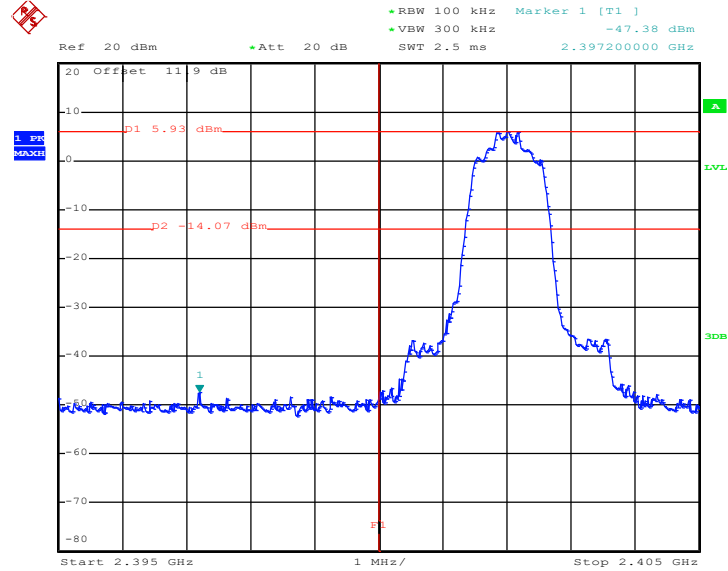

Date: 13.SEP.2020 15:02:54

High Band Edge Plot on Channel 78

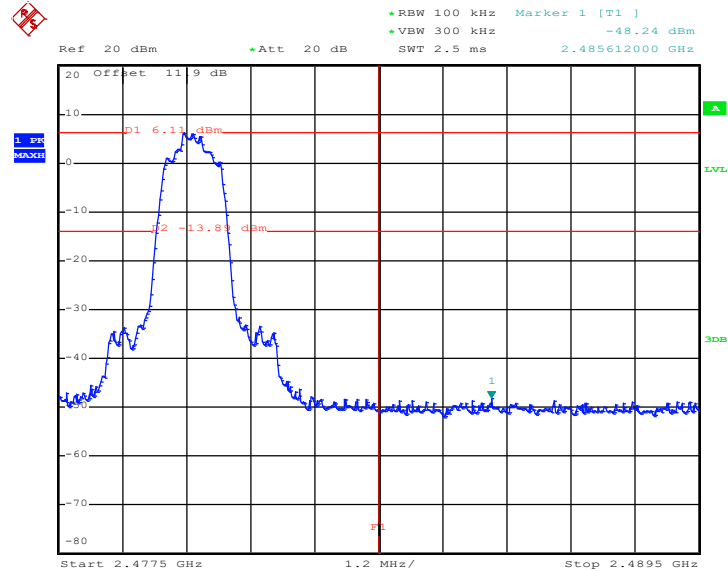


Date: 13.SEP.2020 15:26:58



3.6.6 Test Result of Conducted Hopping Mode Band Edges


<1Mbps>

Hopping Mode Low Band Edge Plot

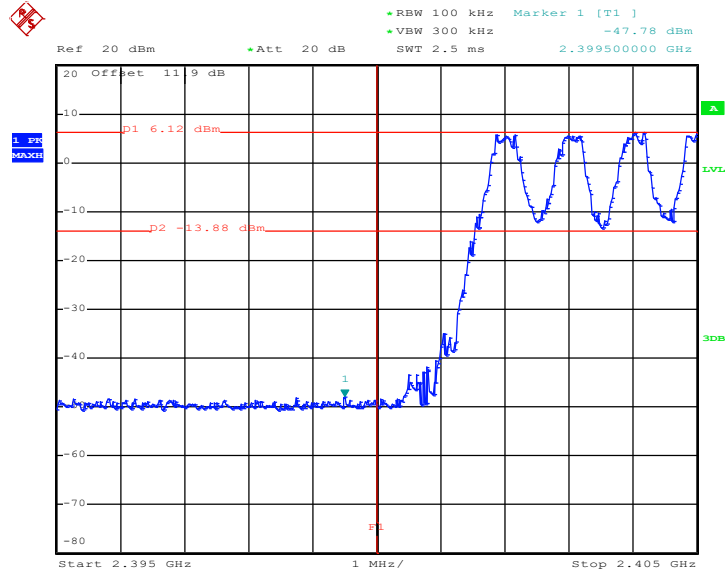

Date: 13.SEP.2020 13:55:36

Hopping Mode High Band Edge Plot

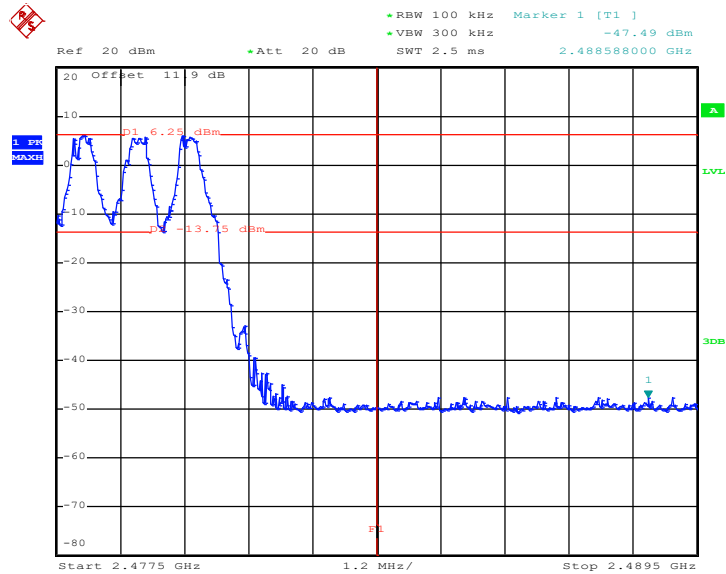


Date: 13.SEP.2020 13:57:15




<2Mbps>

Hopping Mode Low Band Edge Plot

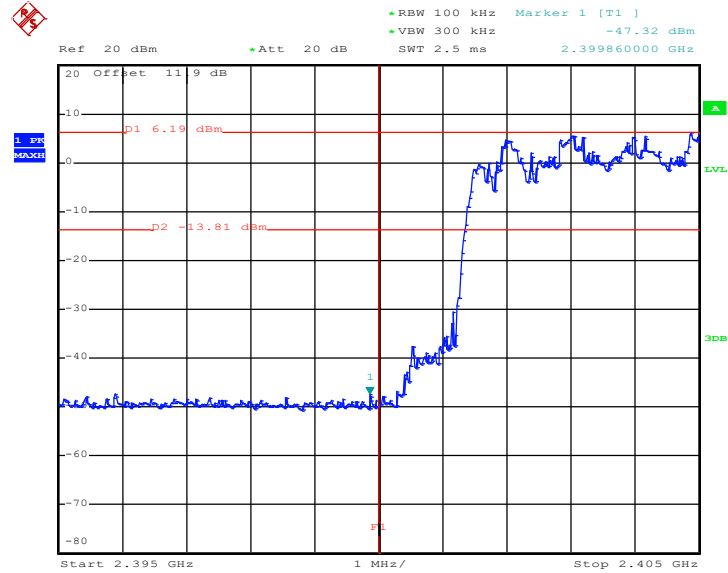

Date: 13.SEP.2020 14:46:34

Hopping Mode High Band Edge Plot

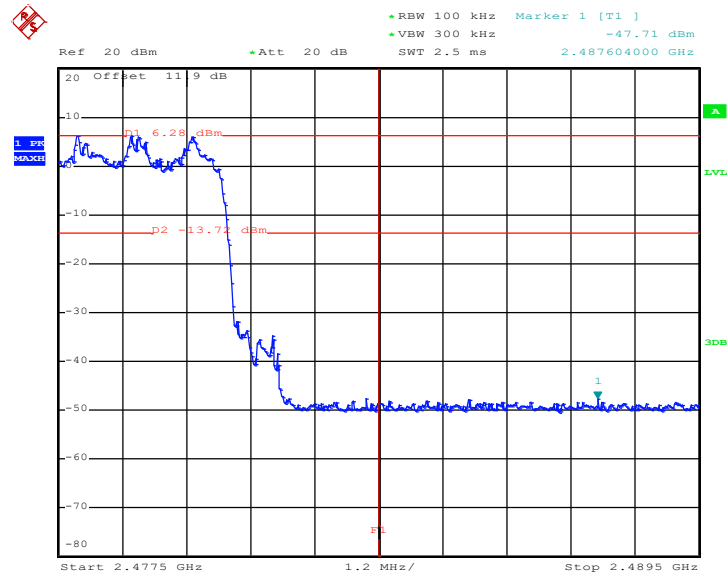


Date: 13.SEP.2020 14:48:47




<3Mbps>

Hopping Mode Low Band Edge Plot

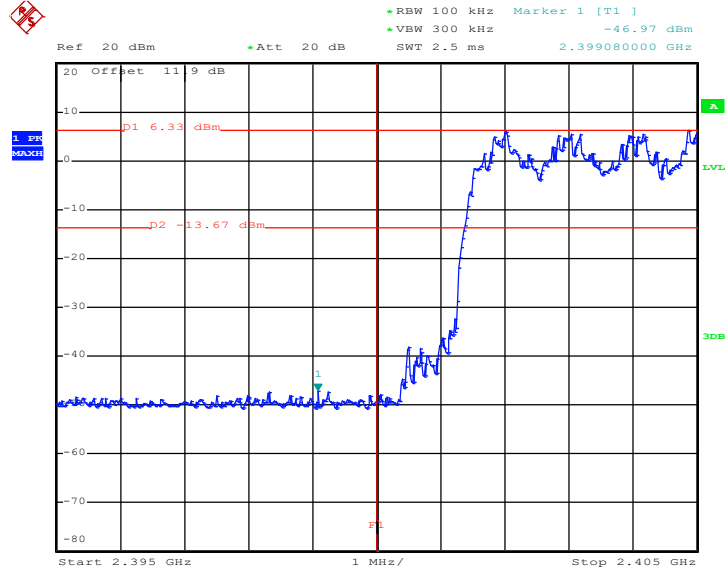

Date: 13.SEP.2020 15:39:05

Hopping Mode High Band Edge Plot

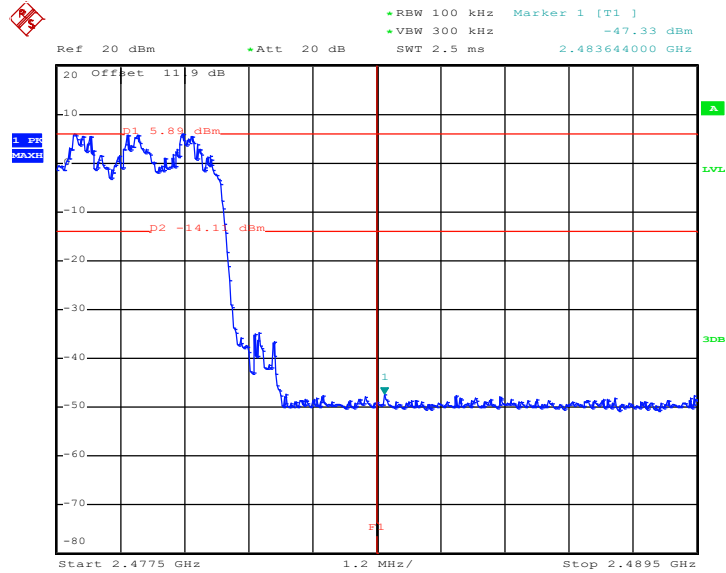

Date: 13.SEP.2020 15:41:13

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

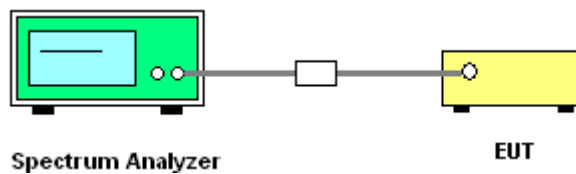




3.7.5 Test Result of Conducted Spurious Emission

Test Engineer :	Mina Liu and Jun Yu	Temperature :	23.5~23.8°C
		Relative Humidity :	53.7~54.2%


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

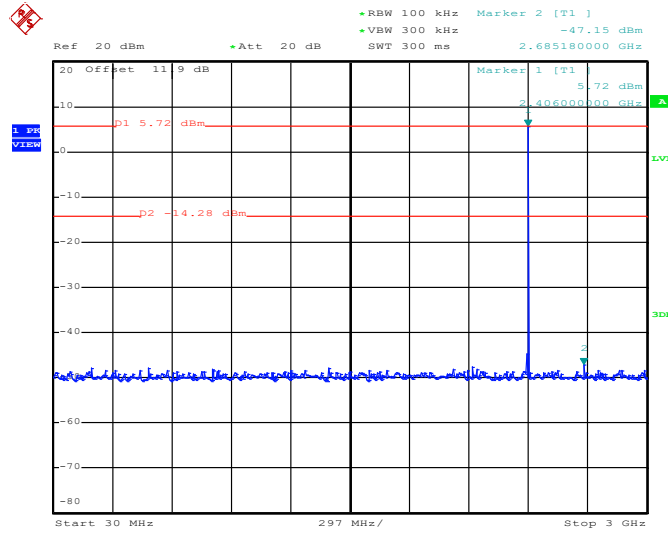

Date: 13.SEP.2020 13:37:09


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

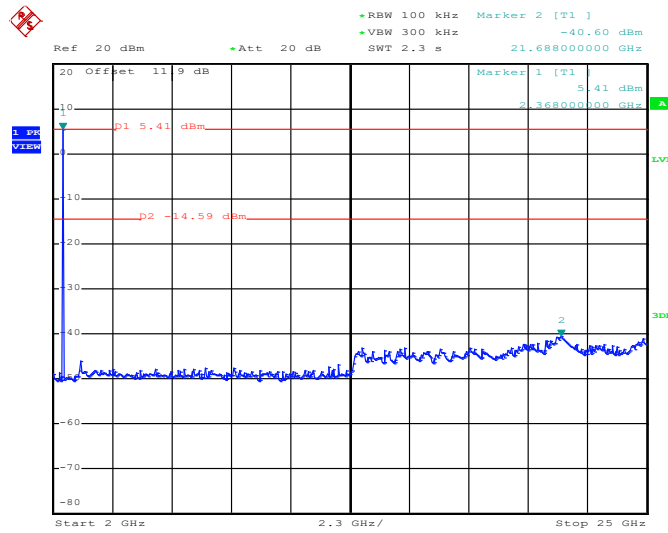

Date: 13.SEP.2020 13:37:39




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

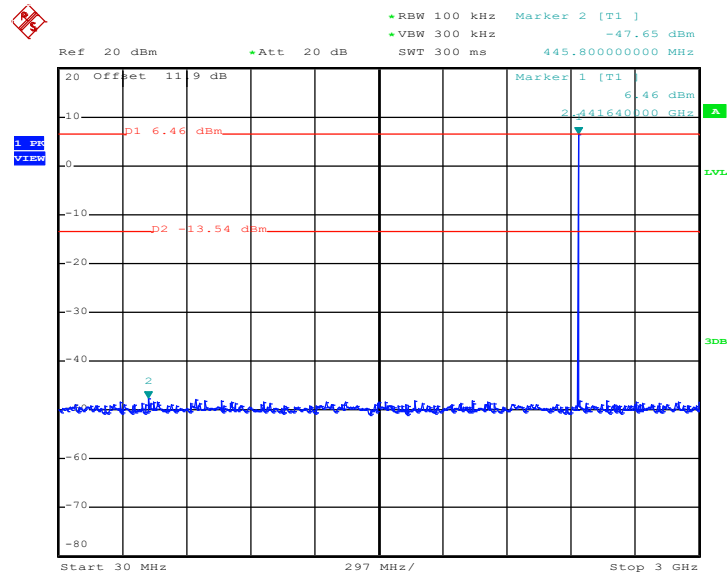

Date: 13.SEP.2020 13:43:06


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

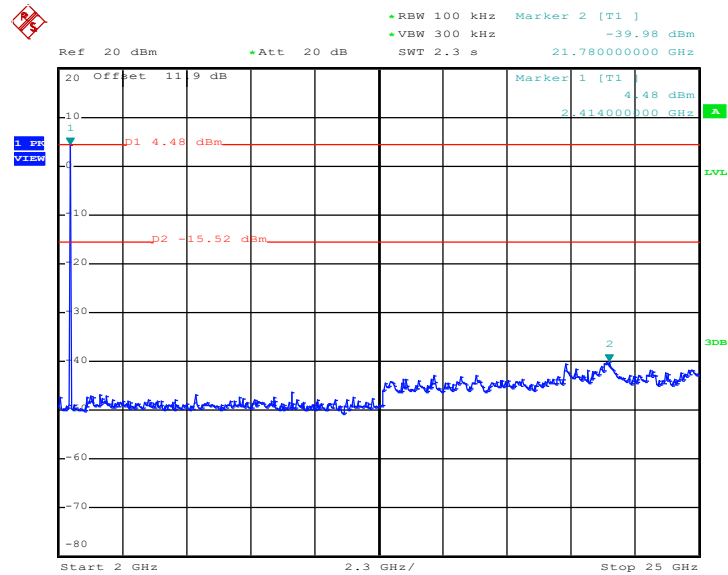

Date: 13.SEP.2020 13:43:48




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

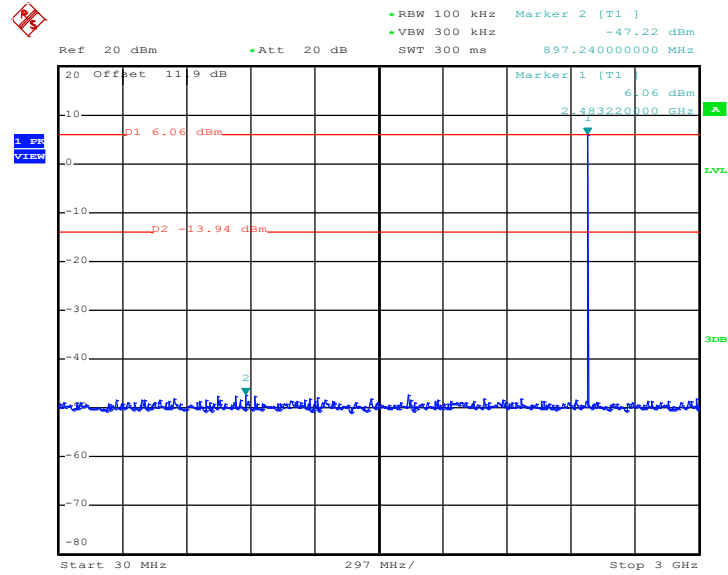

Date: 13.SEP.2020 13:50:20

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

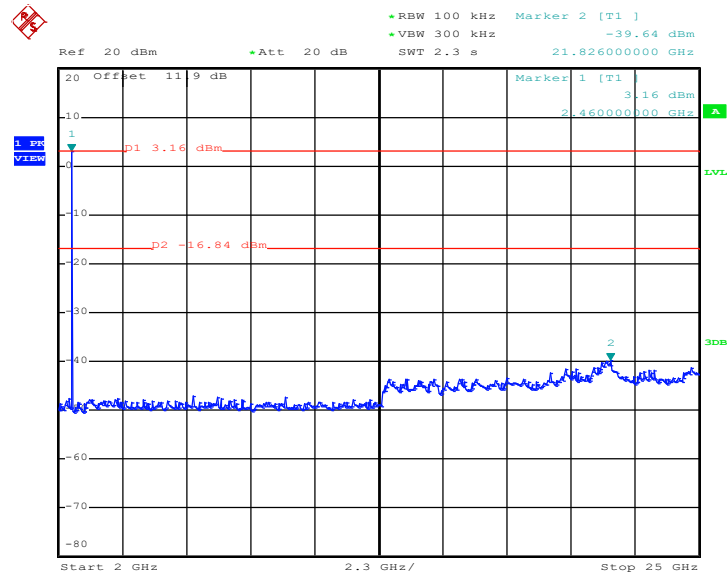


Date: 13.SEP.2020 13:50:54




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

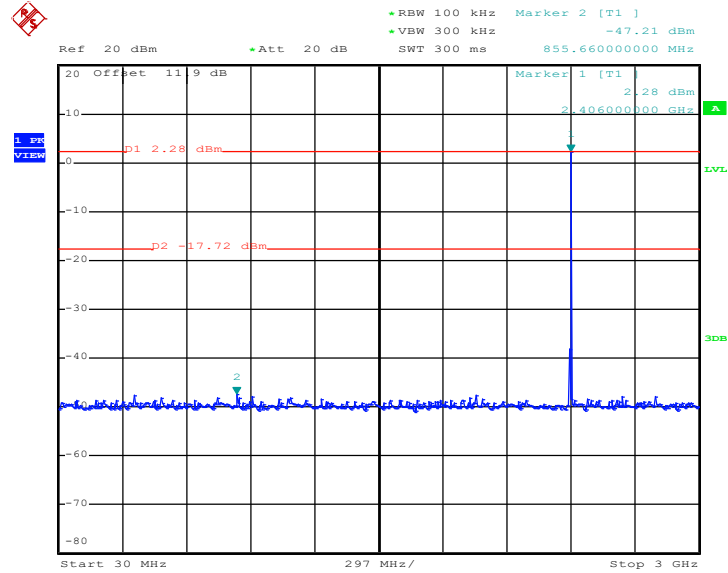

Date: 13.SEP.2020 14:09:46


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

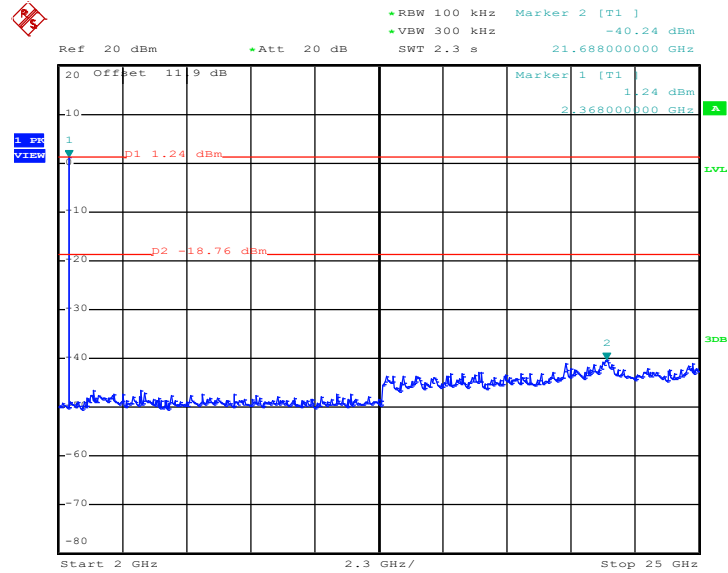

Date: 13.SEP.2020 14:10:24




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

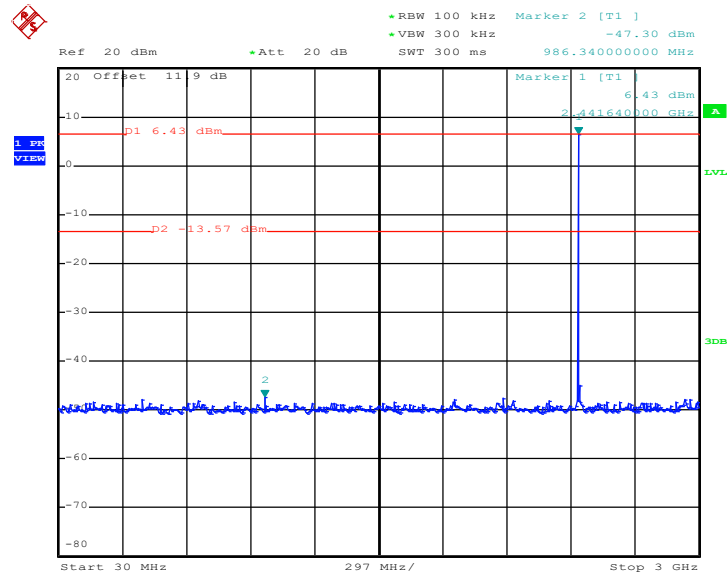

Date: 13.SEP.2020 14:15:22


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

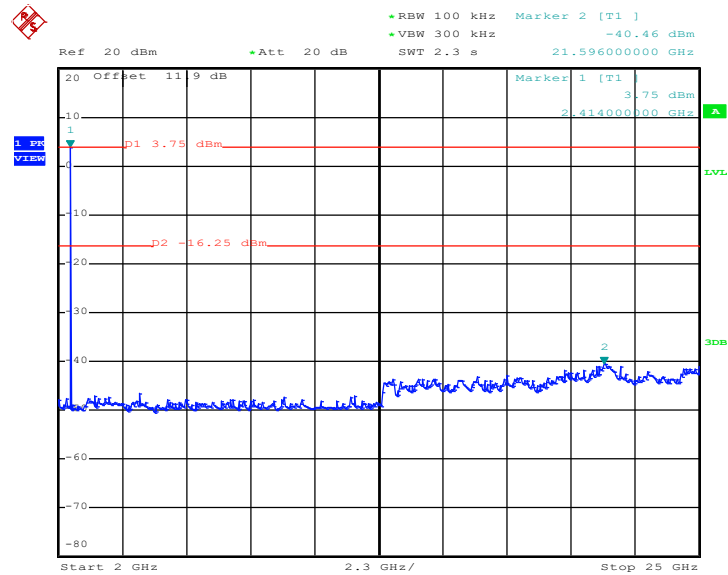

Date: 13.SEP.2020 14:16:02




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

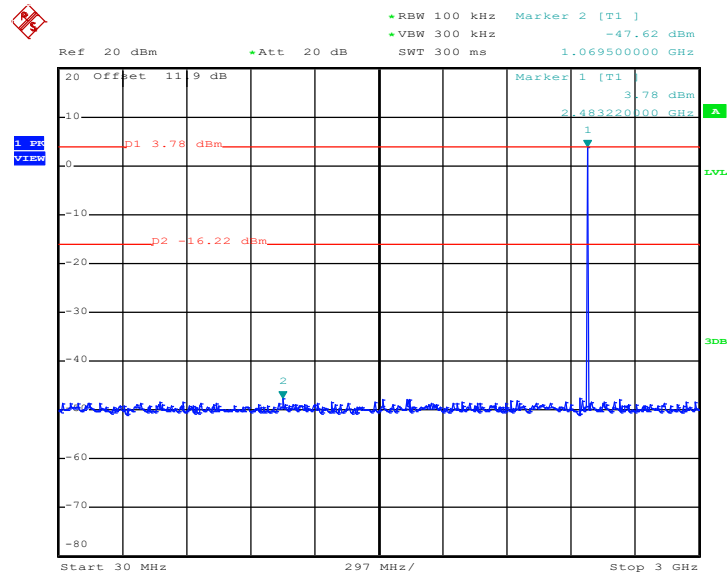

Date: 13.SEP.2020 14:21:33

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

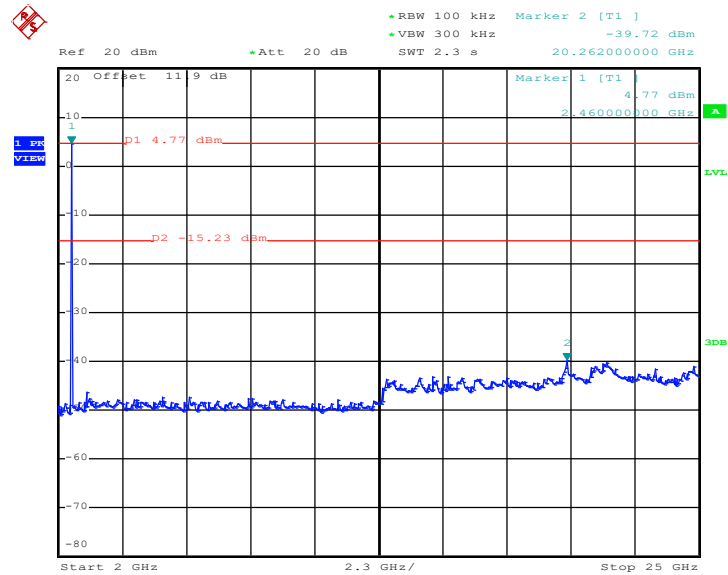


Date: 13.SEP.2020 14:22:17




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

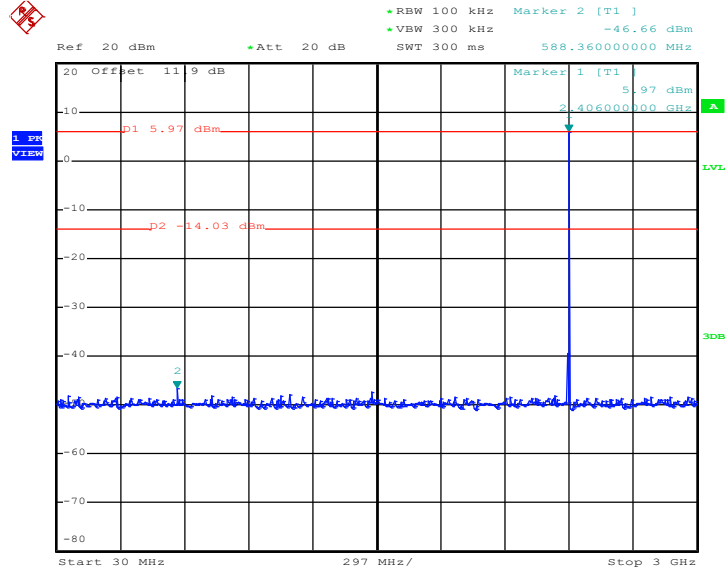

Date: 13.SEP.2020 15:11:56


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

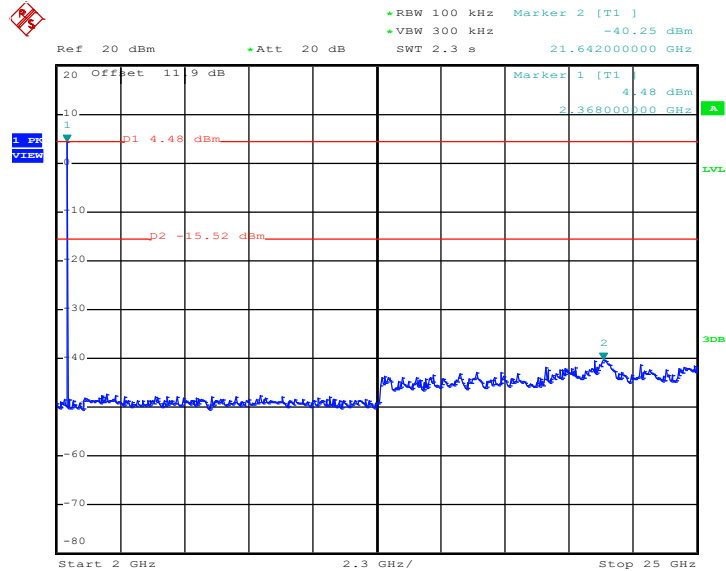

Date: 13.SEP.2020 15:12:35




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

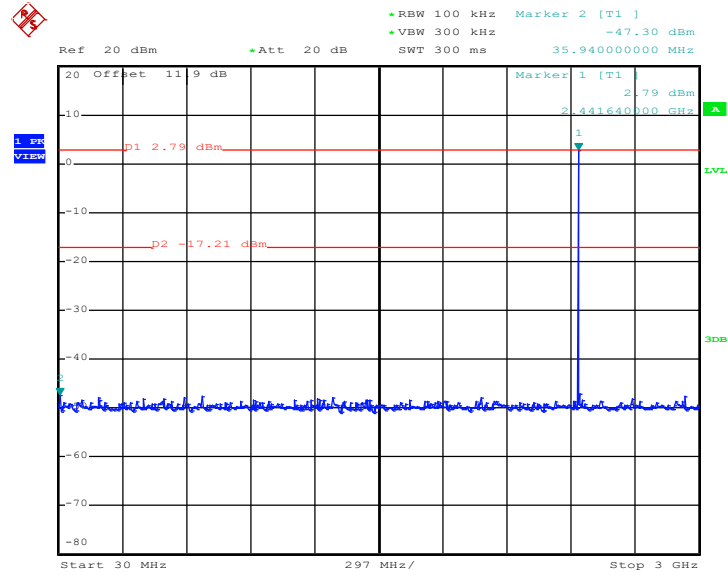

Date: 13.SEP.2020 15:20:33


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

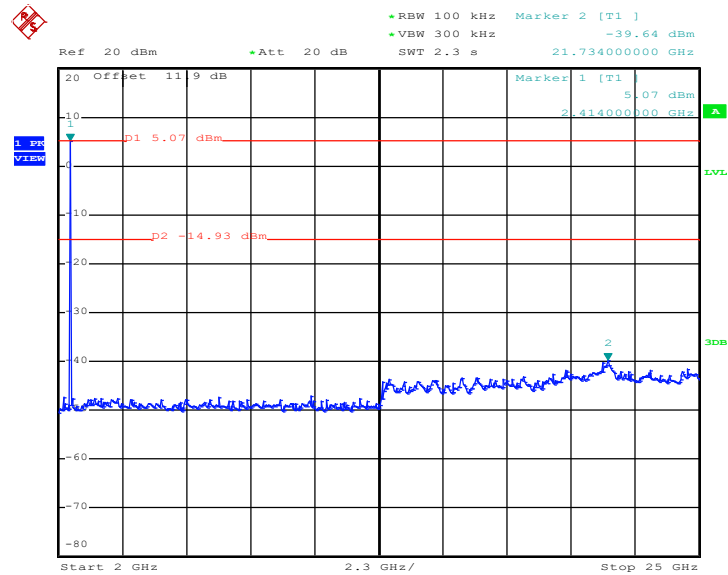

Date: 13.SEP.2020 15:22:56




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

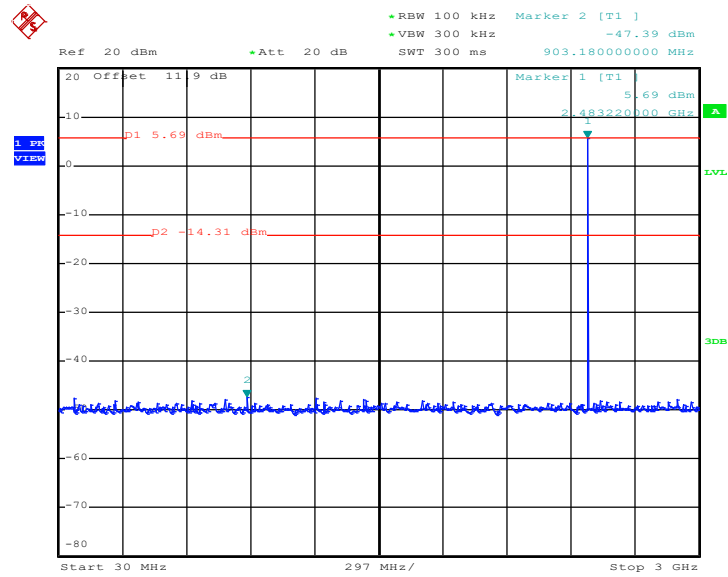

Date: 13.SEP.2020 15:28:36

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

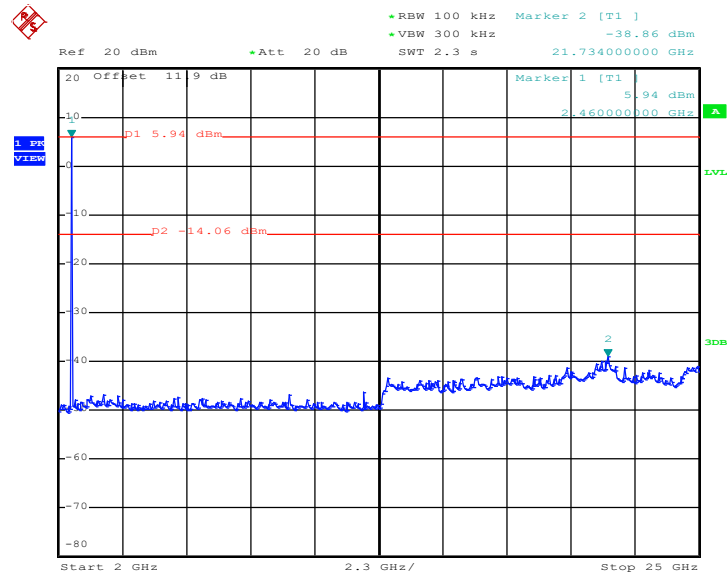

Date: 13.SEP.2020 15:29:29



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.


**3.8.3 Test Procedures**

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

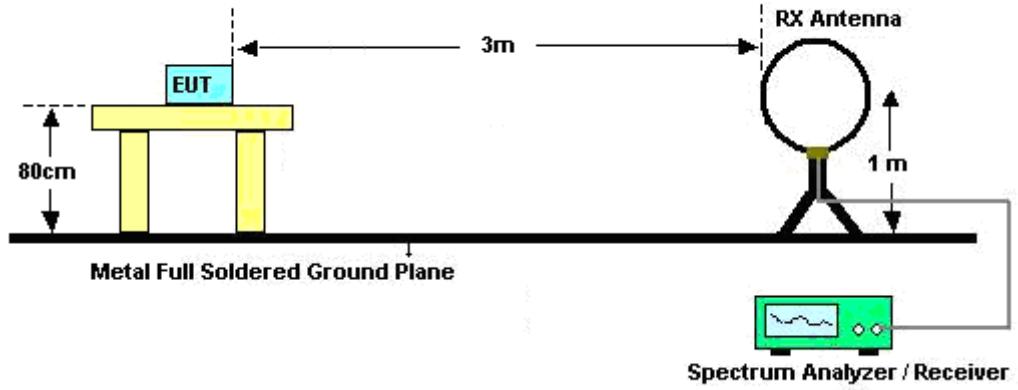


For radiated emissions from 30MHz to 1GHz

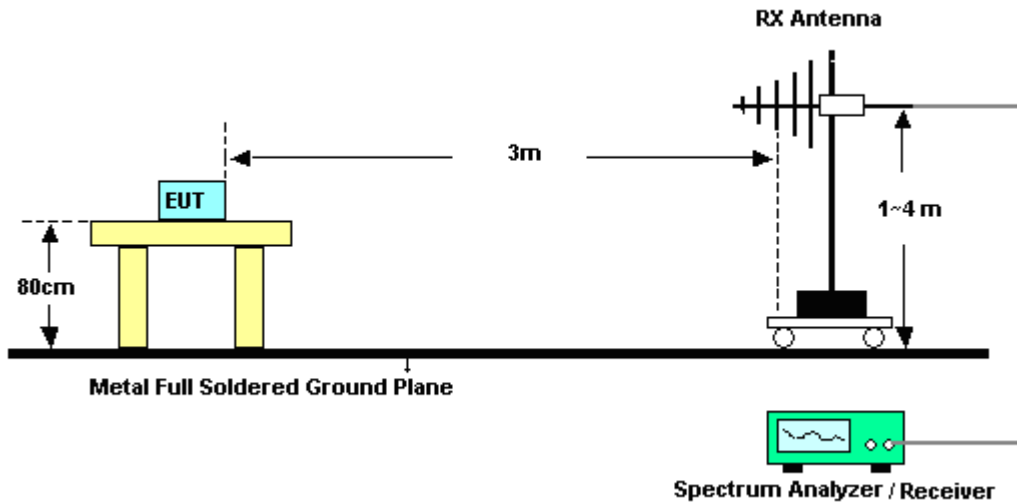

For radiated emissions from 1GHz to 18GHz

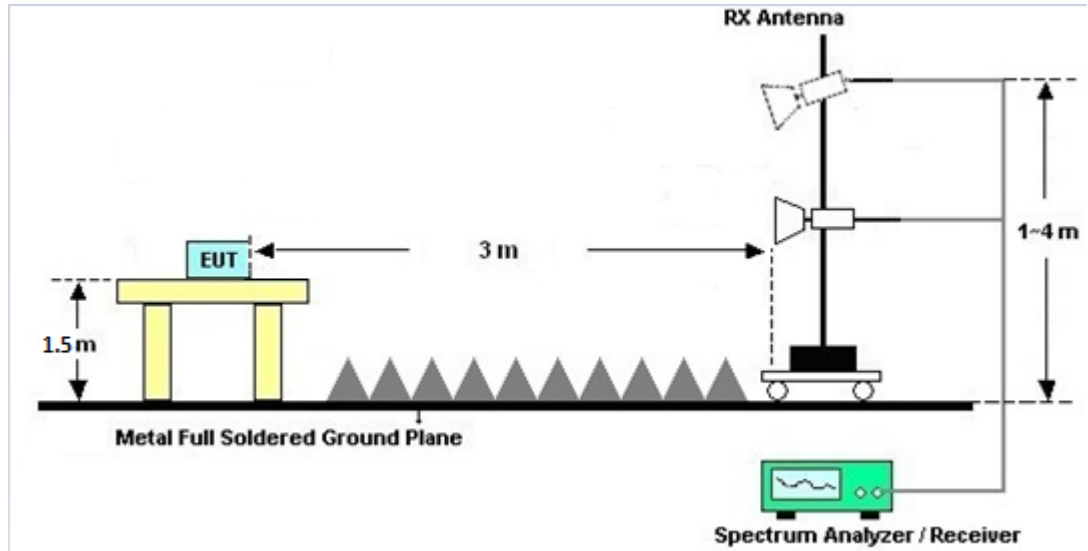

For radiated emissions above 18GHz

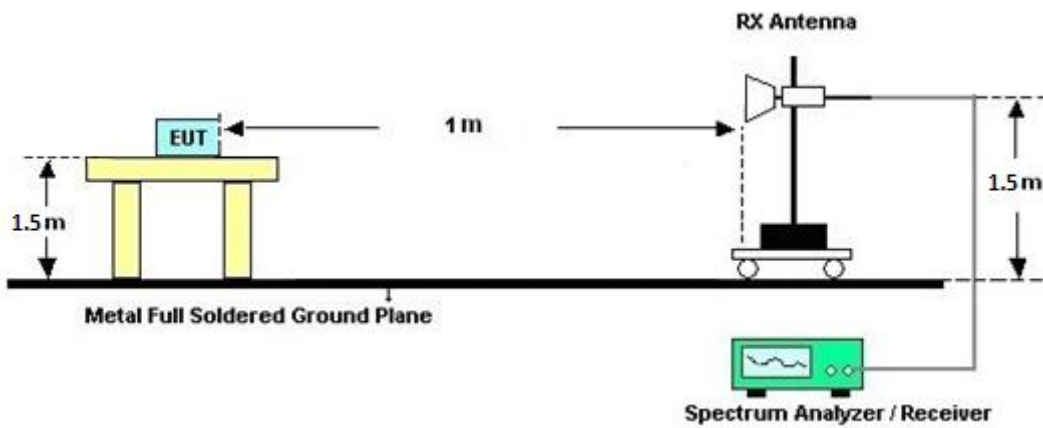



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

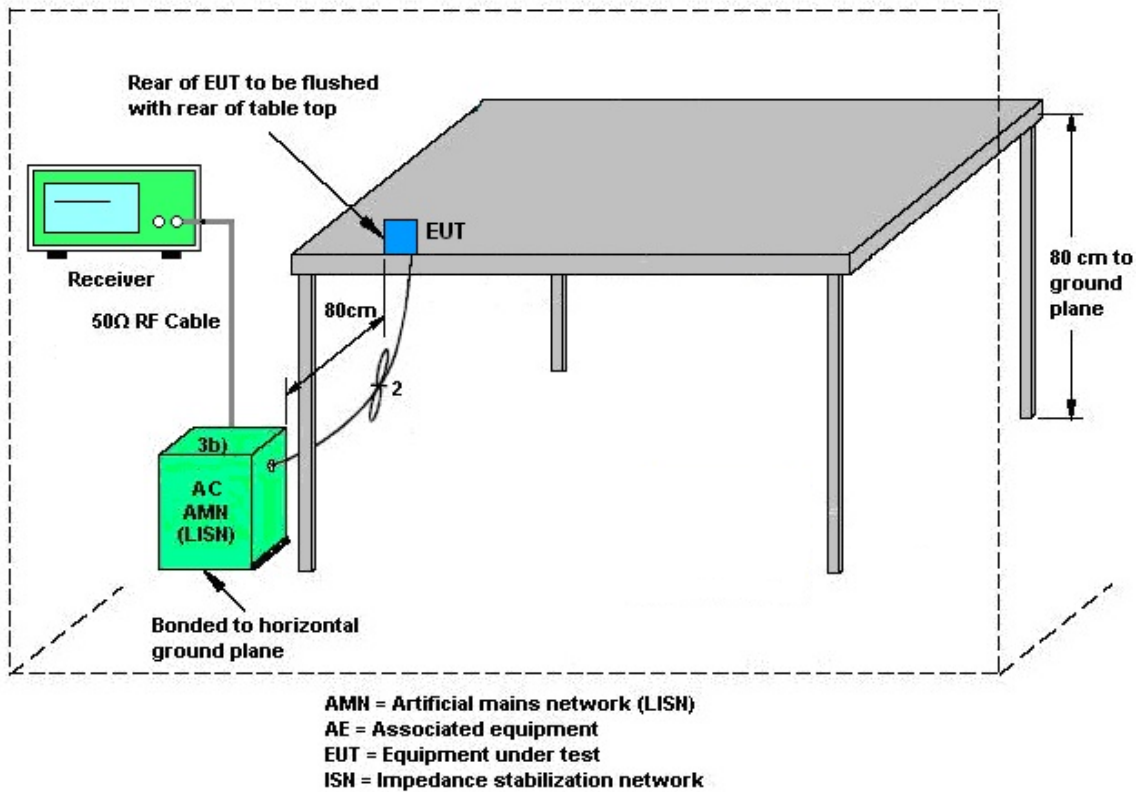

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Aug. 17, 2020~ Sep. 17, 2020	Jul. 13, 2021	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D&00 802N1D01N-0 6	47020&06	30MHz to 1GHz	Oct. 12, 2019	Aug. 17, 2020~ Sep. 17, 2020	Oct. 11, 2020	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917098 0	18GHz~40GHz	Jan. 10, 2020	Aug. 17, 2020~ Sep. 17, 2020	Jan. 09, 2021	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Oct. 01, 2019	Aug. 17, 2020~ Sep. 17, 2020	Sep. 30, 2020	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1G~18GHz	Sep. 19, 2019	Aug. 17, 2020~ Sep. 17, 2020	Sep. 18, 2020	Radiation (03CH16-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	1710001800 055006	1GHz~18GHz	May 07, 2020	Aug. 17, 2020~ Sep. 17, 2020	May 06, 2021	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~40GHz	Dec. 13, 2019	Aug. 17, 2020~ Sep. 17, 2020	Dec. 12, 2020	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 11, 2019	Aug. 17, 2020~ Sep. 17, 2020	Dec. 10, 2020	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 05, 2019	Aug. 17, 2020~ Sep. 17, 2020	Dec. 04, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/4P E	NA	Aug. 30, 2019	Aug. 17, 2020~ Aug. 28, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/4P E	NA	Aug. 29, 2020	Aug. 29, 2020~ Sep. 17, 2020	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-5 757	NA	Aug. 30, 2019	Aug. 17, 2020~ Aug. 28, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/4P E	NA	Aug. 29, 2020	Aug. 29, 2020~ Sep. 17, 2020	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/4P E	NA	Aug. 30, 2019	Aug. 17, 2020~ Aug. 28, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-5 757	NA	Aug. 29, 2020	Aug. 29, 2020~ Sep. 17, 2020	Aug. 28, 2021	Radiation (03CH16-HY)
Hygrometer	TECPEL	DTM-303B	TP162965	N/A	Oct. 25, 2019	Aug. 17, 2020~ Sep. 17, 2020	Oct. 24, 2020	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Aug. 17, 2020~ Sep. 17, 2020	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Aug. 17, 2020~ Sep. 17, 2020	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Aug. 17, 2020~ Sep. 17, 2020	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Aug. 17, 2020~ Sep. 17, 2020	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Aug. 19, 2020~ Sep. 13, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 27, 2019	Aug. 19, 2020~ Sep. 13, 2020	Dec. 26, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Dec. 30, 2019	Aug. 19, 2020~ Sep. 13, 2020	Dec. 29, 2020	Conducted (TH05-HY)
BT Base Station	Rohde & Schwarz	CBT	101136	BT 3.0	Oct. 27, 2019	Aug. 19, 2020~ Sep. 13, 2020	Oct. 26, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Aug. 19, 2020~ Sep. 13, 2020	Mar. 16, 2021	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 25, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Aug. 25, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 07, 2019	Aug. 25, 2020	Nov. 06, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 20, 2019	Aug. 25, 2020	Nov. 19, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Aug. 25, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Aug. 25, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Aug. 25, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Aug. 25, 2020	Jan. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	24~26°C
		Relative Humidity :	42~50%

EUT Information

Report NO : 072944
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

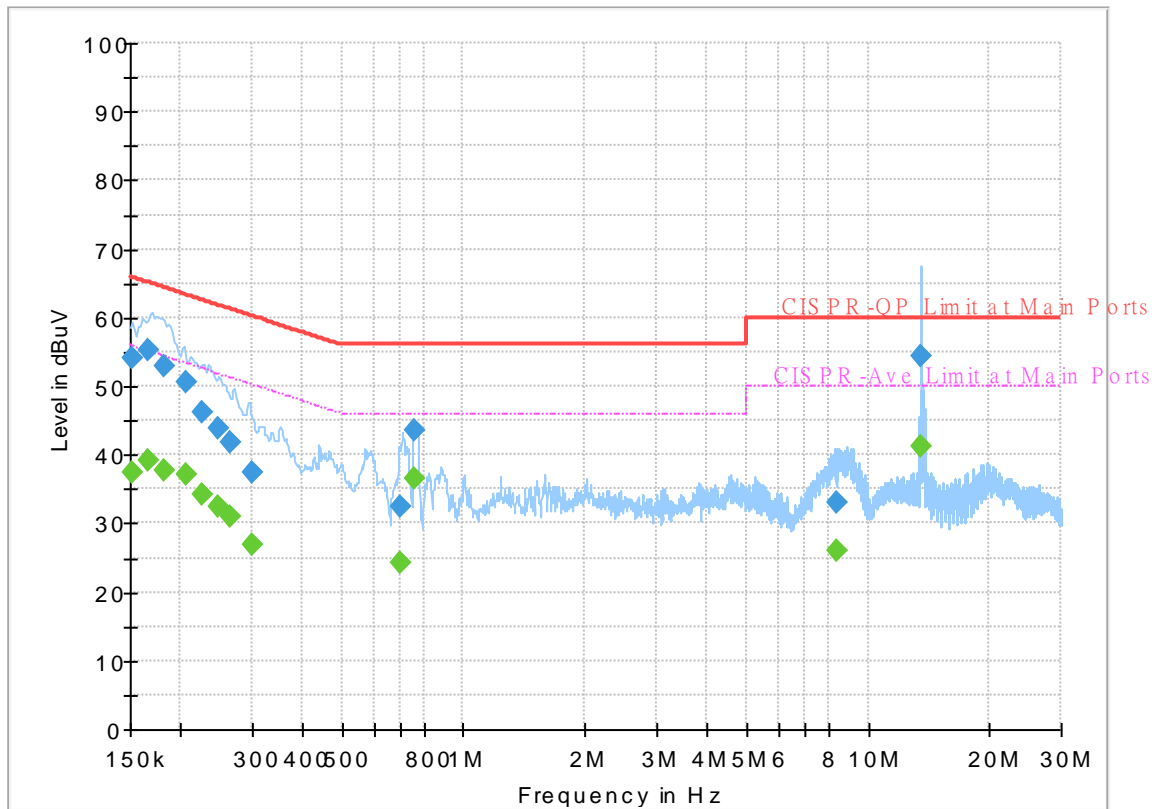


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.33	55.88	18.55	L1	OFF	19.5
0.152250	54.22	---	65.88	11.66	L1	OFF	19.5
0.165750	---	39.28	55.17	15.89	L1	OFF	19.5
0.165750	55.21	---	65.17	9.96	L1	OFF	19.5
0.181500	---	37.59	54.42	16.83	L1	OFF	19.5
0.181500	52.98	---	64.42	11.44	L1	OFF	19.5
0.206250	---	37.04	53.36	16.32	L1	OFF	19.5
0.206250	50.59	---	63.36	12.77	L1	OFF	19.5
0.226500	---	34.07	52.58	18.51	L1	OFF	19.5
0.226500	46.21	---	62.58	16.37	L1	OFF	19.5
0.248714	---	32.57	51.80	19.23	L1	OFF	19.5
0.248714	43.83	---	61.80	17.97	L1	OFF	19.5
0.265020	---	30.99	51.27	20.28	L1	OFF	19.5
0.265020	41.73	---	61.27	19.54	L1	OFF	19.5
0.299670	---	27.01	50.25	23.24	L1	OFF	19.5
0.299670	37.38	---	60.25	22.87	L1	OFF	19.5
0.701250	---	24.21	46.00	21.79	L1	OFF	19.5
0.701250	32.56	---	56.00	23.44	L1	OFF	19.5
0.755160	---	36.56	46.00	9.44	L1	OFF	19.5
0.755160	43.56	---	56.00	12.44	L1	OFF	19.5
8.338920	---	25.88	50.00	24.12	L1	OFF	19.8
8.338920	33.07	---	60.00	26.93	L1	OFF	19.8
13.560000	---	41.19	50.00	8.81	L1	OFF	19.8
13.560000	54.34	---	60.00	5.66	L1	OFF	19.8

EUT Information

Report NO : 072944
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

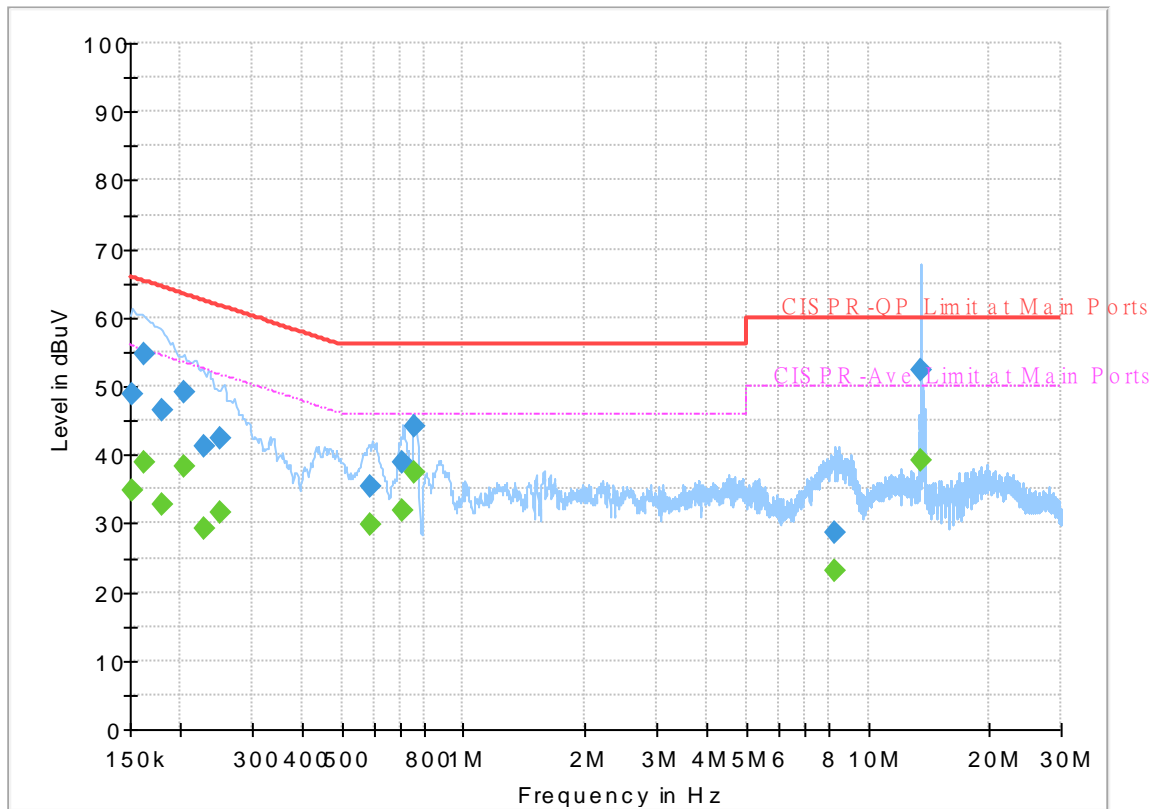

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	34.83	55.88	21.05	N	OFF	19.5
0.152250	48.90	---	65.88	16.98	N	OFF	19.5
0.161610	---	39.02	55.38	16.36	N	OFF	19.5
0.161610	54.65	---	65.38	10.73	N	OFF	19.5
0.179250	---	32.67	54.52	21.85	N	OFF	19.5
0.179250	46.62	---	64.52	17.90	N	OFF	19.5
0.204450	---	38.18	53.43	15.25	N	OFF	19.5
0.204450	49.09	---	63.43	14.34	N	OFF	19.5
0.229560	---	29.38	52.47	23.09	N	OFF	19.5
0.229560	41.08	---	62.47	21.39	N	OFF	19.5
0.251250	---	31.48	51.72	20.24	N	OFF	19.5
0.251250	42.52	---	61.72	19.20	N	OFF	19.5
0.589740	---	29.76	46.00	16.24	N	OFF	19.5
0.589740	35.30	---	56.00	20.70	N	OFF	19.5
0.707280	---	32.01	46.00	13.99	N	OFF	19.5
0.707280	38.99	---	56.00	17.01	N	OFF	19.5
0.755250	---	37.36	46.00	8.64	N	OFF	19.6
0.755250	44.05	---	56.00	11.95	N	OFF	19.6
8.296440	---	23.14	50.00	26.86	N	OFF	19.8
8.296440	28.65	---	60.00	31.35	N	OFF	19.8
13.560000	---	39.30	50.00	10.70	N	OFF	19.9
13.560000	52.31	---	60.00	7.69	N	OFF	19.9



Appendix B. Radiated Spurious Emission

Test Engineer :	Andy Yang, Karl Hou, and CR Liao	Temperature :	20~25°C
		Relative Humidity :	50~65%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2356.725	47.36	-26.64	74	40.86	27.77	8.5	29.77	246	194	P	H	
		2356.725	22.6	-31.4	54	-	-	-	-	-	-	A	H	
	*	2402	103.16	-	-	96.77	27.6	8.58	29.79	246	194	P	H	
	*	2402	78.4	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2378.04	47.66	-26.34	74	41.21	27.69	8.54	29.78	355	98	P	V
			2378.04	22.9	-31.1	54	-	-	-	-	-	-	A	V
	*		2402	94.84	-	-	88.45	27.6	8.58	29.79	355	98	P	V
	*		2402	70.08	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2374.54	47.66	-26.34	74	41.21	27.7	8.53	29.78	249	192	P	H	
		2374.54	22.9	-31.1	54	-	-	-	-	-	-	A	H	
	*	2441	104.93	-	-	98.48	27.6	8.66	29.81	249	192	P	H	
	*	2441	80.17	-	-	-	-	-	-	-	-	A	H	
			2499.23	47.56	-26.44	74	41.12	27.5	8.77	29.83	249	192	P	H
			2499.23	22.8	-31.2	54	-	-	-	-	-	-	A	H
			2361.1	47.33	-26.67	74	40.83	27.76	8.51	29.77	341	102	P	V
			2361.1	22.57	-31.43	54	-	-	-	-	-	-	A	V
	*		2441	96.55	-	-	90.1	27.6	8.66	29.81	341	102	P	V
	*		2441	71.79	-	-	-	-	-	-	-	-	A	V
			2486.49	47.11	-26.89	74	40.65	27.53	8.75	29.82	341	102	P	V
			2486.49	22.35	-31.65	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	105.42	-	-	98.96	27.54	8.74	29.82	334	189	P	H
		2480	80.66	26.66	54	-	-	-	-	-	-	A	H
		2483.84	51.58	-22.42	74	45.13	27.53	8.74	29.82	334	189	P	H
		2483.84	26.82	-27.18	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	97.59	-	-	91.13	27.54	8.74	29.82	352	90	P	V
		2480	72.83	18.83	54	-	-	-	-	-	-	A	V
		2485.76	48.86	-25.14	74	42.4	27.53	8.75	29.82	352	90	P	V
		2485.76	24.1	-29.9	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 00 2402MHz		4804	42.7	-31.3	74	57.31	31.11	13.36	59.08	100	0	P	H	
		4804	17.94	-36.06	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	42.99	-31.01	74	57.6	31.11	13.36	59.08	100	0	P	V	
		4804	18.23	-35.77	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	44.11	-29.89	74	58.81	31.07	13.36	59.13	100	0	P	H	
		4882	19.35	-34.65	54	-	-	-	-	-	-	A	H	
		7323	47.07	-26.93	74	52.94	36.49	16.19	58.55	100	0	P	H	
		7323	22.31	-31.69	54	-	-	-	-	-	-	A	H	
		4882	41.89	-32.11	74	56.59	31.07	13.36	59.13	100	0	P	V	
		4882	17.13	-36.87	54	-	-	-	-	-	-	A	V	
		7323	46.93	-27.07	74	52.8	36.49	16.19	58.55	100	0	P	V	
		7323	22.17	-31.83	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4960	41.06	-32.94	74	55.62	31.26	13.36	59.18	100	0	P	H	
		4960	16.3	-37.7	54	-	-	-	-	-	-	A	H	
		7440	46.86	-27.14	74	52.27	36.58	16.39	58.38	100	0	P	H	
		7440	22.1	-31.9	54	-	-	-	-	-	-	A	H	
		4960	41.64	-32.36	74	56.2	31.26	13.36	59.18	100	0	P	V	
		4960	16.88	-37.12	54	-	-	-	-	-	-	A	V	
		7440	46.88	-27.12	74	52.29	36.58	16.39	58.38	100	0	P	V	
		7440	22.12	-31.88	54	-	-	-	-	-	-	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission above 18GHz

2.4GHz BT (SHF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT SHF		24489	38.68	-35.32	74	38.75	40.11	13.32	53.5	150	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24650	39.22	-34.78	74	39.27	40.01	13.44	53.5	150	0	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BT LF		30.97	22.01	-17.99	40	29.46	24.09	0.67	32.21	-	-	P	H	
		78.5	19.52	-20.48	40	37.5	13.08	1.27	32.33	-	-	P	H	
		118.27	26.21	-17.29	43.5	39.51	17.27	1.69	32.26	100	0	P	H	
		261.83	20.83	-25.17	46	30.41	20.08	2.68	32.34	-	-	P	H	
		389.87	26.09	-19.91	46	33.58	21.43	3.3	32.22	-	-	P	H	
		576.11	28.4	-17.6	46	30.5	25.79	4.07	31.96	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			42.61	26.55	-13.45	40	40.12	17.95	0.82	32.34	100	0	P	V
			74.62	23.08	-16.92	40	41.56	12.62	1.24	32.34	-	-	P	V
			113.42	20.76	-22.74	43.5	34.3	17.09	1.63	32.26	-	-	P	V
			136.7	20.55	-22.95	43.5	33.61	17.38	1.84	32.28	-	-	P	V
			392.78	25.7	-20.3	46	33.04	21.56	3.31	32.21	-	-	P	V
			443.22	28	-18	46	33.64	23	3.51	32.15	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots



Test Engineer :	Andy Yang, Karl Hou, and CR Liao	Temperature :	20~25°C
		Relative Humidity :	50~65%

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>


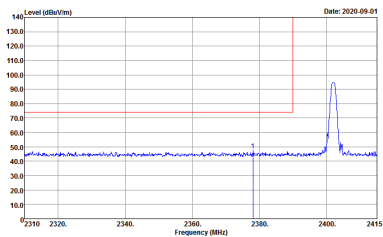
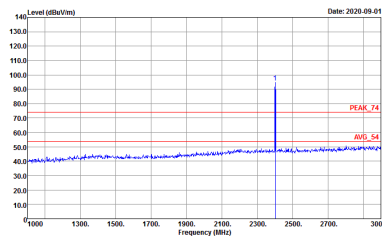


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH6-11Y Condition : PEAK_BE_74 3m 91200_1522 VERTICAL Detector : Peak Project : 072944</p>	 <p>Site : 03CH6-11Y Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 072944</p>

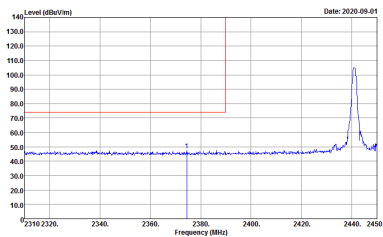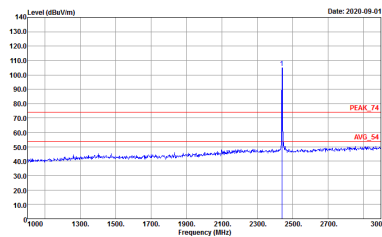
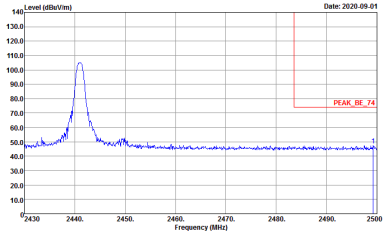


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2020-09-01</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>	 <p>Date: 2020-09-01</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>
Peak	 <p>Date: 2020-09-01</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>	Left blank

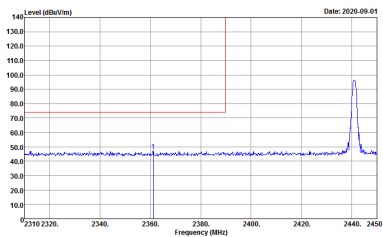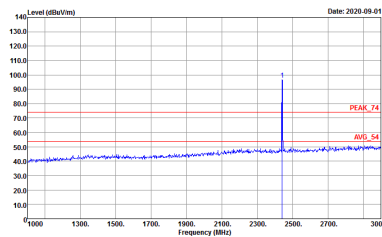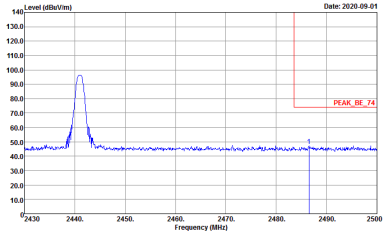

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>	Left blank

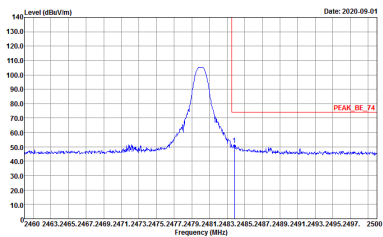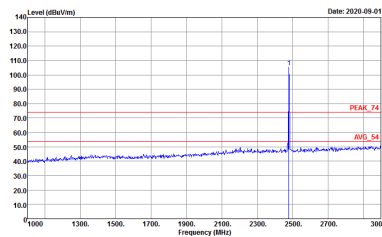

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Date: 2020-09-01</p> <p>Site : 03CH6-11Y Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>	 <p>Date: 2020-09-01</p> <p>Site : 03CH6-11Y Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH6-11Y Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>	<p>Site : 03CH6-11Y Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 072944</p>





2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

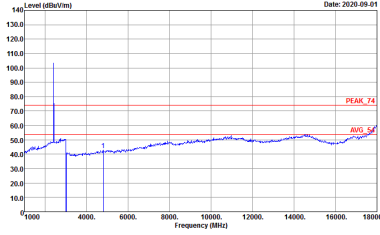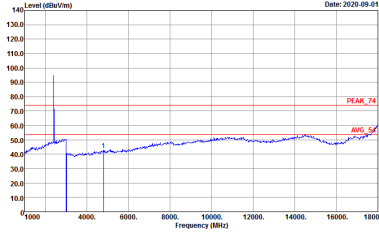BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 072944</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 072944</p>

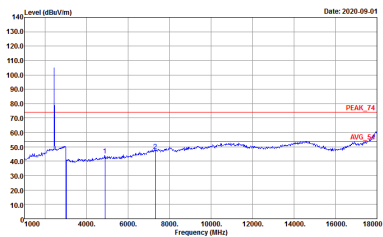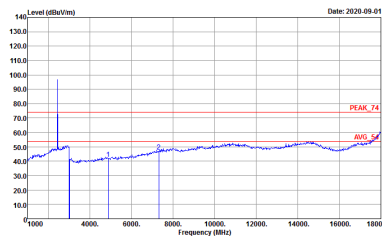

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH39 2441MHz		
Horizontal		Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH16-11Y Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 072944</p>	 <p>Site : 03CH16-11Y Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 072944</p>

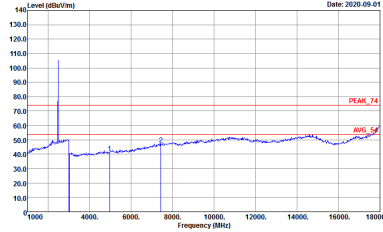
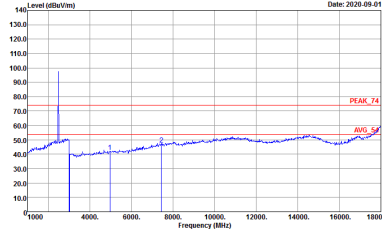


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH78 2480MHz		
Horizontal		Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-11Y Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 072944</p>	 <p>Site : 03CH16-11Y Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 072944</p>



Emission above 18GHz



2.4GHz BT (SHF)

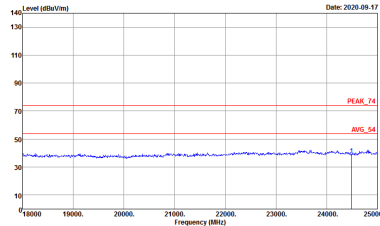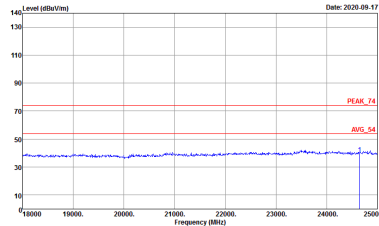BT	2.4GHz 2400~2483.5MHz	
	BT SHF	
	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 1m SHF HORN 88HA9170584 HORIZONTAL Detector : Peak Project : 072944</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 1m SHF HORN 88HA9170584 VERTICAL Detector : Peak Project : 072944</p>



Emission below 1GHz


2.4GHz BT (LF)

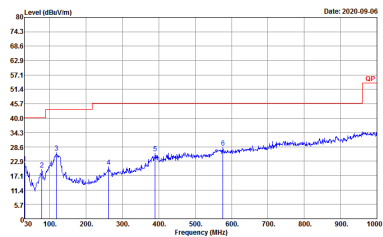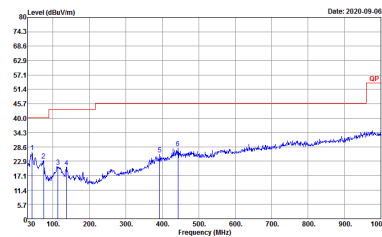BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 <p data-bbox="430 873 670 929">Site : 03CH16-HY Condition : QP 3m BIL06_47020606 HORIZONTAL Detector : Peak Project : 072944</p>	 <p data-bbox="901 873 1141 929">Site : 03CH16-HY Condition : QP 3m BIL06_47020606 VERTICAL Detector : Peak Project : 072944</p>




Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

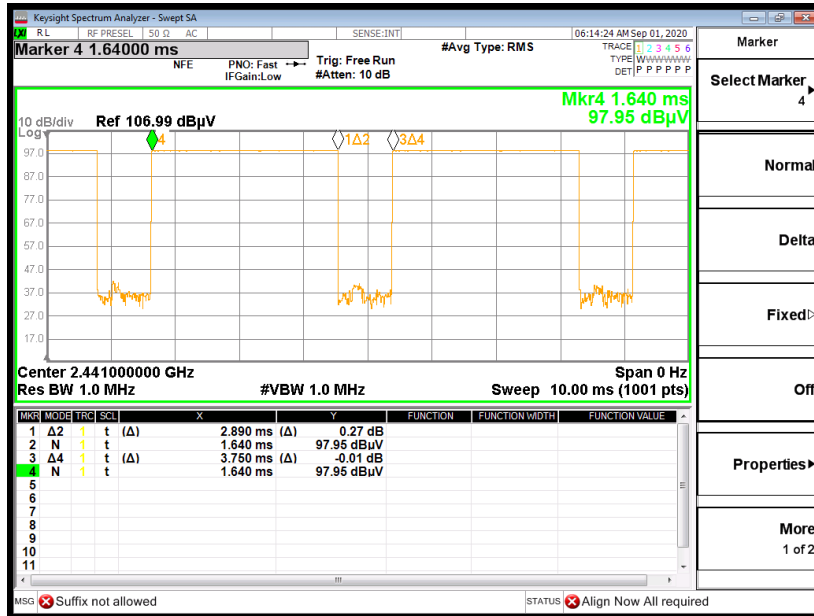

on time (Count Pulses) Plot on Channel 39

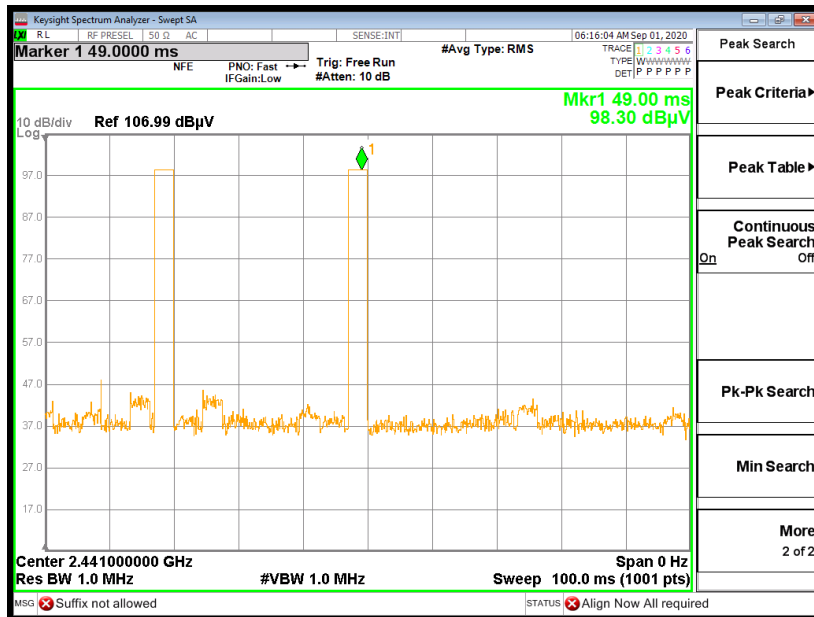

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.8 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100 \text{ ms}) = -24.76 \text{ dB}$$