



A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.
Tel : +886--271-0188 / Fax : +886-3-271-0190



SAR EVALUATION REPORT

Test Report No.	:	0712FS14
Applicant	:	BandRich Inc.
FCC ID	:	UZI-C105
Product Type	:	HSDPA ExpressCard
Trade Mark	:	BandLuxe™
Model Number	:	C105
Dates of Test	:	Dec. 26, 2007 ~ Jan. 16, 2008
Test Environment	:	Ambient Temperature : 22 ± 3 ° C Relative Humidity : 40 - 70 %
Test Specification	:	Standard C95.1-1999 IEEE Std. 1528-2003 FCC SAR Measurement Procedures for 3G Devices
Max. SAR	:	1.560 W/kg Body SAR
Test Lab	:	Changan Lab



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full.


Country Huang 20080117
Measurement Center Manager


Sam Chuang 20080117
Testing Engineer



Contents

1. Description of Equipment Under Test (EUT)	3
2. Introduction	5
3. SAR Definition	6
4. SAR Measurement Setup	7
5. System Components	9
5.1 DASY4 E-Field Probe System	9
5.2 Data Acquisition Electronic (DAE) System	11
5.3 Robot.....	12
5.4 Measurement Server	12
5.5 Device Holder for Transmitters.....	12
5.6 Phantom - SAM v4.0.....	13
5.7 Data Storage and Evaluation.....	13
6. Test Equipment List	16
7. Tissue Simulating Liquids	17
7.1 Liquid Confirmation	18
8. Measurement Process	20
8.1 Device and Test Conditions	20
8.2 System Performance Check.....	21
8.4 Spatial Peak SAR Evaluation	25
9. Measurement Uncertainty	26
10. SAR Test Results Summary	28
10.1 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Open) Setup Top to phantom 0mm	29
10.2 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Close) Setup Top to phantom 0mm.....	30
10.3 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Open) Setup Tip to phantom 0mm	31
10.4 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Close) Setup Tip to phantom 0mm.....	32
10.5 Test Setup Photo	33
10.6 Std. C95.1-1999 RF Exposure Limit.....	45
11. Conclusion	46
12. References	47
Appendix A - System Performance Check	48
Appendix B - SAR Measurement Data	54
Appendix C - Calibration	93



1. Description of Equipment Under Test (EUT)

Applicant : **BandRich Inc.**
No. 188, 4F, Sec. 2, Jhong-Sing Rd, Sin-Dian City, Taipei County 23146, Taiwan

Manufacturer : Kenmec Mechanical Engineering CO., LTD
Manufacturer Address : No. 5, Tzu-Chiang 1st Road, Chungli Industrial Zone, Taoyuan Hsien, Taiwan
FCC ID : UZI-C105
Model Name : HSDPA ExpressCard
Trade Mark : BandLuxe™
Model Number : C105
Test Device : Production Unit
Tx Frequency : 1712.4 -1752.6 MHz (UMTS FDD IV / HSDPA)
Max. RF Conducted Power : 0.238 W (23.76 dBm) UMTS FDD IV / HSDPA
Max. SAR Measurement : 1.560 W/kg Body SAR
HW Version : BandRich_C105_HW_01
SW Version : 405070_001_029
Antenna Type : Internal Type
Antenna Gain : -4 dBi
Device Category : Portable
RF Exposure Environment : General Population / Uncontrolled
Battery Option : Standard
Application Type : Certification

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.

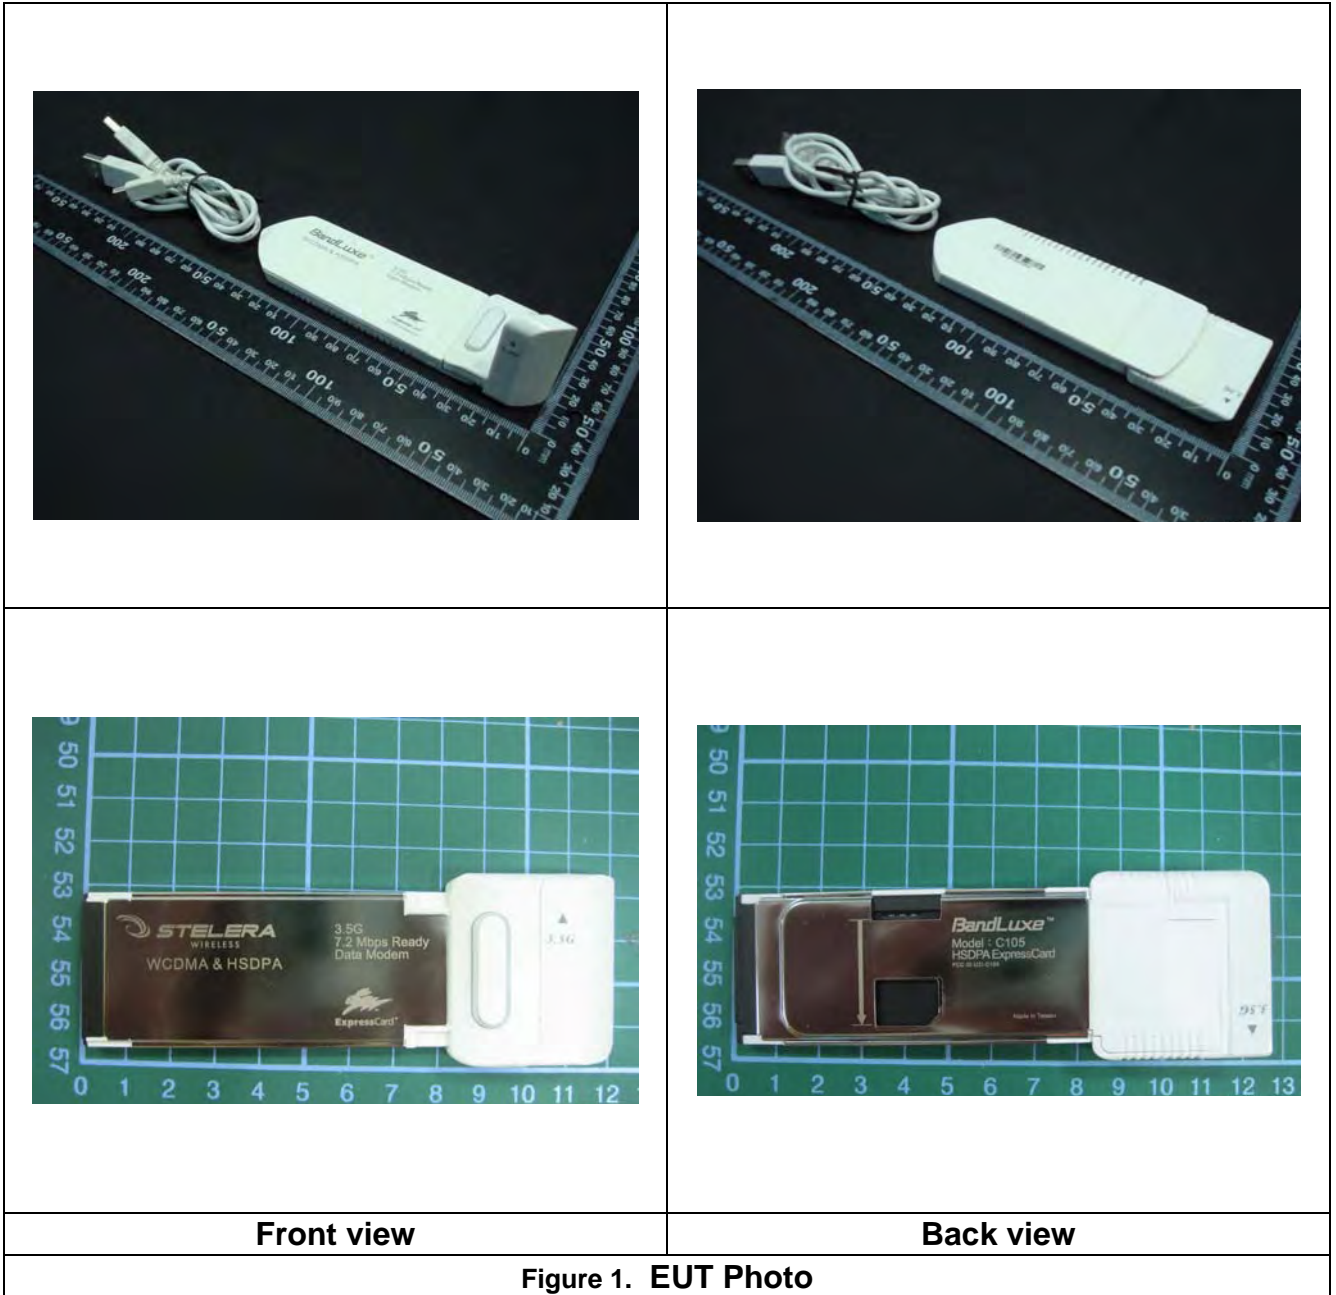


Figure 1. EUT Photo



2. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **BandRich Inc. Trade Mark : BandLuxe™ Model(s) : C105**. The test procedures, as described in American National Standards, Institute C95.1 - 1999 [1] , FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.



3. SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

* **Note** :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]



4. SAR Measurement Setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.025\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Measurement Server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The PC consists of the Intel Pentium 4 2.4GHz computer with Windows2000 system and SAR Measurement Software DASY4, Post Processor SEMCAD, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection...etc. is connected to the Electro-optical converter (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the Measurement Server.

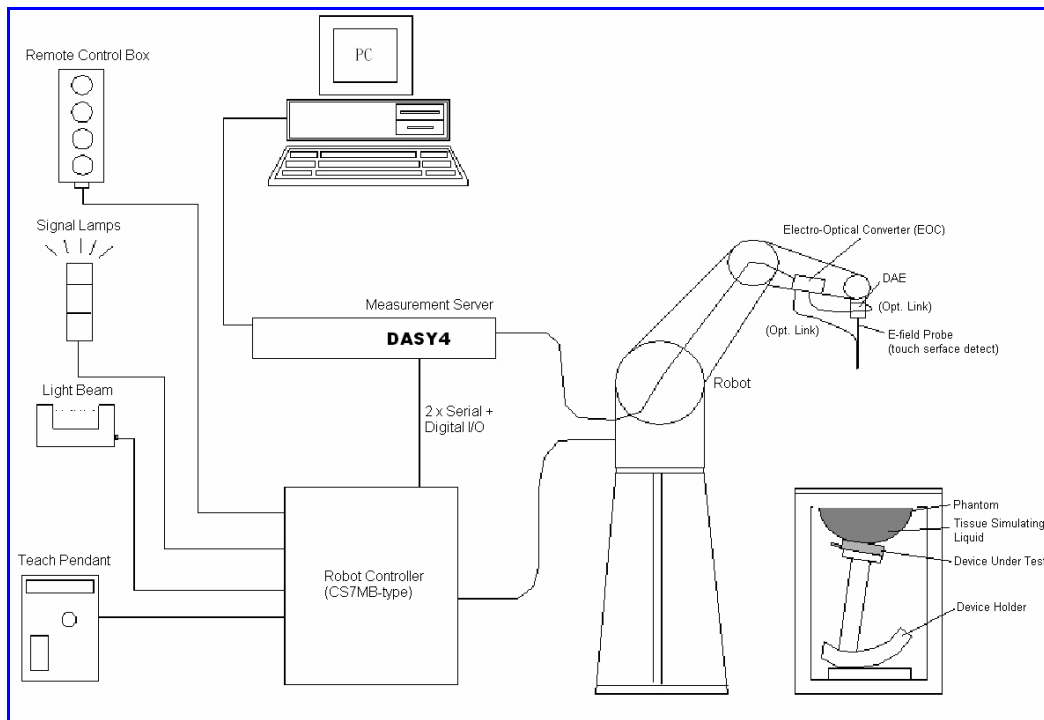


Figure 3. SAR Lab Test Measurement Setup



The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [3] .



5. System Components

5.1 DASYS4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASYS4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

5.1.1 ET3DV6 E-Field Probe Specification

Construction	<p>Symmetrical design with triangular core</p> <p>Built-in optical fiber for surface detection System (EX3DV3 only)</p> <p>Built-in shielding against static charges</p> <p>PEEK enclosure material (resistant to organic solvents, e.q., glycol)</p>
Calibration	<p>In air from 10 MHz to 6 GHz</p> <p>In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz, 1800MHz, 2000MHz and 2450MHz (accuracy $\pm 8\%$)</p> <p>Calibration for other liquids and frequencies upon request</p>
Frequency	<p>10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p>
Directivity	<p>± 0.3 dB in brain tissue (rotation around probe axis)</p> <p>± 0.5 dB in brain tissue (rotation normal probe axis)</p>
Dynamic Range	<p>10 μ W/g to > 100mW/g; Linearity: ± 0.2dB</p>
Surface Detection	<p>± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surface(EX3DV3 only)</p>
Dimensions	<p>Overall length: 330mm</p> <p>Tip length: 20mm</p> <p>Body diameter: 12mm</p> <p>Tip diameter: 2.5mm</p> <p>Distance from probe tip to dipole centers: 1.0mm</p>
Application	<p>General dosimetry up to 6GHz</p> <p>Compliance tests of mobile phones</p> <p>Fast automatic scanning in arbitrary phantoms</p>



Figure 4.
ET3DV6 E-field Probe



Figure 5.
Probe setup on robot



5.1.2 ET3DV6 E-Field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in [4] with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [5] and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1GHz, and in a wave guide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

5.2 Data Acquisition Electronic (DAE) System

Cell Controller

Processor : Intel Pentium 4
Clock Speed : 2.4GHz
Operating System : Windows XP Professional

Data Converter

Features : Signal Amplifier, multiplexer, A/D converter, and control logic
Software : DASY4 v4.7 (Build 55) & SEMCAD v1.8 (Build 176)
Connecting Lines : Optical downlink for data and status info
Optical uplink for commands and clock



5.3 Robot

Positioner : Stäubli Unimation Corp. Robot Model: RX90L
Repeatability : ± 0.025 mm
No. of Axis : 6

5.4 Measurement Server

Processor : PC/104 with a 166MHz low-power Pentium
I/O-board : Link to DAE3
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

5.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the IEEE SCC34-SC2 and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

***Note** : A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [6] . To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Larger DUT cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.

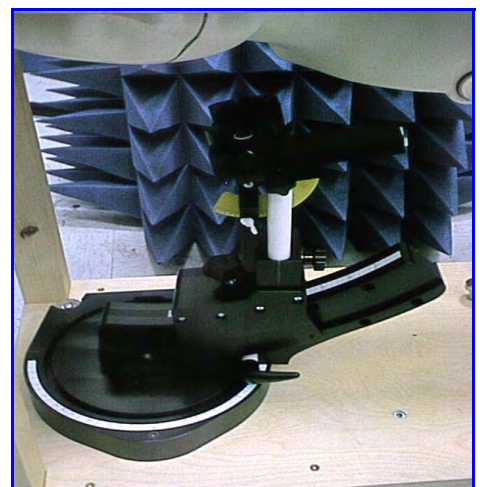


Figure 6. Device Holder

5.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

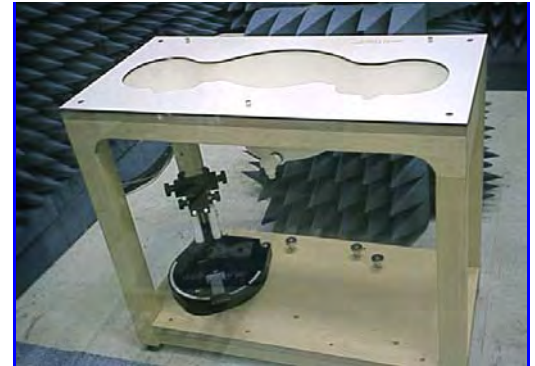


Figure 7. SAM Twin Phantom

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	810x1000x500 mm (HxLxW)

Table 1. Specification of SAM v4.0

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.



5.7.2 Data Evaluation

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

E-field probes :

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$



H-field probes :

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

$\mu V/(V/m)^2$ for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

***Note :** that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm^2

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



6. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1531	Jan. 22, 2007	Jan. 22, 2008
SPEAG	1800MHz System Validation Kit	D1800V2	2d057	Jan. 23, 2007	Jan. 23, 2008
SPEAG	1800MHz System Validation Kit	D1800V2	265	Aug. 28,2007	Aug. 28,2008
SPEAG	Data Acquisition Electronics	DAE4	541	Nov. 15, 2007	Nov. 15, 2008
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	Phantom	SAM V4.0	1009	NCR	NCR
SPEAG	Robot	Staubli RX90L	F00/589B1/A/01	NCR	NCR
SPEAG	Software	DASY4 V4.7 Build 55	N/A	NCR	NCR
SPEAG	Software	SEMCAD V1.8 Build 176	N/A	NCR	NCR
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR
R&S	Wireless Communication Test Set	CMU200	112387	Apr. 02, 2007	Apr. 02, 2008
Agilent	ENA Series Network Analyzer	E5071B	MY42404650	Jan. 19, 2007	Jan. 19, 2008
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	NCR
Agilent	Power Meter	E4418B	GB40206143	Apr. 24, 2007	Apr. 24, 2008
Agilent	Power Sensor	8481H	3318A20779	Apr. 25, 2007	Apr. 25, 2008
Agilent	Signal Generator	8648C	3847A05201	Jul. 03, 2007	Jul. 03, 2008
Agilent	Dual Directional Coupler	778D	50334	NCR	NCR
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	NCR
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	NCR

Table 2. Test Equipment List



7. Tissue Simulating Liquids

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an 8720ES Network Analyzer.

INGREDIENT	FREQUENCY	
	HSL5G (Head)	MSL5G (Body)
Water	64%	78%
Mineral Oil	18%	11%
Emulsifiers	15%	9%
Additives and Salt	3%	2%

Table 3. Recipes for Head & Body Tissue Simulating Liquids

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.



Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Table 4. Tissue dielectric parameters for head and body phantoms

7.1 Liquid Confirmation

7.1.1 Parameters

Liquid Verify								
Ambient Temperature : $22 \pm 3 \text{ }^\circ\text{C}$; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp ($^\circ\text{C}$)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
1800MHz Body	1800MHz	22.0	ϵ_r	53.3	52.3	-1.88	± 5	Dec. 26, 2007
			σ	1.52	1.54	1.32	± 5	
1800MHz Body	1800MHz	22.0	ϵ_r	53.3	52.3	-1.88	± 5	Jan. 06, 2008
			σ	1.52	1.54	1.32	± 5	
1800MHz Body	1800MHz	22.0	ϵ_r	53.3	52.3	-1.88	± 5	Jan. 16, 2008
			σ	1.52	1.54	1.32	± 5	

Table 5. Measured Tissue dielectric parameters for head and body phantoms

7.1.2 Liquid Depth

The liquid level was during measurement 15cm \pm 0.5cm.

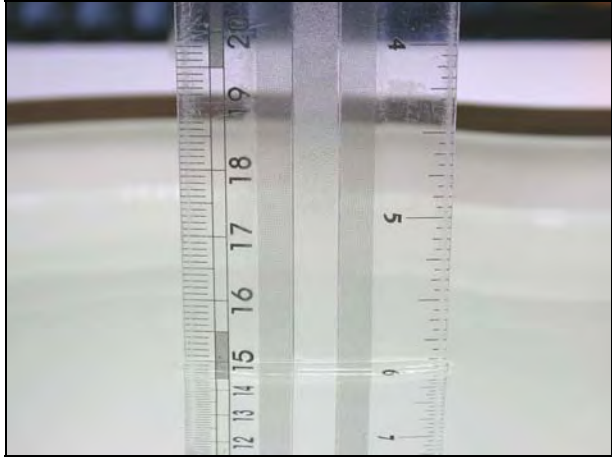


Figure 8. Head-Tissue-Simulating-Liquid



Figure 9. Body-Tissue-Simulating-Liquid



8. Measurement Process

8.1 Device and Test Conditions

The Test Device was provided by **BandRich Inc.** for this evaluation. The device was put in operation using the R&S CMU200 wireless Communication Test Set. Communication between device and tester was established by air-link in order to simulate the actual usage as close as possible. The spatial peak SAR values were assessed for the lowest, middle and highest channels defined by UMTS FDD IV / HSDPA (#1312=1712.4MHz, #1412=1732.4MHz, #1513=1752.6MHz) systems. Power level was set to its maximum, i.e., UMTS FDD IV/HSDPA nominal maximum output power (23dBm). The antenna(s) and accessories shall be those specified by the manufacturer.

Usage		N/A			
Distance between antenna axis at the joint and the liquid surface:		For Body _ DELL PP19L, EUT Top to phantom, 0mm separation. For Body _ DELL PP19L, EUT Tip to phantom, 0mm separation. For Body _ DELL PP20L, EUT Top to phantom, 0mm separation. For Body _ DELL PP20L, EUT Tip to phantom, 0mm separation. For Body _ ASUS A6R, EUT Top to phantom, 0mm separation. For Body _ ASUS A6R, EUT Tip to phantom, 0mm separation.			
Simulating human Head/Body		Body			
EUT Battery		NA			
Conducted power	Band	Channel	Frequency (MHz)	Before SAR Test (dBm)	After SAR Test (dBm)
	UMTS FDD IV HSDPA	Highest - 1513	1712.4	23.14	23.13
		Middle - 1412	1732.4	23.35	23.34
		Lowest - 1312	1752.6	23.76	23.75

8.2 System Performance Check

8.2.1 Symmetric Dipoles for System Validation

Construction	Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	450, 900, 1800, 2000, 2450MHz
Return Loss	> 20 dB at specified validation position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D450V2 : dipole length 270 mm; overall height 330 mm D900V2 : dipole length 149 mm; overall height 330 mm D1800V2 : dipole length 72 mm; overall height 300 mm D2000V2 : dipole length 65 mm; overall height 300 mm D2450V2 : dipole length 51.5 mm; overall height 300 mm



Figure 10. Validation Kit



8.2.2 Validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 7\%$. The validation was performed at 1800MHz.

Validation kit		Mixture Type	SAR _{1g} [mW/g]		SAR _{10g} [mW/g]	Date of Calibration	
D1800V2-SN2d057		Body	38.28		20.64	Jan. 23, 2007	
D1800V2-SN265		Body	37.6		20.56	Aug. 28, 2007	
Frequency (MHz)	Power (dBm)	SAR _{1g} (mW/g)	SAR _{10g} (mW/g)	Drift (dB)	Difference percentage		Date
					1g	10g	
1800 (Body)	250mW	9.64	5.24	-0.116	0.7 %	1.6 %	Dec. 26, 2007
	Normalize to 1 Watt	38.56	20.96				
1800 (Body)	250mW	9.99	5.36	-0.135	4.4 %	3.9 %	Jan. 06, 2008
	Normalize to 1 Watt	39.96	21.44				
1800 (Body)	250mW	9.47	5.14	-0.02	0.7 %	0.0 %	Jan. 16, 2008
	Normalize to 1 Watt	37.88	20.56				



8.3 Dosimetric Assessment Setup

8.3.1 Headset Test Position - Body-Worn

Body-Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a handset output should be tested with a handset connected to the device.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances.

For this test :

The EUT is placed into the holster/belt clip and the holster is positioned against the surface of the phantom in a normal operating position.

Since this EUT doesn't supply any body-worn accessory to the end user, a distance of 2.0 mm was tested to confirm the necessary "minimum SAR separation distance".

(* Note : This distance includes the 2 mm phantom shell thickness.)



8.3.2 Measurement Procedures

The evaluation was performed with the following procedures :

- Surface Check :** A surface check job gathers data used with optical surface detection. It determines the distance from the phantom surface where the reflection from the optical detector has its peak. Any following measurement jobs using optical surface detection will then rely on this value. The surface check performs its search a specified number of times, so that the repeatability can be verified. The probe tip distance is 1.3mm to phantom inner surface during scans.
- Reference :** The reference job measures the field at a specified reference position, at 4 mm from the selected section's grid reference point.
- Area Scan :** The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines can find the maximum locations even in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. Any following zoom scan within the same procedure will then perform fine scans around these maxima. The area covered the entire dimension of the EUT and the horizontal grid spacing was 10 mm x 10 mm.
- Zoom Scan :** Zoom scans are used to assess the highest averaged SAR for cubic averaging volumes with 1 g and 10 g of simulated tissue. The zoom scan measures 7 x 7 x 9 points in a 24 x 24 x 20 mm cube whose base faces are centered around the maxima returned from a preceding area scan within the same procedure.
- Drift :** The drift job measures the field at the same location as the most recent reference job within the same procedure, with the same settings. The drift measurement gives the field difference in dB from the last reference measurement. Several drift measurements are possible for each reference measurement. This allows monitoring of the power drift of the device in the batch process. If the value changed by more than 5%, the evaluation was repeated.



8.4 Spatial Peak SAR Evaluation

The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. Based on the Draft: SCC-34, SC-2, WG-2 - Computational Dosimetry, IEEE P1529/D0.0 (Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) Associated with the Use of Wireless Handsets - Computational Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a “cube” measurement in a volume of $(24 \times 24 \times 20) \text{mm}^3$ (7x7x9points). The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location.

The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into three stages:

Interpolation and Extrapolation

The probe is calibrated at the center of the dipole sensors which is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY4, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and SAR extrapolation routines. The interpolation, Maxima Search and extrapolation routines are all based on the modified Quadratic Shepard's method [7].



9. Measurement Uncertainty

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than $\pm 27\%$ [8] .

According to Std. C95.3 [9] , the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC [10] , typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.



Source of Uncertainty	Uncertainty Value	Probability Distribution	Divisor	C_i	Standard Uncertainty $\pm 1\%(1-g)$	V_i or V_{eff}
Type-A	0.9 %	Normal	1	1	0.9	9
Measurement System						
Probe Calibration	7 %	Normal	2	1	3.5	∞
Axial Isotropy	0.2dB	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
Hemispherical Isotropy	9.6 %	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
Spatial Resolution	0 %	Rectangular	$\sqrt{3}$	1	0	∞
Boundary Effect	11.0 %	Rectangular	$\sqrt{3}$	1	6.4	∞
Linearity	0.2dB	Rectangular	$\sqrt{3}$	1	2.7	∞
Detection Limit	1.0 %	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	1.0 %	Normal	1	1	1.0	∞
RF Ambient Conditions	3.0 %	Rectangular	$\sqrt{3}$	1	1.73	∞
Probe Positioner Mech. Const.	0.4 %	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning	0.35 %	Rectangular	$\sqrt{3}$	1	0.2	∞
Extrapolation and Integration	3.9 %	Rectangular	$\sqrt{3}$	1	2.3	∞
Test sample Related						
Test sample Positioning	4.7 %	Normal	1	1	4.7	5
Device Holder Uncertainty	6.1 %	Normal	1	1	6.1	5
Drift of Output Power	5.0 %	Rectangular	$\sqrt{3}$	1	2.9	∞
Phantom and Setup						
Phantom Uncertainty (Including temperature effects)	4.0%	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Conductivity (meas.)	10.0%	Rectangular	$\sqrt{3}$	0.6	3.4	∞
Liquid Permittivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity (meas.)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Combined standard uncertainty		RSS			13.5	88.7
Expanded uncertainty (Coverage factor = 2)		Normal (k=2)			27	

Table 6. Uncertainty Budget of DASY



10. SAR Test Results Summary

The test used Notebooks, listed in table.

No.	Trademark	Model
NB No.1	DELL	PP19L
NB No.2	DELL	PP20L
NB No.3	ASUS	A6R



10.1 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Open)
Setup Top to phantom 0mm

Ambient :
 Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70
Liquid :
 Mixture Type : MSL1800 Liquid Temperature (°C) : 22.0
 Depth of liquid (cm) : 15
Measurement :
 Crest Factor : 1 Probe S/N : 1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
1712.4	1312	N/A	Flat	N/A	0.341	-0.034	22.0	22.0	NB No.1
1712.4	1312	N/A	Flat	N/A	0.201	-0.144	22.0	22.0	NB No.2
1712.4	1312	N/A	Flat	N/A	0.328	0.020	22.0	22.0	NB No.3
1732.4	1412	N/A	Flat	N/A	0.537	-0.071	22.0	22.0	NB No.1
1732.4	1412	N/A	Flat	N/A	0.287	0.022	22.0	22.0	NB No.2
1712.4	1312	N/A	Flat	N/A	0.441	0.196	22.0	22.0	NB No.3
1752.6	1513	N/A	Flat	N/A	0.448	0.028	22.0	22.0	NB No.1
1752.6	1513	N/A	Flat	N/A	0.261	-0.117	22.0	22.0	NB No.2
1712.4	1312	N/A	Flat	N/A	0.425	0.032	22.0	22.0	NB No.3
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram				



10.2 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Close)
Setup Top to phantom 0mm

Ambient :
 Temperature (°C) : 22 ± 3 Relative HUMIDITY (%) : 40 - 70
Liquid :
 Mixture Type : MSL1800 Liquid Temperature (°C) : 22.0
 Depth of liquid (cm) : 15
Measurement :
 Crest Factor : 1 Probe S/N : 1531

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
1712.4	1312	N/A	Flat	N/A	0.929	0.024	22.0	22.0	NB No.1
1712.4	1312	N/A	Flat	N/A	0.413	0.005	22.0	22.0	NB No.2
1712.4	1312	N/A	Flat	N/A	0.977	-0.041	22.0	22.0	NB No.3
1732.4	1412	N/A	Flat	N/A	1.330	0.116	22.0	22.0	NB No.1
1732.4	1412	N/A	Flat	N/A	0.531	-0.092	22.0	22.0	NB No.2
1732.4	1412	N/A	Flat	N/A	1.200	-0.066	22.0	22.0	NB No.3
1752.6	1513	N/A	Flat	N/A	1.290	-0.007	22.0	22.0	NB No.1
1752.6	1513	N/A	Flat	N/A	0.636	-0.114	22.0	22.0	NB No.2
1752.6	1513	N/A	Flat	N/A	1.530	-0.141	22.0	22.0	NB No.3
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram				



10.3 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Open) Setup Tip to phantom 0mm

Ambient :			
Temperature (°C) :	<u>22 ± 3</u>	Relative HUMIDITY (%) :	<u>40 - 70</u>
Liquid :			
Mixture Type :	<u>MSL1800</u>	Liquid Temperature (°C) :	<u>22.0</u>
		Depth of liquid (cm) :	<u>15</u>
Measurement :			
Crest Factor :	<u>1</u>	Probe S/N :	<u>1531</u>

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
1712.4	1312	N/A	Flat	N/A	0.744	0.018	22.0	22.0	NB No.1
1712.4	1312	N/A	Flat	N/A	0.397	0.179	22.0	22.0	NB No.2
1712.4	1312	N/A	Flat	N/A	0.264	-0.016	22.0	22.0	NB No.3
1732.4	1412	N/A	Flat	N/A	0.822	-0.162	22.0	22.0	NB No.1
1732.4	1412	N/A	Flat	N/A	0.518	-0.058	22.0	22.0	NB No.2
1732.4	1412	N/A	Flat	N/A	0.456	-0.036	22.0	22.0	NB No.3
1752.6	1513	N/A	Flat	N/A	1.340	0.119	22.0	22.0	NB No.1
1752.6	1513	N/A	Flat	N/A	0.688	0.011	22.0	22.0	NB No.2
1752.6	1513	N/A	Flat	N/A	0.504	0.044	22.0	22.0	NB No.3
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram				



10.4 UMTS FDD IV/HSDPA Body SAR _ EUT (Antenna Close) Setup Tip to phantom 0mm

Ambient :			
Temperature (°C) :	<u>22 ± 3</u>	Relative HUMIDITY (%) :	<u>40 - 70</u>
Liquid :			
Mixture Type :	<u>MSL1800</u>	Liquid Temperature (°C) :	<u>22.0</u>
		Depth of liquid (cm) :	<u>15</u>
Measurement :			
Crest Factor :	<u>1</u>	Probe S/N :	<u>1531</u>

Frequency		Battery	Phantom Position	Accessory	SAR _{1g} [mW/g]	Power Drift (dB)	Temp.		Remark
MHz	CH						Amb.	Liq.	
1712.4	1312	N/A	Flat	N/A	1.020	-0.042	22.0	22.0	NB No.1
1712.4	1312	N/A	Flat	N/A	0.627	-0.124	22.0	22.0	NB No.2
1712.4	1312	N/A	Flat	N/A	0.468	0.025	22.0	22.0	NB No.3
1732.4	1412	N/A	Flat	N/A	0.824	-0.109	22.0	22.0	NB No.1
1732.4	1412	N/A	Flat	N/A	0.708	-0.019	22.0	22.0	NB No.2
1732.4	1412	N/A	Flat	N/A	0.644	0.046	22.0	22.0	NB No.3
1752.6	1513	N/A	Flat	N/A	1.560	0.169	22.0	22.0	NB No.1
1752.6	1513	N/A	Flat	N/A	1.150	0.045	22.0	22.0	NB No.2
1752.6	1513	N/A	Flat	N/A	0.644	0.046	22.0	22.0	NB No.3
Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram				

10.5 Test Setup Photo



Figure 11. Body SAR Test Setup (Flat Section)_EUT (Antenna Close) Top to Phantom for NB No.1



Figure 12. Body SAR Test Setup (Flat Section)_EUT (Antenna Close) Top to Phantom for NB No.2



Figure 13. Body SAR Test Setup (Flat Section)_EUT (Antenna Close) Top to Phantom for NB No.3

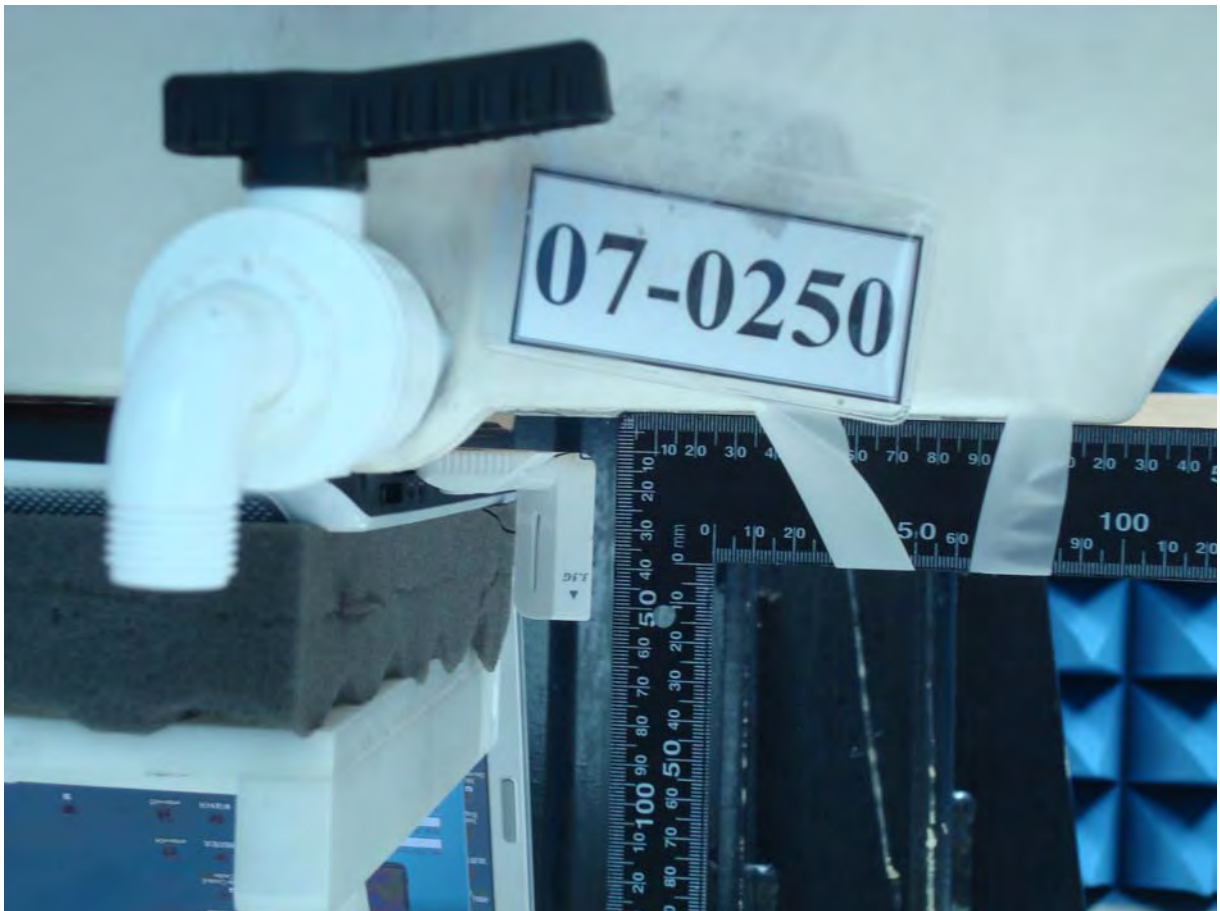


Figure 14. Body SAR Test Setup (Flat Section)_EUT (Antenna Open) Top to Phantom for NB No.1

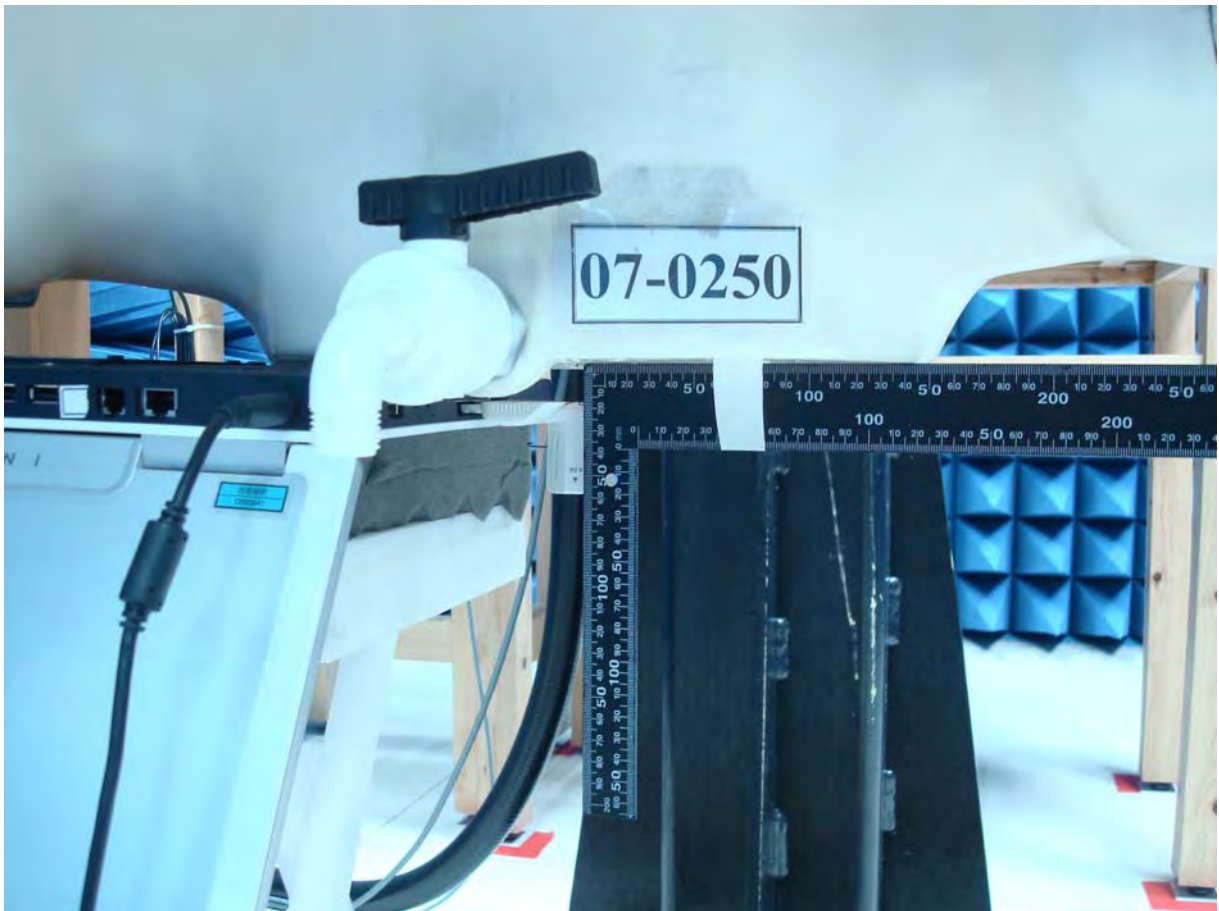


Figure 15. Body SAR Test Setup (Flat Section)_EUT (Antenna Open) Top to Phantom for NB No.2



Figure 16. Body SAR Test Setup (Flat Section)_EUT (Antenna Open) Top to Phantom for NB No.3



Figure 17. Body SAR Test Setup (Flat Section)_EUT (Antenna Close) Tip to Phantom for NB No.1



Figure 18. Body SAR Test Setup (Flat Section)_EUT (Antenna Close) Tip to Phantom for NB No.2



Figure 19. Body SAR Test Setup (Flat Section)_EUT (Antenna Close) Tip to Phantom for NB No.3



Figure 20.Body SAR Test Setup (Flat Section)_EUT (Antenna Open) Tip to Phantom for NB No.1



Figure 21. Body SAR Test Setup (Flat Section)_EUT (Antenna Open) Tip to Phantom for NB No.2



Figure 22. Body SAR Test Setup (Flat Section)_EUT (Antenna Open) Tip to Phantom for NB No.3



10.6 Std. C95.1-1999 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 7. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole - body.
- *** The Spatial Average value of the SAR averaged over the partial - body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



11. Conclusion

The SAR test values found for the portable mobile phone **BandRich Inc. Trade Mark : BandLuxe™** **Model (s) : C105** are below the maximum recommended level of 1.6 W/kg (mW/g).



12. References

- [1] Std. C95.1-1999, “*American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz*”, New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, “*Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields*”, NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, “*Automatic E-field scanning system for dosimetric assessments*”, IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, “*Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency*”, in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, “*E-field probe with improved isotropy in brain simulating liquids*”, in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, “*Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz*”, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, “*Multivariate Interpolation Of Large Sets Of Scattered Data*”, University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, *Dosimetric evaluation of mobile communications equipment with known precision*, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, “*IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*, New York: IEEE”, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz*, Jan. 1995.



Appendix A - System Performance Check

See following Attached Pages for System Performance Check.



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/26/2007 11:10:09 AM

System Performance Check at 1800MHz_20071226_Body

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:2d057

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

System Performance Check at 1800MHz/Area Scan (61x71x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 11.7 mW/g

System Performance Check at 1800MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 89.5 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 9.64 mW/g; SAR(10 g) = 5.24 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

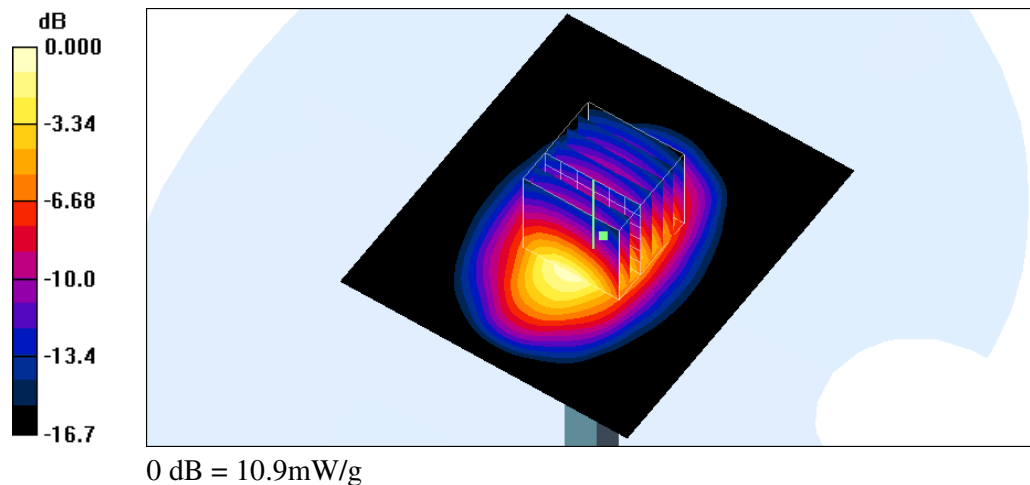



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 9:04:34 AM

System Performance Check at 1800MHz_20080106_Body

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:2d057

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

System Performance Check at 1800MHz/Area Scan (61x71x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 12.6 mW/g

System Performance Check at 1800MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 89.6 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 9.99 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

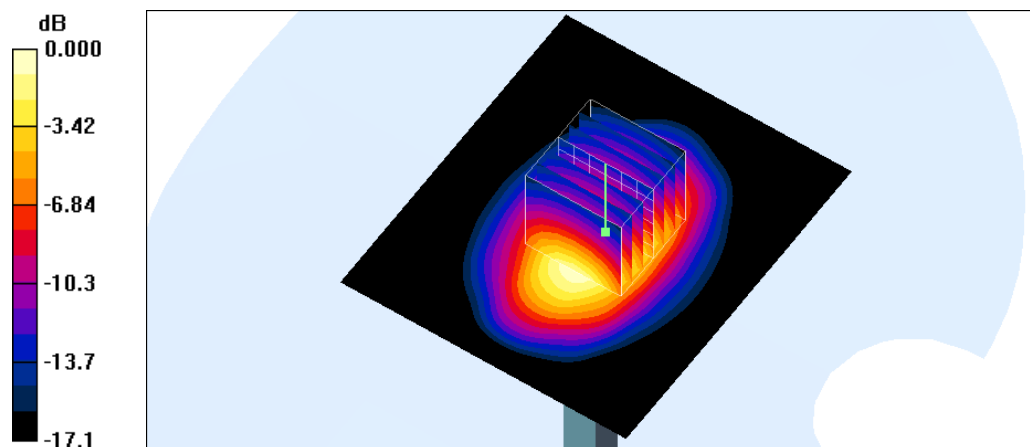

0 dB = 11.3mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 10/14/2007 11:38:23 PM

System Performance Check at 1800MHz_20080116_Body

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:265

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

System Performance Check at 1800MHz/Area Scan (71x71x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 11.2 mW/g

System Performance Check at 1800MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 86.8 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 9.47 mW/g; SAR(10 g) = 5.14 mW/g


Maximum value of SAR (measured) = 10.8 mW/g

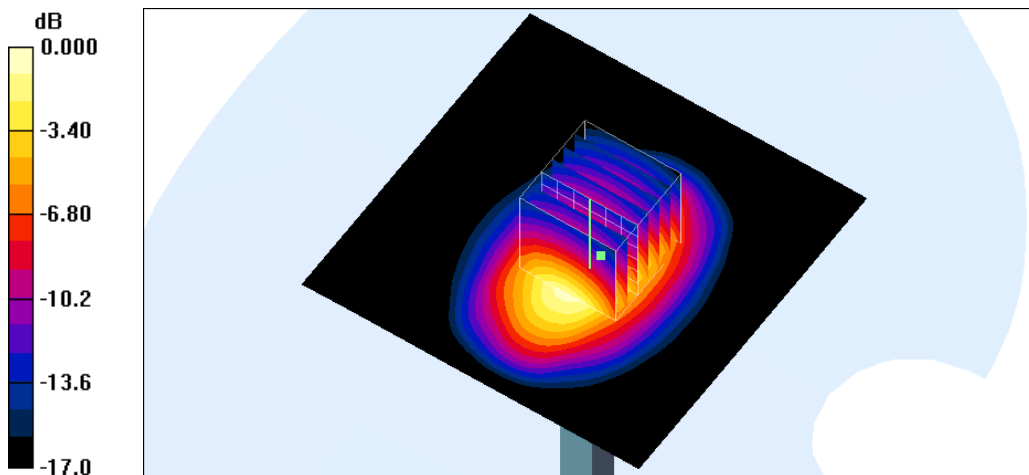


0 dB = 10.8mW/g



Z-axis Plot of System Performance Check

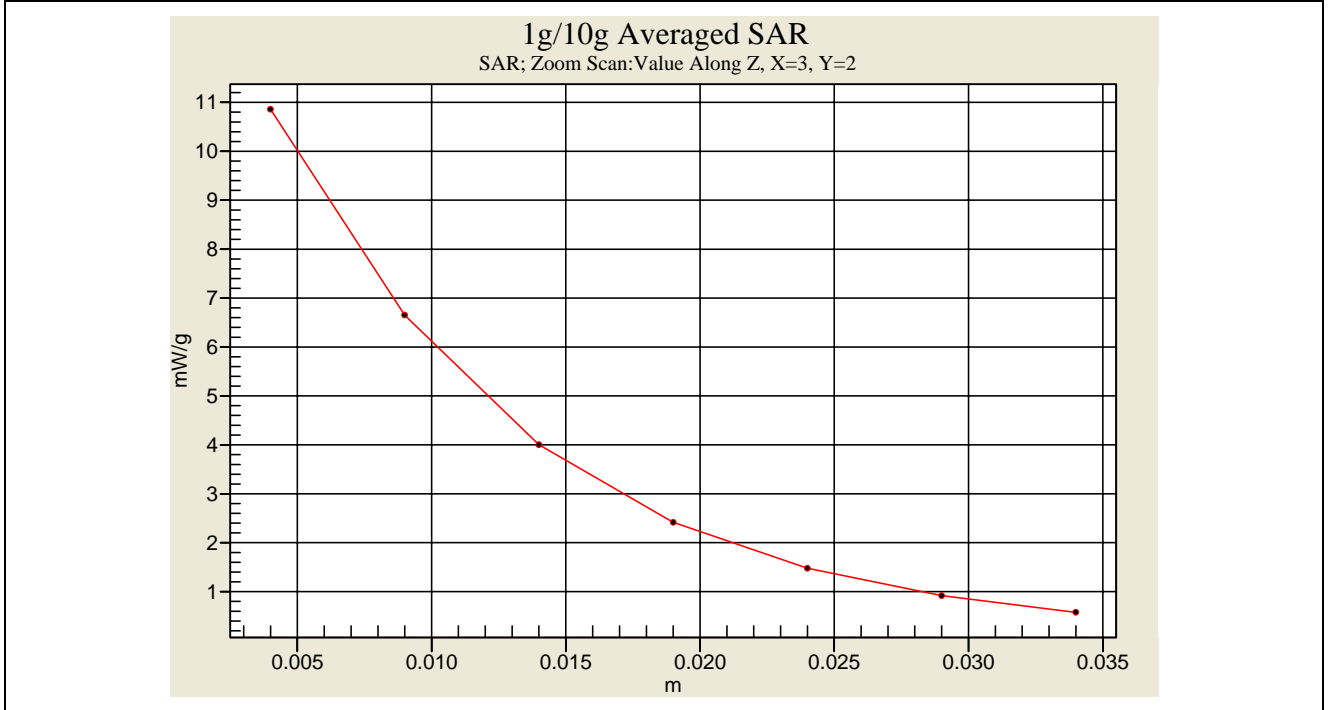


Body-Tissue-Simulating-Liquid 1800MHz (2007. 12. 26)

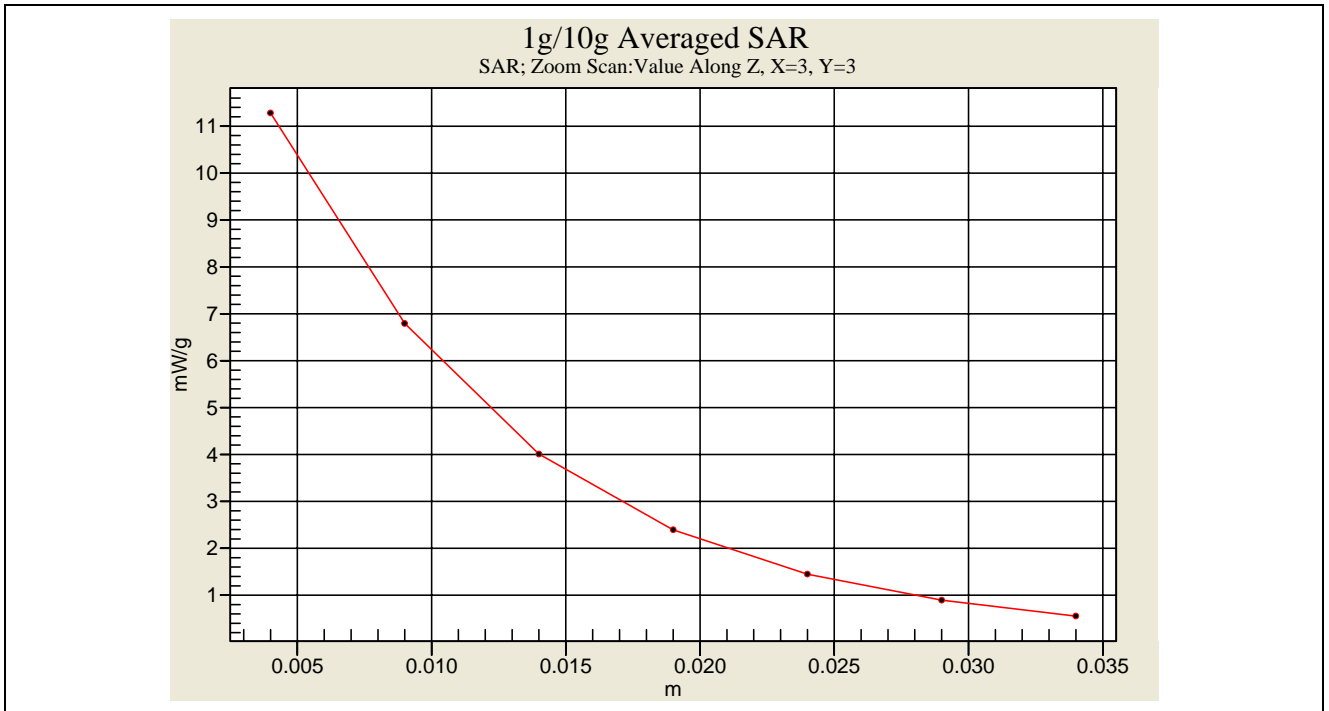

Body-Tissue-Simulating-Liquid 1800MHz (2008. 01. 06)



Z-axis Plot of System Performance Check

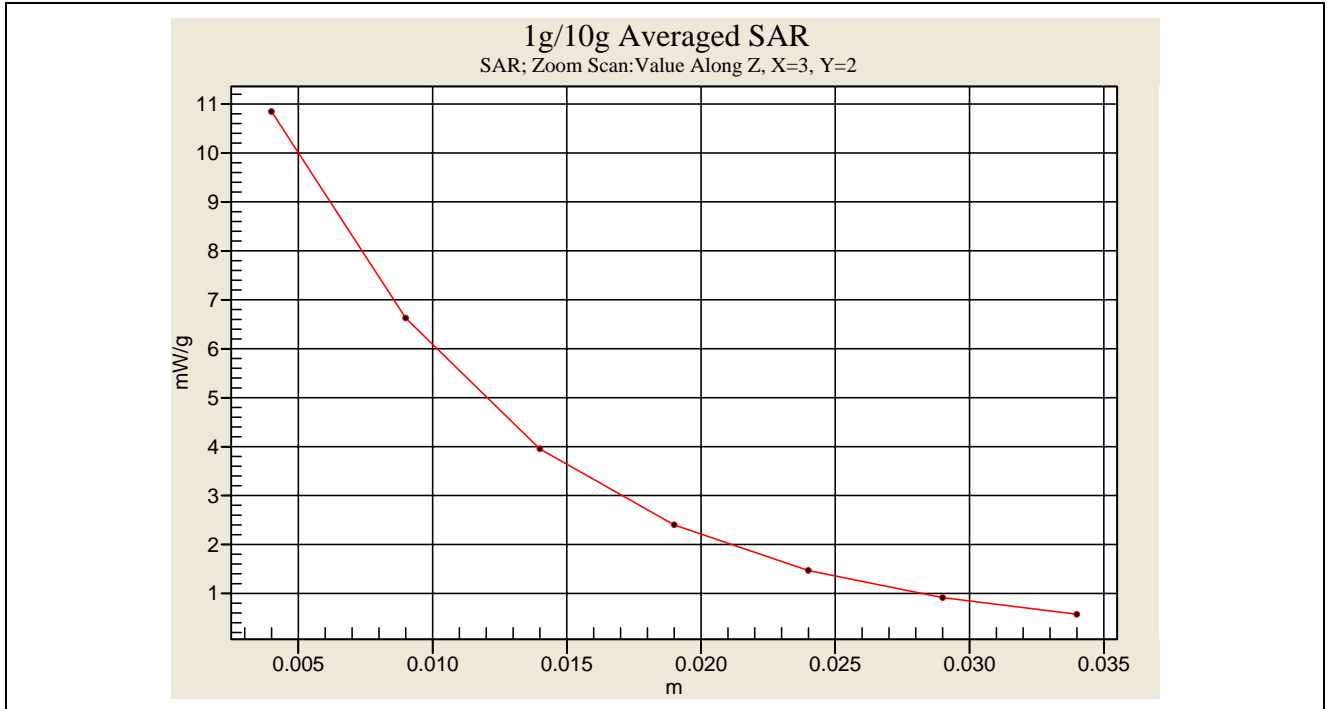

Body-Tissue-Simulating-Liquid 1800MHz (2008. 01. 16)



Appendix B - SAR Measurement Data

See following Attached Pages for SAR Measurement Data.



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 1:20:19 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Open_Close Body _NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:


- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.388 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.8 V/m; Power Drift = -0.034 dB
Peak SAR (extrapolated) = 0.505 W/kg
SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.219 mW/g
Maximum value of SAR (measured) = 0.371 mW/g

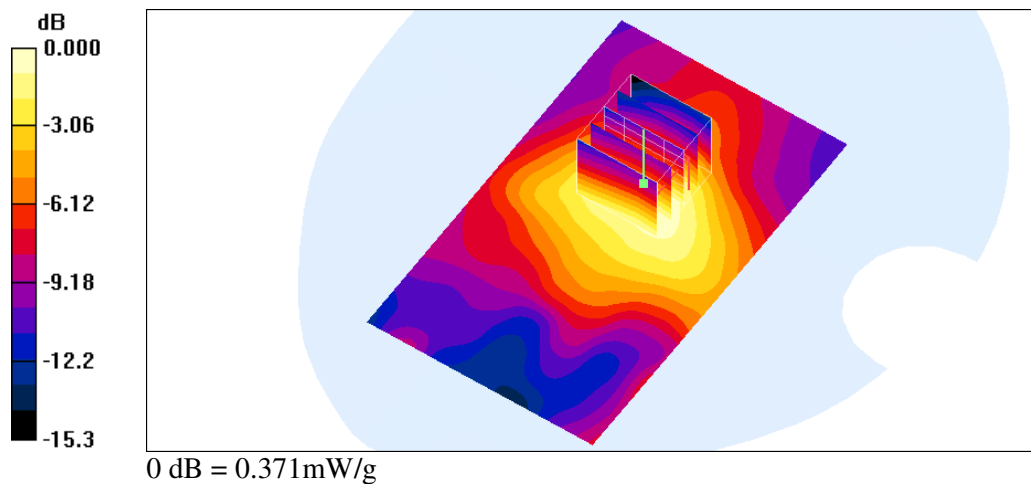



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 10:15:46 AM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant Open_Close Body _NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.627 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.326 mW/g

Maximum value of SAR (measured) = 0.595 mW/g

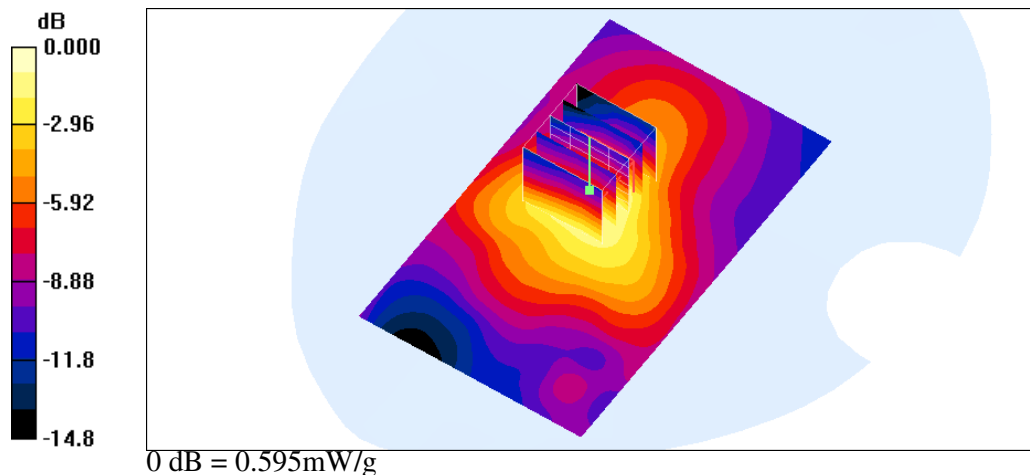



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 1:47:33 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Open_Close Body _NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.503 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.286 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

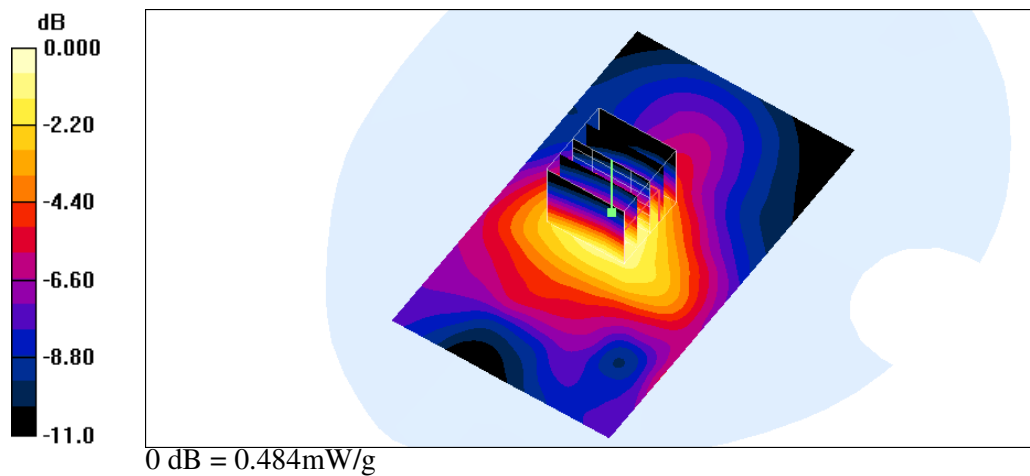



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 2:02:37 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Close_Close Body _NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.551 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

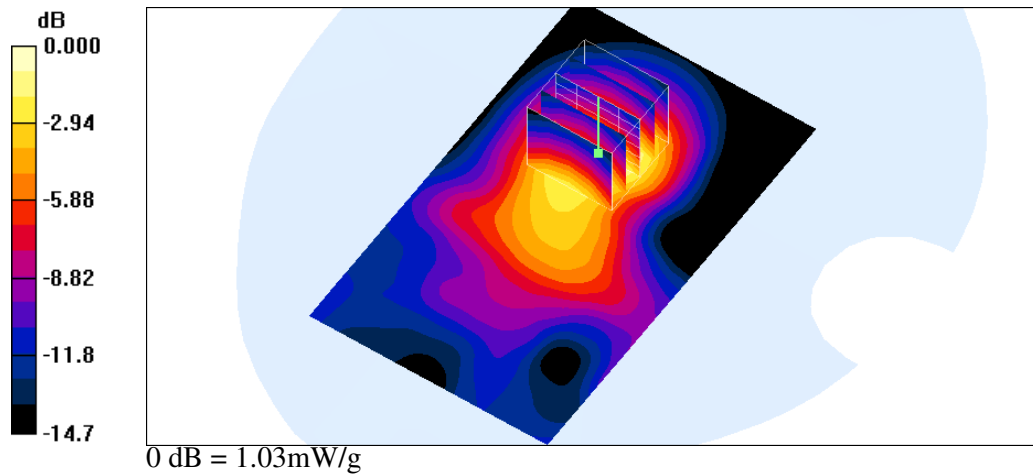



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 11:07:50 AM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant Close_Close Body _NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.55 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.7 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.33 mW/g; SAR(10 g) = 0.773 mW/g

Maximum value of SAR (measured) = 1.51 mW/g

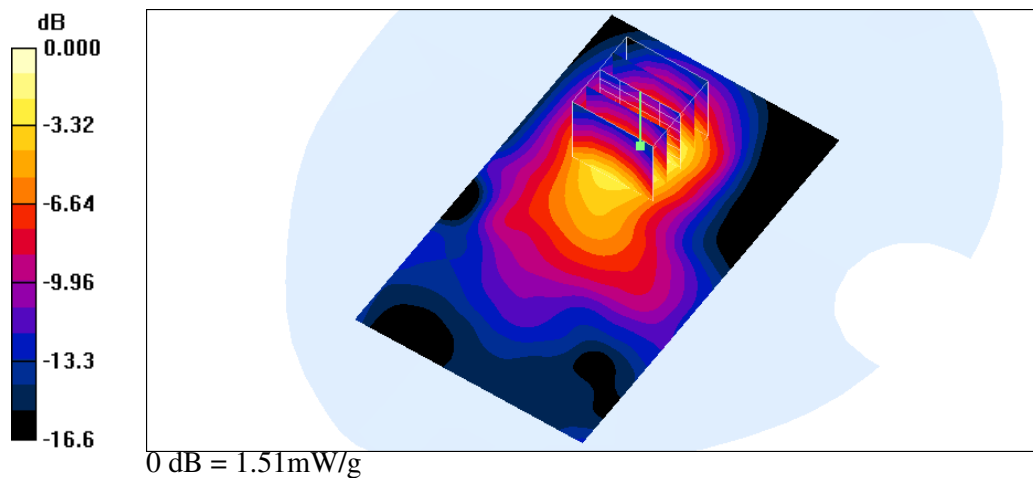



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 2:27:53 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Close_Close Body _NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.55 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.0 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.759 mW/g

Maximum value of SAR (measured) = 1.43 mW/g

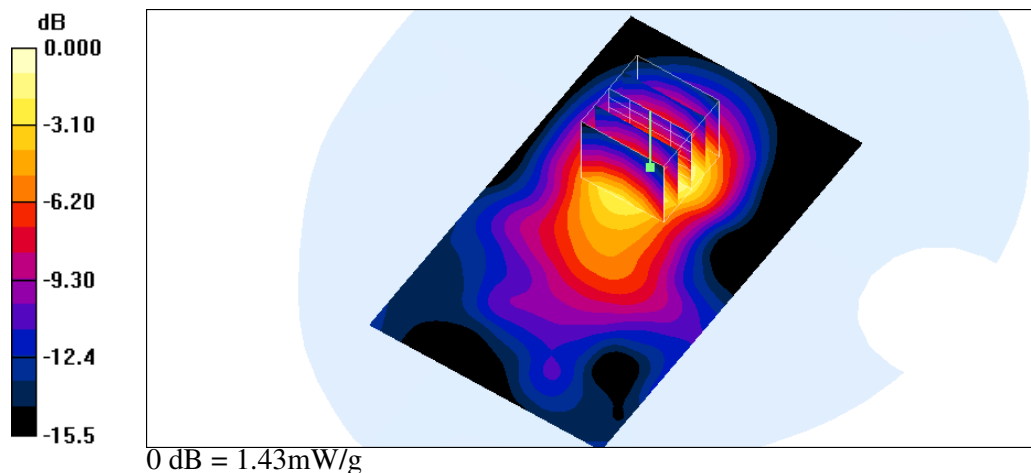



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 4:36:17 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Open_Tip 15mm_NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.875 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.744 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.824 mW/g

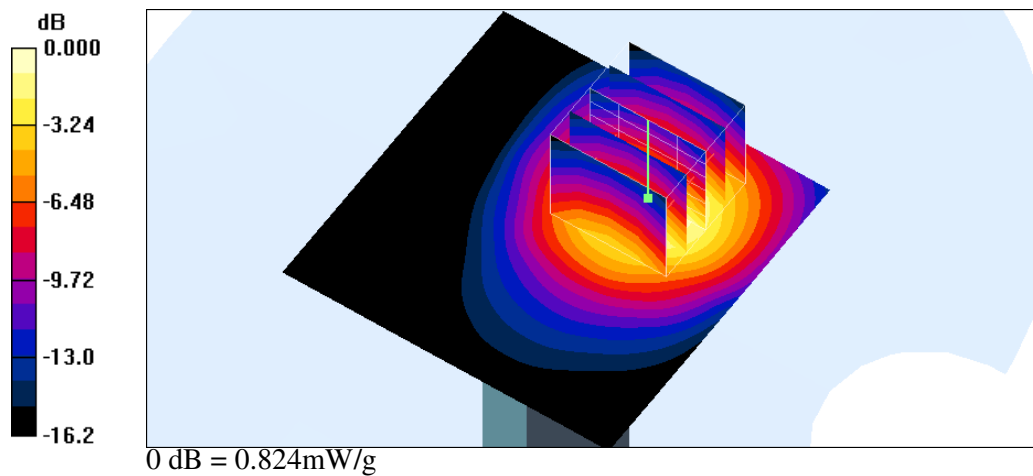



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 1:16:47 PM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant Open_Tip 15mm_NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.916 mW/g

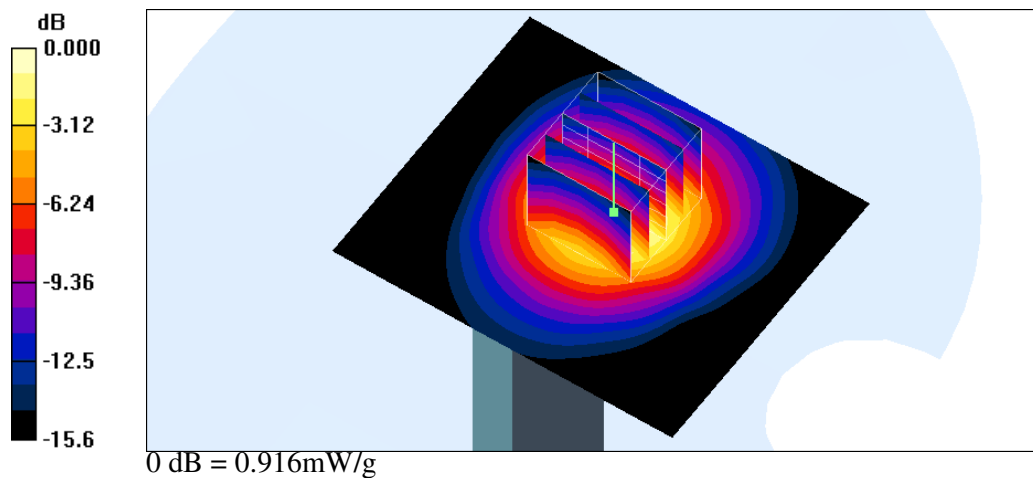



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 4:16:45 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Open_Tip 15mm_NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.43 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 1.34 mW/g; SAR(10 g) = 0.750 mW/g

Maximum value of SAR (measured) = 1.50 mW/g

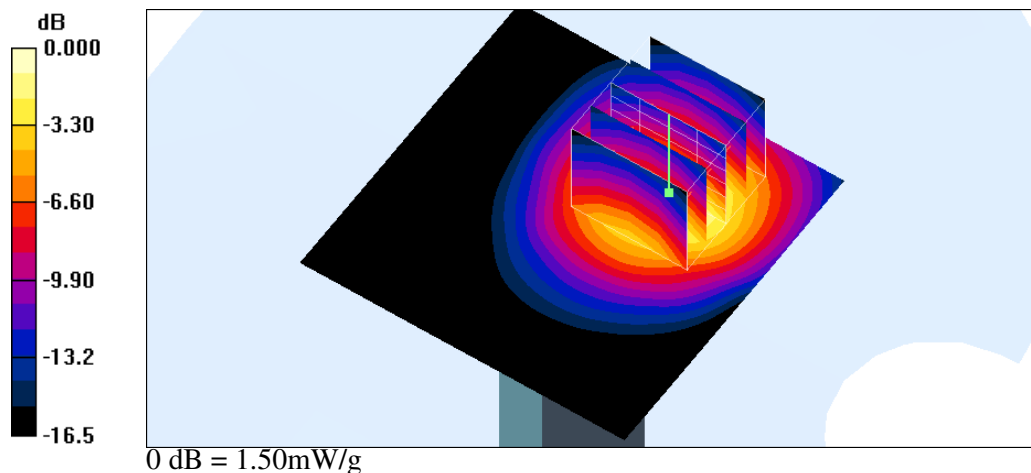



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 3:32:35 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Close_Tip 15mm_NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (51x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.32 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.4 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.591 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

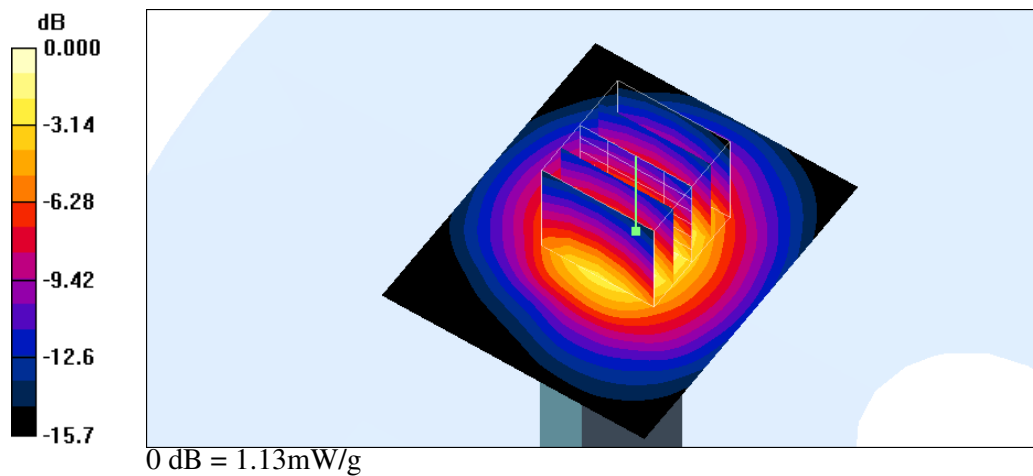



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 1:58:29 PM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant Close_Tip 15mm_NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.991 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.824 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

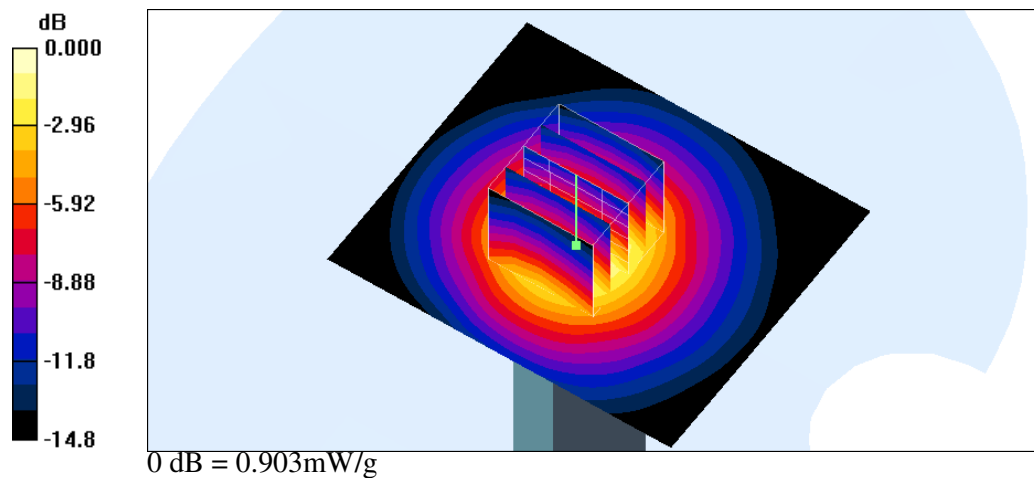



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 4:04:07 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Close_Tip 15mm_NB01

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_f = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.92 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.3 V/m; Power Drift = 0.169 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.56 mW/g; SAR(10 g) = 0.891 mW/g

Maximum value of SAR (measured) = 1.73 mW/g

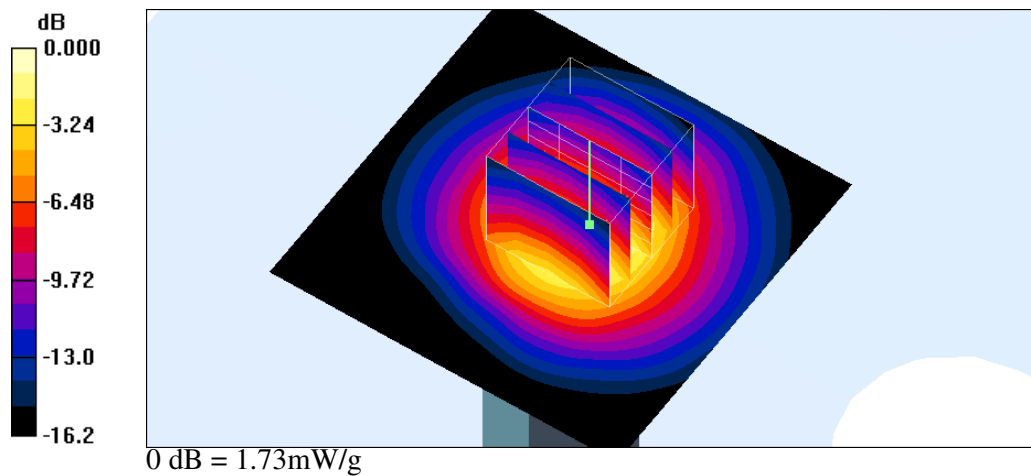



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 10:33:30 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Open_Close Body _NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.228 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.52 V/m; Power Drift = -0.144 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

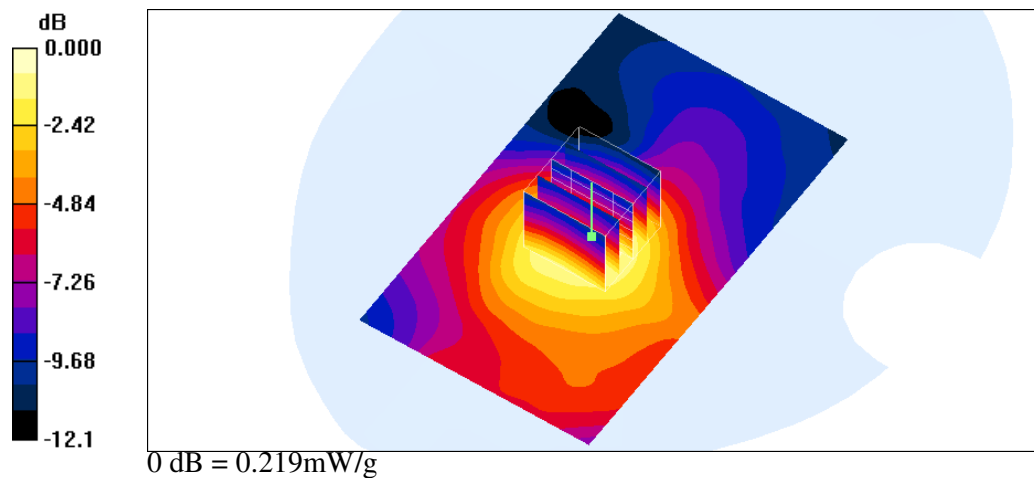



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 3:31:31 PM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant Open_Close_ Body _NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.302 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.13 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

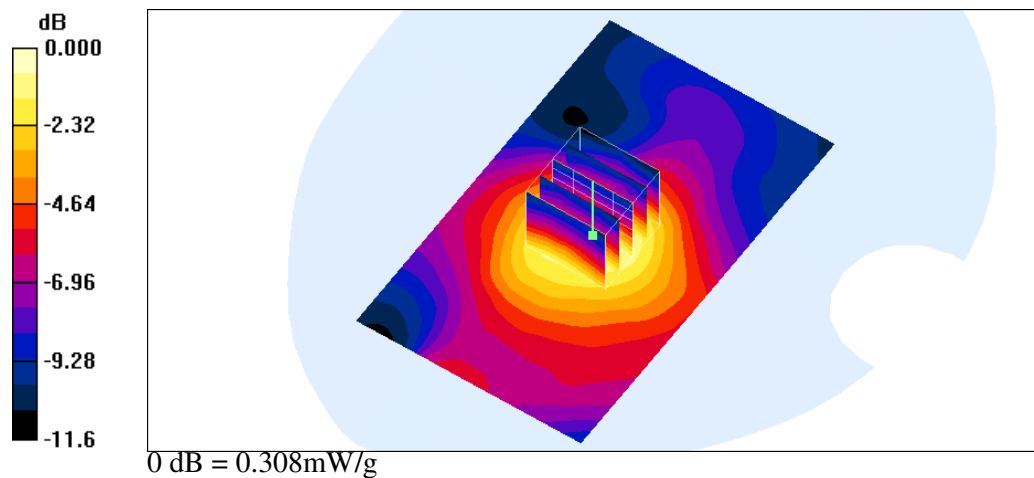



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 9:46:13 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Open_Close Body _NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.291 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.44 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.281 mW/g

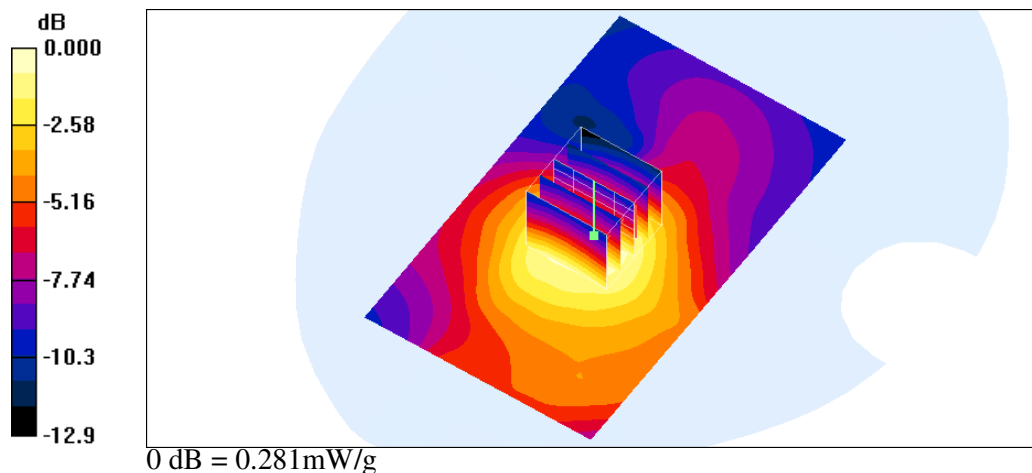



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 8:30:02 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Close_Close Body _NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.429 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.589 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.460 mW/g

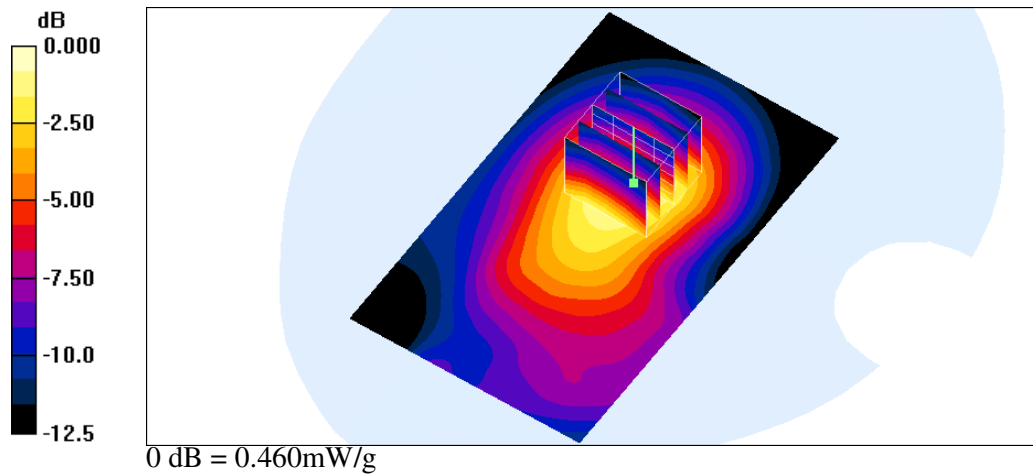



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 3:03:08 PM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant Close_Close Body _NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (91x151x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.585 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.531 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 0.578 mW/g

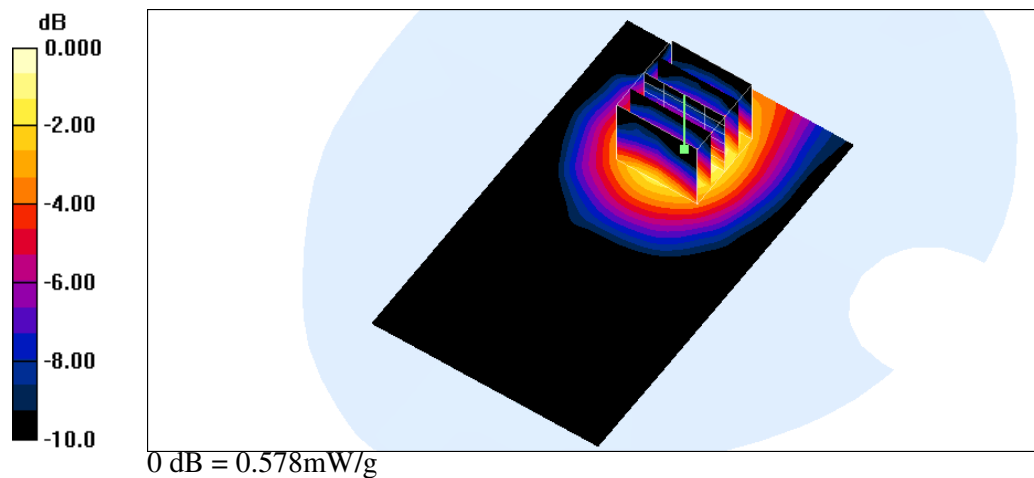



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 9:28:58 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Close_Close Body _NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.708 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.400 mW/g

Maximum value of SAR (measured) = 0.682 mW/g

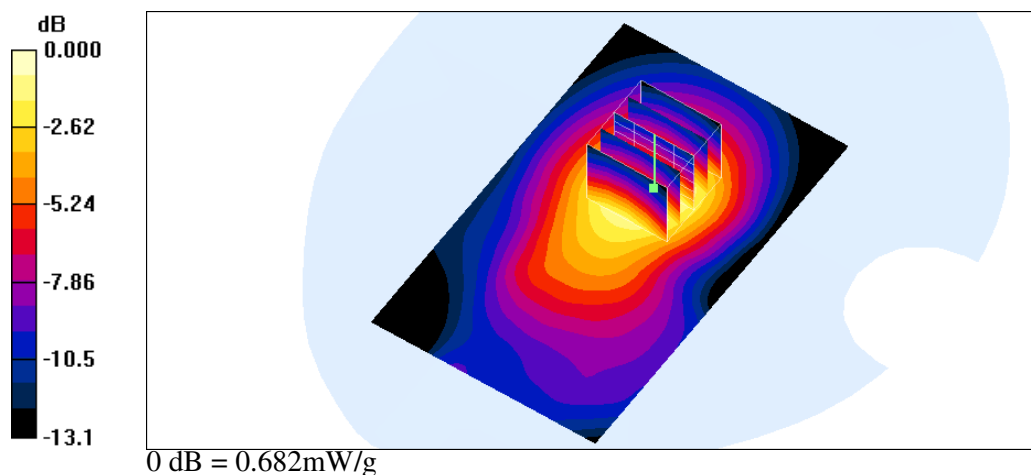



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 6:47:09 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Open_Tip 15mm_NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.427 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.85 V/m; Power Drift = 0.179 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.437 mW/g

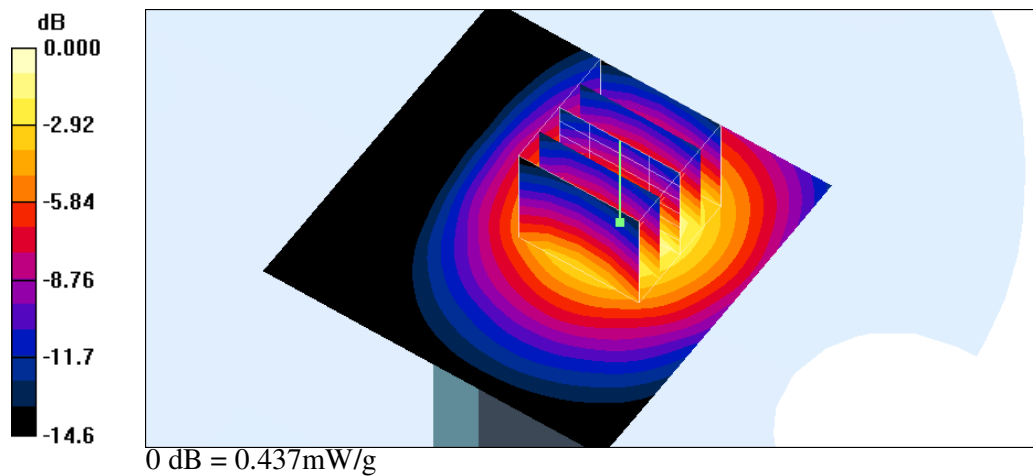



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 2:38:55 PM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant open_Tip 15mm_NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.602 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.518 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.569 mW/g

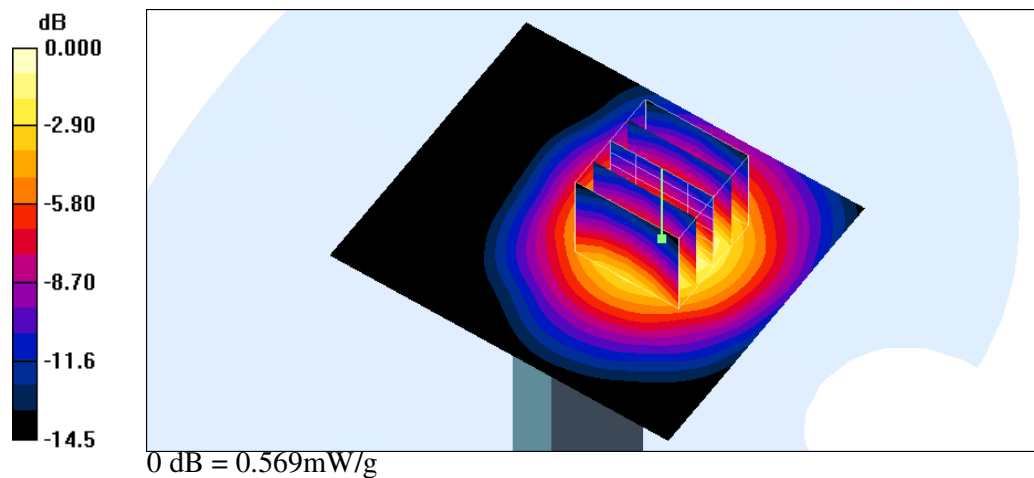



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 7:44:31 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Open_Tip 15mm_NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.777 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.409 mW/g

Maximum value of SAR (measured) = 0.762 mW/g

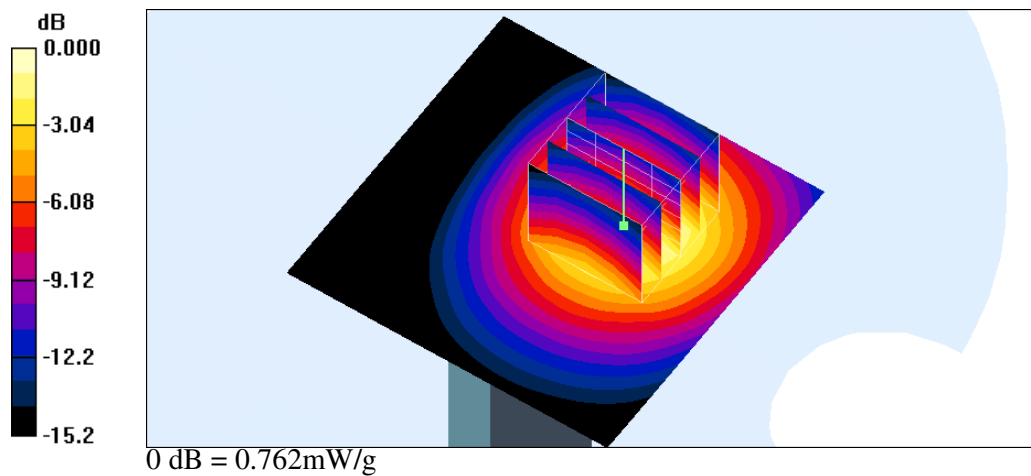



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 6:35:09 AM

Flat_UMTS Band IV_ HSDPA CH1312_Angle 110_Ant Close_Tip 15mm_NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (51x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.718 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.627 mW/g; SAR(10 g) = 0.381 mW/g

Maximum value of SAR (measured) = 0.690 mW/g

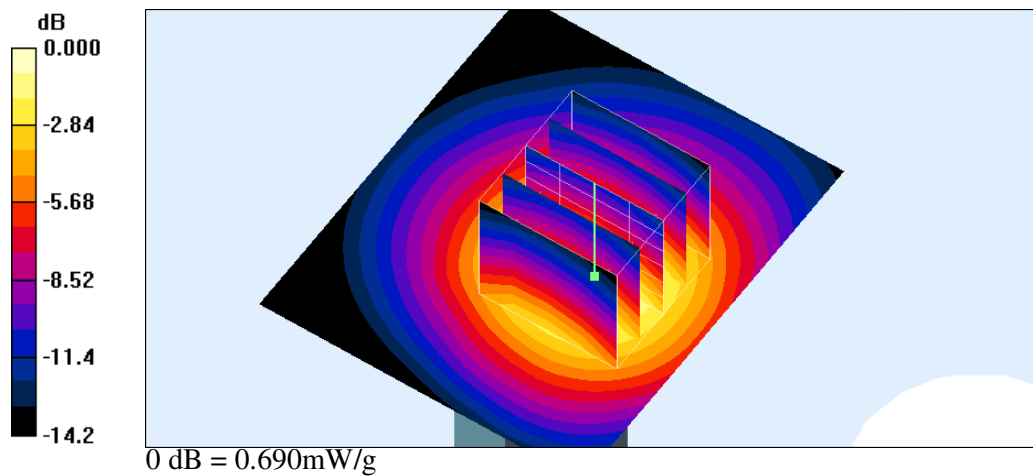



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/6/2008 2:02:08 PM

Flat_UMTS Band IV_ HSDPA CH1412_Angle 110_Ant Close_Tip 15mm_NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASYS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.808 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.442 mW/g

Maximum value of SAR (measured) = 0.773 mW/g

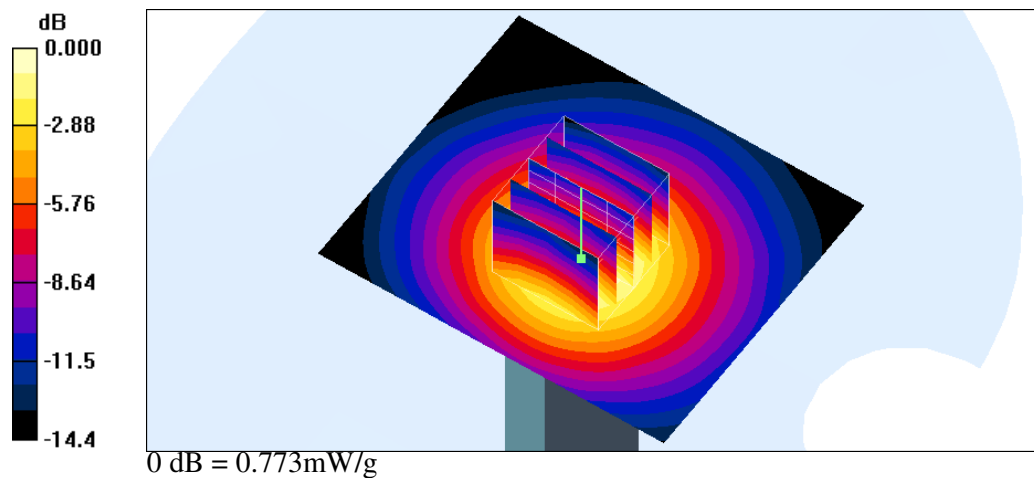



Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/27/2007 7:05:29 AM

Flat_UMTS Band IV_ HSDPA CH1513_Angle 110_Ant Close_Tip 15mm_NB02

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.28 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.6 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.691 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

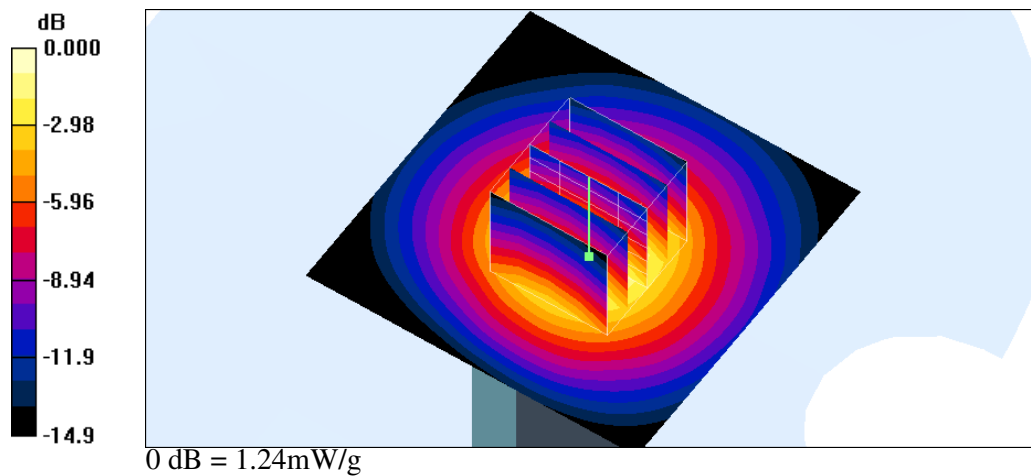



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/16/2008 8:13:07 PM

Flat_WCDMA Band IV CH1312_Angle 110_Ant Close_Close Body_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASy4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.13 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.577 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

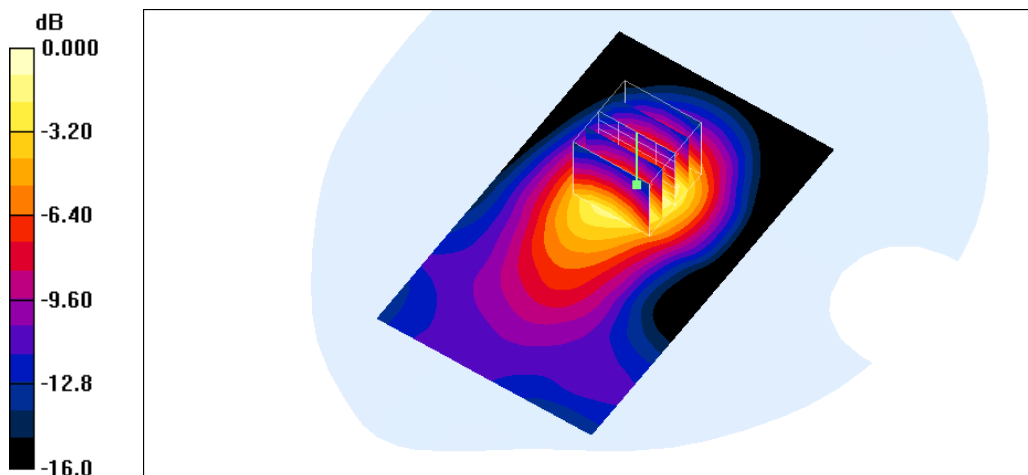

0 dB = 1.08mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/16/2008 8:51:05 PM

Flat_WCDMA Band IV CH1412_Angle 110_Ant Close_Close Body_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.28 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.7 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.709 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

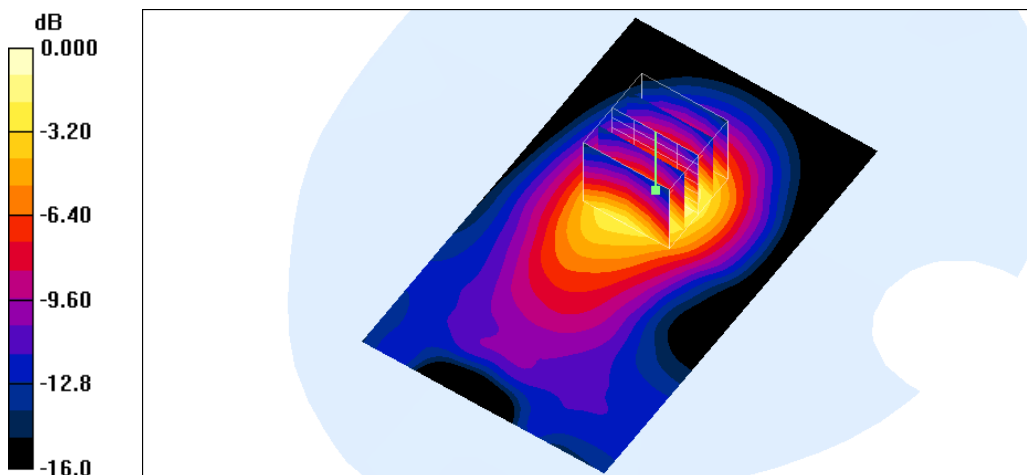

0 dB = 1.32mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/16/2008 9:51:45 PM

Flat_WCDMA Band IV CH1513_Angle 110_Ant Close_Close Body _NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.79 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.8 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.53 mW/g; SAR(10 g) = 0.886 mW/g

Maximum value of SAR (measured) = 1.71 mW/g

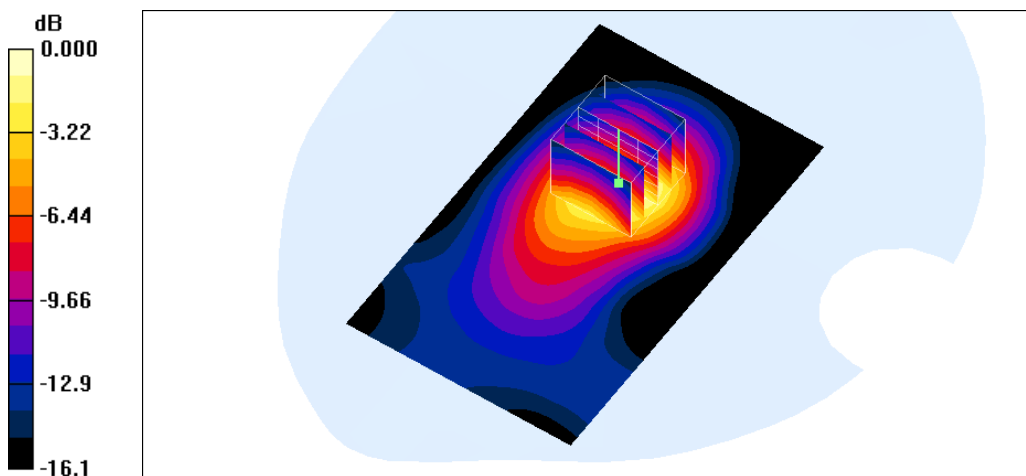

0 dB = 1.71mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/16/2008 11:35:42 PM

Flat_WCDMA Band IV CH1312_Angle 110_Ant Open_Close Body_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.397 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

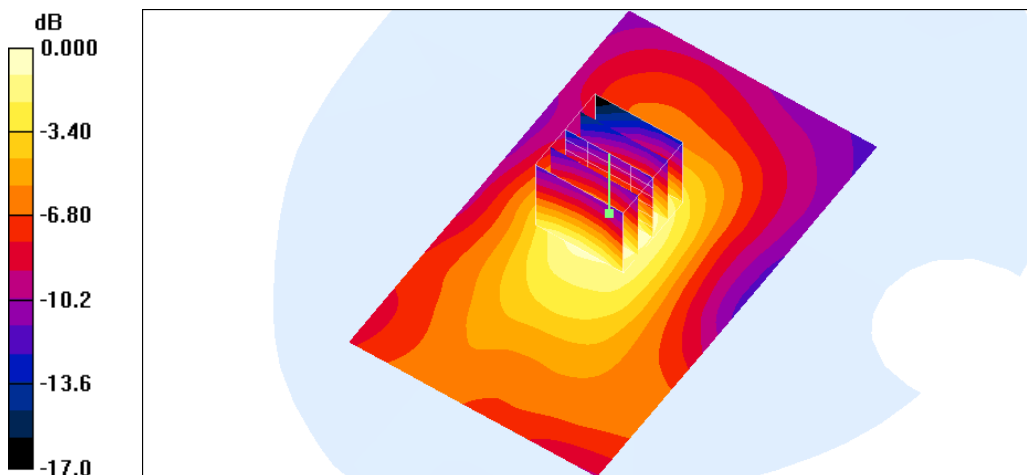

0 dB = 0.350mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/16/2008 11:02:23 PM

Flat_WCDMA Band IV CH1412_Angle 110_Ant Open_Close Body_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.522 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.441 mW/g; SAR(10 g) = 0.264 mW/g

Maximum value of SAR (measured) = 0.479 mW/g

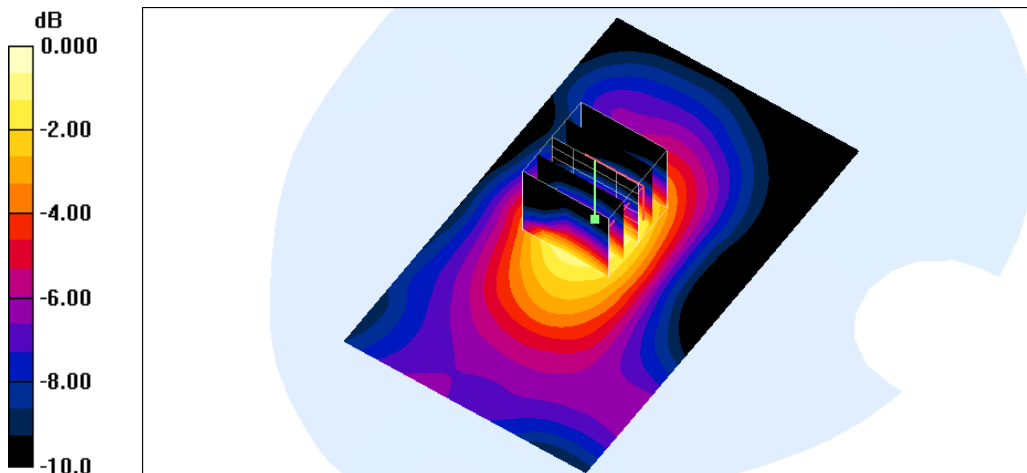

0 dB = 0.479mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/16/2008 10:18:16 PM

Flat_WCDMA Band IV CH1513_Angle 110_Ant Open_Close Body _NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (61x101x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.470 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.6 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.467 mW/g

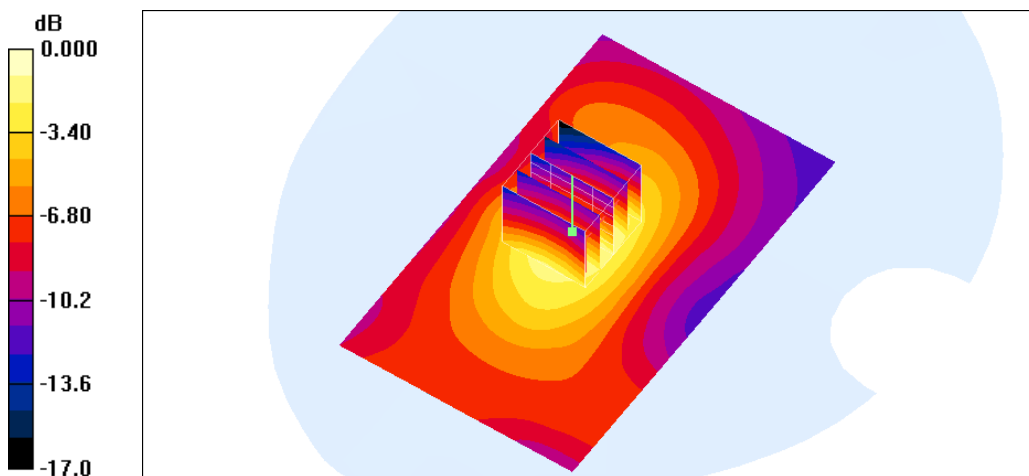

0 dB = 0.467mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/17/2008 2:05:49 AM

Flat_WCDMA Band IV CH1312_Angle 110_Ant Close_Tip 15mm_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.419 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.495 mW/g

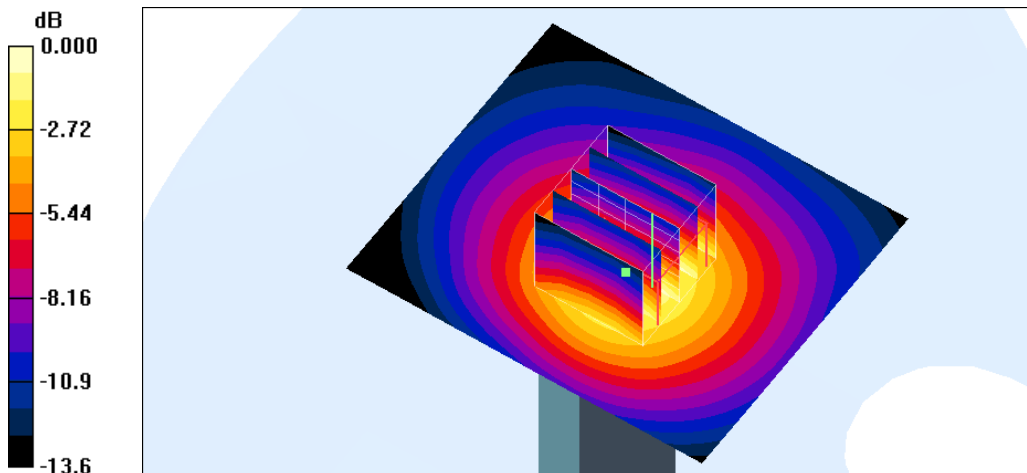

0 dB = 0.495mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/17/2008 1:40:06 AM

Flat_WCDMA Band IV CH1412_Angle 110_Ant Close_Tip 15mm_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASy4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.945 W/kg

SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.397 mW/g

Maximum value of SAR (measured) = 0.698 mW/g

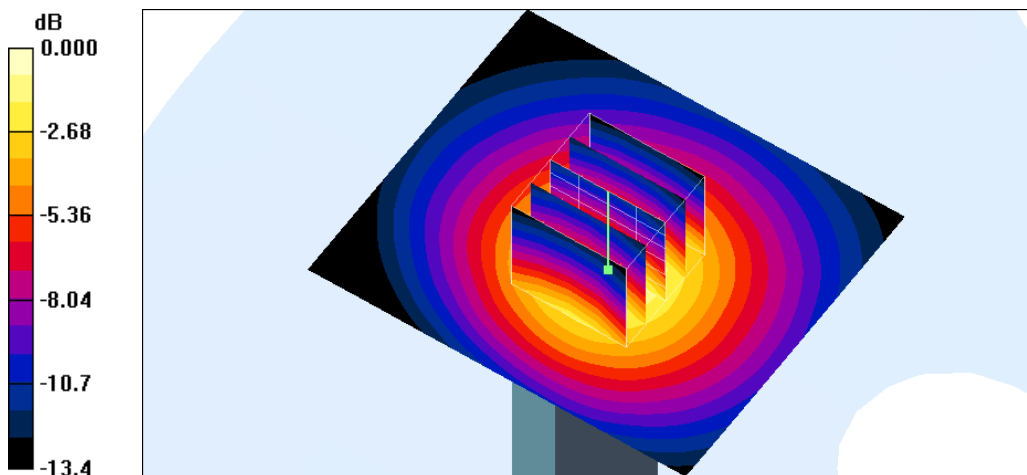

0 dB = 0.698mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/17/2008 1:19:44 AM

Flat_WCDMA Band IV CH1513_Angle 110_Ant Close_Tip 15mm_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.643 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.706 mW/g

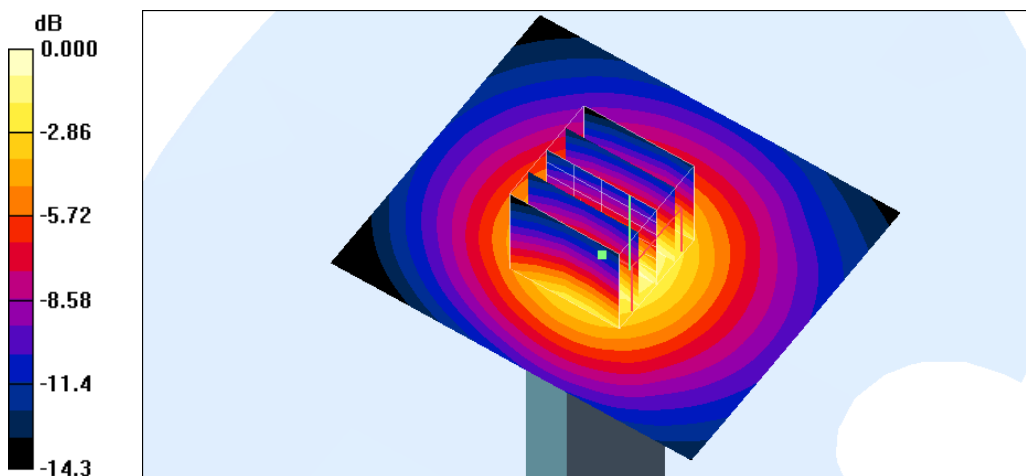

0 dB = 0.706mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/17/2008 3:05:51 AM

Flat_WCDMA Band IV CH1412_Angle 110_Ant OPEN_Tip 15mm_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.552 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.456 mW/g; SAR(10 g) = 0.277 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

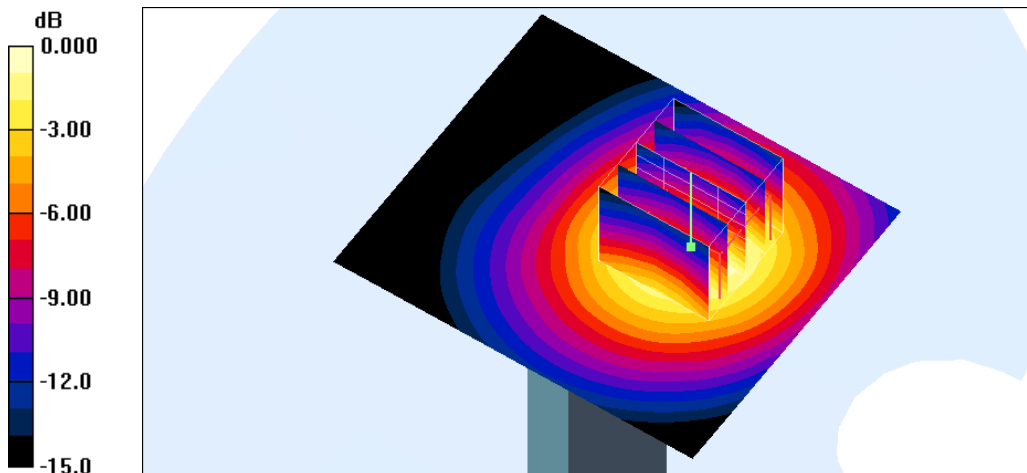



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/17/2008 2:39:18 AM

Flat_WCDMA Band IV CH1312_Angle 110_Ant OPEN_Tip 15mm_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.350 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.50 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.281 mW/g

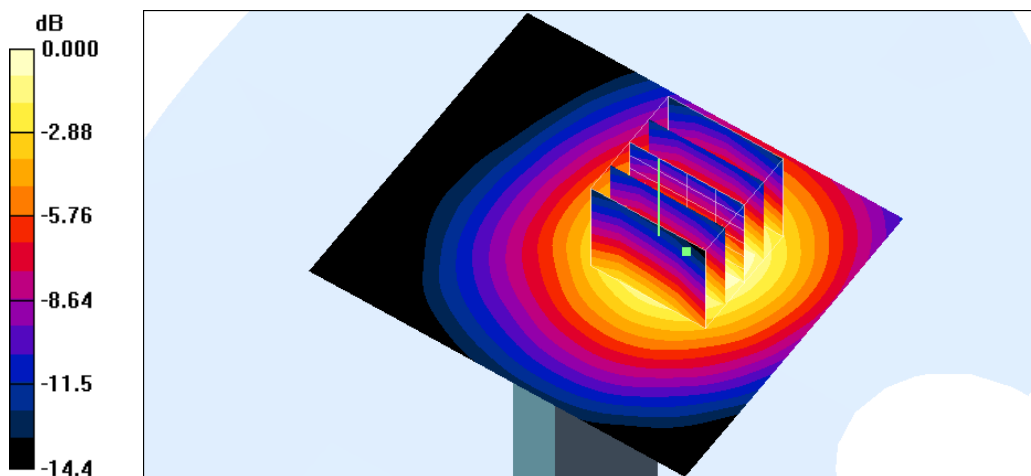



Test Laboratory: A Test Lab Techno Corp. Date/Time: 1/17/2008 3:25:11 AM

Flat_WCDMA Band IV CH1513_Angle 110_Ant OPEN_Tip 15mm_NB03

DUT: C105; Type: HSDPA ExpressCard; FCC ID: UZI-C105

Communication System: WCDMA HSDPA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(4.71, 4.71, 4.71); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 11/15/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DAS4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x61x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.584 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.1 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.309 mW/g


Maximum value of SAR (measured) = 0.543 mW/g

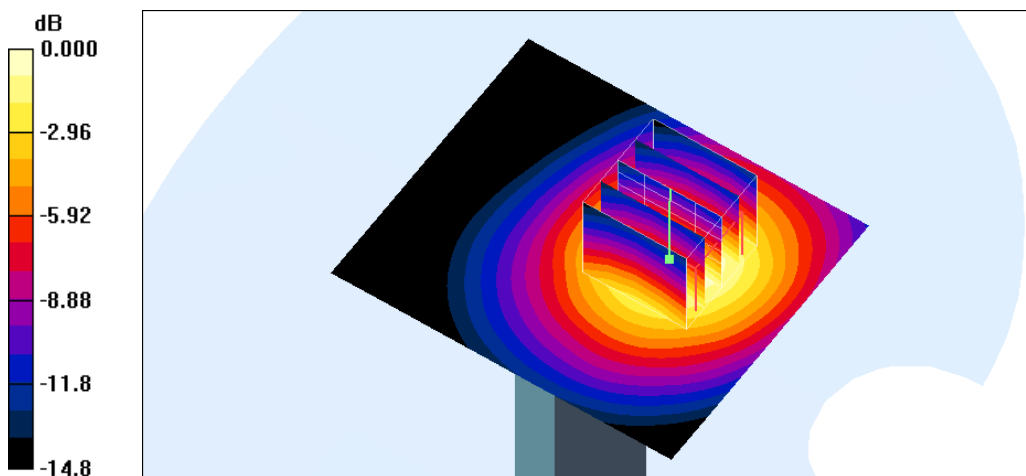


0 dB = 0.543mW/g



Z-axis Plot of SAR Measurement

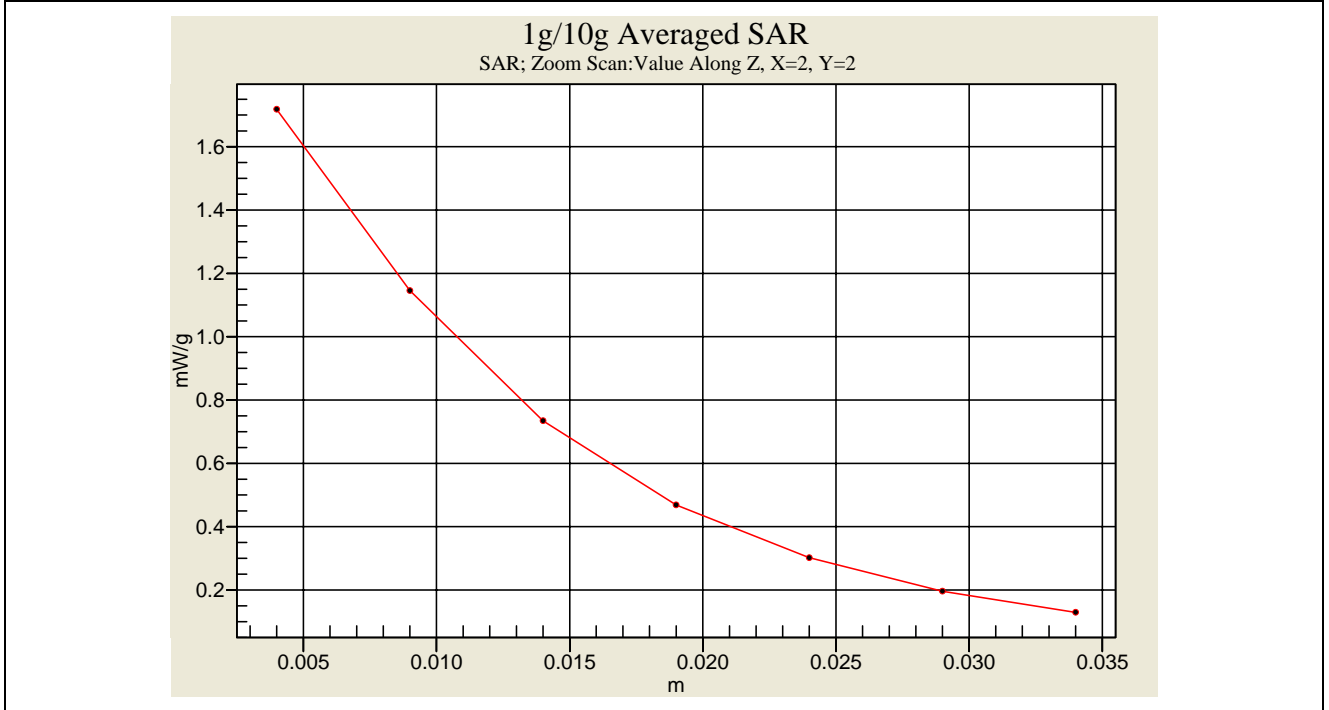


Body SAR Measurement _ Flat _ EUT (Antenna Close) Top to Phantom for NB No.3 CH1513

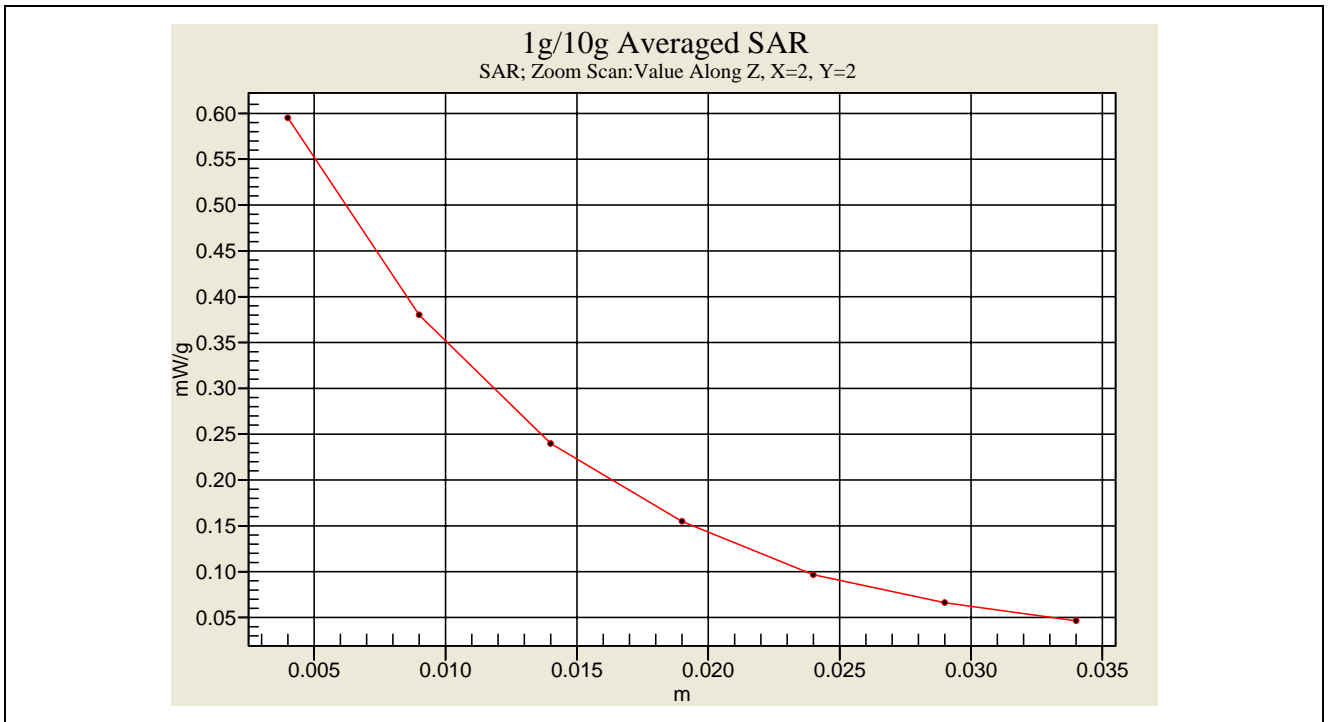


Body SAR Measurement _ Flat _ EUT (Antenna Open) Top to Phantom for NB No.1 CH1412



Z-axis Plot of SAR Measurement

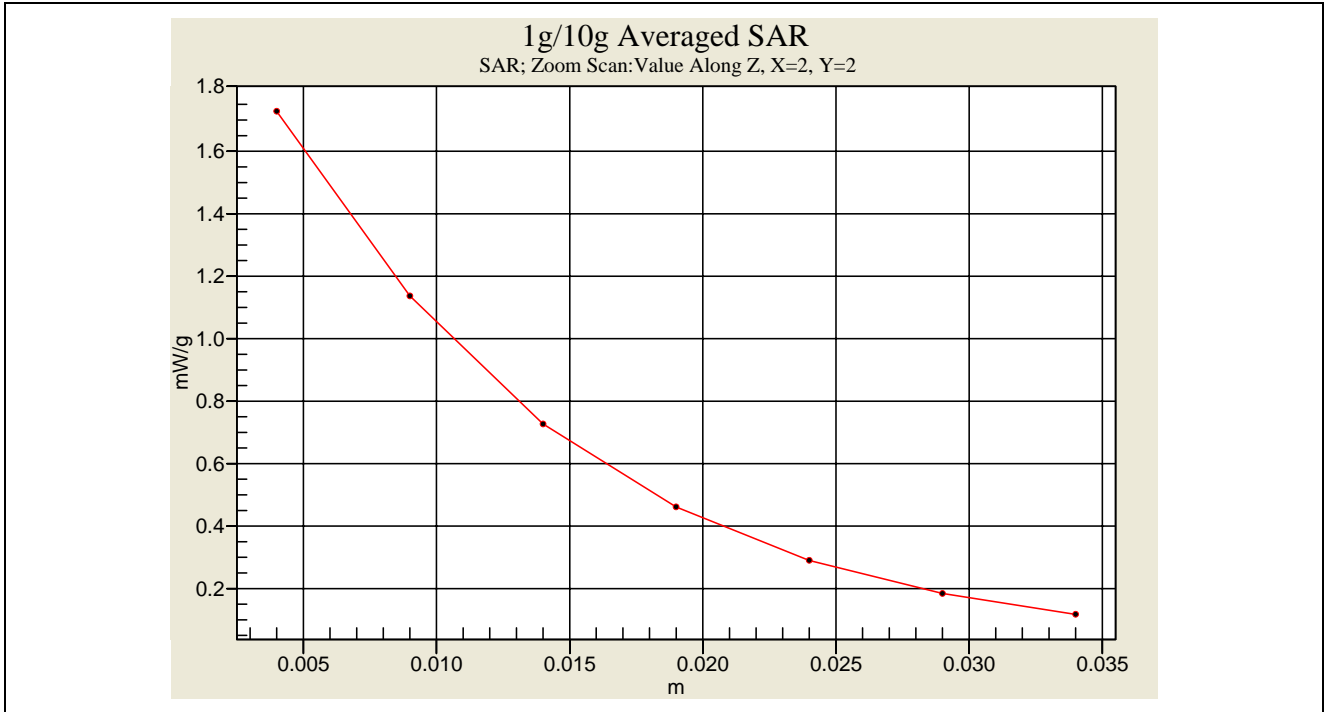

Body SAR Measurement _ Flat _ EUT (Antenna Close) Tip to Phantom for NB No.1 CH1513

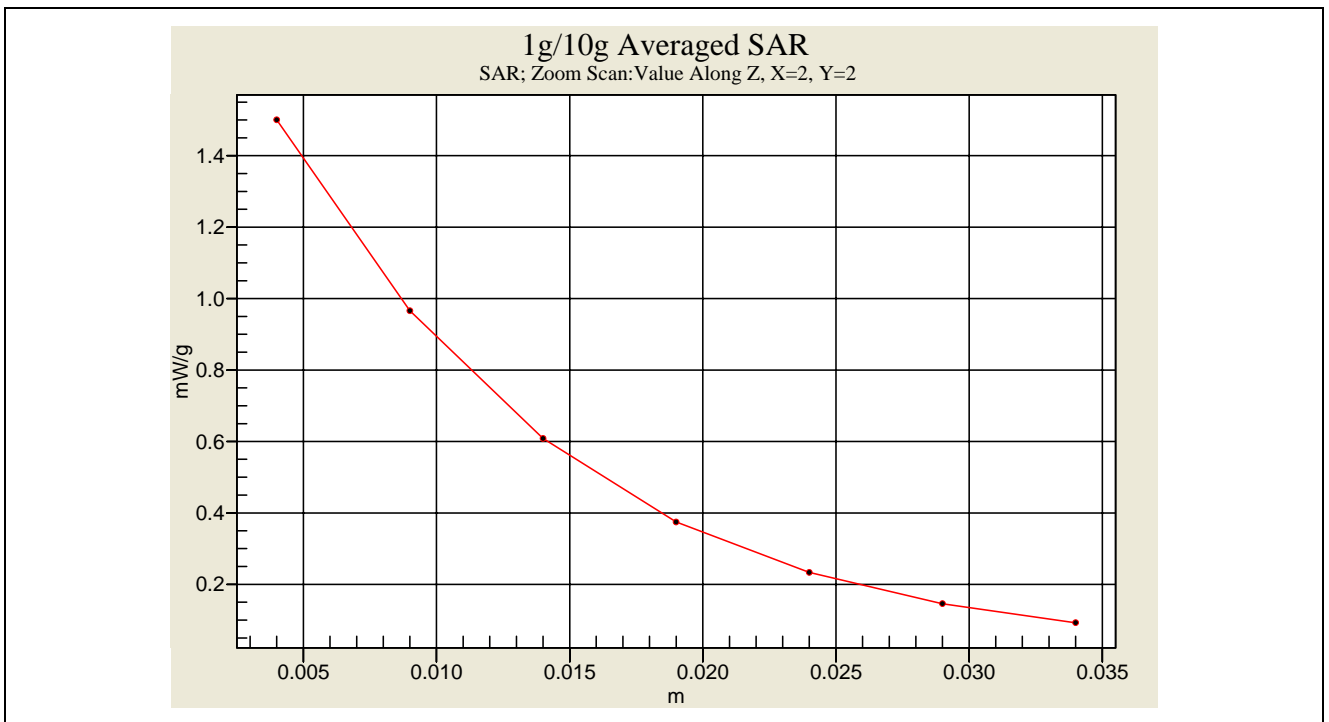

Body SAR Measurement _ Flat _ EUT (Antenna Open) Tip to Phantom for NB No.1 CH1513



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D1800V2 SN:2d057 Calibration No.D1800V2-2d057_Jan07
- Dipole _ D1800V2 SN:265 Calibration No.D1800V2-265_Aug07
- Probe _ ET3DV6 SN:1531 Calibration No.ET3-1531_Jan07
- DAE _ DAE4 SN:541 Calibration No.DAE4-541_Nov07