


Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 1 of 156

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF
Product Name:	LTE/HSPA+ VoIP Router
Marketing Name:	LTE/HSPA+ VoIP Router
Brand Name:	BandLuxe
Model Name:	R505
Model Different:	N/A
FCC ID:	UZI-R505
<b>Report No.:</b>	EH/2011/50011
Issue Date:	Jun. 23, 2011
FCC Rule Part:	§15.247, Cat: DTS
Prepared for:	BandRich Inc.
	7F., No.188, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
Prepared by:	SGS Taiwan Ltd.
	<b>Electronics &amp; Communication Laboratory</b>
	No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan

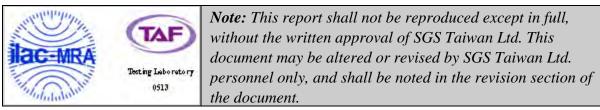

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions,htm</u>) and Terms and Conditions for Electronic documents (<u>www.sgs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號

f (886-2) 2298-0488



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 2 of 156

# VERIFICATION OF COMPLIANCE

Applicant:	BandRich Inc.
	7F., No.188, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
<b>Equipment Under Test:</b>	LTE/HSPA+ VoIP Router
Brand / Marketing Name:	BandLuxe/ LTE/HSPA+ VoIP Router
Model No.:	R505
Model Difference:	N/A
FCC ID:	UZI-R505
File Number:	EH/2011/50011
Date of test:	May 10, 2011 ~ Jun 23, 2011
Date of EUT Received:	May 10, 2011

### We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Lion Wang	Date	Jun. 23, 2011
	Lion Wang / Engineer Judy Hfu	Date	Jun. 23, 2011
Approved By:	Judy Hsu / General Admin. Jim Chang / Supervisor	Date	Jun. 23, 2011

SGS Taiwan Ltd.

f (886-2) 2298-0488 www.tw.sgs.com



FCC ID:UZI-R505

Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 3 of 156

# Version

Version No.	Date	Description
00	Jun. 23, 2011	Initial creation of document



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 4 of 156

### **Table of Contents**

1	GEN	VERAL INFORMATION	6
	1.1	Related Submittal(s) / Grant (s)	7
	1.2	Test Methodology	7
	1.3	Test Facility	7
	1.4	Special Accessories	7
	1.5	Equipment Modifications	7
2	SYS	TEM TEST CONFIGURATION	8
	2.1	EUT Configuration	8
	2.2	EUT Exercise	8
	2.3	Test Procedure	8
	2.4	Configuration of Tested System	9
3	SUM	IMARY OF TEST RESULTS	10
4	DES	CRIPTION OF TEST MODES	10
5	CON	DUCTED EMISSION TEST	11
	5.1	Standard Applicable:	
	5.2	Measurement Equipment Used:	
	5.3	EUT Setup:	
	5.4	Measurement Procedure:	
	5.5	Measurement Result:	
6	PEA	K OUTPUT POWER MEASUREMENT	15
	6.1	Standard Applicable:	15
	6.2	Measurement Equipment Used:	
	6.3	Test Set-up:	
	6.4	Measurement Procedure:	
	6.5	Measurement Result:	
7	6dB	Bandwidth	43
	7.1	Standard Applicable:	
	7.2	Measurement Equipment Used:	
	7.3	Test Set-up:	
	7.4	Measurement Procedure:	
	7.5	Measurement Result:	
8	100K	KHz BANDWIDTH OF BAND EDGES MEASUREMENT	58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sqs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號



### FCC ID:UZI-R505

Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 5 of 156

	8.1	Standard Applicable:	58
	8.2	Measurement Equipment Used:	58
	8.3	Test SET-UP:	59
	8.4	Measurement Procedure:	60
	8.5	Field Strength Calculation:	60
	8.6	Measurement Result:	60
9	SPUR	RIOUS RADIATED EMISSION TEST	75
	9.1	Standard Applicable	75
	9.2	Measurement Equipment Used:	75
	9.3	Test SET-UP:	75
	9.4	Measurement Procedure:	75
	9.5	Field Strength Calculation	76
	9.6	Measurement Result:	76
10	Peak	Power Spectral Density	137
	10.1	Standard Applicable:	137
	10.2	Measurement Equipment Used:	137
	10.3	Test Set-up:	137
	10.4	Measurement Procedure:	137
	10.5	Measurement Result:	138
11	ANTI	ENNA REQUIREMENT	156
	11.1	Standard Applicable:	156
	11.2	Antenna Connected Construction:	156

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.sonsite.com/authentication</u>. Any holder of this docider of this document be reproduced, is intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Scs Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / bt.\# Lat BL & Lege A the terms of the gene accept and the sector and



# **1 GENERAL INFORMATION**

#### General:

Product Name:	LTE/HSPA	LTE/HSPA+ VoIP Router		
Marketing Name:	LTE/HSPA	LTE/HSPA+ VoIP Router		
Brand Name:	BandLuxe	BandLuxe		
Model Name:	R505			
Model Difference:	N/A			
	12 Vdc by AC/DC Power Supply			
Power Supply	Adaptor:	Model: SAG024F4, Supplier: CWT		

#### WLAN

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology	Type of Emission
11b/g	2412-2462	11	b : 12.95dBm g : 12.98dBm	DSSS, OFDM	b : 14M97G1D g : 16M40G1D
11	HT20 2412-2462	11	n : 15.98dBm	0EDM	17M48D1D
11n	HT40 2422-2452	9	n : 15.97dBm	OFDM	35M72D1D
Antenna Designation:		Monopole Antenna 1 with 2.79 dBi peak gain(Main) Monopole Antenna 2 with 2.78 dBi peak gain(Aux)			
Modulation type:		CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM			
Transition Rate:		802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 72.2Mbps 802.11 n_40MHz: 13.5 – 300Mbps			

The EUT is compliance with IEEE 802.11 b/g/n Standard.

This report applies for WLAN, and complies with FCC rule part 15C.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions,htm</u>) and Terms and Conditions for Electronic documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

www.tw.sgs.com



#### 1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>UZI-R505</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

#### 1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247

requirements.

#### **1.3 Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

#### **1.4 Special Accessories**

Not available for this EUT intended for grant.

#### **1.5 Equipment Modifications**

Not available for this EUT intended for grant.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 8 of 156

### **2** SYSTEM TEST CONFIGURATION

#### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

# 2.3 Test Procedure

#### **2.3.1 Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions,htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>, Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 9 of 156

#### 2.4 Configuration of Tested System

Fig. 2-1 AC Power line Emission Configuration




Fig. 2-2 Radiated Emission Configuration



#### Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1	NB	IBM	T60	L3DK794
2	Test Kit	N/A	N/A	1360-0



### **3 SUMMARY OF TEST RESULTS**

FCC Rules	FCC Rules Description Of Test	
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)(c)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
	100 KHz Bandwidth Of	~
§15.247(d)	Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

## **4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz) mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) · mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n\_20MHz mode: Channel low (2412MHz) > mid (2437MHz) and high (2462MHz) with

6.5Mbps lowest data rate are chosen for full testing.

802.11 n\_40MHz mode: Channel lowest (2422MHz), mid(2437MHz) and high (2452MHz) with

13.5 Mbps highest data rate are chosen for full testing.



### **5** CONDUCTED EMISSION TEST

### 5.1 Standard Applicable:

According to \$15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Lir dB(	nits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2	Measurement Equipment Used:				
		0			15

Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
ТҮРЕ		NUMBER	NUMBER	CAL.							
EMI Test Receiver	R&S	ESCS30	828985/004	09/16/2010	09/15/2011						
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2011	02/01/2012						
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2011	02/01/2012						
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2010	11/27/2011						

#### 5.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

f (886-2) 2298-0488



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 12 of 156

#### 5.4 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

#### 5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 13 of 156

### AC POWER LINE CONDUCTED EMISSION TEST DATA


Operation Mode:	WLAN			Test Date:	Jun. 07, 2011
Temperature:	22 °C	Humidity:	57%	Test By:	Lion
80.0 dBu	v				
					Limit: — AVG: —
1×1	*				
40	MANN	wa hanna waa	myhow	my A	2
		Ma when why	Warner	104	Mar
0.0	0.5	(MHz)	5		30.000
Site SGS CONE		Phase	1.00	Temper	
Limit: FCC Clas	s B Conduction(QP)	Power	AC 120V/60Hz	Humidit	ty: 61%
EUT: LTE/HSP/	A+ VoIP Router	Distan	ce:	Air Pres	ssure: hpa
M/N: R505					
Note: WLANmo	ode				

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1549	59.54	0.13	59.67	65.73	-6.06	QP	
2		0.1549	40.79	0.13	40.92	55.73	-14.81	AVG	
3		0.2096	51.42	0.12	51.54	63.22	-11.68	QP	
4		0.2096	35.39	0.12	35.51	53.22	-17.71	AVG	
5		0.2595	45.69	0.12	45.81	61.45	-15.64	QP	
6		0.2595	29.73	0.12	29.85	51.45	-21.60	AVG	
7		0.3050	43.95	0.12	44.07	60.11	-16.04	peak	
8		0.4250	41.70	0.12	41.82	57.35	-15.53	peak	
9		11.2059	41.32	0.44	41.76	60.00	-18.24	QP	
10	5	11.2059	36.11	0.44	36.55	50.00	-13.45	AVG	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 except in full, without prior written permission of the Company. 歐非労有說明, 近報告結果僅到測減之体結員頁, 问時比萊給僅條留900, 本報告未經本公司書面計可, 不可能均複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions</u>, thr) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.om/terms is com/authentication</u>, Any holder of this docu-ment is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any holder of this docu-responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殷工業區五工路 134 號



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 14 of 156

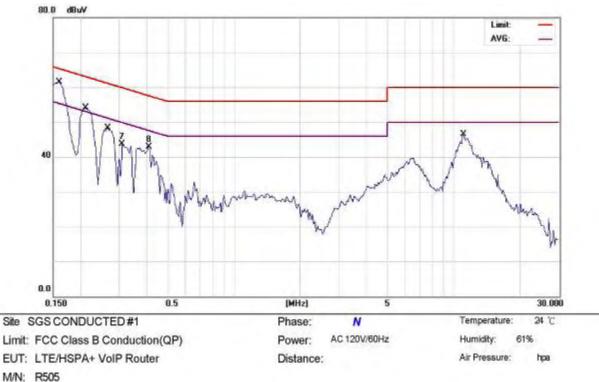

Note: WLANmode

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuW	dB	Detector	Comment
1	*	0.1597	58.22	0.18	58.40	65.48	-7.08	QP	
2		0.1597	40.35	0.18	40.53	55.48	-14.95	AVG	
3		0.2097	51.10	0.16	51.26	63.22	-11.96	QP	
4		0.2097	32.43	0.16	32.59	53.22	-20.63	AVG	
5		0.2642	44.78	0.16	44.94	61.30	-16.36	QP	
6		0.2642	25.51	0.16	25.67	51.30	-25.63	AVG	
7		0.3100	43.50	0.16	43.66	59.97	-16.31	peak	
8		0.4100	42.82	0.16	42.98	57.65	-14.67	peak	
9		11.0399	41.90	0.48	42.38	60.00	-17.62	QP	
10		11.0399	37.85	0.48	38.33	50.00	-11.67	AVG	
110		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	100000		1.122.1201	2 Mar. 12 A			



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 15 of 156

### **6 PEAK OUTPUT POWER MEASUREMENT**

#### 6.1 Standard Applicable:

According to §15.247(a)(2), (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and

5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode. (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

f (886-2) 2298-0488




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 16 of 156

#### 6.2 Measurement Equipment Used:

	Conduct	ted Emission <b>T</b>	Test Site		
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Power Sensor	Anritsu	MA2411B	917032	01/21/2011	01/20/2012
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2011	01/24/2012
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2011	01/04/2012
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011

#### 6.3 Test Set-up:



#### 6.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz,Bandwidth=26dB occupied Bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.



#### 6.5 **Measurement Result:**

#### 802.11b

(	Cable loss = 0	Peak Power Output (dBm)							
СН	Frequency (MHz)		Data 1	Paguirad Limit					
		1	Required Limit						
1	2412	12.91	12.86	11.76	11.6	1 Watt = 30 dBm			
6	2437	12.95	12.89	11.86	11.8	1 Watt = 30 dBm			
11	2462	12.91	12.85	11.68	11.6	1 Watt = 30 dBm			

	Cable loss = 0	Average Power Output (dBm)							
СН	Frequency (MHz)		Data 1	_ Required Limit					
		1	- Kequirea Linin						
1	2412	10.32	10.12	9.12	9.1	1 Watt = 30 dBm			
6	2437	10.29	10.2	9.05	8.99	1 Watt = 30 dBm			
11	2462	10.36	10.3	9.15	9.1	1 Watt = 30 dBm			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sqs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五股工業區五工路 134 號



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 18 of 156

802.11g

Cat	ble loss $= 0$													
СН	Frequency (MHz)		Data Rate											
		6	9	12	18	24	36	48	54	_Required Limit				
1	2412	12.98	12.86	11.89	11.85	10.76	10.6	9.85	9.65	1 Watt = 30 dBm				
6	2437	12.91	12.76	11.76	11.66	10.66	10.43	9.76	9.53	1 Watt = 30 dBm				
11	2462	12.92	12.66	11.77	11.7	10.67	10.58	9.7	9.59	1 Watt = 30 dBm				

Cat	ble loss $= 0$													
СН	Frequency (MHz)		Required Limit											
	(11112)	6	9	12	18	24	36	48	54					
1	2412	9.46	9.34	8.23	8.1	7.13	7.1	6.12	6.11	1 Watt = 30 dBm				
6	2437	9.43	9.31	8.12	8.05	7.1	7.05	6.06	6.05	1 Watt = 30 dBm				
11	2462	9.2	9.1	8.07	8.01	7.08	7.02	6.01	5.99	1 Watt = 30 dBm				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.sonsite.com/authentication</u>. Any holder of this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



#### 802.11n\_20M(Main)

Cable loss $= 0$			Peak Power Output (dBm)								
СН	Frequency (MHz)		Data Rate								
	(141112)	6.5	6.5 13 19.5 26 39 52 58.5 65 72 <sup>Li</sup>								Limit
1	2412	12.99	12.86	12.05	12.03	11.26	11.16	10.81	10.76	9.60	1 Watt = 30 dBm
6	2437	12.95	12.84	12.02	11.99	11.12	11.05	10.71	10.62	9.55	1 Watt = 30 dBm
11	2462	12.93	12.79	11.99	11.83	11.08	11.01	10.66	10.55	9.45	1 Watt = 30 dBm

Cał	ble loss $= 0$		Average Power Output (dBm)										
СН	Frequency (MHz)		Data Rate										
	(191112)	6.5	13	19.5	26	5 39 52 58.5 65 72 Limit							
1	2412	9.56	9.46	8.75	8.71	7.86	7.69	6.84	6.80	5.77	1 Watt = 30 dBm		
6	2437	9.33	9.31	8.55	8.51	7.68	7.52	6.75	6.65	5.58	1 Watt = 30 dBm		
11	2462	9.48	9.39	8.69	8.63	7.75	7.63	6.79	6.69	5.65	1 Watt = 30 dBm		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.sonsite.com/authentication</u>. Any holder of this docider of this document be reproduced, is intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Scs Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / bt.\# Lat BL & Lege A the terms of the gene accept and the sector and



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 20 of 156

802.11n\_20M(Aux)

Cab	le loss = $0$		Peak Power Output (dBm)									
СН	Frequency (MHz)		Data Rate									
	(19112)	6.5	6.5         13         19.5         26         39         52         58.5         65         72									
1	2412	12.95	12.87	12.08	12.06	11.21	11.18	10.82	10.75	9.58	1 Watt = 30 dBm	
6	2437	12.92	12.66	11.99	11.86	11.11	11.06	10.65	10.62	9.41	1 Watt = 30 dBm	
11	2462	12.95	12.83	12.06	12.01	11.19	11.12	10.80	10.71	9.53	1 Watt = 30 dBm	

Cat	ble loss $= 0$	Average Power Output (dBm)													
СН	Frequency (MHz)		Data Rate												
	(191112)	6.5	13	19.5	26	39	52	58.5	65	72 Limit					
1	2412	9.26	9.16	8.41	8.23	7.58	6.42	6.31	5.88	5.63	1 Watt = 30 dBm				
6	2437	9.28	9.20	8.45	8.31	7.65	6.58	6.42	5.93	5.71	1 Watt = 30 dBm				
11	2462	9.27	9.18	8.42	8.28	7.60	6.49	6.37	5.89	5.70	1 Watt = 30 dBm				

#### 802.11n\_20M(MIMO)

СН	Frequency (MHz)	CH0 (mW)	CH1 (mW)	Combin (mW)	dBm	Required Limit
LOW	2412	19.907	19.724	39.631	15.980	1 Watt = 30dBm
MID	2437	19.724	19.588	39.313	15.945	1 Watt = 30dBm
HIGH	2462	19.634	19.724	39.358	15.950	1 Watt = 30dBm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms</u> and <u>conditions</u>, the main and <u>conditions</u> for Electronic Documents (<u>www.sgs.com/terms</u> <u>e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms</u>. Any holder of this document ment is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the times of its instructions, if any. The Company's sole responsibility is to its Client and this document does not exconcrate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd</u>. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 21 of 156

### 802.11n\_40M(Main)

Cat	ble loss = $0$				Peak	A Power	Output (	(dBm)					
СН	Frequency (MHz)		Data Rate										
	(1/111)	13.5	27	40.5	54	81	108	121.5	135	Required Limit			
3	2422	12.96	12.89	11.75	11.68	11.55	10.86	10.76	10.20	1 Watt = 30 dBm			
6	2437	12.91	12.86	11.70	11.65	11.41	10.65	10.55	10.10	1 Watt = 30 dBm			
9	2452	12.89	12.81	11.63	11.55	11.30	10.59	10.45	9.98	1 Watt = 30 dBm			

Cat	able loss = 0Peak Power Output (dBm)										
СН	Frequency (MHz)										
	()	162	216	243	270	300					
3	2422	10.12	9.72	9.66	9.01	8.95		1 Watt = 30 dBm			
6	2437	10.05	9.60	9.42	8.99	8.81		1 Watt = 30 dBm			
9	2452	9.89	9.42	9.21	8.88	8.73		1 Watt = 30 dBm			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms e-document.htm). Attention is drawn to the limitations of Service (www.sgs.com/terms and conditional issues established therein. Even if printed this electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication, Any holder of this document is to be treated as an original within the energies to experime the company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.
SGS Taiwan Ltd.
No.134, Wu Kun Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五殿工業區五工路 134 號



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 22 of 156

Cat	ble loss = $0$		Average Power Output (dBm)											
СН	Frequency (MHz)		Data Rate											
	(11112)	13.5	27	40.5	54	81	108	121.5	135	Required Limit				
3	2422	9.71	9.64	8.96	8.79	7.99	7.89	7.09	6.89	1 Watt = 30 dBm				
6	2437	9.51	9.41	8.76	8.68	7.85	7.77	6.98	6.76	1 Watt = 30 dBm				
9	2452	9.25	9.10	9.05	8.55	7.76	7.68	6.86	6.59	1 Watt = 30 dBm				

Cat	ble loss = $0$		Average Power Output (dBm)									
СН	Frequency (MHz)			Required Limit								
	(11222)	162	216	243	270	300		Kequired Linit				
3	2422	6.01	5.97	4.99	4.83	4.08		1 Watt = 30 dBm				
6	2437	5.96	5.94	4.88	4.76	3.66		1 Watt = 30 dBm				
9	2452	5.85	5.80	4.76	4.50	3.50		1 Watt = 30 dBm				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms e-document.htm</u>). Any holder of this document is ot its its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /d±tk ב/B ± x B 134 號



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 23 of 156

#### 802.11n\_40M(Aux)

Cable loss = 0Peak Power Output						(dBm)							
СН	Frequency (MHz)		Data Rate										
	(11222)	13.5	27	40.5	54	81	108	121.5	135	Required Limit			
3	2422	12.95	12.86	11.73	11.65	11.48	10.83	10.68	10.12	1 Watt = 30 dBm			
6	2437	12.95	12.84	11.68	11.60	11.38	10.62	10.51	10.05	1 Watt = 30 dBm			
9	2452	12.91	12.79	11.60	11.48	11.28	10.52	10.39	9.92	1 Watt = 30 dBm			

Cat	ble loss $= 0$				Peak	Power	Output (dBm)				
СН	Frequency (MHz)										
	()	162	216	243	270	300		Kequited Limit			
3	2422	10.06	9.70	9.59	8.99	8.91		1 Watt = 30 dBm			
6	2437	9.99	9.61	9.39	8.96	8.79		1 Watt = 30 dBm			
9	2452	9.82	9.39	9.19	8.81	8.71		1 Watt = 30 dBm			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms e-document.htm). Attention is drawn to the limitations of Service (www.sgs.com/terms and conditional issues established therein. Even if printed this electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at www.sgs.onsite.com/authentication, Any holder of this document is to be treated as an original within the energies to experime the company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.
SGS Taiwan Ltd.
No.134, Wu Kun Road, Wuku Industrial Zone, Taipei County, Taiwan / 台北縣五殿工業區五工路 134 號



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 24 of 156

Cał	Cable loss = 0Average Power Output (dBm)						I						
СН	Frequency (MHz)		Data Rate										
	(1/112)	13.5	27	40.5	54	81	108	121.5	135	Required Limit			
3	2422	9.38	9.28	8.66	8.53	7.68	7.62	6.80	6.76	1 Watt = 30 dBm			
6	2437	9.57	9.36	8.72	8.61	7.77	7.71	6.91	6.81	1 Watt = 30 dBm			
9	2452	9.21	9.08	8.52	8.42	7.53	7.34	6.76	6.71	1 Watt = 30 dBm			

Cat	ble loss $= 0$				Avera	ge Powe	r Output (dBm)				
СН	Frequency (MHz)			Required Limit							
	(11112)	162	216	243	270	300					
3	2422	5.81	5.75	4.80	4.68	3.52		1 Watt = 30 dBm			
6	2437	5.98	5.82	4.88	4.81	3.65		1 Watt = 30 dBm			
9	2452	5.80	5.69	4.78	4.65	3.48		1 Watt = 30 dBm			

\*Note: Offset 11 dB

#### 802.11n\_40M(MIMO)

СН	Frequency (MHz)	CH0 (mW)	CH1 (mW)	Combin (mW)	dBm	Required Limit
LOW	2422	19.770	19.724	39.494	15.965	1 Watt = 30dBm
MID	2437	19.543	19.724	39.268	15.940	1 Watt = 30dBm
HIGH	2452	19.454	19.543	38.997	15.910	1 Watt = 30dBm

Note: Refer to next page for plots.




FCC ID:UZI-R505

Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 25 of 156

### 802.11b, 1Mbps Peak Power Output Plot (CH Low)




### Peak Power Output Plot (CH Mid)

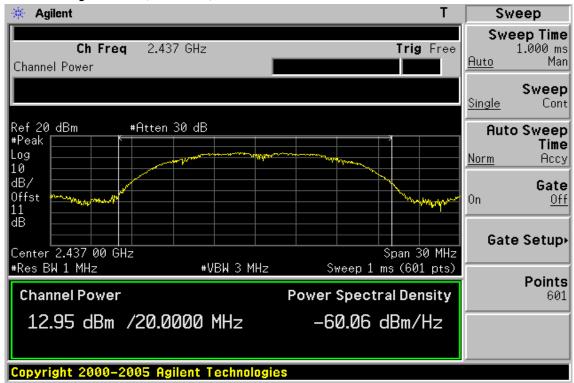




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 26 of 156

### Peak Power Output Plot (CH High)

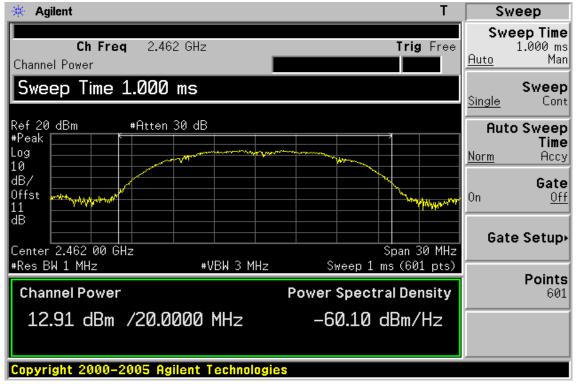


### Average Power Output Plot (CH Low)

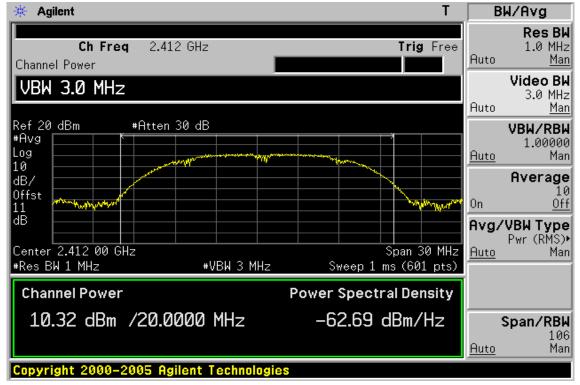




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 27 of 156

### Average Power Output Plot (CH Mid)

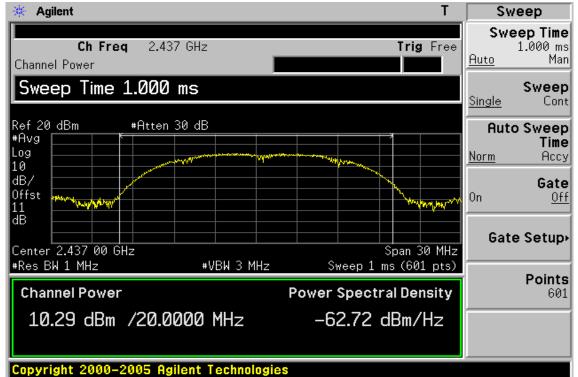

#### Average Power Output Plot (CH High)

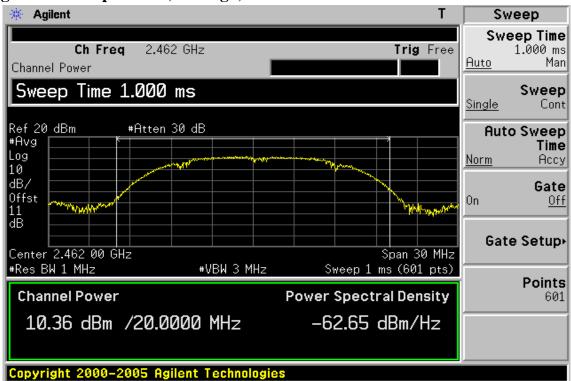




FCC ID:UZI-R505


Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 28 of 156

# 802.11g, 6Mbps



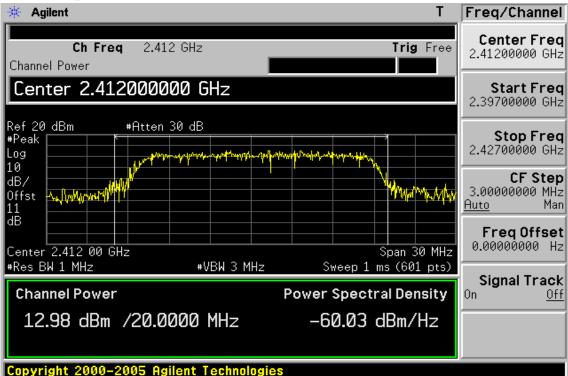


### Peak Power Output Plot (CH Mid)

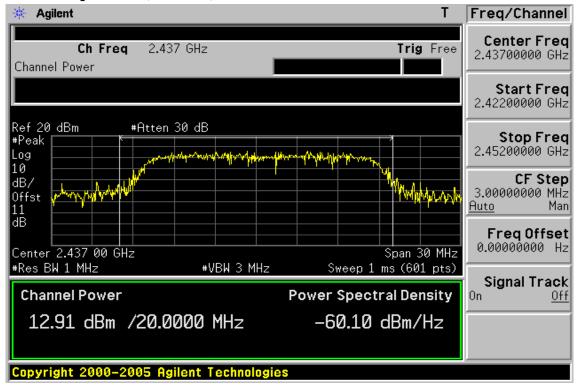




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 29 of 156

### Peak Power Output Plot (CH High)

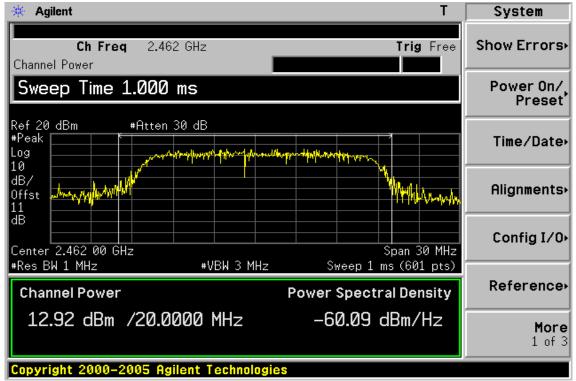


**Average Power Output Plot (CH Low)** 

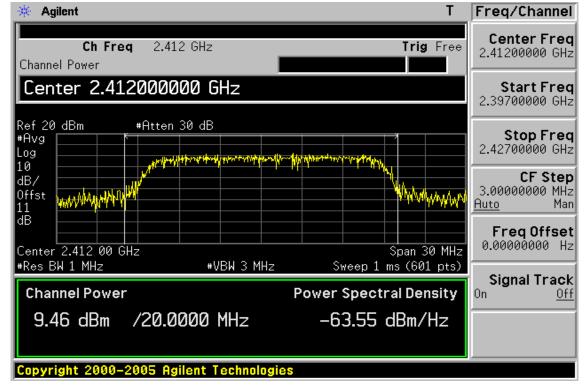




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 30 of 156

### Average Power Output Plot (CH Mid)

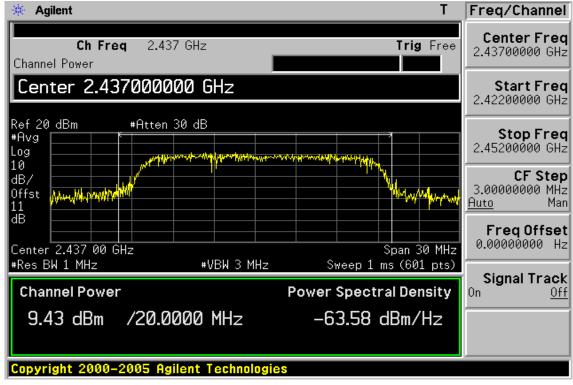

### Average Power Output Plot (CH High)

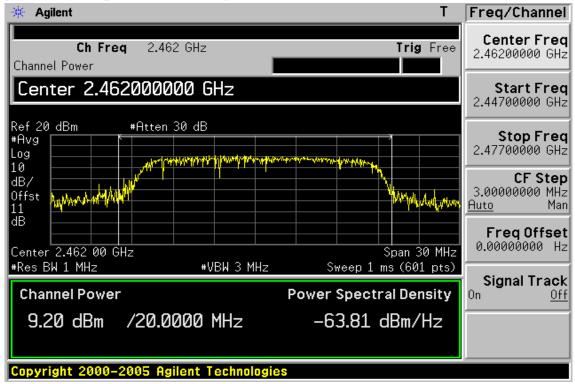


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company.  $k_{FF}$ ;  $F_{FF}$  and  $k_{FF}$  and  $k_$ 




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 31 of 156

### 802.11n\_20M, 6.5Mbps(Main) Peak Power Output Plot (CH Low)

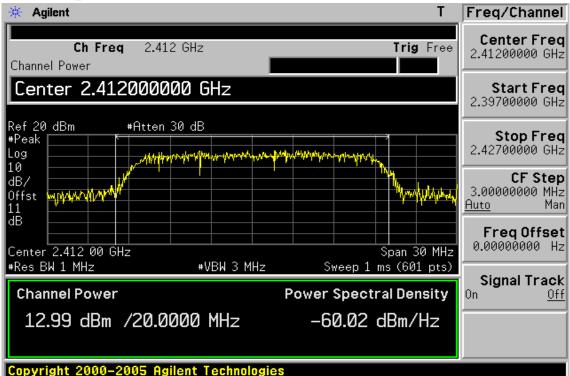


### Peak Power Output Plot (CH Mid)

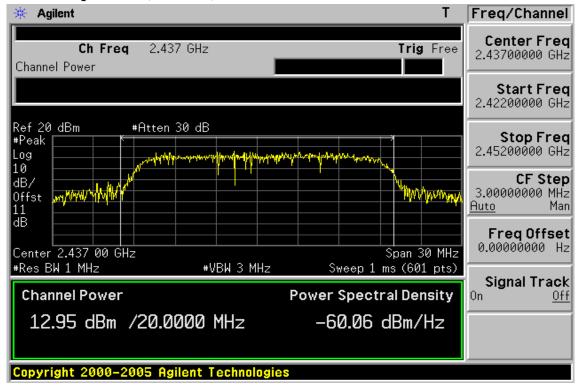




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 32 of 156

### Peak Power Output Plot (CH High)

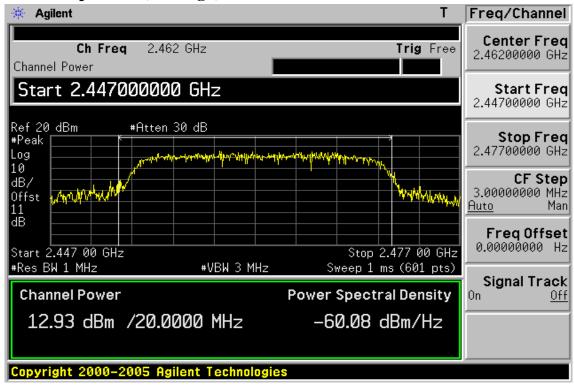

Average Power Output Plot (CH Low)

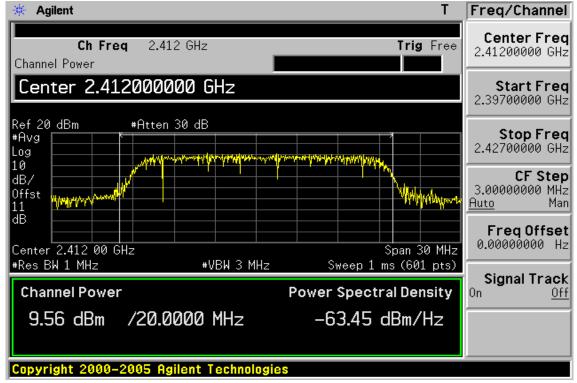


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company.  $k_{FF}$ ;  $F_{FF}$  and  $k_{FF}$  and  $k_$ 




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 33 of 156

### **Average Power Output Plot (CH Mid)**

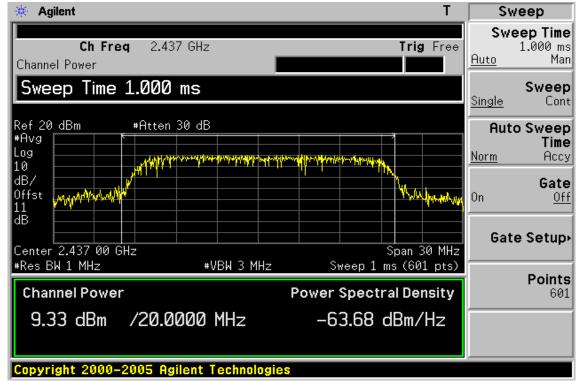


#### Average Power Output Plot (CH High)

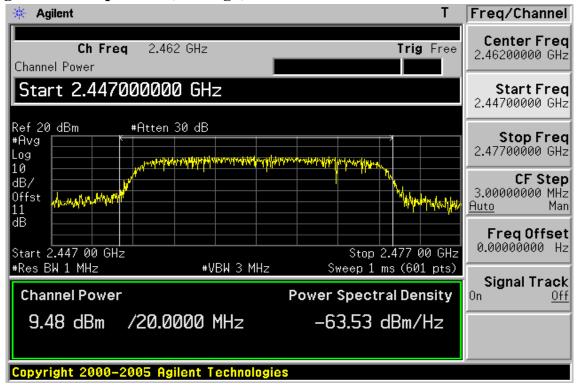




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 34 of 156

### 802.11n\_20M, 6.5Mbps(Aux) Peak Power Output Plot (CH Low)

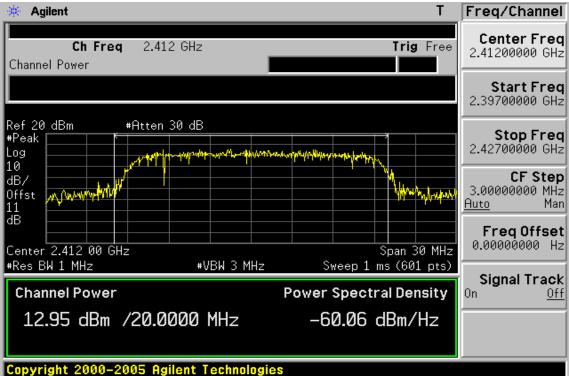


### Peak Power Output Plot (CH Mid)

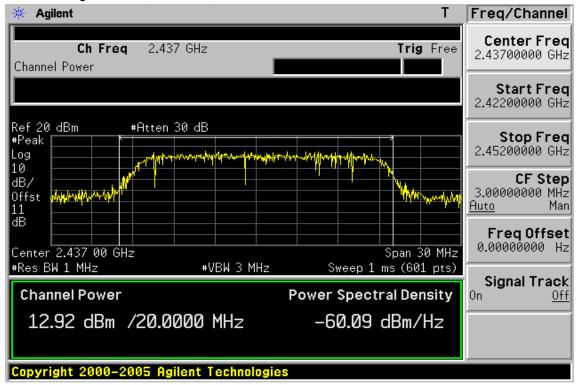




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 35 of 156

### Peak Power Output Plot (CH High)

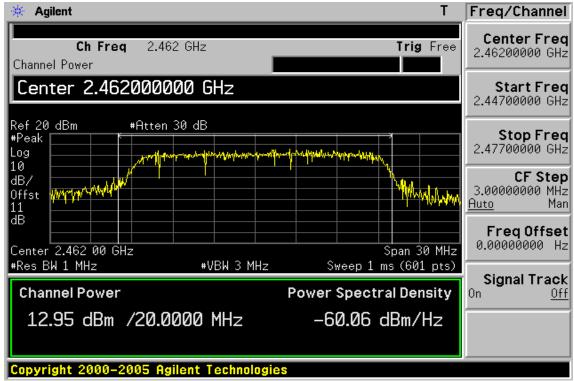

Average Power Output Plot (CH Low)

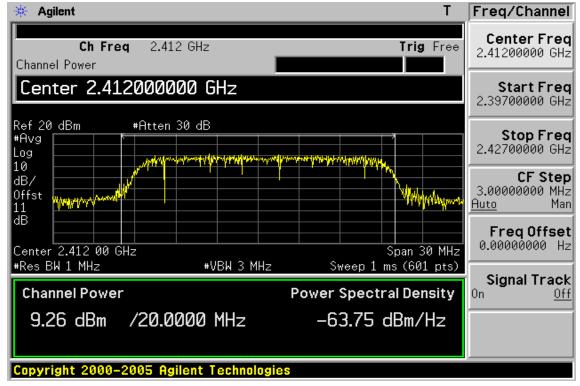


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company.  $k_{FF}$ ;  $F_{FF}$  and  $k_{FF}$  and  $k_$ 




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 36 of 156

### Average Power Output Plot (CH Mid)

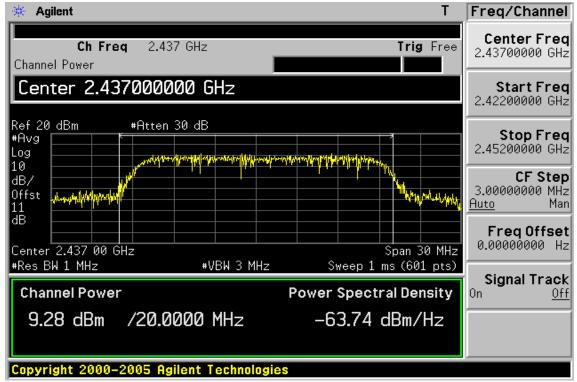

### Average Power Output Plot (CH High)

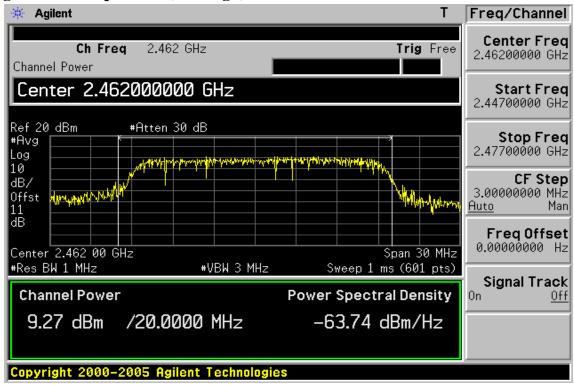


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company.  $k_{FF}$ ;  $F_{FF}$  and  $k_{FF}$  and  $k_$ 




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 37 of 156

# 802.11n\_40M, 13.5Mbps(Main) Peak Power Output Plot (CH Low)

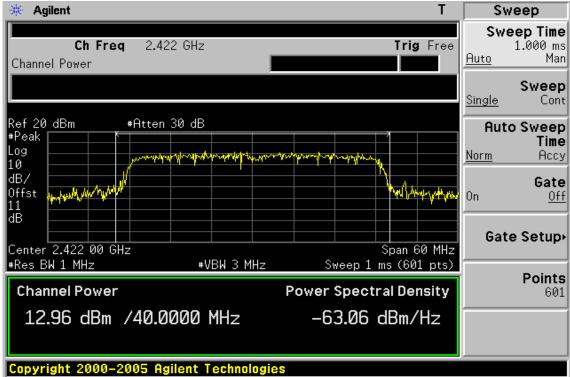


# Peak Power Output Plot (CH Mid)

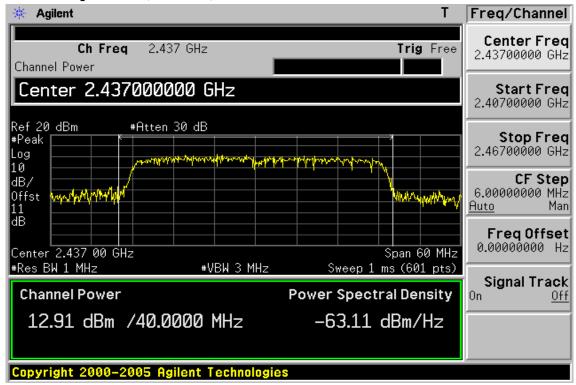




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 38 of 156

# Peak Power Output Plot (CH High)

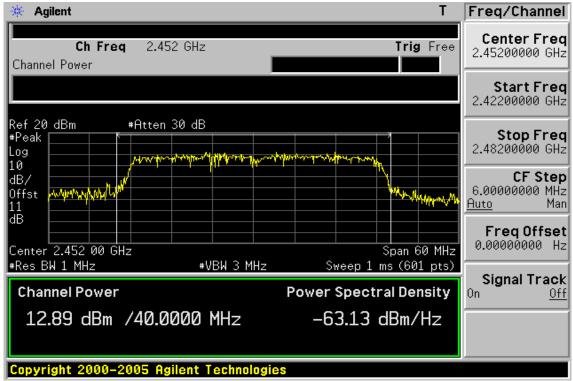


**Average Power Output Plot (CH Low)** 

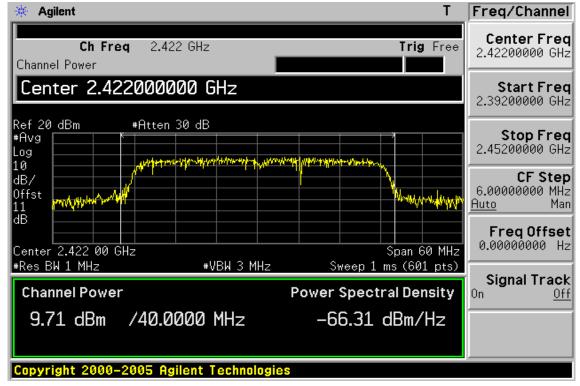




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 39 of 156

# Average Power Output Plot (CH Mid)

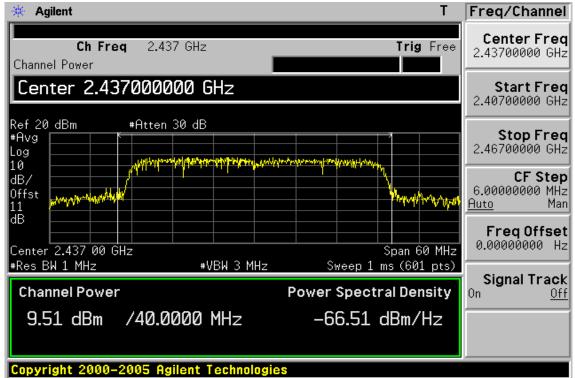


# Average Power Output Plot (CH High)

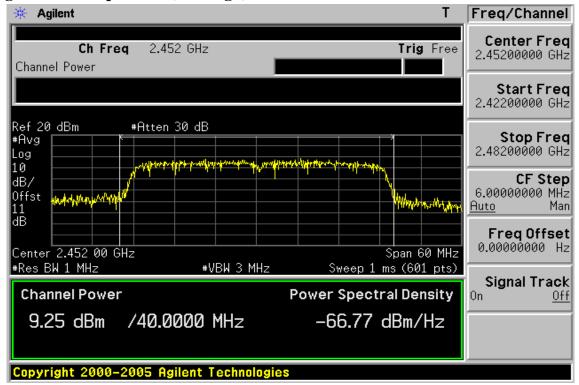




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 40 of 156

# 802.11n\_40M, 13.5Mbps(Aux) Peak Power Output Plot (CH Low)

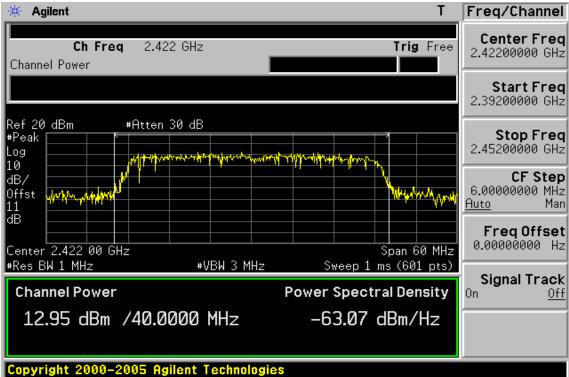


# Peak Power Output Plot (CH Mid)

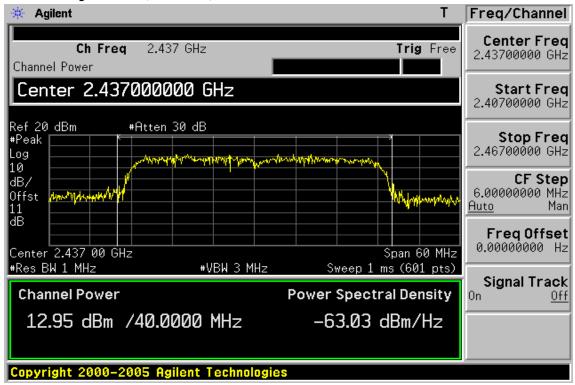




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 41 of 156

# Peak Power Output Plot (CH High)

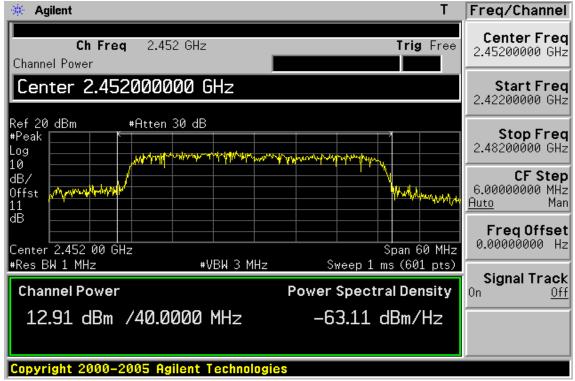


Average Power Output Plot (CH Low)

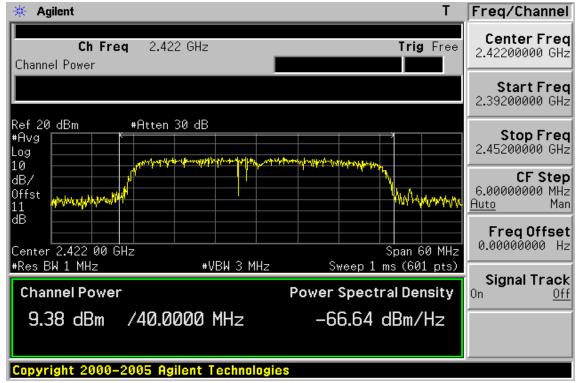




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 42 of 156

# Average Power Output Plot (CH Mid)

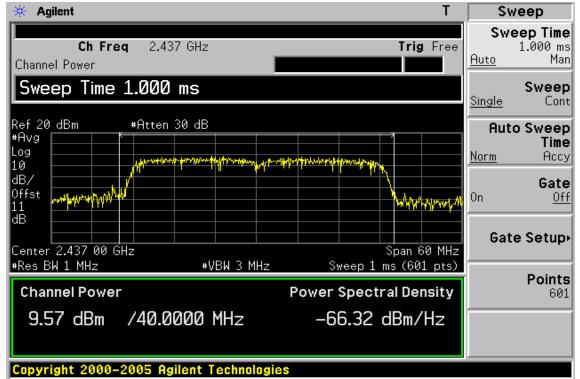

# Average Power Output Plot (CH High)

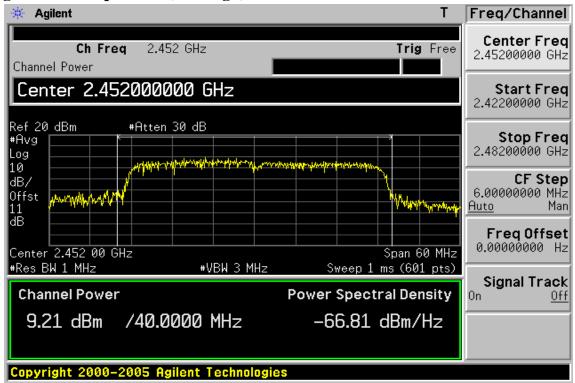



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 43 of 156

#### **6dB Bandwidth** 7

#### 7.1 **Standard Applicable:**

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

#### **Measurement Equipment Used:** 7.2

Refer to section 6.2 for details.

#### 7.3 **Test Set-up:**

Refer to section 6.3 for details.

#### 7.4 **Measurement Procedure:**

1.Place the EUT on the table and set it in transmitting mode.

- 2.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3.Set the spectrum analyzer as RBW=100KHz, VBW = 3\*RBW, Span= 30M/50MHz, Sweep=auto
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

www.tw.sgs.com



#### 7.5 **Measurement Result:**

#### 802.11b

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	10.238	> 500	PASS
2437	11.476	> 500	PASS
2462	10.185	> 500	PASS

## 802.11g

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	16.513	> 500	PASS
2437	16.518	> 500	PASS
2462	16.448	> 500	PASS

#### 802.11n\_20M(Main)

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	17.408	> 500	PASS
2437	17.359	> 500	PASS
2462	17.008	> 500	PASS

#### 802.11n\_20M(Aux)

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	17.222	> 500	PASS
2437	17.387	> 500	PASS
2462	17.53	> 500	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.sonsite.com/authentication</u>. Any holder of this docider of this document be reproduced, is intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Scs Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan / bt.\# Lat BL & Lege A the terms of the gene accept and the sector and



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 45 of 156

#### 802.11n\_40M(Main)

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2422	35.589	> 500	PASS
2437	36.179	> 500	PASS
2452	35.950	> 500	PASS

## 802.11n\_40M(Aux)


Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2422	35.603	> 500	PASS
2437	35.781	> 500	PASS
2452	35.604	> 500	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 46 of 156

# 802.11b 6dB Band Width Test Data CH-Low

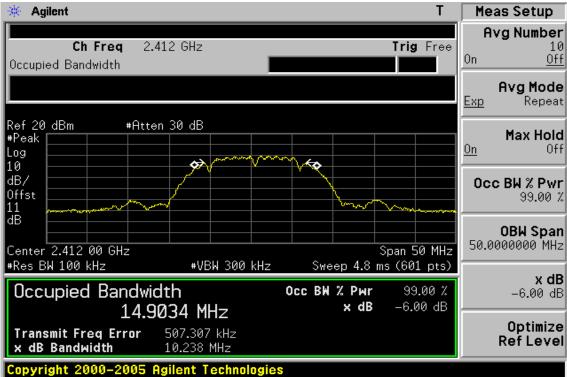


# 6dB Band Width Test Data CH-Mid

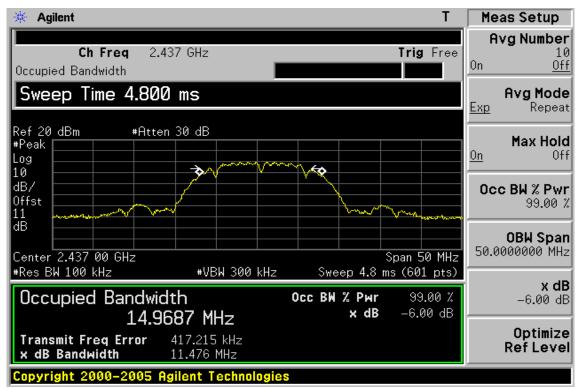



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 47 of 156


# 6dB Band Width Test Data CH-High

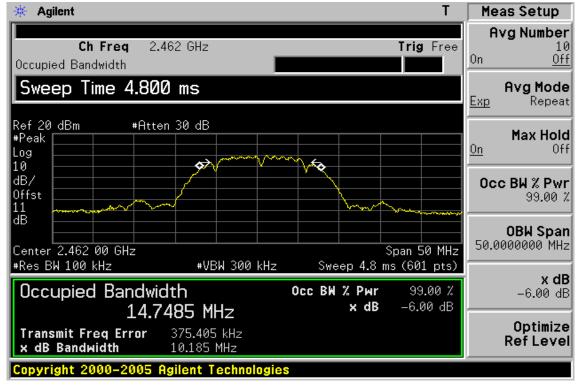




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 48 of 156

# 802.11g 6dB Band Width Test Data CH-Low

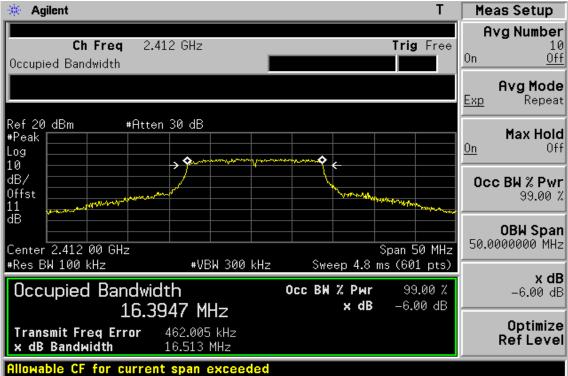


# 6dB Band Width Test Data CH-Mid

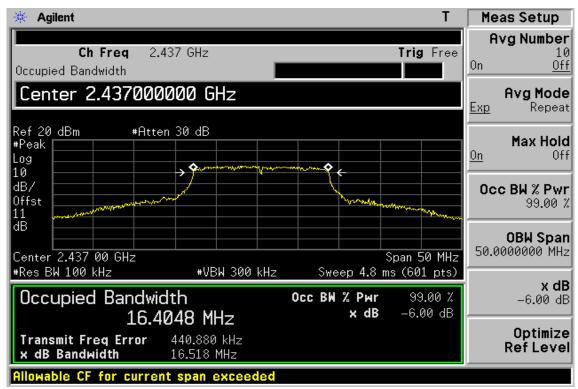



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 49 of 156


# 6dB Band Width Test Data CH-High

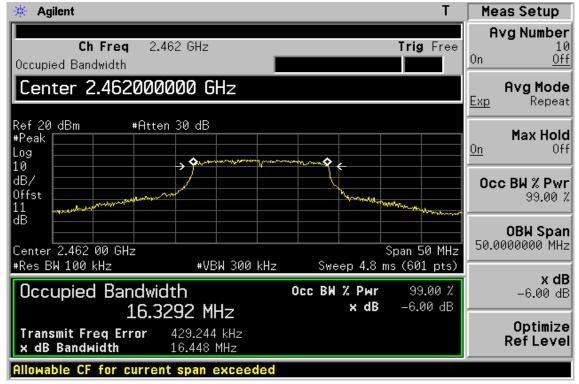




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 50 of 156

# 802.11n\_20M(Main) 6dB Band Width Test Data CH-Low

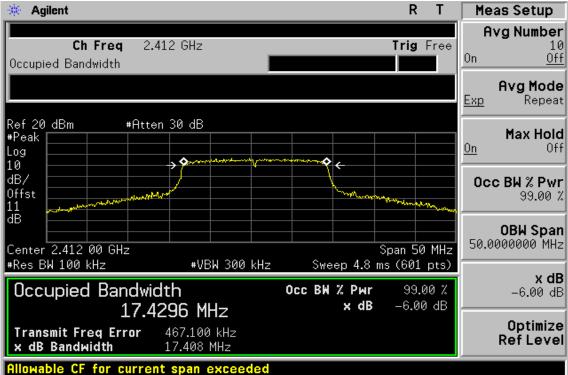


6dB Band Width Test Data CH-Mid

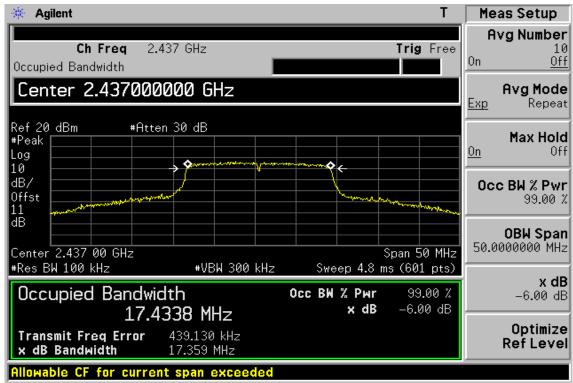



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 51 of 156

# 6dB Band Width Test Data CH-High

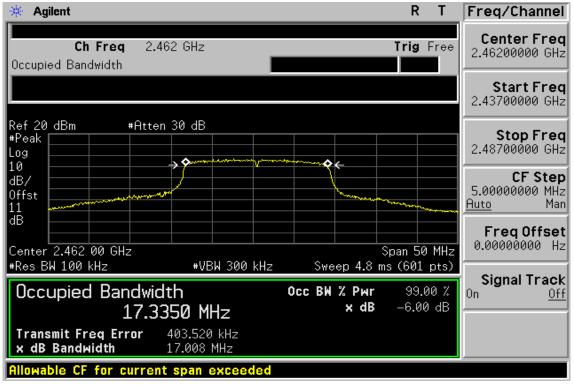





FCC ID:UZI-R505

Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 52 of 156

# 802.11n\_20M(Aux) 6dB Band Width Test Data CH-Low

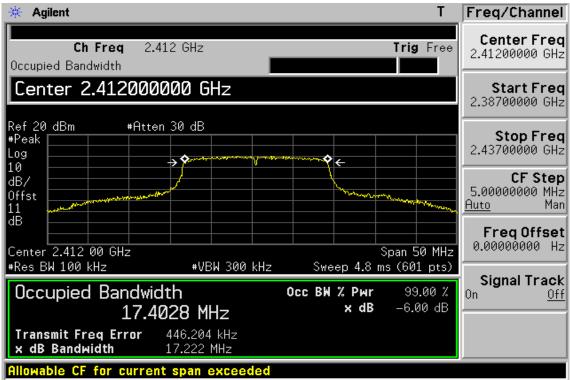


# 6dB Band Width Test Data CH-Mid

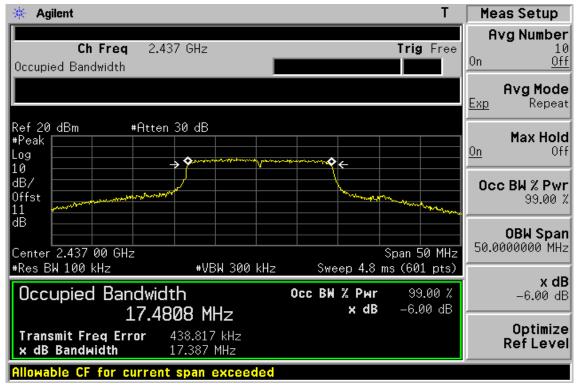



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 53 of 156


# 6dB Band Width Test Data CH-High

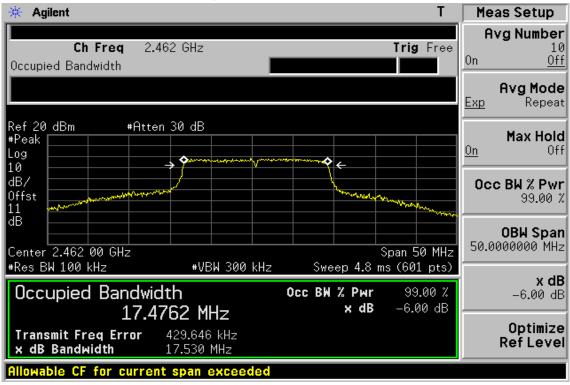




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 54 of 156

# 802.11n\_40M(Main) 6dB Band Width Test Data CH-Low

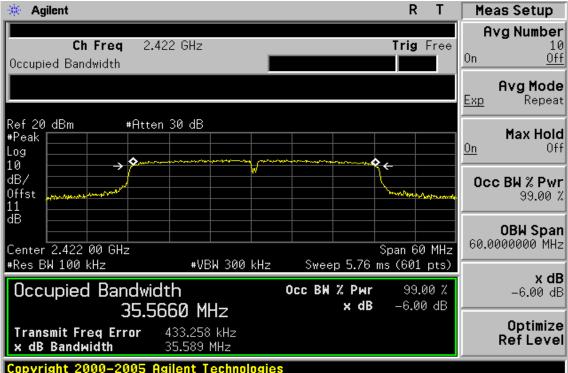


# 6dB Band Width Test Data CH-Mid

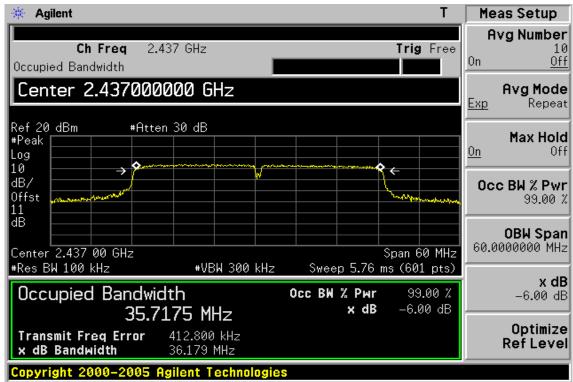



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 55 of 156

# 6dB Band Width Test Data CH-High

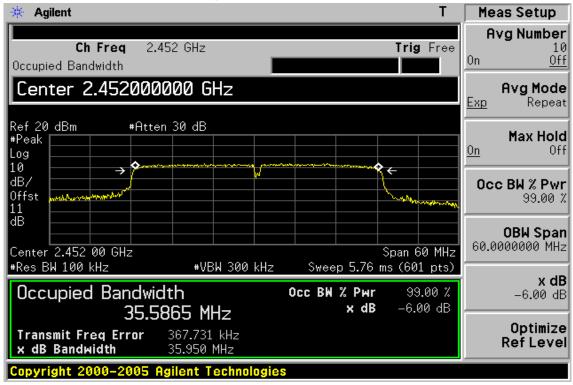





FCC ID:UZI-R505

Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 56 of 156

# 802.11n\_40M(Aux) 6dB Band Width Test Data CH-Low

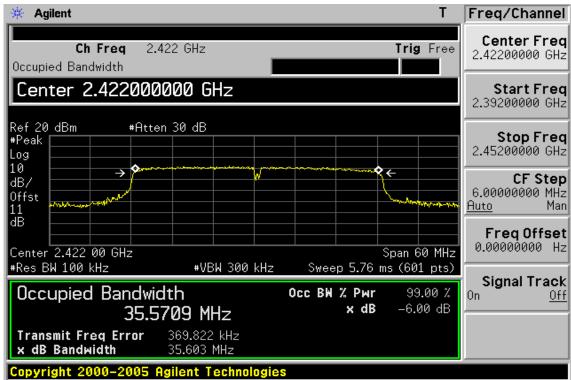


6dB Band Width Test Data CH-Mid

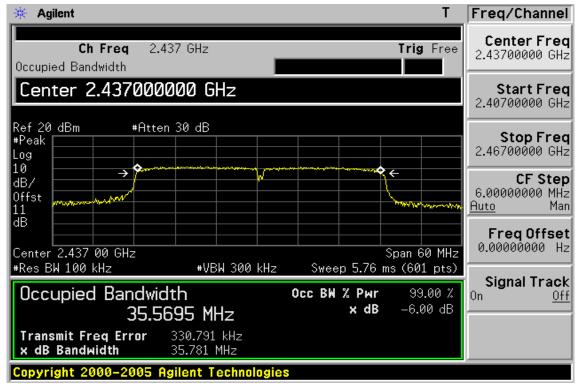



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 57 of 156

# 6dB Band Width Test Data CH-High

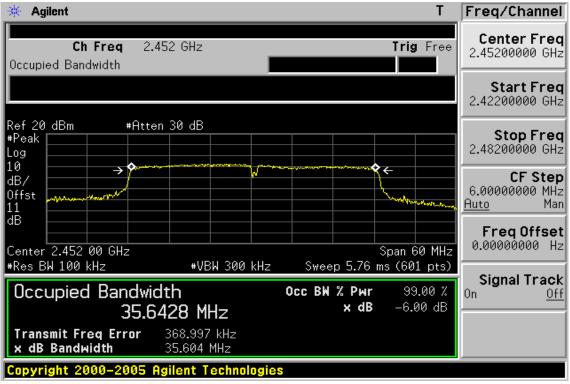

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms</u> and <u>conductors</u> full) and the leader to the General conductors of labelity, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this documents.

www.tw.sgs.com



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 58 of 156

# 8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

## 8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

## 8.2 Measurement Equipment Used:

## 8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

#### 8.2.2 Radiated emission:

966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2011	02/11/2012			
Loop antenna	MESSTEC	FLA30	03/10086	07/08/2009	07/07/2011			
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/19/2010	11/18/2011			
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2010	05/08/2012			
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2010	11/27/2011			
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2011	01/04/2012			
Turn Table	HD	DT420	N/A	N.C.R	N.C.R			
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R			
Controller	HD	HD100	N/A	N.C.R	N.C.R			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2011	01/04/2012			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2011	01/04/2012			
3m Site	SGS	966 chamber	N/A	11/08/2010	11/09/2011			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, thm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.onsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣五股工業區五工路 134 號



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 59 of 156


# 8.3 Test SET-UP:

## 8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

## 8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

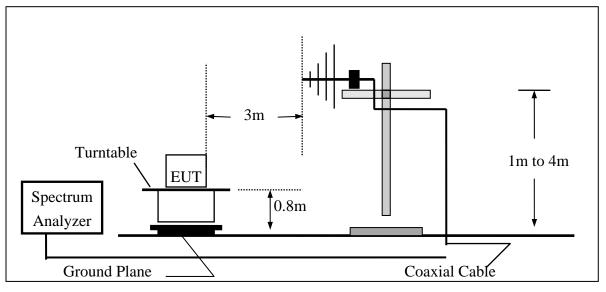

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

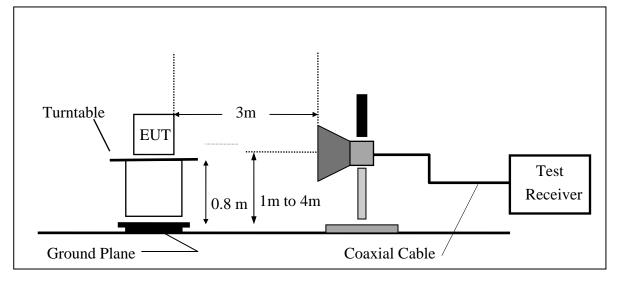



## 8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

# 8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

# $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 8.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,比聚告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms</u> and <u>conditions</u>) and Terms and <u>Conditions</u> for Electronic Documents (<u>www.sgs.com/terms</u> <u>e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this decument is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms</u> instructions, if any. Any holder of this document responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 61 of 156

# 802.11b Band Edges Test Data CH-Low

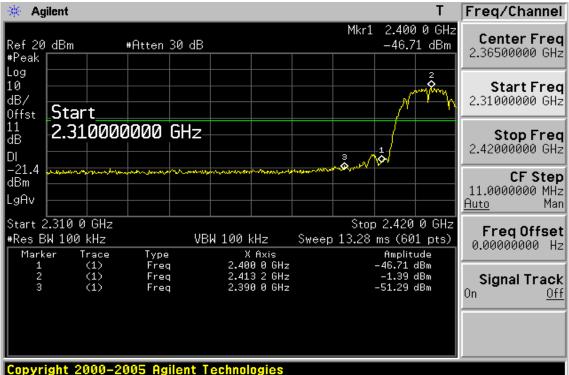



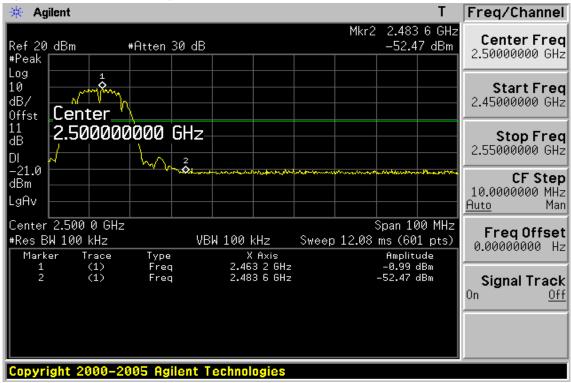

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,比聚告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms</u> and <u>conditions</u>) and Terms and <u>Conditions</u> for Electronic Documents (<u>www.sgs.com/terms</u> <u>e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this decument is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms</u> instructions, if any. Any holder of this document responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 62 of 156

## Radiated Emission: 802.11 b mode

Operation Mode Fundamental Frequency	TX CH Low 2412 MHz			Test Test		Jun. 07, 20 Lion	11
Temperature	25 °C			Pol	•	Ver.	
Humidity	65 %						
Pea k	AV	Actua		Peak	AV		
		Actua	11 F 5	геак	Αv		
Freq. Reading Re	ading Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz) (dBuV) (d	<b>BuV) CF</b> ( <b>dB</b> )	(dBuV/m)	(dBuV/m)(	dBuV/m)	dBuV/n	n) (dB)	

$(\mathbf{WIIIZ})$	(uDu V)	(uDuv)	CI (uD)	(uDu V/III)	(uDu V/III)		uDu V/I	II) ( <b>U</b> D)	
2390.00	55.63	45.33	-1.06	54.57	44.27	74.00	54.00	-9.73	Average
Operation I	Mode	TX C	H Low			Test	Date	Jun. 07, 20	011
Fundament	al Frequer	ncy 2412	MHz			Test	By	Lion	
Temperatur	re	25 °C				Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		

	I Ca K	AV		Actu	arrs	Itak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
2390.00	55.86	45.44	-1.06	54.80	44.38	74.00	54.00	-9.62	Average

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 63 of 156

## Radiated Emission: 802.11 b mode

Operation Mode	TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Pea k	AV		Actu	al FS	P ea k	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	$\mathbf{CF}(\mathbf{dB})$	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2483.50	46.58		-0.59	45.99		74.00	54.00	-28.01	Peak
Operation Fundamen Temperatu Humidity	tal Frequer		CH High MHz			Test Test Pol	By	Jun. 07, 20 Lion Hor.	11
	Peak	AV		Actu	al FS	Peak	AV		
Freq.		Reading (dBuV)			AV (dBuV/m)	Limit (dBuV/m)	Limit dBuV/n	0	Remark
Fundamen Temperatu Humidity	tal Frequer tre <b>Pea k</b>	ncy 2462 25 ℃ 65 % AV Reading	MHz Ant./CL		AV	Test Pol Peak Limit	By AV Limit	Lion Hor. Margin	

2483.50 47.88 --- -0.59 47.29 --- 74.00 54.00 -26.71 Peak


#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 64 of 156

# 802.11g Band Edges Test Data CH-Low

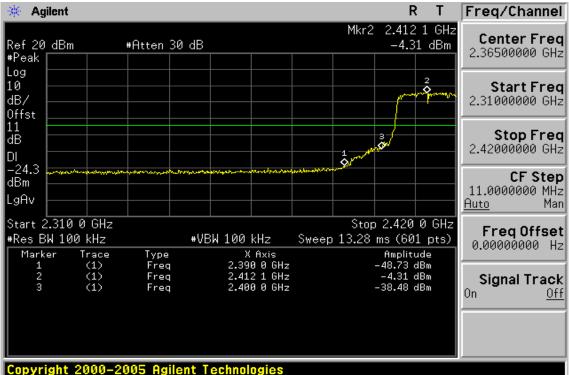



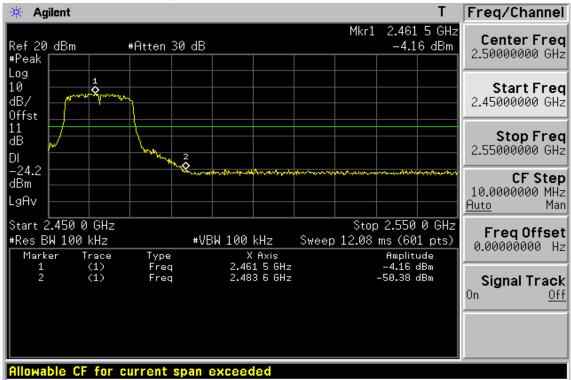



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 65 of 156

## Radiated Emission: 802.11 g mode

Operation Mode Fundamental Frequency	TX CH Low 2412 MHz			Test Date Test By		Jun. 07, 2011 Lion	
Temperature	25 °C			Pol		Ver.	
Humidity	65 %						
Peak	AV	Actua	l FS	P ea k	AV		
Freq. Reading Re	ading Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz) (dBuV) (d	BuV) CF(dB)	(dBuV/m)	(dBuV/m) (d	lBuV/m)(	dBuV/m	<b>(dB</b> )	
2390.00 54.35 30	) 17 1.06	53 20	38 /1	74.00	54.00	15 50	Average

lverage
-
l
l

		Pea k	AV		Actu	al FS	P ea k	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
	/ >									
_	(MHz)	(dBuV)	(dBuV)	$\mathbf{CF}(\mathbf{dB})$	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument us-(2)ing Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 66 of 156

## Radiated Emission: 802.11 g mode

Operation ModeTX CH HighFundamental Frequency2462 MHzTemperature25 °CHumidity65 %					Test Test Pol	Date By	Jun. 07, 20 Lion Ver.	011	
	<b>Pea k</b>	AV		Actu	al FS	P ea k	AV		
Freq.	U	Reading		Peak	AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	$\mathbf{CF}(\mathbf{dB})$	(dBuV/m)	) (dBuV/m)	(dBuV/m)	(dBuV/r	n) (dB)	
2483.50	55.50	39.22	-0.59	54.91	38.63	74.00	54.00	-15.37	Average
Operation			H High			Test Test	Date	Jun. 07, 20 Lion	11
Fundamen	-	2					Бу		
Temperatu	re	25 °C	/			Pol		Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	P ea k	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/r	n) (dB)	
2483.50	59.91	43.71	-0.59	59.32	43.12	74.00	54.00	-10.88	Average


#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 67 of 156

# 802.11n\_20M(Main) Band Edges Test Data CH-Low

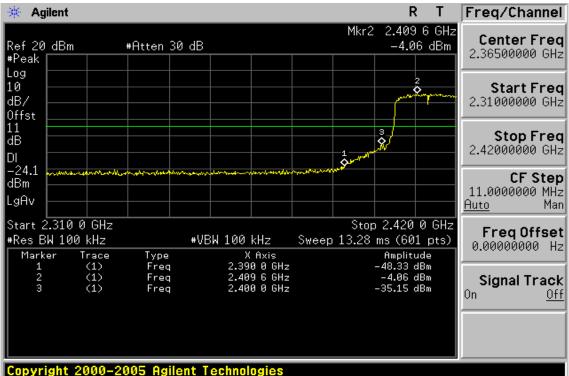



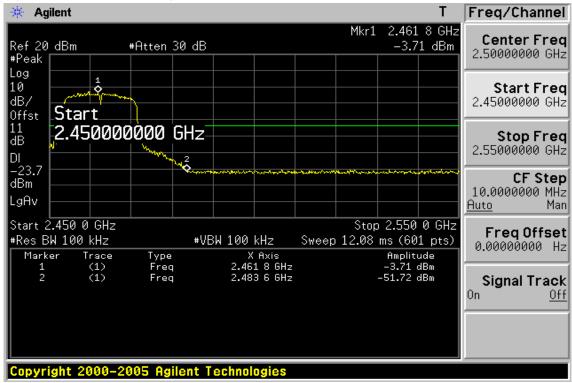



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 68 of 156

#### Radiated Emission: 802.11 n\_20M mode

Operation Mode	TX CH Low		Test Date	Jun. 07, 2011
Fundamental Frequency	2412 MHz		Test By	Lion
Temperature	25 °C		Pol	Ver.
Humidity	65 %			
Deels	A \$7	A studie		

	Pea k	AV		Actu	al FS	P ea k	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	dBuV/r	n) (dB)	
2390.00	61.37	44.41	-1.06	60.31	43.35	74.00	54.00	-10.65	Average
Operation	Mode	TX C	H Low			Test	Date	Jun. 07, 20	)11
Fundamen	tal Frequer	ncy 2412	MHz			Test	By	Lion	
Temperatu	re	25 °C				Pol	-	Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		

	геак	Av		Actu	ai r s	геак	Αv		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
2390.00	62.81	47.70	-1.06	61.75	46.64	74.00	54.00	726	Average

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 69 of 156

#### Radiated Emission: 802.11 n\_20M mode

Operation Mode	TX CH High			Test	Date	Jun. 07, 20	11
Fundamental Frequency	2462 MHz			Test	By	Lion	
Temperature	25 °C			Pol		Ver.	
Humidity	65 %						
Peak	AV	Actua	al FS	Peak	AV		
Freq. Reading Re	ading Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz) (dBuV) (d	BuV) CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	dBuV/n	1) (dB)	

(11112)	(uDu )	(uDu I)	OI(UD)		(ubu (/m)	(ubu / m)	(uDu V/II	I) (UD)	
2483.50	57.34	38.05	-0.59	56.75	37.46	74.00	54.00	-16.54	Average
Operation ModeTX CH HighFundamental Frequency2462 MHzTemperature25 °CHumidity65 %						Test Test Pol	By	Jun. 07, 20 Lion Hor.	)11
F	Peak	AV			al FS	Peak	AV		<b>D</b>
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark

# (MHz) (dBuV) (dBuV) CF(dB) (dBuV/m) (dBuV/m) (dBuV/m) (dBuV/m) 2483.50 58.79 40.31 -0.59 58.20 39.72 74.00 54.00 -14.28 Average


#### Remark:


- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 70 of 156

# 802.11n\_20M(Aux) Band Edges Test Data CH-Low

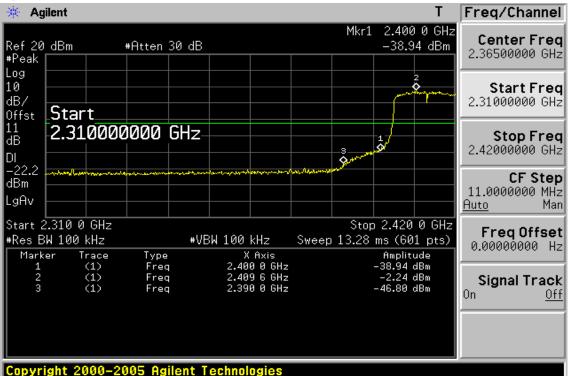




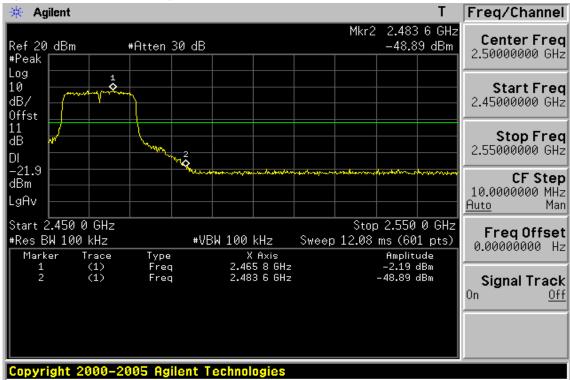




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 71 of 156

# 802.11n\_40M(Main) Band Edges Test Data CH-Low

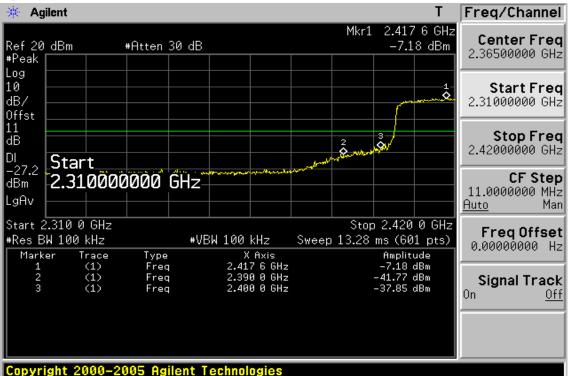



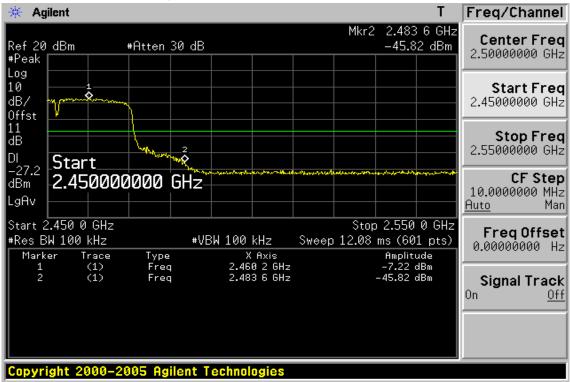



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 72 of 156

#### Radiated Emission: 802.11 n\_40M mode

Operation Mode	TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2422 MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Pea k	AV		Actu	al FS	P ea k	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	<b>(dB)</b>	
2390.00	62.90	49.95	-1.06	61.84	48.89	74.00	54.00	-5.11	Average
Operation Fundamen Temperatu Humidity	tal Frequer					Test Test Pol	By 1	Jun. 07, 20 Lion Hor.	011
	<b>Pea</b> k	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m	0	Remark

Remark:

2390.00

65.65

51.45

-1.06

(1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

50.39

64.59

74.00

54.00

-3.61

Average

- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 73 of 156

#### Radiated Emission: 802.11 n\_40M mode

Operation Mode	TX CH High					Jun. 07, 20	11
Fundamental Frequency	2452 MHz			Test	By	Lion	
Temperature	25 °C			Pol		Ver.	
Humidity	65 %						
Peak	AV	Actua	l FS	Peak	AV		
Freq. Reading Re	ading Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz) (dBuV) (d	<b>BuV) CF</b> ( <b>dB</b> )	(dBuV/m)	(dBuV/m)	(dBuV/m)	dBuV/n	n) ( <b>dB</b> )	

$(\mathbf{WIIIZ})$	$(\mathbf{u}\mathbf{D}\mathbf{u}\mathbf{v})$	$(\mathbf{u}\mathbf{D}\mathbf{u}\mathbf{v})$	CF (uD)		(uDu v/m)	(ubuv/m)	ubu v/n	I) (UD)	
2483.50	59.48	43.22	-0.59	58.89	42.63	74.00	54.00	-11.37	Average
Operation	Mode	TX C	H High			Test	Date	Jun. 07, 20	011
Fundamen	tal Frequer	ncy 2452	MHz			Test	By	Lion	
Temperatu	re	25 °C	x /			Pol	•	Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	

### Remark:

2483.50

59.61

44.93

-0.59

(1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

59.02

44.34

74.00

54.00

-9.66


Average

- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 74 of 156

## 802.11n\_40M(Aux) Band Edges Test Data CH-Low

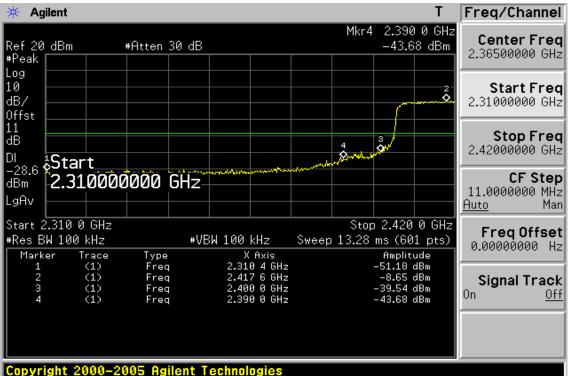



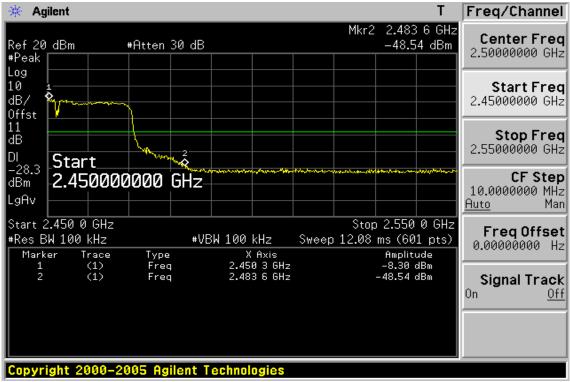



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 75 of 156

# 9 SPURIOUS RADIATED EMISSION TEST

#### 9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

#### 9.2 Measurement Equipment Used:

#### 9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

#### 9.2.2 Radiated emission:

Refer to section 7.2 for details.

#### 9.3 Test SET-UP:

#### 9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

#### 9.3.2 Radiated emission:

Refer to section 7.3 for details.

#### 9.4 Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.



#### 9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

#### $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 9.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 77 of 156

Freq/Channel


т

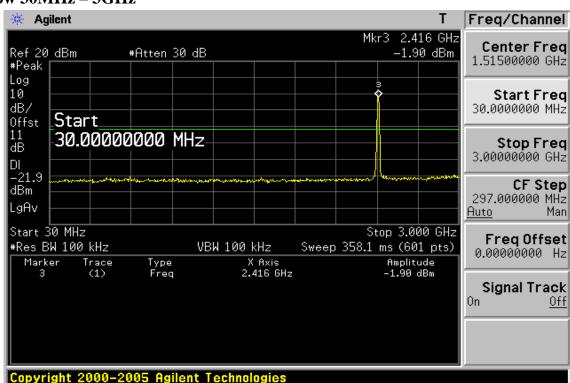

## Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz




Ch Low 3GHz – 26.5GHz

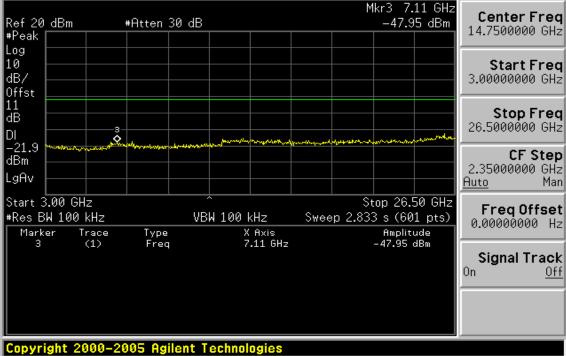




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 78 of 156

### Ch Mid 30MHz – 3GHz

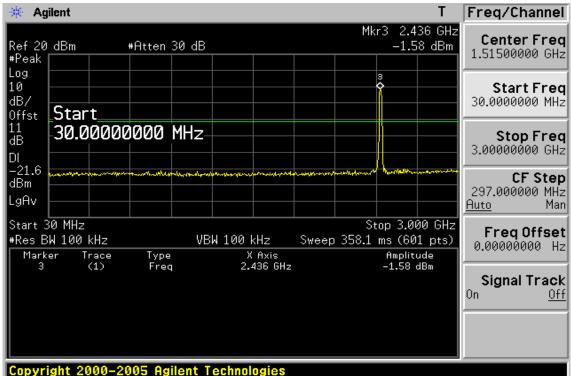


#### Ch Mid 3GHz – 26.5GHz

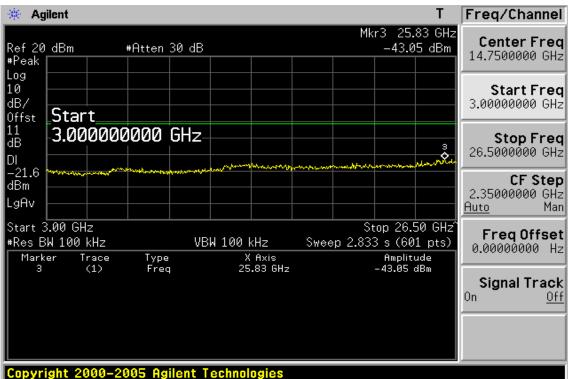




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 79 of 156

# Ch High 30MHz – 3GHz

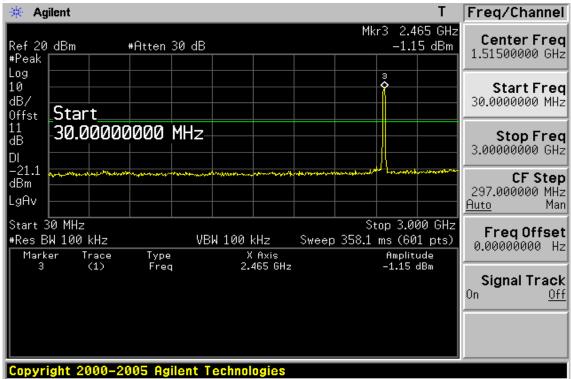


## Ch High 3GHz – 26.5GHz

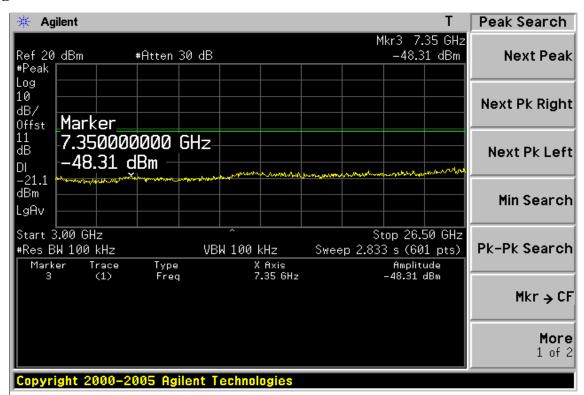




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 80 of 156

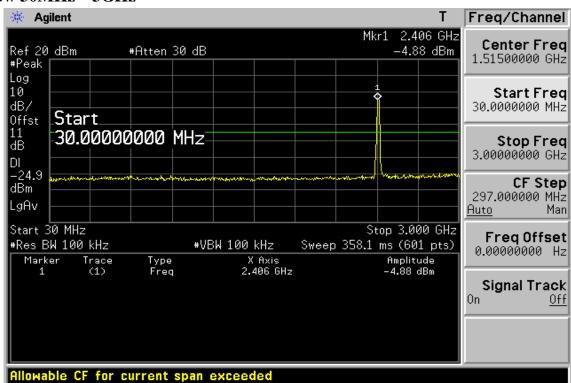

## Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz – 3GHz

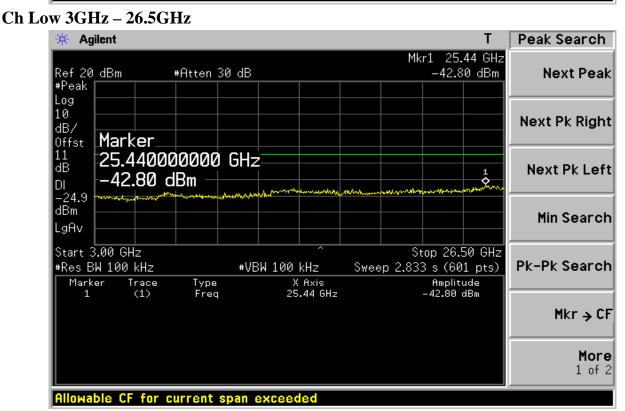


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,比聚告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms</u> and <u>conditions</u>) and Terms and <u>Conditions</u> for Electronic Documents (<u>www.sgs.com/terms</u> <u>e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this decument is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms</u> instructions, if any. Any holder of this document responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 81 of 156

### Ch Mid 30MHz – 3GHz

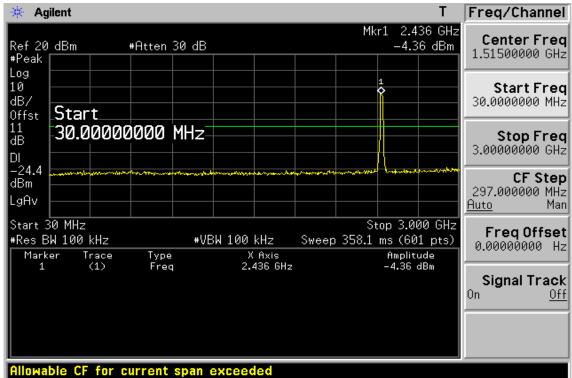


#### Ch Mid 3GHz – 26.5GHz

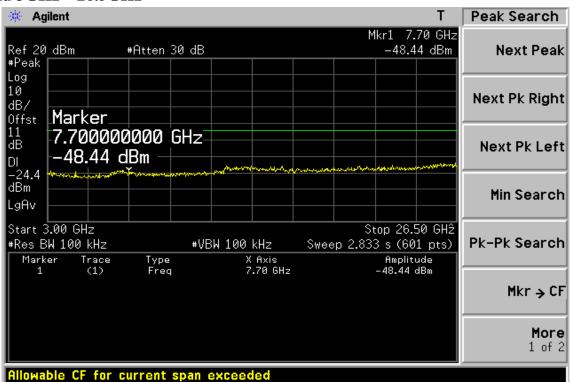




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 82 of 156

# Ch High 30MHz – 3GHz

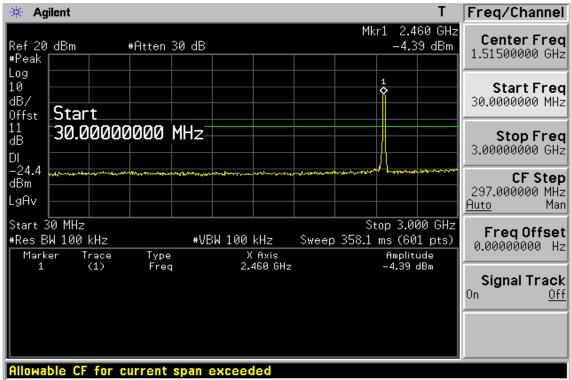


#### Ch High 3GHz – 26.5GHz

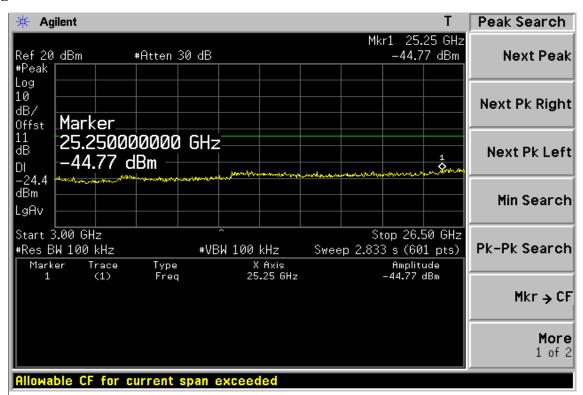




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 83 of 156

# Conducted Spurious Emission Measurement Result (802.11n\_20M)(Main) Ch Low 30MHz – 3GHz

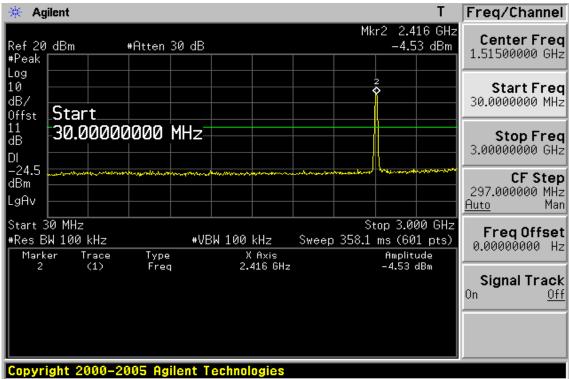




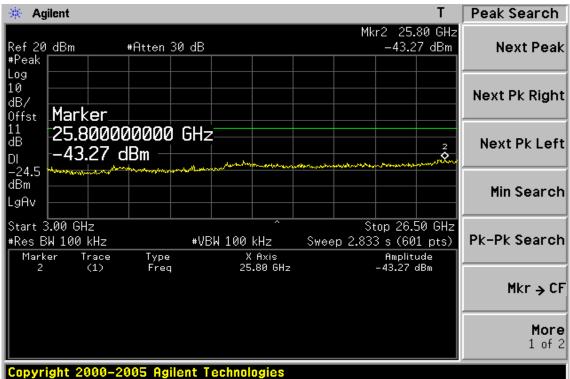




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 84 of 156

### Ch Mid 30MHz – 3GHz

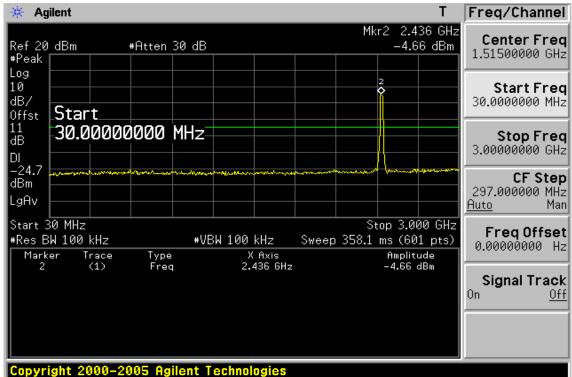


#### Ch Mid 3GHz – 26.5GHz

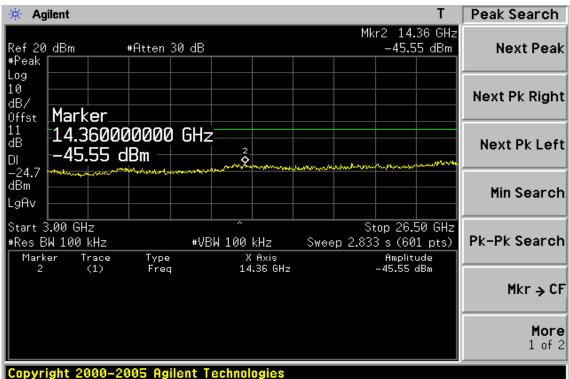




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 85 of 156

# Ch High 30MHz – 3GHz

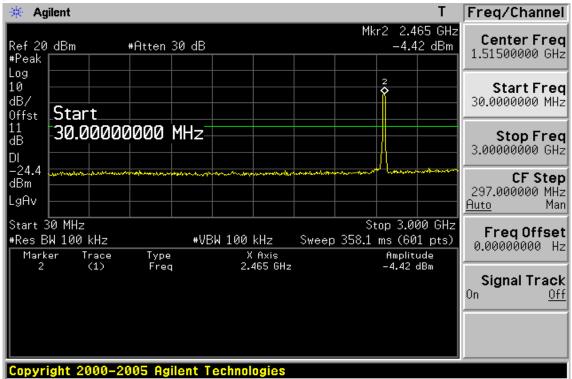


## Ch High 3GHz – 26.5GHz

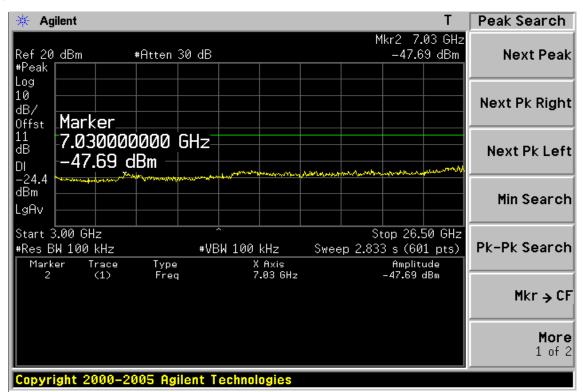




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 86 of 156

## Conducted Spurious Emission Measurement Result (802.11n\_20M)(Aux) Ch Low 30MHz – 3GHz

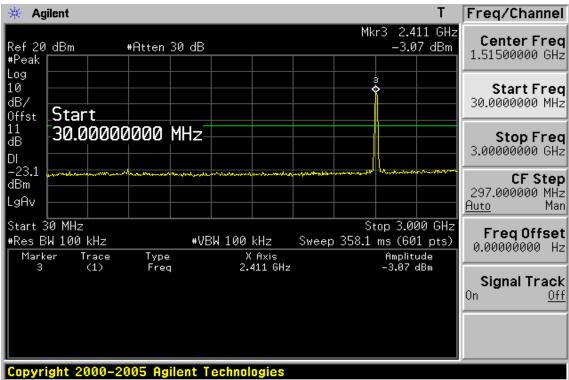




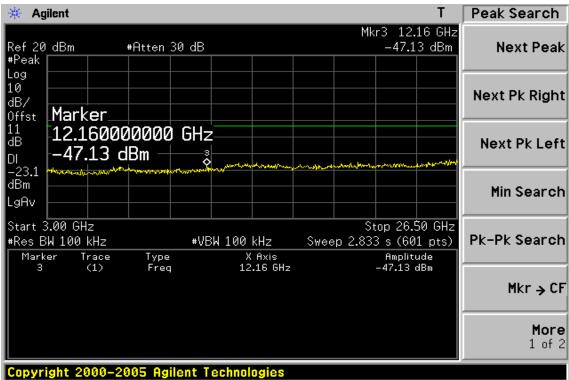




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 87 of 156

## Ch Mid 30MHz – 3GHz

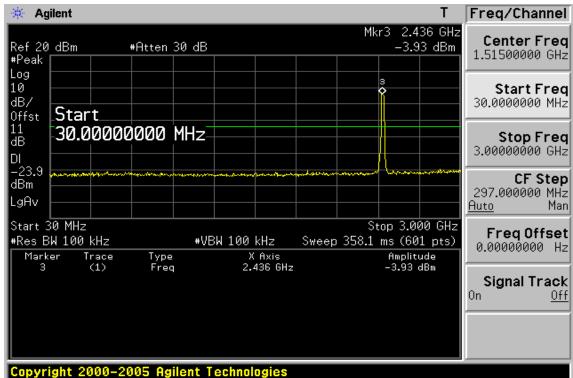


#### Ch Mid 3GHz – 26.5GHz

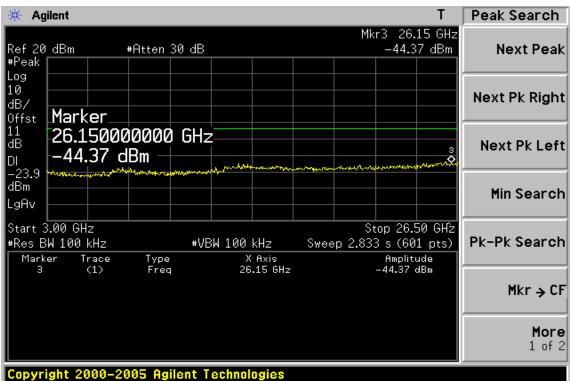




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 88 of 156

# Ch High 30MHz – 3GHz

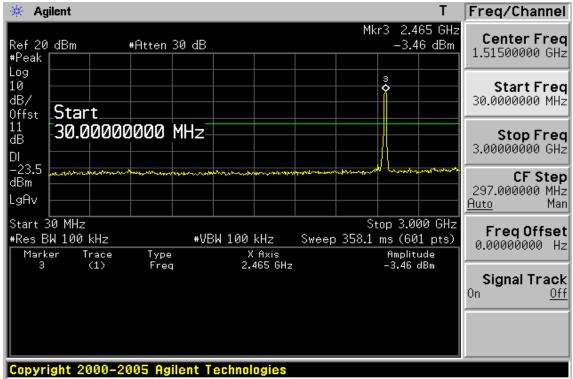

## Ch High 3GHz – 26.5GHz

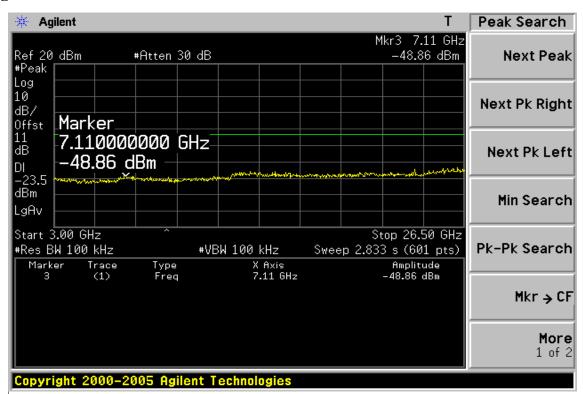






Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 89 of 156

Peak Search

# Conducted Spurious Emission Measurement Result (802.11n\_20M)(MIMO) Ch Low 30MHz – 3GHz

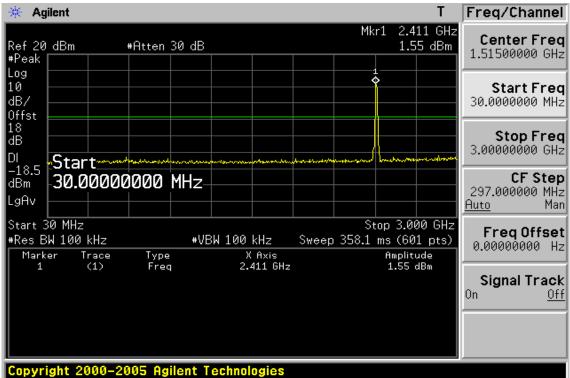

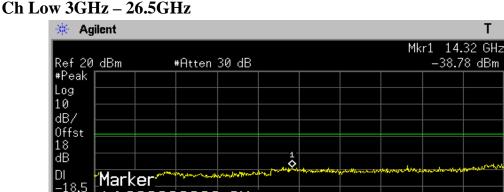


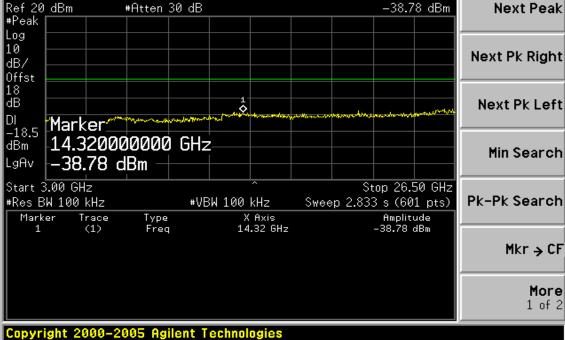




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 90 of 156

## Ch Mid 30MHz – 3GHz

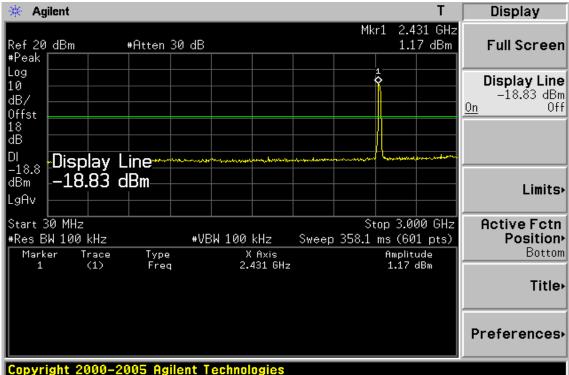


## Ch Mid 3GHz – 26.5GHz

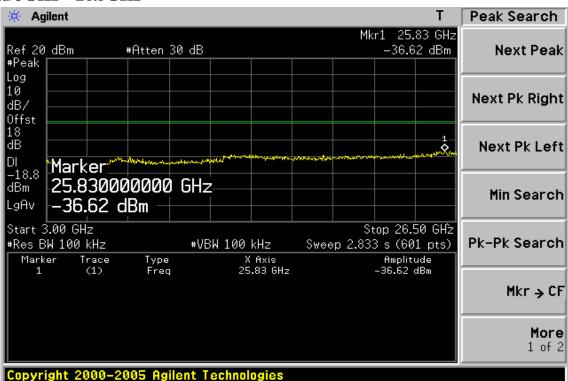




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 91 of 156

# Ch High 30MHz – 3GHz

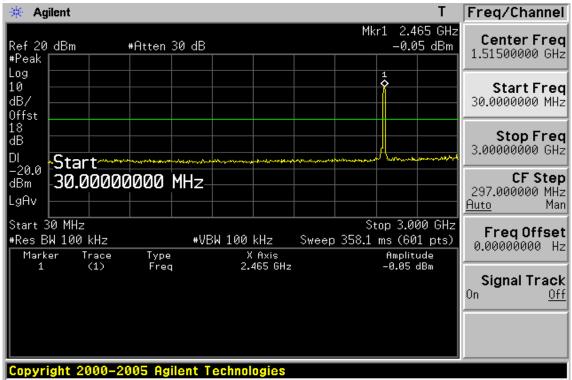


#### Ch High 3GHz – 26.5GHz

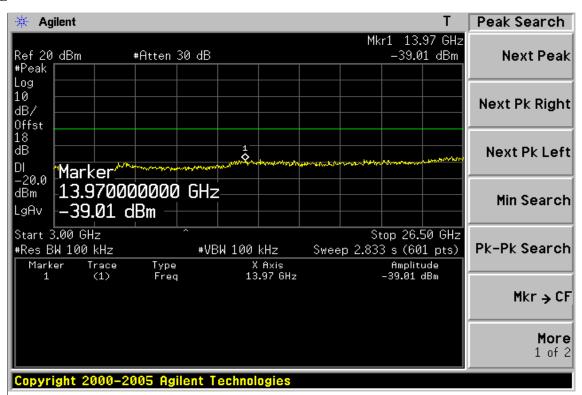




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 92 of 156

# Conducted Spurious Emission Measurement Result (802.11n\_40M) (Main) Ch Low 30MHz – 3GHz

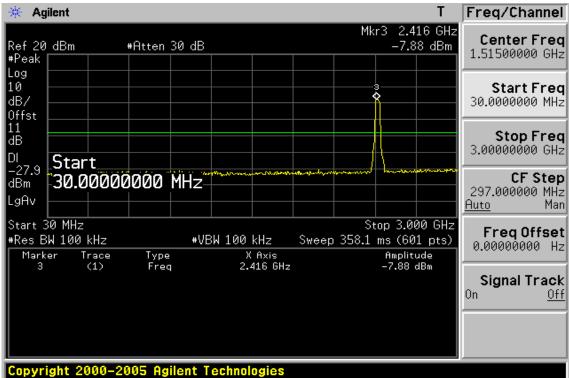




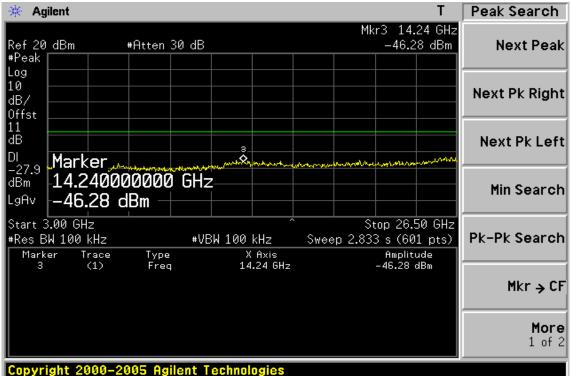



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 93 of 156

## Ch Mid 30MHz – 3GHz

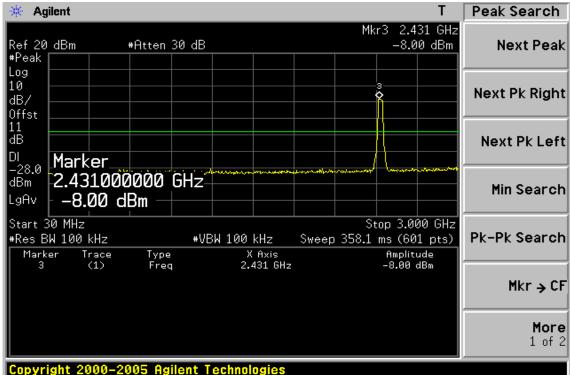









Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 94 of 156

# Ch High 30MHz – 3GHz

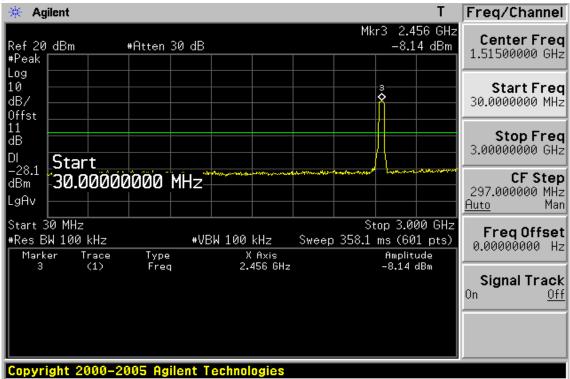


## Ch High 3GHz – 26.5GHz

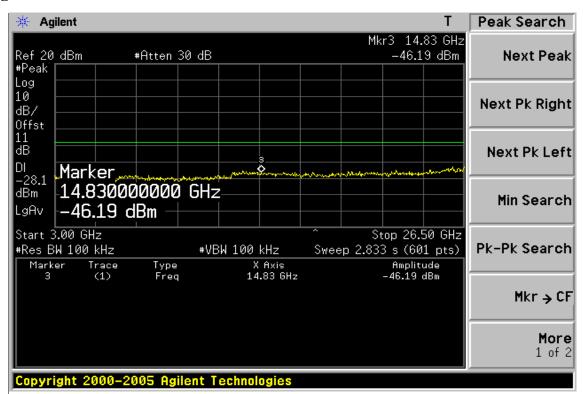




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 95 of 156

# Conducted Spurious Emission Measurement Result (802.11n\_40M) (Aux) Ch Low 30MHz – 3GHz

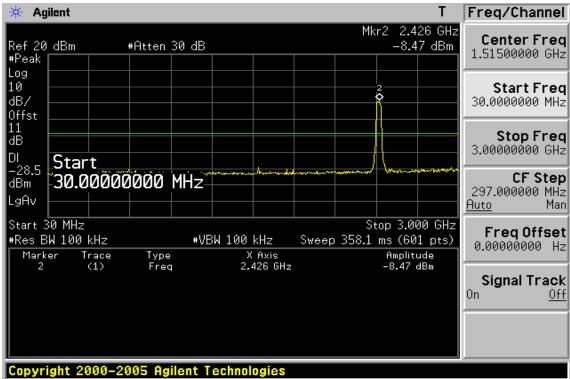



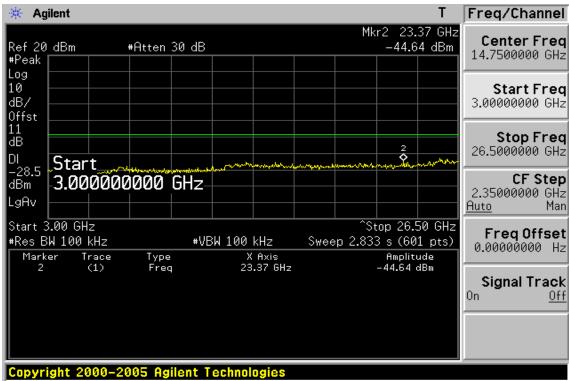


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,比聚告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms</u> and <u>conditions</u>) and Terms and <u>Conditions</u> for Electronic Documents (<u>www.sgs.com/terms</u> <u>e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this decument is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms</u> instructions, if any. Any holder of this document responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 96 of 156

## Ch Mid 30MHz – 3GHz

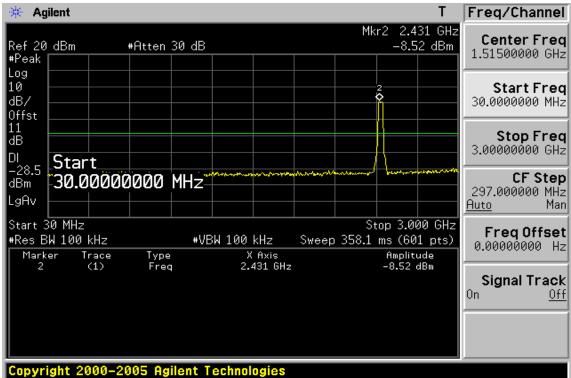




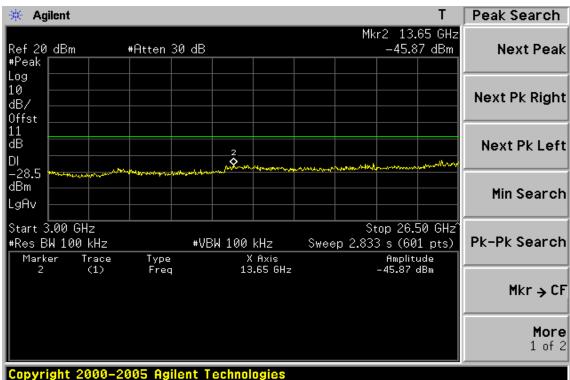




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 97 of 156

# Ch High 30MHz – 3GHz

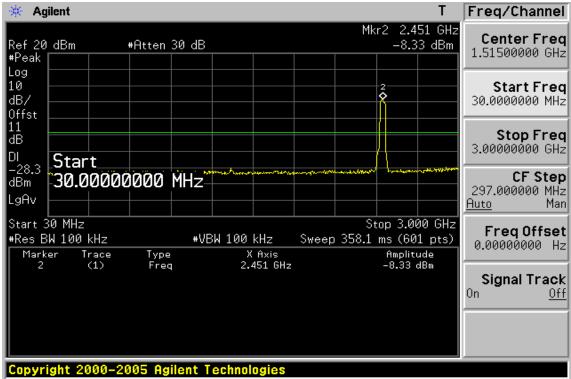


#### Ch High 3GHz – 26.5GHz

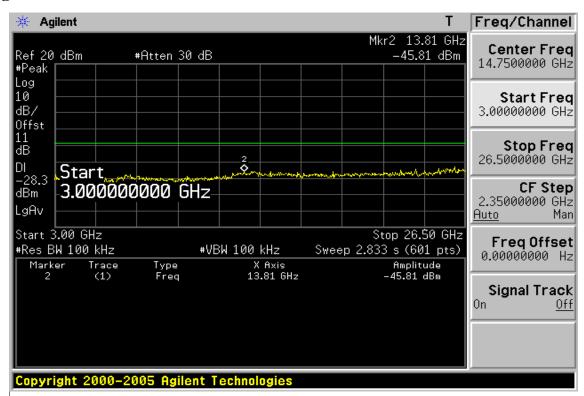




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 98 of 156

# Conducted Spurious Emission Measurement Result (802.11n\_40M) (MIMO) Ch Low 30MHz – 3GHz

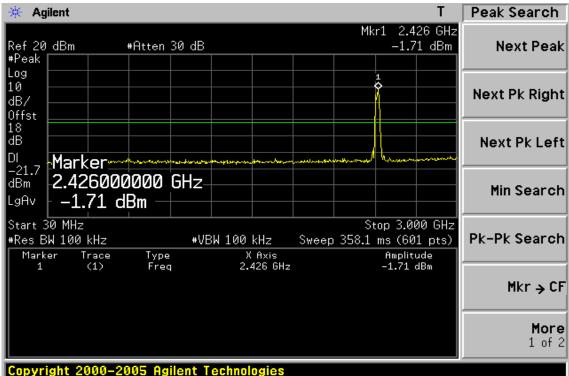


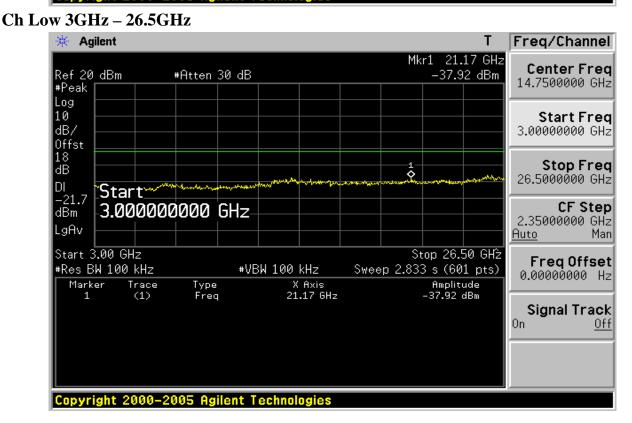




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 99 of 156

## Ch Mid 30MHz – 3GHz

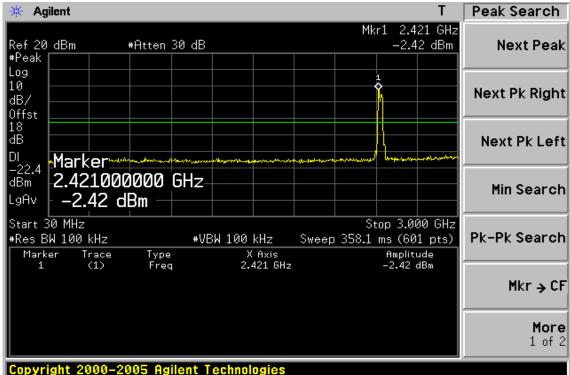




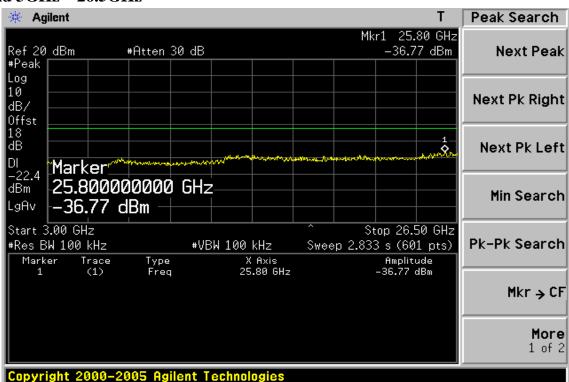




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 100 of 156

# Ch High 30MHz – 3GHz

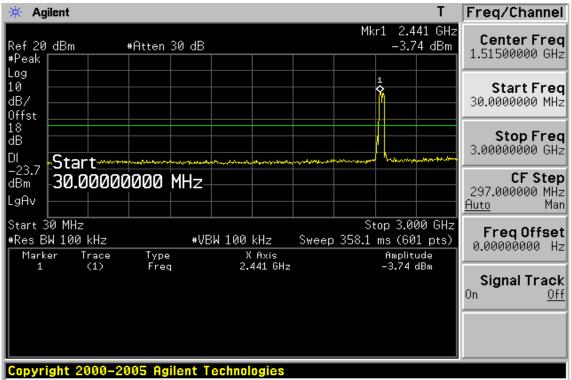

## Ch High 3GHz – 26.5GHz

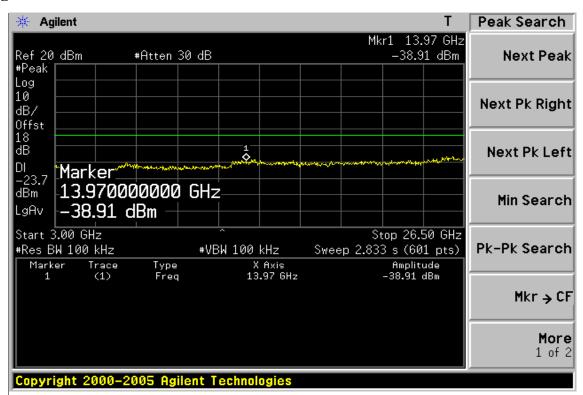



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 101 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol. H/V	Detector Mode	Reading	Factor	Actual FS (dBuV/m)	Limit3m	Safe Margin
 (MHz)	<b>H</b> / V	(PK/QP)	(dBuV)	( <b>dB</b> )		(dBuV/m)	( <b>dB</b> )
45.52	V	Peak	36.16	-13.75	22.41	40.00	-17.59
119.24	V	Peak	33.88	-14.63	19.25	43.50	-24.25
250.19	V	Peak	31.64	-13.88	17.76	46.00	-28.24
385.02	V	Peak	28.08	-11.08	17.00	46.00	-29.00
685.72	V	Peak	29.37	-5.45	23.92	46.00	-22.08
881.66	V	Peak	28.36	-2.70	25.66	46.00	-20.34
45.52	Н	Peak	29.58	-13.75	15.83	40.00	-24.17
150.04	Н	Peak	27.75	-12.00	15.75	43.50	-27.75
250.19	Н	Peak	33.42	-13.88	19.54	46.00	-26.46
370.47	Н	Peak	27.83	-11.20	16.63	46.00	-29.37
664.38	Н	Peak	29.01	-5.74	23.27	46.00	-22.73
886.51	Н	Peak	28.01	-2.61	25.40	46.00	-20.60

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 102 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	46.49	V	Peak	36.11	-13.76	22.35	40.00	-17.65
	111.48	V	Peak	32.09	-15.39	16.70	43.50	-26.80
	250.19	V	Peak	31.24	-13.88	17.36	46.00	-28.64
	361.74	V	Peak	29.22	-11.40	17.82	46.00	-28.18
	681.84	V	Peak	28.87	-5.53	23.34	46.00	-22.66
	879.72	V	Peak	27.95	-2.74	25.21	46.00	-20.79
	47.46	Н	Peak	28.35	-13.85	14.50	40.00	-25.50
	146.40	Н	Peak	28.49	-12.51	15.98	43.50	-27.52
	250.19	Н	Peak	33.78	-13.88	19.90	46.00	-26.10
	362.71	Н	Peak	27.76	-11.41	16.35	46.00	-29.65
	651.77	Н	Peak	28.95	-6.00	22.95	46.00	-23.05
	889.42	Н	Peak	28.52	-2.56	25.96	46.00	-20.04

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 103 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	45.52	V	Peak	36.39	-13.75	22.64	40.00	-17.36
	143.49	V	Peak	30.11	-12.80	17.31	43.50	-26.19
	250.19	V	Peak	32.11	-13.88	18.23	46.00	-27.77
	349.13	V	Peak	28.58	-11.56	17.02	46.00	-28.98
	688.63	V	Peak	27.90	-5.41	22.49	46.00	-23.51
	849.65	V	Peak	28.35	-3.22	25.13	46.00	-20.87
	46.49	Н	Peak	28.55	-13.76	14.79	40.00	-25.21
	154.16	Н	Peak	28.46	-12.18	16.28	43.50	-27.22
	250.19	Н	Peak	34.86	-13.88	20.98	46.00	-25.02
	357.86	Н	Peak	27.72	-11.45	16.27	46.00	-29.73
	652.74	Н	Peak	29.16	-5.97	23.19	46.00	-22.81
	886.51	Н	Peak	28.99	-2.61	26.38	46.00	-19.62

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 104 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	45.52	V	Peak	36.51	-13.75	22.76	40.00	-17.24
	154.16	V	Peak	29.58	-12.18	17.40	43.50	-26.10
	250.19	V	Peak	30.78	-13.88	16.90	46.00	-29.10
	366.59	V	Peak	28.00	-11.34	16.66	46.00	-29.34
	646.92	V	Peak	28.83	-6.06	22.77	46.00	-23.23
	890.39	V	Peak	28.09	-2.54	25.55	46.00	-20.45
	46.49	Н	Peak	28.67	-13.76	14.91	40.00	-25.09
	163.86	Н	Peak	28.06	-12.35	15.71	43.50	-27.79
	250.19	Н	Peak	33.35	-13.88	19.47	46.00	-26.53
	374.35	Н	Peak	27.56	-11.15	16.41	46.00	-29.59
	676.99	Н	Peak	28.07	-5.57	22.50	46.00	-23.50
	886.51	Н	Peak	28.13	-2.61	25.52	46.00	-20.48

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 105 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	45.52	V	Peak	36.48	-13.75	22.73	40.00	-17.27
	116.33	V	Peak	31.31	-14.83	16.48	43.50	-27.02
	250.19	V	Peak	31.48	-13.88	17.60	46.00	-28.40
	386.96	V	Peak	27.59	-11.07	16.52	46.00	-29.48
	663.41	V	Peak	28.32	-5.74	22.58	46.00	-23.42
	882.63	V	Peak	28.66	-2.67	25.99	46.00	-20.01
	39.70	Н	Peak	28.42	-13.38	15.04	40.00	-24.96
	146.40	Н	Peak	28.34	-12.51	15.83	43.50	-27.67
	250.19	Н	Peak	33.71	-13.88	19.83	46.00	-26.17
	335.55	Н	Peak	27.76	-11.82	15.94	46.00	-30.06
	639.16	Н	Peak	29.71	-6.18	23.53	46.00	-22.47
	896.21	Н	Peak	28.07	-2.42	25.65	46.00	-20.35

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 106 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	45.52	V	Peak	36.54	-13.75	22.79	40.00	-17.21
	113.42	V	Peak	32.46	-15.21	17.25	43.50	-26.25
	250.19	V	Peak	31.00	-13.88	17.12	46.00	-28.88
	352.04	V	Peak	27.92	-11.52	16.40	46.00	-29.60
	689.60	V	Peak	28.00	-5.41	22.59	46.00	-23.41
	893.30	V	Peak	28.68	-2.49	26.19	46.00	-19.81
	45.52	Н	Peak	29.02	-13.75	15.27	40.00	-24.73
	145.43	Н	Peak	28.61	-12.65	15.96	43.50	-27.54
	250.19	Н	Peak	32.96	-13.88	19.08	46.00	-26.92
	384.05	Н	Peak	27.66	-11.08	16.58	46.00	-29.42
	662.44	Н	Peak	28.95	-5.77	23.18	46.00	-22.82
	863.23	Н	Peak	28.69	-3.02	25.67	46.00	-20.33

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 107 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_20M)

Operation Mode	802.11 n_20M TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
45.52	V	Peak	36.30	-13.75	22.55	40.00	-17.45
143.49	V	Peak	29.55	-12.80	16.75	43.50	-26.75
250.19	V	Peak	30.93	-13.88	17.05	46.00	-28.95
357.86	V	Peak	28.66	-11.45	17.21	46.00	-28.79
657.05	V	Peak	28.25	-5.59	22.66	46.00	-23.34
895.24	V	Peak	28.01	-2.45	25.56	46.00	-20.44
47.46	Н	Peak	29.17	-13.85	15.32	40.00	-24.68
154.16	Н	Peak	28.33	-12.18	16.15	43.50	-27.35
250.19	Н	Peak	33.49	-13.88	19.61	46.00	-26.39
371.44	Н	Peak	28.15	-11.21	16.94	46.00	-29.06
689.60	Н	Peak	28.26	-5.41	22.85	46.00	-23.15
882.63	Н	Peak	28.36	-2.67	25.69	46.00	-20.31

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 108 of 156

#### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_20M)

Operation Mode	802.11 n_20M TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	46.49	V	Peak	37.47	-13.76	23.71	40.00	-16.29
	153.19	V	Peak	28.42	-12.18	16.24	43.50	-27.26
	250.19	V	Peak	31.45	-13.88	17.57	46.00	-28.43
	378.23	V	Peak	27.78	-11.13	16.65	46.00	-29.35
	657.59	V	Peak	28.93	-5.93	23.00	46.00	-23.00
	896.21	V	Peak	28.30	-2.42	25.88	46.00	-20.12
	48.43	Н	Peak	28.82	-13.85	14.97	40.00	-25.03
	159.98	Н	Peak	27.69	-11.98	15.71	43.50	-27.79
	250.19	Н	Peak	34.48	-13.88	20.60	46.00	-25.40
	370.47	Н	Peak	28.01	-11.20	16.81	46.00	-29.19
	688.63	Н	Peak	28.19	-5.41	22.78	46.00	-23.22
	807.94	Н	Peak	29.40	-3.59	25.81	46.00	-20.19
	688.63	Н	Peak	28.19	-5.41	22.78	46.00	-23.22

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 109 of 156

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_20M)

Operation Mode	802.11 n_20M TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin (dB)	
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)		
45.52	V	Peak	36.71	-13.75	22.96	40.00	-17.04	
153.19	V	Peak	28.90	-12.18	16.72	43.50	-26.78	
250.19	V	Peak	31.57	-13.88	17.69	46.00	-28.31	
326.82	V	Peak	28.66	-11.89	16.77	46.00	-29.23	
399.57	V	Peak	34.78	-10.90	23.88	46.00	-22.12	
844.80	V	Peak	29.18	-3.24	25.94	46.00	-20.06	
45.52	Н	Peak	28.28	-13.75	14.53	40.00	-25.47	
155.13	Н	Peak	27.46	-12.17	15.29	43.50	-28.21	
250.19	Н	Peak	33.51	-13.88	19.63	46.00	-26.37	
372.41	Н	Peak	28.06	-11.17	16.89	46.00	-29.11	
663.41	Н	Peak	29.00	-5.74	23.26	46.00	-22.74	
857.41	Н	Peak	28.39	-3.10	25.29	46.00	-20.71	

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 110 of 156

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_40M)

Operation Mode	802.11 n_40M TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2422MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin	
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dB) (dBuV/m)		( <b>dB</b> )	
45.52	V	Peak	36.05	-13.75	22.30	40.00	-17.70	
143.49	V	Peak	30.07	-12.80	17.27	43.50	-26.23	
250.19	V	Peak	31.02	-13.88	17.14	46.00	-28.86	
386.96	V	Peak	28.25	-11.07	17.18	46.00	-28.82	
629.46	V	Peak	30.34	-6.41	23.93	46.00	-22.07	
849.65	V	Peak	28.71	-3.22	25.49	46.00	-20.51	
45.52	Н	Peak	28.30	-13.75	14.55	40.00	-25.45	
159.98	Н	Peak	28.31	-11.98	16.33	43.50	-27.17	
250.19	Н	Peak	34.05	-13.88	20.17	46.00	-25.83	
367.56	Н	Peak	27.39	-11.31	16.08	46.00	-29.92	
654.68	Н	Peak	28.81	-5.95	22.86	46.00	-23.14	
828.31	Н	Peak	28.26	-3.39	24.87	46.00	-21.13	

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 111 of 156

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_40M)

Operation Mode	802.11 n_40M TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin (dB)	
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)		
	45.52	V	Peak	36.78	-13.75	23.03	40.00	-16.97	
	108.57	V	Peak	32.31	-15.59	16.72	43.50	-26.78	
	250.19	V	Peak	30.73	-13.88	16.85	46.00	-29.15	
	341.37	V	Peak	28.51	-11.64	16.87	46.00	-29.13	
	689.60	V	Peak	29.07	-5.41	23.66	46.00	-22.34	
	893.30	V	Peak	27.92	-2.49	25.43	46.00	-20.57	
	45.52	Н	Peak	28.95	-13.75	15.20	40.00	-24.80	
	169.68	Н	Peak	28.59	-12.91	15.68	43.50	-27.82	
	250.19	Н	Peak	33.24	-13.88	19.36	46.00	-26.64	
	376.29	Н	Peak	28.70	-11.14	17.56	46.00	-28.44	
	637.22	Н	Peak	29.27	-6.22	23.05	46.00	-22.95	
	839.95	Н	Peak	28.84	-3.34	25.50	46.00	-20.50	

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 112 of 156

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_40M)

Operation Mode	802.11 n_40M TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2452MHz	Test By	Lion
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin	
(	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
	45.52	V	Peak	36.06	-13.75	22.31	40.00	-17.69	
	160.95	V	Peak	28.31	-11.98	16.33	43.50	-27.17	
	250.19	V	Peak	31.12	-13.88	17.24	46.00	-28.76	
	365.62	V	Peak	28.15	-11.34	16.81	46.00	-29.19	
(	657.59	V	Peak	28.29	-5.93	22.36	46.00	-23.64	
8	886.51	V	Peak	28.22	-2.61	25.61	46.00	-20.39	
	45.52	Н	Peak	28.98	-13.75	15.23	40.00	-24.77	
	154.16	Н	Peak	28.87	-12.18	16.69	43.50	-26.81	
	250.19	Н	Peak	34.47	-13.88	20.59	46.00	-25.41	
	388.90	Н	Peak	27.82	-11.05	16.77	46.00	-29.23	
(	651.77	Н	Peak	29.02	-6.00	23.02	46.00	-22.98	
8	881.66	Н	Peak	28.14	-2.70	25.44	46.00	-20.56	

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 113 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	27.56		5.24	32.80		74.00	54.00	-21.20	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

#### Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 114 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	24.36		5.5	29.86		74.00	54.00	-24.14	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

#### Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 115 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
-	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4874.0	26.38		5.38	31.76		74.00	54.00	-22.24	Peak
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

#### Remark:

1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 116 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
	4874.0	23.96		5.52	29.48		74.00	54.00	-24.52	Peak
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 117 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	26.02		5.5	31.52		74.00	54.00	-22.48	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 118 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4924.0	24.42		4.9	29.32		74.00	54.00	-24.68	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 119 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	30.91		5.27	36.18		74.00	54.00	-17.82	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 120 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	25.79		5.24	31.03		74.00	54.00	-22.97	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 121 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4874.0	27.68		5.38	33.06		74.00	54.00	-20.94	Peak
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 122 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
-	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4874.0	24.53		5.38	29.91		74.00	54.00	-24.09	Peak
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 123 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
-	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
	4924.0	29.49		5.5	34.99		74.00	54.00	-19.01	Peak
	7386.0						74.00	54.00		
	9848.0						74.00	54.00		
	12310.0						74.00	54.00		
	14772.0						74.00	54.00		
	17234.0						74.00	54.00		
	19696.0						74.00	54.00		
	22158.0						74.00	54.00		
	24620.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 124 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

1	802.11g TX CH High		Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	26.84		5.5	32.34		74.00	54.00	-21.66	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 125 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
-	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
	4824.0	31.04		5.24	36.28		74.00	54.00	-17.72	Peak
	7236.0						74.00	54.00		
	9648.0						74.00	54.00		
	12060.0						74.00	54.00		
	14472.0						74.00	54.00		
	16884.0						74.00	54.00		
	19296.0						74.00	54.00		
	21708.0						74.00	54.00		
	24120.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 126 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2412MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	24.96		5.24	30.20		74.00	54.00	-23.80	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 127 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
	4874.0	28.41		5.38	33.79		74.00	54.00	-20.21	Peak
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 128 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
23.94		5.38	29.32		74.00	54.00	-24.68	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 23.94      	Reading         Reading           (dBuV)         (dBuV)           23.94	Reading         Reading         Ant./CL           (dBuV)         (dBuV)         CF(dB)           23.94          5.38            -         - <tr tr=""> </tr>	ReadingAnt./CLPeak(dBuV)CF(dB)(dBuV/m)23.945.3829.32 <td< td=""><td>ReadingAnt./CLPeakAV(dBuV)(dBuV)(dBuV)(dBuV)23.945.3829.32&lt;</td><td>ReadingReadingAnt./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)23.945.3829.3274.005.3829.3274.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00</td><td>ReadingReadingAnt./CLPeakAVLimitLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)23.945.3829.3274.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00</td><td>Reading (dBw)Ani/CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)23.945.3829.3274.0054.00-24.6874.0054.0074.0054.0074.0054.0074.0054.0074.0054.00<!--</td--></td></td<>	ReadingAnt./CLPeakAV(dBuV)(dBuV)(dBuV)(dBuV)23.945.3829.32<	ReadingReadingAnt./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)23.945.3829.3274.005.3829.3274.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.0074.00	ReadingReadingAnt./CLPeakAVLimitLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)23.945.3829.3274.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00	Reading (dBw)Ani/CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)23.945.3829.3274.0054.00-24.6874.0054.0074.0054.0074.0054.0074.0054.0074.0054.00 </td

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 129 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
	4924.0	25.72		5.5	31.22		74.00	54.00	-22.78	Peak
	7386.0						74.00	54.00		
	9848.0						74.00	54.00		
	12310.0						74.00	54.00		
	14772.0						74.00	54.00		
	17234.0						74.00	54.00		
	19696.0						74.00	54.00		
	22158.0						74.00	54.00		
	24620.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 130 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2462MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	23.74		5.5	29.24		74.00	54.00	-24.76	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 131 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_40M)

Operation Mode	802.11n_40M TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2422MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
27.10		5.27	32.37		74.00	54.00	-21.63	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 27.10      	Reading         Reading           (dBuv)         (dBuv)           27.10	ReadingReadingAnt./Cla(dBuv)(dBuv)CF(dBuv)27.105.27 <tr< td=""><td>ReadingAnt./CLPeak(dBuV)CF(dB)(dBuV/n)27.105.2732.37&lt;</td><td>ReadingAnt./CLPeakAV(dBu/)(dBu/)(dBu/)(dBu/)27.105.2732.37&lt;</td><td>ReadingReadingAnt./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)27.105.2732.3774.00&lt;</td><td>ReadingReadingAnt./CLPeakAVLimitLimit(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)27.105.2732.3774.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00</td><td>Reading (dBw)An./CLPeakAVLimitLimitMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)27.105.2732.3774.0054.00-21.6374.0054.0074.0054.0074.0054.0074.0054.00<!--</td--></td></tr<>	ReadingAnt./CLPeak(dBuV)CF(dB)(dBuV/n)27.105.2732.37<	ReadingAnt./CLPeakAV(dBu/)(dBu/)(dBu/)(dBu/)27.105.2732.37<	ReadingReadingAnt./CLPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)27.105.2732.3774.00<	ReadingReadingAnt./CLPeakAVLimitLimit(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)(dBuv)27.105.2732.3774.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.00	Reading (dBw)An./CLPeakAVLimitLimitMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)27.105.2732.3774.0054.00-21.6374.0054.0074.0054.0074.0054.0074.0054.00 </td

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 132 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_40M)

Operation Mode	802.11n_40M TX CH Low	Test Date	Jun. 07, 2011
Fundamental Frequency	2422MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
	4824.0	23.69		5.3	28.99		74.00	54.00	-25.01	Peak
	7236.0						74.00	54.00		
	9648.0						74.00	54.00		
	12060.0						74.00	54.00		
	14472.0						74.00	54.00		
	16884.0						74.00	54.00		
	19296.0						74.00	54.00		
	21708.0						74.00	54.00		
	24120.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 133 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_40M)

Operation Mode	802.11n_40M TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4874.0	24.97		5.33	30.30		74.00	54.00	-23.70	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 134 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_40M)

Operation Mode	802.11n_40M TX CH Mid	Test Date	Jun. 07, 2011
Fundamental Frequency	2437MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
-	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
	4874.0	25.06		4.9	29.96		74.00	54.00	-24.04	Peak
	7311.0						74.00	54.00		
	9748.0						74.00	54.00		
	12185.0						74.00	54.00		
	14622.0						74.00	54.00		
	17059.0						74.00	54.00		
	19496.0						74.00	54.00		
	21933.0						74.00	54.00		
	24370.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 135 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_40M)

Operation Mode	802.11n_40M TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2452MHz	Test By	Lion
Temperature	25 °C	Pol	Ver
Humidity	65 %		

Peak	AV		Actu	al FS	Peak	AV		
Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
24.35		5.15	29.50		74.00	54.00	-24.50	Peak
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
					74.00	54.00		
	Reading (dBuV) 24.35      	Reading         Reading           (dBuV)         (dBuV)           24.35  -	Reading         Reading         Ant./CL           (dBuV)         (dBuV)         CF(dB)           24.35          5.15            -         -	ReadingAnt./CLPeak(dBuV)CF(dB)(dBuV/m)24.355.1529.505.1529.50	ReadingAnt./CLPeakAV(dBuV)(dBuV)(dBuV)(dBuV)24.355.1529.505.1529.50	ReadingReadingAnt./ClPeakAVLimit(dBuv)CF(dB)(dBuv)(dBuv)(dBuv)24.355.1529.5074.00 <td>Reading (dBuv)Ant./ClPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)24.355.1529.5074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00</td> <td>Reading (dBw)An./CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)24.355.1529.5074.0054.00-24.5074.0054.0074.0054.0074.0054.0074.0054.00</td>	Reading (dBuv)Ant./ClPeakAVLimit(dBuv)CF(dB)(dBuV)(dBuV)(dBuV)(dBuV)24.355.1529.5074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0074.0054.0054.00	Reading (dBw)An./CLPeakAVLinniLinniMargin(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)(dBw)24.355.1529.5074.0054.00-24.5074.0054.0074.0054.0074.0054.0074.0054.00

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 136 of 156

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_40M)

Operation Mode	802.11n_40M TX CH High	Test Date	Jun. 07, 2011
Fundamental Frequency	2452MHz	Test By	Lion
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	24.15		5.47	29.62		74.00	54.00	-24.38	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 137 of 156

## 10 Peak Power Spectral Density

### **10.1 Standard Applicable:**

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

## 10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

## 10.3 Test Set-up:

Refer to section 6.3 for details.

## **10.4 Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300kHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.



### **10.5 Measurement Result:**

#### 802.11b

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-12.81	0.00	-12.81	8
2437	-12.74	0.00	-12.74	8
2462	-12.85	0.00	-12.85	8

## 802.11g

Frequency	<b>RF</b> Power Density	Cable loss	<b>RF</b> Power Density	Maximum Limit
MHz	Reading (dBm)	( <b>dB</b> )	Level (dBm)	(dBm)
2412	-19.47	0.00	-19.47	8
2437	-19.08	0.00	-19.08	8
2462	-19.02	0.00	-19.02	8

#### 802.11n\_20M(Main)

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-17.66	0.00	-17.66	8
2437	-17.43	0.00	-17.43	8
2462	-17.45	0.00	-17.45	8

#### 802.11n\_20M(Aux)

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-18.09	0.00	-18.09	8
2437	-18.00	0.00	-18.00	8
2462	-17.32	0.00	-17.32	8

#### 802.11n\_20M(MIMO)

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-13.82	0.00	-13.82	8
2437	-14.24	0.00	-14.24	8
2462	-14.65	0.00	-14.65	8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,比報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms</u> and <u>conditions</u>, and <u>Terms</u> and <u>Conditions</u> for Electronic Documents (<u>www.sgs.com/terms</u> <u>e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms</u> instructions, if any. The Company's sholl responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五殿工業區五工路 134 號



#### 802.11n\_40M(Main)

Frequency	<b>RF</b> Power Density	Cable loss	<b>RF</b> Power Density	Maximum Limit
MHz	Reading (dBm)	( <b>dB</b> )	Level (dBm)	(dBm)
2422	-18.84	0.00	-18.84	8
2437	-21.57	0.00	-21.57	8
2452	-20.53	0.00	-20.53	8

### 802.11n\_40M(Aux)

Frequency	<b>RF Power Density</b>	Cable loss	<b>RF</b> Power Density	Maximum Limit
MHz	Reading (dBm)	( <b>dB</b> )	Level (dBm)	(dBm)
2422	-22.56	0.00	-22.56	8
2437	-21.73	0.00	-21.73	8
2452	-22.43	0.00	-22.43	8

## 802.11n\_40M(MIMO)

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2422	-14.66	0.00	-14.66	8
2437	-15.25	0.00	-15.25	8
2452	-15.91	0.00	-15.91	8


\*Offset 11 dB

Note: Refer to next page for plots.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 140 of 156

## 802.11b Power Spectral Density Test Plot (CH-Low)

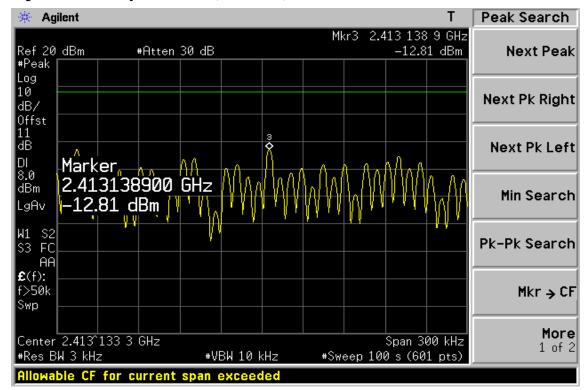


**Power Spectral Density Test Plot (CH-Mid)** 

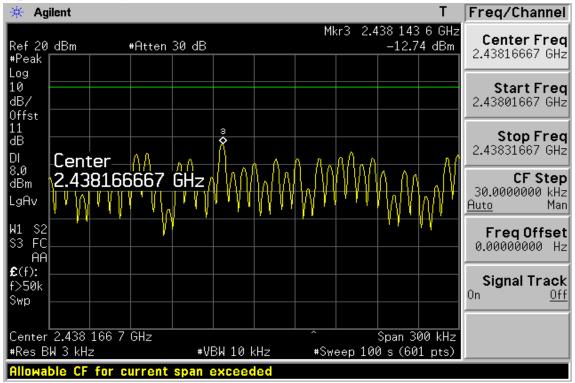



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 141 of 156


# Power Spectral Density Test Plot (CH-High)

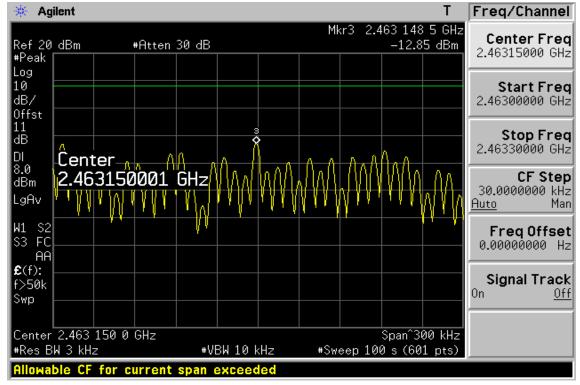




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 142 of 156

## 802.11g Power Spectral Density Test Plot (CH-Low)

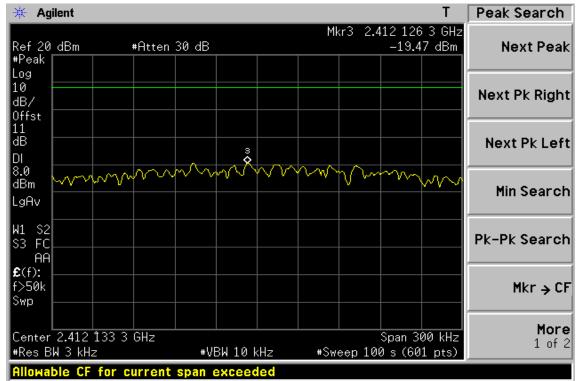


## **Power Spectral Density Test Plot (CH-Mid)**

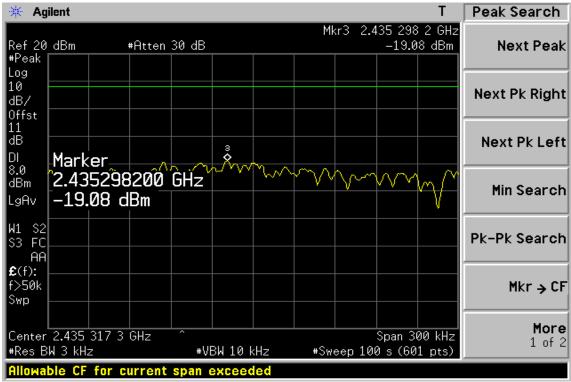



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 143 of 156


## Power Spectral Density Test Plot (CH-High)

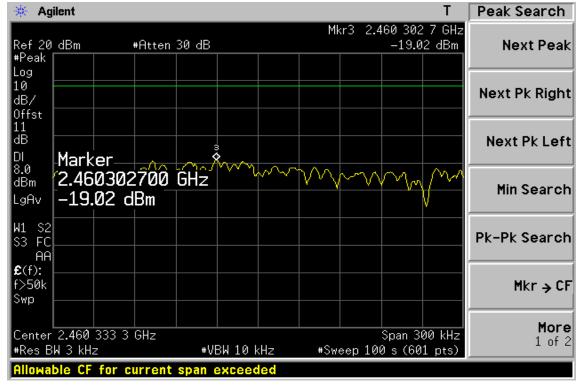




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 144 of 156

# 802.11n\_20M(Main) Power Spectral Density Test Plot (CH-Low)

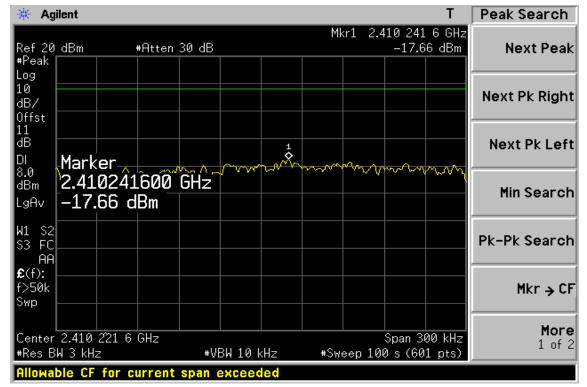


## Power Spectral Density Test Plot (CH-Mid)

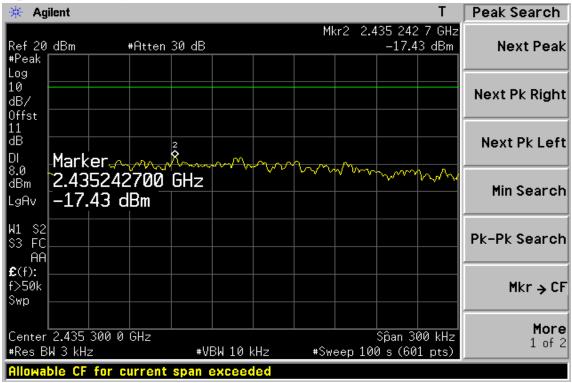



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 145 of 156

## Power Spectral Density Test Plot (CH-High)

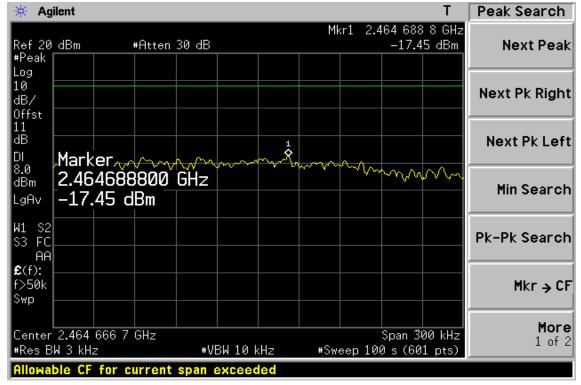




**Report No.: EH/2011/50011** Issue Date: Jun. 23, 2011 Page: 146 of 156

## 802.11n\_20M(Aux) **Power Spectral Density Test Plot (CH-Low)**

🔆 Agilent Peak Search Mkr3 2.410 282 9 GHz Next Peak Ref 20 dBm #Atten 30 dB -18.09 dBm #Peak Log 10 Next Pk Right dB/ Offst 11 dB Next Pk Left °3 DI Marker 8.0  $\sim$ 2.410282900 GHz dBm Min Search -18.09 dBm LgAv W1 S2 Pk-Pk Search S3 FC AΑ £(f): f>50k Mkr → CF Swp More Center 2.410 245 3 GHz Span 300 kHz 1 of 2 #Res BW 3 kHz ₩VBW 10 kHz #Sweep 100 s (601 pts) Copyright 2000-2005 Agilent Technologies


#### **Power Spectral Density Test Plot (CH-Mid)**

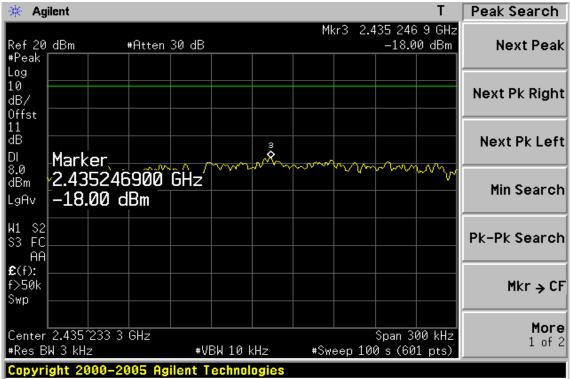



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 147 of 156


## Power Spectral Density Test Plot (CH-High)

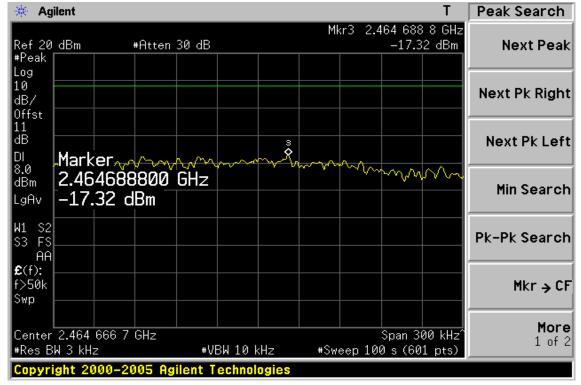




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 148 of 156

# 802.11n\_20M(MIMO) Power Spectral Density Test Plot (CH-Low)

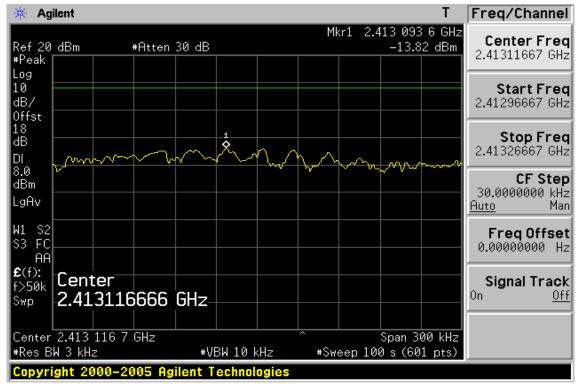

**Power Spectral Density Test Plot (CH-Mid)** 

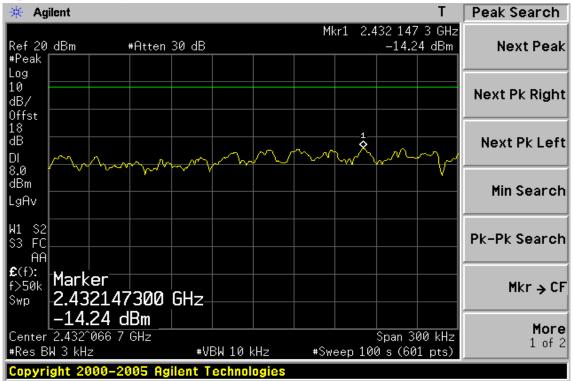


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company.  $k_{FF}$ ;  $F_{FF}$  and  $k_{FF}$  and  $k_$ 



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 149 of 156


## Power Spectral Density Test Plot (CH-High)

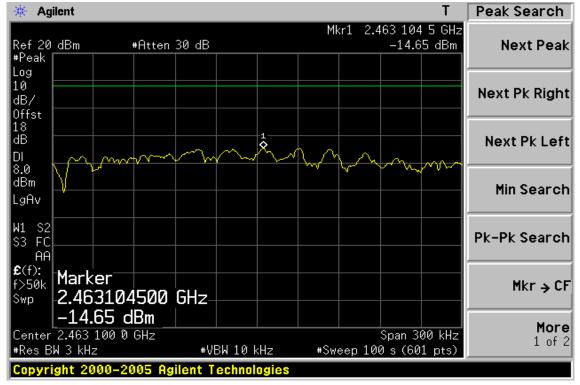




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 150 of 156

# 802.11n\_40M(Main) Power Spectral Density Test Plot (CH-Low)

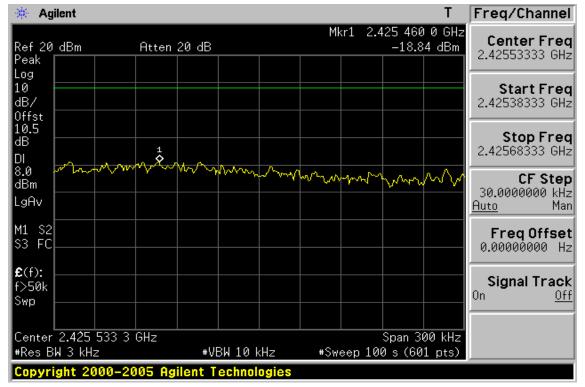

#### **Power Spectral Density Test Plot (CH-Mid)**

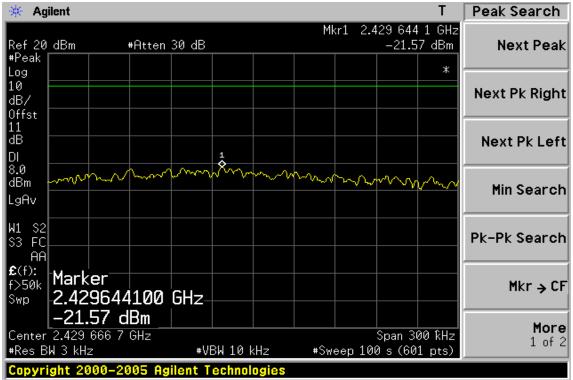


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company.  $k_{FF}$ ;  $F_{FF}$  and  $k_{FF}$  and  $k_$ 



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 151 of 156


## Power Spectral Density Test Plot (CH-High)

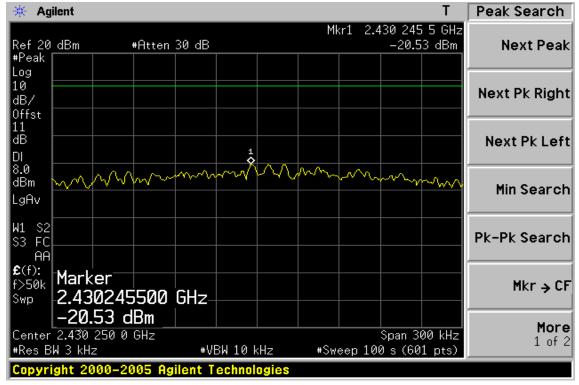




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 152 of 156

## 802.11n\_40M(Aux) Power Spectral Density Test Plot (CH-Low)

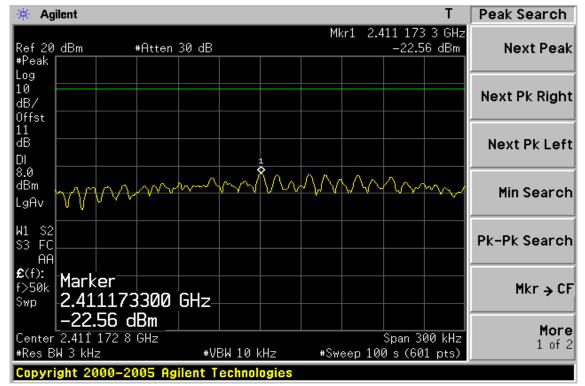

**Power Spectral Density Test Plot (CH-Mid)** 

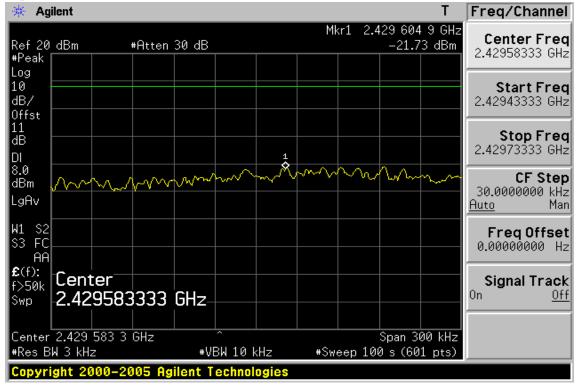


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions,htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this documents.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 153 of 156

## Power Spectral Density Test Plot (CH-High)

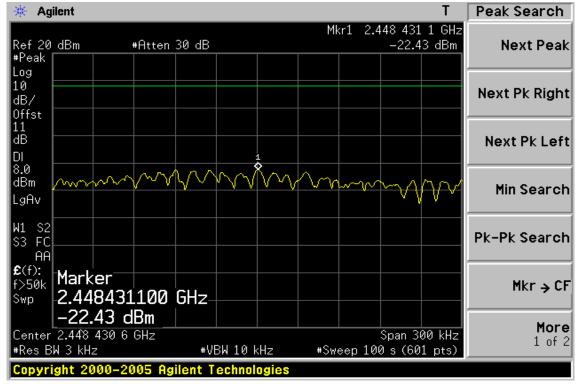


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions,htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this documents.




Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 154 of 156

# 802.11n\_40M(MIMO) Power Spectral Density Test Plot (CH-Low)

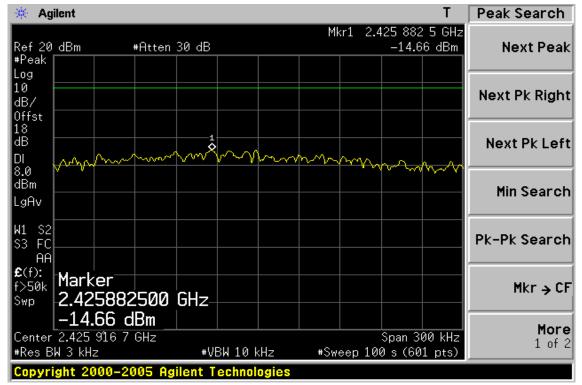

**Power Spectral Density Test Plot (CH-Mid)** 

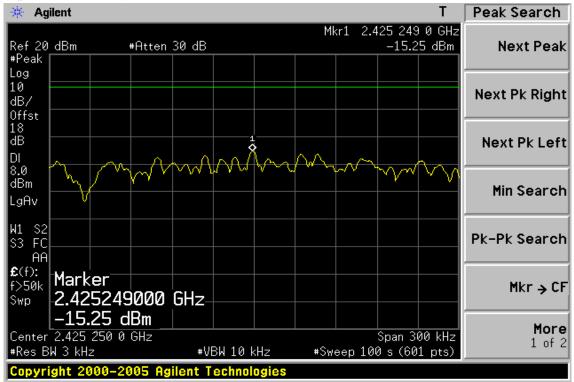


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions,htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this documents.



Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 155 of 156

## Power Spectral Density Test Plot (CH-High)

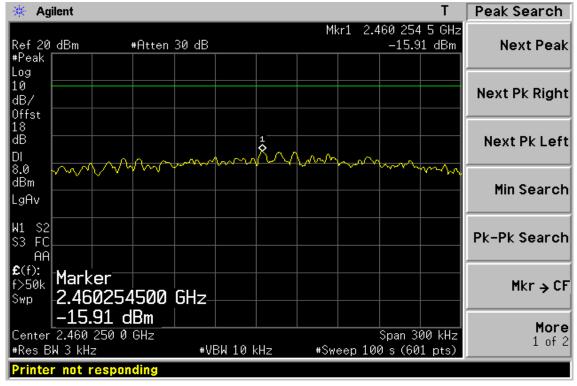



FCC ID:UZI-R505

Report No.: EH/2011/50011 Issue Date: Jun. 23, 2011 Page: 156 of 156

#### **11 ANTENNA REQUIREMENT**

#### **11.1 Standard Applicable:**

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### 11.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 2.79 dBi (Main)and 2.78 dBi (Aux), and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions, htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.