

## Test Graph of Radiated emissions, mode C

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


### EMC Test Record (Emission)

#### Common Information

Manufacturer: Beautiful Enterprise co.,Ltd  
 Test Item: Wireless Stereo Headphones  
 Identification: RF-RBWHP01  
 Test Standard: FCC part 15  
 Test Detail: RE  
 Operation Mode: C  
 Climate Condition: 24°C; 50 %;RH 101 kPa.  
 Test Voltage/ Freq: AC120V / 60Hz  
 Receipt No: 163065935 400  
 Report No: 17017067 001  
 Result: Pass  
 Comment: Vertical

Subrange 1  
 Frequency Range: 30M-1GHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC UVLB 9168/ TUV ESCI3-TUV SAC UVLB 9168

FCC 15.209 30M-1G sweep

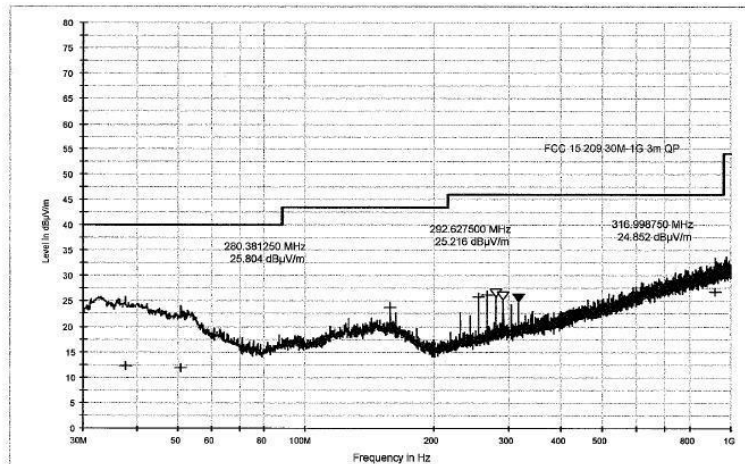

#### Limit and Margin NB

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
37.750000	12.2	14.5	27.8	40.0	V
51.000000	11.8	14.2	28.2	40.0	V
158.400000	23.7	15.6	19.8	43.5	V
256.000000	25.8	13.7	20.2	46.0	V
268.150000	26.2	14.0	19.8	46.0	V
920.450000	26.8	26.1	19.2	46.0	V

Date: 29/07/2010 - Time: 13:12:41

Tested by  2010.7.30  
 Reviewed by  2010.8.02

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (Emission)


### Common Information

Manufacturer:	Beautiful Enterprise co.,Ltd
Test Item:	Wireless Stereo Headphones
Identification:	RF-RBWHPO1
Test Standard:	FCC part 15
Test Detail:	RE
Operation Mode:	C
Climate Condition:	24°C; 50 %;RH 101 kPa.
Test Voltage/ Freq:	AC120V / 60Hz
Receipt No:	163065935 400
Report No:	17017067 001
Result:	Pass
Comment:	Horizontal

Subrange 1	
Frequency Range:	30M-1GHz
Receiver:	TUV ESCI 3
Transducer:	TUV SAC UVLB 9168/ TUV ESCI3-TUV SAC UVLB 9168



FCC 15.209 30M-1G sweep

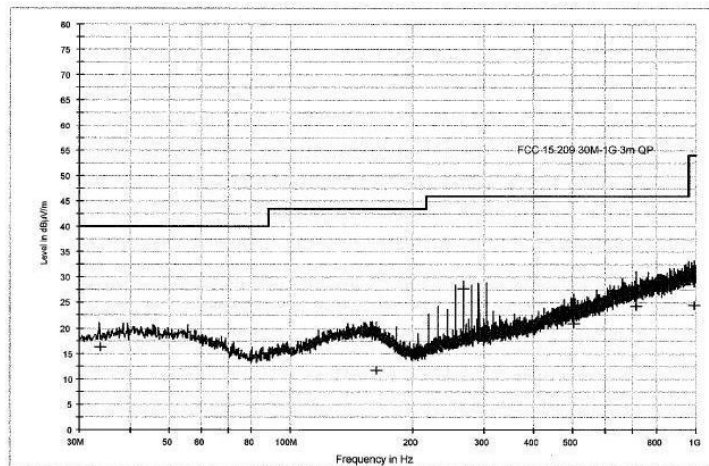

### Limit and Margin NB

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
33.800000	16.2	14.0	23.8	40.0	H
162.750000	11.7	15.4	31.8	43.5	H
268.150000	27.8	14.0	18.2	46.0	H
501.050000	20.9	19.4	25.1	46.0	H
742.050000	24.4	23.3	21.6	46.0	H
991.050000	24.5	26.6	29.4	53.9	H

Date: 29/07/2010 - Time: 12:45:41

Tested by:  Reviewed by: 

## Test Graph of Conducted emissions, mode C

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


### EMC Test Record (EMISSION)

#### Test Information

Manufacturer: Beautiful enterprise co., ltd  
Test Item: Wireless Stereo Headphone  
Identification: RF-RBWHPO1  
Test Standard: FCC Part 15  
Test Detail: Conducted Emission  
Operation Mode: C  
Climate Condition: 23°C; 52%RH; 101 kPa.  
Test Voltage/ Freq.: AC120V / 60Hz  
Port / Line: AC Mains  
Receipt No.: 163065935 100  
Report No.: 17017067 001  
Result: Pass  
Comment: /

Hardware Setup: 1phase LISN ESH3-Z5 to ESCS30  
Level Unit: dB  $\mu$  V

Subrange	Detectors	IF Bandwidth	Step Size	Meas. Time	Receiver
150kHz - 30MHz	Peak; Average	9kHz	4.5kHz	10ms	ESCS 30

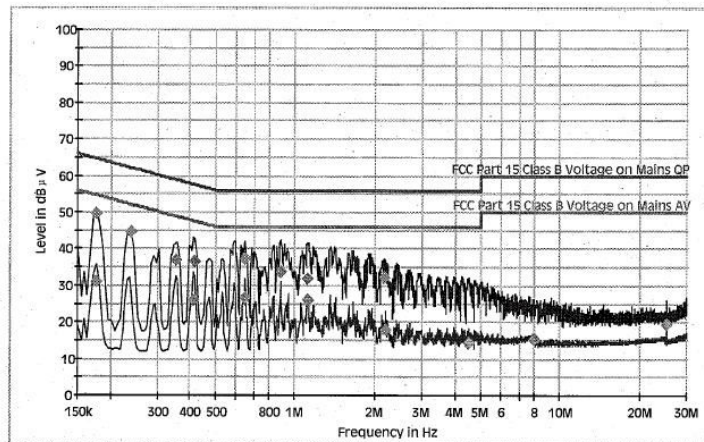

2010-7-29, 14:28:00

Tested by:



Reviewed by:



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line
0.177000	49.6	1000.000	9.000	GND	N
0.240000	44.4	1000.000	9.000	GND	N
0.352500	36.8	1000.000	9.000	GND	L1
0.415500	36.6	1000.000	9.000	GND	L1
0.645000	37.3	1000.000	9.000	GND	L1
0.888000	33.5	1000.000	9.000	GND	L1
1.122000	31.8	1000.000	9.000	GND	L1
2.179500	32.1	1000.000	9.000	GND	L1

(continuation of the "Final Measurement Detector 1" table from column 6 ...)

Frequency (MHz)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.177000	10.2	15.1	64.6	
0.240000	10.2	17.7	62.1	
0.352500	9.9	22.1	58.9	
0.415500	10.0	20.9	57.5	
0.645000	9.9	18.7	56.0	
0.888000	10.0	22.5	56.0	
1.122000	9.9	24.2	56.0	
2.179500	10.1	23.9	56.0	

**Final Measurement Detector 2**

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line
0.177000	31.2	1000.000	9.000	GND	L1
0.411000	25.8	1000.000	9.000	GND	L1
0.649500	26.7	1000.000	9.000	GND	L1
1.122000	26.0	1000.000	9.000	GND	L1
2.188500	17.8	1000.000	9.000	GND	L1
4.524000	14.1	1000.000	9.000	GND	L1
8.016000	15.3	1000.000	9.000	GND	N
25.228500	19.2	1000.000	9.000	GND	N

(continuation of the "Final Measurement Detector 2" table from column 6 ...)

Frequency (MHz)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.177000	10.2	23.5	54.6	
0.411000	10.0	21.8	47.6	
0.649500	9.9	19.3	46.0	
1.122000	9.9	20.0	46.0	
2.188500	10.1	28.2	46.0	
4.524000	10.2	31.9	46.0	
8.016000	10.4	34.7	50.0	
25.228500	11.4	30.8	50.0	

2010-7-29, 14:28:00

Tested by: \_\_\_\_\_ Reviewed by: \_\_\_\_\_



## Test Graph of Conducted emissions, mode A

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


### EMC Test Record (EMISSION)

#### Test Information

Manufacturer: Beautiful enterprise co., ltd  
Test Item: Wireless Stereo Headphone  
Identification: RF-RBWHPO1  
Test Standard: FCC Part 15  
Test Detail: Conducted Emission  
Operation Mode: A  
Climate Condition: 23°C; 52%RH; 101 kPa.  
Test Voltage/ Freq.: AC120V / 60Hz  
Port / Line: AC Mains  
Receipt No.: 163065935 100  
Report No.: 17017067 001  
Result: Pass  
Comment: /

Hardware Setup: 1phase LISN ESH3-Z5 to ESCS30  
Level Unit: dB  $\mu$  V

Subrange	Detectors	IF Bandwidth	Step Size	Meas. Time	Receiver
150kHz - 30MHz	Peak; Average	9kHz	4.5kHz	10ms	ESCS 30

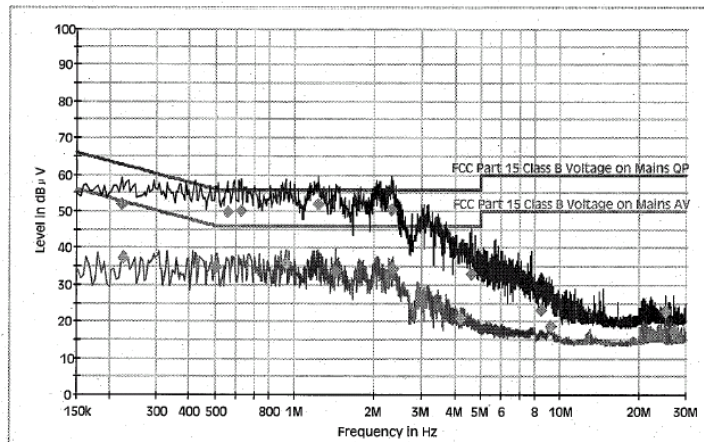

2010-7-30, 16:16:45

Tested by:



Reviewed by:



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line
0.222000	51.7	1000.000	9.000	GND	N
0.555000	49.6	1000.000	9.000	GND	N
0.627000	50.1	1000.000	9.000	GND	L1
1.234500	51.9	1000.000	9.000	GND	N
2.314500	50.3	1000.000	9.000	GND	L1
4.623000	32.7	1000.000	9.000	GND	L1
8.448000	23.1	1000.000	9.000	GND	L1
26.911500	17.0	1000.000	9.000	GND	L1

(continuation of the "Final Measurement Detector 1" table from column 6 ...)

Frequency (MHz)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.222000	10.1	11.0	62.7	
0.555000	10.0	6.4	56.0	
0.627000	9.9	5.9	56.0	
1.234500	10.0	4.1	56.0	
2.314500	10.1	5.7	56.0	
4.623000	10.2	23.3	56.0	
8.448000	10.3	36.9	60.0	
26.911500	11.4	43.0	60.0	

**Final Measurement Detector 2**

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line
0.226500	37.1	1000.000	9.000	GND	L1
0.501000	34.8	1000.000	9.000	GND	N
0.928500	35.7	1000.000	9.000	GND	N
1.428000	33.7	1000.000	9.000	GND	L1
2.368500	34.5	1000.000	9.000	GND	L1
4.231500	20.7	1000.000	9.000	GND	N
9.217500	18.7	1000.000	9.000	GND	L1
25.228500	22.7	1000.000	9.000	GND	L1

(continuation of the "Final Measurement Detector 2" table from column 6 ...)

Frequency (MHz)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.226500	10.1	15.5	52.6	
0.501000	10.0	11.2	46.0	
0.928500	10.0	10.3	46.0	
1.428000	10.0	12.3	46.0	
2.368500	10.1	11.5	46.0	
4.231500	10.1	25.3	46.0	
9.217500	10.4	31.3	50.0	
25.228500	11.4	27.3	50.0	

2010-7-30, 16:16:45

Tested by:



Reviewed by:



## Test Graph of Spurious emissions, mode A

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

### EMC Test Record (EMISSION)


#### Test Information

Manufacturer:	Beautiful Enterprise Co.,Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWH01
Test Standard:	FCC Part 15
Test Detail:	RE
Operation Mode:	Tx @ Low channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.	17017067 001
Result:	Pass
Comment:	Vertical

#### Subrange 1

Frequency Range:	9kHz - 30MHz
Receiver:	TUV ESCI 3
Transducer:	TUV SAC Active Loop Antenna HFH2-Z2 / TUV ESCI3 -TUV SAC Active Loop Antenna HFH2-Z2


Pre TUV 9K to 30M HFH2-Z2

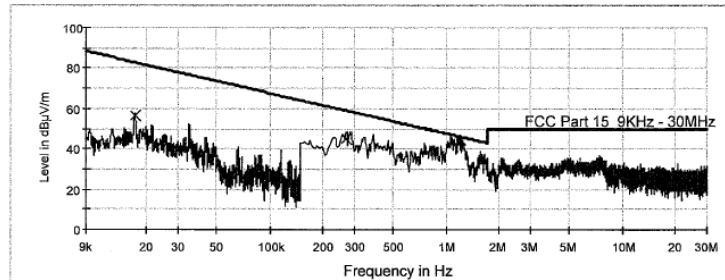


#### Result Table Single

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Corr. (dB)	Polarization
7.366000	29.6	---	21.9	V
1.198000	42.3	---	20.3	V
0.017160	---	56.8	20.6	V
0.270000	---	44.7	20.9	V

Date: 29/07/2010 - Time: 23:08:33

Tested by:  2010 729

Reviewed by:  2010 8,02



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWHP01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Low channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 9kHz - 30MHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC Active Loop Antenna HFH2-Z2 / TUV ESCI3 -TUV SAC Active Loop Antenna HFH2-Z2

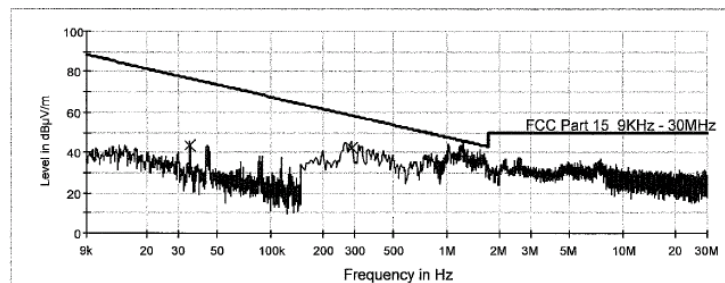

Pre TUV 9K to 30M HFH2-Z2



### Result Table Single

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Corr. (dB)	Polarization
2.590000	31.5	---	20.3	H
1.234000	38.4	---	20.3	H
0.034920	---	43.3	20.2	H
0.290000	---	42.3	20.9	H

Date: 29/07/2010 - Time: 23:03:10

Tested by:  Reviewed by: 



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer:	Beautiful Enterprise Co.,Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWHP01
Test Standard:	FCC Part 15
Test Detail:	RE
Operation Mode:	Tx @ Low channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.	17017067 001
Result:	Pass
Comment:	Horizontal

#### Subrange 1

Frequency Range:	30MHz – 1GHz
Receiver:	TUV ESCI 3
Transducer:	TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

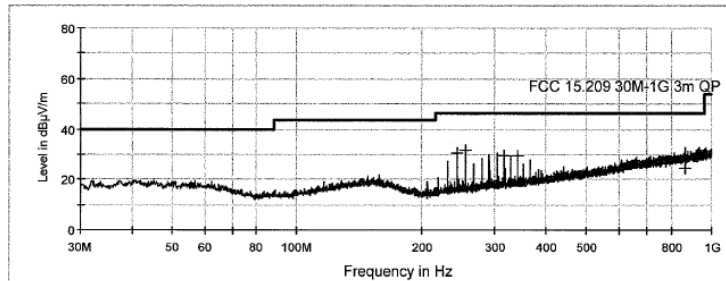

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
243.800000	30.6	13.5	15.4	46.0	H
256.000000	31.7	13.7	14.3	46.0	H
316.950000	29.6	15.5	16.4	46.0	H
341.350000	29.4	16.1	16.6	46.0	H
863.450000	24.4	25.1	21.6	46.0	H

Date: 29/07/2010 - Time: 22:00:41

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer:	Beautiful Enterprise Co.,Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWHP01
Test Standard:	FCC Part 15
Test Detail:	RE
Operation Mode:	Tx @ Low channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.	17017067 001
Result:	Pass
Comment:	Vertical

### Subrange 1

Frequency Range:	30MHz – 1GHz
Receiver:	TUV ESCI 3
Transducer:	TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

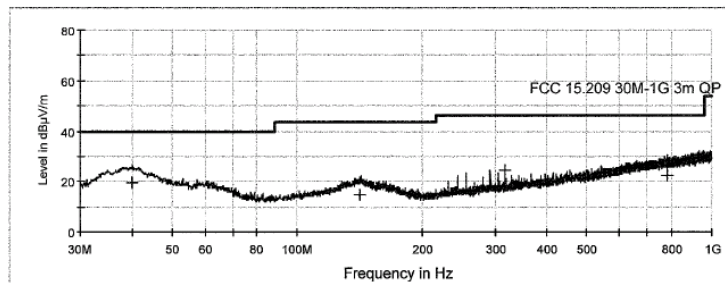

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
40.200000	19.8	14.8	20.2	40.0	V
142.300000	14.6	15.1	28.9	43.5	V
316.950000	24.7	15.5	21.3	46.0	V
783.700000	22.1	24.4	23.9	46.0	V

Date: 29/07/2010 - Time: 21:57:00

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWHPO1  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Low channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 1GHz – 18GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

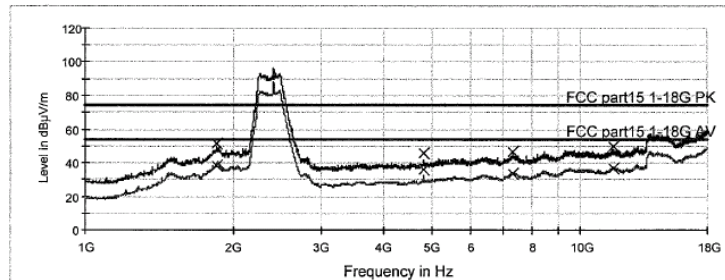

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1852.000000	51.6	-12.9	22.4	74.0	V
4824.000000	45.9	-5.5	28.1	74.0	V
7324.000000	46.5	0.4	27.5	74.0	V
11627.000000	49.7	5.1	24.3	74.0	V

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1852.000000	38.7	-12.9	15.3	54.0	V
4824.000000	36.2	-5.5	17.8	54.0	V
7324.000000	33.5	0.4	20.5	54.0	V
11627.000000	36.5	5.1	17.5	54.0	V

Date: 29/07/2010 - Time: 16:25:46

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


## EMC Test Record (EMISSION)

### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Low channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq. : DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

Subrange 1  
 Frequency Range: 1GHz – 18GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

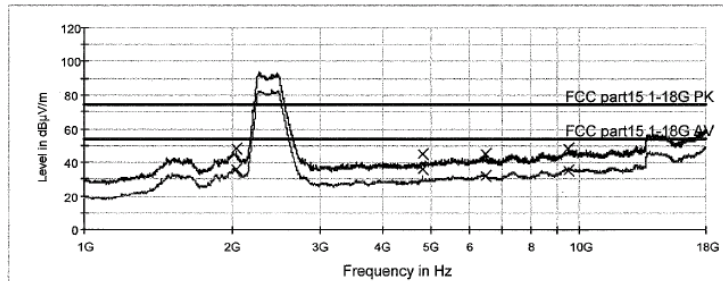

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
2031.000000	48.2	-10.2	25.8	74.0	H
4824.000000	44.7	-5.5	29.3	74.0	H
6483.000000	45.2	-1.8	28.8	74.0	H
9485.000000	48.5	4.8	25.5	74.0	H

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
2031.000000	35.8	-10.2	18.2	54.0	H
4824.000000	35.8	-5.5	18.2	54.0	H
6483.000000	31.9	-1.8	22.1	54.0	H
9485.000000	35.5	4.8	18.5	54.0	H

Date: 29/07/2010 - Time: 16:19:11

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWHPO1  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Low channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq. : DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 18GHz - 26GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26.5 3160-09

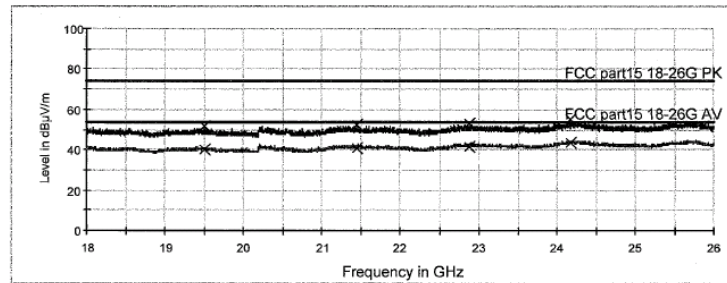

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19500.000000	51.6	5.4	22.4	74.0	V
21455.000000	52.1	5.9	21.9	74.0	V
22875.000000	53.2	6.4	20.8	74.0	V
24178.000000	55.1	6.9	18.9	74.0	V

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19500.000000	39.9	5.4	14.1	54.0	V
21455.000000	40.7	5.9	13.3	54.0	V
22875.000000	41.7	6.4	12.3	54.0	V
24178.000000	43.3	6.9	10.7	54.0	V

Date: 29/07/2010 - Time: 18:09:02

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Low channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 18GHz - 26GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26.5 3160-09

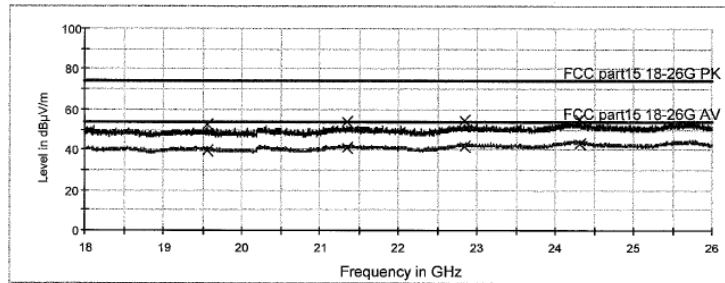

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19561.000000	52.1	5.4	21.9	74.0	H
21355.000000	53.5	5.9	20.5	74.0	H
22839.000000	54.2	6.4	19.8	74.0	H
24320.000000	55.3	6.9	18.7	74.0	H

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19561.000000	39.7	5.4	14.3	54.0	H
21355.000000	41.1	5.9	12.9	54.0	H
22839.000000	41.7	6.4	12.3	54.0	H
24320.000000	43.1	6.9	10.9	54.0	H

Date: 29/07/2010 - Time: 17:55:24

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Mid channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq. : DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No. 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 9kHz - 30MHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC Active Loop Antenna HFH2-Z2 / TUV ESCI3 -TUV SAC Active Loop Antenna HFH2-Z2

Pre TUV 9K to 30M HFH2-Z2

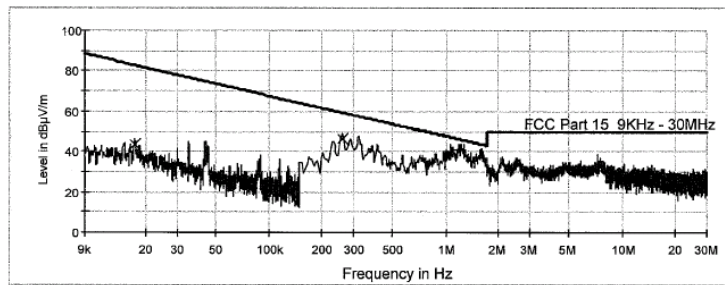

### Result Table Single

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Corr. (dB)	Polarization
7.266000	30.5	---	21.9	H
1.206000	40.6	---	20.3	H
0.017240	---	43.5	20.6	H
0.258000	---	46.2	20.9	H

Date: 29/07/2010 - Time: 22:58:23

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Mid channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq. : DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 9kHz - 30MHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC Active Loop Antenna HFH2-Z2 / TUV ESCI3 -TUV SAC Active Loop Antenna HFH2-Z2

Pre TUV 9K to 30M HFH2-Z2

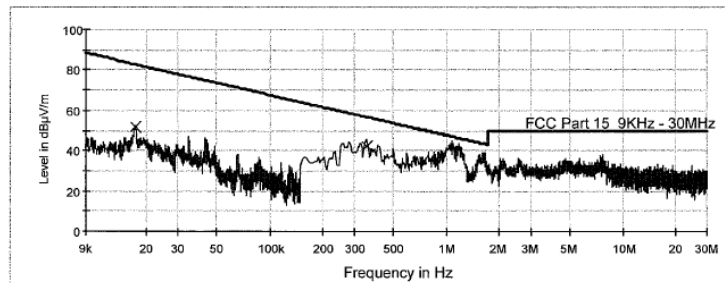

### Result Table Single

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Corr. (dB)	Polarization
7.578000	30.0	---	21.9	V
1.074000	40.6	---	20.3	V
0.017240	---	51.6	20.6	V
0.354000	---	42.3	20.8	V

Date: 29/07/2010 - Time: 22:52:43

Tested by:  Reviewed by: 



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer:	Beautiful Enterprise Co.,Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWH01
Test Standard:	FCC Part 15
Test Detail:	RE
Operation Mode:	Tx @ Mid channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.:	17017067 001
Result:	Pass
Comment:	Vertical

#### Subrange 1

Frequency Range:	30MHz – 1GHz
Receiver:	TUV ESCI 3
Transducer:	TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

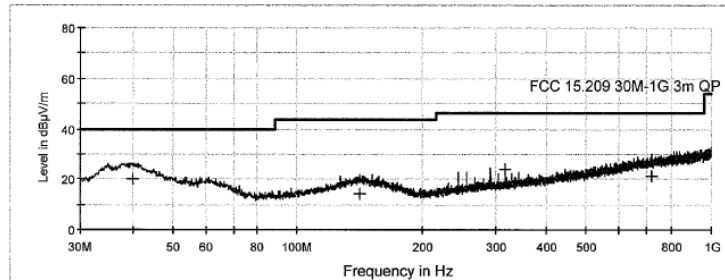

Pre TUV 30M to 1G UVLB9168



### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
40.000000	20.4	14.8	19.6	40.0	V
141.600000	13.9	15.1	29.6	43.5	V
316.950000	23.7	15.5	22.3	46.0	V
721.500000	21.3	23.5	24.7	46.0	V

Date: 29/07/2010 - Time: 21:52:12

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer:	Beautiful Enterprise Co., Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWHP01
Test Standard:	FCC Part 15
Test Detail:	RE
Operation Mode:	Tx @ Mid channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.	17017067 001
Result:	Pass
Comment:	Horizontal

### Subrange 1

Frequency Range:	30MHz – 1GHz
Receiver:	TUV ESCI 3
Transducer:	TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

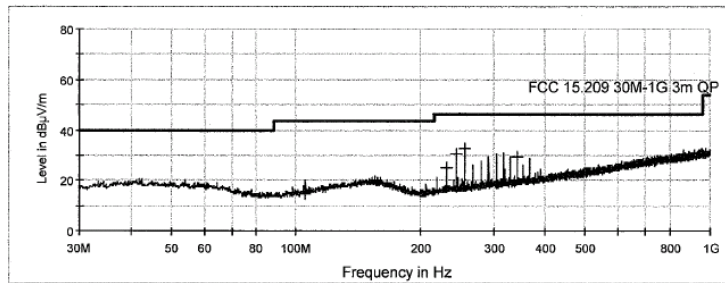

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
105.600000	14.5	11.9	29.0	43.5	H
231.600000	25.3	13.1	20.7	46.0	H
243.800000	30.5	13.5	15.5	46.0	H
256.000000	32.4	13.7	13.6	46.0	H
341.350000	29.4	16.1	16.6	46.0	H

Date: 29/07/2010 - Time: 21:36:26

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWHPO1  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Mid channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 1GHz – 18GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

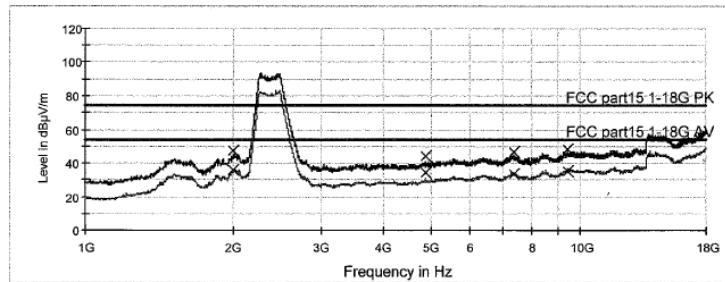

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1999.000000	47.6	-10.5	26.4	74.0	H
4876.000000	43.9	-5.6	30.1	74.0	H
7352.000000	46.9	0.5	27.1	74.0	H
9417.000000	48.5	4.7	25.5	74.0	H

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1999.000000	35.8	-10.5	18.2	54.0	H
4876.000000	34.0	-5.6	20.0	54.0	H
7352.000000	33.6	0.5	20.4	54.0	H
9417.000000	35.5	4.7	18.5	54.0	H

Date: 29/07/2010 - Time: 16:10:44

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Mid channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq. : DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No. 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 1GHz – 18GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

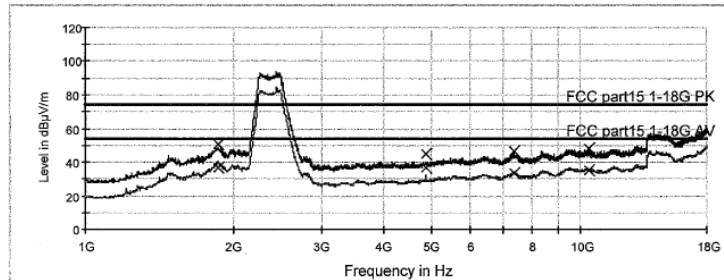

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1865.000000	50.6	-12.7	23.4	74.0	V
4876.000000	45.1	-5.6	28.9	74.0	V
7341.000000	46.3	0.5	27.7	74.0	V
10414.000000	48.2	5.1	25.8	74.0	V

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1865.000000	36.4	-12.7	17.6	54.0	V
4876.000000	36.8	-5.6	17.2	54.0	V
7341.000000	33.7	0.5	20.3	54.0	V
10414.000000	35.5	5.1	18.5	54.0	V

Date: 29/07/2010 - Time: 16:05:04

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Mid channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 18GHz - 26GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26.5 3160-09

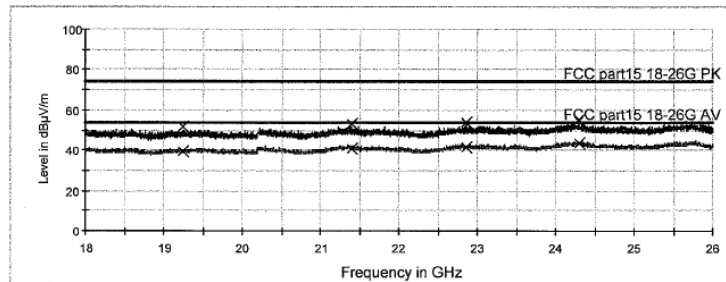

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19244.000000	51.6	5.3	22.4	74.0	H
21395.000000	52.7	5.9	21.3	74.0	H
22862.000000	53.5	6.4	20.5	74.0	H
24290.000000	55.4	6.9	18.6	74.0	H

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19244.000000	39.4	5.3	14.6	54.0	H
21395.000000	41.1	5.9	13.0	54.0	H
22862.000000	41.8	6.4	12.2	54.0	H
24290.000000	43.4	6.9	10.6	54.0	H

Date: 29/07/2010 - Time: 17:49:02

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWP01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ Mid channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 18GHz - 26GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26.5 3160-09

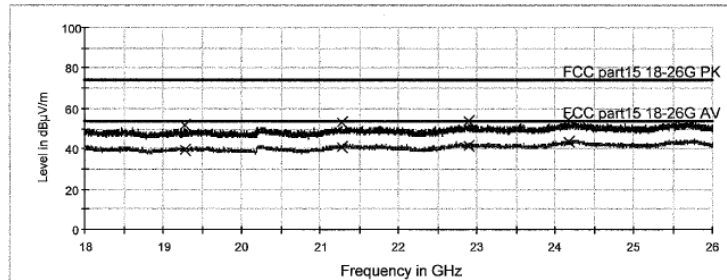

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19283.000000	51.6	5.3	22.4	74.0	V
21279.000000	53.2	5.9	20.8	74.0	V
22896.000000	53.6	6.5	20.4	74.0	V
24181.000000	54.8	6.9	19.2	74.0	V

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19283.000000	39.3	5.3	14.7	54.0	V
21279.000000	40.8	5.9	13.2	54.0	V
22896.000000	41.7	6.5	12.3	54.0	V
24181.000000	43.4	6.9	10.6	54.0	V

Date: 29/07/2010 - Time: 17:43:21

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq. : DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No. 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 9kHz - 30MHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC Active Loop Antenna HFH2-Z2 / TUV ESCI3 -TUV SAC Active Loop Antenna HFH2-Z2

Pre TUV 9K to 30M HFH2-Z2

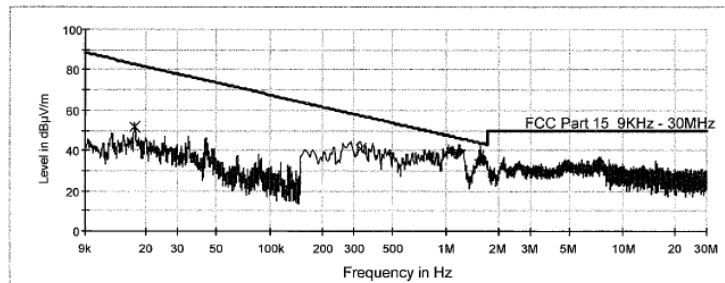

### Result Table Single

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Corr. (dB)	Polarization
7.378000	30.2	---	21.9	V
1.578000	35.2	---	20.2	V
1.190000	40.4	---	20.3	V
0.017240	---	51.5	20.6	V
0.326000	---	40.6	20.8	V

Date: 29/07/2010 - Time: 22:47:00

Tested by:  2010 729  
 Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWHP01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No. 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 9kHz - 30MHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC Active Loop Antenna HFH2-Z2 / TUV ESCI3 -TUV SAC Active Loop Antenna HFH2-Z2

Pre TUV 9K to 30M HFH2-Z2

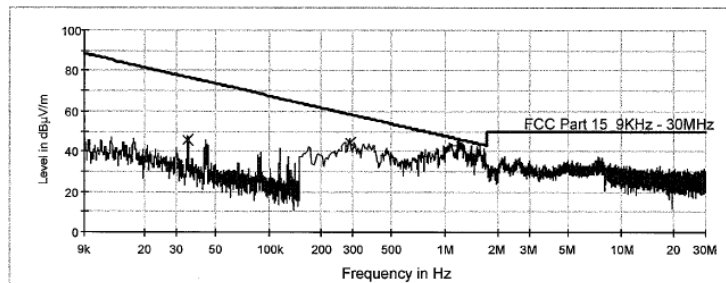

### Result Table Single

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Corr. (dB)	Polarization
7.358000	31.4	---	21.9	H
1.190000	42.8	---	20.3	H
0.034920	---	45.7	20.2	H
0.290000	---	44.1	20.9	H

Date: 29/07/2010 - Time: 22:41:50

Tested by:  Reviewed by: 



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWP01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 30MHz – 1GHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

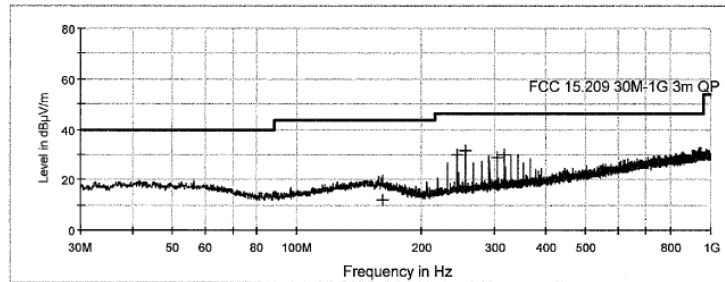

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
161.200000	11.9	15.5	31.6	43.5	H
243.800000	30.2	13.5	15.8	46.0	H
256.000000	31.5	13.7	14.5	46.0	H
304.750000	28.6	15.1	17.4	46.0	H
316.950000	30.2	15.5	15.8	46.0	H

Date: 29/07/2010 - Time: 21:31:05

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 30MHz – 1GHz  
 Receiver: TUV ESCI 3  
 Transducer: TUV SAC UVLB 9168 / TUV ESCI3 -TUV SAC UVLB 9168

Pre TUV 30M to 1G UVLB9168

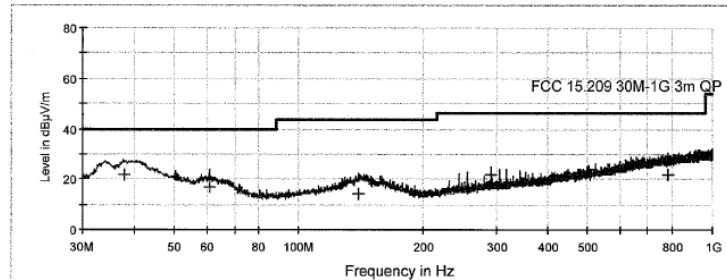

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Corr (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
37.900000	21.6	14.5	18.4	40.0	V
60.950000	17.1	13.5	22.9	40.0	V
139.800000	14.3	15.0	29.2	43.5	V
292.600000	21.7	14.8	24.3	46.0	V
784.900000	22.0	24.4	24.0	46.0	V

Date: 29/07/2010 - Time: 21:24:22

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWHPO1  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 1GHz – 18GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

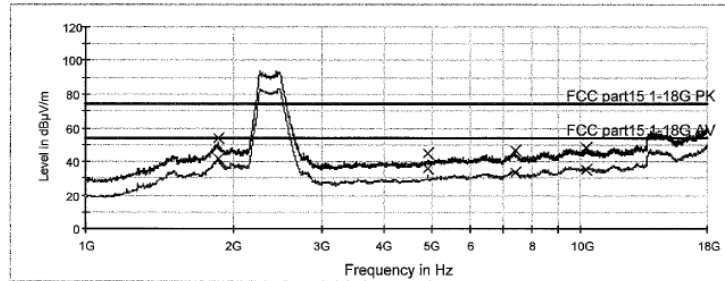



### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1854.000000	54.0	-12.9	20.0	74.0	V
4924.000000	44.6	-5.7	29.4	74.0	V
7379.000000	46.7	0.5	27.3	74.0	V
10242.000000	48.2	5.3	25.8	74.0	V

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1854.000000	41.5	-12.9	12.5	54.0	V
4924.000000	36.1	-5.7	17.9	54.0	V
7379.000000	33.5	0.5	20.5	54.0	V
10242.000000	35.2	5.3	18.8	54.0	V

Date: 29/07/2010 - Time: 15:56:35

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 1GHz – 18GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

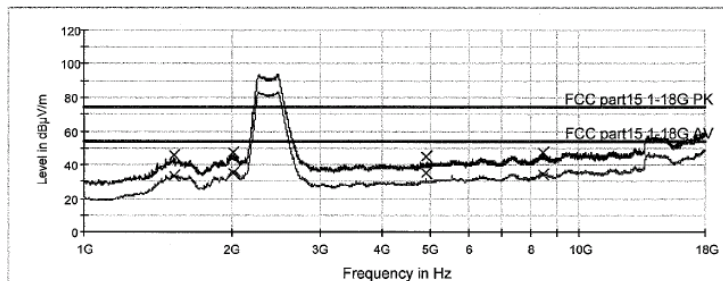



### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1521.000000	46.1	-14.6	27.9	74.0	H
2009.000000	47.5	-10.4	26.5	74.0	H
4924.000000	44.7	-5.7	29.3	74.0	H
8461.000000	47.0	1.8	27.0	74.0	H

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
1521.000000	33.3	-14.6	20.7	54.0	H
2009.000000	35.2	-10.4	18.8	54.0	H
4924.000000	35.5	-5.7	18.5	54.0	H
8461.000000	34.2	1.8	19.8	54.0	H

Date: 29/07/2010 - Time: 15:47:55

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWH01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Vertical

#### Subrange 1

Frequency Range: 18GHz - 26GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26.5 3160-09

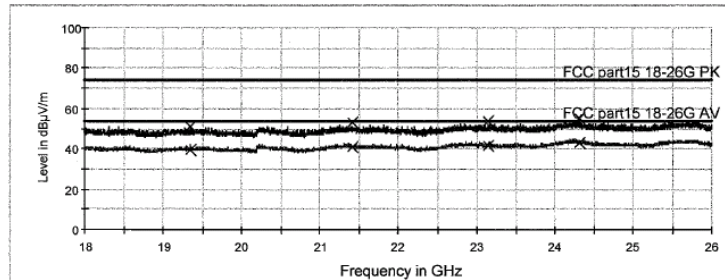

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19345.000000	51.3	5.3	22.7	74.0	V
21423.000000	52.9	5.9	21.1	74.0	V
23145.000000	53.7	6.6	20.3	74.0	V
24324.000000	55.2	6.9	18.8	74.0	V

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
19345.000000	39.6	5.3	14.4	54.0	V
21423.000000	40.8	5.9	13.2	54.0	V
23145.000000	41.4	6.6	12.6	54.0	V
24324.000000	43.0	6.9	11.0	54.0	V

Date: 29/07/2010 - Time: 17:37:54

Tested by:



Reviewed by:



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer: Beautiful Enterprise Co.,Ltd.  
 Test Item: Wireless Stereo headphones  
 Identification: RF-RBWP01  
 Test Standard: FCC Part 15  
 Test Detail: RE  
 Operation Mode: Tx @ High channel  
 Climate Condition: 23 °C; 50 %RH; 101 kPa.  
 Test Voltage / Freq.: DC 5V via AC/DC adapter  
 Receipt No.: 163065935 100  
 Report No.: 17017067 001  
 Result: Pass  
 Comment: Horizontal

#### Subrange 1

Frequency Range: 18GHz - 26GHz  
 Receiver: TUV FSP 30  
 Transducer: TUV SAC 3160-09 / TUV FSP 30-TUV SAC 3160-09

Pre TUV 18 to 26.5 3160-09

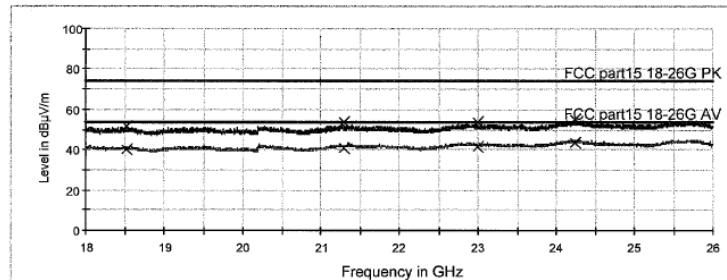

### Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
18532.000000	51.7	5.0	22.3	74.0	H
21304.000000	53.4	5.9	20.6	74.0	H
23000.000000	53.6	6.5	20.4	74.0	H
24254.000000	55.4	6.9	18.6	74.0	H

### Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Polarization
18532.000000	39.9	5.0	14.1	54.0	H
21304.000000	40.9	5.9	13.1	54.0	H
23000.000000	41.7	6.5	12.3	54.0	H
24254.000000	43.3	6.9	10.7	54.0	H

Date: 29/07/2010 - Time: 17:26:11

Tested by:



Reviewed by:



## Test Graph of Radiated emissions in restricted band, mode A

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

### EMC Test Record (EMISSION)


#### Test Information

Manufacturer:	Beautiful Enterprise Co.,Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWHP01
Test Standard:	FCC Part 15
Test Detail:	Band edge
Operation Mode:	Tx @ Low channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.	17017067 001
Result:	
Comment:	Vertical

#### Subrange 1

Frequency Range:	2GHz – 3GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

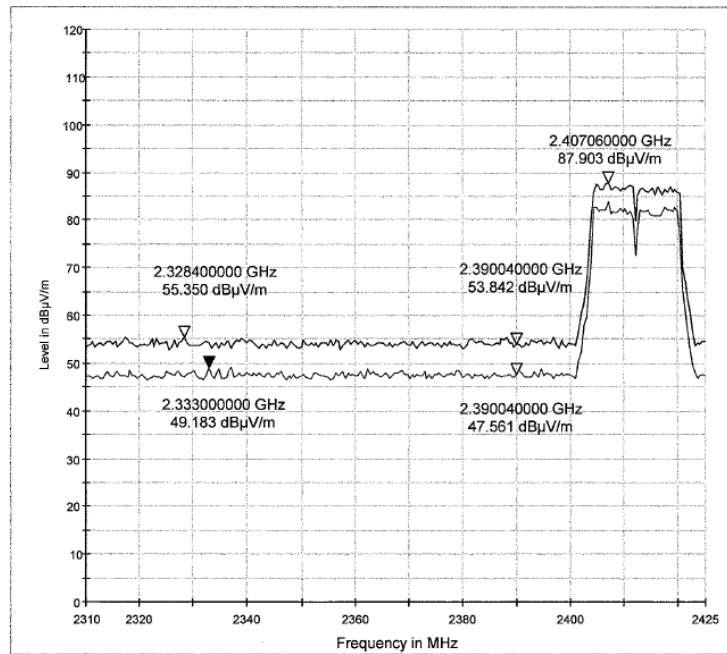

Date: 29/07/2010 - Time: 15:16:56

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer:	Beautiful Enterprise Co.,Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWHF01
Test Standard:	FCC Part 15
Test Detail:	Band edge
Operation Mode:	Tx @ Low channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq.:	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.:	17017067 001
Result:	
Comment:	Horizontal

#### Subrange 1

Frequency Range:	2GHz – 3GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

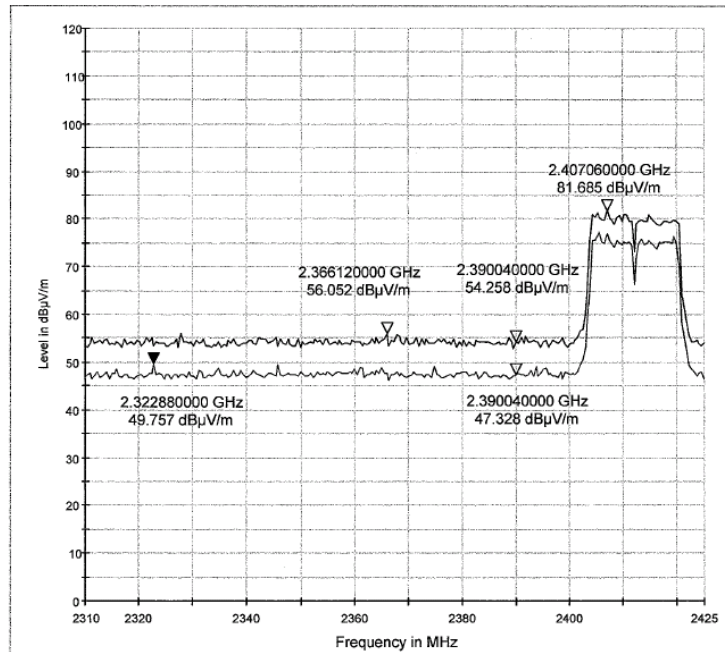

Date: 29/07/2010 - Time: 15:20:05

Tested by:



Reviewed by:





TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer:	Beautiful Enterprise Co.,Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWHP01
Test Standard:	FCC Part 15
Test Detail:	Band edge
Operation Mode:	Tx @ High channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.	17017067 001
Result:	
Comment:	Horizontal



#### Subrange 1

Frequency Range:	2GHz – 3GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

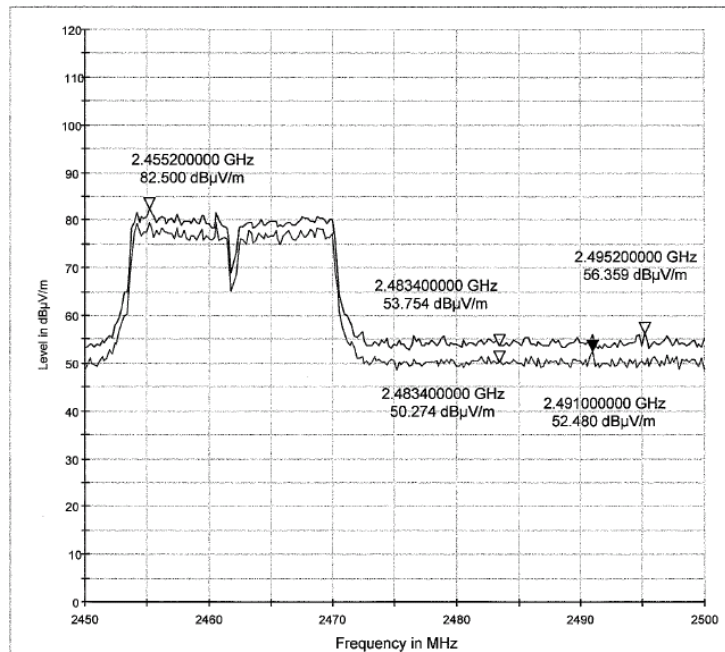

Date: 29/07/2010 - Time: 15:28:24

Tested by:  Reviewed by: 

TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

## EMC Test Record (EMISSION)


### Test Information

Manufacturer:	Beautiful Enterprise Co., Ltd.
Test Item:	Wireless Stereo headphones
Identification:	RF-RBWH01
Test Standard:	FCC Part 15
Test Detail:	Band edge
Operation Mode:	Tx @ High channel
Climate Condition:	23 °C; 50 %RH; 101 kPa.
Test Voltage / Freq. :	DC 5V via AC/DC adapter
Receipt No.:	163065935 100
Report No.:	17017067 001
Result:	
Comment:	Vertical

#### Subrange 1

Frequency Range:	2GHz – 3GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

Pre TUV 1 to 18G HF906

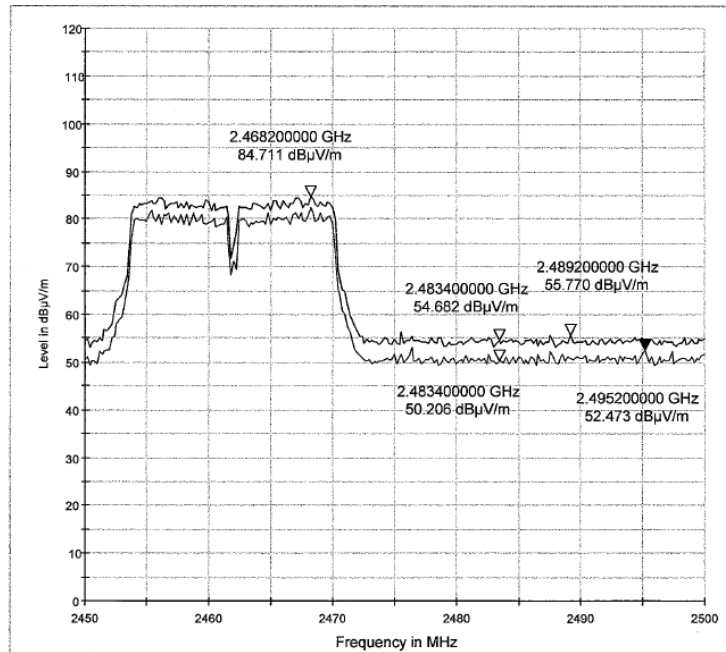

Date: 29/07/2010 - Time: 15:36:19


Tested by:




Reviewed by:




### Test Graph of Conducted Spurious Emissions in 100kHz Bandwidth, Low Channel, Antenna 0

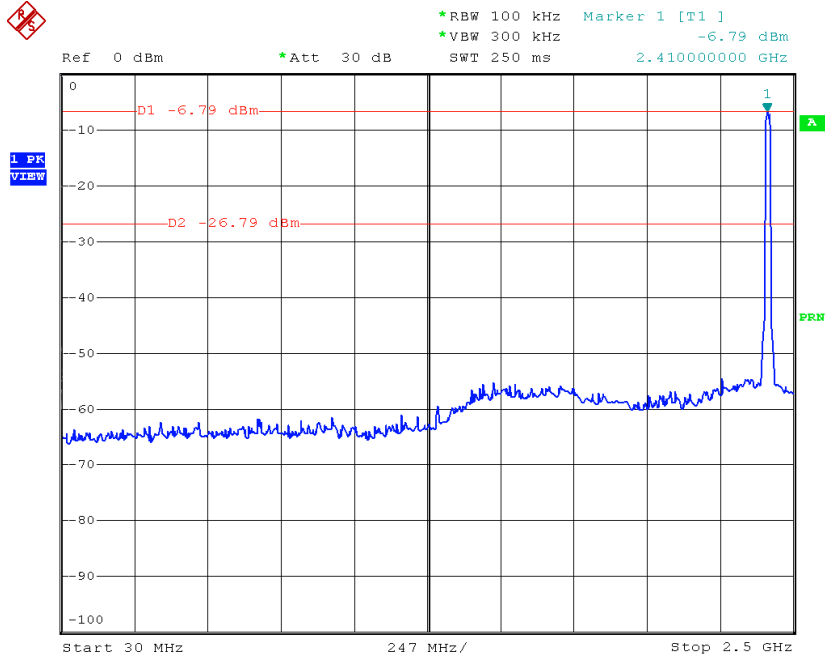

Date: 12.AUG.2010 16:18:24

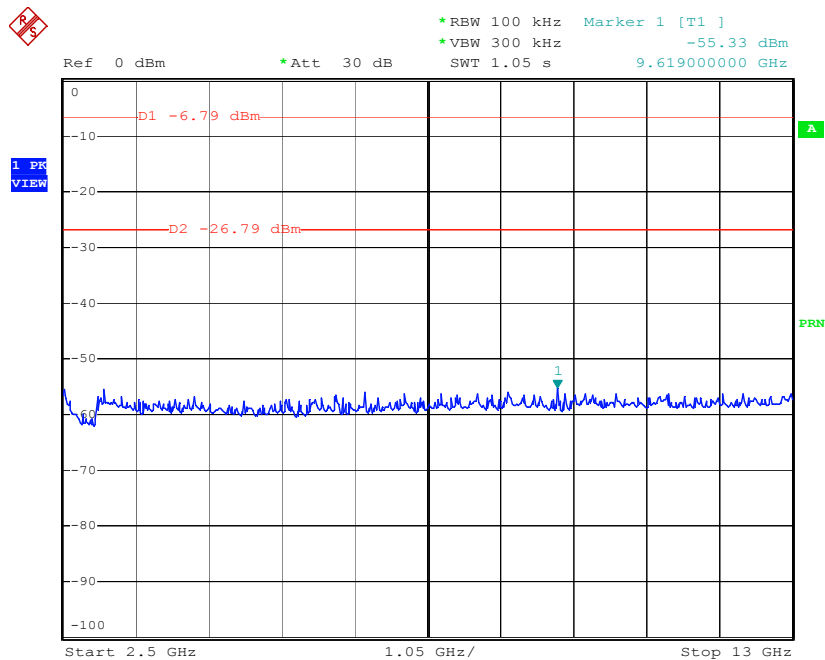


Date: 12.AUG.2010 16:18:57

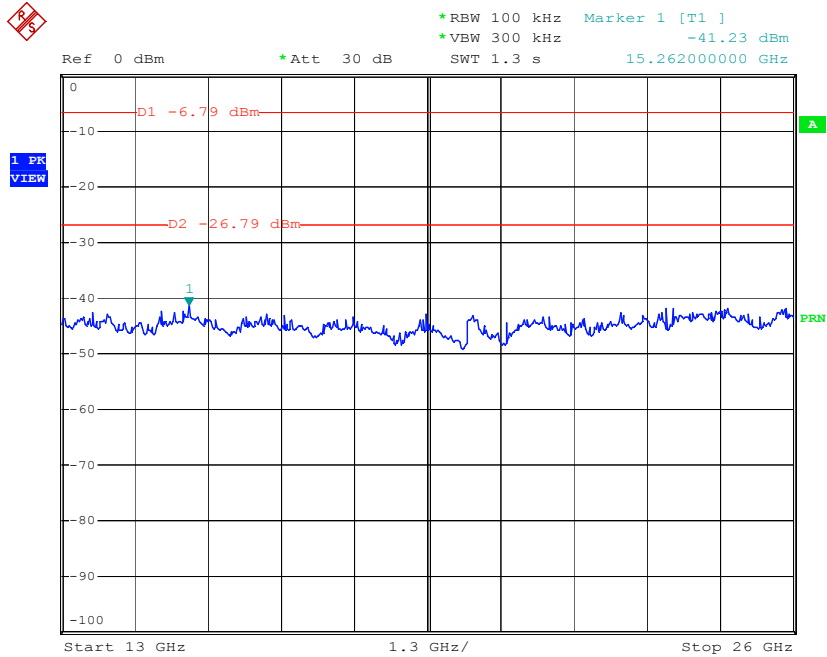


Date: 12.AUG.2010 16:19:34


### Middle Channel, Antenna 0

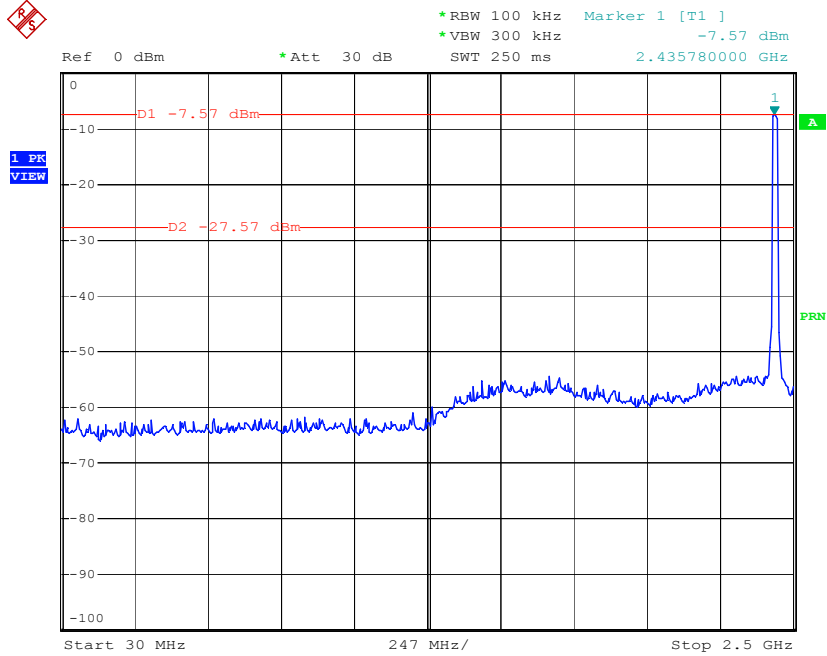

Date: 12.AUG.2010 16:20:31

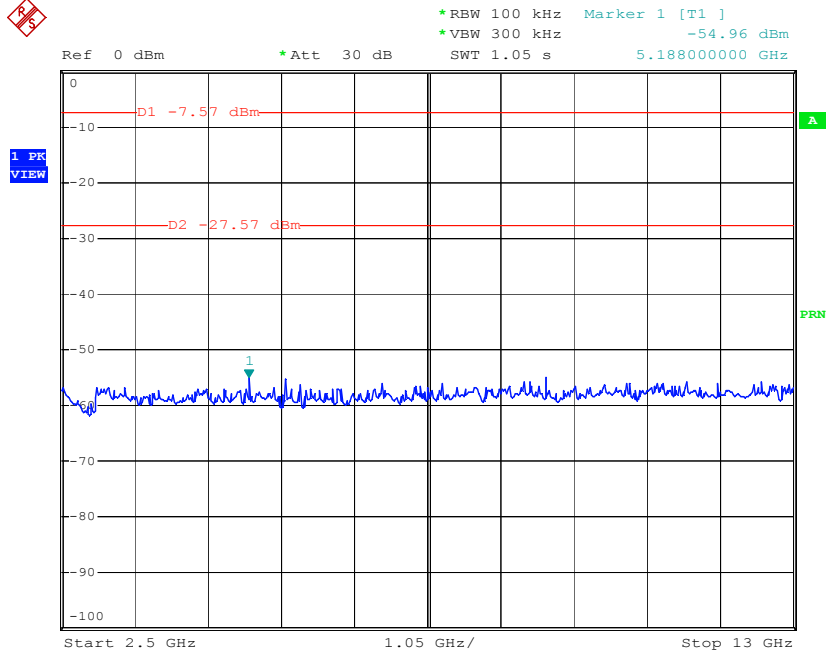


Date: 12.AUG.2010 16:21:07

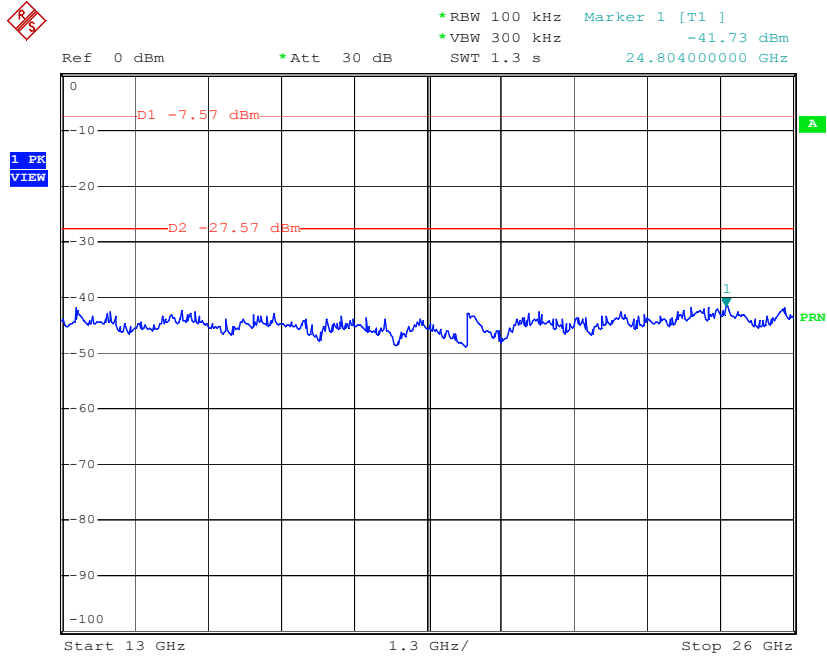


Date: 12.AUG.2010 16:21:44

Produkte  
Products


### High Channel, Antenna 0

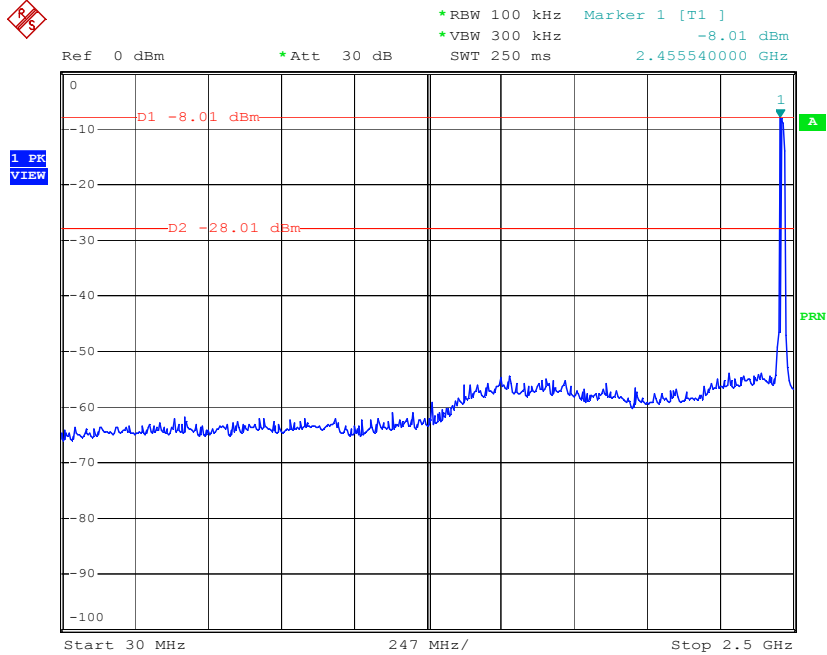

Date: 12.AUG.2010 16:15:48

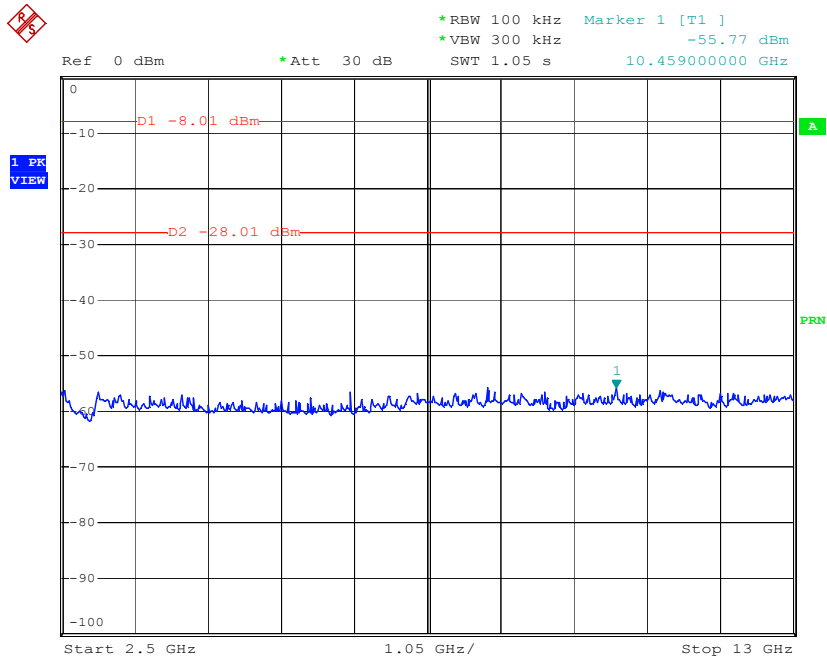


Date: 12.AUG.2010 16:16:38

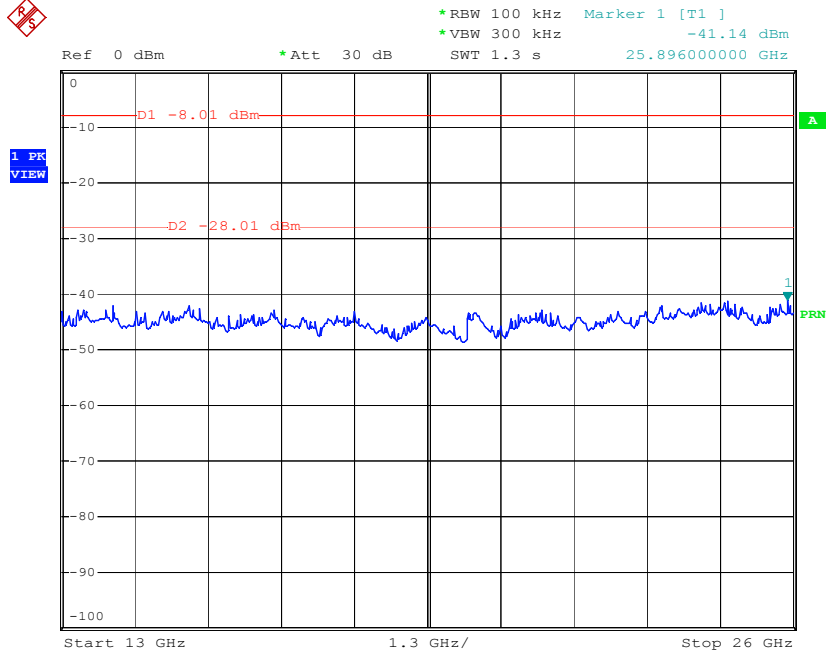


Date: 12.AUG.2010 16:17:24


### Low Channel, Antenna 1

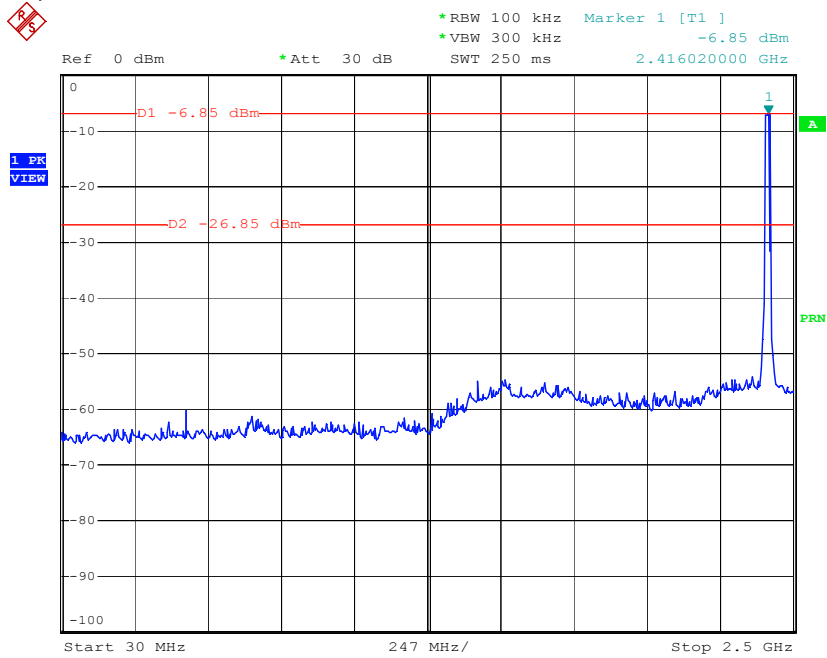

Date: 12.AUG.2010 16:12:50

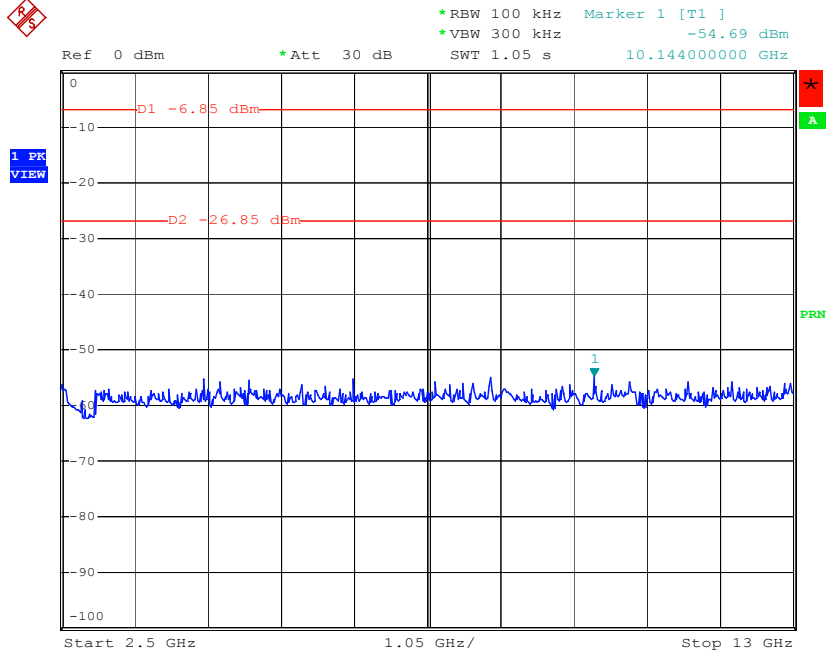


Date: 12.AUG.2010 16:13:26

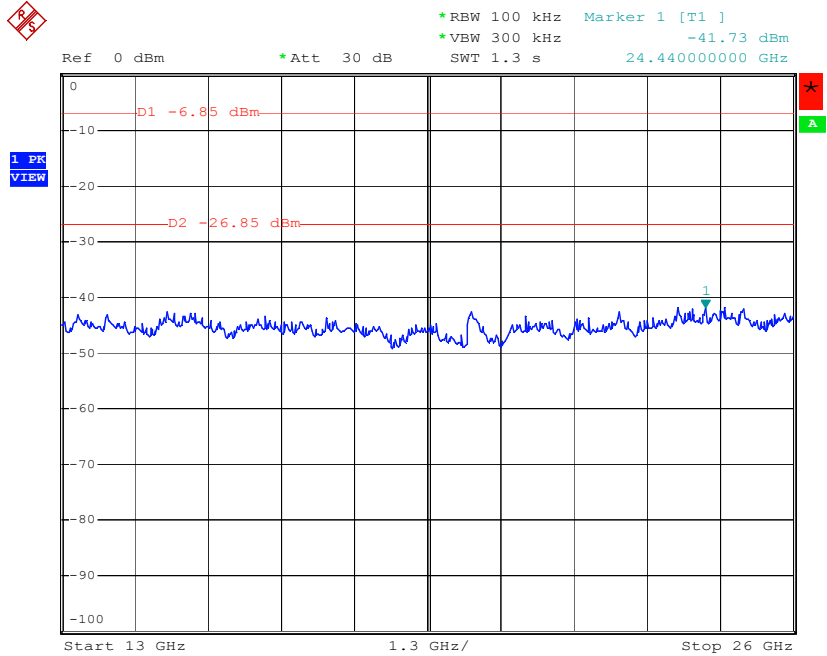


Date: 12.AUG.2010 16:14:37




### Middle Channel, Antenna 1

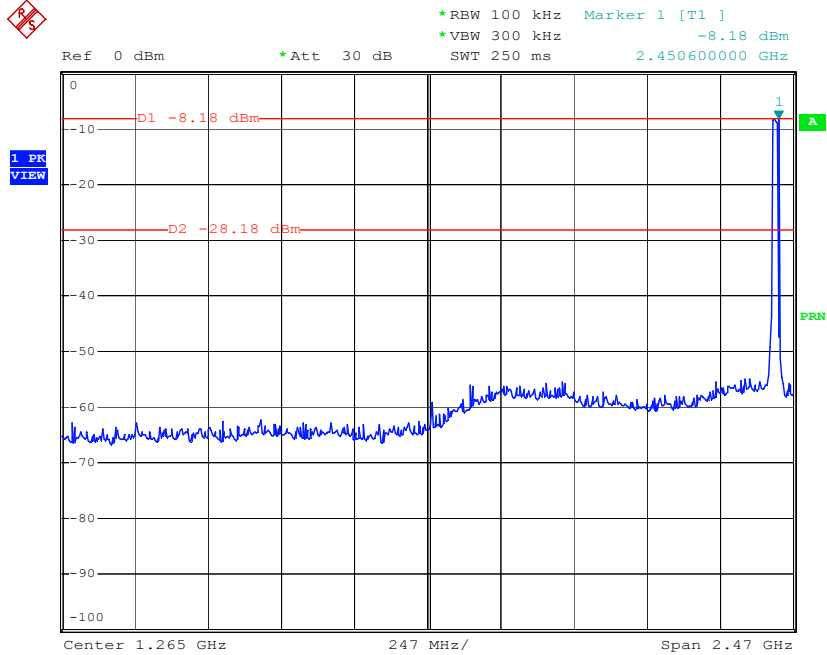

Date: 12.AUG.2010 16:10:58

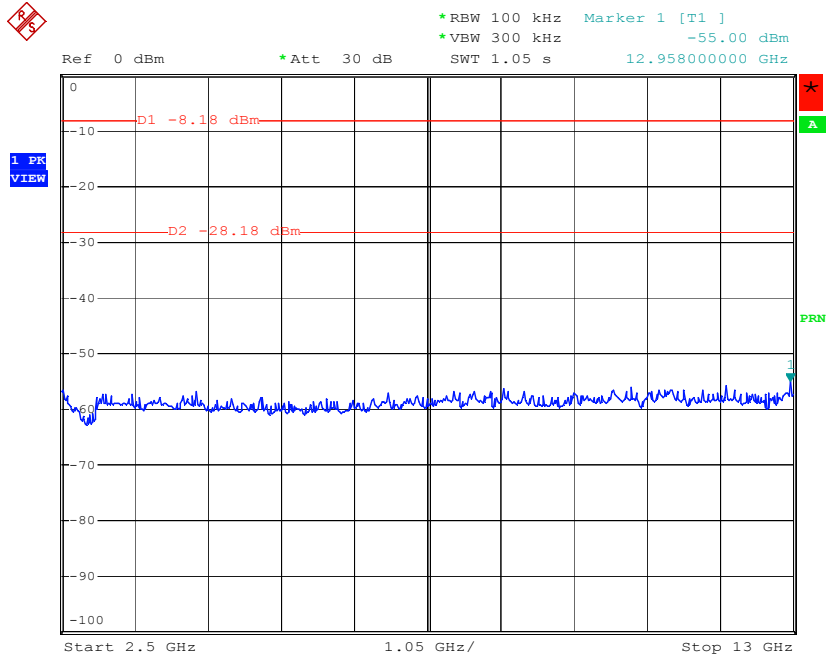


Date: 12.AUG.2010 16:11:30

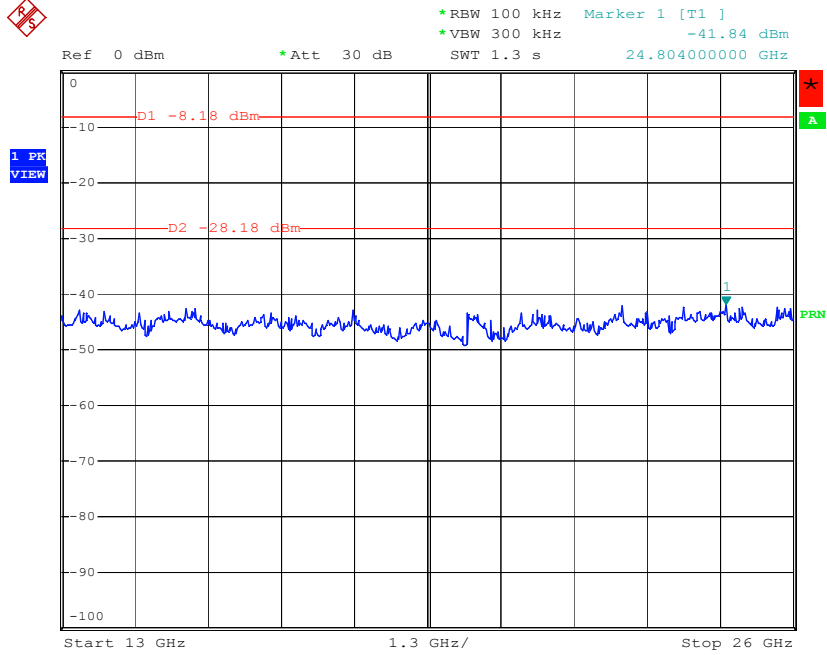


Date: 12.AUG.2010 16:11:59


### High Channel, Antenna 1

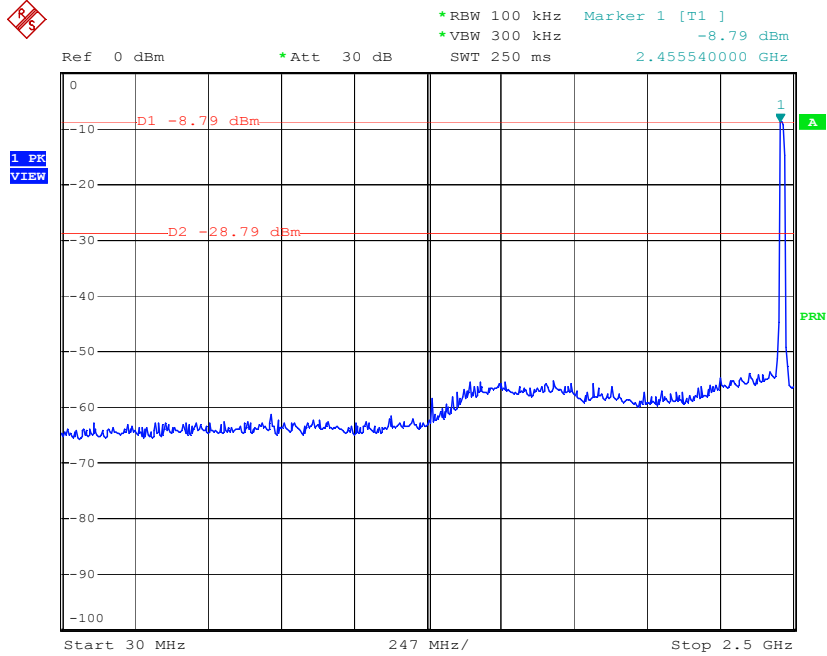

Date: 12.AUG.2010 16:22:31

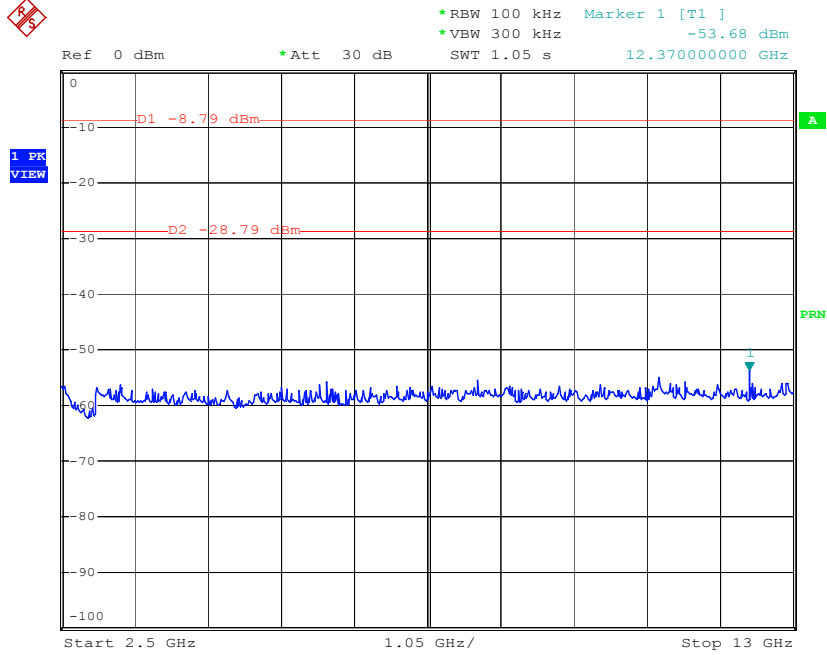

Date: 12.AUG.2010 16:23:00

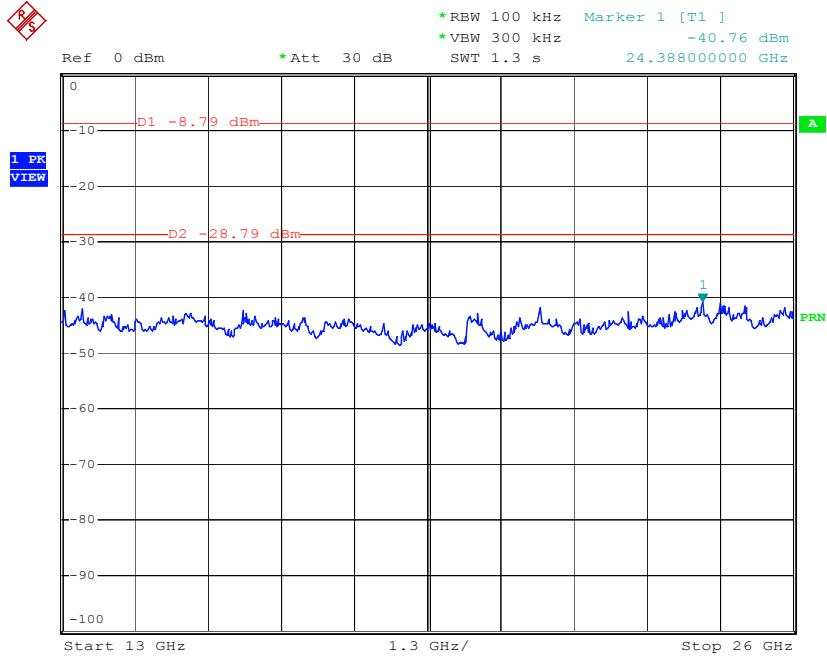

Date: 12.AUG.2010 16:24:37