



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

# TEST REPORT

**FCC Standards : FCC 47CFR part 15 subpart C**  
**Industry Canada Standards :RSS-210 Issue 8 & RSS-GEN Issue 3**

Test Report No. : CTK-2013-01350  
Date of Issue : 2013-09-02  
FCC ID : V2R-PPU-BN0530  
Model/Type No. : CHORD MS 530  
Kind of Product : Wireless Headphones with Active Noise Cancelling  
Applicant : Cresyn Co., Ltd.  
Applicant Address : 8-22 Jamwon-dong, Seocho-gu, Seoul, Korea  
Manufacturer : Cresyn Co., Ltd.  
Manufacturer Address : 8-22 Jamwon-dong, Seocho-gu, Seoul, Korea  
Contact Person : Yong Min Cho / Research Engineer  
Telephone : +82-2-2041-2857  
Received Date : 2013-08-07  
Test period : Start : 2013-08-07 End : 2013-09-02

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang  
Test Engineer  
Date: 2013-09-02

Reviewed by

Young-Joon, Park  
Technical Manager  
Date: 2013-09-02



CTK Co., Ltd.  
The First Leader of Global Regulatory Corporation

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## REPORT REVISION HISTORY

Date	Revision	Page No
2013-09-02	Issued (CTK-2013-01350)	All

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## TABLE OF CONTENTS

REPORT REVISION HISTORY .....	2
1.0 General Product Description .....	4
1.1 Tested Frequency.....	4
1.2 Tested Mode.....	4
1.3 Device Modifications.....	5
1.4 Peripheral Devices .....	5
1.5 Calibration Details of Equipment Used for Measurement .....	5
1.6 Test Facility.....	5
1.7 Laboratory Accreditations and Listings.....	6
2.0 Summary of tests .....	7
2.1 Transmitter Requirements.....	8
2.1.1 Carrier Frequency Separation .....	8
2.1.2 Number of Hopping Frequencies .....	10
2.1.4 Time of Occupancy (Dwell Time).....	19
2.1.5 Maximum peak Conducted Output Power .....	25
2.1.6 Band-edge .....	30
2.1.7 Field Strength of Emissions .....	41
2.1.8 AC Conducted Emissions.....	53
APPENDIX A – Test Equipment Used For Tests .....	56



## 1.0 General Product Description

Basic Model/Type No.	CHORD MS 530
Serial number	Prototype
EUT condition	Pre-production, not damaged
Antenna type	Chip antenna      Gain 2.7 dBi
Frequency Range	2402 MHz - 2480 MHz
RF power	3.698 dBm Peak Conducted
Number of channels	79
Channel Spacing	1 MHz
Channel Access Protocol	Frequency Hopping
Type of Modulation	GFSK(1 Mbps), DQPSK(2 Mbps)
Power Source	DC 3.7 V (Lithium Ion Rechargeable Battery)

### 1.1 Tested Frequency

	LOW	MID	HIGH
<b>Frequency (MHz)</b>	2402	2441	2480

### 1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Ch	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH 5
Low, Mid, High	FHSS	DQPSK	2DH 5



### 1.3 Device Modifications

The following modifications was applied by the applicant:

Not applicable

### 1.4 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	DELL INC.	Inspiron 6400	-
Switching Adapter2	DDongguang Lite Power 2nd Plant	LA65NS0-00	-

### 1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

### 1.6 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea.







CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 1.7 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	3 m & 10 m SAC and Conducted Test Site	 R-948, C-986, T-1843
KOREA	KCC	EMI (10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth	NA		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 0.125 Watts		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	NA

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in DA 00-705.

## 2.1 Transmitter Requirements

### 2.1.1 Carrier Frequency Separation

#### Test Location

RF Test Room

#### Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled. After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ( $\geq 1\%$  of the span) Sweep = auto

VBW = 30 kHz ( $\geq$  RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

#### Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### Test Results

##### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1000	559.3	25	Complies

##### Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1000	781.3	25	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Carrier Frequency Separation

Data Rate : GFSK



Data Rate : DQPSK







CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Number of Hopping Frequencies(GFSK)

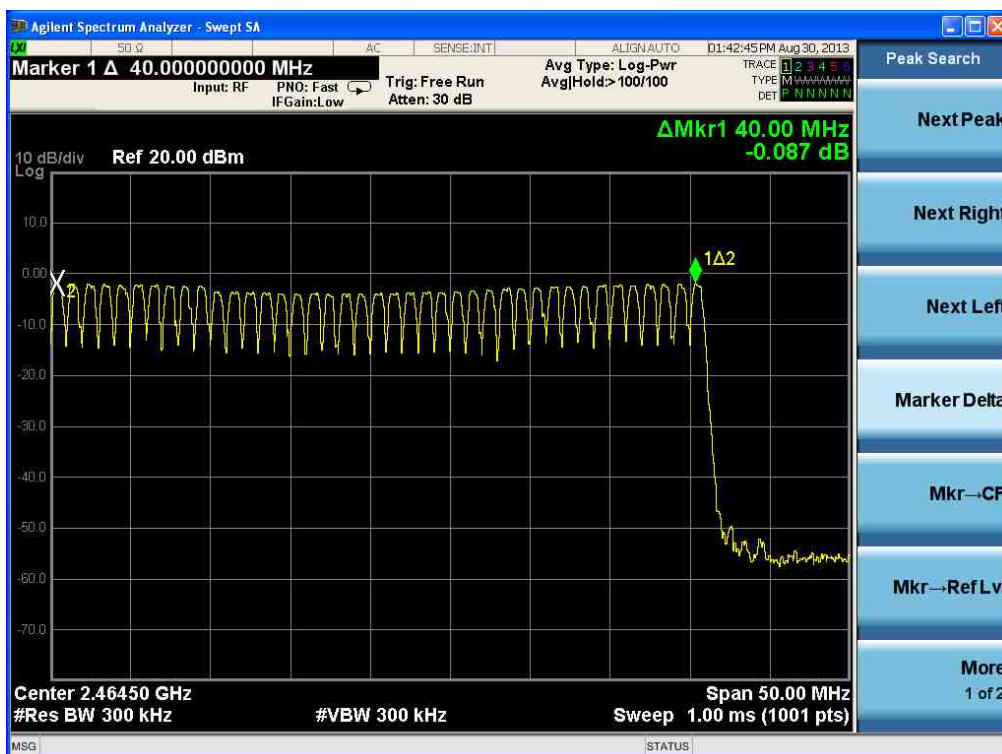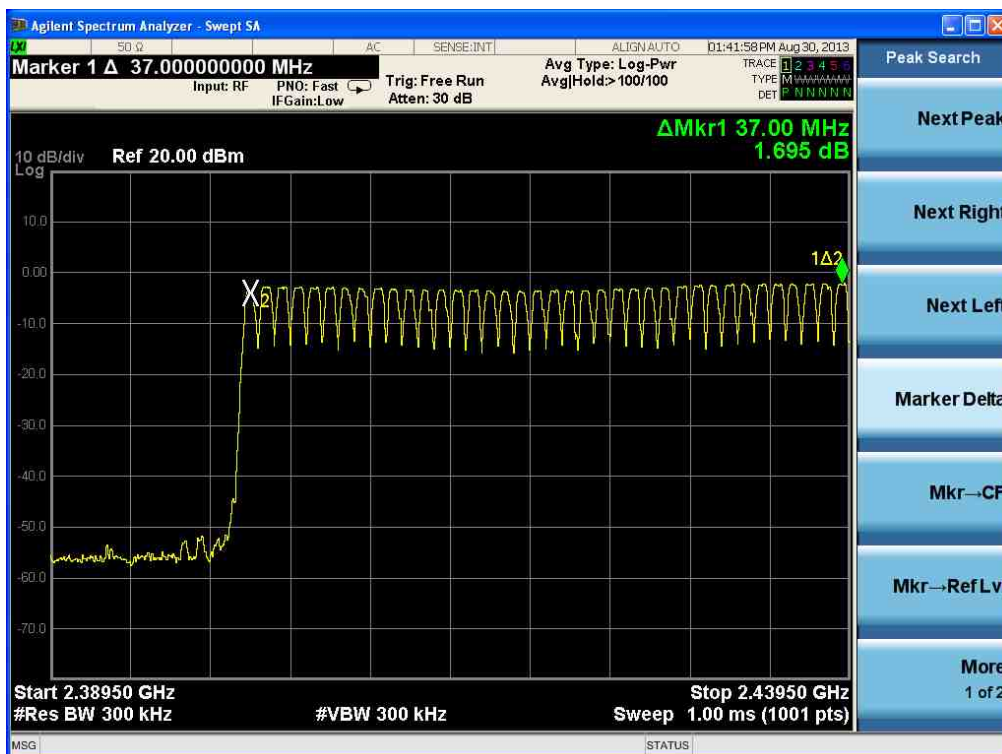





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Number of Hopping Frequencies(DQPSK)

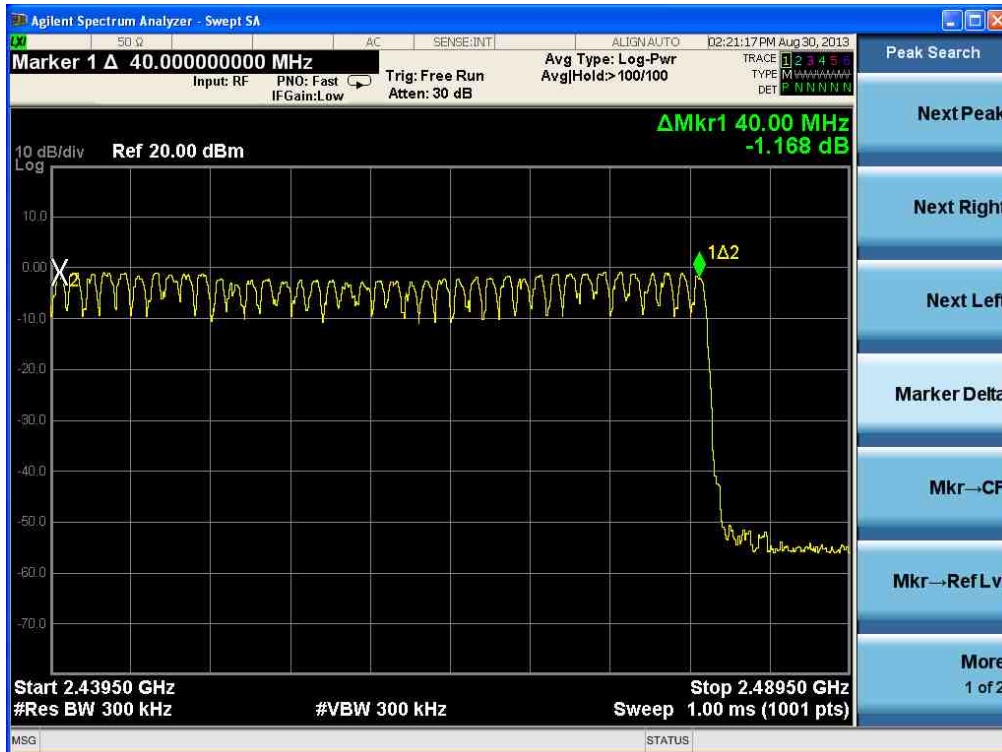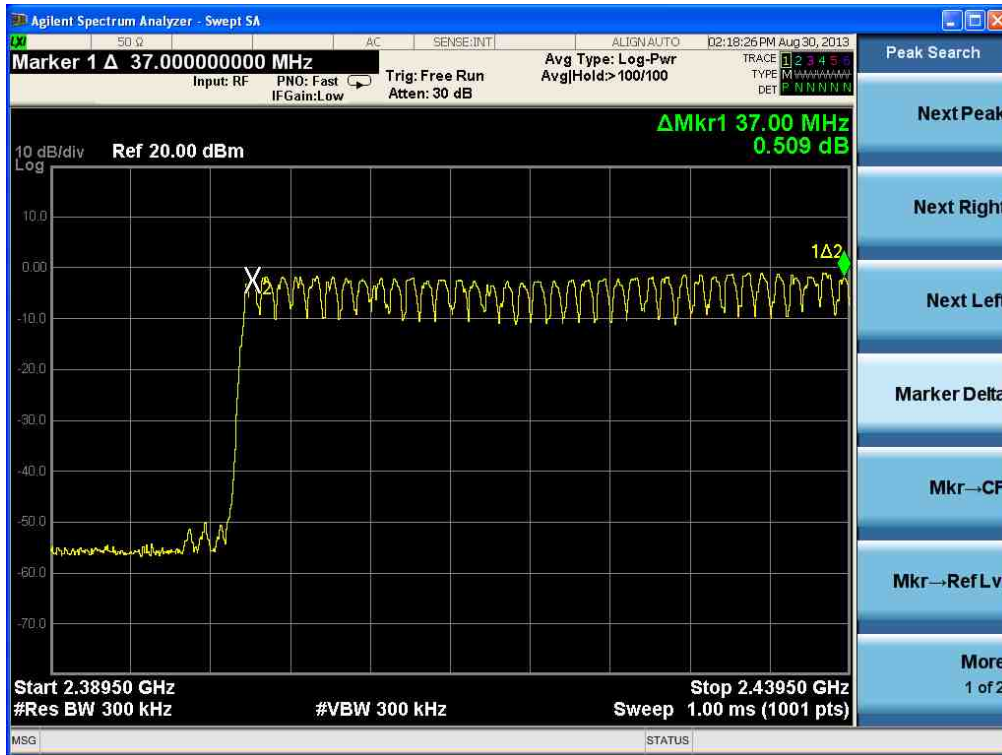

## 2.1.3 20 dB bandwidth

### Test Location

RF Test Room

### Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ( $\geq 1\%$  of the span)

Sweep = auto

VBW = 30 kHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold



### Limit

Limit : N/A



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test Results (20 dB bandwidth)

### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.852	Complies
2441	39	0.839	Complies
2480	78	0.836	Complies

### Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.168	Complies
2441	39	1.172	Complies
2480	78	1.172	Complies

## Test Results (Occupied Bandwidth)

### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.810	Complies
2441	39	0.798	Complies
2480	78	0.794	Complies

### Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.087	Complies
2441	39	1.085	Complies
2480	78	1.088	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 20 dB Bandwidth, Occupied Bandwidth - GFSK






CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

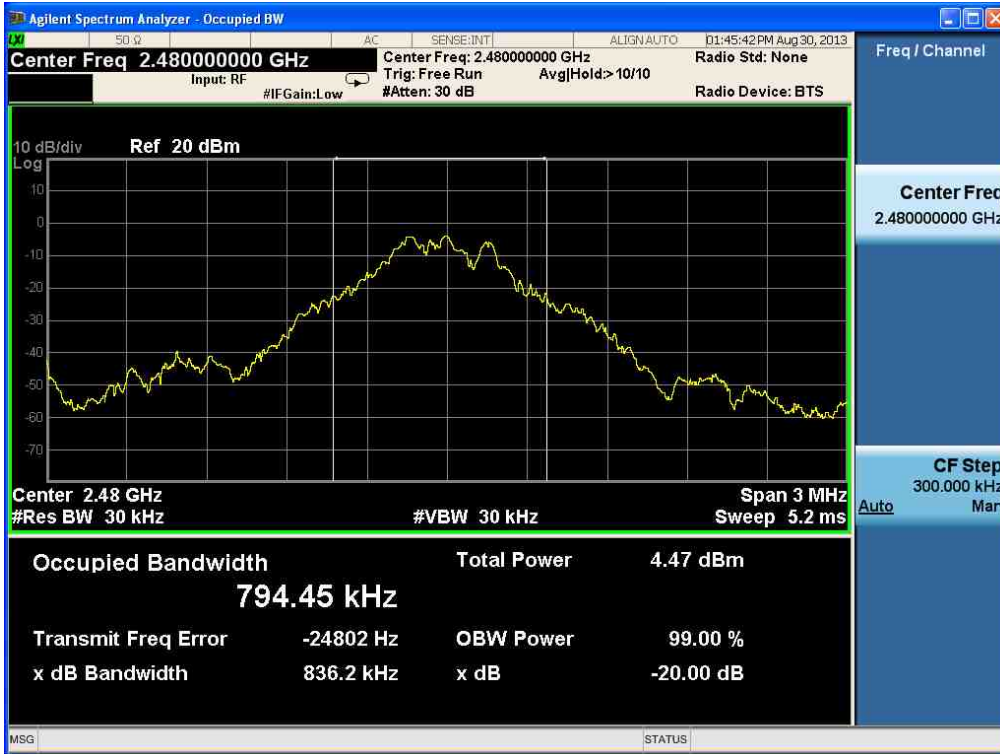





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 20 dB Bandwidth, Occupied Bandwidth - DQPSK





CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com



## 2.1.4 Time of Occupancy (Dwell Time)

### Test Location

RF Test Room

### Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The CHORD MS 530 has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



### Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



## Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷ number of hop per channel × 31.6

### Test mode : GFSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	DH 1	0.385	123.20	Complies
	DH 3	1.640	262.40	Complies
	DH 5	2.895	308.79	Complies

DH1 Dwell time =  $0.385 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 123.20 \text{ ms}$

DH3 Dwell time =  $1.640 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 262.40 \text{ ms}$

DH5 Dwell time =  $2.895 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.79 \text{ ms}$

### Test mode : DQPSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	2DH 1	0.400	128.00	Complies
	2DH 3	1.657	265.12	Complies
	2DH 5	2.910	310.39	Complies

2DH1 Dwell time =  $0.400 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 128.00 \text{ ms}$

2DH3 Dwell time =  $1.657 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 265.12 \text{ ms}$

2DH5 Dwell time =  $2.910 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 310.39 \text{ ms}$

See next pages for actual measured spectrum plots.




# CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
 Tel: +82-31-339-9970 Fax: +82-31-339-9855  
 www.e-ctk.com

CTK Co., Ltd.  
 The Power Leader of Global Regulatory Compliance

## Time of Occupancy for PACKET Type DH1(GFSK)

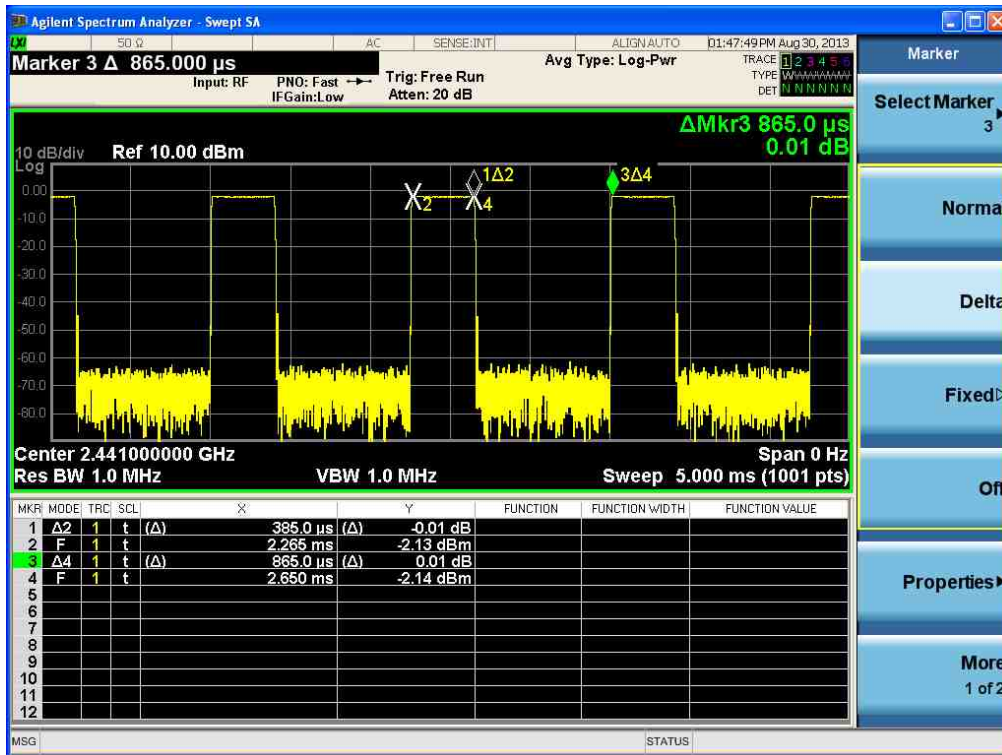

## Time of Occupancy for PACKET Type DH3(GFSK)

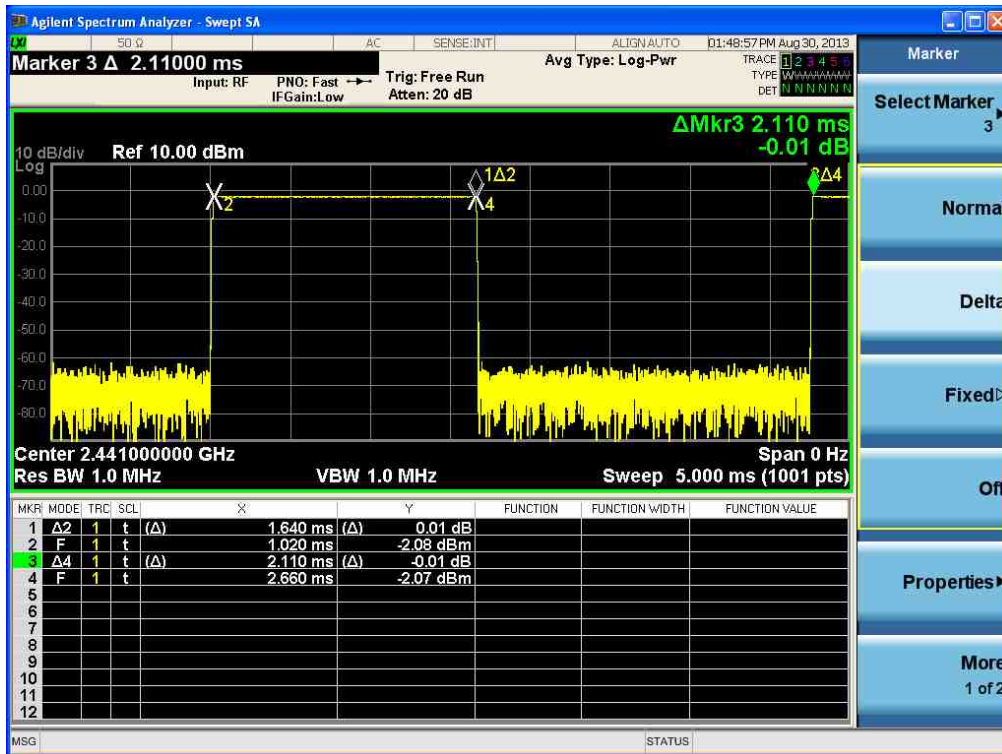




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Time of Occupancy for PACKET Type DH5(GFSK)

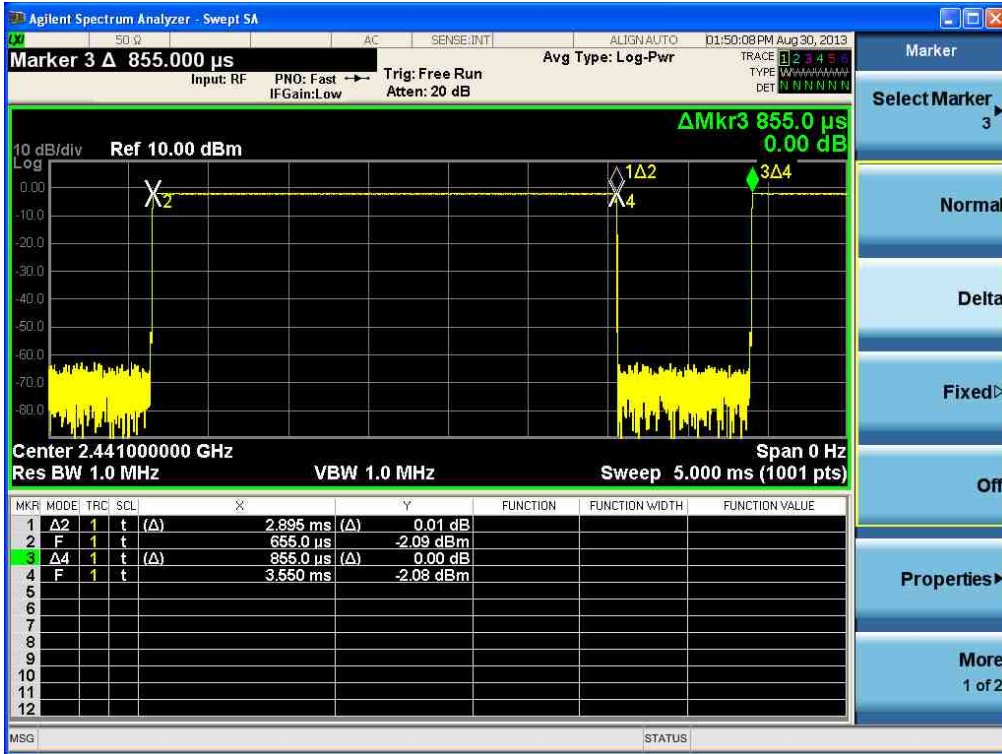




# CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## Time of Occupancy for PACKET Type 2DH1(DQPSK)

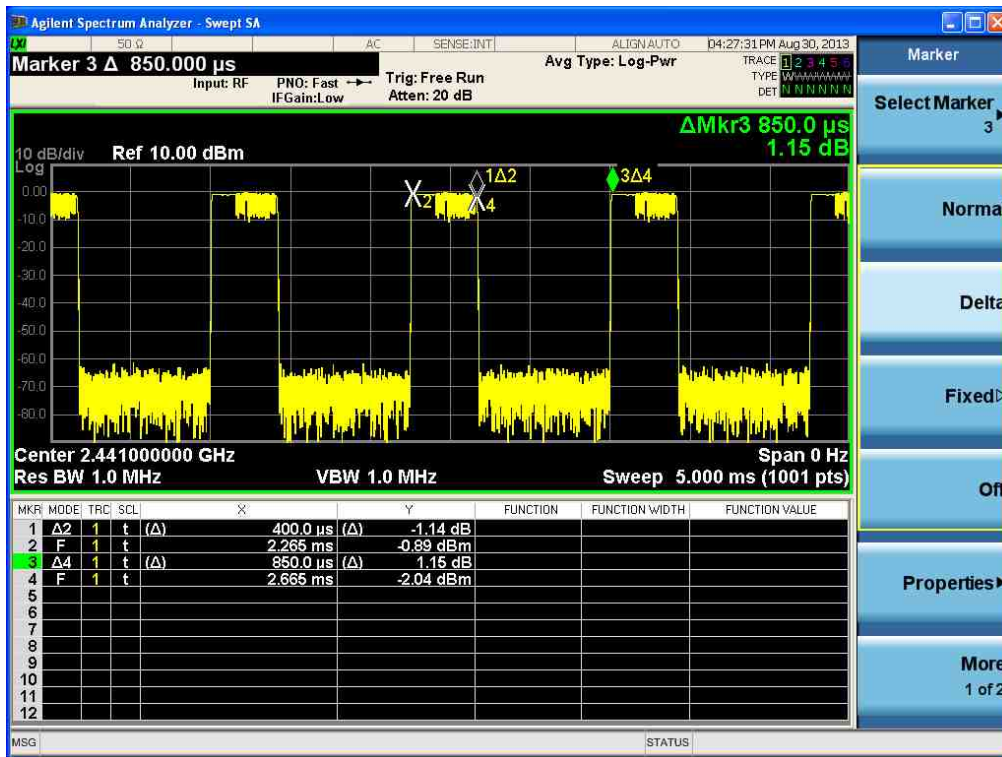

## Time of Occupancy for PACKET Type 2DH3(DQPSK)

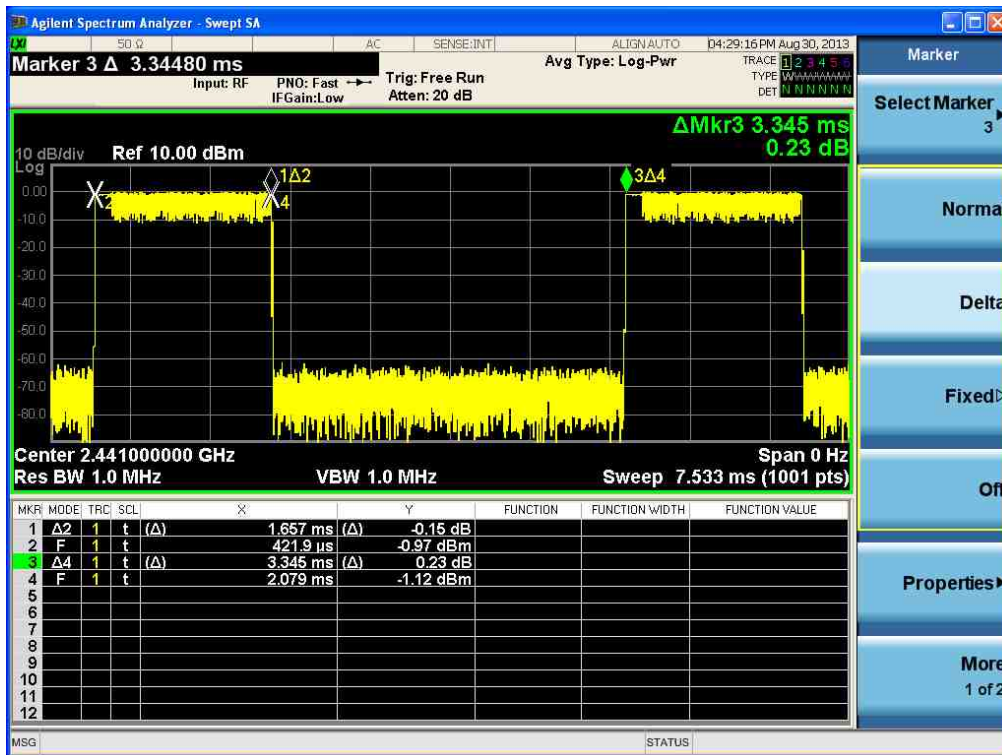




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Time of Occupancy for PACKET Type 2DH5(DQPSK)

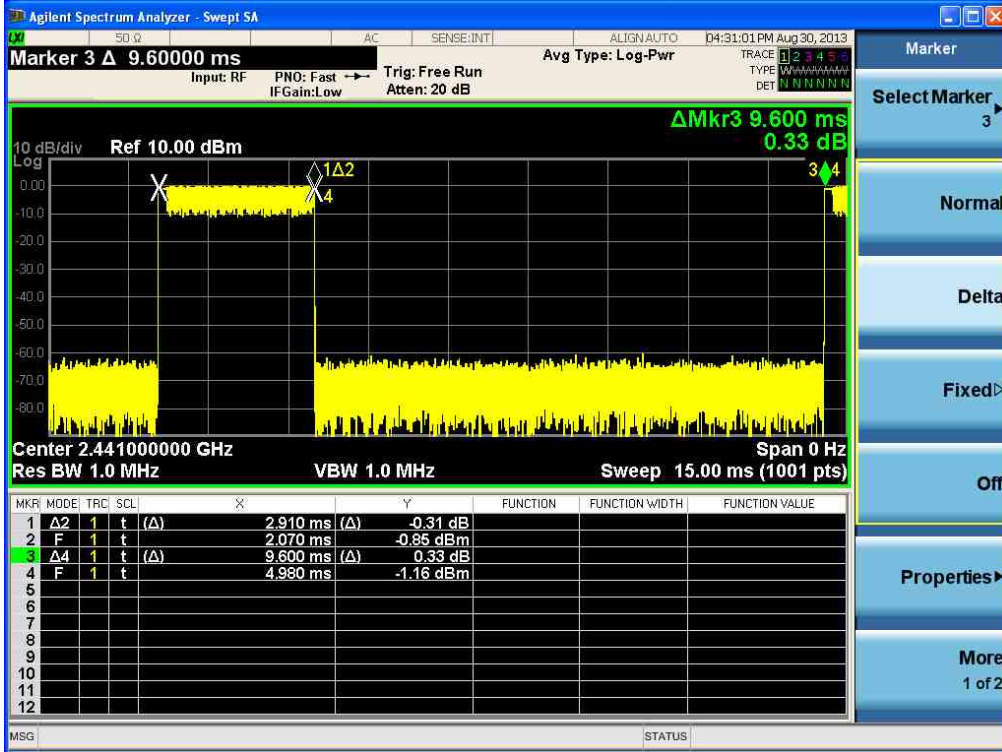



## 2.1.5 Maximum peak Conducted Output Power

### Test Location

RF Test Room

### Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto



### Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

### Test Results

#### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	0.195	1.046	Complies
2441	39	1.647	1.461	Complies
2480	78	1.538	1.425	Complies

#### Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	2.296	1.697	Complies
2441	39	3.698	2.343	Complies
2480	78	3.664	2.325	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Maximum peak Conducted Output Power - GFSK

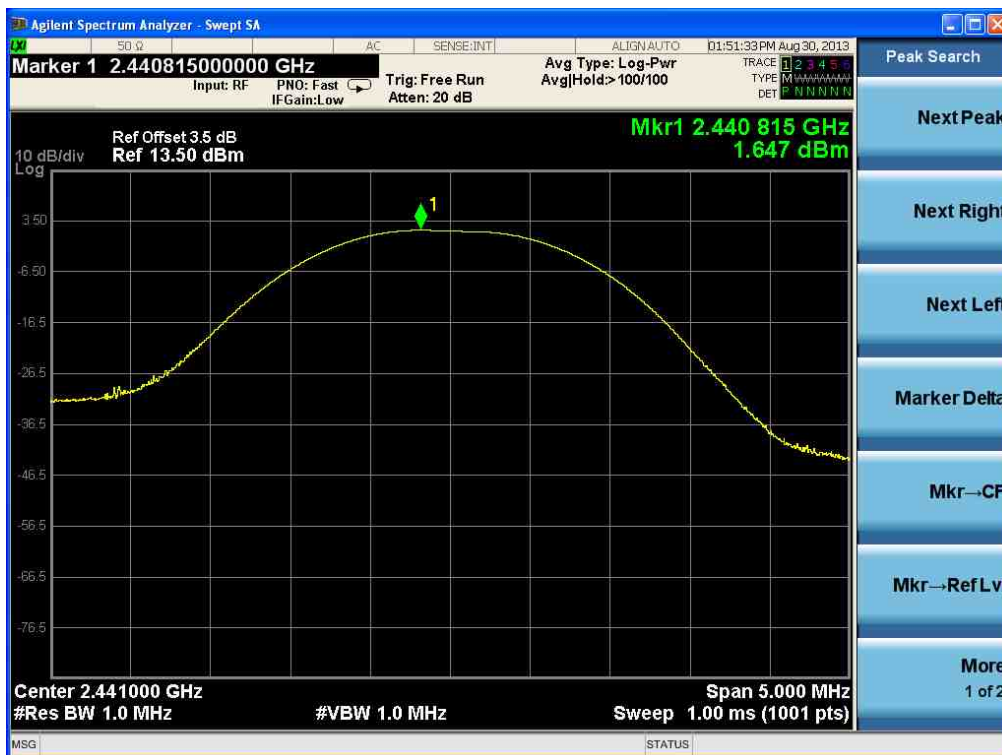



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com







CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Maximum peak Conducted Output Power - DQPSK

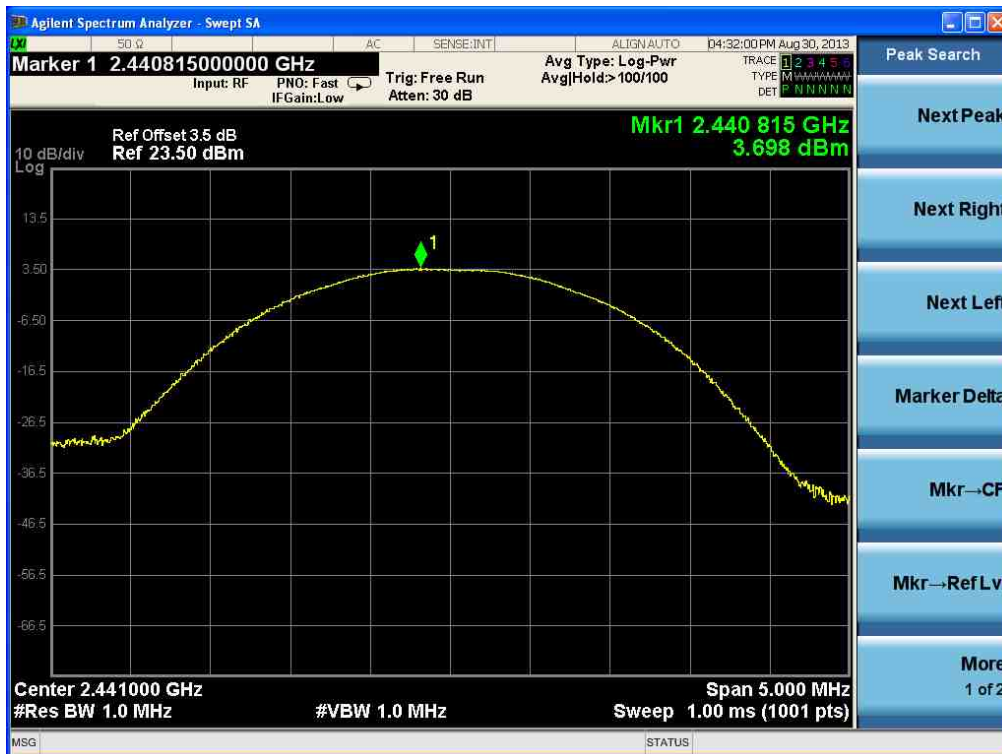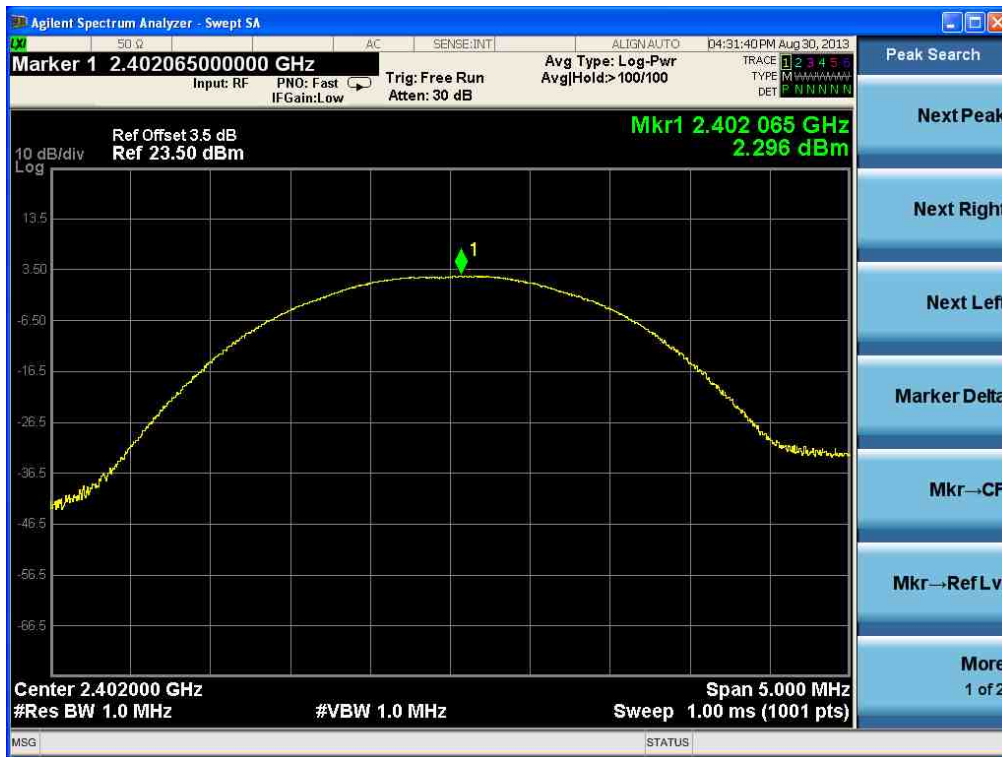



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com



## 2.1.6 Band-edge

### Test Location

RF Test Room

### Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz ( $\geq$  RBW)

Span = 10 MHz

Trace = max hold

Detector function = peak

Sweep = auto



### Limit

> 20 dBc

### Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band – edge (with Hopping) - GFSK





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band – edge (without Hopping) - GFSK







CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band - edge (with Hopping) - DQPSK









CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band – edge (at 20 dB blow) – Low channel Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic (GFSK : Worst-Case)

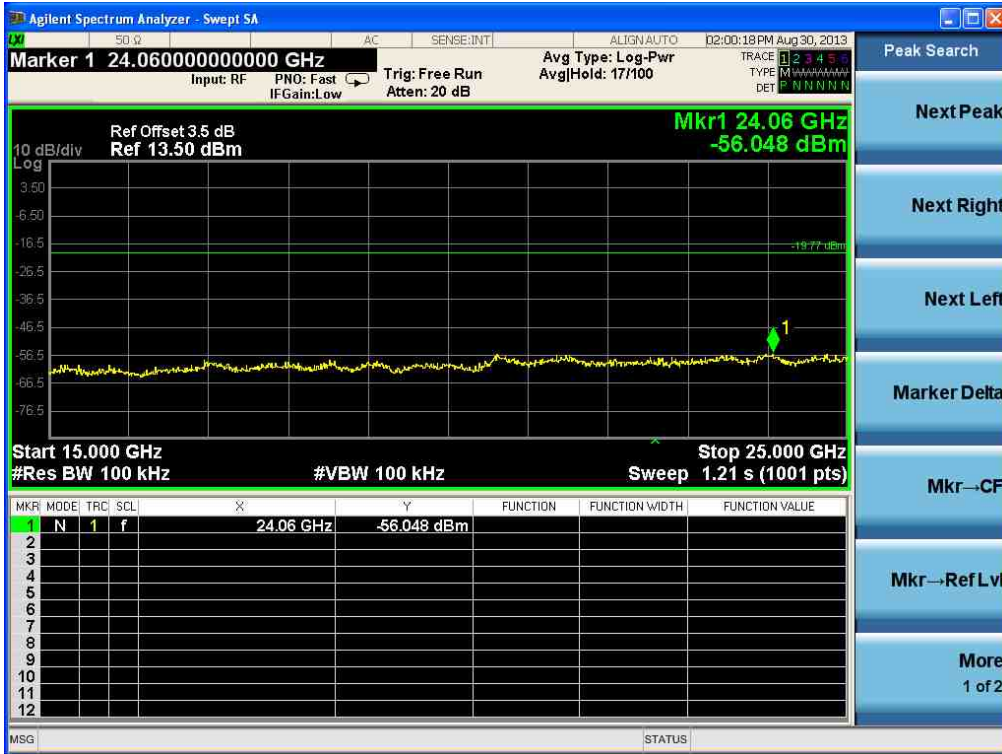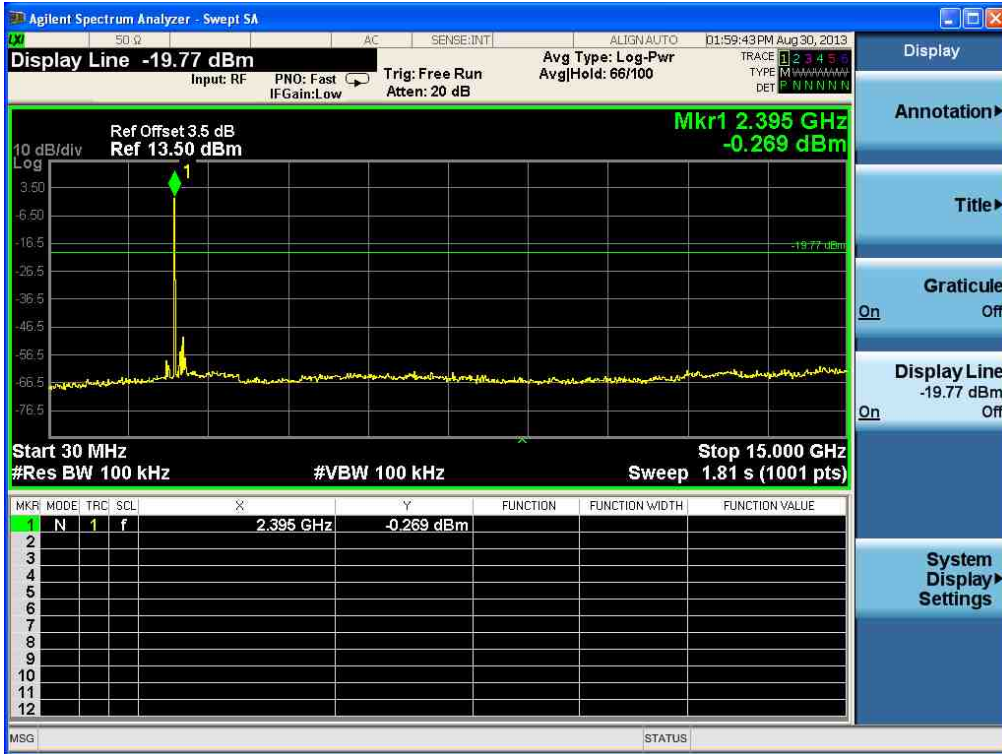





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band - edge (at 20 dB blow) - Mid channel Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic (GFSK : Worst-Case)

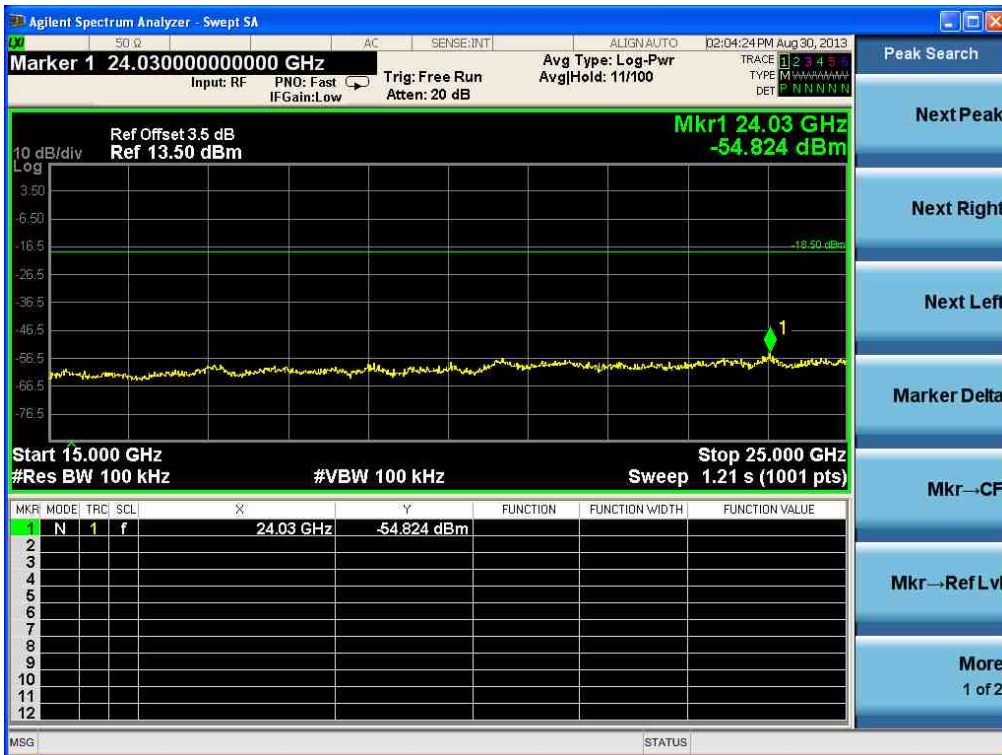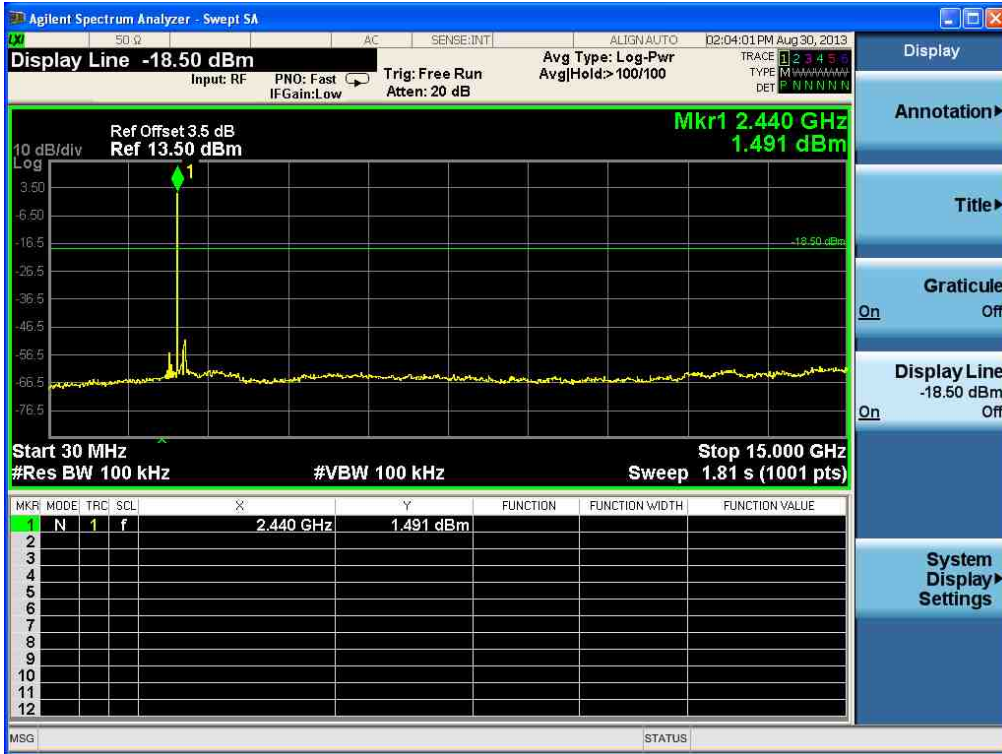





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic (GFSK : Worst-Case)

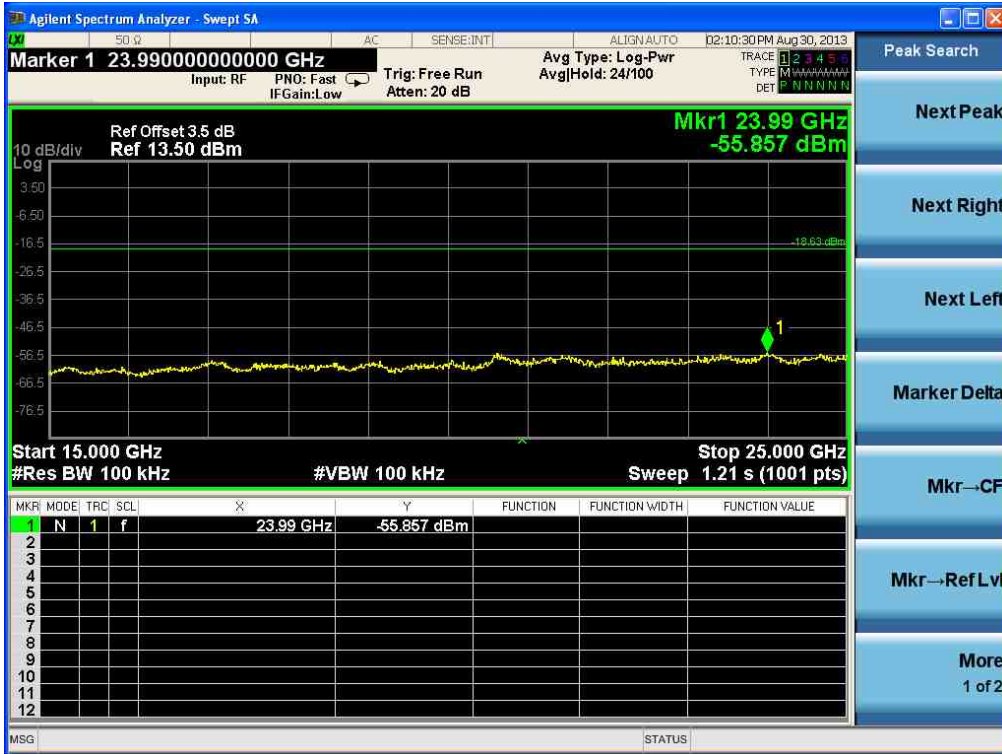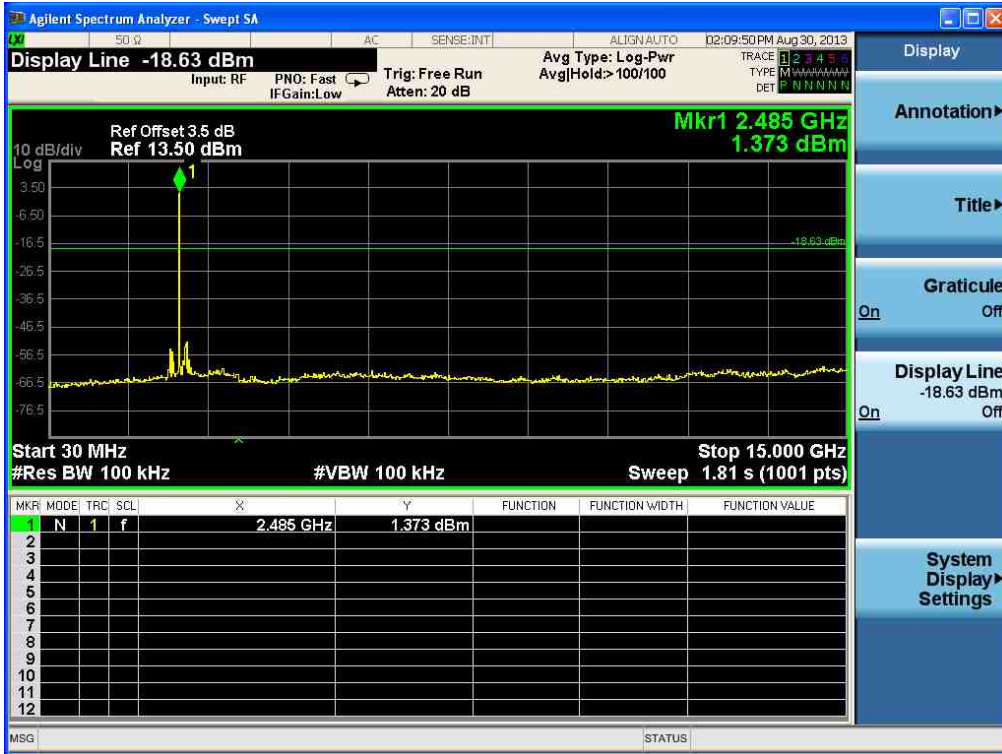





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band - edge (at 20 dB blow) - Low channel Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic (DQPSK : Worst-Case)

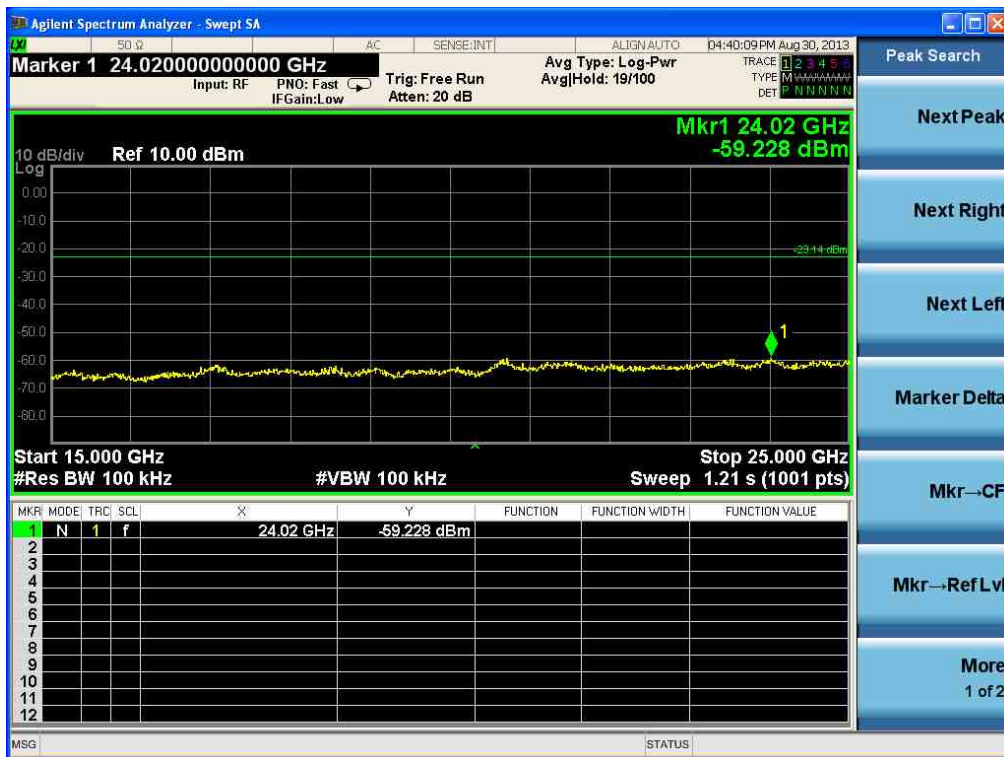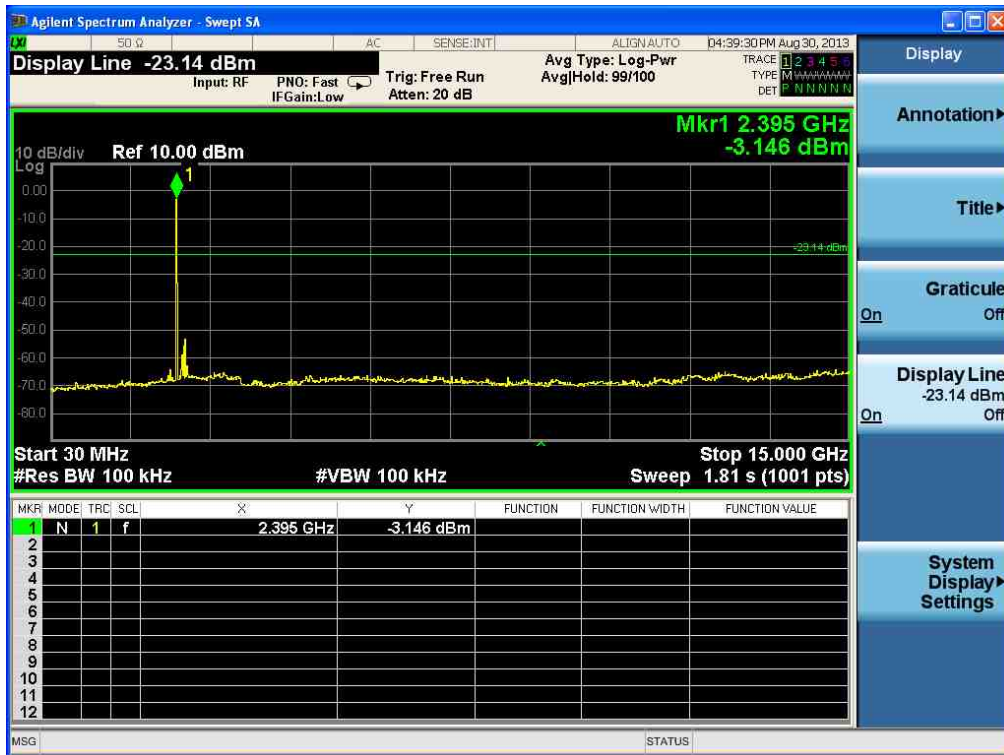




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band – edge (at 20 dB blow) – Mid channel Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic (DQPSK : Worst-Case)

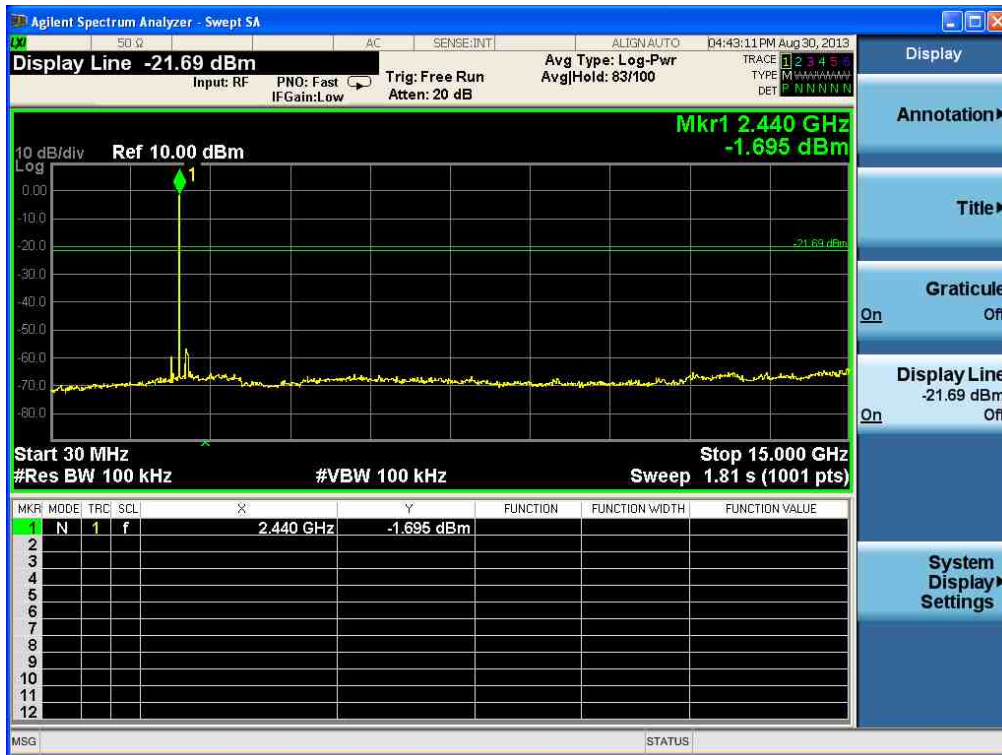





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic (DQPSK : Worst-Case)

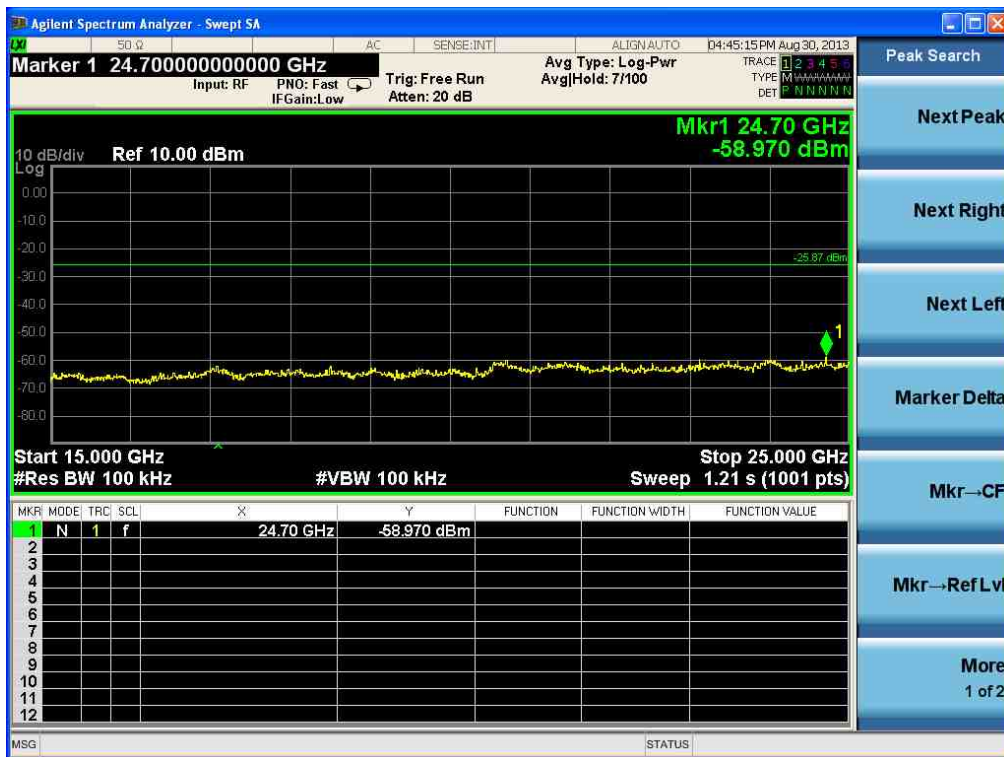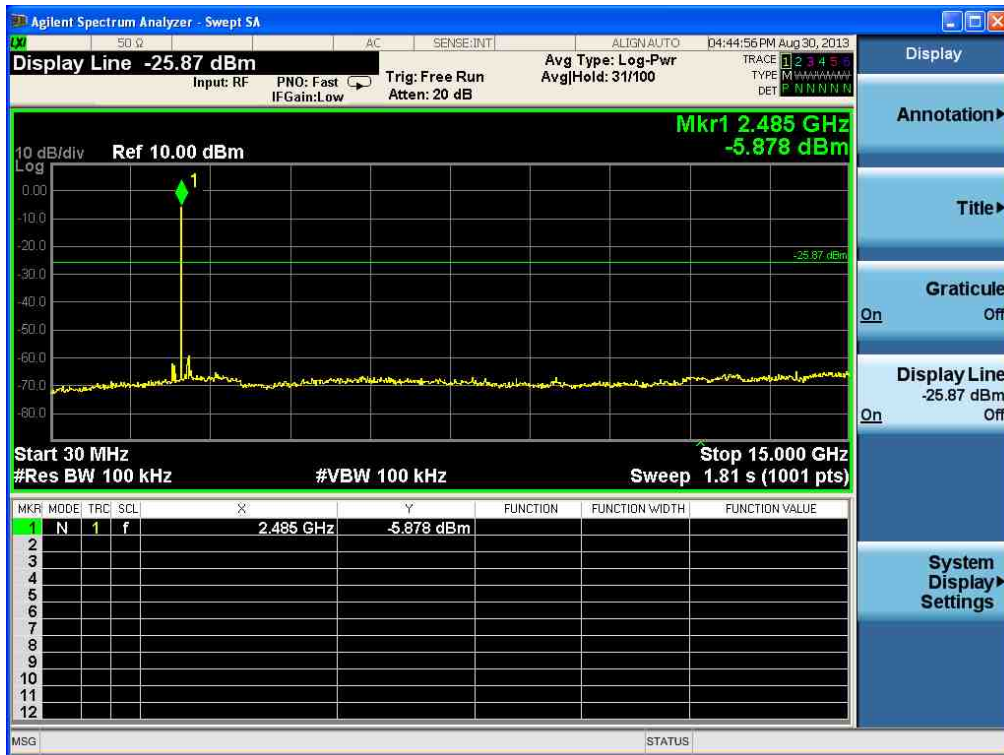





## 2.1.7 Field Strength of Emissions

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)  
 3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz

VBW  $\geq$  RBW

Sweep = auto

### Limit

#### - 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

## Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

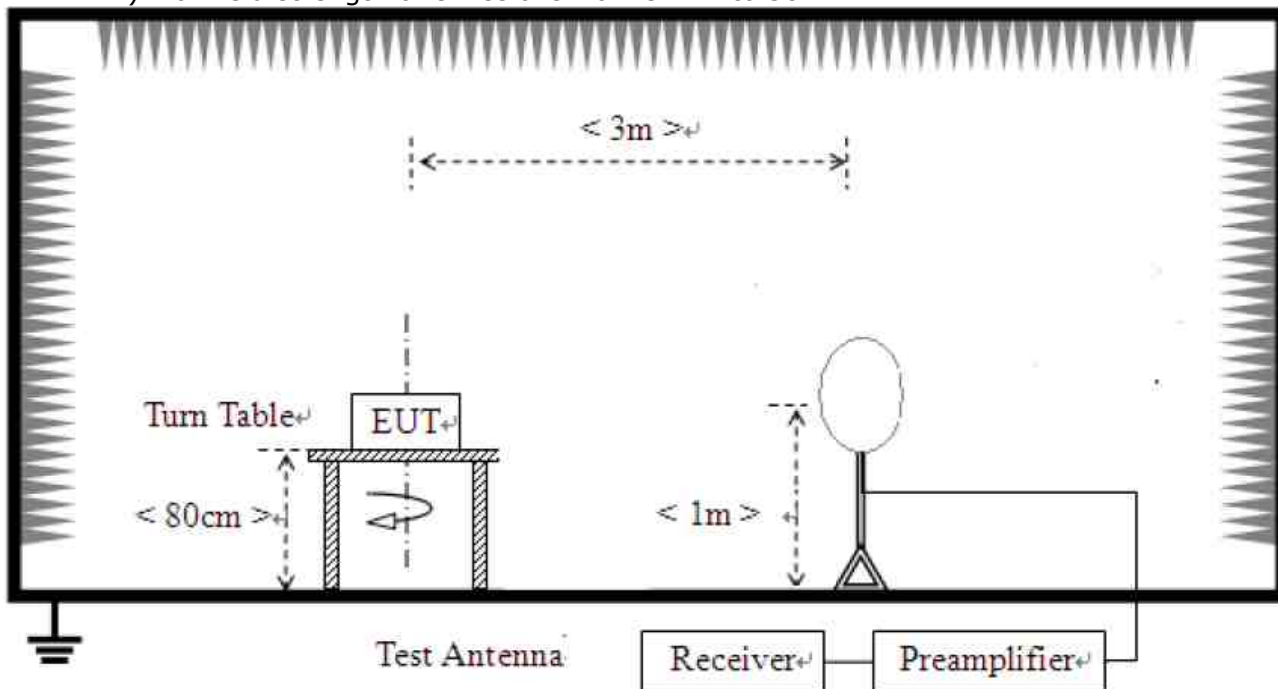

2) For field strength of emissions from 30 MHz to 1 GHz

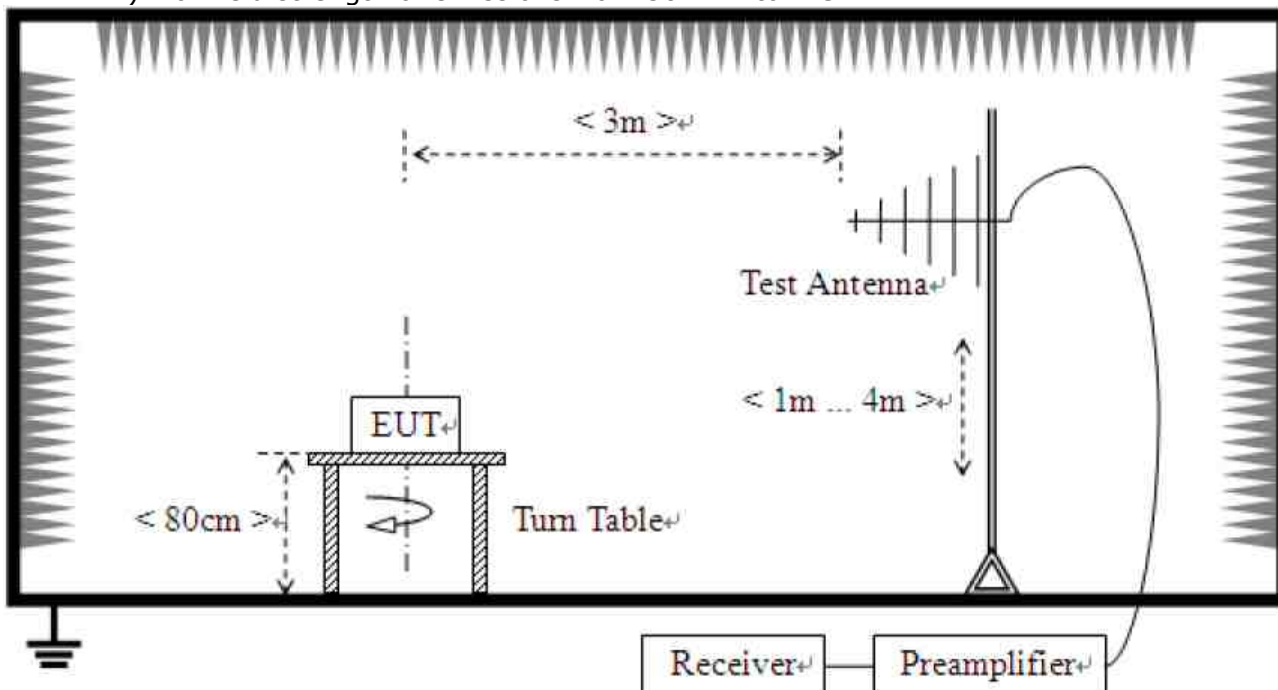

3) For field strength of emissions above 1 GHz

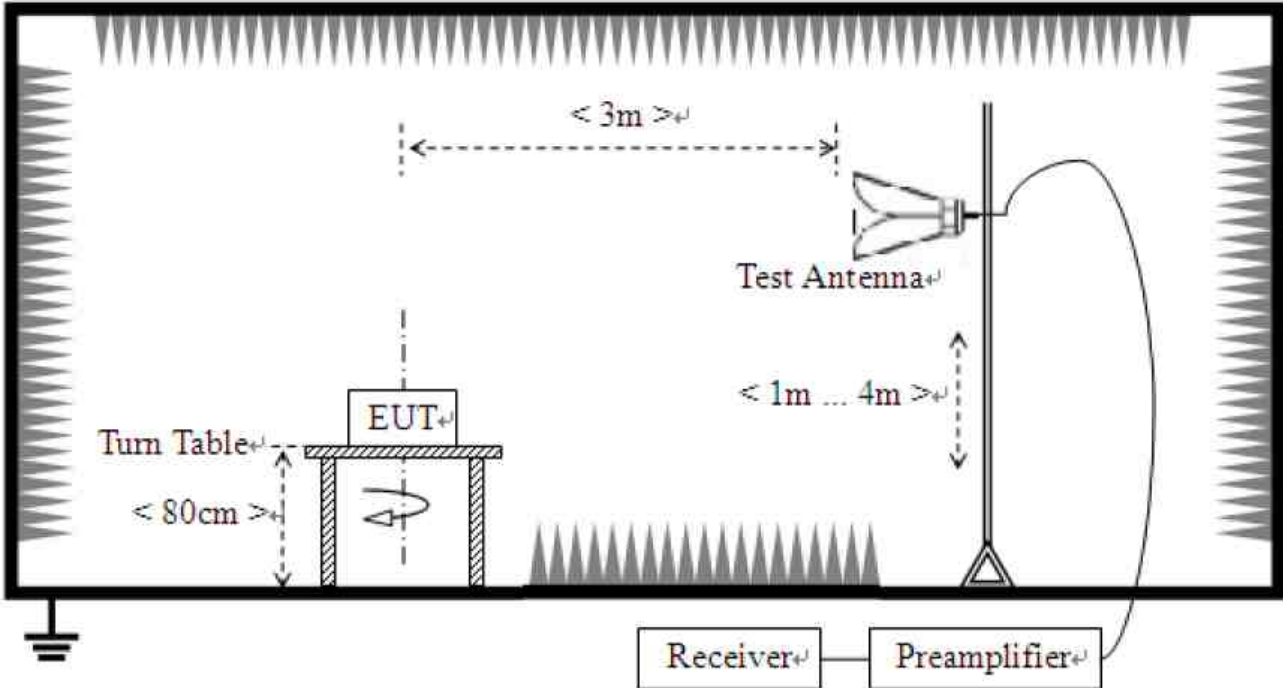

**Test Results**

**1) 9 kHz to 30 MHz**

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

**Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)**

EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	9 kHz – 30 MHz
Test mode	GFSK, DQPSK	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

**Note :**

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 2) 30 MHz to 1 GHz

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**


EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	Below 1000MHz
Test mode	GFSK	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

### Test Data

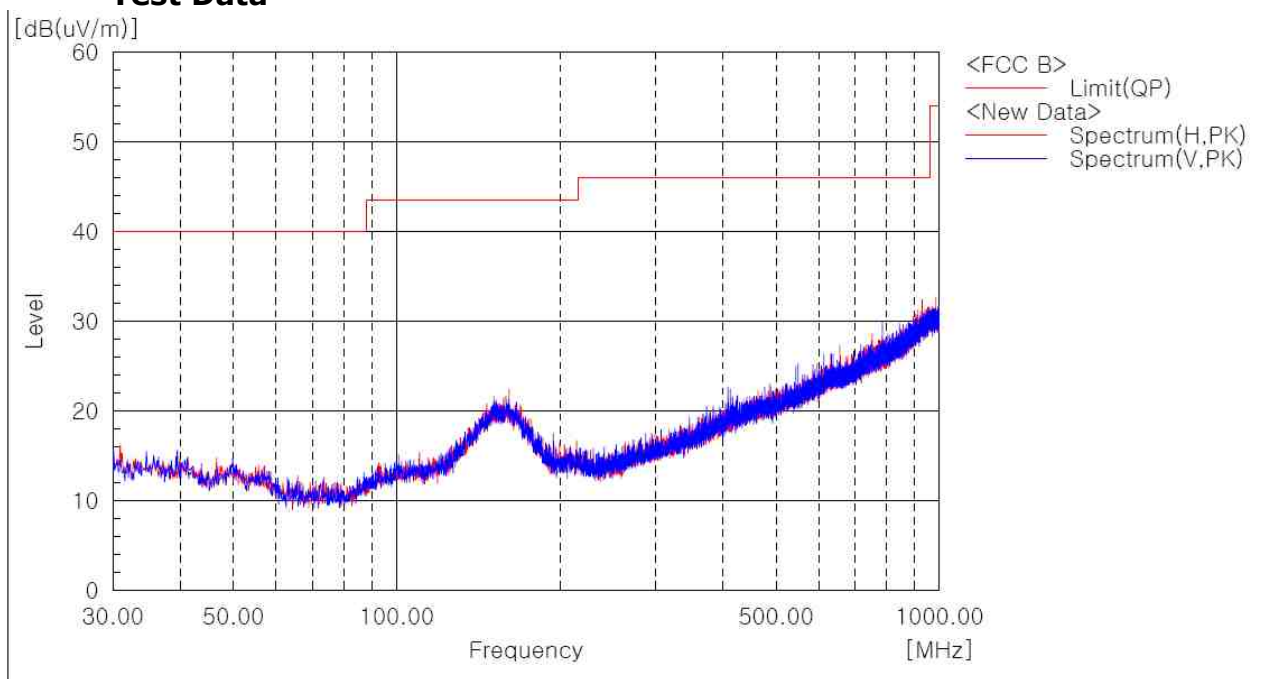

Spectrum Selection

No.	Frequency (P) [MHz]	Reading [dB(uV)]	c.f [dB(1/m)]	Height [cm]	Angle [deg]
-----	------------------------	---------------------	------------------	----------------	----------------

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(X axis) and the worst case was recorded.



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)


EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	Below 1000MHz
Test mode	DQPSK	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

### Test Data

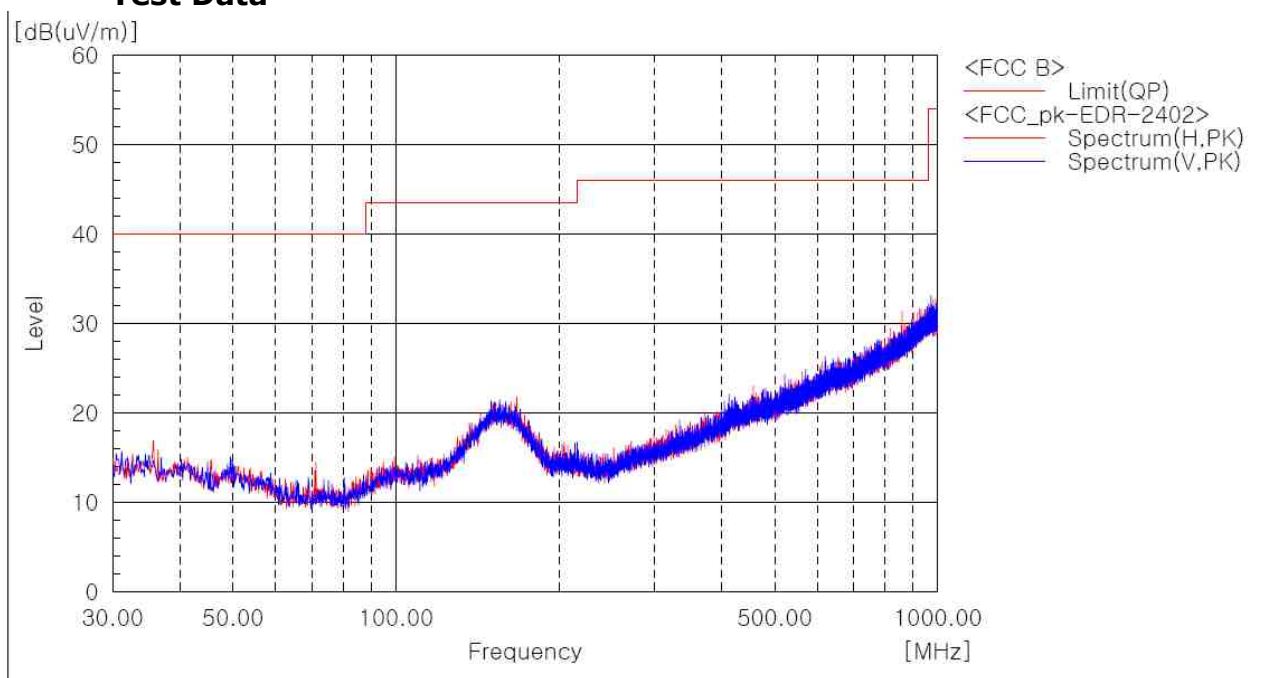

Spectrum Selection

No.	Frequency (P)	Reading	c.f	Height	Angle
	[MHz]	[dB(uV)]	[dB(1/m)]	[cm]	[deg]

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(X axis) and the worst case was recorded.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 3) above 1 GHz

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	1-25GHz
Channel	Low Channel	Detector function	Average / Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

## Test Data

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							

## Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							



CTK Co., Ltd.  
The First Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	1-25GHz
Channel	High Channel	Detector function	Average / Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

## Test Data

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV/Peak			Ant	CL+Amp	AV / Peak		AV / Peak		AV / Peak	
No emissions were detected at a level greater than 20dB below limit.											

## Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV/Peak			Ant	CL+Amp	AV / Peak		AV / Peak		AV / Peak	
2483.50	34.20	48.30	H	28.57	-23.49	54.00	74.00	39.28	53.38	14.72	20.62



CTK Co., Ltd.  
The First Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	1-25GHz
Channel	Low Channel	Detector function	Average / Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

## Test Data

Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							

## Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							





CTK Co., Ltd.  
The First Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	1-25GHz
Channel	High Channel	Detector function	Average / Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

## Test Data

Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak	
No emissions were detected at a level greater than 20dB below limit.										

## Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : DQPSK, CFG PKT Packet Type : 30 Packet Size : 679(2DH5)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor [dB]		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV	Peak		Ant	CL+Amp	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak	AV / Peak
2491.75	27.50	42.00	H	28.57	-23.49	54.00	74.00	32.58	47.08	21.42	26.92



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test Results

### 1) 9 kHz to 30 MHz

#### Test mode : Receiver

EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	9 kHz – 30 MHz
Test mode	DQPSK (Worst Case)	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

#### Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 2) 30 MHz to 1 GHz

### Test mode : Receiver


EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	Below 1000MHz
Test mode	DQPSK (Worst Case)	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
948.590	32.4	13.6	Quasi-Peak

### Test Data

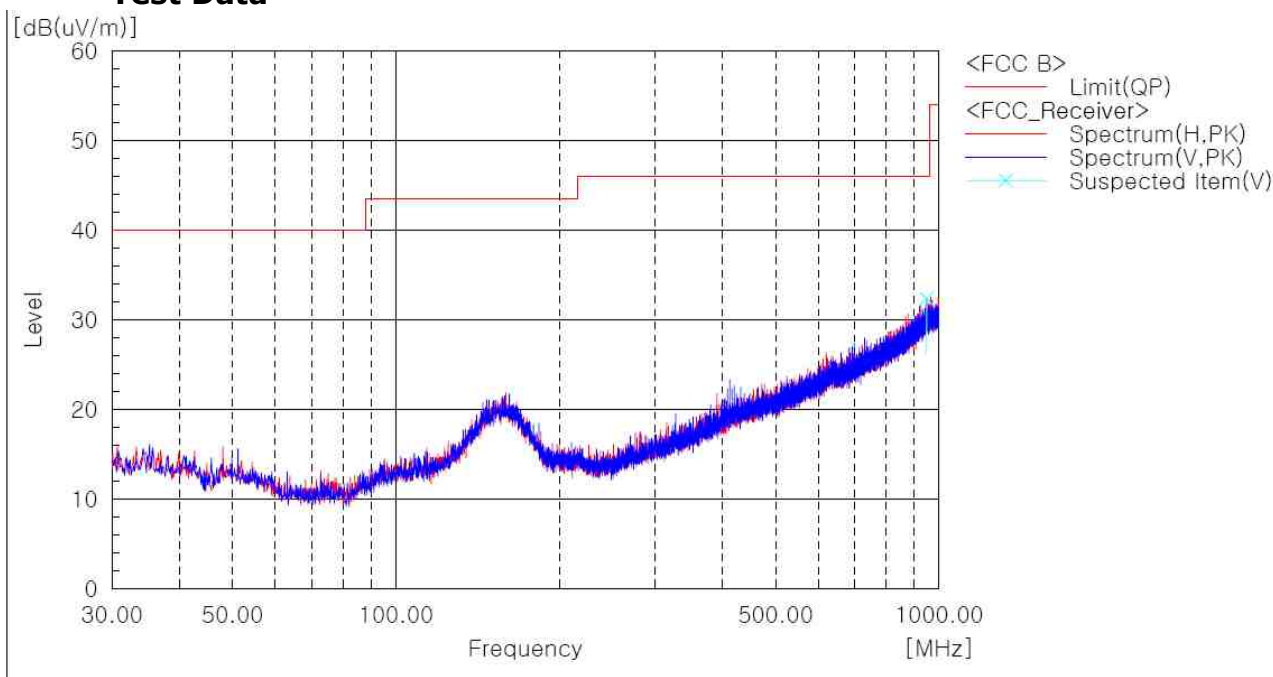

#### Spectrum Selection

No.	Frequency (P)	Reading	c.f	Result	Limit	Margin	Height	Angle
	[MHz]	[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]
1	948.590	V 28.2	4.2	32.4	46.0	13.6	100.0	70.0

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(X axis) and the worst case was recorded.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 3) above 1 GHz

### Test mode : Receiver

EUT	Wireless Headphones with Active Noise Cancelling	Measurement Detail	
Model	CHORD MS 530	Frequency Range	1-25GHz
Test mode	DQPSK (Worst Case)	Detector function	Average / Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

### Test Data

Test mode : DQPSK (Receiver)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							

### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Test mode : Test mode : DQPSK (Receiver)

Frequency [MHz]	Reading [dBuV/m] AV/Peak	Pol.	Correction Factor [dB]		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
			Ant	CL+Amp			
No emissions were detected at a level greater than 20dB below limit.							



## 2.1.8 AC Conducted Emissions

### Test Location

Shielded Room

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

#### - 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Results

The requirements are:

**Not Applicable**

#### Test mode :

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
			-



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

---

Test Data

[HOT]

Not Applicable

Not Applicable



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

---

[NEUTRAL]

Not Applicable

Not Applicable



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2012-11-08	2013-11-08
2	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2012-11-08	2013-11-08
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2012-12-14	2013-12-14
4	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2012-12-14	2013-12-14
5	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2012-06-11	2014-06-11
6	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2012-06-06	2014-06-06
7	Attenuator	HP	8498A	1801A06913	2012-11-09	2013-11-09
8	EPM Series Power Meter	HP	E4418A	GB38272734	2012-11-08	2013-11-08
9	Power Sensor	HP	8487A	3318A03524	2013-07-06	2014-07-06
10	Audio Analyzer	HP	8903B	2747A03432	2012-11-08	2013-11-08
11	ESG-D Series Signal Generator	Agilent	E4432B	US40054094	2012-11-08	2013-11-08
12	SYNTHESIZED SWEEPER	HP	8341B	2819A01563	2012-11-08	2013-11-08
13	Attenuator	HP	8494A	3308A33351	2012-11-09	2013-11-09
14	Temp&Humi Chamber	Kunpoong	JT-TH-556-1	9QE5-002	2013-01-16	2014-01-16
15	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2012-11-08	2013-11-08
16	Horn Antenna	ETS-Lindgren	3115	00078895	2013-02-28	2015-02-28
17	Horn Antenna	ETS-Lindgren	3116	00062916	2013-03-20	2015-03-20
18	Dipole Antenna	SCHWARZBECK	VHA 9103	VHA91032557	2011-11-04	2013-11-04
19	Dipole Antenna	SCHWARZBECK	UHA 9105	UHA91052417	2011-11-04	2013-11-04
20	OPT H64 AMPLIFIER	HP	8447F	3113A06814	2013-03-21	2014-03-21
21	PREAMPLIFIER	Agilent	8449B	3008A02307	2012-11-09	2013-11-09
22	Radio Communication Tester	Rohde & Schwarz	CMU200	106765	2013-02-04	2014-02-04
23	LISN	Rohde & Schwarz	ENV216	101235	2013-08-02	2014-08-02
24	LISN	Rohde & Schwarz	ENV216	101236	2013-08-02	2014-08-02
25	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2012-11-08	2013-11-08
26	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2013-02-04	2014-02-04
27	6dB Attenuator	R&S	DNF	272.4110.50	2012-11-09	2013-11-09
28	AMPLIFIER	Sonoma Instrument Co.	310	291721	2013-03-21	2014-03-21
29	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2013-06-27	2014-06-27
30	Signal Generator	Rohde & Schwarz	SMB100A	175528	2012-10-08	2013-10-08