



## FCC RADIO TEST REPORT

Applicant's company	LigoWave LLC
Applicant Address	138 Mountain Brook Dr Canton, GA 30115 United States
FCC ID	V2V-DLB29
Manufacturer's company	LigoWave LLC
Manufacturer Address	138 Mountain Brook Dr Canton, GA 30115 United States

Product Name	Broadband Digital Transmission System
Brand Name	LigoWave
Model No.	LigoDLB 2-9
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Sep. 20, 2014
Final Test Date	Jan. 06, 2015
Submission Type	Original Equipment

### Statement

**Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	8
3.8. Table for Parameters of Test Software Setting .....	9
3.9. EUT Operation during Test .....	9
3.10. Duty Cycle.....	9
3.11. Test Configurations .....	10
<b>4. TEST RESULT .....</b>	<b>12</b>
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Maximum Conducted Output Power Measurement.....	16
4.3. Power Spectral Density Measurement .....	20
4.4. 6dB Spectrum Bandwidth Measurement .....	28
4.5. Radiated Emissions Measurement.....	34
4.6. Emissions Measurement.....	53
4.7. Antenna Requirements .....	71
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>72</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>74</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A6</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>



## History of This Test Report



## 1. VERIFICATION OF COMPLIANCE

Product Name : Broadband Digital Transmission System  
Brand Name : LigoWave  
Model No. : LigoDLB 2-9  
Applicant : LigoWave LLC  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 20, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen".

Sam Chen  
SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	15.76 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power (Peak)	Complies	0.02 dB
4.3	15.247(e)	Power Spectral Density	Complies	3.67 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.79 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.09 dB
4.7	15.203	Antenna Requirements	Complies	-

Note: The test configuration is requested by the customer as below:

The RJ-45 cable (1.5m and 10m, shielded) which will not sell with the EUT links with the PoE and the remote notebook.

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (HT20): 17.83 MHz ; MCS0 (HT40): 36.47 MHz
Maximum Conducted Output Power (Peak)	MCS0 (HT20): 26.94 dBm ; MCS0 (HT40): 26.57 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### IEEE 802.11b/g

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 13.14 MHz ; 11g: 16.67 MHz
Maximum Conducted Output Power (Peak)	11b: 24.29 dBm ; 11g: 26.98 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

**Antenna and Band width**

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

**IEEE 11n Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
 Then EUT support HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

### 3.2. Accessories

Power	Brand	Model	Rating
PoE	deliberant	AY012E-ZF243	Input: 100-240VAC, 50/60Hz, 0.5A Output: 24VDC, 0.5A
<b>Others</b>			
FCC Power Cable*1, Non-Shielded, 0.7m			


### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Deliberant	FWA23	PIFA	N/A	9

Note: The EUT has two antennas (2TX, 2RX).

Chain 1 and Chain 2 can be used as transmitting/receiving antennas.

Chain 1 and Chain 2 will transmit/receive the same signal simultaneously.

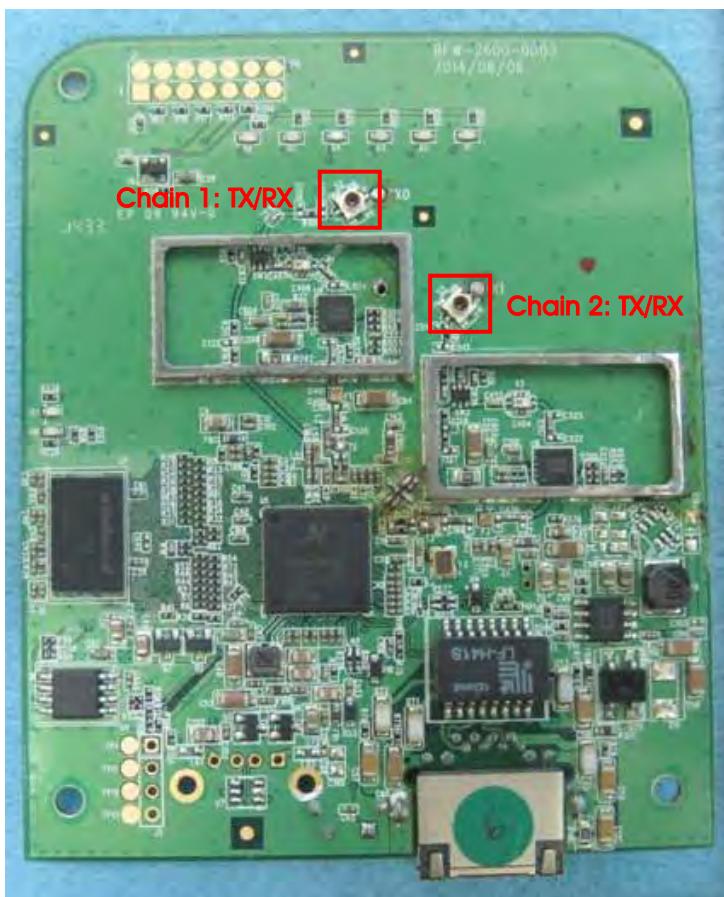

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	802.11n HT20	MCS0	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	802.11n HT20	MCS0	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
6dB Spectrum Bandwidth	802.11n HT20	MCS0	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	802.11n HT20	MCS0	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	802.11n HT20	MCS0	1/6/11	1+2
	802.11n HT40	MCS0	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	M1340	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11n

Test Software Version	ART2-GUI Version:2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	12	13.5	14.5
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	10	11.5	12

#### Power Parameters of IEEE 802.11b/g

Test Software Version	ART2-GUI Version:2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	17	19	15.5
IEEE 802.11g	11.5	12.5	13.5

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11n MCS0 HT20	1.268	1.324	95.77%	0.19	0.79
802.11n MCS0 HT40	0.632	0.665	95.04%	0.22	1.58
802.11b	1.000	1.000	100.00%	0.00	0.01
802.11g	1.350	1.410	95.74%	0.19	0.74


### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

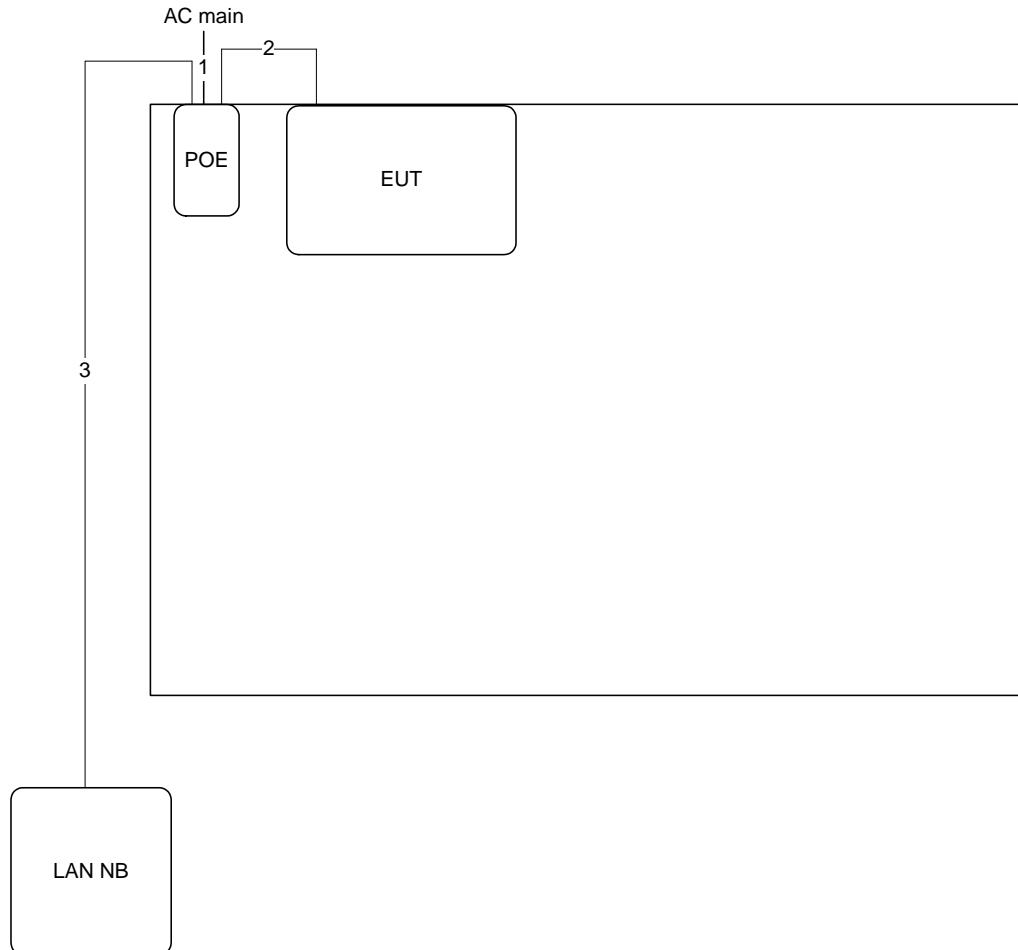

Item	Connection	Shielded	Length
1	Power cable	No	0.7m
2	RJ-45 cable	Yes	1.5m
3	RJ-45 cable	Yes	10m

### 3.11.2. Radiation Emissions Test Configuration

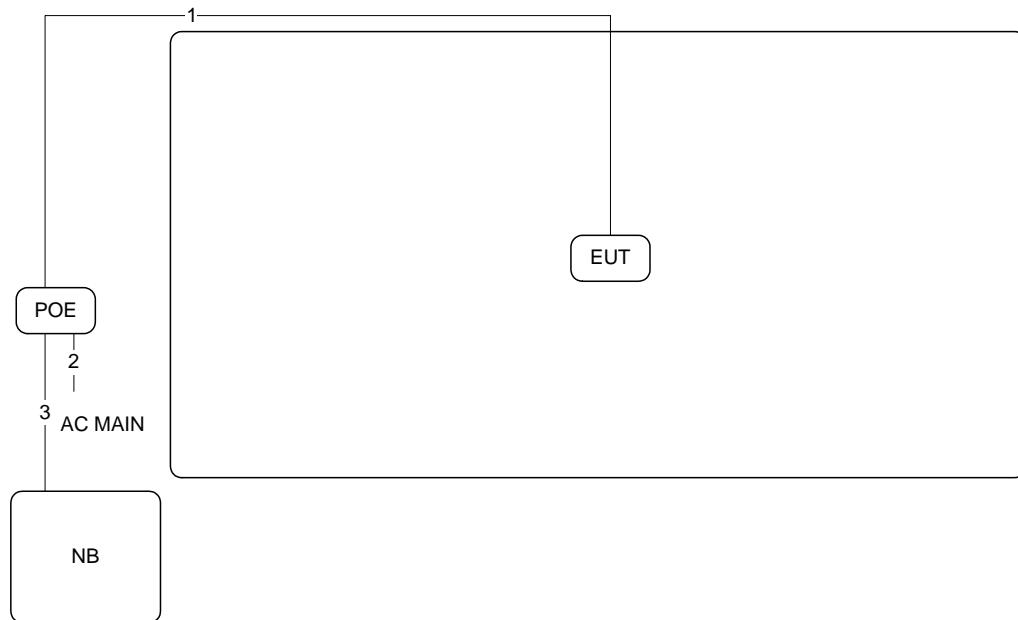

Item	Connection	Shielded	Length
1	RJ-45 cable	Yes	1.5m
2	Power cable	No	0.7m
3	RJ-45 cable	Yes	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

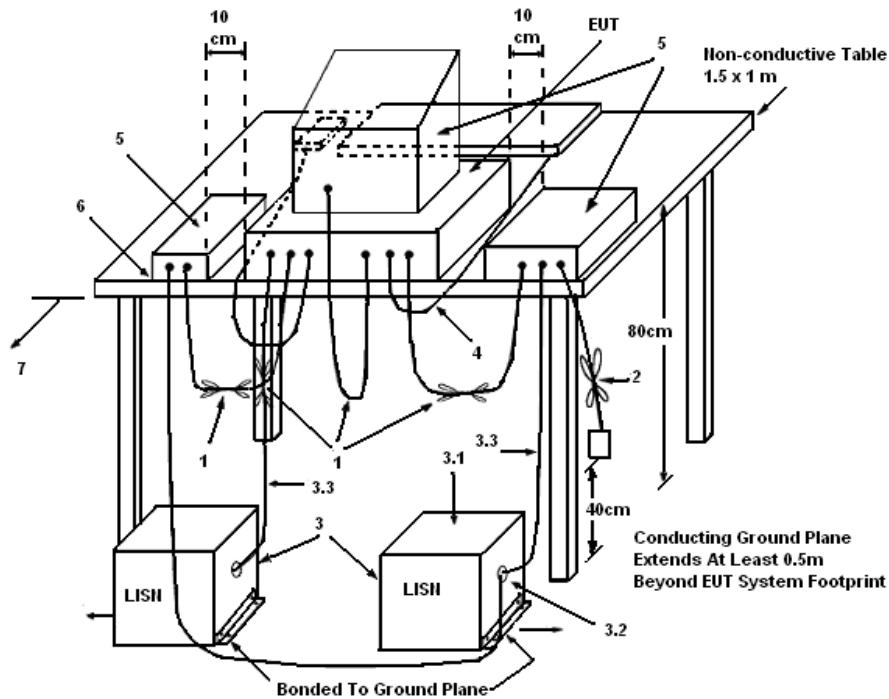

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	56%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX		

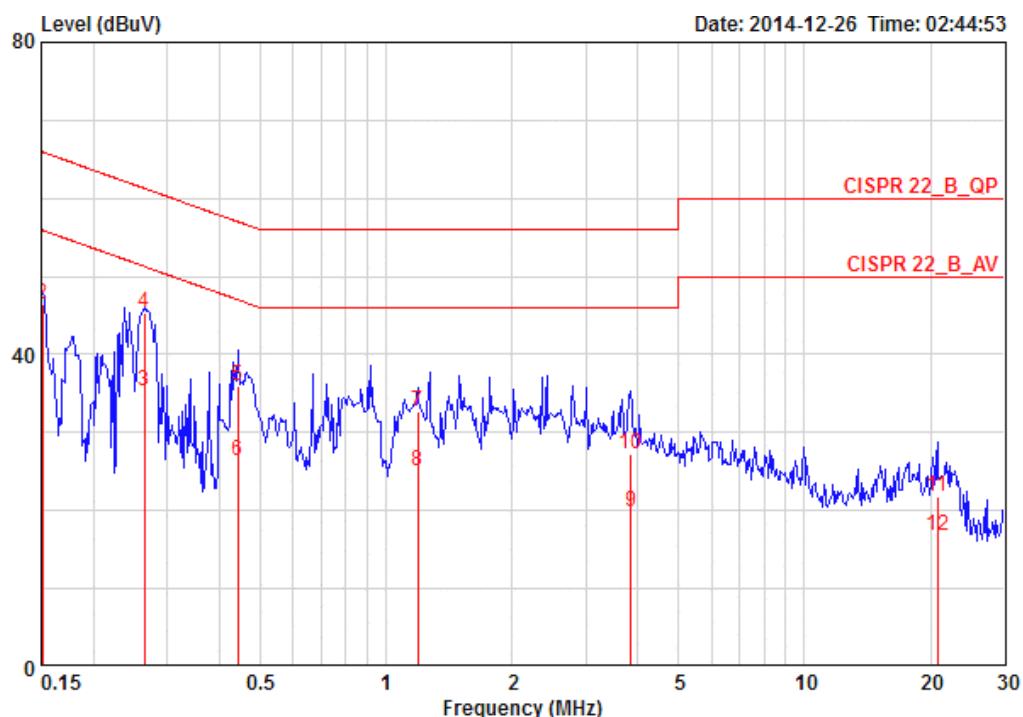

Freq	Level	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
		Line	Line	Level	Factor	Loss		
MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1.0	0.15080	35.75	-20.21	55.96	25.82	9.77	0.16 AVERAGE	LINE
2.0	0.15080	46.39	-19.57	65.96	36.46	9.77	0.16 QP	LINE
3.0	0.26442	35.35	-15.94	51.29	25.40	9.78	0.17 AVERAGE	LINE
4.0	0.26442	45.41	-15.88	61.29	35.46	9.78	0.17 QP	LINE
5.0	0.44208	35.89	-21.13	57.02	25.94	9.77	0.18 QP	LINE
6.0	0.44208	26.43	-20.59	47.02	16.48	9.77	0.18 AVERAGE	LINE
7.0	1.191	32.66	-23.34	56.00	22.68	9.77	0.21 QP	LINE
8.0	1.191	24.99	-21.01	46.00	15.01	9.77	0.21 AVERAGE	LINE
9.0	3.840	19.77	-26.23	46.00	9.76	9.71	0.30 AVERAGE	LINE
10.0	3.840	27.17	-28.83	56.00	17.16	9.71	0.30 QP	LINE
11.0	20.814	21.74	-38.26	60.00	11.78	9.44	0.52 QP	LINE
12.0	20.814	16.68	-33.32	50.00	6.72	9.44	0.52 AVERAGE	LINE

Temperature	24°C	Humidity	56%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX		

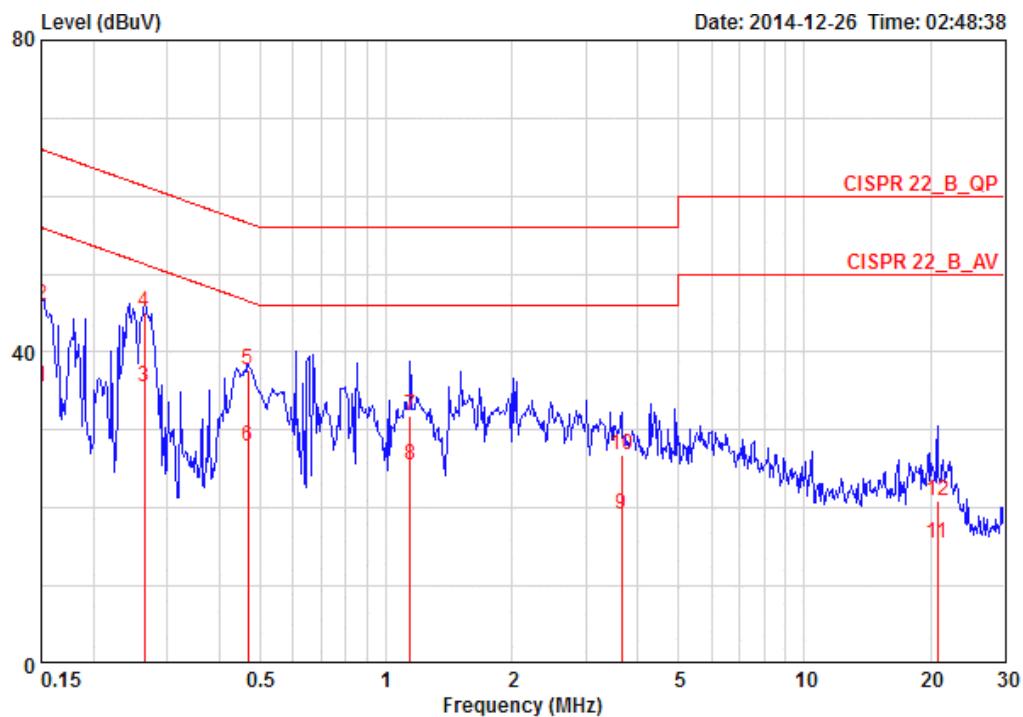

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase
		Line	dBuV	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 0	0.15000	35.61	-20.39	56.00	25.53	9.92	0.16 AVERAGE NEUTRAL
2 0	0.15000	45.96	-20.04	66.00	35.88	9.92	0.16 QP NEUTRAL
3 0	0.26442	35.53	-15.76	51.29	25.44	9.92	0.17 AVERAGE NEUTRAL
4 0	0.26442	45.13	-16.16	61.29	35.04	9.92	0.17 QP NEUTRAL
5 0	0.46861	37.72	-18.82	56.54	27.62	9.91	0.18 QP NEUTRAL
6 0	0.46861	27.98	-18.56	46.54	17.88	9.91	0.18 AVERAGE NEUTRAL
7	1.141	31.73	-24.27	56.00	21.60	9.92	0.21 QP NEUTRAL
8 0	1.141	25.53	-20.47	46.00	15.40	9.92	0.21 AVERAGE NEUTRAL
9	3.661	19.25	-26.75	46.00	9.09	9.87	0.29 AVERAGE NEUTRAL
10	3.661	26.74	-29.26	56.00	16.58	9.87	0.29 QP NEUTRAL
11	20.814	15.55	-34.45	50.00	5.32	9.71	0.52 AVERAGE NEUTRAL
12	20.814	21.01	-38.99	60.00	10.78	9.71	0.52 QP NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak and Average

### 4.2.3. Test Procedures


#### For Peak Output Power:

1. Test procedures refer KDB 558074 D01 v03r02 section 9.1.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
4. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### For Average Output Power:

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

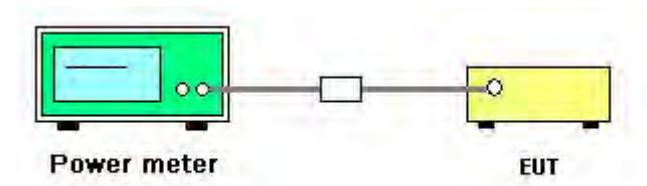

#### **4.2.5. Test Deviation**

There is no deviation with the original standard.

#### **4.2.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n
Test Date	Oct. 29, 2014		

##### Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Conducted Peak Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	24.16	23.68	26.94	27.00	Complies
6	2437 MHz	24.33	23.37	26.89	27.00	Complies
11	2462 MHz	24.29	23.41	26.88	27.00	Complies

Channel	Frequency	Conducted Average Power (dBm)			Result
		Chain 1	Chain 2	Total	
1	2412 MHz	14.31	13.68	17.02	Complies
6	2437 MHz	14.47	13.96	17.23	Complies
11	2462 MHz	14.44	13.61	17.06	Complies

Note: Antenna gain=9dBi>6dBi, so limit=30-(9-6)=27dBm

##### Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Conducted Peak Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
3	2422 MHz	24.83	21.66	26.54	27.00	Complies
6	2437 MHz	24.72	21.97	26.57	27.00	Complies
9	2452 MHz	24.13	22.29	26.32	27.00	Complies

Channel	Frequency	Conducted Average Power (dBm)			Result
		Chain 1	Chain 2	Total	
3	2422 MHz	14.08	13.15	16.65	Complies
6	2437 MHz	13.96	13.22	16.62	Complies
9	2452 MHz	13.73	13.48	16.62	Complies

Note: Antenna gain=9dBi>6dBi, so limit=30-(9-6)=27dBm

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b/g
Test Date	Oct. 29, 2014		

**Configuration IEEE 802.11b**

Channel	Frequency	Conducted Peak Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	21.31	20.56	23.96	27.00	Complies
6	2437 MHz	20.88	21.64	24.29	27.00	Complies
11	2462 MHz	16.54	16.57	19.57	27.00	Complies

Channel	Frequency	Conducted Average Power (dBm)			Result
		Chain 1	Chain 2	Total	
1	2412 MHz	18.02	17.78	20.91	Complies
6	2437 MHz	18.25	19.41	21.88	Complies
11	2462 MHz	13.58	14.71	17.19	Complies

Note: Antenna gain=9dBi>6dBi, so limit=30-(9-6)=27dBm

**Configuration IEEE 802.11g**

Channel	Frequency	Conducted Peak Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	24.22	23.71	26.98	27.00	Complies
6	2437 MHz	23.78	23.67	26.74	27.00	Complies
11	2462 MHz	23.85	23.62	26.75	27.00	Complies

Channel	Frequency	Conducted Average Power (dBm)			Result
		Chain 1	Chain 2	Total	
1	2412 MHz	14.94	14.71	17.84	Complies
6	2437 MHz	14.35	13.99	17.18	Complies
11	2462 MHz	14.31	14.18	17.26	Complies

Note: Antenna gain=9dBi>6dBi, so limit=30-(9-6)=27dBm

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

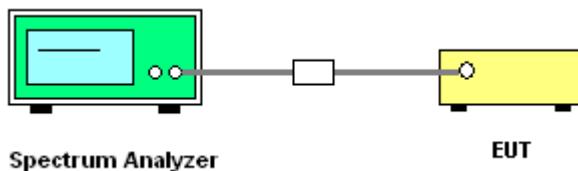

#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

##### Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-7.17	-9.37	-5.12	1.99	Complies
6	2437 MHz	-8.79	-9.36	-6.06	1.99	Complies
11	2462 MHz	-8.54	-8.66	-5.59	1.99	Complies

Note: 
$$\text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=0}^{N_{\text{ant}}} \left\{ \sum_{k=1}^{N_{\text{ant}}} R_{j,k} \right\}^2}{N_{\text{ant}}} \right] = 12.01 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 8 - (12.01 - 6) = 1.99 \text{ dBm/3kHz}$$

##### Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
3	2422 MHz	-11.92	-13.60	-9.67	1.99	Complies
6	2437 MHz	-12.49	-12.63	-9.55	1.99	Complies
9	2452 MHz	-11.45	-13.40	-9.31	1.99	Complies

Note: 
$$\text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=0}^{N_{\text{ant}}} \left\{ \sum_{k=1}^{N_{\text{ant}}} R_{j,k} \right\}^2}{N_{\text{ant}}} \right] = 12.01 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 8 - (12.01 - 6) = 1.99 \text{ dBm/3kHz}$$

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b/g

**Configuration IEEE 802.11b**

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-5.86	-6.25	-3.04	1.99	Complies
6	2437 MHz	-5.55	-3.97	-1.68	1.99	Complies
11	2462 MHz	-10.85	-9.45	-7.08	1.99	Complies

Note: 
$$\text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{\text{ant}}} \left\{ \sum_{k=1}^{N_{\text{rx}}} R_{j,k} \right\}^2}{N_{\text{ant}}} \right] = 12.01 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 8 - (12.01 - 6) = 1.99 \text{ dBm/3kHz}$$

**Configuration IEEE 802.11g**


Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
1	2412 MHz	-7.58	-7.06	-4.30	1.99	Complies
6	2437 MHz	-8.52	-8.05	-5.27	1.99	Complies
11	2462 MHz	-9.53	-8.86	-6.17	1.99	Complies

Note: 
$$\text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{\text{ant}}} \left\{ \sum_{k=1}^{N_{\text{rx}}} R_{j,k} \right\}^2}{N_{\text{ant}}} \right] = 12.01 \text{ dBi} > 6 \text{ dBi}, \text{ so limit} = 8 - (12.01 - 6) = 1.99 \text{ dBm/3kHz}$$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

### Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1

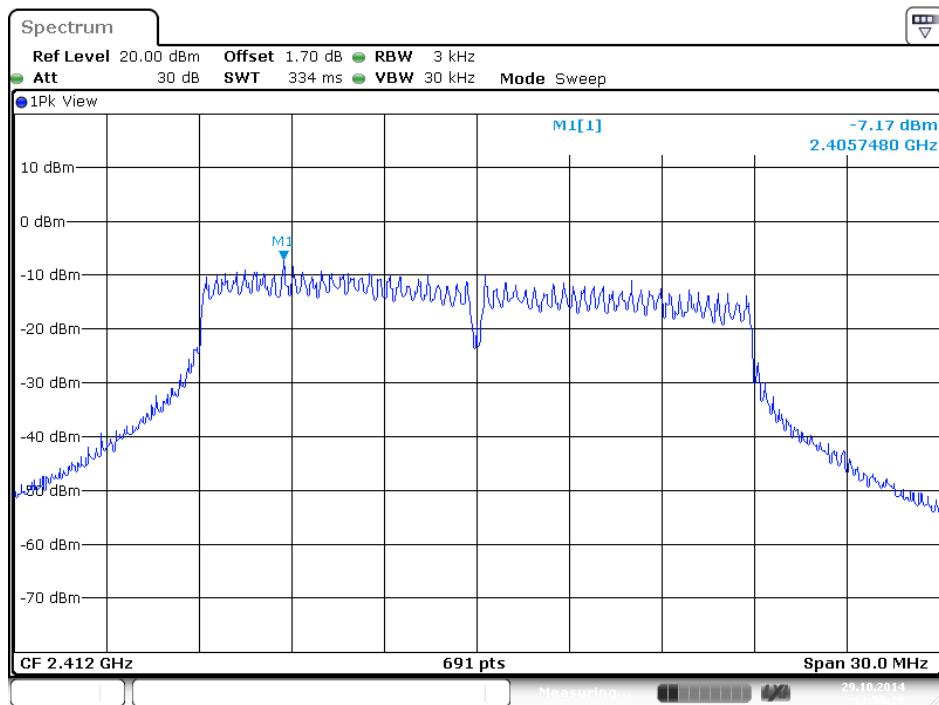


Date : 29.0 CT.2014 13:50:29

### Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 2

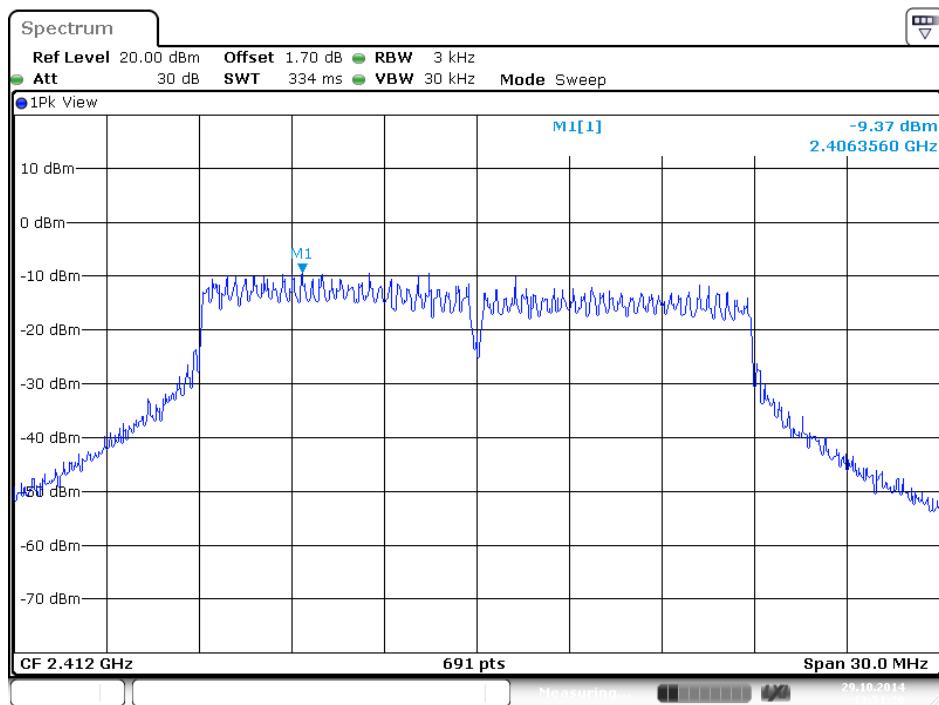


Date : 29.0 CT.2014 13:51:19

### Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2452 MHz / Chain 1

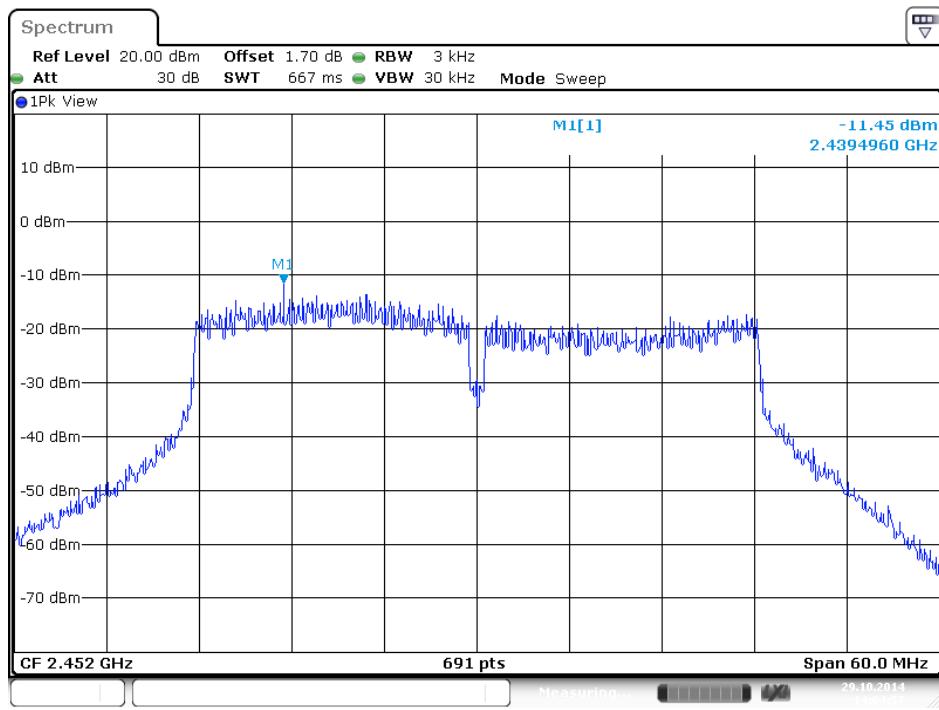


Date : 29.0 CT.2014 14:04:58

### Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2452 MHz / Chain 2

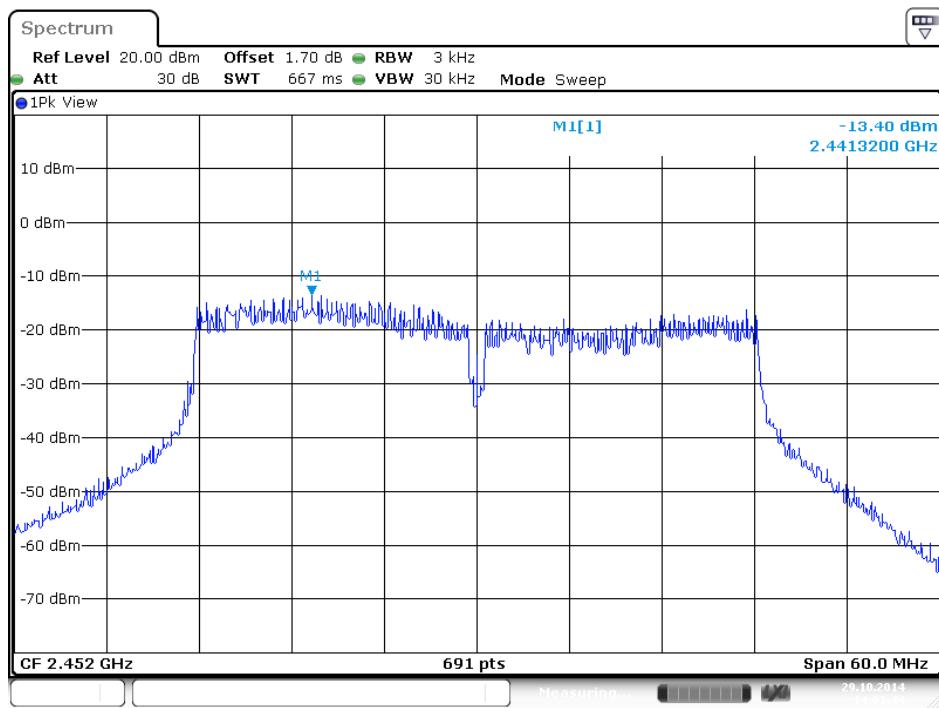


Date : 29.0 CT.2014 14:03:44

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

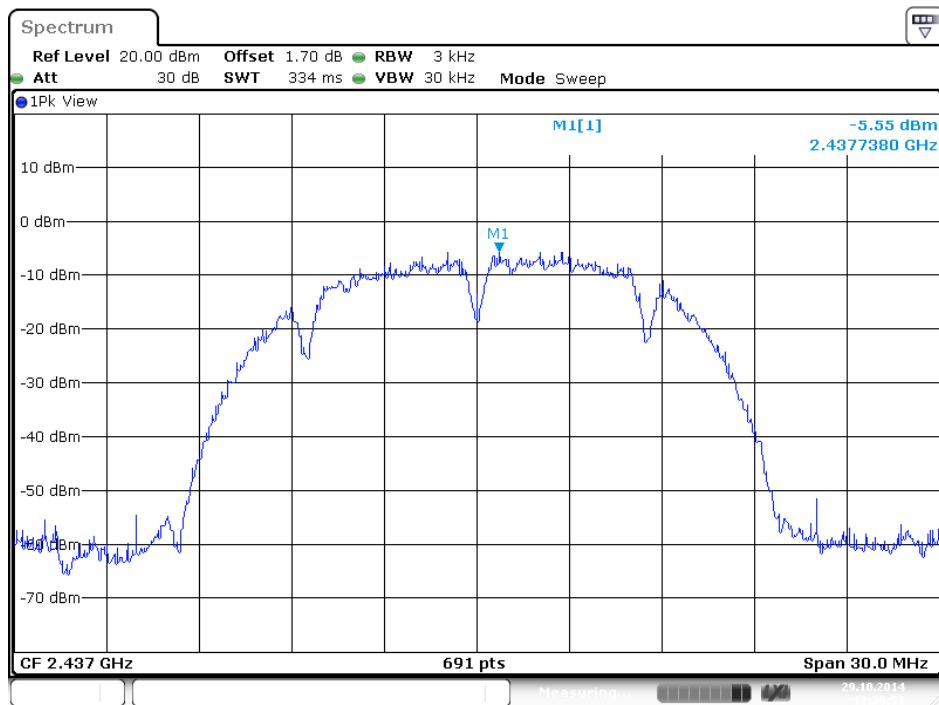


Date : 29.0 CT.2014 13:39:51

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

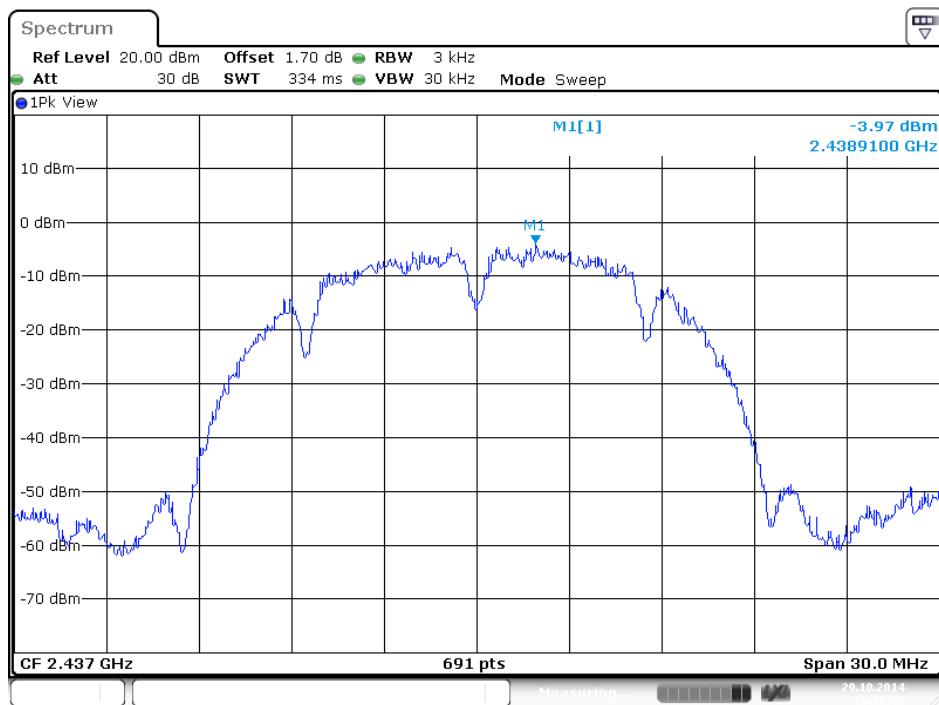


Date : 29.0 CT.2014 13:39:08

### Power Density Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1

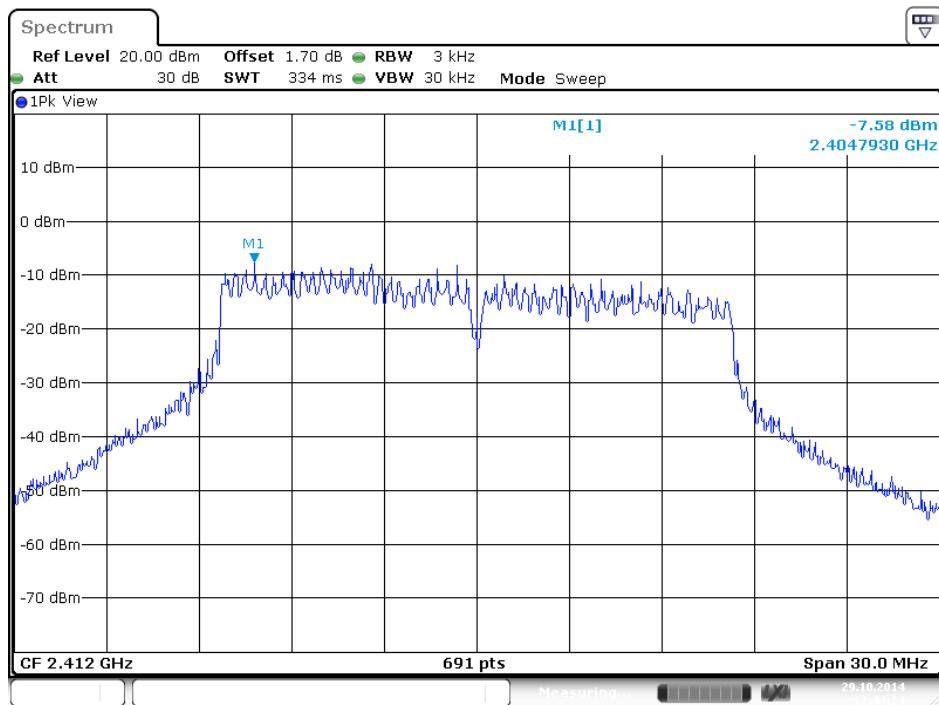

Date : 29.0 CT.2014 13:44:24

### Power Density Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 2

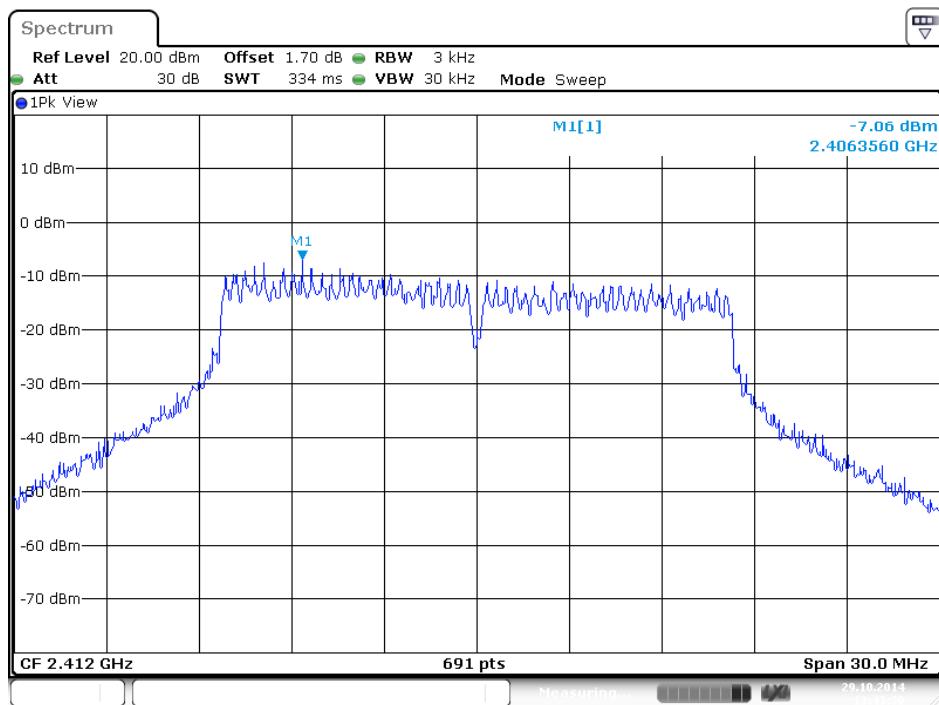

Date : 29.0 CT.2014 13:43:30

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

#### For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

#### For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

## 4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n

## Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	13.86	17.37	500	Complies
6	2437 MHz	15.71	17.77	500	Complies
11	2462 MHz	16.64	17.83	500	Complies

## Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.83	36.47	500	Complies
6	2437 MHz	35.01	36.24	500	Complies
9	2452 MHz	35.83	36.35	500	Complies

Temperature	24°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b/g

**Configuration IEEE 802.11b / Chain 1 + Chain 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.51	13.14	500	Complies
6	2437 MHz	8.52	12.04	500	Complies
11	2462 MHz	9.04	12.50	500	Complies


**Configuration IEEE 802.11g / Chain 1 + Chain 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.77	16.56	500	Complies
6	2437 MHz	15.71	16.56	500	Complies
11	2462 MHz	16.12	16.67	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1 + Chain 2

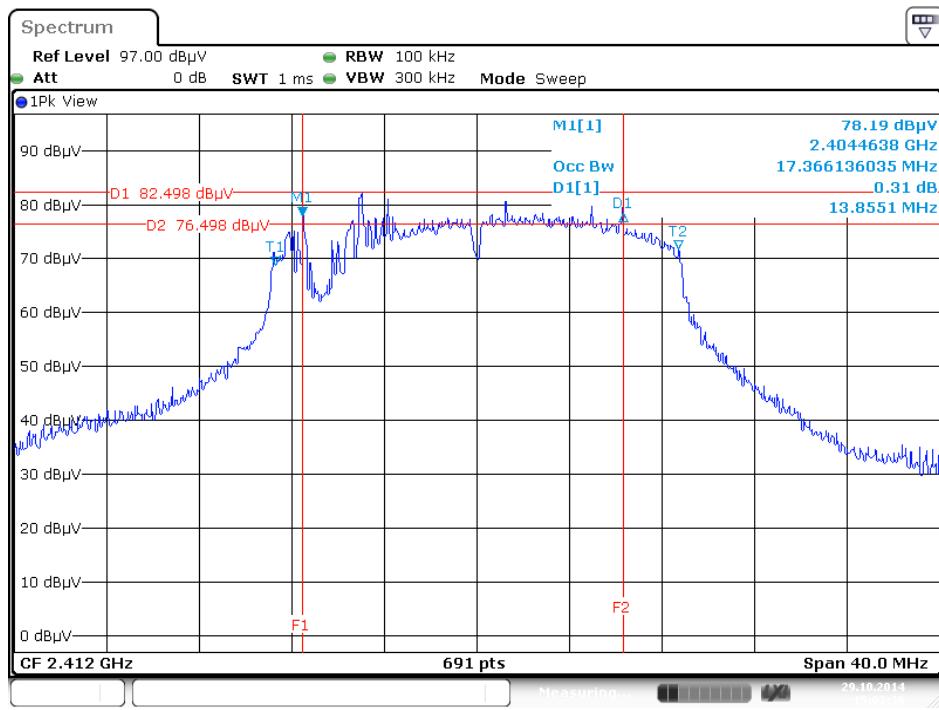


Date : 29.0 CT.2014 15:03:37

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2

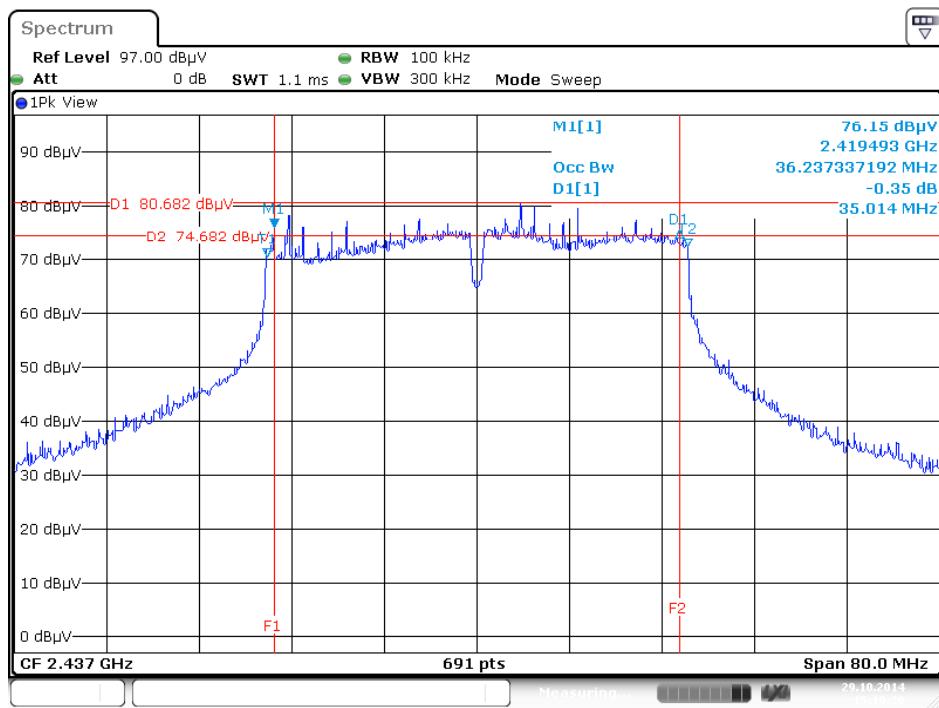


Date : 29.0 CT.2014 15:10:20

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2

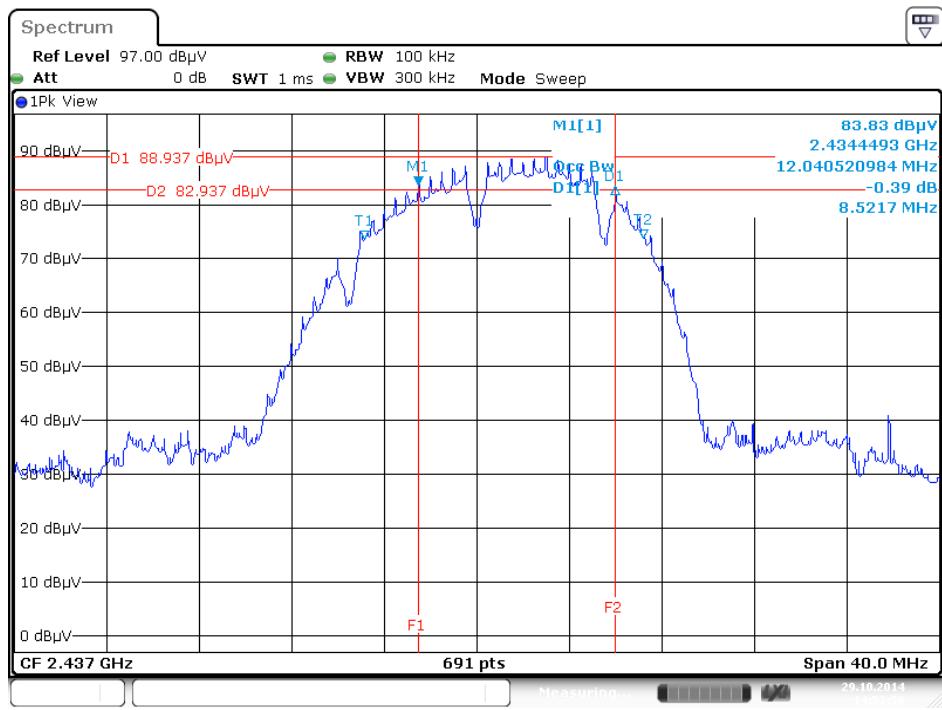

Date: 29.OCT.2014 14:53:59

## 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2

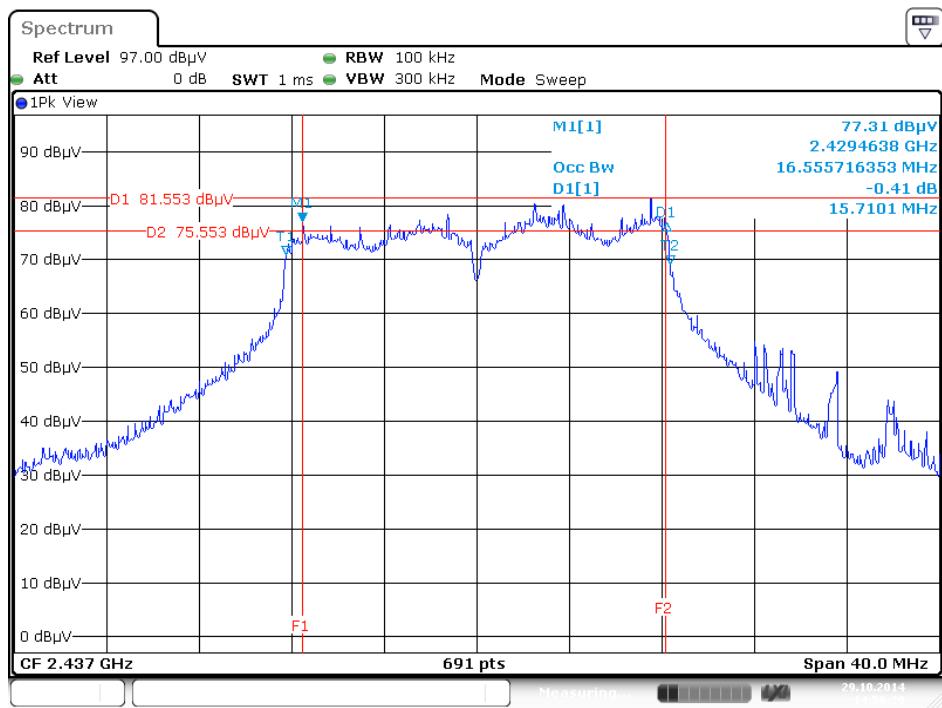

Date: 29.OCT.2014 14:59:29

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

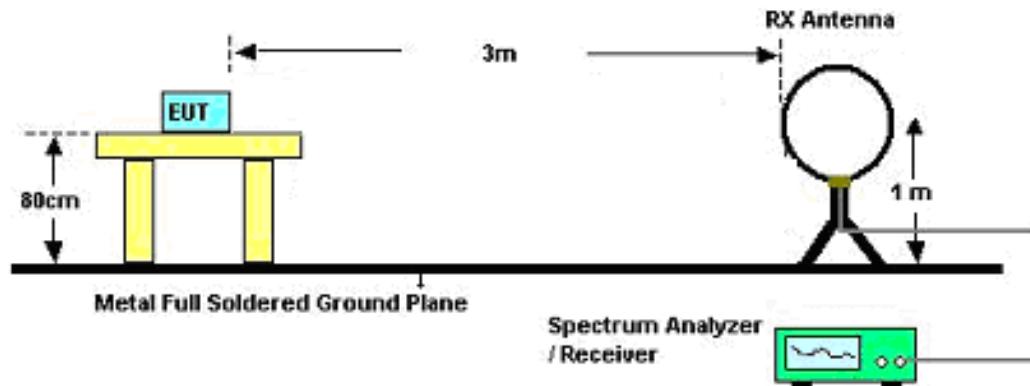

For Radiated Emissions: 30MHz~1GHz

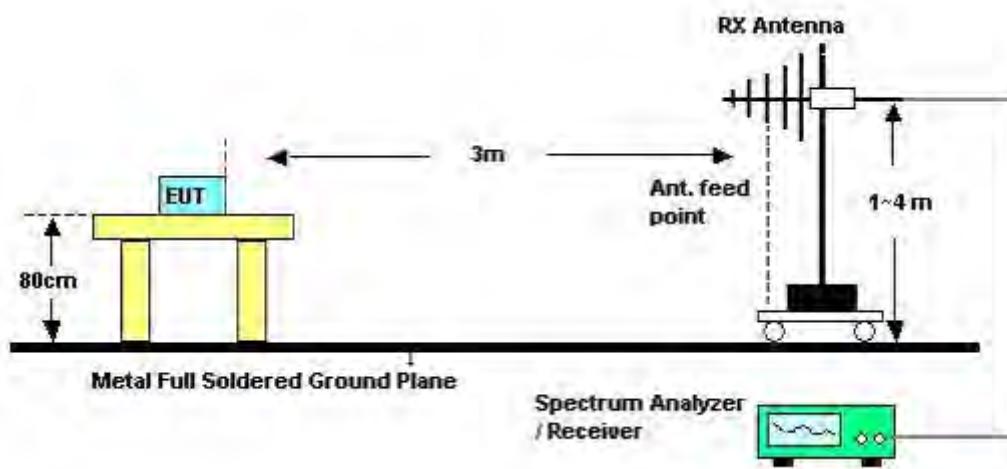

For Radiated Emissions: Above 1GHz

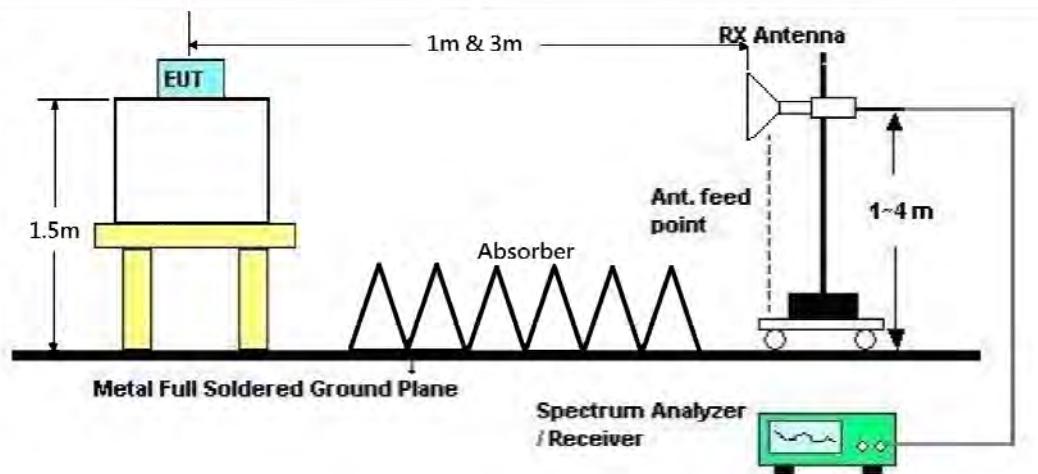

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	CTX
Test Date	Jan. 06, 2015		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	CTX

##### Horizontal

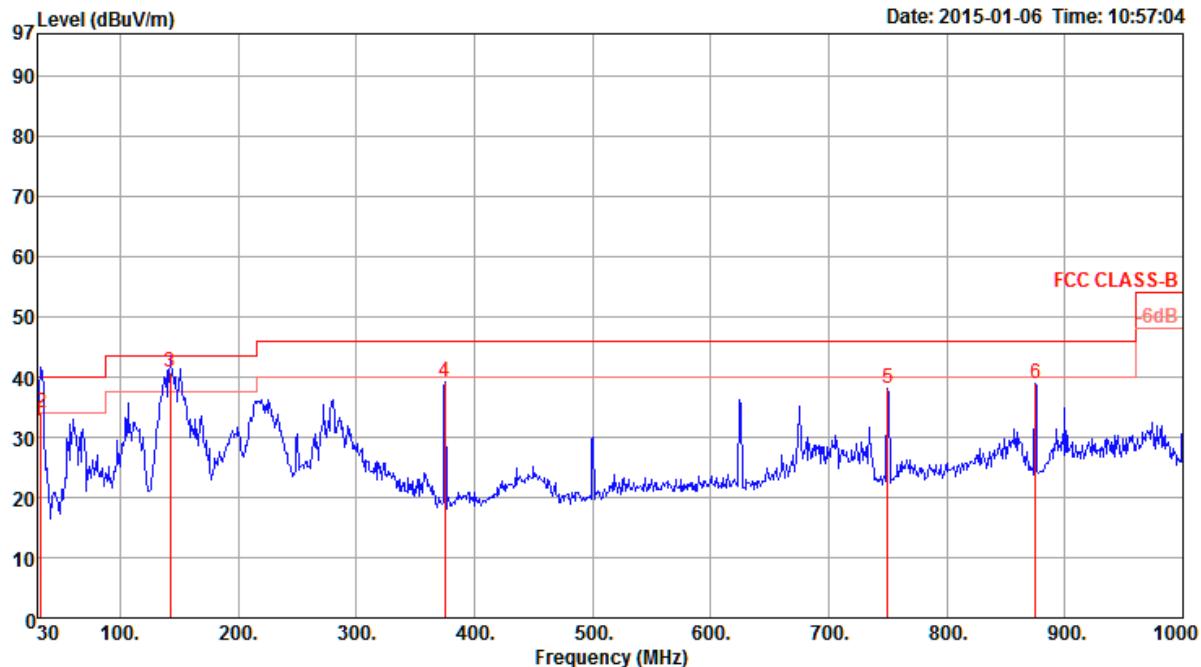

Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable Antenna Preamp			T/Pos deg	A/Pos cm	Pol/Phase
					Loss	Factor	Factor			
1 30.00	32.63	40.00	-7.37	40.09	0.61	19.90	27.97	QP	122	242 HORIZONTAL
2 32.91	34.13	40.00	-5.87	43.47	0.61	18.04	27.99	QP	238	127 HORIZONTAL
3 142.52	40.85	43.50	-2.65	55.67	1.01	11.71	27.54	QP	265	196 HORIZONTAL
4 375.32	39.24	46.00	-6.76	48.86	1.58	16.06	27.26	Peak	0	100 HORIZONTAL
5 749.74	38.12	46.00	-7.88	42.43	2.21	20.60	27.12	Peak	0	100 HORIZONTAL
6 874.87	39.03	46.00	-6.97	41.76	2.38	21.75	26.86	Peak	0	100 HORIZONTAL

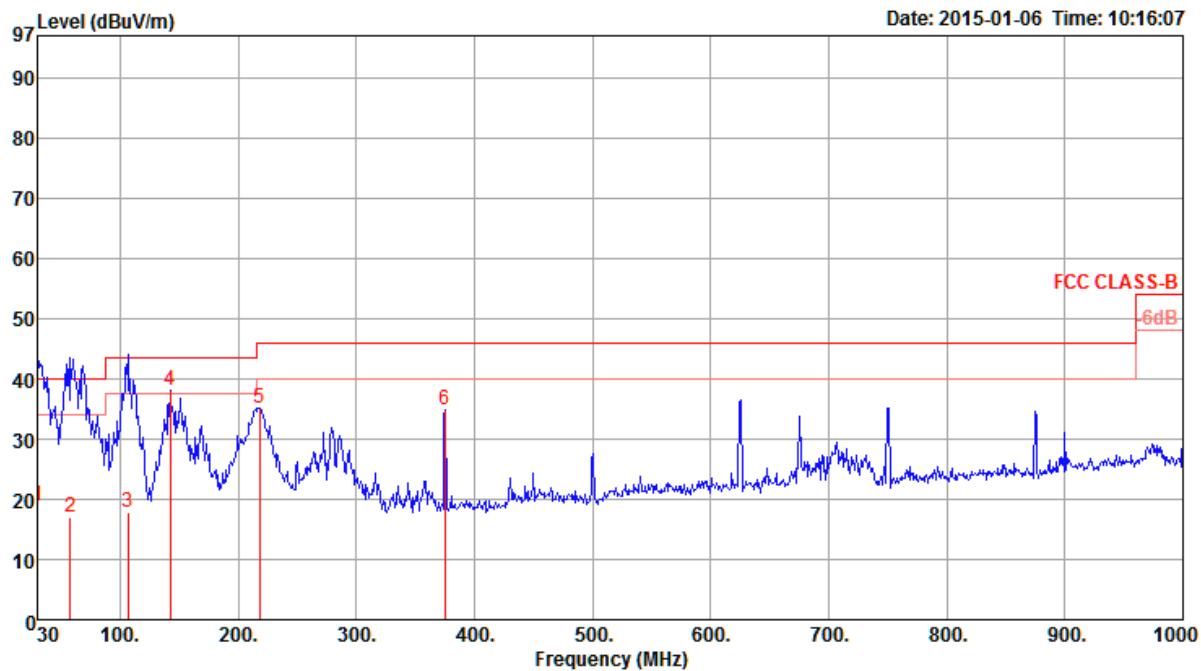**Vertical**


Freq	Level	Limit	Over	Read	Antenna			Preamp	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level	Cable Loss	Antenna Factor	Preamp Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB/m	dB	deg	cm		
1	30.00	18.97	40.00	-21.03	26.43	0.61	19.90	27.97	QP	105	101 VERTICAL
2	58.13	16.95	40.00	-23.05	37.00	0.70	7.20	27.95	QP	129	102 VERTICAL
3	106.63	17.81	43.50	-25.69	32.44	0.89	12.24	27.76	QP	313	147 VERTICAL
4	142.52	38.13	43.50	-5.37	52.95	1.01	11.71	27.54	Peak	0	400 VERTICAL
5	218.18	35.08	46.00	-10.92	50.15	1.23	10.82	27.12	Peak	0	400 VERTICAL
6	375.32	34.88	46.00	-11.12	44.50	1.58	16.06	27.26	Peak	0	400 VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz		dBuV/m	dBuV/m									cm	deg
1	4815.78	52.64	74.00	-21.36	48.05	6.11	33.52	35.04	Peak		112	271	HORIZONTAL
2	4816.02	37.94	54.00	-16.06	33.35	6.11	33.52	35.04	Average		112	271	HORIZONTAL
3	7225.32	46.54	74.00	-27.46	37.28	8.22	36.44	35.40	Peak		115	259	HORIZONTAL
4	7250.22	35.19	54.00	-18.81	25.83	8.24	36.52	35.40	Average		115	259	HORIZONTAL

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz		dBuV/m	dBuV/m									cm	deg
1	4812.18	39.75	54.00	-14.25	35.14	6.13	33.52	35.04	Average		131	254	VERTICAL
2	4826.88	54.59	74.00	-19.41	49.95	6.11	33.56	35.03	Peak		131	254	VERTICAL
3	7224.48	47.31	74.00	-26.69	38.05	8.22	36.44	35.40	Peak		122	234	VERTICAL
4	7247.04	35.12	54.00	-18.88	25.80	8.24	36.48	35.40	Average		122	234	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2
Test Date	Oct. 29, 2014		

**Horizontal**

Freq MHz	Level dBuV/m	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
		Line	dB			dB	dB	dB/m						
1 4881.53	35.05	54.00	-18.95	32.74	4.22	32.66	34.57	Average				216	227	HORIZONTAL
2 4882.37	51.38	74.00	-22.62	49.07	4.22	32.66	34.57	Peak				216	227	HORIZONTAL
3 7301.59	36.20	54.00	-17.80	28.61	5.34	37.07	34.82	Average				189	100	HORIZONTAL
4 7304.37	50.56	74.00	-23.44	42.97	5.34	37.07	34.82	Peak				189	100	HORIZONTAL

**Vertical**

Freq MHz	Level dBuV/m	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
		Line	dB			dB	dB	dB/m						
1 4879.90	35.23	54.00	-18.77	32.92	4.22	32.66	34.57	Average				360	147	VERTICAL
2 4880.51	50.15	74.00	-23.85	47.84	4.22	32.66	34.57	Peak				360	147	VERTICAL
3 7305.82	37.62	54.00	-16.38	30.03	5.34	37.07	34.82	Average				166	100	VERTICAL
4 7308.05	51.12	74.00	-22.88	43.53	5.34	37.07	34.82	Peak				166	100	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Antenna	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Factor	Remark	cm	deg	
1	4924.00	45.62	74.00	-28.38	40.82	6.05	33.76	35.01	Peak	191	109	HORIZONTAL
2	4925.20	32.81	54.00	-21.19	28.01	6.05	33.76	35.01	Average	191	109	HORIZONTAL
3	7351.20	48.89	74.00	-25.11	39.20	8.32	36.77	35.40	Peak	191	15	HORIZONTAL
4	7450.80	36.71	54.00	-17.29	26.72	8.41	36.98	35.40	Average	191	15	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Antenna	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Factor	Remark	cm	deg	
1	4927.20	48.36	74.00	-25.64	43.56	6.05	33.76	35.01	Peak	123	301	VERTICAL
2	4928.40	35.60	54.00	-18.40	30.80	6.05	33.76	35.01	Average	123	301	VERTICAL
3	7386.80	50.08	74.00	-23.92	40.29	8.34	36.85	35.40	Peak	123	280	VERTICAL
4	7471.60	36.79	54.00	-17.21	26.70	8.43	37.06	35.40	Average	123	280	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB		cm	deg
1	4852.92	43.12	74.00	-30.88	38.43	6.10	33.62	35.03	Peak		102	125	HORIZONTAL
2	4853.60	31.21	54.00	-22.79	26.52	6.10	33.62	35.03	Average		102	125	HORIZONTAL
3	7259.44	48.41	74.00	-25.59	39.05	8.24	36.52	35.40	Peak		106	139	HORIZONTAL
4	7275.08	36.19	54.00	-17.81	26.77	8.26	36.56	35.40	Average		106	139	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB		cm	deg
1	4851.84	43.38	74.00	-30.62	38.69	6.10	33.62	35.03	Peak		134	115	VERTICAL
2	4853.20	30.99	54.00	-23.01	26.30	6.10	33.62	35.03	Average		134	115	VERTICAL
3	7265.72	35.60	54.00	-18.40	26.18	8.26	36.56	35.40	Average		102	96	VERTICAL
4	7268.28	47.54	74.00	-26.46	38.12	8.26	36.56	35.40	Peak		102	96	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2
Test Date	Oct. 29, 2014		

**Horizontal**

Freq MHz	Level dBuV/m	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
		Line	dB			dB	dB	dB/m						
1 4867.78	47.45	74.00	-26.55	45.14	4.22	32.66	34.57	Peak			94	164	HORIZONTAL	
2 4870.85	32.39	54.00	-21.61	30.08	4.22	32.66	34.57	Average			94	164	HORIZONTAL	
3 7304.20	37.32	54.00	-16.68	29.73	5.34	37.07	34.82	Average			181	100	HORIZONTAL	
4 7318.44	51.32	74.00	-22.68	43.71	5.35	37.09	34.83	Peak			181	100	HORIZONTAL	

**Vertical**

Freq MHz	Level dBuV/m	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos deg	A/Pos cm	Pol/Phase
		Line	dB			dB	dB	dB/m						
1 4877.82	31.86	54.00	-22.14	29.55	4.22	32.66	34.57	Average			355	100	VERTICAL	
2 4879.56	46.61	74.00	-27.39	44.30	4.22	32.66	34.57	Peak			355	100	VERTICAL	
3 7312.19	37.39	54.00	-16.61	29.81	5.34	37.07	34.83	Average			107	100	VERTICAL	
4 7313.69	51.18	74.00	-22.82	43.60	5.34	37.07	34.83	Peak			107	100	VERTICAL	

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	4902.04	44.71	74.00	-29.29	39.93	6.07	33.73	35.02	Peak		207	152	HORIZONTAL
2	4903.96	32.61	54.00	-21.39	27.83	6.07	33.73	35.02	Average		207	152	HORIZONTAL
3	7346.20	35.76	54.00	-18.24	26.11	8.32	36.73	35.40	Average		147	131	HORIZONTAL
4	7358.32	48.27	74.00	-25.73	38.58	8.32	36.77	35.40	Peak		147	131	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
1	4901.20	32.22	54.00	-21.78	27.48	6.07	33.69	35.02	Average		118	272	VERTICAL	
2	4906.44	44.03	74.00	-29.97	39.25	6.07	33.73	35.02	Peak		118	272	VERTICAL	
3	7353.16	47.94	74.00	-26.06	38.25	8.32	36.77	35.40	Peak		118	199	VERTICAL	
4	7361.12	35.58	54.00	-18.42	25.89	8.32	36.77	35.40	Average		118	199	VERTICAL	

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m	dB	deg		
MHz	dBuV/m	dBuV/m	dB									
1	4823.99	49.71	54.00	-4.29	44.96	6.11	33.56	34.92	32	169	Average	HORIZONTAL
2	4823.99	55.59	74.00	-18.41	50.84	6.11	33.56	34.92	32	169	Peak	HORIZONTAL
3	7235.50	35.56	54.00	-18.44	26.02	8.24	36.48	35.18	212	100	Average	HORIZONTAL
4	7236.13	49.28	74.00	-24.72	39.74	8.24	36.48	35.18	212	100	Peak	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m		cm	deg	
MHz	dBuV/m	dBuV/m	dB									
1	4823.90	53.98	74.00	-20.02	49.23	6.11	33.56	34.92	Peak	169	31	VERTICAL
2	4824.00	49.25	54.00	-4.75	44.50	6.11	33.56	34.92	Average	169	31	VERTICAL
3	7236.13	34.10	54.00	-19.90	24.56	8.24	36.48	35.18	Average	100	346	VERTICAL
4	7239.52	46.38	74.00	-27.62	36.84	8.24	36.48	35.18	Peak	100	346	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable		Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit			Loss	Factor						
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	deg	cm	
1	4874.04	53.21	54.00	-0.79	48.39	6.08	33.66	34.92	26	209	Average	HORIZONTAL	
2	4874.04	55.77	74.00	-18.23	50.95	6.08	33.66	34.92	26	209	Peak	HORIZONTAL	
3	7308.36	48.18	74.00	-25.82	38.45	8.28	36.64	35.19	11	187	Peak	HORIZONTAL	
4	7309.76	35.36	54.00	-18.64	25.63	8.28	36.64	35.19	11	187	Average	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over	Read	Cable		Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit			Loss	Factor						
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	deg	cm	
1	4874.04	51.90	54.00	-2.10	47.08	6.08	33.66	34.92	278	100	Average	VERTICAL	
2	4874.04	54.55	74.00	-19.45	49.73	6.08	33.66	34.92	278	100	Peak	VERTICAL	
3	7310.24	35.75	54.00	-18.25	26.02	8.28	36.64	35.19	291	100	Average	VERTICAL	
4	7316.92	48.47	74.00	-25.53	38.67	8.30	36.69	35.19	291	100	Peak	VERTICAL	

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	4923.96	48.66	54.00	-5.34	43.76	6.05	33.76	34.91	Average		196	28	HORIZONTAL
2	4924.12	57.37	74.00	-16.63	52.47	6.05	33.76	34.91	Peak		196	28	HORIZONTAL
3	7383.44	49.67	74.00	-24.33	39.73	8.34	36.81	35.21	Peak		178	119	HORIZONTAL
4	7387.16	38.50	54.00	-15.50	28.52	8.34	36.85	35.21	Average		178	119	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	4924.04	47.03	54.00	-6.97	42.13	6.05	33.76	34.91	Average		100	315	VERTICAL
2	4924.04	53.00	74.00	-21.00	48.10	6.05	33.76	34.91	Peak		100	315	VERTICAL
3	7383.96	36.31	54.00	-17.69	26.33	8.34	36.85	35.21	Average		100	279	VERTICAL
4	7394.08	48.70	74.00	-25.30	38.69	8.37	36.85	35.21	Peak		100	279	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4816.48	53.09	74.00	-20.91	48.50	6.11	33.52	35.04	Peak	100	267	HORIZONTAL
2	4817.56	38.26	54.00	-15.74	33.63	6.11	33.56	35.04	Average	100	267	HORIZONTAL
3	7243.00	35.04	54.00	-18.96	25.72	8.24	36.48	35.40	Average	100	240	HORIZONTAL
4	7244.56	48.07	74.00	-25.93	38.75	8.24	36.48	35.40	Peak	100	240	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4815.32	40.71	54.00	-13.29	36.12	6.11	33.52	35.04	Average	120	317	VERTICAL
2	4815.32	54.46	74.00	-19.54	49.87	6.11	33.52	35.04	Peak	120	317	VERTICAL
3	7238.40	47.80	74.00	-26.20	38.48	8.24	36.48	35.40	Peak	108	281	VERTICAL
4	7243.36	35.04	54.00	-18.96	25.72	8.24	36.48	35.40	Average	108	281	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Antenna	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Factor	Remark	cm	deg	
1	4871.20	54.63	74.00	-19.37	49.92	6.08	33.66	35.03	Peak	111	304	HORIZONTAL
2	4876.40	42.91	54.00	-11.09	38.20	6.08	33.66	35.03	Average	111	304	HORIZONTAL
3	7393.00	49.15	74.00	-24.85	39.33	8.37	36.85	35.40	Peak	104	288	HORIZONTAL
4	7401.80	36.64	54.00	-17.36	26.78	8.37	36.89	35.40	Average	104	288	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Antenna	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Factor	Remark	cm	deg	
1	4876.84	52.39	74.00	-21.61	47.68	6.08	33.66	35.03	Peak	100	257	VERTICAL
2	4877.64	40.30	54.00	-13.70	35.59	6.08	33.66	35.03	Average	100	257	VERTICAL
3	7319.04	35.68	54.00	-18.32	26.09	8.30	36.69	35.40	Average	100	238	VERTICAL
4	7319.84	48.69	74.00	-25.31	39.10	8.30	36.69	35.40	Peak	100	238	VERTICAL

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Antenna	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Factor	Remark	cm	deg	
1	4927.28	33.14	54.00	-20.86	28.34	6.05	33.76	35.01	Average	104	297	HORIZONTAL
2	4929.28	45.20	74.00	-28.80	40.40	6.05	33.76	35.01	Peak	104	297	HORIZONTAL
3	7383.08	49.16	74.00	-24.84	39.41	8.34	36.81	35.40	Peak	101	348	HORIZONTAL
4	7395.80	36.61	54.00	-17.39	26.79	8.37	36.85	35.40	Average	101	348	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Antenna	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Factor	Remark	cm	deg	
1	4925.72	48.79	74.00	-25.21	43.99	6.05	33.76	35.01	Peak	101	302	VERTICAL
2	4926.00	36.77	54.00	-17.23	31.97	6.05	33.76	35.01	Average	101	302	VERTICAL
3	7389.16	48.22	74.00	-25.78	38.40	8.37	36.85	35.40	Peak	101	314	VERTICAL
4	7392.84	35.53	54.00	-18.47	25.71	8.37	36.85	35.40	Average	101	314	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (20dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

#### For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

#### For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

#### **4.6.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014 ~ Oct. 29, 2014		

##### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m	deg				
1	2390.00	53.35	54.00	-0.65	20.45	4.41	28.49	0.00	293	162	Average	VERTICAL	
2	2390.00	73.88	74.00	-0.12	40.98	4.41	28.49	0.00	293	162	Peak	VERTICAL	
3	2406.80	116.12			83.18	4.41	28.53	0.00	293	162	Peak	VERTICAL	
4	2407.20	103.13			70.19	4.41	28.53	0.00	293	162	Average	VERTICAL	

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m	deg				
1	2390.00	57.81	74.00	-16.19	26.98	2.91	27.92	0.00	Peak	64	244	HORIZONTAL	
2	2390.00	45.68	54.00	-8.32	14.85	2.91	27.92	0.00	Average	64	244	HORIZONTAL	
3	2443.95	96.45			65.65	2.94	27.86	0.00	Average	64	244	HORIZONTAL	
4	2444.24	108.50			77.70	2.94	27.86	0.00	Peak	64	244	HORIZONTAL	
5	2483.50	44.48	54.00	-9.52	13.70	2.96	27.82	0.00	Average	64	244	HORIZONTAL	
6	2486.39	57.93	74.00	-16.07	27.15	2.96	27.82	0.00	Peak	64	244	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m	deg				
1	2388.40	62.35	74.00	-11.65	29.49	4.37	28.49	0.00	Peak	148	296	VERTICAL	
2	2390.00	51.03	54.00	-2.97	18.13	4.41	28.49	0.00	Average	148	296	VERTICAL	
3	2466.00	103.30			70.19	4.48	28.63	0.00	Average	148	296	VERTICAL	
4	2466.00	115.77			82.66	4.48	28.63	0.00	Peak	148	296	VERTICAL	
5	2483.50	53.24	54.00	-0.76	20.06	4.51	28.67	0.00	Average	148	296	VERTICAL	
6	2484.70	73.71	74.00	-0.29	40.53	4.51	28.67	0.00	Peak	148	296	VERTICAL	

Item 3, 4 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Roki Liu	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2
<b>Test Date</b>	Sep. 21, 2014 ~ Oct. 29, 2014		

**Channel 3**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2390.00	53.91	54.00	-0.09	21.01	4.41	28.49	0.00	Average	134	297	VERTICAL		
2	2390.00	71.76	74.00	-2.24	38.86	4.41	28.49	0.00	Peak	134	297	VERTICAL		
3	2437.20	97.39			64.35	4.44	28.60	0.00	Average	134	297	VERTICAL		
4	2438.00	112.55			79.51	4.44	28.60	0.00	Peak	134	297	VERTICAL		

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2390.00	58.90	74.00	-15.10	28.07	2.91	27.92	0.00	Peak	73	236	HORIZONTAL		
2	2390.00	45.36	54.00	-8.64	14.53	2.91	27.92	0.00	Average	73	236	HORIZONTAL		
3	2439.17	93.58			62.78	2.94	27.86	0.00	Average	73	236	HORIZONTAL		
4	2439.60	106.92			76.12	2.94	27.86	0.00	Peak	73	236	HORIZONTAL		
5	2483.50	61.90	74.00	-12.10	31.12	2.96	27.82	0.00	Peak	73	236	HORIZONTAL		
6	2483.50	44.90	54.00	-9.10	14.12	2.96	27.82	0.00	Average	73	236	HORIZONTAL		

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 9**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2390.00	50.25	54.00	-3.75	17.35	4.41	28.49	0.00	Average	159	286	VERTICAL		
2	2390.00	68.52	74.00	-5.48	35.62	4.41	28.49	0.00	Peak	159	286	VERTICAL		
3	2436.80	99.80			66.76	4.44	28.60	0.00	Average	159	286	VERTICAL		
4	2436.80	113.22			80.18	4.44	28.60	0.00	Peak	159	286	VERTICAL		
5	2483.50	52.12	54.00	-1.88	18.94	4.51	28.67	0.00	Average	159	286	VERTICAL		
6	2488.70	73.82	74.00	-0.18	40.61	4.51	28.70	0.00	Peak	159	286	VERTICAL		

Item 3, 4 are the fundamental frequency at 2452 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	65%
Test Engineer	Roki Liu	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2
Test Date	Sep. 21, 2014		

**Channel 1**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2389.60	53.54	54.00	-0.46	20.68	4.37	28.49	0.00	Average	149	286	VERTICAL	
2	2390.00	64.45	74.00	-9.55	31.55	4.41	28.49	0.00	Peak	149	286	VERTICAL	
3	2409.20	106.97			74.03	4.41	28.53	0.00	Average	149	286	VERTICAL	
4	2409.40	111.24			78.30	4.41	28.53	0.00	Peak	149	286	VERTICAL	

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2390.00	52.97	54.00	-1.03	20.07	4.41	28.49	0.00	Average	100	286	VERTICAL	
2	2390.00	62.83	74.00	-11.17	29.93	4.41	28.49	0.00	Peak	100	286	VERTICAL	
3	2436.20	111.03			78.03	4.44	28.56	0.00	Average	100	286	VERTICAL	
4	2436.20	115.19			82.19	4.44	28.56	0.00	Peak	100	286	VERTICAL	
5	2483.50	44.89	54.00	-9.11	11.71	4.51	28.67	0.00	Average	100	286	VERTICAL	
6	2485.10	56.45	74.00	-17.55	23.27	4.51	28.67	0.00	Peak	100	286	VERTICAL	

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2384.00	53.87	54.00	-0.13	21.04	4.37	28.46	0.00	301	137	Average		HORIZONTAL
2	2384.60	66.04	74.00	-7.96	33.21	4.37	28.46	0.00	301	137	Peak		HORIZONTAL
3	2463.60	109.40			76.29	4.48	28.63	0.00	301	137	Average		HORIZONTAL
4	2464.60	115.32			82.21	4.48	28.63	0.00	301	137	Peak		HORIZONTAL
5	2483.50	45.23	54.00	-8.77	12.05	4.51	28.67	0.00	301	137	Average		HORIZONTAL
6	2483.60	58.29	74.00	-15.71	25.11	4.51	28.67	0.00	301	137	Peak		HORIZONTAL

Item 3, 4 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Roki Liu	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2
<b>Test Date</b>	Sep. 21, 2014		

### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	2388.00	67.39	74.00	-6.61	34.53	4.37	28.49	0.00	Peak			170	290	HORIZONTAL
2	2390.00	53.86	54.00	-0.14	20.96	4.41	28.49	0.00	Average			170	290	HORIZONTAL
3	2404.40	103.98			71.04	4.41	28.53	0.00	Average			170	290	HORIZONTAL
4	2404.80	115.61			82.67	4.41	28.53	0.00	Peak			170	290	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	2389.20	67.94	74.00	-6.06	35.08	4.37	28.49	0.00	Peak			174	267	VERTICAL
2	2390.00	53.21	54.00	-0.79	20.31	4.41	28.49	0.00	Average			174	267	VERTICAL
3	2435.80	106.87			73.87	4.44	28.56	0.00	Average			174	267	VERTICAL
4	2436.60	120.02			86.98	4.44	28.60	0.00	Peak			174	267	VERTICAL
5	2483.50	46.23	54.00	-7.77	13.05	4.51	28.67	0.00	Average			174	267	VERTICAL
6	2484.70	61.51	74.00	-12.49	28.33	4.51	28.67	0.00	Peak			174	267	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11



Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	2388.40	63.51	74.00	-10.49	30.65	4.37	28.49	0.00	Peak			153	295	VERTICAL
2	2390.00	50.72	54.00	-3.28	17.82	4.41	28.49	0.00	Average			153	295	VERTICAL
3	2465.20	115.97			82.86	4.48	28.63	0.00	Peak			153	295	VERTICAL
4	2465.60	102.98			69.87	4.48	28.63	0.00	Average			153	295	VERTICAL
5	2483.50	52.48	54.00	-1.52	19.30	4.51	28.67	0.00	Average			153	295	VERTICAL
6	2484.70	73.38	74.00	-0.62	40.20	4.51	28.67	0.00	Peak			153	295	VERTICAL

Item 3, 4 are the fundamental frequency at 2462 MHz.


### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

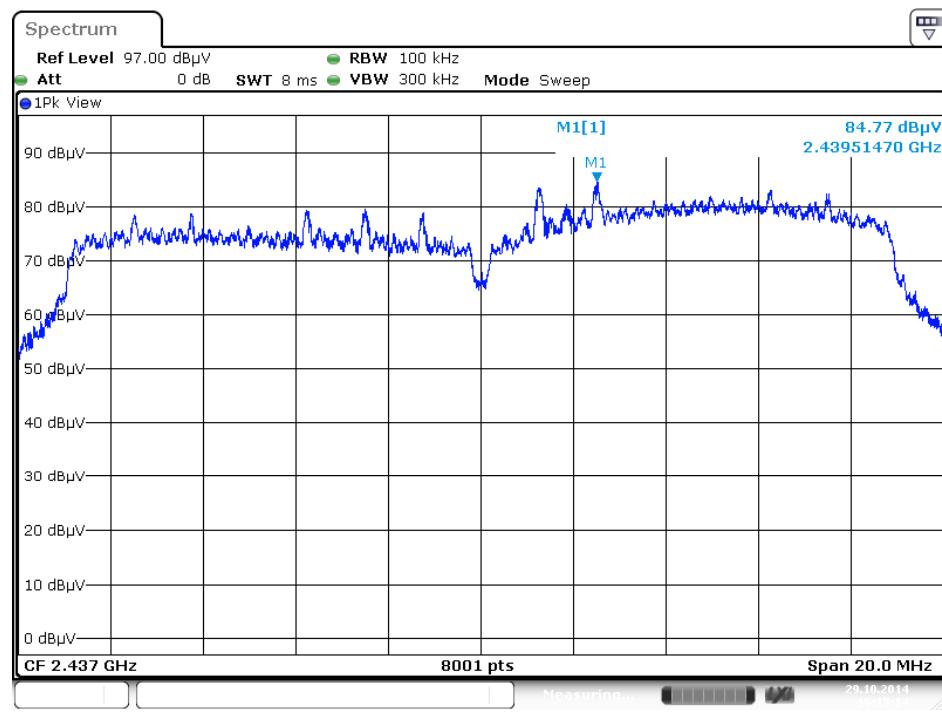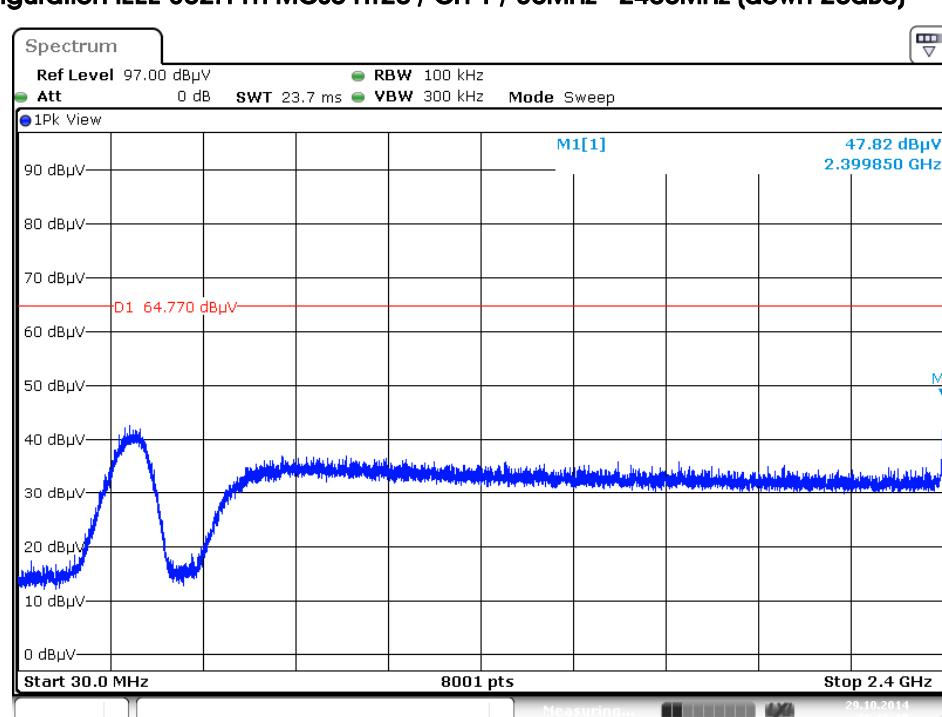
**For Emission not in Restricted Band**
**Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level**

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 20dBc)**

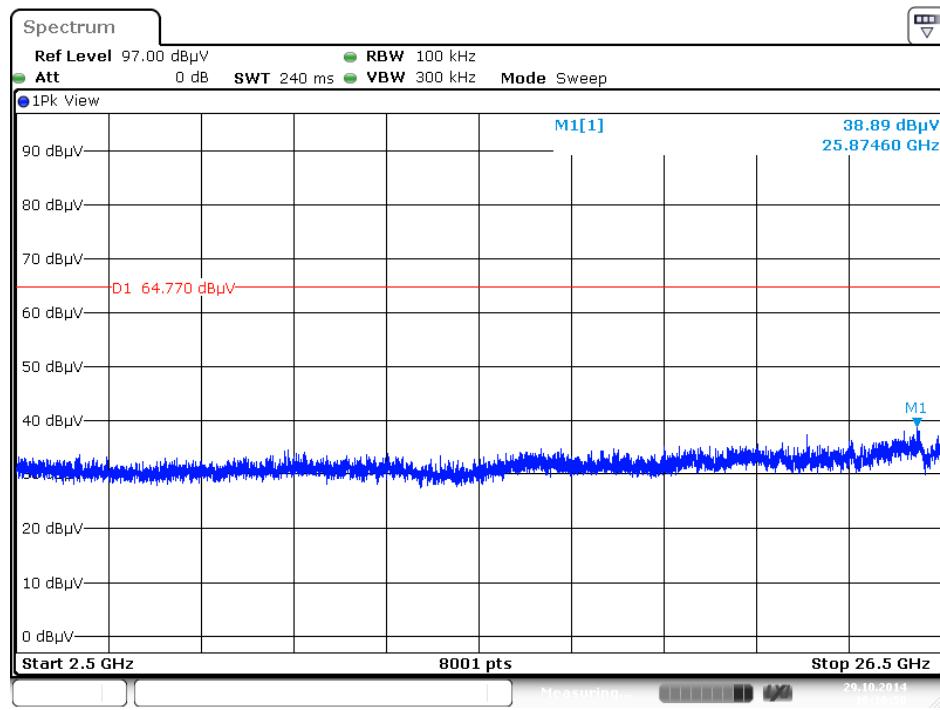
### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 20dBc)




Date: 29.OCT.2014 16:16:51
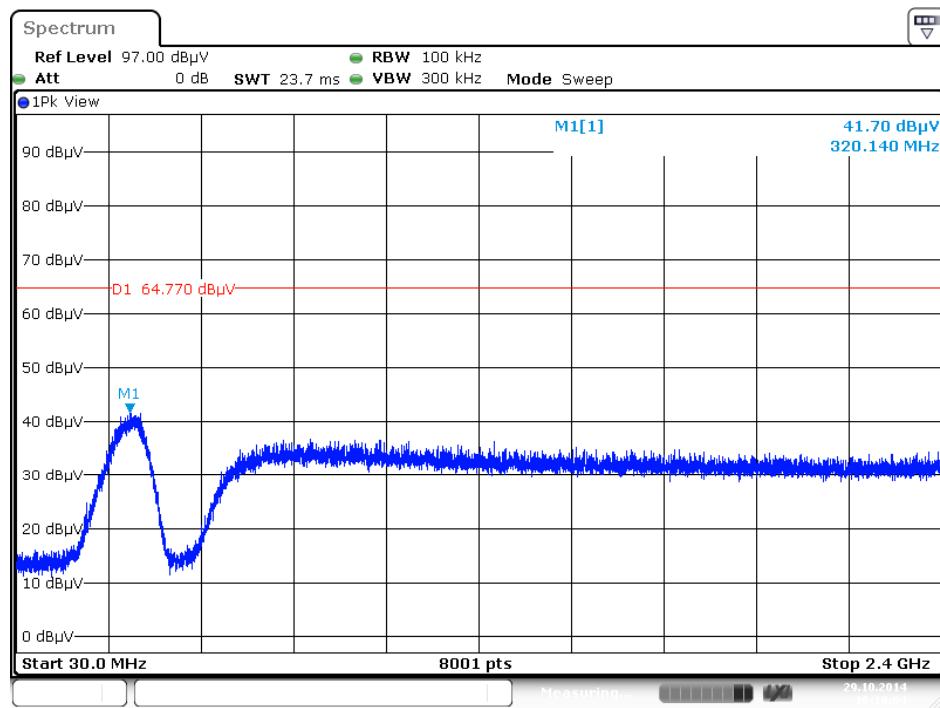
### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 20dBc)




Date: 29.OCT.2014 16:18:04

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 20dBc)**

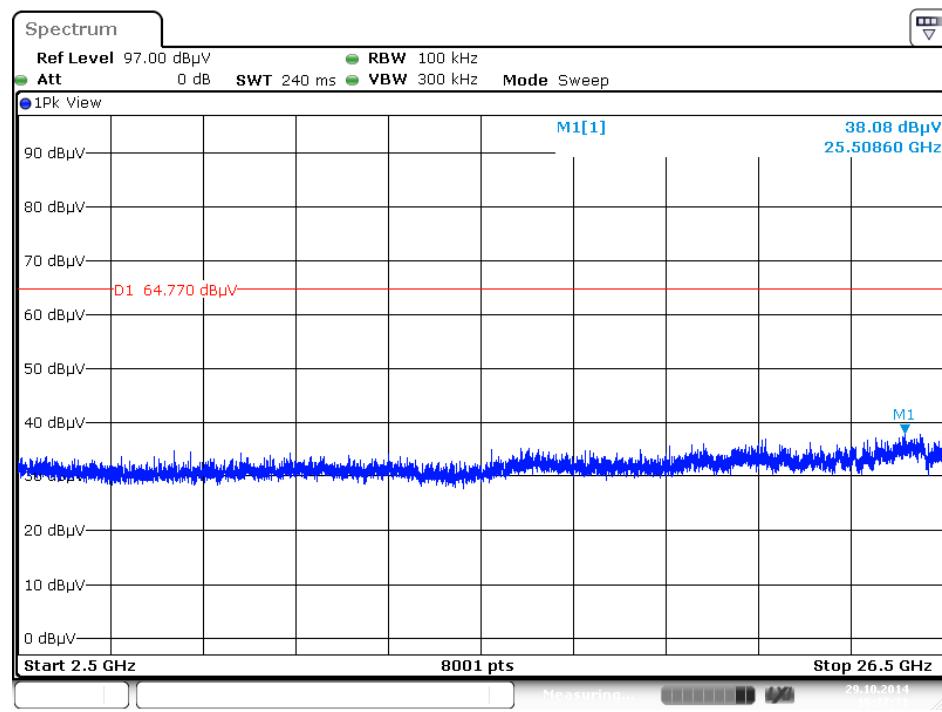


### Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

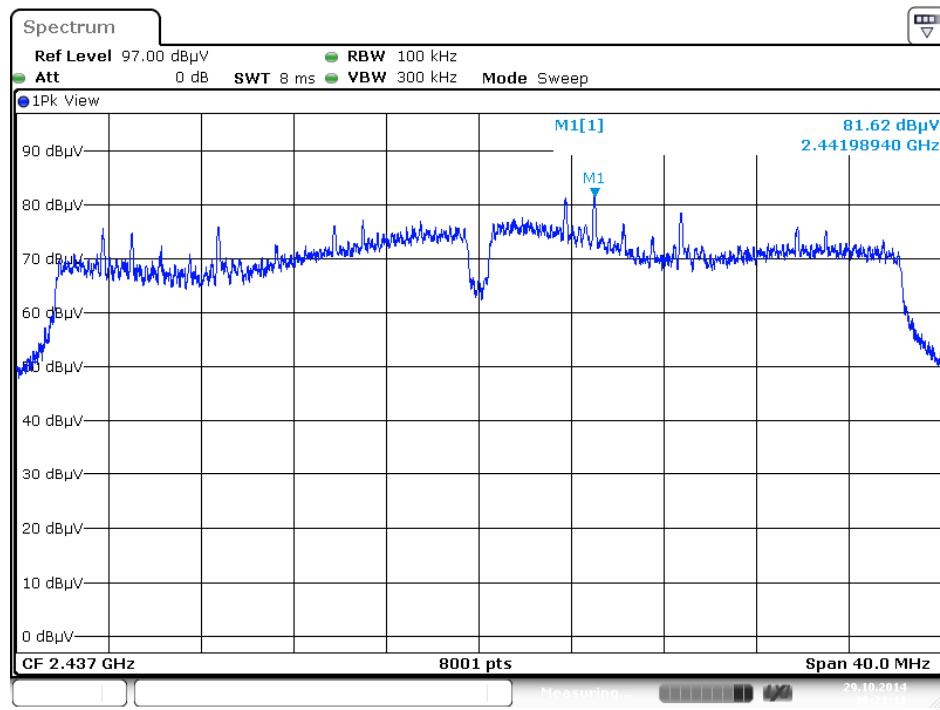


Date: 29.OCT.2014 16:21:31

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 20dBc)

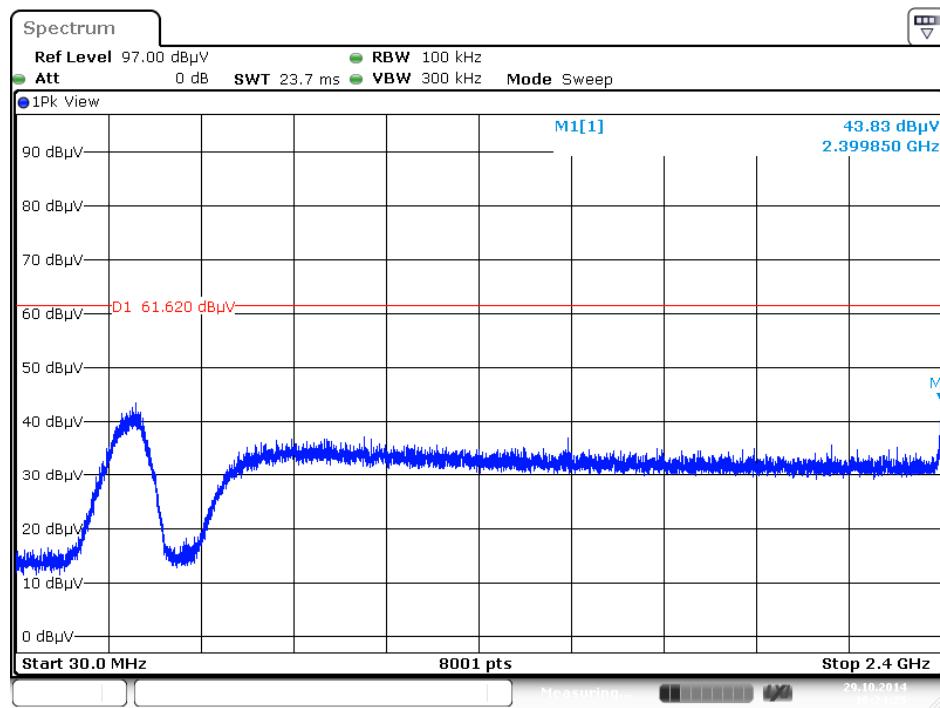


Date: 29.OCT.2014 16:24:25

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 20dBc)

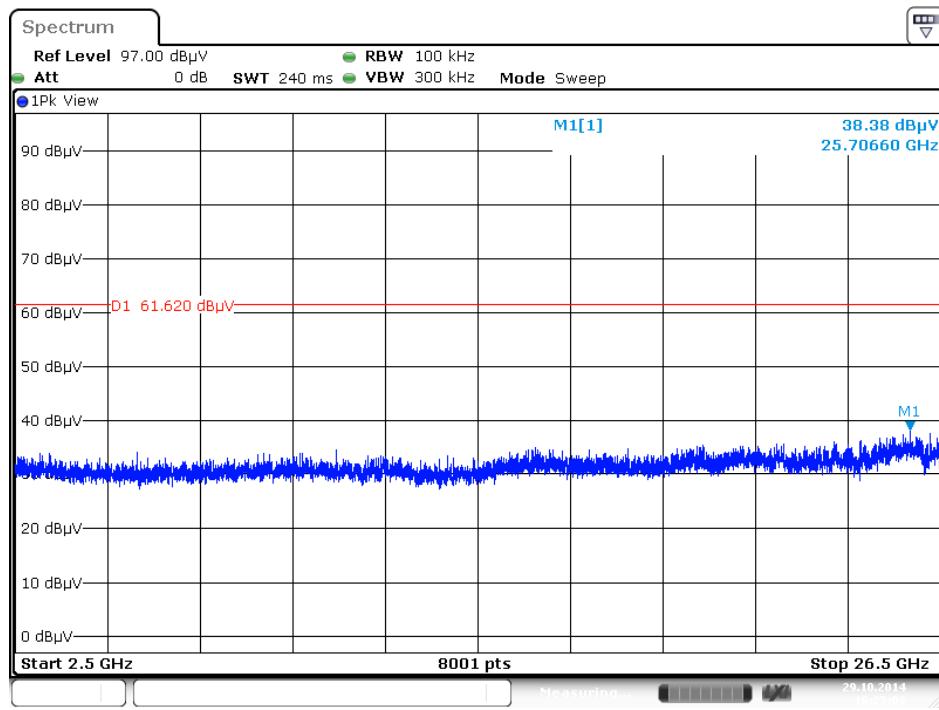


Date: 29.OCT.2014 16:25:03

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 20dBc)

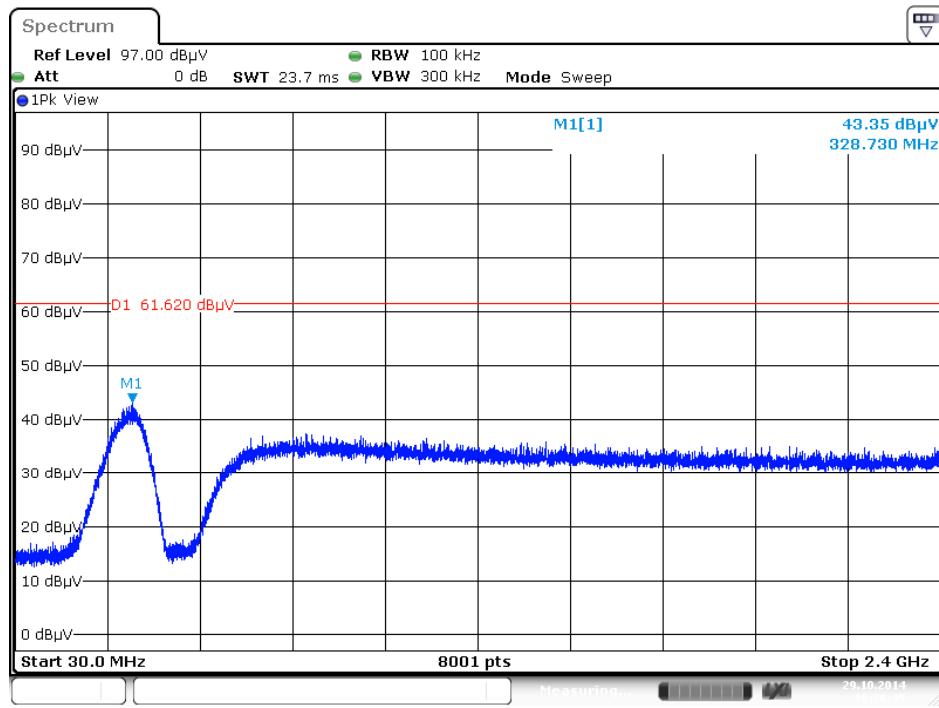


Date: 29.OCT.2014 16:26:36


**Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 20dBc)**

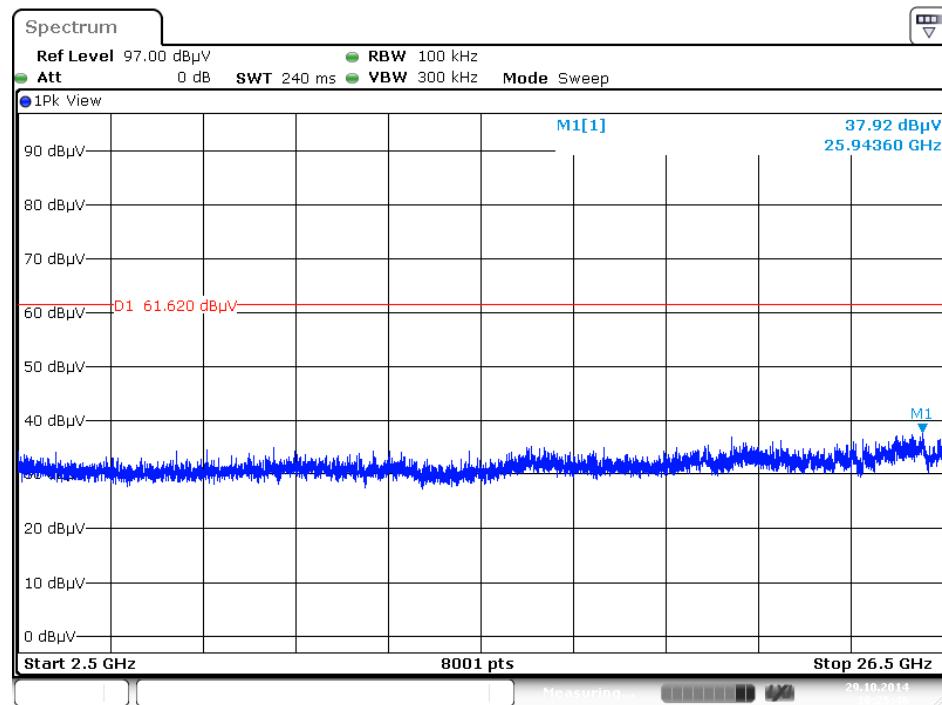


### Plot on Configuration IEEE 802.11b / Reference Level

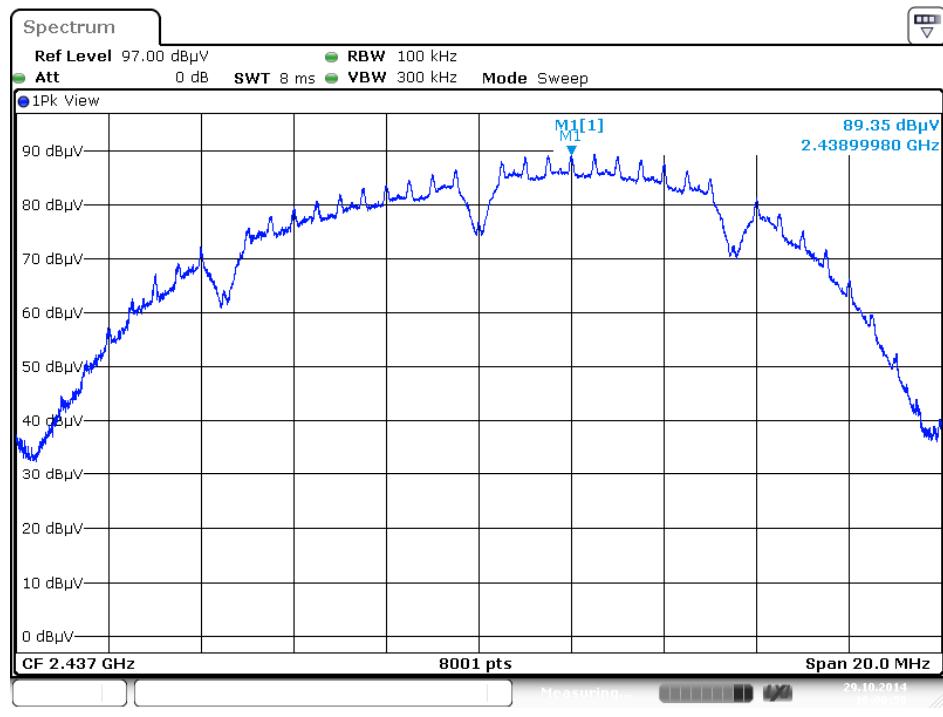

### Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 20dBc)

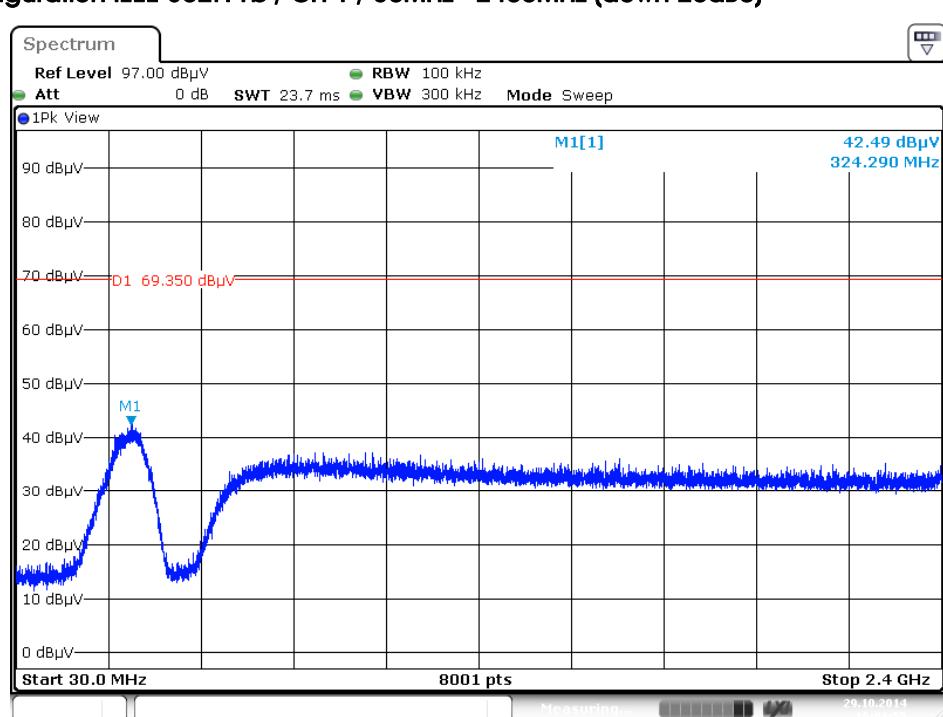


### Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 20dBc)

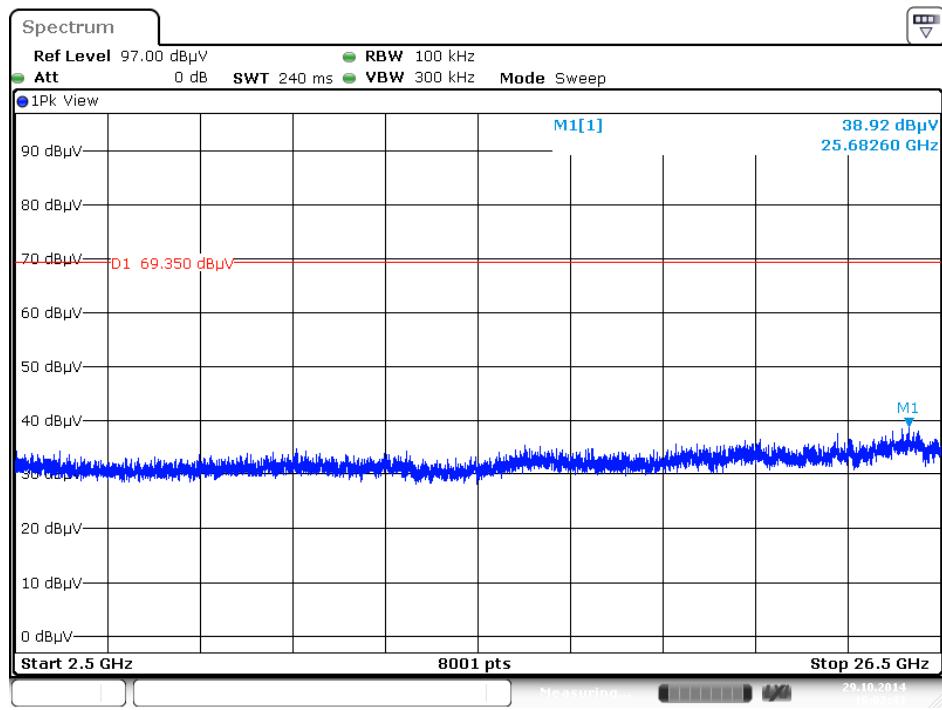


Date: 29.OCT.2014 16:02:44

### Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 20dBc)

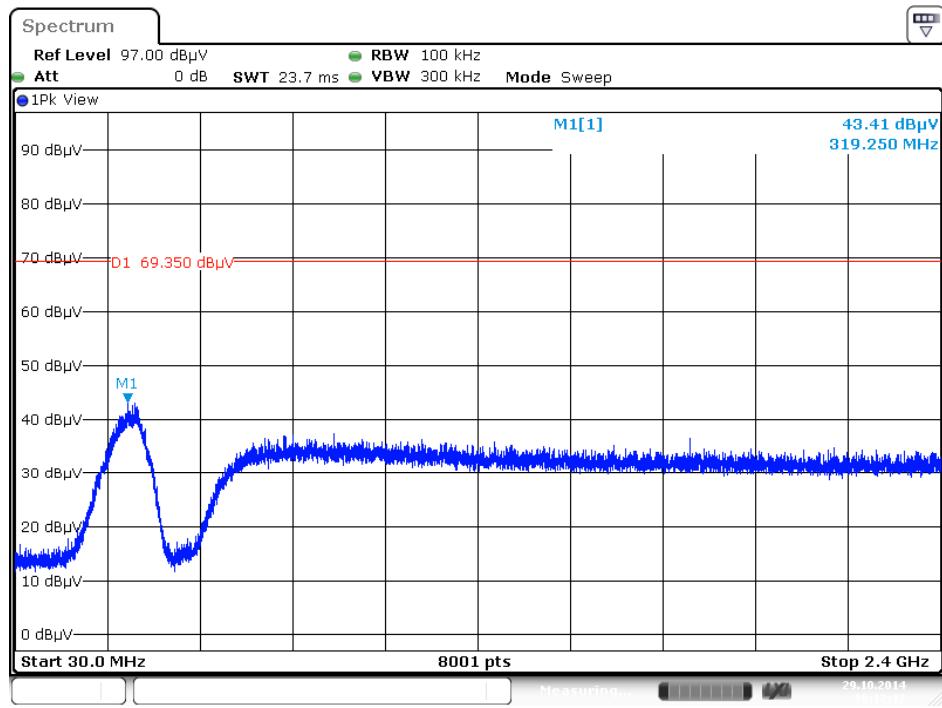


Date: 29.OCT.2014 16:12:13

**Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 20dBc)**

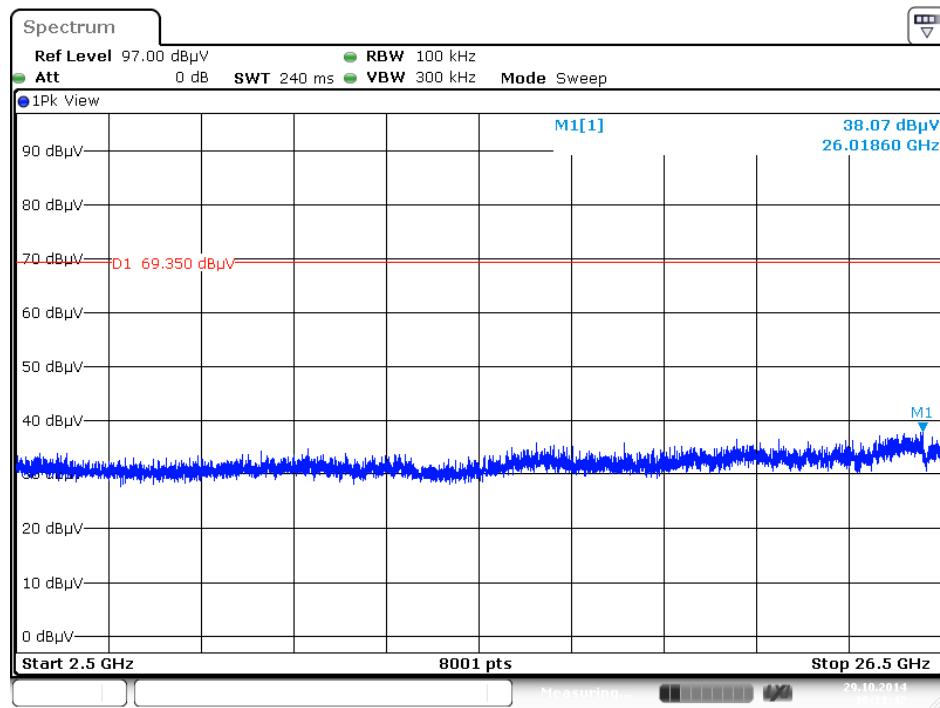


### Plot on Configuration IEEE 802.11g / Reference Level

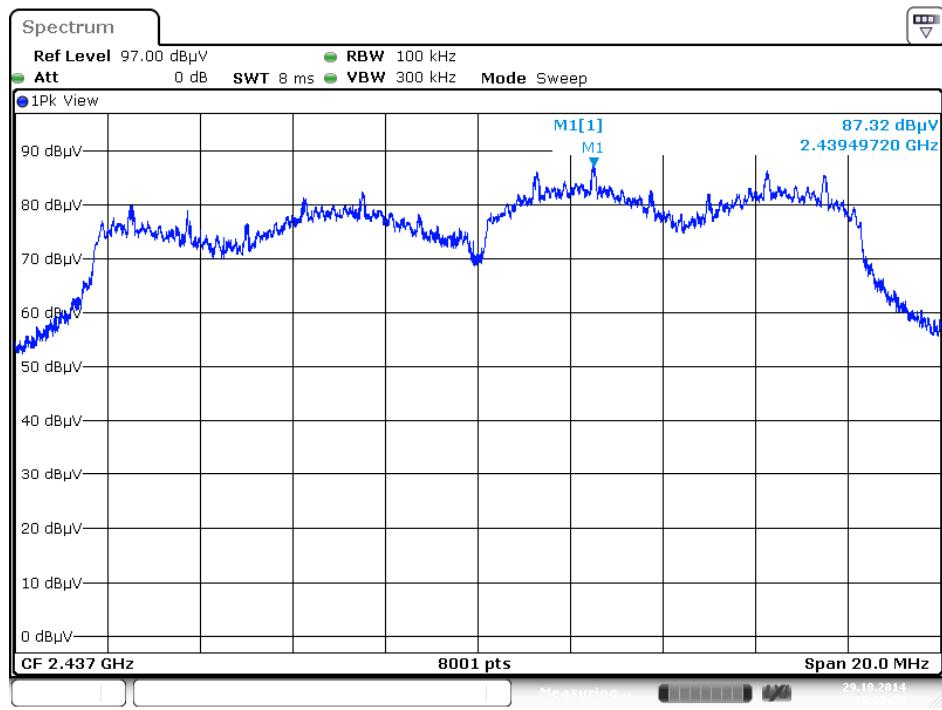


Date: 29.OCT.2014 16:05:05

### Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 20dBc)

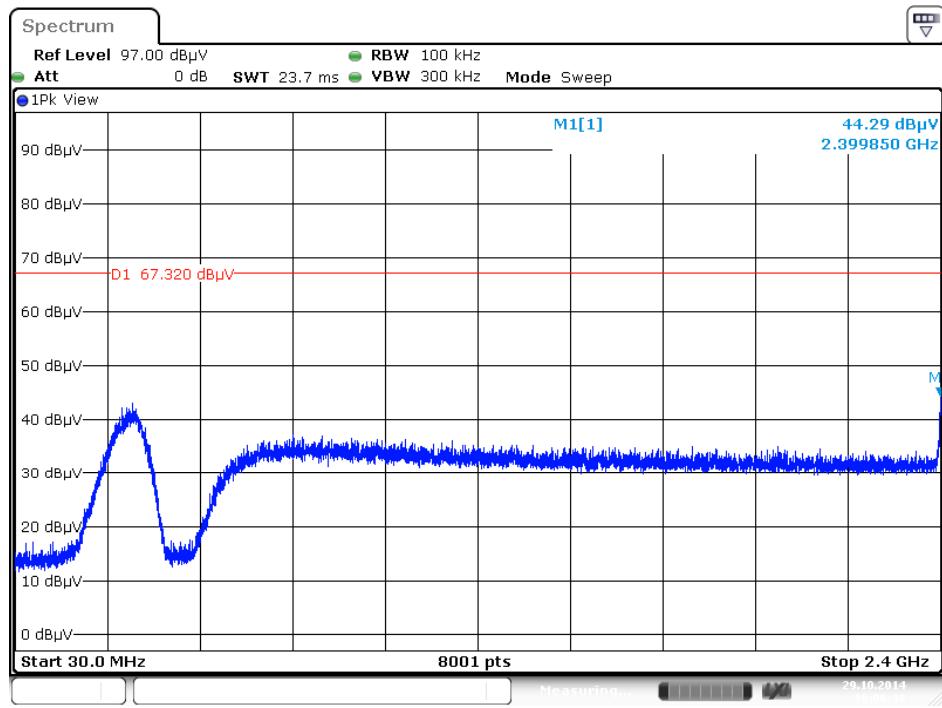


Date: 29.OCT.2014 16:06:38

### Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 20dBc)

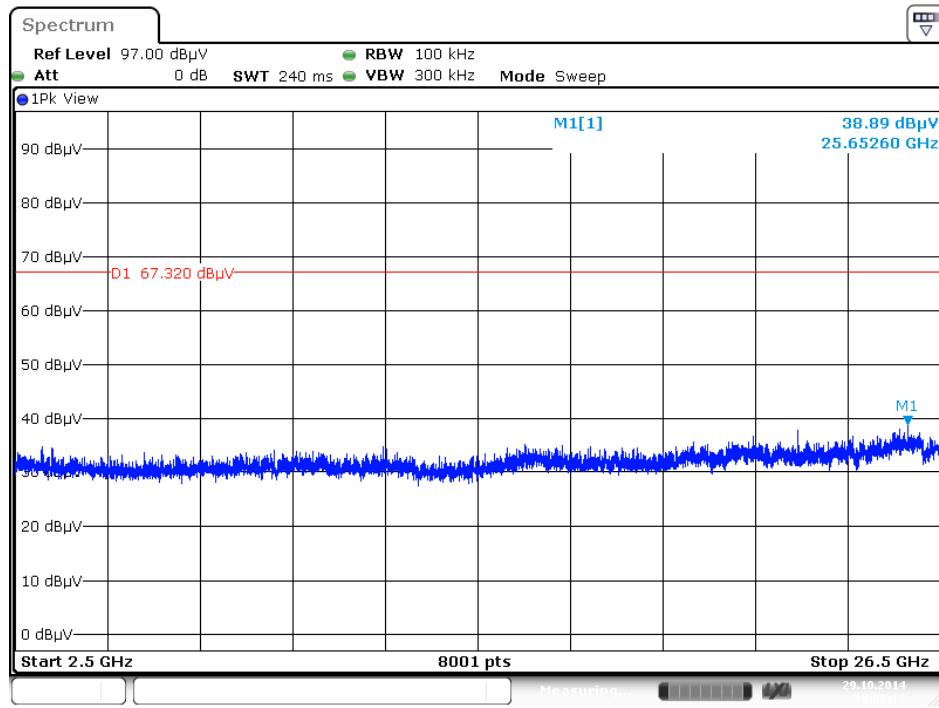


Date: 29.OCT.2014 16:07:13

### Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 20dBc)

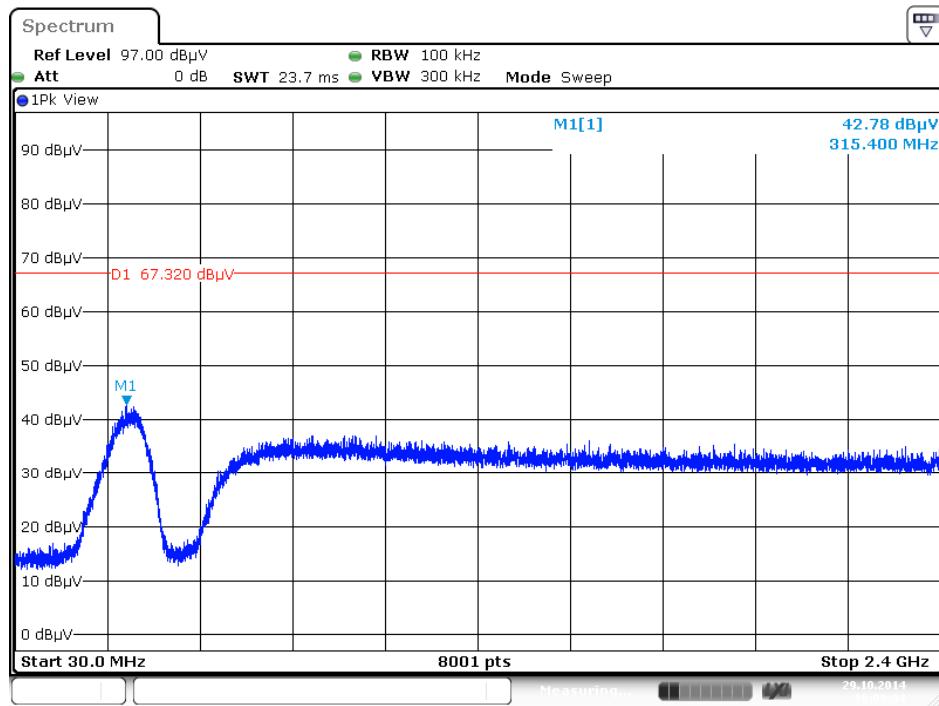

Date: 29.OCT.2014 16:09:03

**Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 20dBc)**

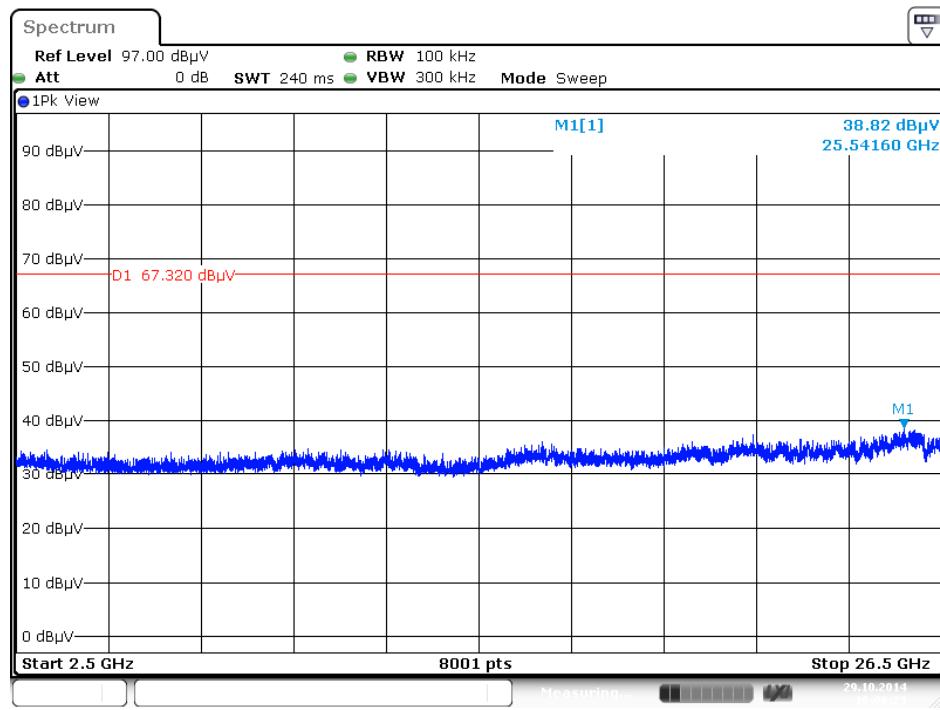

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02009	1GHz ~ 26.5GHz	Dec. 17, 2014	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100080	9kHz ~ 40GHz	Oct. 15, 2014	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR26	101289	9kHz~26GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec.12, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%