

# Application Submittal Test Report

For  
FCC and Industry Canada  
Grant of Certification

FOR

Model: FWBD01  
Broadband Digital Transmission System  
5745-5825MHz

FCC ID: V2V-FWBD01  
IC: 7607A-FWBD01

FOR

**LIGOWAVE LLC**  
138 Mountain Brook Dr  
Canton, GA 30115


Test Report Number: 101229

Authorized Signatory:   
Scot D. Rogers

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 1 of 47

**ROGERS LABS, INC.**

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

# Engineering Test Report for Application of Grant of Certification

Per

CFR47, Part 15C - Intentional Radiators, Paragraph 15.247  
And Industry Canada, RSS-210  
License Exempt Intentional Radiator

For

**LIGOWAVE LLC**

138 Mountain Brook Dr  
Canton, GA 30115

**Model: FWBD01**

Broadband Digital Transmission System  
Frequency Range 5745-5825 MHz

FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01

Test Date: December 29, 2011

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.  
This report must not be used by the client to claim product endorsement by NVLAP, NIST, or  
any agency of the U.S. Government.

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 2 of 47

## Table Of Contents

<b>TABLE OF CONTENTS.....</b>	<b>3</b>	
<b>FORWARD .....</b>	<b>6</b>	
<b>OPINION / INTERPRETATION OF RESULTS .....</b>	<b>6</b>	
<b>ENVIRONMENTAL CONDITIONS.....</b>	<b>6</b>	
<b>EQUIPMENT TESTED.....</b>	<b>6</b>	
<b>APPLICATION FOR CERTIFICATION.....</b>	<b>7</b>	
<b>APPLICABLE STANDARDS &amp; TEST PROCEDURES .....</b>	<b>8</b>	
<b>EQUIPMENT FUNCTION AND CONFIGURATION.....</b>	<b>8</b>	
Equipment Configuration.....	9	
<b>TEST SITE LOCATIONS .....</b>	<b>9</b>	
<b>UNITS OF MEASUREMENTS .....</b>	<b>9</b>	
<b>EMISSIONS TEST PROCEDURES .....</b>	<b>10</b>	
AC Line Conducted Emission Test Procedure .....	10	
Radiated Emission Test Procedure.....	10	
<b>LIST OF TEST EQUIPMENT .....</b>	<b>11</b>	
<b>INTENTIONAL RADIATORS.....</b>	<b>12</b>	
Antenna Requirements .....	12	
Restricted Bands of Operation.....	12	
Radiated Emissions in Restricted Bands Data (worst-case) .....	13	
Summary of Results for Radiated Emissions in Restricted Bands .....	13	
Statement of Modifications and Deviations .....	13	
<b>AC Line Conducted Emissions Test Procedure.....</b>	<b>14</b>	
Figure One AC Line Conducted Emissions Line 1.....	15	
Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214 Revision 1	Ligowave LLC Model: FWBD01 Test #: 101229 Test to: CFR47 (15.247) and RSS-210 File: Ligowave FWBD01 101229 TestRpt	SN: ENG 1 FCC ID#: V2V-FWBD01 IC: 7607A-FWBD01 Date: February 16, 2011 Page 3 of 47

Figure Two AC Line Conducted Emissions Line 2 .....	15
AC Line Conducted Emissions Data (Highest Emissions) .....	16
<b>Summary of Results for AC Line Conducted Emissions .....</b>	<b>17</b>
<b>General Radiated Emissions Test Procedure.....</b>	<b>17</b>
Figure Three General Radiated Emissions taken at 1 meter in screen room .....	18
Figure Four General Radiated Emissions taken at 1 meter in screen room .....	18
Figure Five General Radiated Emissions taken at 1 meter in screen room.....	19
Figure Six General Radiated Emissions taken at 1 meter in screen room .....	19
Figure Seven General Radiated Emissions taken at 1 meter in screen room.....	20
Figure Eight General Radiated Emissions taken at 1 meter in screen room.....	20
Figure Nine General Radiated Emissions taken at 1 meter in screen room.....	21
Figure Ten General Radiated Emissions taken at 1 meter in screen room .....	21
<b>Radiated Emissions Data from EUT (Highest Emissions).....</b>	<b>22</b>
<b>Summary of Results for General Radiated Emissions .....</b>	<b>22</b>
<b>Statement of Modifications and Deviations .....</b>	<b>22</b>
<b>Operation in the Band 5725 – 5850 MHz Test Procedure .....</b>	<b>23</b>
Figure Eleven Plot of Antenna Port conducted emissions .....	23
Figure Twelve Plot of Antenna Port conducted emissions .....	24
Figure Thirteen Plot of Antenna Port conducted emissions .....	24
Figure Fourteen Plot of Antenna Port conducted emissions.....	25
Figure Fifteen Plot of Antenna Port conducted emissions.....	25
Figure Sixteen Plot of Antenna Port conducted emissions .....	26
Figure Seventeen Plot of Output Power in Band .....	26
Figure Eighteen Plot of Output Power in Band .....	27
Figure Nineteen Plot of Output Power in Band .....	27
Figure Twenty Plot of 6dB Band width (OFDM Mode, 5745 MHz) .....	28
Figure Twenty-one Plot of 6dB Band width (OFDM Mode, 5785 MHz) .....	28
Figure Twenty-two Plot of 6dB Band width (OFDM Mode, 5825 MHz).....	29
Figure Twenty-three Plot of 6dB Band width (20 MHz mode, 5745 MHz).....	29
Figure Twenty-four Plot of 6dB Band width (20 MHz mode, 5785 MHz) .....	30
Figure Twenty-five Plot of 6dB Band width (20 MHz mode, 5825 MHz).....	30
Figure Twenty-six Plot Power Spectral Density (OFDM Mode, 5745 MHz) .....	31
Figure Twenty-seven Plot of Power Spectral Density (OFDM Mode, 5785 MHz).....	31



NVLAP Lab Code 200087-0

Figure Twenty-eight Plot of Power Spectral Density (OFDM Mode, 5825 MHz) .....	32
Figure Twenty-nine Plot Power Spectral Density (20 MHz Mode, 5745 MHz) .....	32
Figure Thirty Plot of Power Spectral Density (20 MHz Mode, 5785 MHz) .....	33
Figure Thirty-one Plot of Power Spectral Density (20 MHz Mode, 5825 MHz) .....	33
<b>Transmitter Radiated Emissions Data .....</b>	<b>34</b>
Transmitter Radiated Emission Panel Antenna (Worst-Case) .....	34
Transmitter Radiated Emission Dish Antenna (Worst-Case) .....	34
<b>Transmitter Antenna Port conducted Emission Data.....</b>	<b>35</b>
<b>Summary of Results for Radiated Emissions of Intentional Radiator .....</b>	<b>35</b>
<b>Statement of Modifications and Deviations .....</b>	<b>35</b>
<b>RECEIVER EMISSIONS .....</b>	<b>36</b>
<b>Receiver Antenna Port Conduction.....</b>	<b>36</b>
Figure Thirty-two Plot of Receiver Antenna Port Conducted Emissions .....	36
Figure Thirty-three Plot of Receiver Antenna Port Conducted Emissions .....	37
Figure Thirty-four Plot of Receiver Antenna Port Conducted Emissions.....	37
Figure Thirty-five Plot of Receiver Antenna Port Conducted Emissions .....	38
Figure Thirty-six Plot of Receiver Antenna Port Conducted Emissions.....	38
Figure Thirty-seven Plot of Receiver Antenna Port Conducted Emissions .....	39
Figure Thirty-eight Plot of Receiver Antenna Port Conducted Emissions .....	39
<b>Receiver Antenna Conducted Emissions Data.....</b>	<b>40</b>
<b>Receiver Radiated Emissions Data .....</b>	<b>40</b>
<b>Summary of Results for Receiver Emissions .....</b>	<b>40</b>
<b>ANNEX.....</b>	<b>41</b>
<b>Annex A Measurement Uncertainty Calculations.....</b>	<b>42</b>
<b>Annex B Rogers Labs Test Equipment List.....</b>	<b>44</b>
<b>Annex C Rogers Qualifications.....</b>	<b>45</b>
<b>Annex D FCC Site Registration Letter.....</b>	<b>46</b>
<b>Annex E Industry Canada Site Registration Letter .....</b>	<b>47</b>

## Forward

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under CFR 47 Paragraph 15.247 and Industry Canada specification RSS-210.

Name of Applicant: LIGOWAVE LLC  
138 Mountain Brook Dr  
Canton, GA 30115

Model: FWBD01

FCC I.D.: V2V-FWBD01 FRN: 0017416041 IC: 7607A-FWBD01

Frequency Range: 5745-5825 MHz

Operating Power: 0.436 Watt antenna port conducted, (26.4 dBm total output both chains), 6-dB Occupied Bandwidth 17,988 MHz, worst-case receiver radiated emission 32.1 dB $\mu$ V/m @ 3-meters taken on OATS, Tested Antennas were 23 dBi Panel and 32 dBi Dish

## Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Emissions Restricted Frequency Bands	-11.4	Complies
Emissions AC Line Conducted	-1.3	Complies
Emissions General Radiated	-11.4	Complies
Emissions Harmonics of Fundamental	-10.4	Complies
Emissions Receiver Antenna Port	13.7	Complies

## Environmental Conditions

Ambient Temperature 22.6° C  
Relative Humidity 18%  
Atmospheric Pressure 1015.3 mbar

## Equipment Tested

Equipment	Model	FCC I.D.
EUT	FWBD01	V2V-FWBD01
Panel Antenna	ARC-ID5823B88	N/A
Dish Antenna	HDDA5W-32-DP	10100126
CPU	Dell Studio XPS	921LBN1

## Application for Certification

(1) Manufacturer: LIGOWAVE LLC  
138 Mountain Brook Dr  
Canton, GA 30115

(2) Identification: Model: FWBD01  
FCC I.D.: V2V-FWBD01 IC: 7607A-FWBD01

(3) Instruction Book:  
Refer to Exhibit for Instruction Manual.

(4) Description of Circuit Functions:  
Refer to Exhibit of Operational Description.

(5) Block Diagram with Frequencies:  
Refer to Exhibit of Operational Description.

(6) Report of Measurements:  
Report of measurements follows in this Report.

(7) Photographs: Construction, Component Placement, etc.:  
Refer to Exhibit for photographs of equipment.

(8) List of Peripheral Equipment Necessary for operation. The equipment operates from power received from the authorized AC POE (Power Over Ethernet) and power adapter and was interfaced through network cable to laptop computer during testing.

(9) Transition Provisions of 15.37 are not being requested.

(10) Not Applicable. The unit is not a scanning receiver.

(11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.

(12) The equipment is not software defined and this section is not applicable.

## Applicable Standards & Test Procedures


In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2010, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247, and Industry Canada standard RSS-210 the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI C63.4-2009 Document FCC, documents DA00-1407 and DA00-705 and/or TIA/EIA 603-1. Testing for the AC line-conducted emissions were performed as defined in sections 7 and 13.1.3, testing of the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. Testing of the intentional radiated emissions was performed as defined in section 13 of ANSI C63.4-2009.

## Equipment Function and Configuration

The EUT is a 5745-5825 MHz Digital Transmission System transmitter used to transmit data in Point-to-Point applications offering broadband wireless connectivity. Two models were offered for testing (one offering antenna port connection ports and the other with attached panel antenna). The equipment is marketed for use to incorporate a wireless link to exchange data information from one point to another. For testing purposes the FWBD01 transceiver was connected to the manufacturer supplied POE/AC power adapter and communicating to the laptop computer allowing for operational control of the transmitter and communications over the network interface between the EUT and supporting computer system. The FWBD01 receives power from the supplied POE/AC power adapter connected to utility power systems. The EUT offers interface connection ports for network and authorized antenna systems. The EUT requires power supplied from POE, no other interfacing options are provided on the design. For testing purposes the FWBD01 and support equipment were powered from the POE/AC power adapter and set to transmit in available data modes. The device is marketed for professionally installed use and complies with the unique antenna connection requirements.

## Equipment Configuration

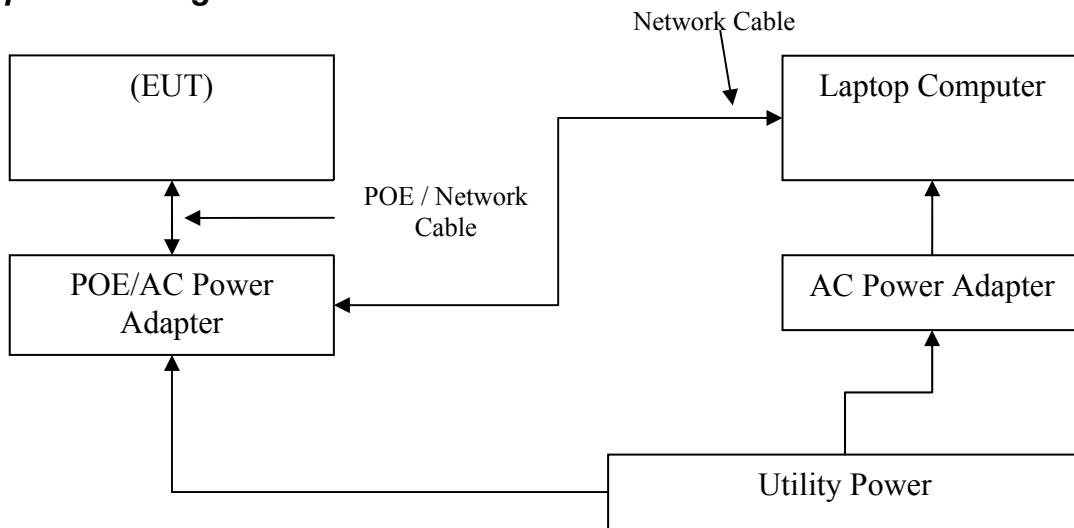

## Test Site Locations

Conducted EMI	The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259 <sup>th</sup> Terrace, Louisburg, KS
Radiated EMI	The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259 <sup>th</sup> Terrace, Louisburg, KS
Site Registration	Refer to Annex for Site Registration Letters
NVLAP Accreditation	Lab code 200087-0

## Units of Measurements

Conducted EMI	Data is in dB $\mu$ V; dB referenced to one microvolt
Radiated EMI	Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter
Sample Calculation:	
RFS = Radiated Field Strength, FSM = Field Strength Measured	
A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses	
RFS (dB $\mu$ V/m @ 3m) = FSM (dB $\mu$ V) + A.F. (dB) - Gain (dB)	

## **Emissions Test Procedures**

### ***AC Line Conducted Emission Test Procedure***

The EUT operates from DC power only and must be connected to an approved POE/AC adapter for operation. For testing purposes, the manufacturer supplied POE/AC power adapter was used to power the EUT and system. Testing for the AC line-conducted emissions testing was performed as defined in sections 7 and 13.1.3 of ANSI C63.4-2009. The test setup including the EUT was arranged in typical equipment configurations and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50  $\mu$ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

### ***Radiated Emission Test Procedure***

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Testing for the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the test setup exhibits for EUT placement during testing.

## List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

HP 8591 EM Analyzer Settings		
Conducted Emissions		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Radiated Emissions		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
HP 8562A Analyzer Settings		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Calibration Date</u>	<u>Due</u>
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/10	10/11
Antenna	ARA	BCD-235-B	10/10	10/11
Antenna	EMCO	3147	10/10	10/11
Antenna	EMCO	3143	5/10	5/11
Analyzer	HP	8591EM	5/10	5/11
Analyzer	HP	8562A	5/10	5/11
Analyzer	Rohde & Schwarz	ESU40	5/10	5/11



NVLAP Lab Code 200087-0

## **Intentional Radiators**

As per CFR47, Subpart C, paragraph 15.247 and RSS-210 the following information is submitted.

### ***Antenna Requirements***

The EUT is produced with either an integrated antenna system or compliant antenna connector. The design is marketed for professional installation and use as described in accompanying documentation. The antenna connection point complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled and there are no deviations or exceptions to the specification.

### ***Restricted Bands of Operation***

Spurious emissions falling in the restricted frequency bands of operation were measured at a distance of three meters at the OATS. The EUT utilizes frequency determining circuitry, which generates harmonics falling in the restricted bands. Emissions were measured at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

**Radiated Emissions in Restricted Bands Data (worst-case)**

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	FCC Class B Limit @ 3m (dB $\mu$ V/m)
General Emissions falling into Restricted Frequency Bands							
133.0	43.3	48.6	13.5	30	26.8	32.1	43.5
400.0	48.3	45.3	16.1	30	34.4	31.4	46.0
Harmonics Emissions (Panel)							
11490.0	21.6	22.1	39.9	25.0	36.5	37.0	54.0
11570.0	21.8	22.1	39.9	25.0	36.7	37.0	54.0
11650.0	21.9	22.1	39.9	25.0	16.6	37.0	54.0
22980.0	8.1	8.5	37.1	25.0	20.2	20.6	54.0
Harmonics Emissions (Dish)							
11490.0	21.2	21.1	39.9	25.0	36.1	36.0	54.0
11570.0	21.1	21.1	39.9	25.0	36.0	36.0	54.0
11650.0	20.5	19.6	39.9	25.0	16.6	34.5	54.0
22980.0	8.4	8.7	37.1	25.0	20.5	20.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

**Summary of Results for Radiated Emissions in Restricted Bands**



The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C Intentional Radiators. The EUT demonstrated a minimum margin of 11.4 dB below the requirements. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

**Statement of Modifications and Deviations**

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C paragraph 15.205 or Industry Canada RSS-210 emissions requirements. There were no deviations or exceptions to the specifications.

***AC Line Conducted Emissions Test Procedure***

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied POE/AC power adapter for the EUT was connected to the LISN. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the EUT POE/AC Power Line conducted emissions.

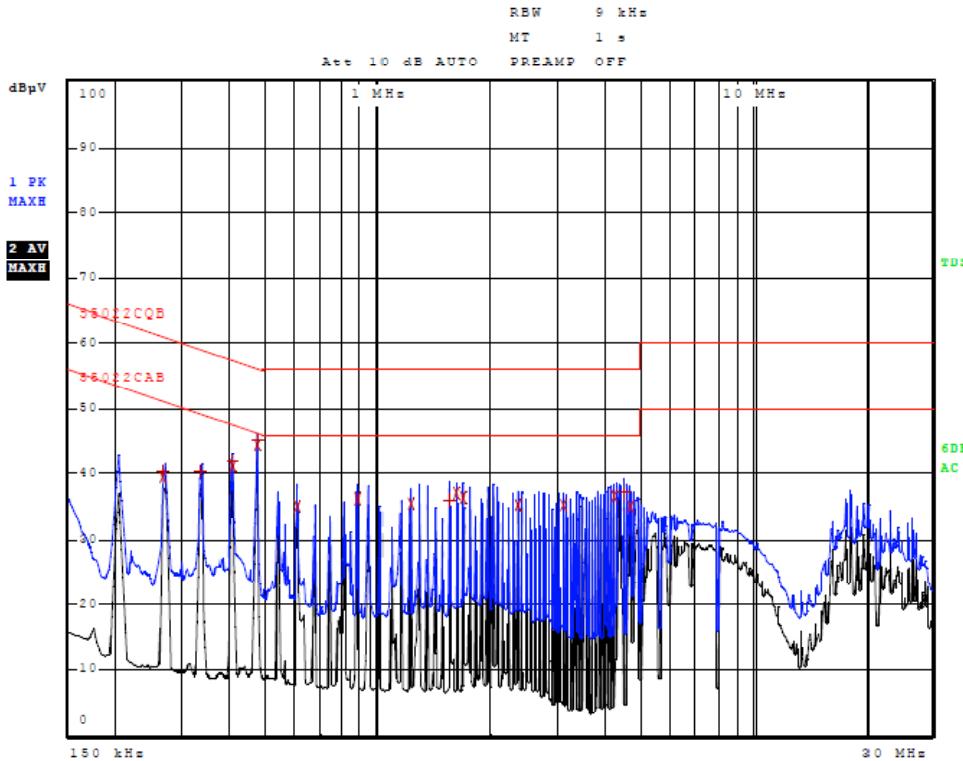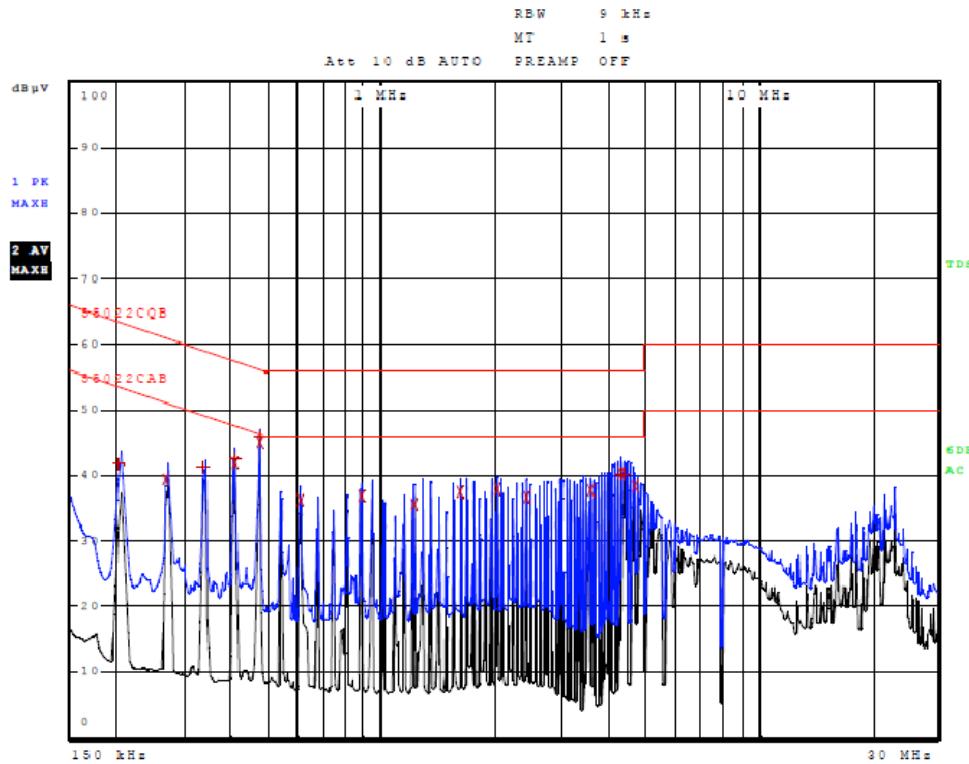

**AC Line Conducted Emissions Data (Highest Emissions)**

Line 1

Trace	Frequency	Level (dB $\mu$ V)	Detector	Delta Limit/dB
1	202.000000000 kHz	41.61	Quasi Peak	-21.91
2	270.000000000 kHz	39.35	Average	-11.77
1	338.000000000 kHz	41.27	Quasi Peak	-17.98
1	406.000000000 kHz	42.64	Quasi Peak	-15.09
2	406.000000000 kHz	41.83	Average	-5.90
1	470.000000000 kHz	45.83	Quasi Peak	-10.69
2	470.000000000 kHz	45.17	Average	-1.35
2	606.000000000 kHz	36.27	Average	-9.73
2	878.000000000 kHz	36.88	Average	-9.12
2	1.214000000 MHz	35.68	Average	-10.32
2	1.618000000 MHz	37.57	Average	-8.43
2	2.022000000 MHz	37.88	Average	-8.12
2	2.426000000 MHz	36.66	Average	-9.34
2	3.574000000 MHz	37.81	Average	-8.19
1	4.314000000 MHz	40.29	Quasi Peak	-15.71
2	4.318000000 MHz	40.52	Average	-5.48
1	4.382000000 MHz	40.29	Quasi Peak	-15.71
2	4.722000000 MHz	38.29	Average	-7.71

Line 2

Trace	Frequency	Level (dB $\mu$ V)	Detector	Delta Limit/dB
2	270.000000000 kHz	39.48	Average	-11.64
1	270.000000000 kHz	40.16	Quasi Peak	-20.96
1	338.000000000 kHz	40.25	Quasi Peak	-19.01
1	406.000000000 kHz	41.91	Quasi Peak	-15.82
2	406.000000000 kHz	41.06	Average	6.67
1	470.000000000 kHz	45.21	Quasi Peak	-11.30
2	470.000000000 kHz	44.52	Average	-1.99
2	606.000000000 kHz	35.29	Average	-10.71
2	878.000000000 kHz	36.16	Average	-9.84
2	1.214000000 MHz	35.63	Average	-10.37
1	1.550000000 MHz	35.99	Quasi Peak	-20.01
2	1.618000000 MHz	37.15	Average	8.85
2	1.686000000 MHz	36.40	Average	-9.60
2	2.362000000 MHz	35.42	Average	-10.58
2	3.102000000 MHz	35.46	Average	-10.54
2	4.250000000 MHz	36.71	Average	-9.29
1	4.518000000 MHz	37.11	Quasi Peak	-18.89
2	4.722000000 MHz	35.17	Average	-10.83

Other emissions present had amplitudes at least 20 dB below the limit.


***Summary of Results for AC Line Conducted Emissions***

The EUT demonstrated compliance with the conducted emissions requirements of CFR47 Part 15C equipment. The EUT demonstrated minimum margin of 1.3 dB below the limit.


Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.

***General Radiated Emissions Test Procedure***

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the radiated frequency spectrum from 30 MHz to 40,000 MHz for the preliminary testing. Refer to figures three through ten for plots of the general radiated emissions spectrum taken in a screen room. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 60,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 6000 MHz, Log Periodic from 200 MHz to 5 GHz and or double Ridge or pyramidal horns and mixers from 4 GHz to 60 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

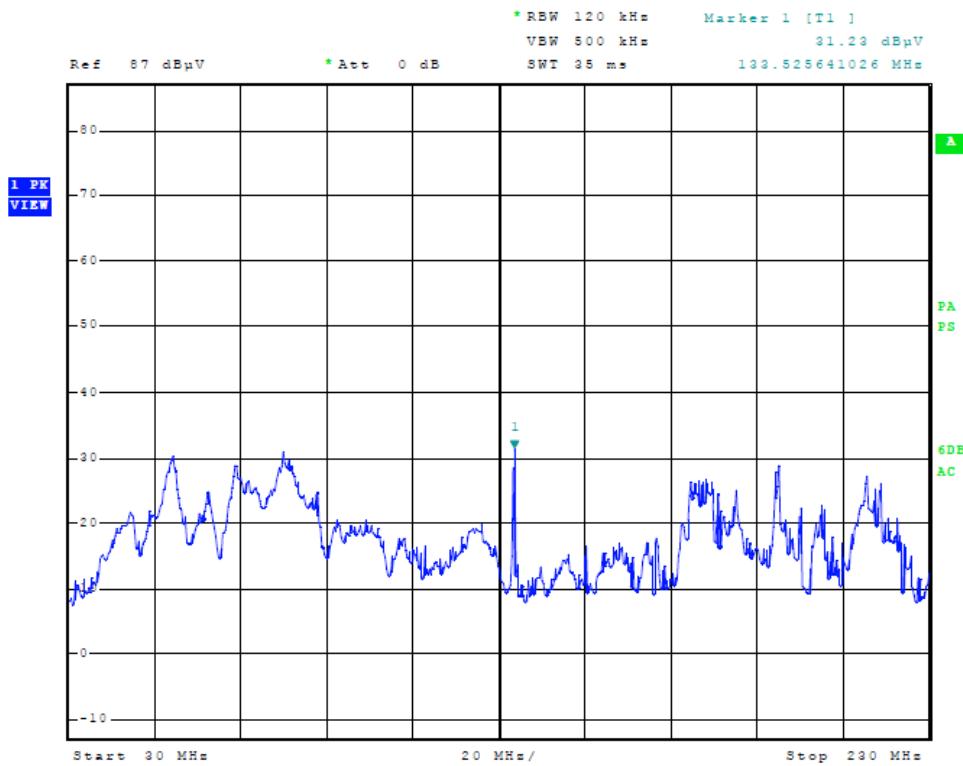

**Figure Three General Radiated Emissions taken at 1 meter in screen room**

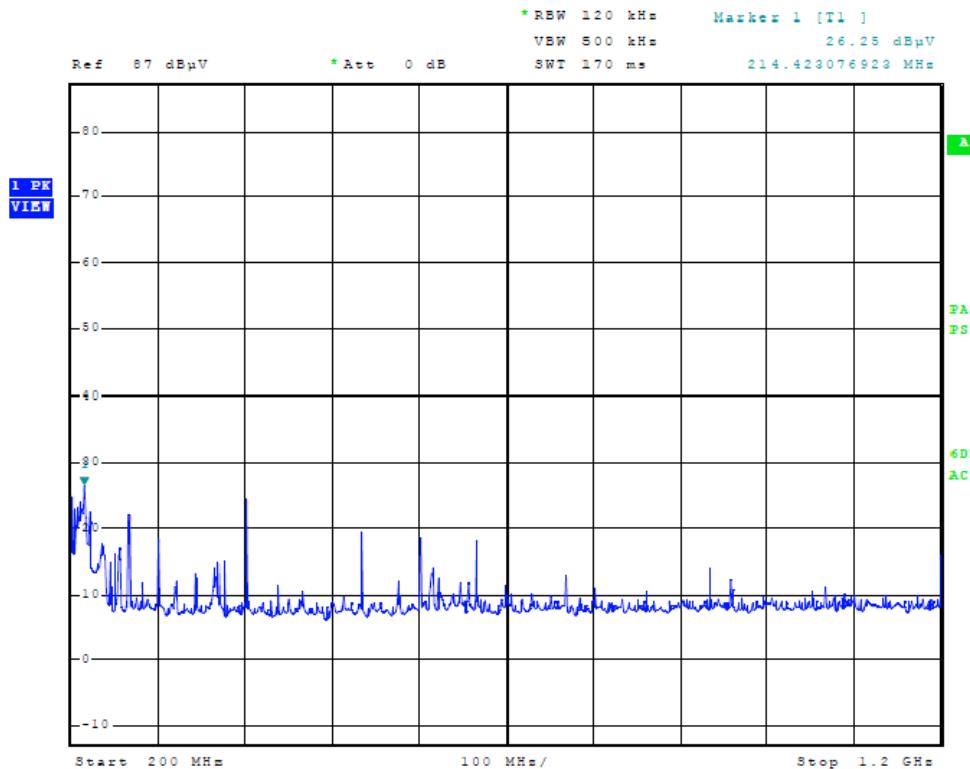

**Figure Four General Radiated Emissions taken at 1 meter in screen room**

Rogers Labs, Inc.  
 4405 W. 259th Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 1

Ligowave LLC  
 Model: FWBD01  
 Test #: 101229  
 Test to: CFR47 (15.247) and RSS-210  
 File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
 FCC ID#: V2V-FWBD01  
 IC: 7607A-FWBD01  
 Date: February 16, 2011  
 Page 18 of 47

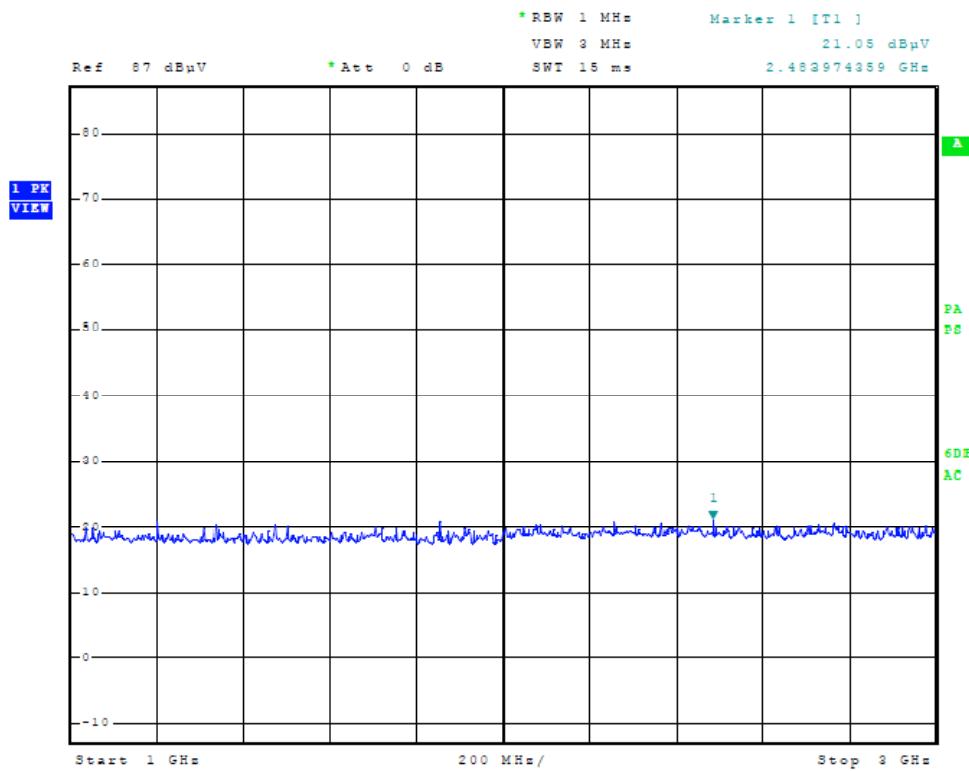


Figure Five General Radiated Emissions taken at 1 meter in screen room

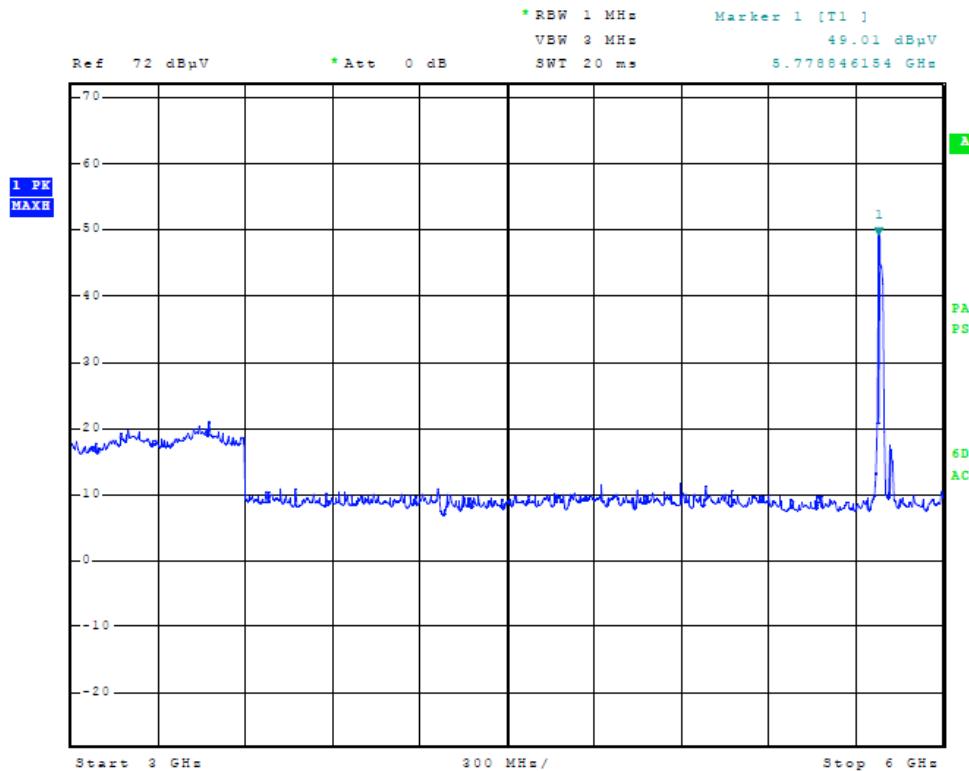


Figure Six General Radiated Emissions taken at 1 meter in screen room

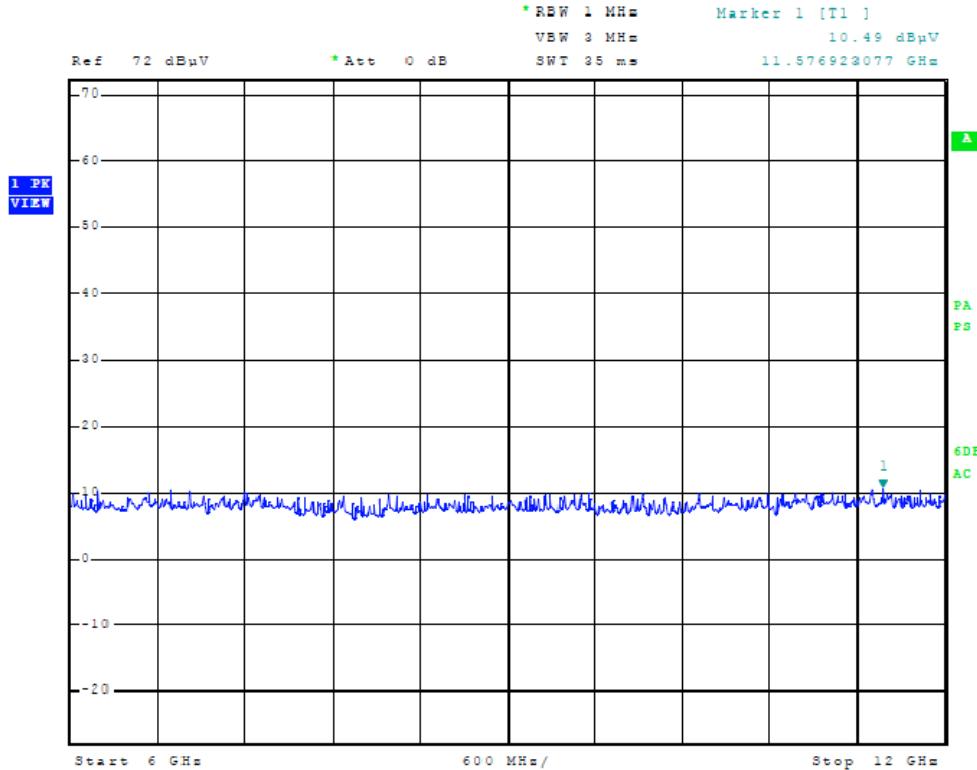


Figure Seven General Radiated Emissions taken at 1 meter in screen room

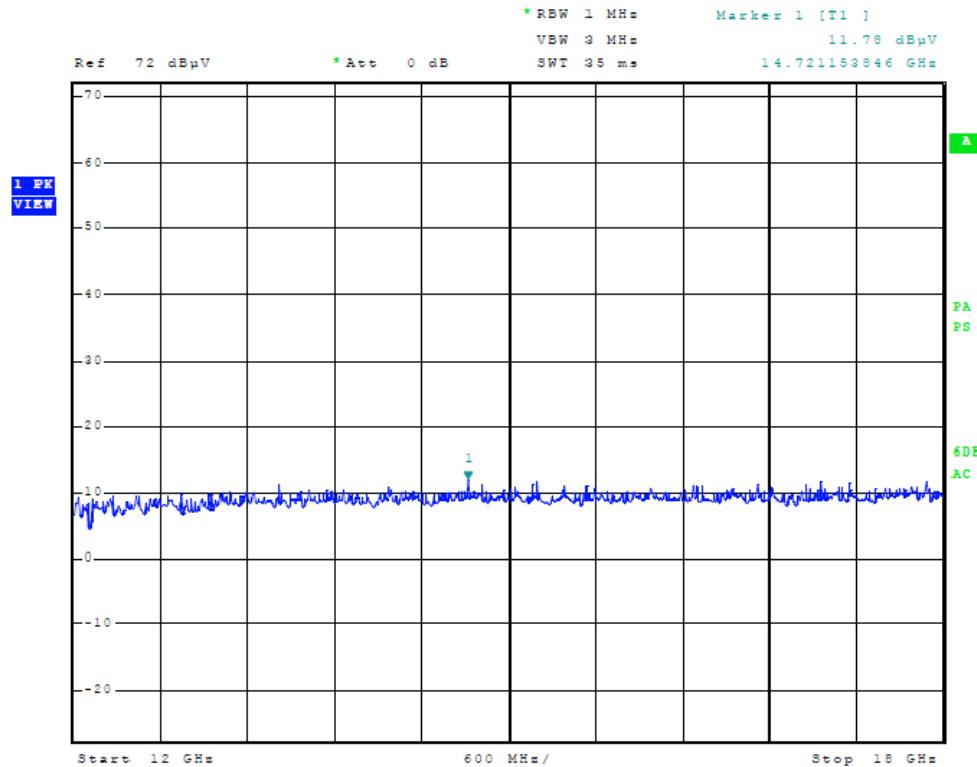


Figure Eight General Radiated Emissions taken at 1 meter in screen room

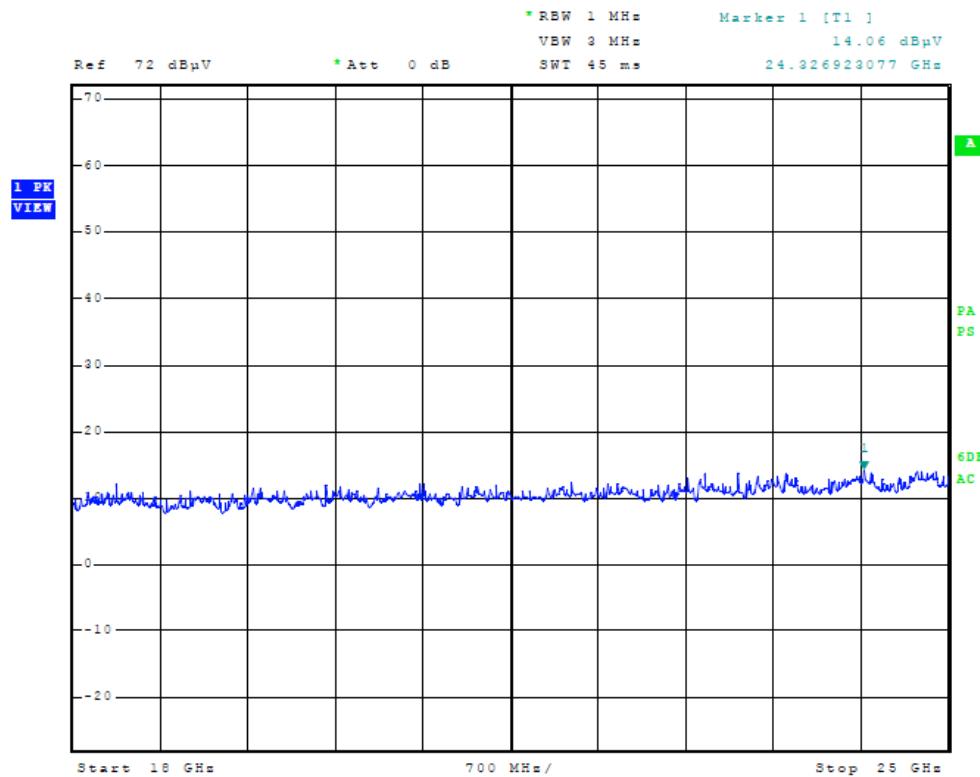


Figure Nine General Radiated Emissions taken at 1 meter in screen room

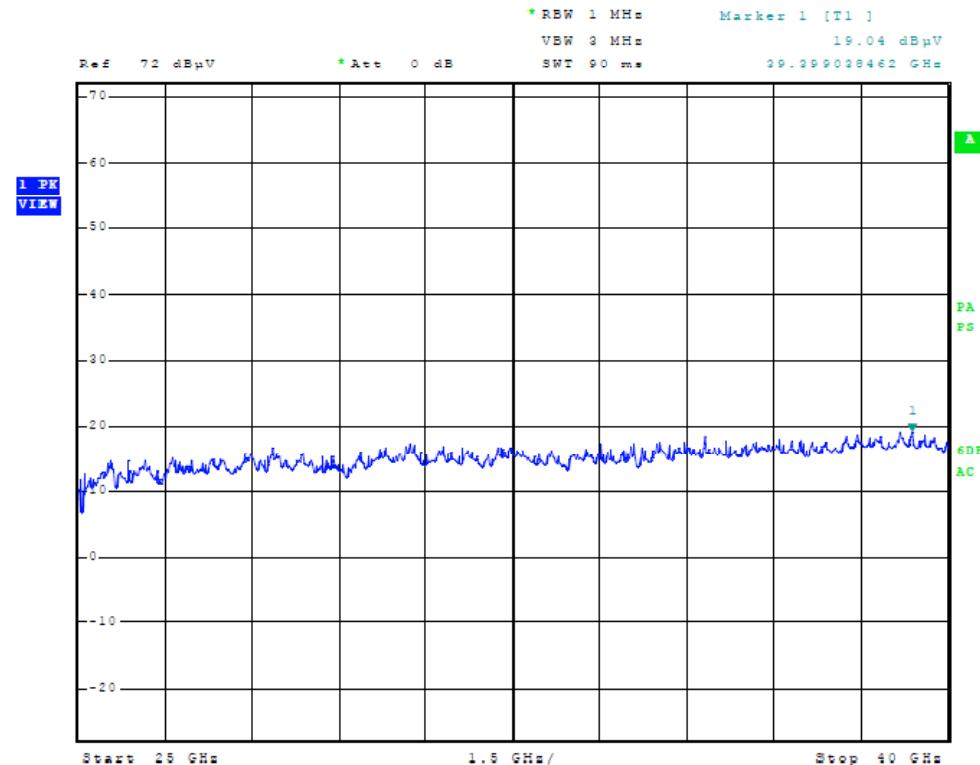


Figure Ten General Radiated Emissions taken at 1 meter in screen room

**Radiated Emissions Data from EUT (Highest Emissions)**

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
52.8	41.6	50.2	7.6	30	19.2	27.8	40.0
69.0	47.3	50.3	8.1	30	25.4	28.4	40.0
80.6	43.9	49.6	7.9	30	21.8	27.5	40.0
80.9	42.4	46.4	7.9	30	20.3	24.3	40.0
133.0	43.3	48.6	13.5	30	26.8	32.1	43.5
194.2	40.1	39.5	12.2	30	22.3	21.7	43.5
195.4	40.2	38.7	12.2	30	22.4	20.9	43.5
199.9	41.6	39.6	13.1	30	24.7	22.7	43.5
215.0	43.1	40.1	11.1	30	24.2	21.2	43.5
215.6	42.9	39.5	11.1	30	24.0	20.6	43.5
400.0	48.3	45.3	16.1	30	34.4	31.4	46.0

Other emissions present had amplitudes at least 20 dB below the limit.

**Summary of Results for General Radiated Emissions**


The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 Intentional Radiators. The EUT demonstrated a minimum margin of 11.4 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

**Statement of Modifications and Deviations**

A ferrite bead (Steward Part number 28A2025-0A3) was placed on the AC power line at the Poe adapter to reduce to radiated emissions. No other modifications to the EUT were required for the equipment to demonstrate compliance with the CISPR 22 or CFR47 and RSS-210 emissions requirements. There were no deviations or exceptions to the specifications.

### ***Operation in the Band 5725 – 5850 MHz Test Procedure***

The power output was measured at the antenna port and open area test site (OATS) at a three-meter distance. The EUT was placed on a wooden turntable 0.8 meters above the OATS ground plane at a distance of 3 meters from the FSM antenna during radiated emissions testing. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz including were measured using a spectrum analyzer and data recorded from the analyzer measurement result. Plots were made of transmitter performance taken in a screen room for reference purposes. Refer to figures eleven through thirty-one showing plots taken of the EUT performance displaying compliance with the specifications.

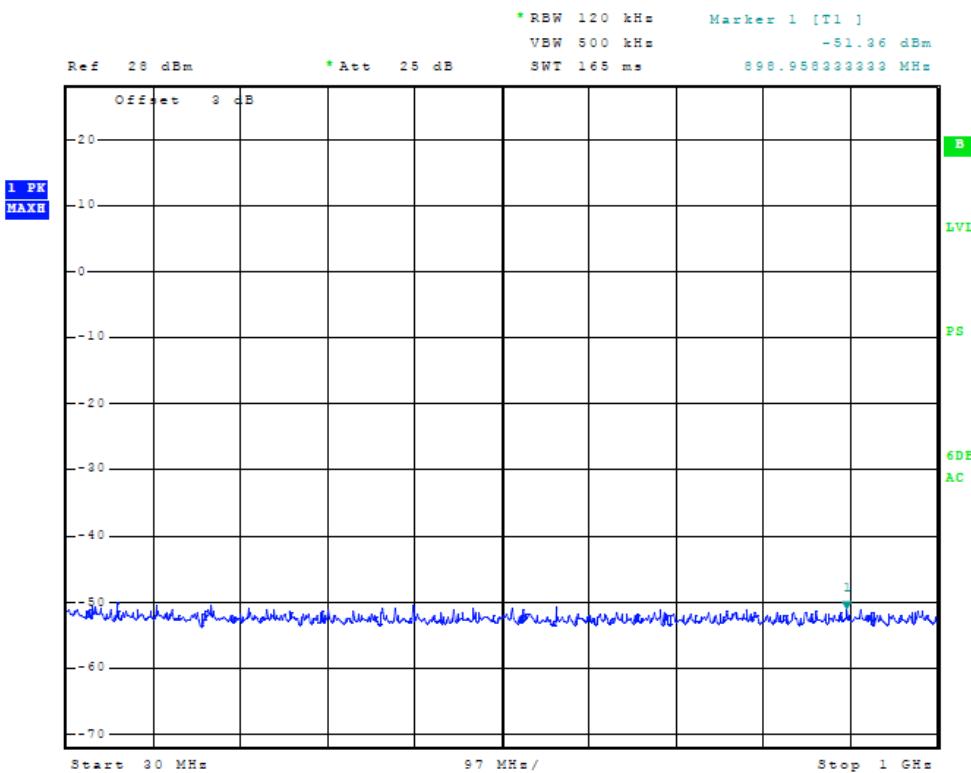

**Figure Eleven Plot of Antenna Port conducted emissions**

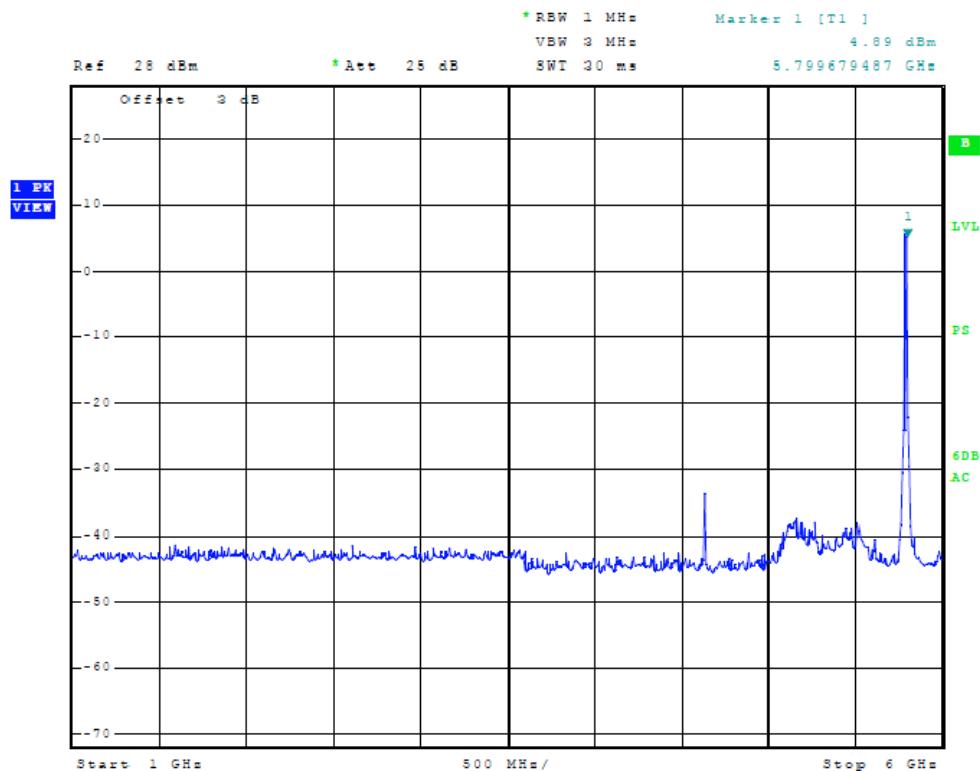


Figure Twelve Plot of Antenna Port conducted emissions

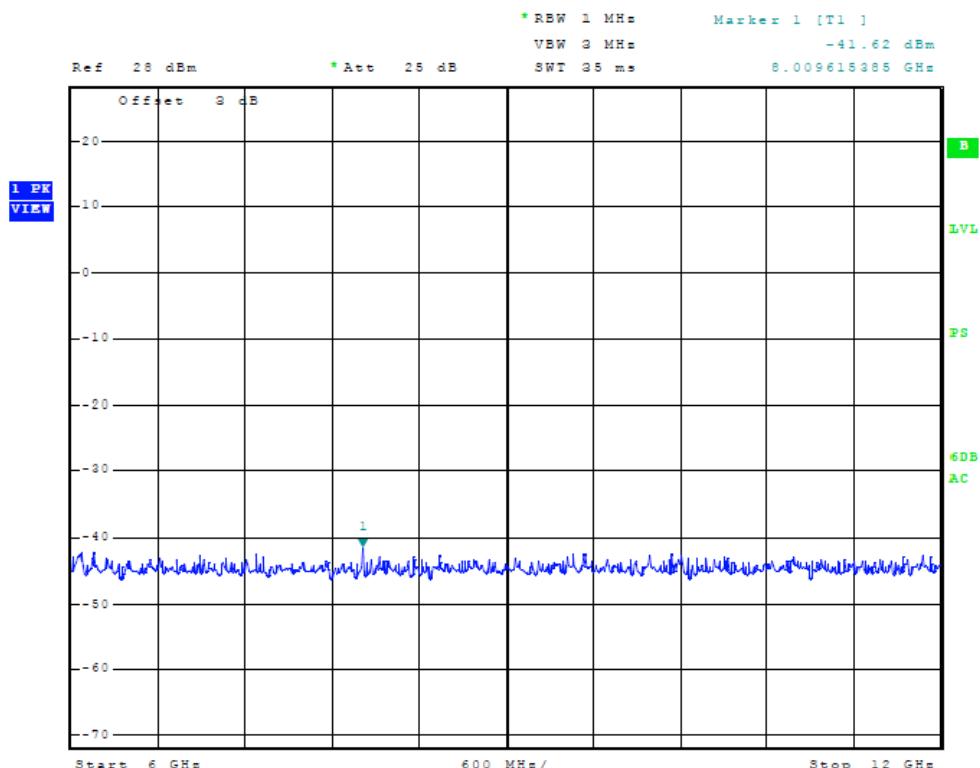


Figure Thirteen Plot of Antenna Port conducted emissions

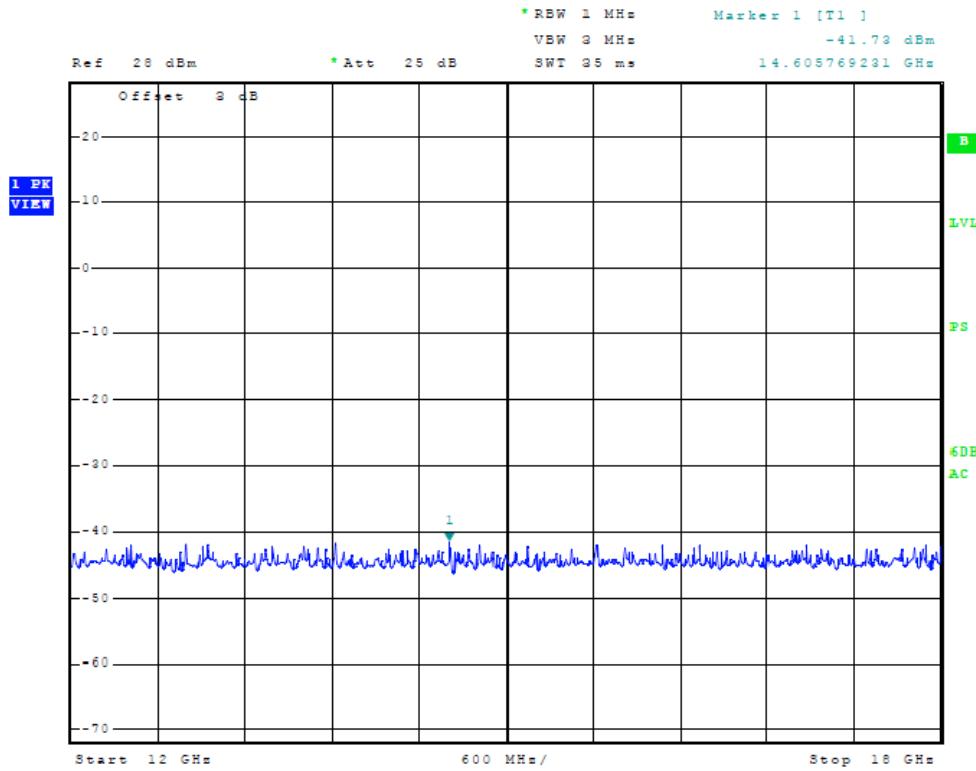


Figure Fourteen Plot of Antenna Port conducted emissions



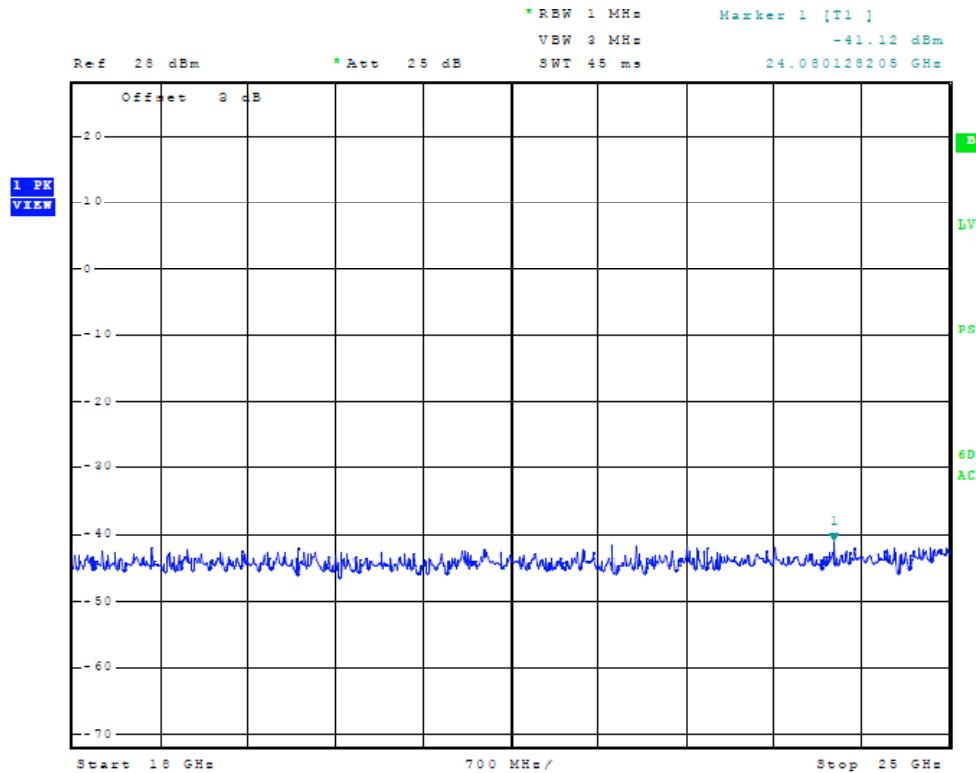


Figure Fifteen Plot of Antenna Port conducted emissions

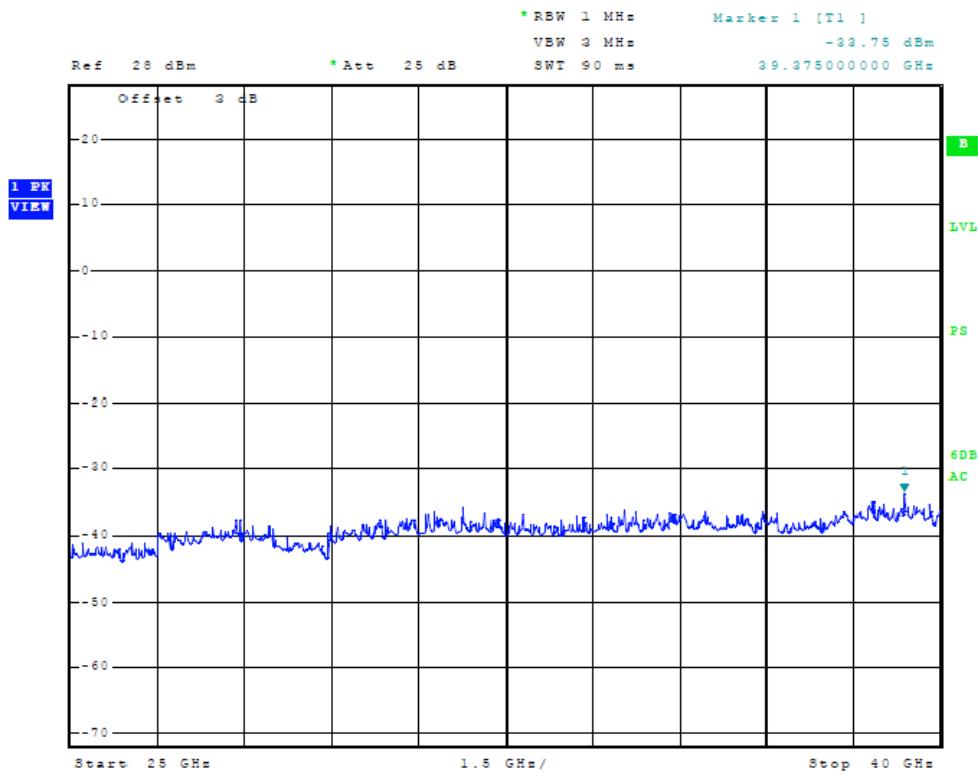

## Figure Sixteen Plot of Antenna Port conducted emissions

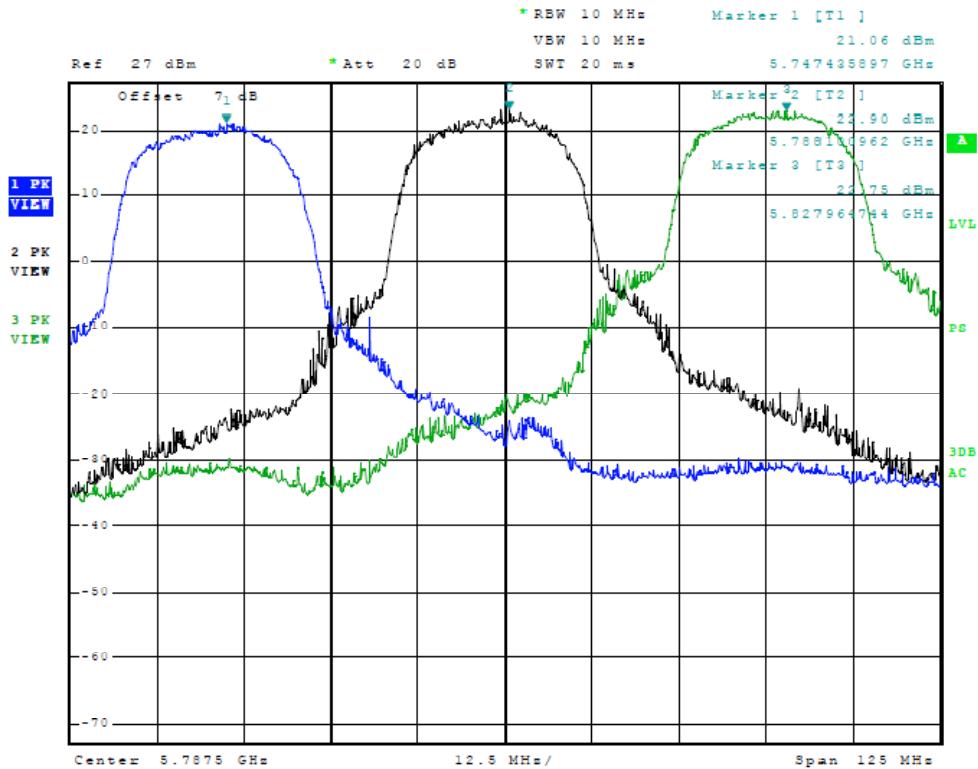

## Figure Seventeen Plot of Output Power in Band

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 26 of 47

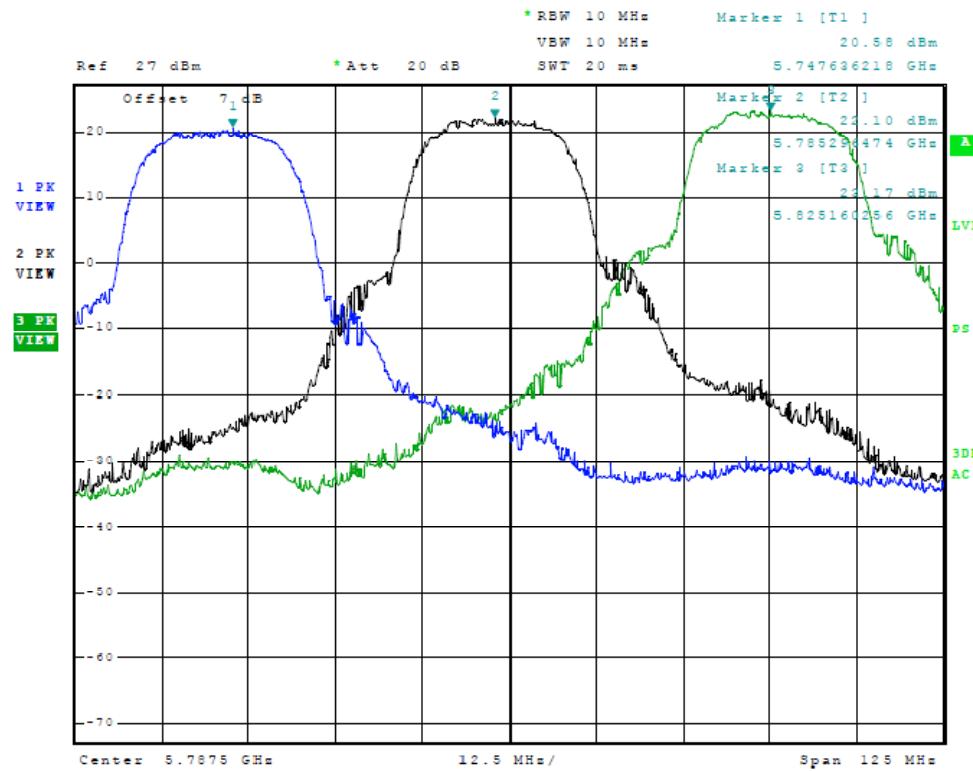


Figure Eighteen Plot of Output Power in Band

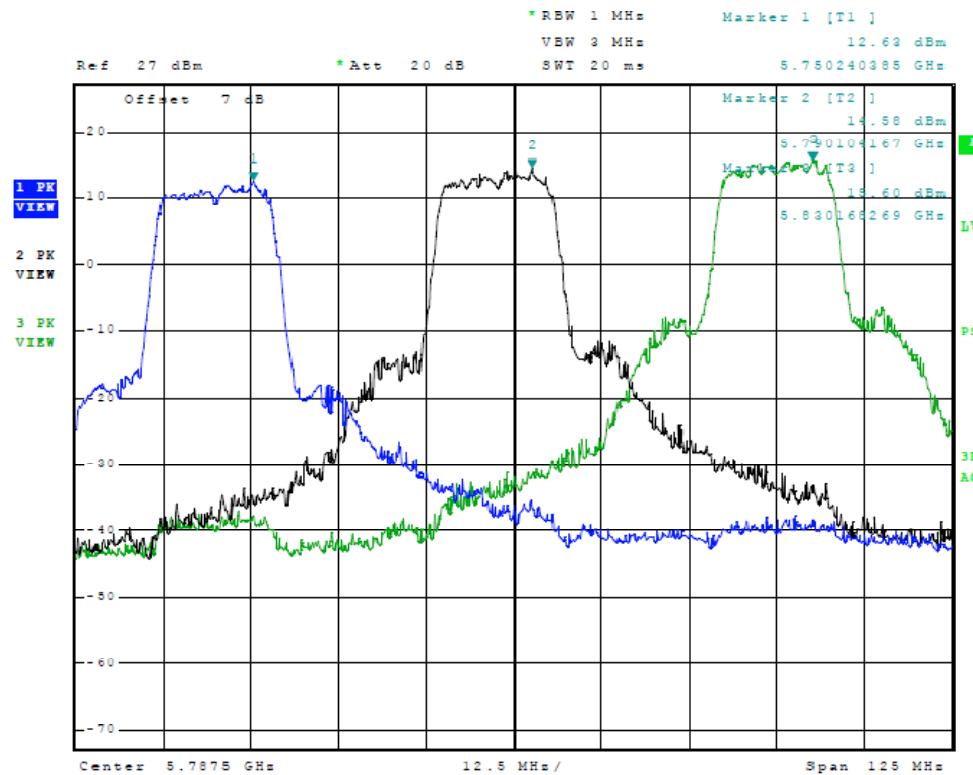


Figure Nineteen Plot of Output Power in Band

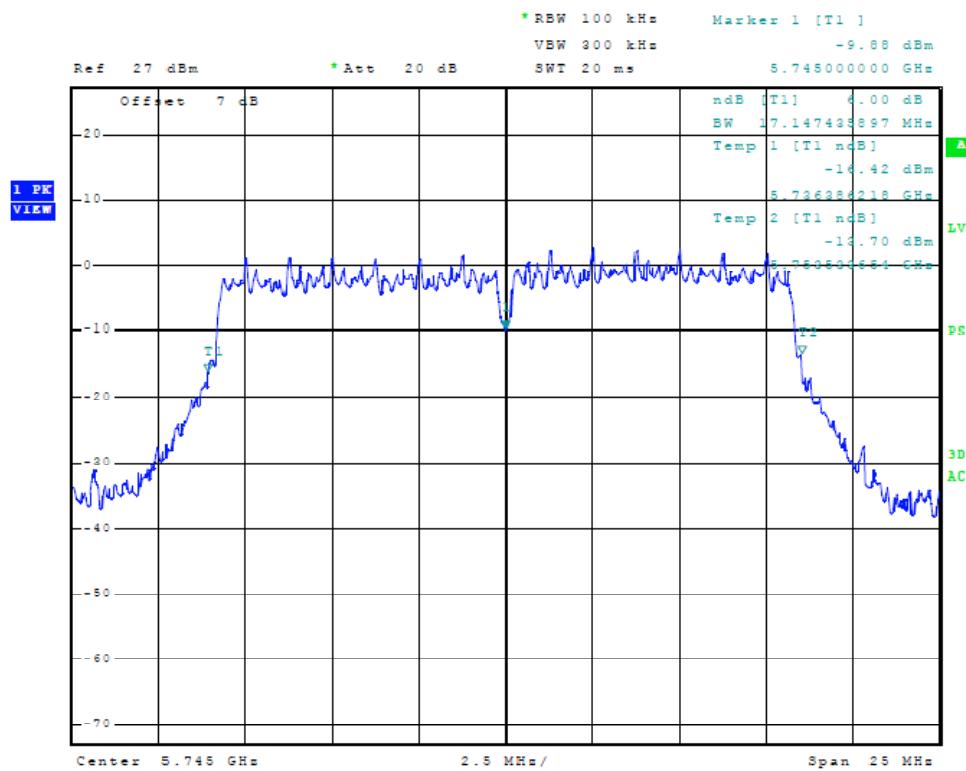


Figure Twenty Plot of 6dB Band width (OFDM Mode, 5745 MHz)



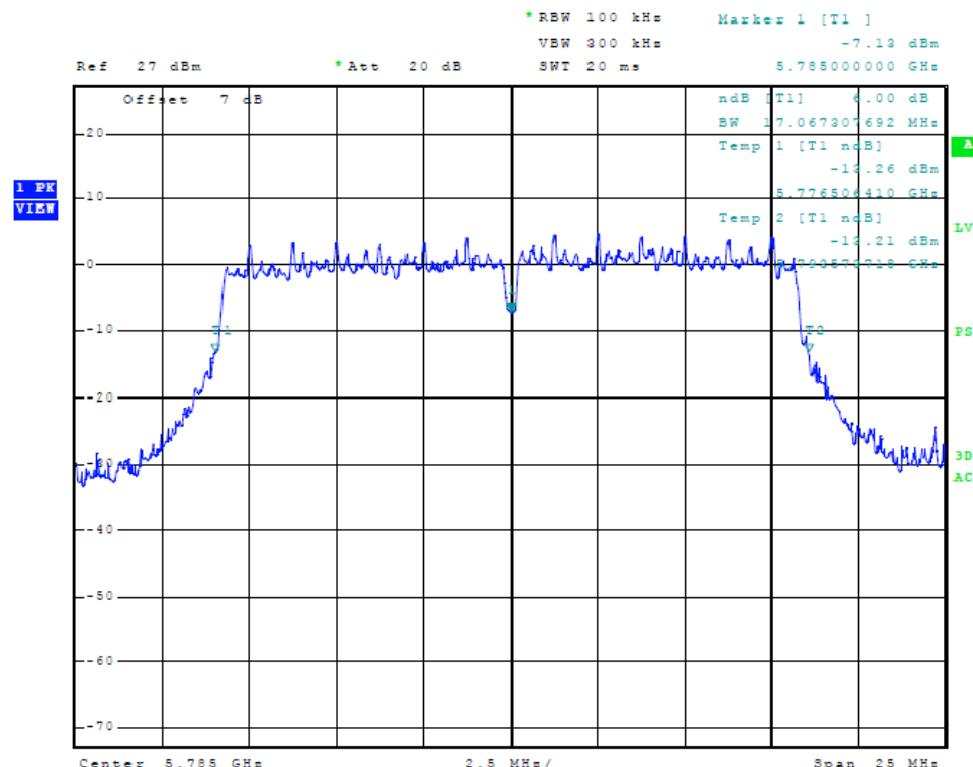


Figure Twenty-one Plot of 6dB Band width (OFDM Mode, 5785 MHz)

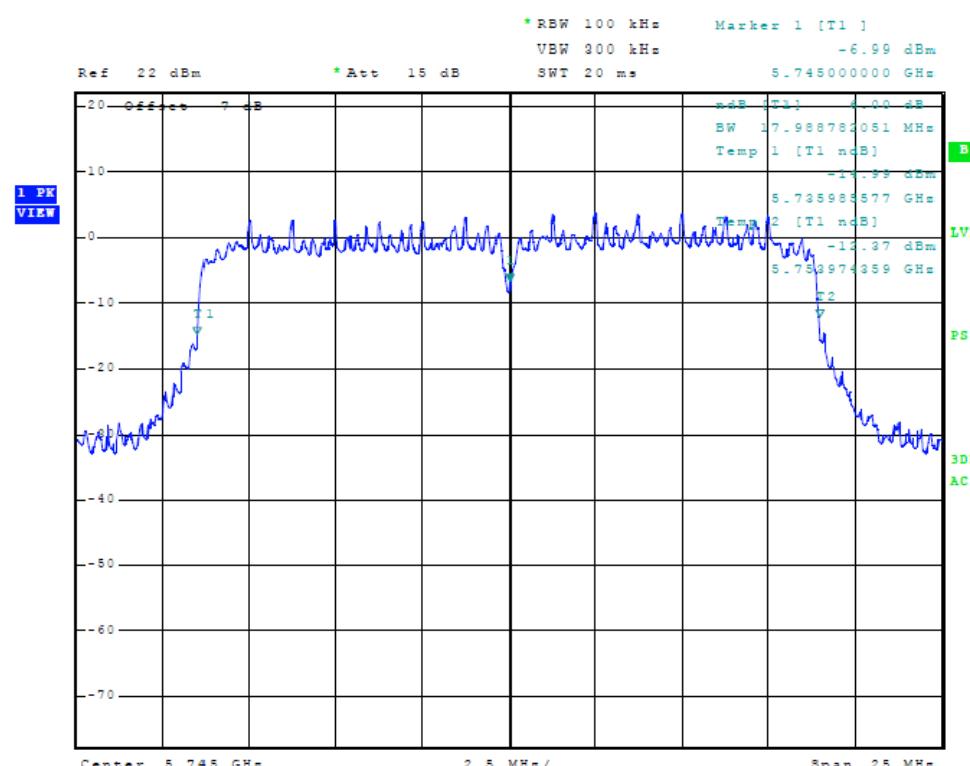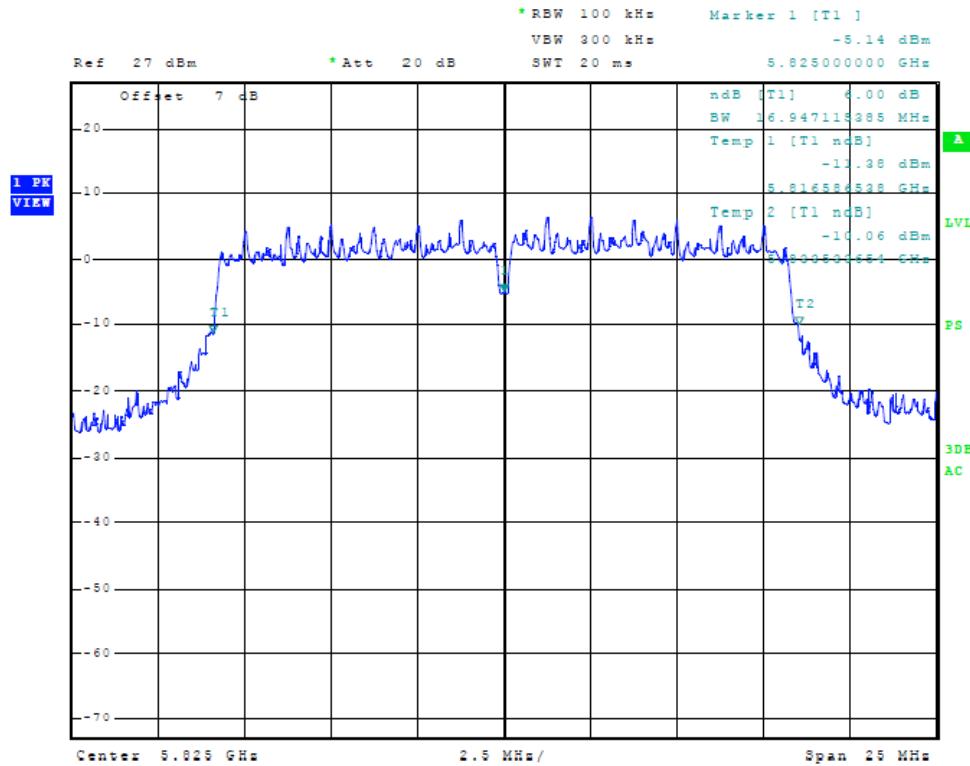

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 29 of 47

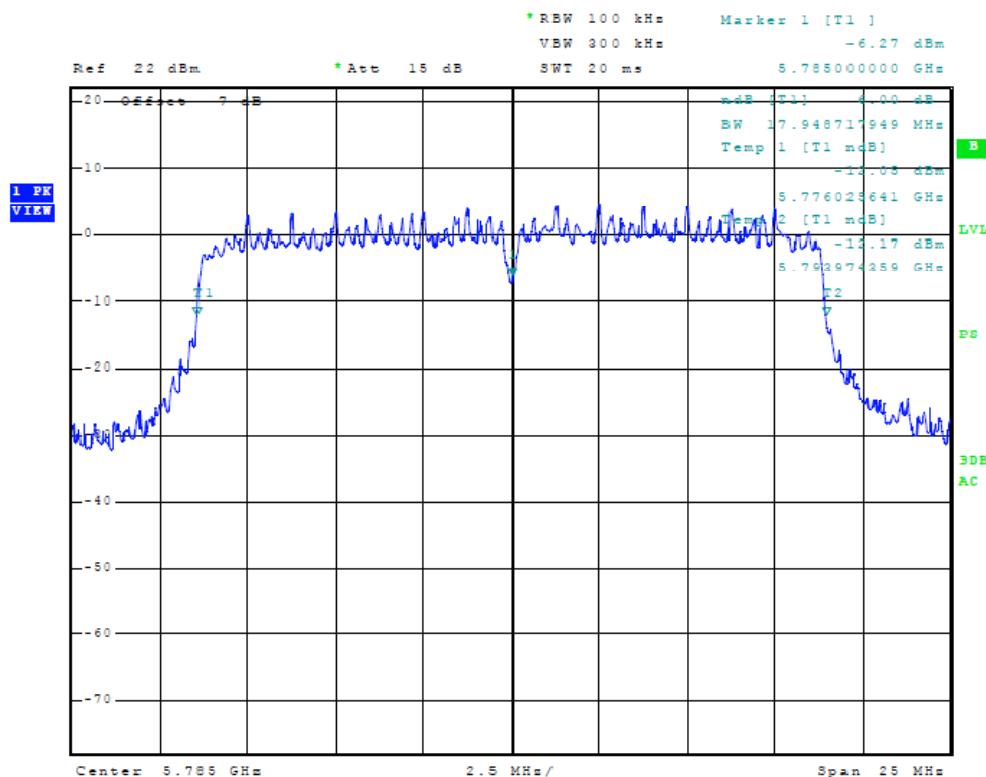


Figure Twenty-four Plot of 6dB Band width (20 MHz mode, 5785 MHz)

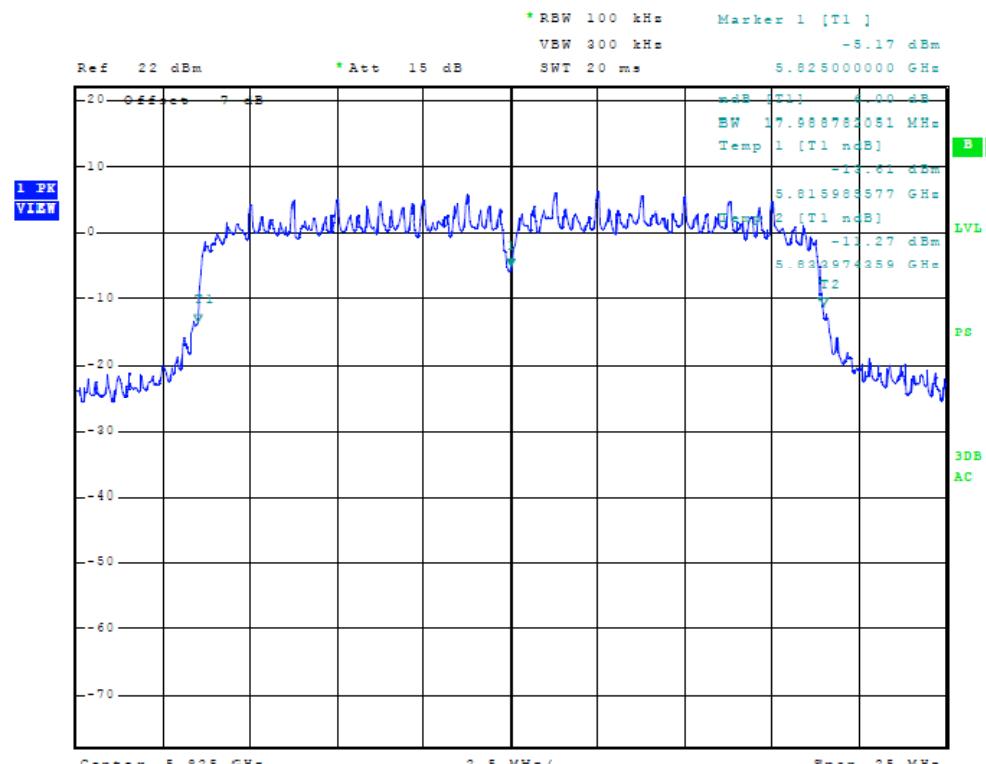


Figure Twenty-five Plot of 6dB Band width (20 MHz mode, 5825 MHz)

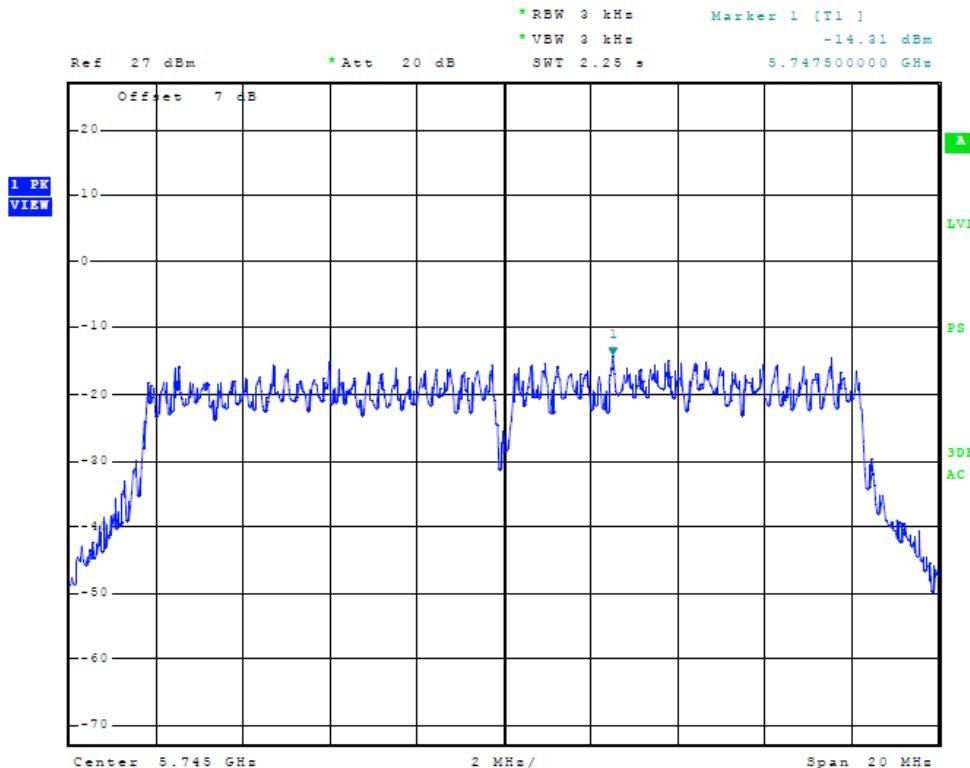


Figure Twenty-six Plot Power Spectral Density (OFDM Mode, 5745 MHz)

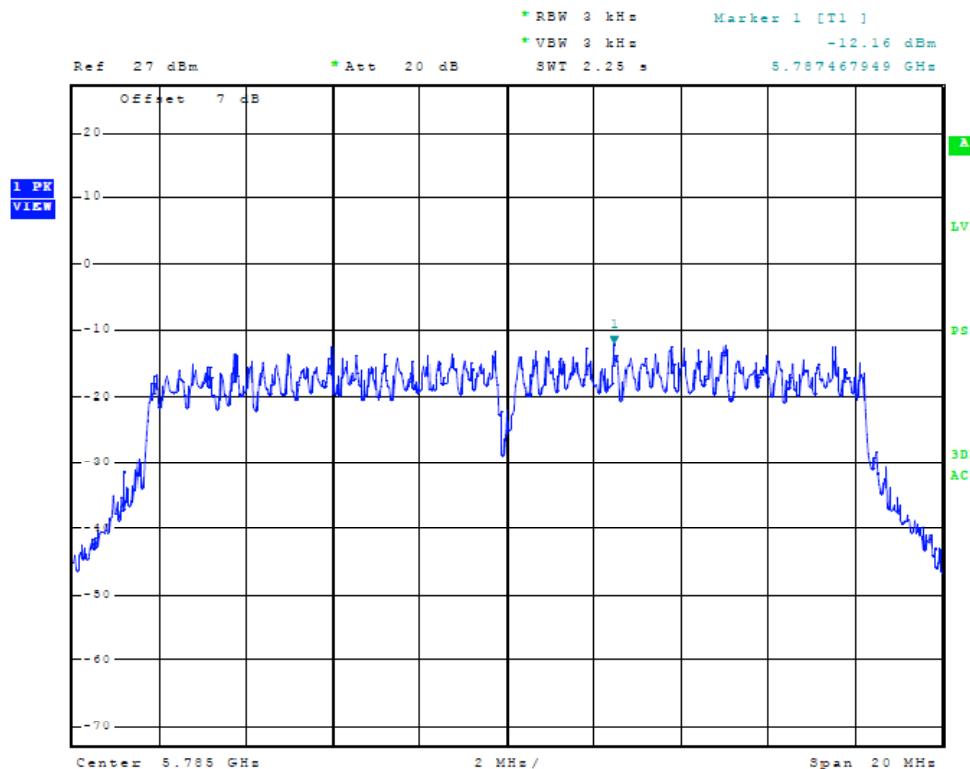


Figure Twenty-seven Plot of Power Spectral Density (OFDM Mode, 5785 MHz)

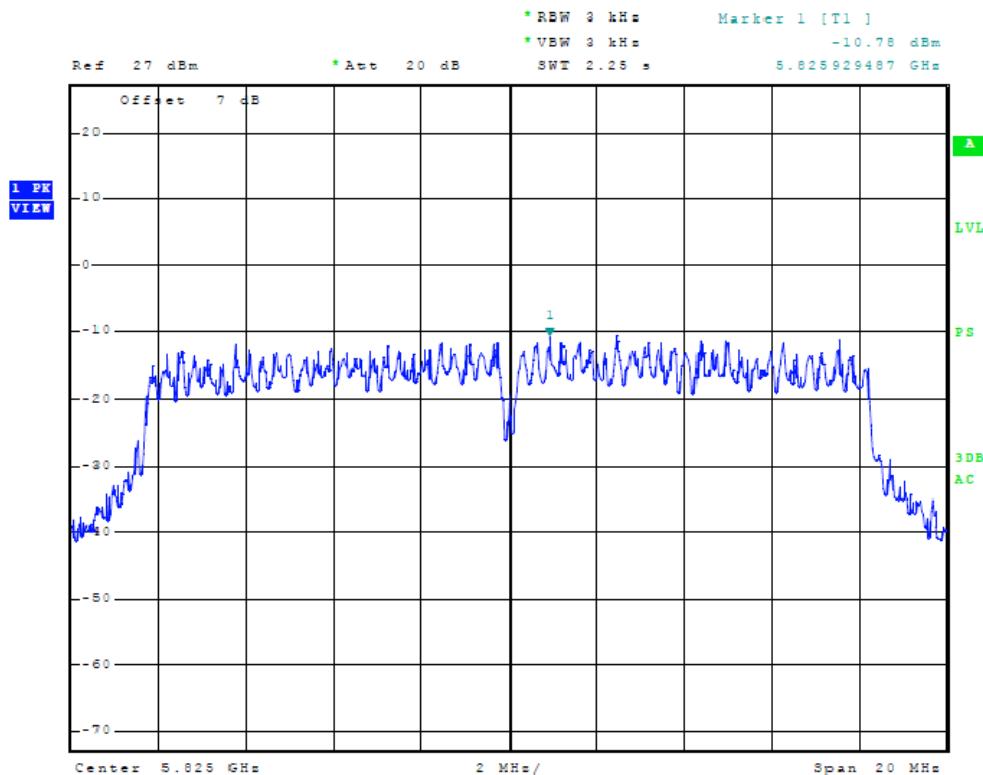


Figure Twenty-eight Plot of Power Spectral Density (OFDM Mode, 5825 MHz)

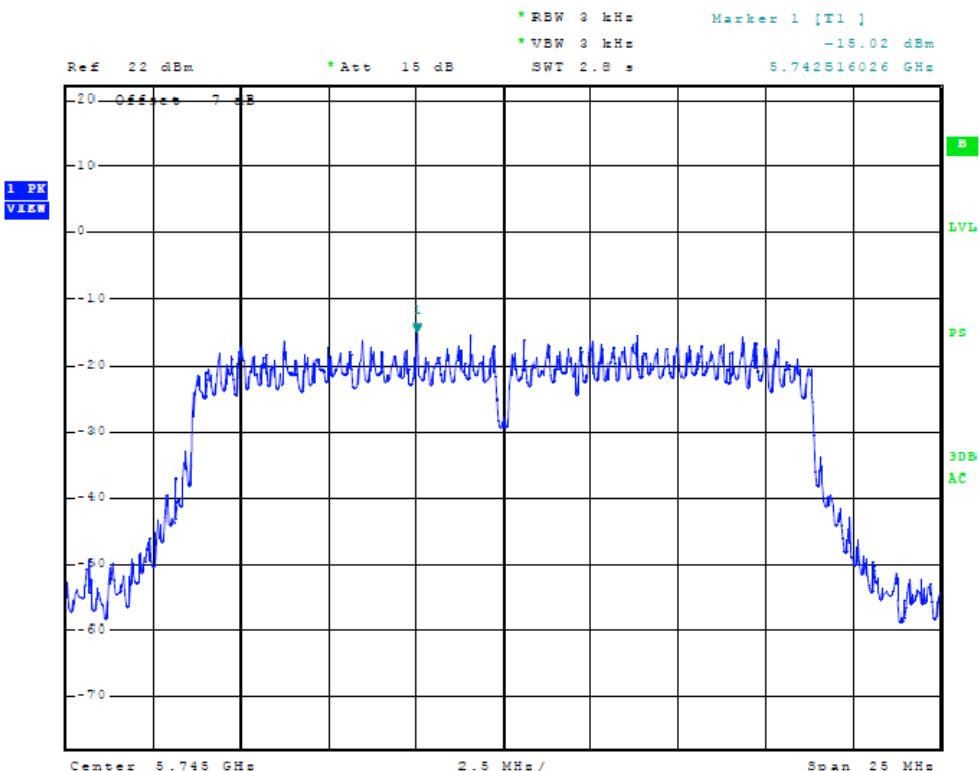


Figure Twenty-nine Plot Power Spectral Density (20 MHz Mode, 5745 MHz)

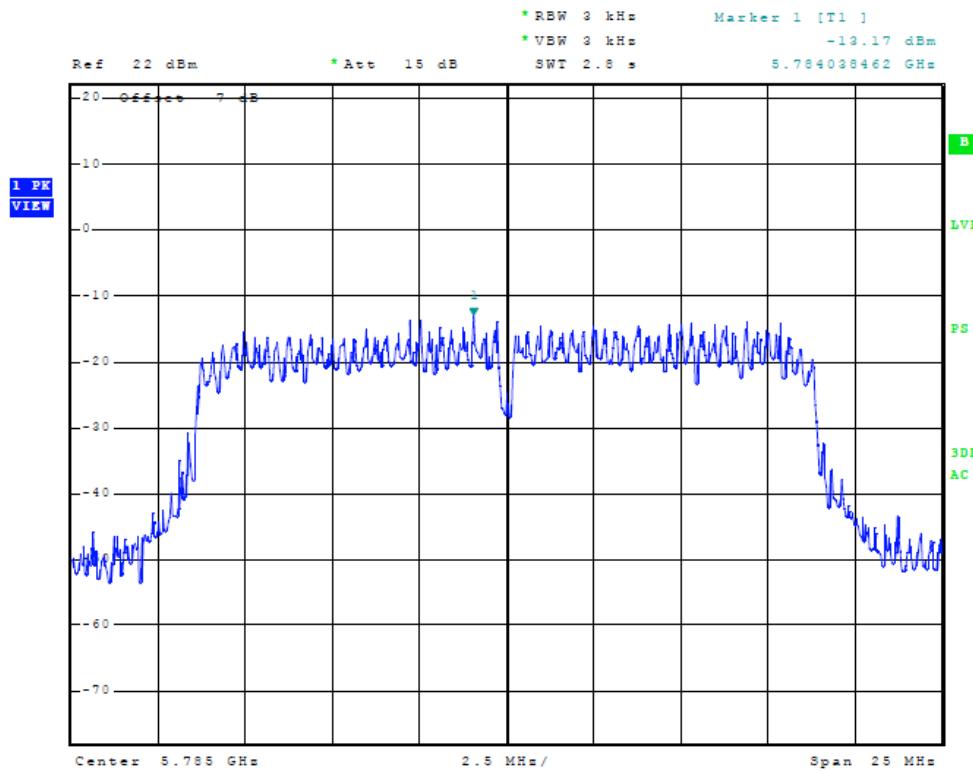


Figure Thirty Plot of Power Spectral Density (20 MHz Mode, 5785 MHz)

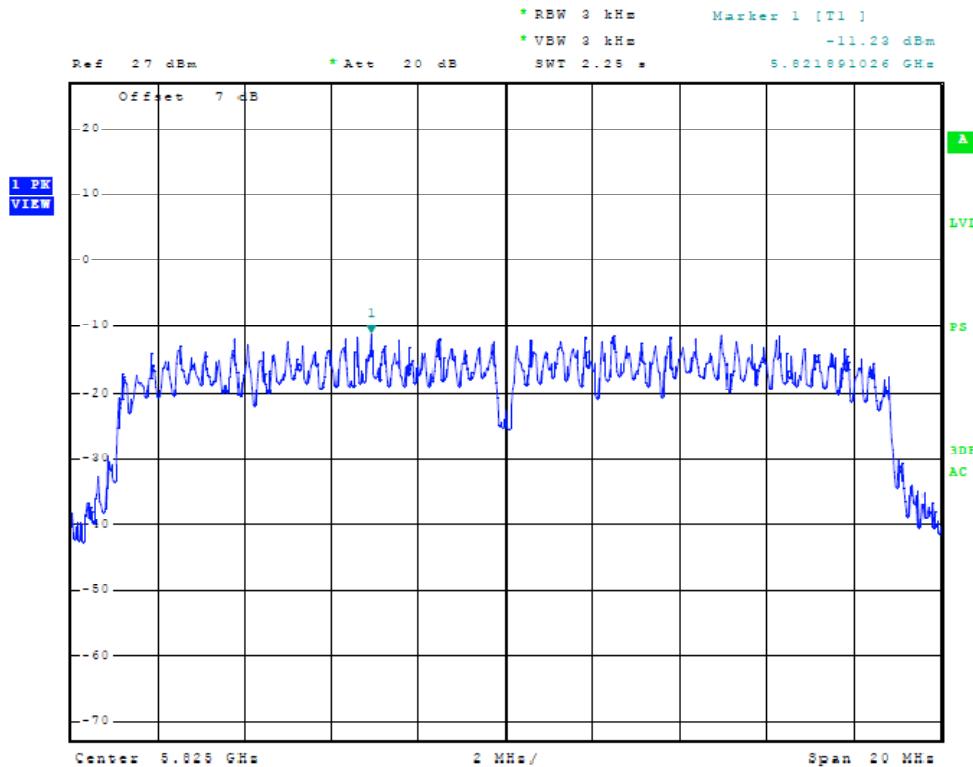


Figure Thirty-one Plot of Power Spectral Density (20 MHz Mode, 5825 MHz)

### Transmitter Radiated Emissions Data

#### Transmitter Radiated Emission Panel Antenna (Worst-Case)

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
5745.0	57.8	57.5	39.7	0	97.5	97.2	--
11490.0	21.6	22.1	39.9	25	36.5	37.0	54.0
17235.0	19.7	19.6	48.1	25	42.8	42.7	54.0
22980.0	8.1	8.5	37.1	25	20.2	20.6	54.0
28725.0	10.3	10.4	41.9	25	27.2	27.3	54.0
5785.0	56.9	57.2	39.3	0	96.2	96.5	--
11570.0	21.8	22.1	39.9	25	36.7	37.0	54.0
17355.0	20.5	20.5	48.1	25	43.6	43.6	54.0
23140.0	9.4	9.7	37.1	25	21.5	21.8	54.0
28925.0	10.3	10.5	37.2	25	22.5	22.7	54.0
5825.0	58.2	58.6	39.4	0	97.6	98.0	--
11650.0	21.9	22.1	39.9	25	36.8	37.0	54.0
17475.0	19.6	19.6	48.1	25	42.7	42.7	54.0
23300.0	7.4	7.6	37.1	25	19.5	19.7	54.0
29125.0	10.0	10.1	37.1	25	22.1	22.2	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

#### Transmitter Radiated Emission Dish Antenna (Worst-Case)

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
5745.0	58.4	58.2	39.7	0	98.1	97.9	--
11490.0	21.2	21.1	39.9	25	36.1	36.0	54.0
17235.0	19.5	19.5	48.1	25	42.6	42.6	54.0
22980.0	8.4	8.7	37.1	25	20.5	20.8	54.0
28725.0	10.5	10.9	41.9	25	27.4	27.8	54.0
5785.0	61.4	61.6	39.3	0	100.7	100.9	--
11570.0	21.1	21.1	39.9	25	36.0	36.0	54.0
17355.0	20.4	20.3	48.1	25	43.5	43.4	54.0
23140.0	9.0	8.9	37.1	25	21.1	21.0	54.0
28925.0	10.3	10.2	37.2	25	22.5	22.4	54.0
5825.0	60.3	61.1	39.4	0	99.7	100.5	--
11650.0	20.5	19.6	39.9	25	35.4	34.5	54.0
17475.0	19.5	18.6	48.1	25	42.6	41.7	54.0
23300.0	8.6	8.5	37.1	25	20.7	20.6	54.0
29125.0	10.2	10.1	37.1	25	22.3	22.2	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

### **Transmitter Antenna Port conducted Emission Data**

The antenna conducted output power, power spectral density, and 6-dB bandwidth were measured while operating in available modes. The data reported below represents the worst-case operational conditions.

Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth MHz	Power Spectral Density dBm
OFDM-Mode			
5745.0	20.58	17,147	-14.3
5785.0	22.14	17,067	-12.2
5825.0	23.49	16,947	-10.8
20 MHz-Mode			
5745.0	21.06	17,988	-14.1
5785.0	22.90	17,949	-12.4
5825.0	22.75	17,988	-11.2

### **Summary of Results for Radiated Emissions of Intentional Radiator**

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15.247 and RSS-210 with highest radiated peak emission level measured of 118.1 dB $\mu$ V/m. Peak antenna port output power measured on single output port was 23.49 dBm (operation as MIMO equipment maximum output power of both chains 26.4 dBm. The EUT demonstrated a minimum margin of 10.4 dB below the harmonic emissions requirements. The EUT demonstrated compliance with the radiated emissions requirements for CFR47 Part 15.247 and RSS-210 Intentional Radiators. There are no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. The specifications of 15.247 and RSS-210 were met; there are no deviations or exceptions to the requirements.


### **Statement of Modifications and Deviations**

A ferrite bead (Steward Part number 28A2025-0A3) was placed on the AC power line at the Poe adapter to reduce to radiated emissions. No other modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C and RSS-210 emissions standards. There were no deviations to the specifications.

## Receiver Emissions

### Receiver Antenna Port Conduction

receivers which provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of 15.109 with the antenna terminals shielded and terminated with a termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in 15.33 shall not exceed 2.0 nanowatts (-57 dBm). The antenna port was connected to a spectrum analyzer for testing the receiver antenna-conducted emissions. The antenna connection under test was connected to the spectrum analyzer through a short coaxial cable. The spectrum analyzer provided the 50-ohm load for the antenna port. The frequency spectrum was investigated at the antenna port with the worst case data presented. Refer to figures thirty-two through thirty-eight showing plots of the spectrum analyzer display of worst-case receiver antenna conduction emissions. Antenna Port conducted emissions data is shown below. Compliance to receiver radiated emissions requirements were tested both at antenna port and 3 meter OATS with worst-case data presented.

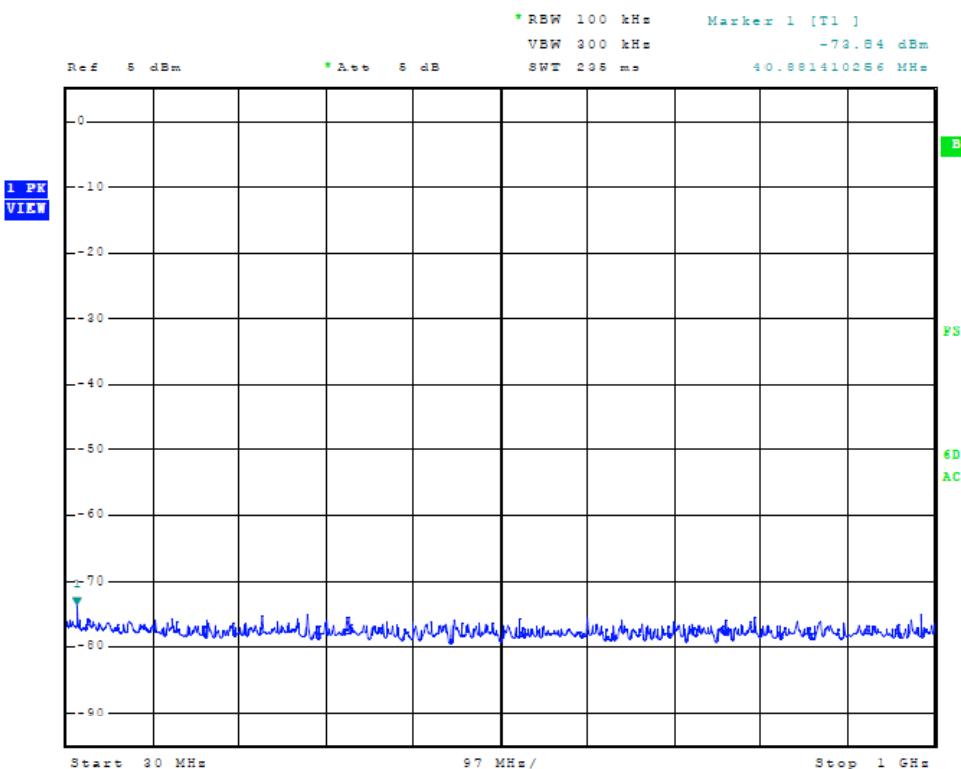

**Figure Thirty-two Plot of Receiver Antenna Port Conducted Emissions**

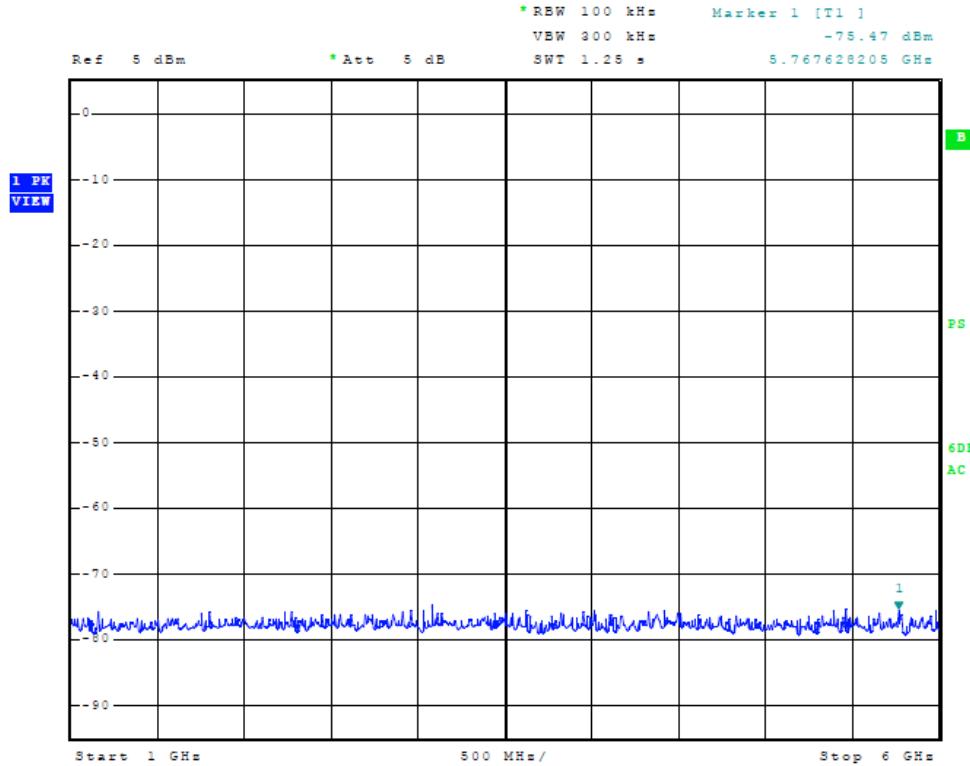


Figure Thirty-three Plot of Receiver Antenna Port Conducted Emissions

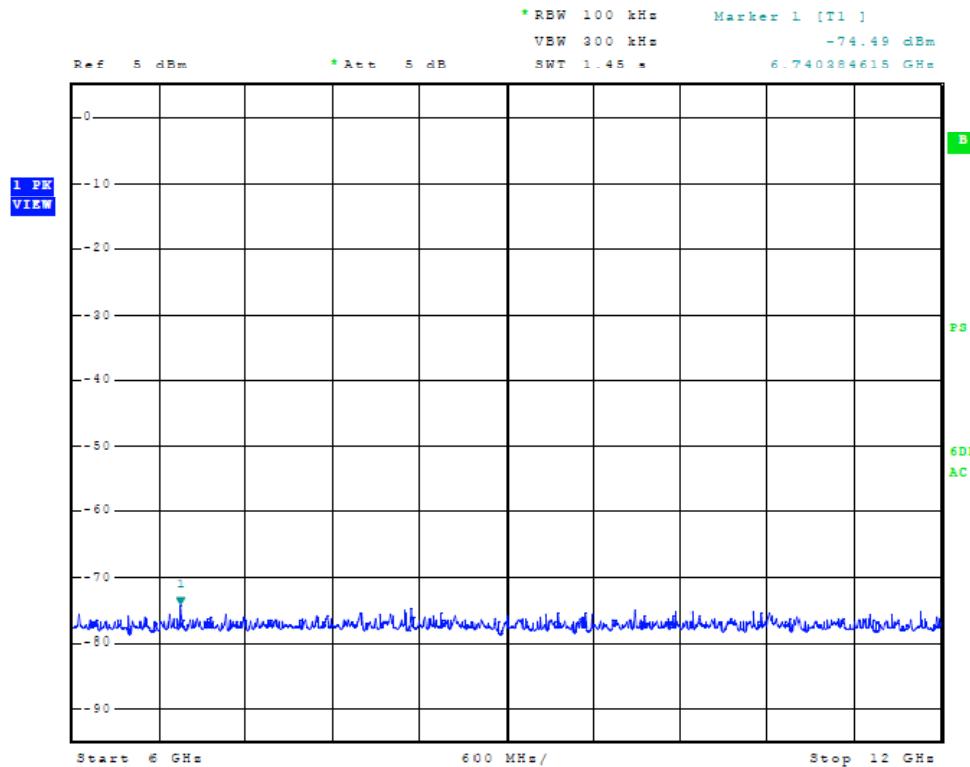


Figure Thirty-four Plot of Receiver Antenna Port Conducted Emissions

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 37 of 47

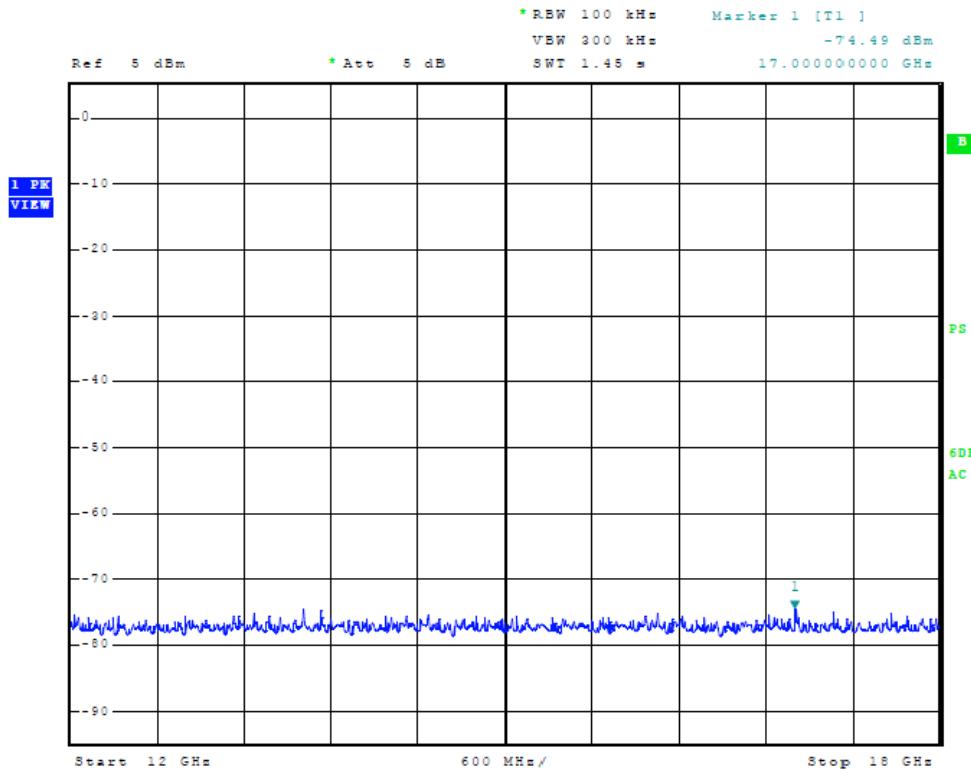


Figure Thirty-five Plot of Receiver Antenna Port Conducted Emissions

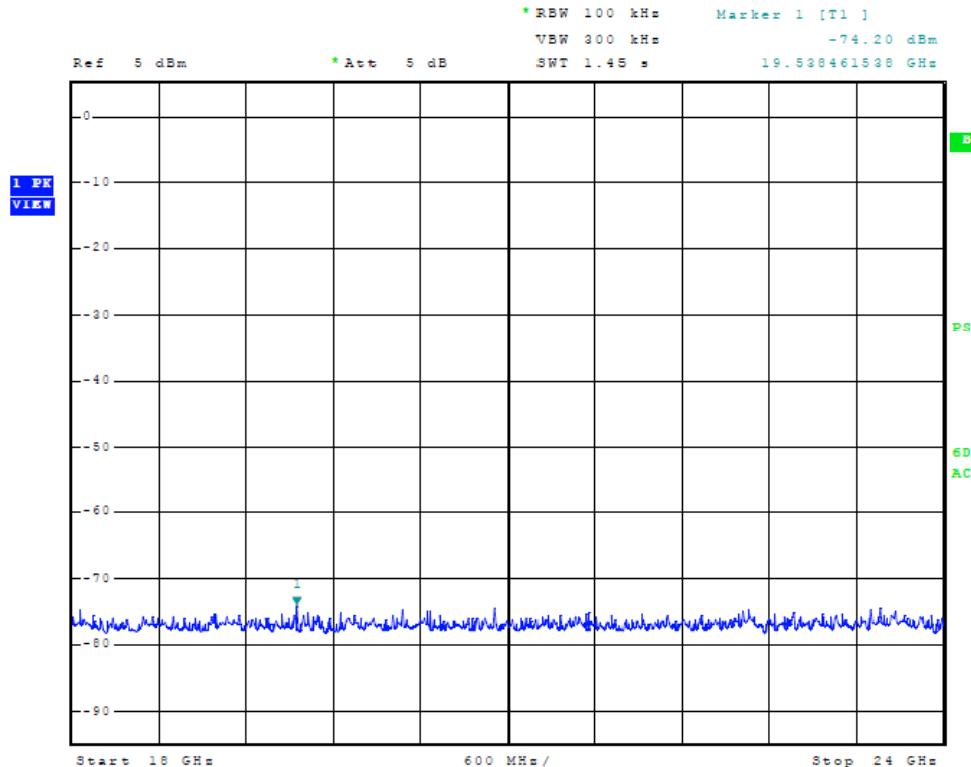


Figure Thirty-six Plot of Receiver Antenna Port Conducted Emissions

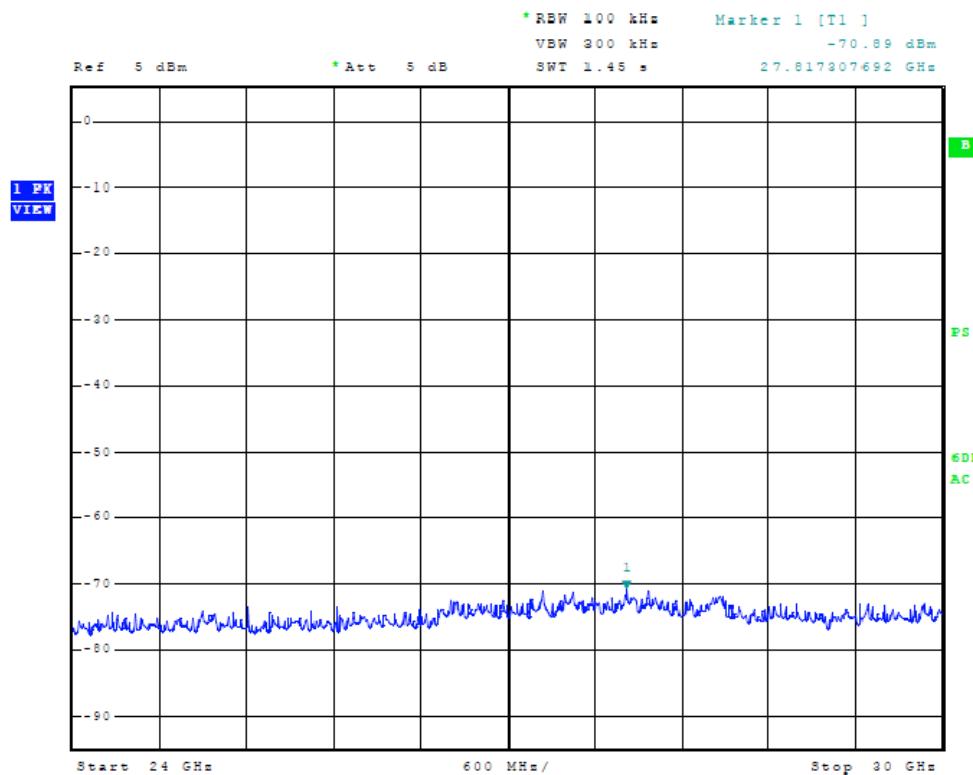


Figure Thirty-seven Plot of Receiver Antenna Port Conducted Emissions

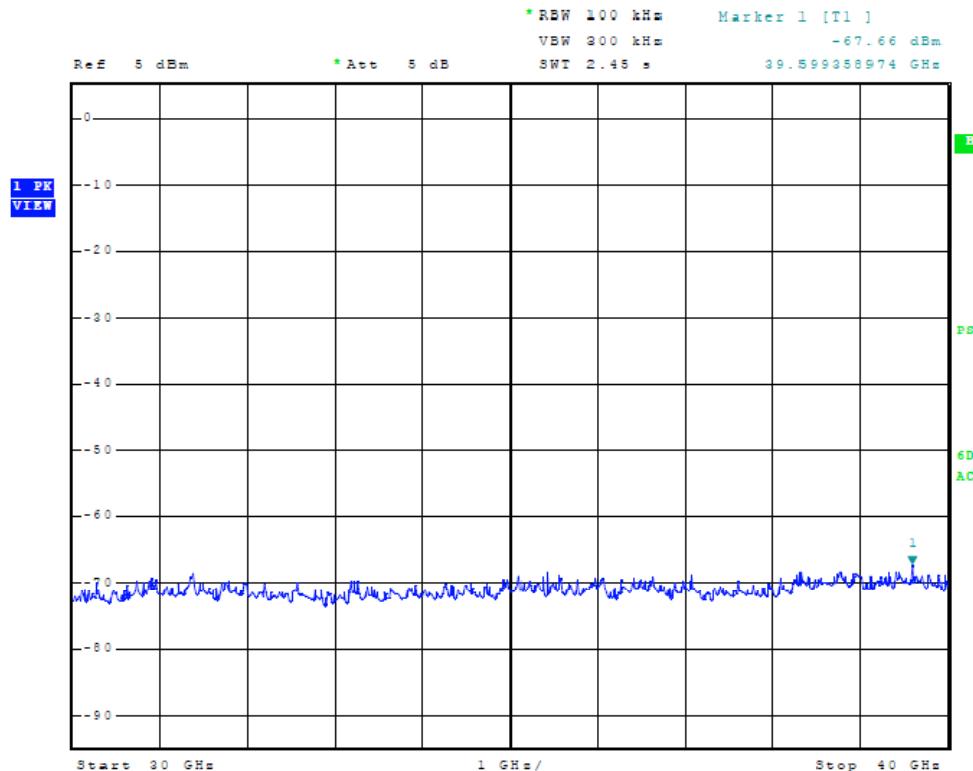


Figure Thirty-eight Plot of Receiver Antenna Port Conducted Emissions

**Receiver Antenna Conducted Emissions Data**

Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
5785.0	-75.47	-57.0	-18.5
11570.0	-75.43	-57.0	-18.4
17355.0	-75.30	-57.0	-18.3
23140.0	-74.24	-57.0	-17.2
28925.0	-73.05	-57.0	-16.1
34710.0	-70.68	-57.0	-13.7

Other emissions present had amplitudes at least 20 dB below the limit.

**Receiver Radiated Emissions Data**

Frequency in MHz	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
52.8	41.6	50.2	7.6	30	19.2	27.8	40.0
69.0	47.3	50.3	8.1	30	25.4	28.4	40.0
80.6	43.9	49.6	7.9	30	21.8	27.5	40.0
80.9	42.4	46.4	7.9	30	20.3	24.3	40.0
133.0	43.3	48.6	13.5	30	26.8	32.1	43.5
194.2	40.1	39.5	12.2	30	22.3	21.7	43.5
195.4	40.2	38.7	12.2	30	22.4	20.9	43.5
199.9	41.6	39.6	13.1	30	24.7	22.7	43.5
215.0	43.1	40.1	11.1	30	24.2	21.2	43.5
215.6	42.9	39.5	11.1	30	24.0	20.6	43.5
400.0	48.3	45.3	16.1	30	34.4	31.4	46.0

Other emissions present had amplitudes at least 20 dB below the limit.

**Summary of Results for Receiver Emissions**

The EUT demonstrated compliance with the antenna conducted emissions requirements of CFR 47 Part 15B, RSS-210, and RSS-GEN with an antenna port conducted minimum margin of 13.7 dB below requirements. The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15B and RSS-GEN with a minimum 11.4 dB margin below requirements. Other emissions were present with amplitudes at least 20 dB below the CFR 47 15B and RSS-GEN limits.

## Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 41 of 47

## Annex A Measurement Uncertainty Calculations

### Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5

Combined standard uncertainty  $u_c(y)$  is

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that  $u_c(y) / s(q_k) > 3$ , where  $s(q_k)$  is estimated standard deviation from a sample of  $n$  readings unless the repeatability of the EUT is particularly poor, and a coverage factor of  $k = 2$  will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with  $k = 2$ .
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
  - Unwanted reflections from adjacent objects.
  - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
  - Losses or reflections from "transparent" cabins for the EUT or site coverings.
  - Earth currents in antenna cable (mainly effect Biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value ( $\pm 4$  dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

#### *Conducted Measurements Uncertainty Calculation*

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Receiver specification	rectangular	$\pm 1.5$
LISN coupling specification	rectangular	$\pm 1.5$
Cable and input attenuator calibration	normal (k=2)	$\pm 0.5$
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that  $u_c(y) / s(q_k) > 3$  and a coverage factor of  $k = 2$  will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$

## Annex B Rogers Labs Test Equipment List

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Date of Calibration
Oscilloscope Scope: Tektronix 2230	2/10
Wattmeter: Bird 43 with Load Bird 8085	2/10
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/10
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/10
R.F. Generator: HP 606A	2/10
R.F. Generator: HP 8614A	2/10
R.F. Generator: HP 8640B	2/10
Spectrum Analyzer: Rohde & Schwarz ESU40	5/10
Spectrum Analyzer: HP 8562A,	5/10
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591EM	5/10
Frequency Counter: Leader LDC825	2/10
Antenna: EMCO Biconilog Model: 3143	5/10
Antenna: EMCO Log Periodic Model: 3147	10/10
Antenna: Antenna Research Biconical Model: BCD 235	10/10
Antenna: EMCO Dipole Set 3121C	2/10
Antenna: C.D. B-101	2/10
Antenna: Solar 9229-1 & 9230-1	2/10
Antenna: EMCO 6509	2/10
Audio Oscillator: H.P. 201CD	2/10
R.F. Power Amp 65W Model: 470-A-1010	2/10
R.F. Power Amp 50W M185- 10-501	2/10
R.F. Preamp CPPA-102	2/10
LISN 50 $\mu$ Hy/50 ohm/0.1 $\mu$ f	10/10
LISN Compliance Eng. 240/20	2/10
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/10
Peavey Power Amp Model: IPS 801	2/10
Power Amp A.R. Model: 10W 1010M7	2/10
Power Amp EIN Model: A301	2/10
ELGAR Model: 1751	2/10
ELGAR Model: TG 704A-3D	2/10
ESD Test Set 2010i	2/10
Fast Transient Burst Generator Model: EFT/B-101	2/10
Current Probe: Singer CP-105	2/10
Current Probe: Solar 9108-1N	2/10
Field Intensity Meter: EFM-018	2/10
KEYTEK Ecat Surge Generator	2/10
Shielded Room 5 M x 3 M x 3.0 M	

***Annex C Rogers Qualifications******Scot D. Rogers, Engineer*****Rogers Labs, Inc.**

Mr. Rogers has approximately 17 years experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

**Positions Held**

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

**Educational Background**

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

**Annex D FCC Site Registration Letter****FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

May 18, 2010

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace,  
Louisburg, KS 66053


Attention: Scot Rogers,

Re: Measurement facility located at Louisburg  
3 & 10-meter site  
Date of Renewal: May 18, 2010

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

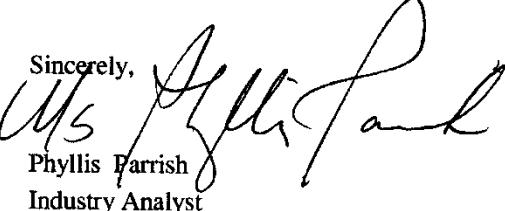Sincerely,  
  
Phyllis Parrish  
Industry Analyst

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 46 of 47

**Annex E Industry Canada Site Registration Letter**

May 26, 2010

OUR FILE: 46405-3041  
Submission No: 140719**Rogers Labs Inc.**

4405 West 259<sup>th</sup> Terrace  
Louisburg, KY, 66053  
USA

*Attention:* Mr. Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the renewal of a 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- Your primary code is: **3041**
- The company number associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

[http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\\_tt00052e.html](http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html).

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca) Please reference our file and submission number above for all correspondence.

Yours sincerely,

Dalwinder Gill  
For: Wireless Laboratory Manager  
Certification and Engineering Bureau  
3701 Carling Ave., Building 94  
P.O. Box 11490, Station "H"  
Ottawa, Ontario K2H 8S2  
Email: [dalwinder.gill@ic.gc.ca](mailto:dalwinder.gill@ic.gc.ca)  
Tel. No. (613) 998-8363  
Fax. No. (613) 990-4752

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Ligowave LLC  
Model: FWBD01  
Test #: 101229  
Test to: CFR47 (15.247) and RSS-210  
File: Ligowave FWBD01 101229 TestRpt

SN: ENG 1  
FCC ID#: V2V-FWBD01  
IC: 7607A-FWBD01  
Date: February 16, 2011  
Page 47 of 47