

FCC REPORT

Applicant: LigoWave LLC

Address of Applicant: 138 Mountain Brook Dr Canton, GA 30115 United States

Equipment Under Test (EUT)

Product Name: Broadband Digital Transmission System

Model No.: FWBD1401

FCC ID: V2V-FWBD1401V2

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: 18 Jul., 2014

Date of Test: 22 Jul., to 27 Oct., 2014

Date of report issued: 28 Oct., 2014

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A blue circular stamp with the text "SHENZHEN ZHONGJIAN NANFANG TESTING CO., LTD." around the perimeter and "CCIS" in the center. A handwritten signature in black ink is written over the stamp.

Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	28 Oct., 2014	Original

Prepared by:

Sera Xiang

Date:

28 Oct., 2014

Report Clerk

Reviewed by:

Wimer Zhang

Date:

28 Oct., 2014

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 LABORATORY FACILITY.....	7
5.5 LABORATORY LOCATION	7
5.6 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 JUSTIFICATION	9
6.2 ANTENNA REQUIREMENT.....	9
6.3 CONDUCTED EMISSION	10
6.4 CONDUCTED OUTPUT POWER	17
6.5 EMISSION BANDWIDTH	44
6.6 POWER SPECTRAL DENSITY	61
6.7 BAND EDGE	88
6.8 SPURIOUS EMISSION.....	93
6.8.1 Restricted Band.....	93
6.8.2 Radiated Emission Method.....	104
6.9 FREQUENCY STABILITY.....	140
7 TEST SETUP PHOTO	142
8 EUT CONSTRUCTIONAL DETAILS	145

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.407 (g)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.407 (a)	Pass
26dB Emission Bandwidth	15.407 (a)	Pass
6dB Emission Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407 (a)	Pass
Band Edge	15.407(b)	Pass
Spurious Emission	15.205/15.209	Pass
Frequency Stability	15.407(g)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	LigoWave LLC
Address of Applicant:	138 Mountain Brook Dr Canton, GA 30115 United States
Manufacturer:	LigoWave LLC
Address of Manufacturer:	138 Mountain Brook Dr Canton, GA 30115 United States

5.2 General Description of E.U.T.

Product Name:	Broadband Digital Transmission System
Model No.:	FWBD1401
Operation Frequency:	Band 1: 5150MHz-5250MHz Band 4: 5725MHz-5850MHz
Operation mode:	Fixed point-to-point operation
Channel numbers:	Band 1: 802.11a/802.11n20:4, 802.11n40:2 Band 4: 802.11a/802.11n20:5, 802.11n40:2
Channel separation:	802.11a/802.11n20:20MHz, 802.11n40:40MHz
Modulation technology: (IEEE 802.11a)	BPSK,QPSK,16-QAM,64-QAM
Modulation technology: (IEEE 802.11n)	BPSK,QPSK,16-QAM, 64-QAM
Data speed(IEEE 802.11a):	6Mbps, 9Mbps,12Mbps,18Mbps, 24Mbps,36Mbps,48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps, MCS1:13Mbps, MCS2:19.5Mbps, MCS3:26Mbps, MCS4:39Mbps, MCS5:52Mbps, MCS6:58.5Mbps, MCS7:65Mbps
Data speed (IEEE 802.11n40):	MCS0:15Mbps, MCS1:30Mbps, MCS2:45Mbps, MCS3:60Mbps, MCS4:90Mbps, MCS5:120Mbps, MCS6:135Mbps, MCS7:150Mbps
Antenna Type:	ANT1:Panel, ANT2:Dish
Antenna gain:	ANT1:23 dBi, ANT2: 30 dBi
Power supply:	POE1 Model: AY032E-ZF483 Input:100-240V AC,50/60Hz 0.5A Output:48V DC MAX0.6A POE2 Model: FAS4800070-C55 Input:100-240V AC,50/60Hz 0.7A Output:48V DC MAX0.7A POE3 Model: VX-PI100GB Input:100-240V AC,50/60Hz 0.6A Output:48V DC MAX0.5A

Operation Frequency each of channel

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz
40	5200MHz	46	5230MHz
44	5220MHz		
48	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz
153	5765MHz	159	5795MHz
157	5785MHz		
161	5805MHz		
165	5825MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5180MHz	The lowest channel	5190MHz
The middle channel	5200MHz	The highest channel	5230MHz
The highest channel	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5745MHz	The lowest channel	5755MHz
The middle channel	5785MHz	The highest channel	5795MHz
The highest channel	5825MHz		

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation in MIMO mode.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13 Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 6 Mbps for 802.11a, 6.5 Mbps for 802.11n20 and 13 Mbps for 802.11n40. All test items for 802.11a and 802.11n were performed in MIMO mode and duty cycle all above 98%, meet the requirements of KDB789033.

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282
Fax: +86-755-23116366

5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	Aug. 23 2014	Aug. 23 2017
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	CCIS0002	N/A	N/A
3	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 11 2014	Aug. 10 2015
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	May 25 2014	May 24 2015
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 25 2014	May 24 2015
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2014	Mar. 29 2015
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2014	Mar. 31 2015
9	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2014	June 08 2015
10	Pre-amplifier (18-40GHz)	A.H System	PAM-1840	GTS219	Apr. 01 2014	Mar. 31 2015
11	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 25 2014	May. 24 2015
12	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2014	Mar. 31 2015
13	Spectrum Analyzer	HP	8564E	CCIS0150	May 24 2014	May 23 2015

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2014	June 08 2015
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2014	May 24 2015
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2014	Mar. 31 2015
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2014	Mar. 31 2015
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Justification

According to section 5.2 of this report, the EUT have two types of antenna, so we test the maximum output power item base on the different antennas, and we selected the worst case one to perform the other conducted method test items (such as PSD, Band edge, Conducted spurious emission, etc.). The worst case for the conducted method tests is EUT with 23 dBi panel antenna (maximum conducted output power). For radiated method tests, all cases were tested.

6.2 Antenna requirement

Standard requirement:	FCC Part 15 E Section 15.203 /407(a)									
<i>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</i>										
E.U.T Antenna:										
<i>The product is a professionally installed device which has two types of antenna for the application. The antenna information as below table:</i>										
<table><tr><td>Antenna No.</td><td>Antenna Type</td><td>Antenna Gain (dBi)</td></tr><tr><td>Antenna 1</td><td>Panel/Internal</td><td>23</td></tr><tr><td>Antenna 2</td><td>Dish/External</td><td>30</td></tr></table>		Antenna No.	Antenna Type	Antenna Gain (dBi)	Antenna 1	Panel/Internal	23	Antenna 2	Dish/External	30
Antenna No.	Antenna Type	Antenna Gain (dBi)								
Antenna 1	Panel/Internal	23								
Antenna 2	Dish/External	30								
<i>According to above information, the antennas meet the requirements of this section. The details of antenna plots please refer to section 8 of this report.</i>										


6.3 Conducted Emission

Test Requirement:	FCC Part 15 C Section 15.207			
Test Method:	ANSI C63.4: 2003			
Test Frequency Range:	150 kHz to 30 MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9 kHz, VBW=30 kHz			
Limit:	Frequency range (MHz)	Limit (dBuV)		
		Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*
		0.5-5	56	46
		5-30	60	50
* Decreases with the logarithm of the frequency.				
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.			
Test setup:	Reference Plane LISN AUX Equipment E.U.T 40cm 80cm EMI Receiver LISN Filter AC power Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m			
Test Instruments:	Refer to section 5.6 for details			
Test mode:	Refer to section 5.3 for details.			
Test results:	Passed			

Measurement Data

POE: AY032E-ZF483

Line:

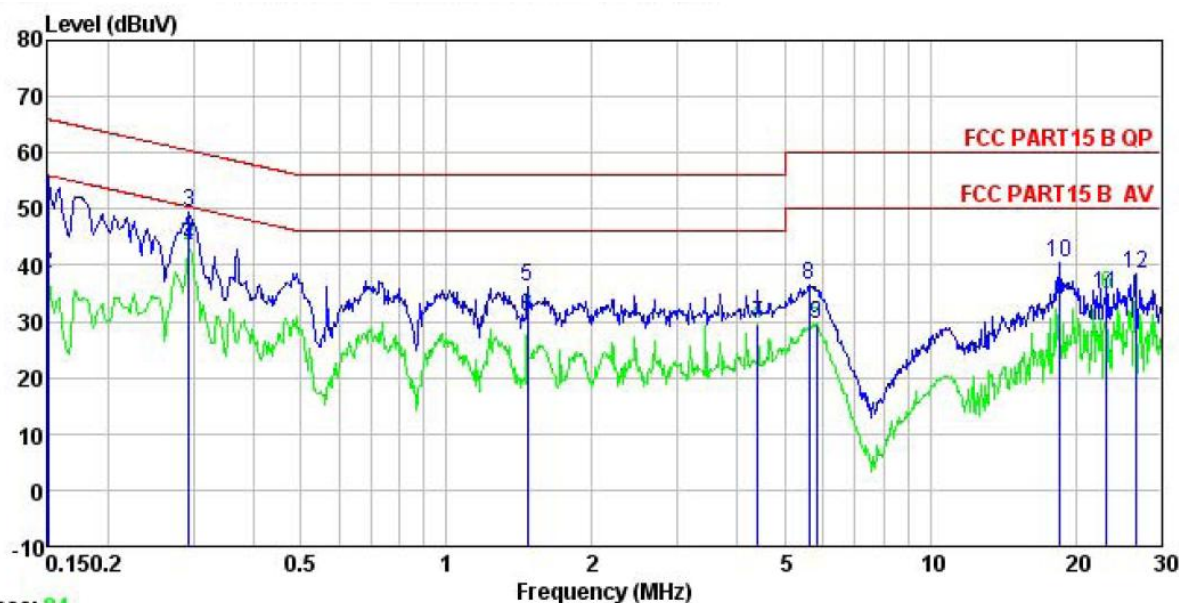


Trace: 84

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Broad band digital transmission system
 Model : FWBD1401
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: AY032E-ZF483

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	44.78	0.27	10.78	55.83	66.00	-10.17	QP
2	0.150	27.45	0.27	10.78	38.50	56.00	-17.50	Average
3	0.294	38.55	0.26	10.74	49.55	60.41	-10.86	QP
4	0.294	32.31	0.26	10.74	43.31	50.41	-7.10	Average
5	1.472	25.00	0.26	10.92	36.18	56.00	-19.82	QP
6	1.472	19.60	0.26	10.92	30.78	46.00	-15.22	Average
7	4.407	18.35	0.29	10.87	29.51	46.00	-16.49	Average
8	5.623	25.29	0.30	10.83	36.42	60.00	-23.58	QP
9	5.836	18.30	0.31	10.83	29.44	50.00	-20.56	Average
10	18.524	29.09	0.33	10.91	40.33	60.00	-19.67	QP
11	23.140	23.33	0.46	10.89	34.68	50.00	-15.32	Average
12	26.558	26.88	0.63	10.87	38.38	60.00	-21.62	QP

Neutral:

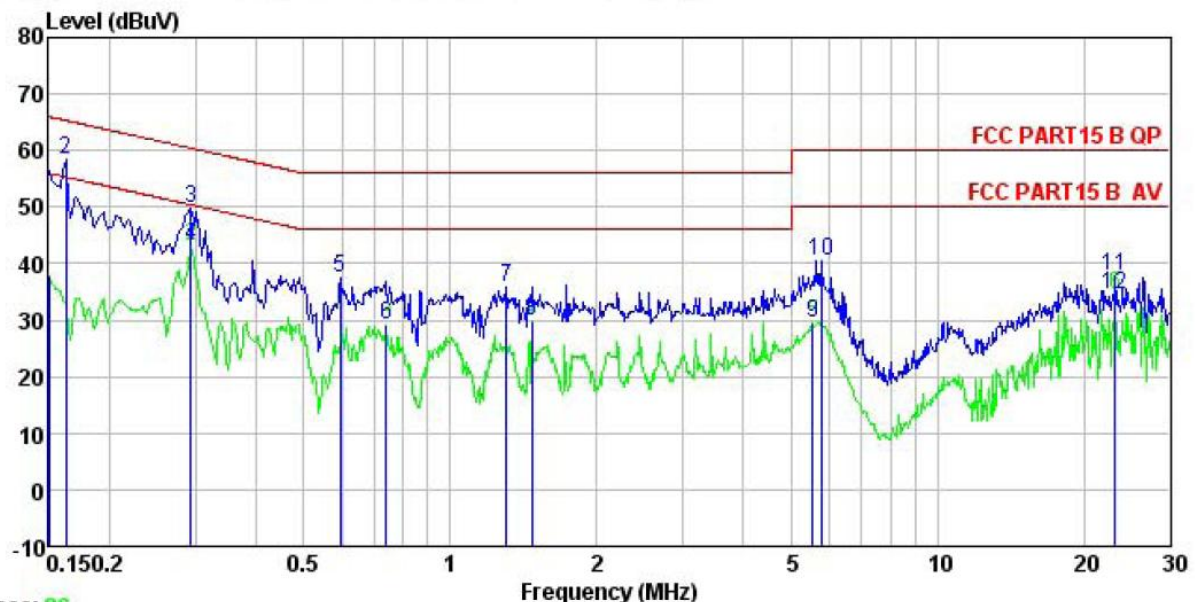

Trace: 86

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Broad band digital transmission system
 Model : FWBD1401
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: AY032E-ZF483


	Read	LISN	Cable		Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	26.74	0.25	10.78	37.77	56.00	-18.23 Average
2	0.162	47.28	0.25	10.77	58.30	65.34	-7.04 QP
3	0.294	38.66	0.26	10.74	49.66	60.41	-10.75 QP
4	0.294	32.25	0.26	10.74	43.25	50.41	-7.16 Average
5	0.595	26.51	0.23	10.77	37.51	56.00	-18.49 QP
6	0.739	18.14	0.19	10.79	29.12	46.00	-16.88 Average
7	1.303	24.73	0.25	10.90	35.88	56.00	-20.12 QP
8	1.472	18.51	0.26	10.92	29.69	46.00	-16.31 Average
9	5.535	18.35	0.27	10.83	29.45	50.00	-20.55 Average
10	5.774	29.52	0.27	10.83	40.62	60.00	-19.38 QP
11	23.140	26.60	0.42	10.89	37.91	60.00	-22.09 QP
12	23.140	23.08	0.42	10.89	34.39	50.00	-15.61 Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

POE: FAS4800070-C55


Line:

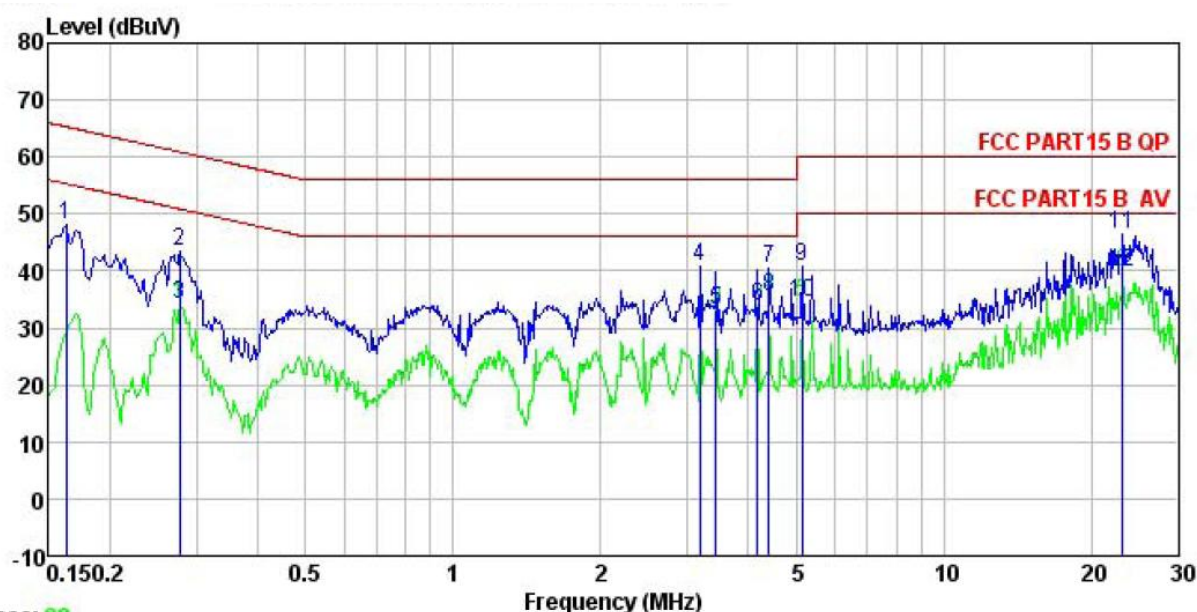

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Broad band digital transmission system
 Model : FWBD1401
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: FAS4800070-C55

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	dBuV	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	36.92	0.27	10.77	47.96	65.34	-17.38	QP
2	0.277	32.58	0.26	10.74	43.58	60.90	-17.32	QP
3	0.277	23.28	0.26	10.74	34.28	50.90	-16.62	Average
4	3.190	29.48	0.27	10.91	40.66	56.00	-15.34	QP
5	3.436	21.95	0.28	10.91	33.14	46.00	-12.86	Average
6	4.180	22.66	0.28	10.88	33.82	46.00	-12.18	Average
7	4.407	29.45	0.29	10.87	40.61	56.00	-15.39	QP
8	4.407	24.27	0.29	10.87	35.43	46.00	-10.57	Average
9	5.139	29.54	0.30	10.85	40.69	60.00	-19.31	QP
10	5.139	23.31	0.30	10.85	34.46	50.00	-15.54	Average
11	23.140	35.10	0.46	10.89	46.45	60.00	-13.55	QP
12	23.140	28.62	0.46	10.89	39.97	50.00	-10.03	Average

Neutral:

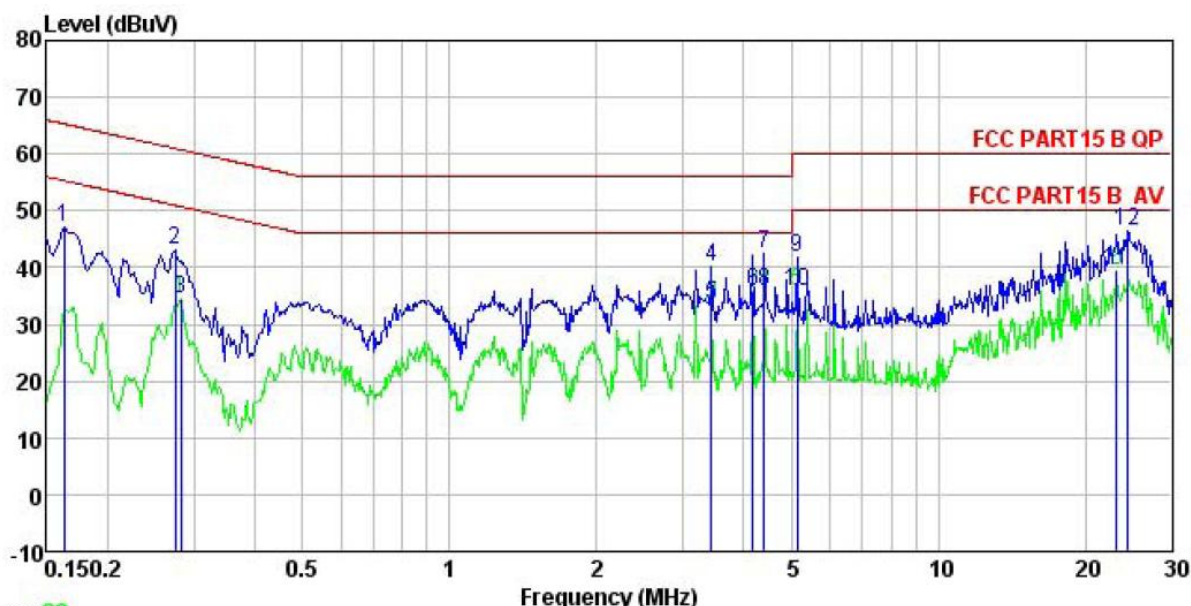

Trace: 88

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Broad band digital transmission system
 Model : FWED1401
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: FAS4800070-C55


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	35.99	0.25	10.77	47.01	65.34	-18.33	QP
2	0.274	32.26	0.26	10.74	43.26	60.98	-17.72	QP
3	0.282	23.41	0.26	10.74	34.41	50.76	-16.35	Average
4	3.436	29.11	0.29	10.91	40.31	56.00	-15.69	QP
5	3.436	22.21	0.29	10.91	33.41	46.00	-12.59	Average
6	4.180	24.58	0.29	10.88	35.75	46.00	-10.25	Average
7	4.407	31.40	0.28	10.87	42.55	56.00	-13.45	QP
8	4.407	24.73	0.28	10.87	35.88	46.00	-10.12	Average
9	5.139	30.68	0.28	10.85	41.81	60.00	-18.19	QP
10	5.139	24.81	0.28	10.85	35.94	50.00	-14.06	Average
11	23.140	28.17	0.42	10.89	39.48	50.00	-10.52	Average
12	24.400	34.91	0.50	10.88	46.29	60.00	-13.71	QP

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

POE: VX-PI1000GB

Line:

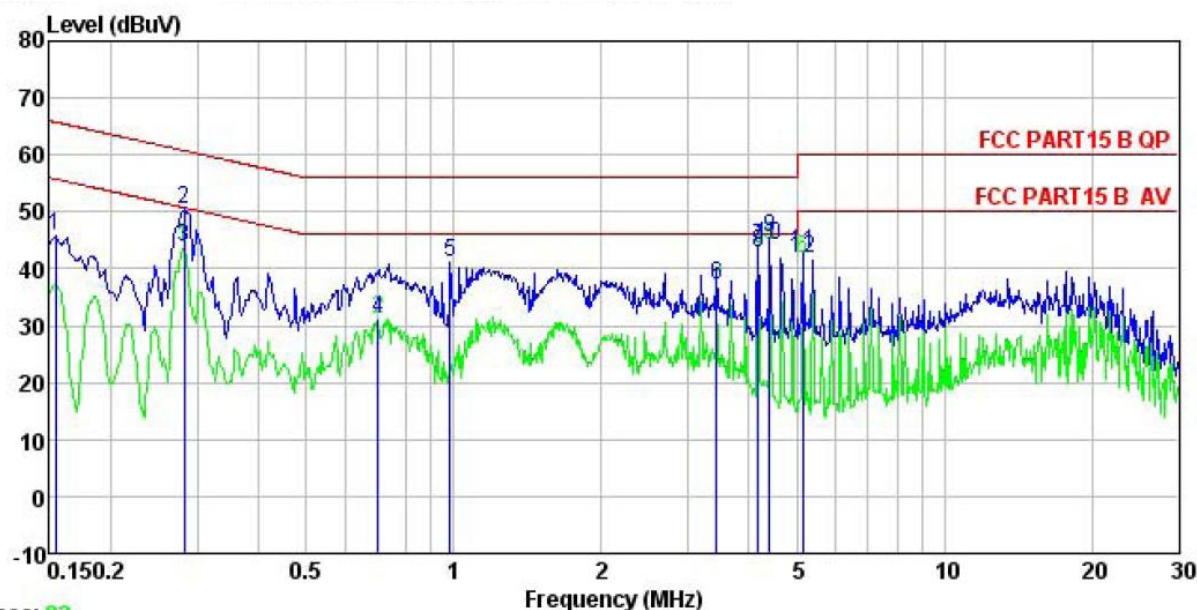


Trace: 82

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Broad band digital transmission system
 Model : FWBD1401
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: VX-PI1000GB

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	Line	Limit	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	34.81	0.27	10.78	45.86	65.78	-19.92	QP
2	0.282	39.44	0.26	10.74	50.44	60.76	-10.32	QP
3	0.282	32.75	0.26	10.74	43.75	50.76	-7.01	Average
4	0.701	20.04	0.22	10.77	31.03	46.00	-14.97	Average
5	0.984	30.12	0.25	10.87	41.24	56.00	-14.76	QP
6	3.436	26.13	0.28	10.91	37.32	46.00	-8.68	Average
7	4.180	32.60	0.28	10.88	43.76	56.00	-12.24	QP
8	4.180	31.52	0.28	10.88	42.68	46.00	-3.32	Average
9	4.407	34.27	0.29	10.87	45.43	56.00	-10.57	QP
10	4.407	33.14	0.29	10.87	44.30	46.00	-1.70	Average
11	5.139	31.81	0.30	10.85	42.96	60.00	-17.04	QP
12	5.139	30.62	0.30	10.85	41.77	50.00	-8.23	Average

Neutral:

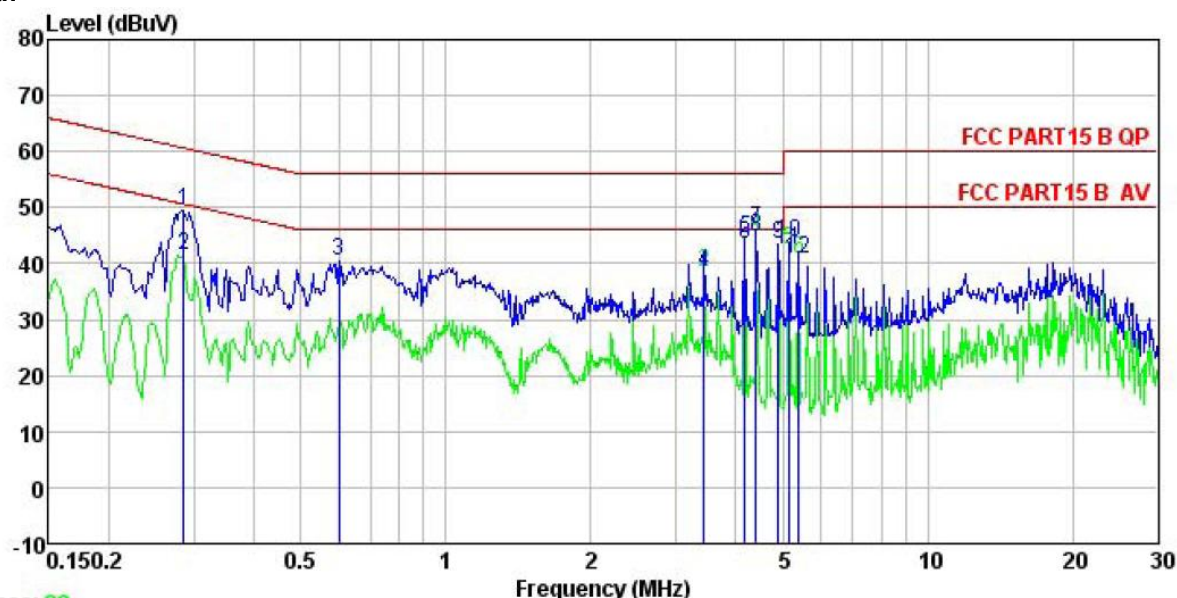


Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Broad band digital transmission system
 Model : FWBD1401
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: VX-PI1000GB

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	dBuV	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.286	38.57	0.26	10.74	49.57	60.63	-11.06	QP
2	0.286	30.51	0.26	10.74	41.51	50.63	-9.12	Average
3	0.601	29.42	0.23	10.77	40.42	56.00	-15.58	QP
4	3.436	27.23	0.29	10.91	38.43	46.00	-7.57	Average
5	4.180	33.35	0.29	10.88	44.52	56.00	-11.48	QP
6	4.180	32.29	0.29	10.88	43.46	46.00	-2.54	Average
7	4.407	34.94	0.28	10.87	46.09	56.00	-9.91	QP
8	4.407	33.80	0.28	10.87	44.95	46.00	-1.05	Average
9	4.900	32.47	0.28	10.85	43.60	56.00	-12.40	QP
10	5.139	32.65	0.28	10.85	43.78	60.00	-16.22	QP
11	5.139	31.43	0.28	10.85	42.56	50.00	-7.44	Average
12	5.390	29.55	0.27	10.84	40.66	50.00	-9.34	Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

6.4 Conducted Output Power

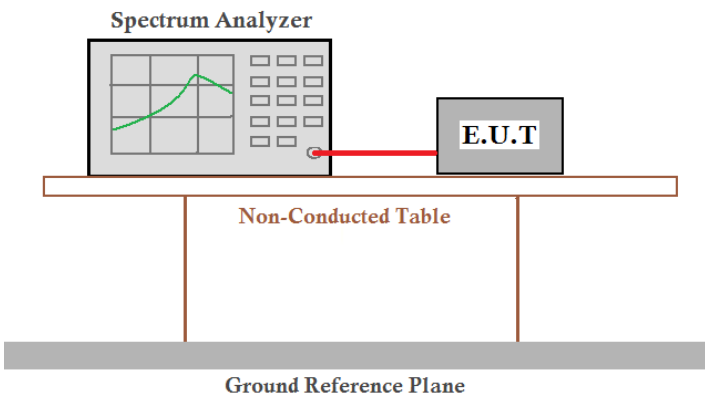Test Requirement:	FCC Part 15 E Section 15.407 (a)
Test Method:	ANSI C63.4:2003 , KDB 789033
Limit:	Band 1: 1 W (For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi); Band 4: 1W (For fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power).
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Band 1:

23dBi Antenna

Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	19.68	22.75	30.00	Pass
		TX1	19.79			
	Middle	TX0	19.44	22.61	30.00	Pass
		TX1	19.76			
	Highest	TX0	19.82	22.60	30.00	Pass
		TX1	19.35			
802.11n20	Lowest	TX0	19.72	22.80	30.00	Pass
		TX1	19.86			
	Middle	TX0	19.39	22.34	30.00	Pass
		TX1	19.26			
	Highest	TX0	19.20	22.47	30.00	Pass
		TX1	19.71			
802.11n40	Lowest	TX0	19.84	22.83	30.00	Pass
		TX1	19.79			
	Highest	TX0	19.65	22.52	30.00	Pass
		TX1	19.37			
Remark:						
1. Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .						
2. The directional Gain of antenna is less than 23 dBi, so the limit of power is 30 dBm.						

30dBi Antenna

Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	17.80	20.77	23.00	Pass
		TX1	17.72			
	Middle	TX0	17.76	20.67	23.00	Pass
		TX1	17.56			
	Highest	TX0	17.69	20.79	23.00	Pass
		TX1	17.87			
802.11n20	Lowest	TX0	17.38	20.59	23.00	Pass
		TX1	17.77			
	Middle	TX0	17.21	20.47	23.00	Pass
		TX1	17.70			
	Highest	TX0	17.87	20.85	23.00	Pass
		TX1	17.80			
802.11n40	Lowest	TX0	17.25	20.57	23.00	Pass
		TX1	17.84			
	Highest	TX0	17.63	20.62	23.00	Pass
		TX1	17.58			
Remark: 1. Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} . 2. The directional Gain of antenna is greater than 23 dBi, so the limit of power is 23 dBm.						

Band 4:

23dBi Antenna

Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	19.97	22.99	30.00	Pass
		TX1	19.99			
	Middle	TX0	19.29	22.62	30.00	Pass
		TX1	19.90			
	Highest	TX0	19.82	22.61	30.00	Pass
		TX1	19.37			
802.11n20	Lowest	TX0	19.74	22.68	30.00	Pass
		TX1	19.60			
	Middle	TX0	19.24	22.61	30.00	Pass
		TX1	19.94			
	Highest	TX0	19.98	22.94	30.00	Pass
		TX1	19.87			
802.11n40	Lowest	TX0	17.90	20.90	30.00	Pass
		TX1	17.87			
	Highest	TX0	19.88	22.61	30.00	Pass
		TX1	19.30			
Remark:						
1. Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .						




30dBi Antenna

EUTRA Antenna						
Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	17.77	20.83	30.00	Pass
		TX1	17.86			
	Middle	TX0	17.36	20.55	30.00	Pass
		TX1	17.71			
	Highest	TX0	17.62	20.74	30.00	Pass
		TX1	17.83			
802.11n20	Lowest	TX0	17.92	20.95	30.00	Pass
		TX1	17.96			
	Middle	TX0	17.91	20.68	30.00	Pass
		TX1	17.41			
	Highest	TX0	17.63	20.71	30.00	Pass
		TX1	17.77			
802.11n40	Lowest	TX0	17.95	20.88	30.00	Pass
		TX1	17.79			
	Highest	TX0	17.84	20.82	30.00	Pass
		TX1	17.78			
Remark:						
1. Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .						

Test plot as follows:

Band 1:


23dBi Antenna (TX0)

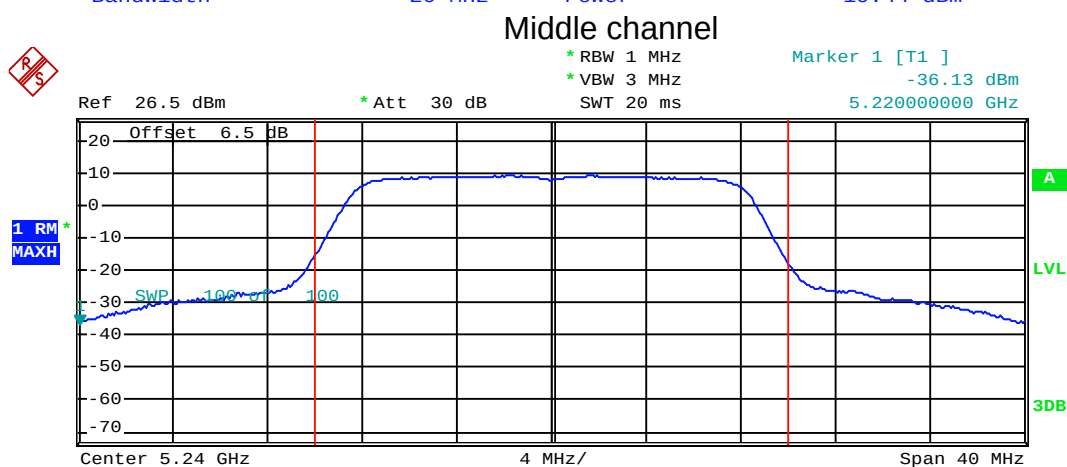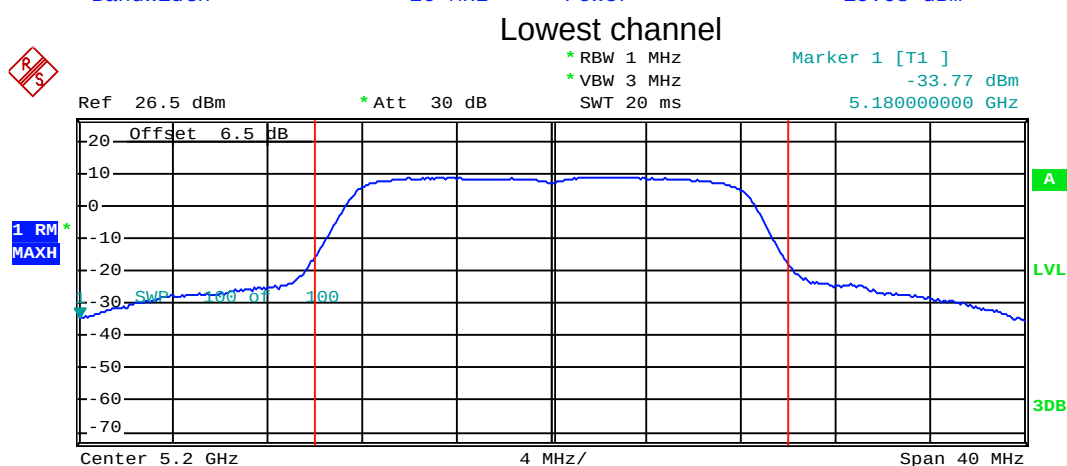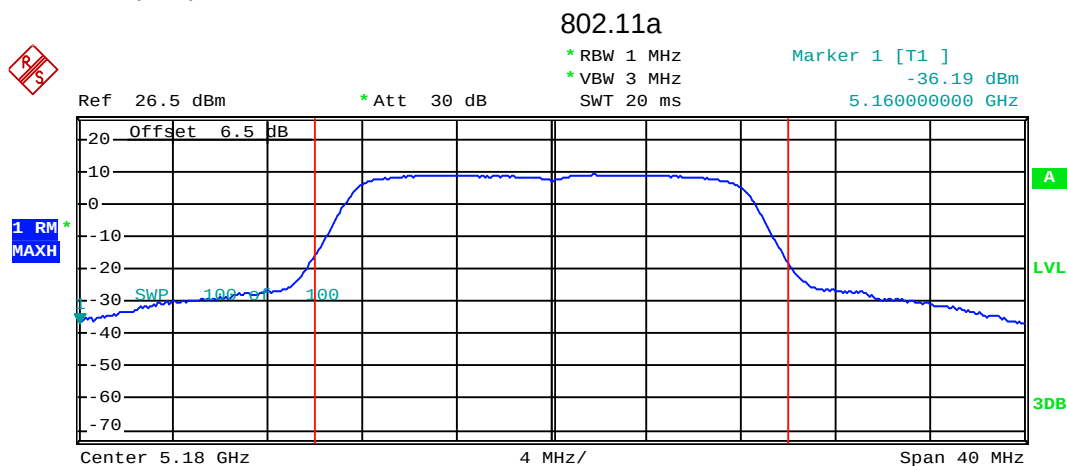


Highest channel

30dBi Antenna (TX0)


802.11a

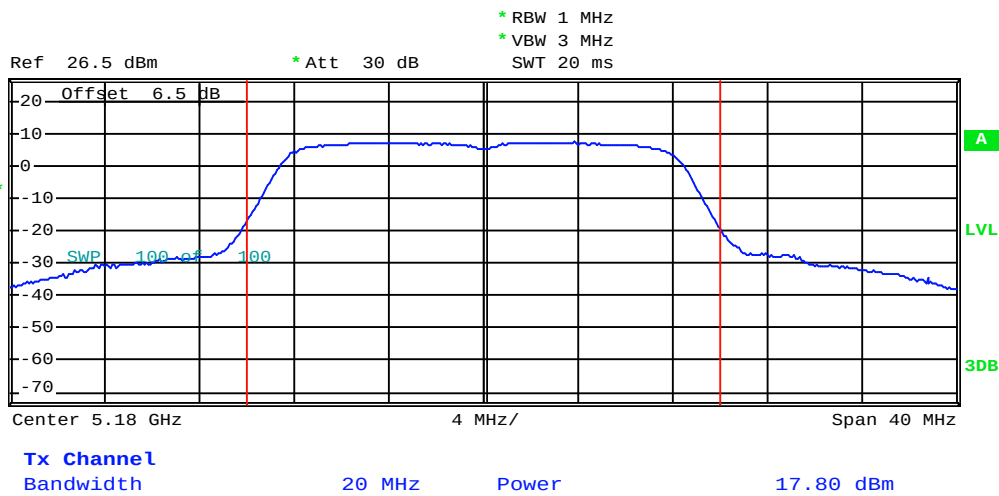

Lowest channel

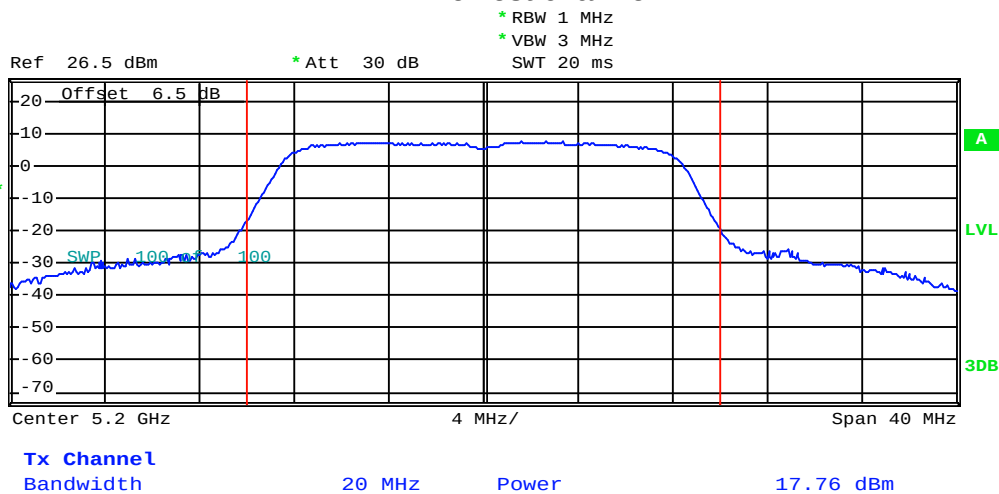

Middle channel

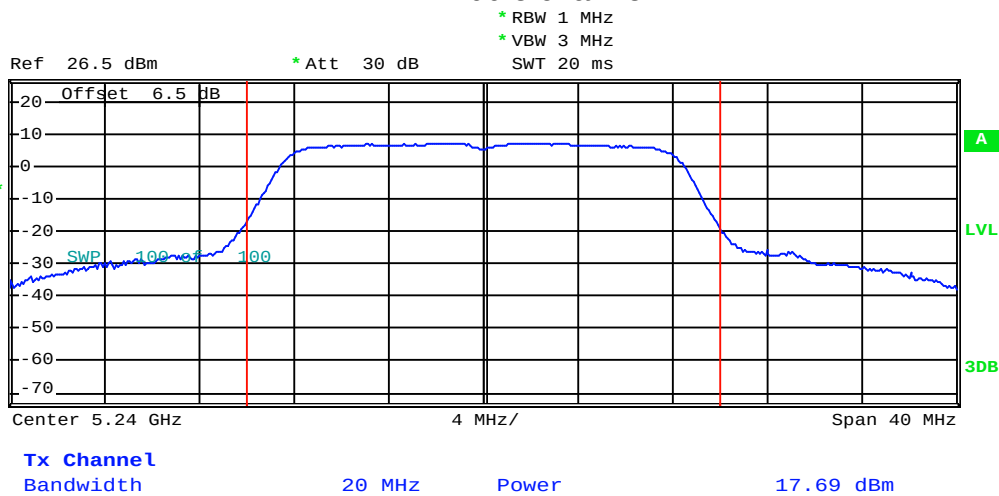


Highest channel

23dBi Antenna (TX0)

802.11n20



1 RM
MAXH

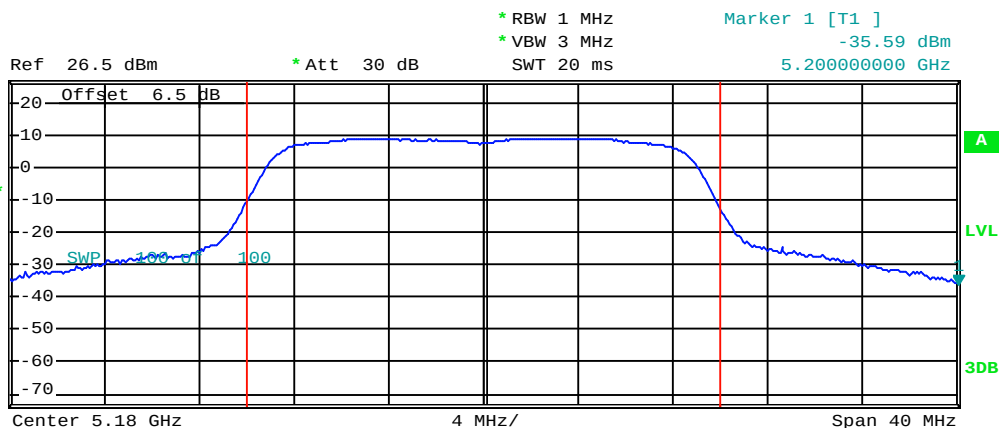


Tx Channel
Bandwidth 20 MHz Power 19.72 dBm

Lowest channel



1 RM
MAXH

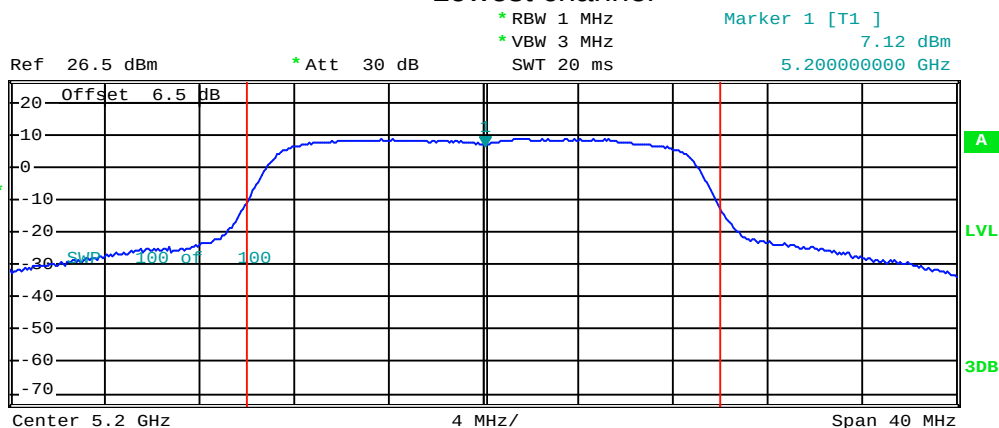


Tx Channel
Bandwidth 20 MHz Power 19.39 dBm

Middle channel



1 RM
MAXH

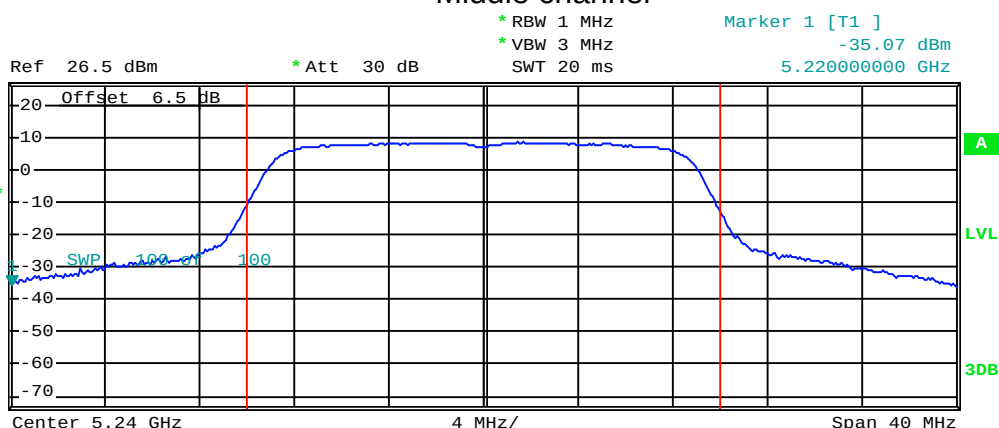


Tx Channel
Bandwidth 20 MHz Power 19.20 dBm

Highest channel


30dBi Antenna (TX0)

802.11n20

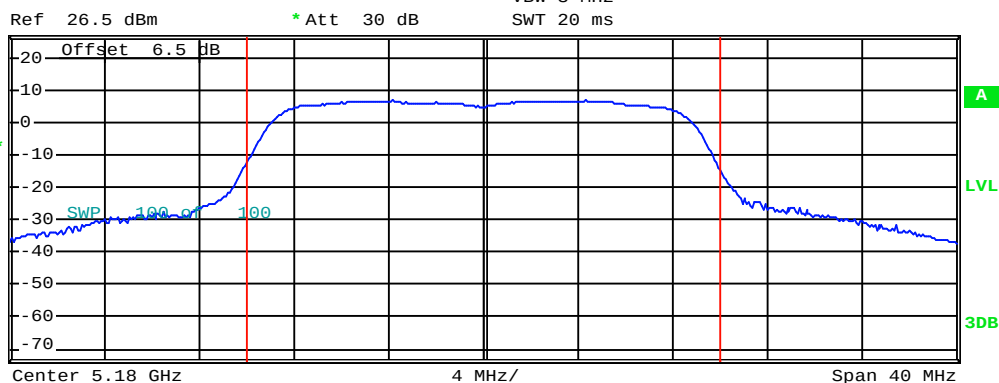


Tx Channel
Bandwidth 20 MHz Power 17.38 dBm

Lowest channel

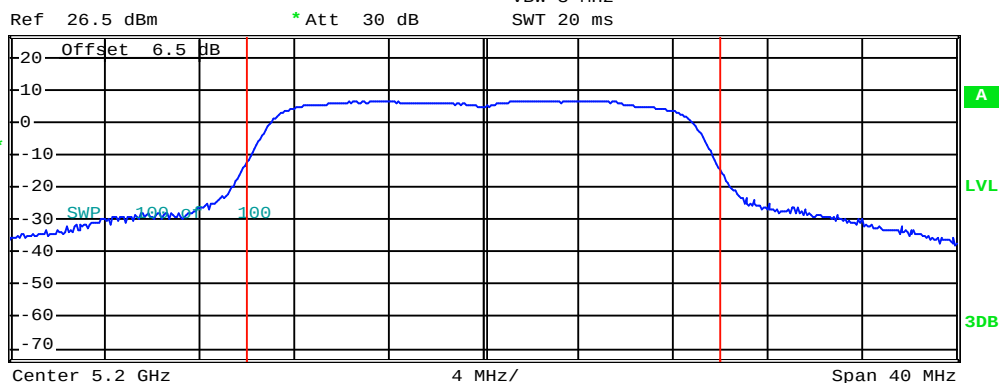

Tx Channel
Bandwidth 20 MHz Power 17.21 dBm

Middle channel

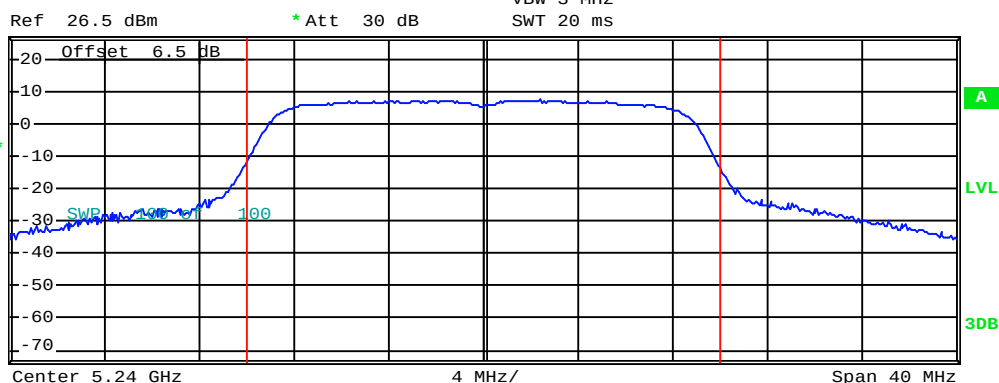

Tx Channel
Bandwidth 20 MHz Power 17.87 dBm


Highest channel

23dBi Antenna (TX0)

802.11n40



1 RM
MAXH

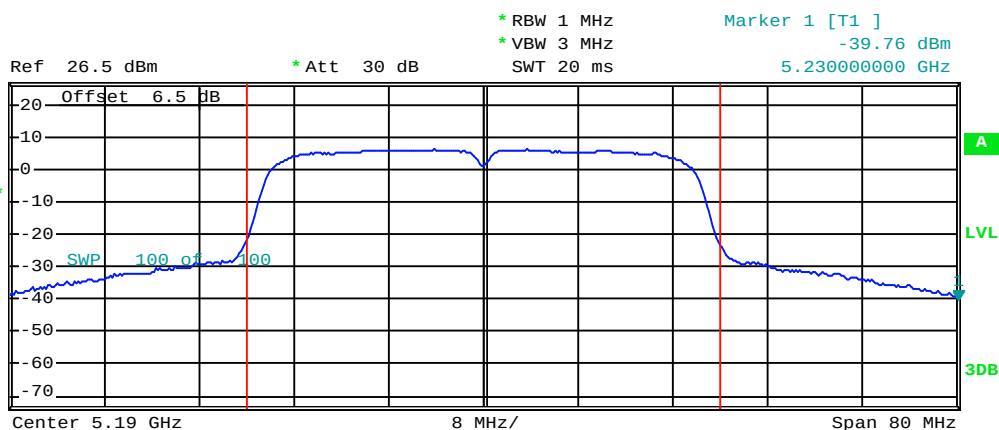

Tx Channel

Bandwidth

40 MHz


Power

19.84 dBm

Lowest channel



1 RM
MAXH

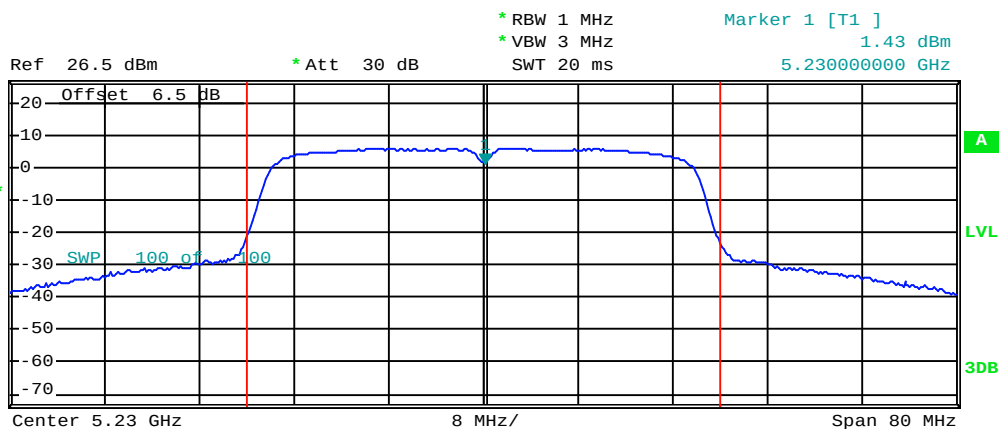

Tx Channel

Bandwidth

40 MHz


Power

19.65 dBm

Highest channel

30dBi Antenna (TX0)

802.11n40

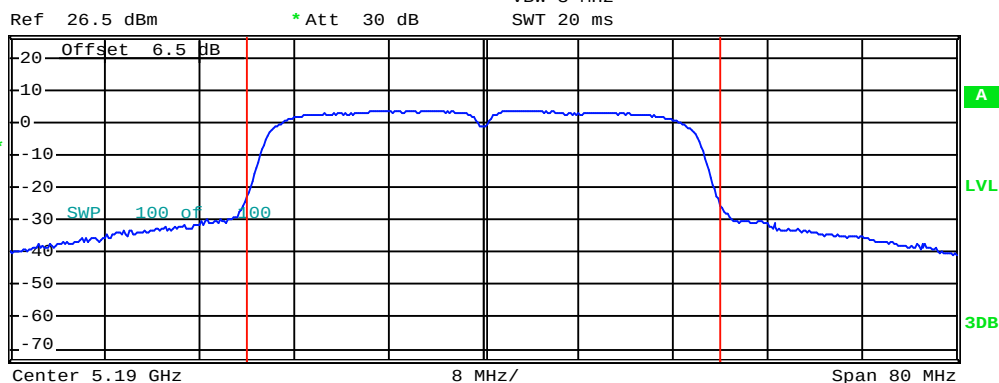

Tx Channel


Bandwidth

40 MHz

Power

17.25 dBm

Lowest channel

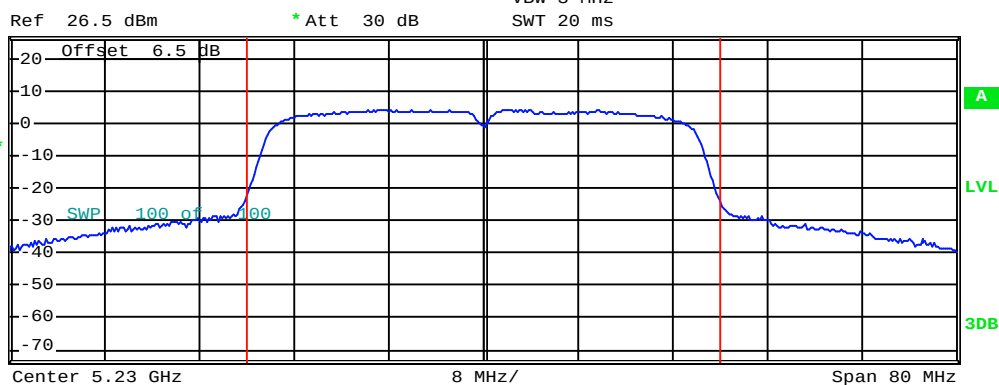

Tx Channel

Bandwidth




40 MHz

Power

17.63 dBm


Highest channel

23dBi Antenna (TX1)

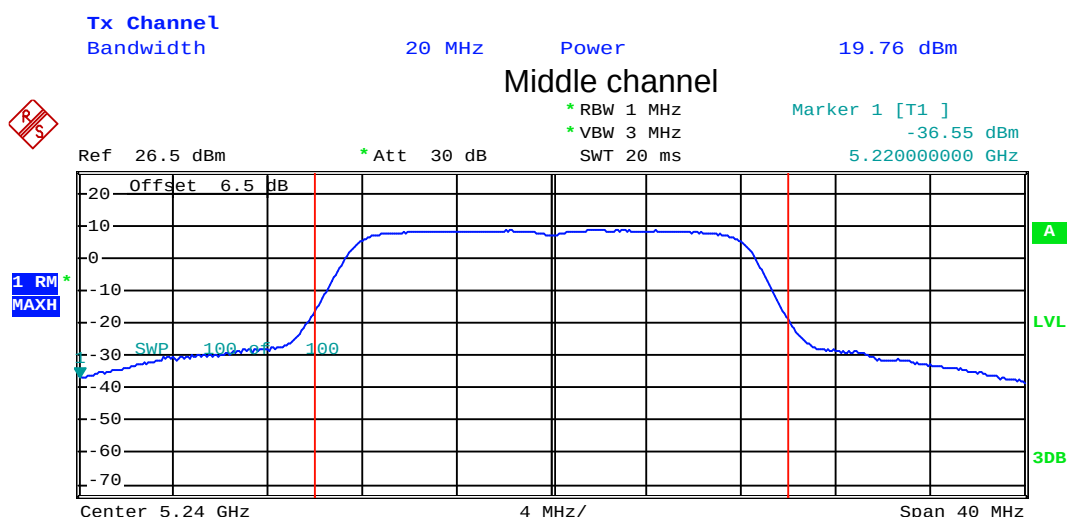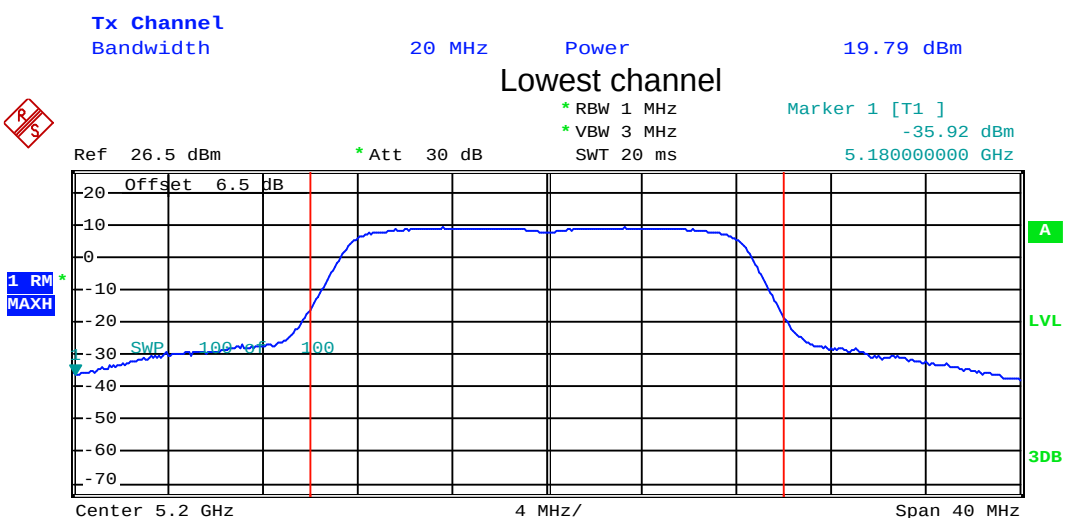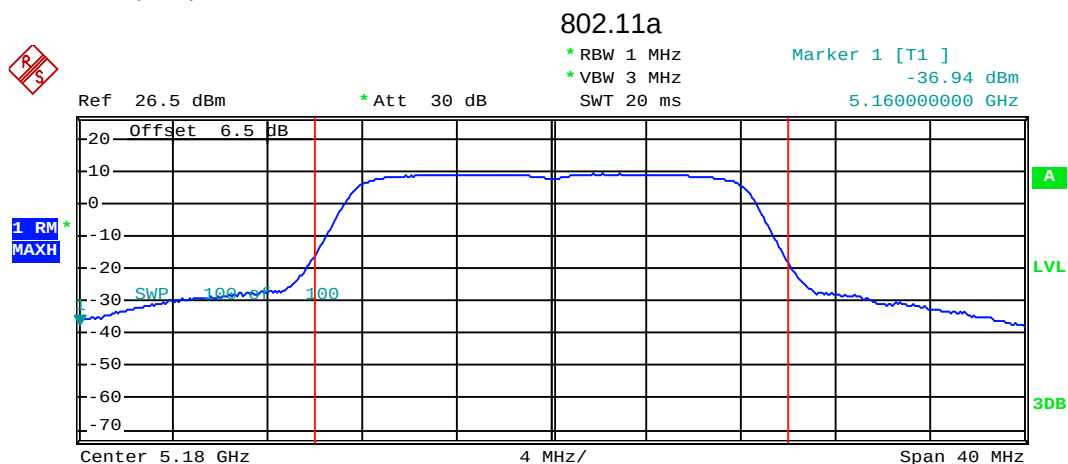

30dBi Antenna (TX1)

802.11a

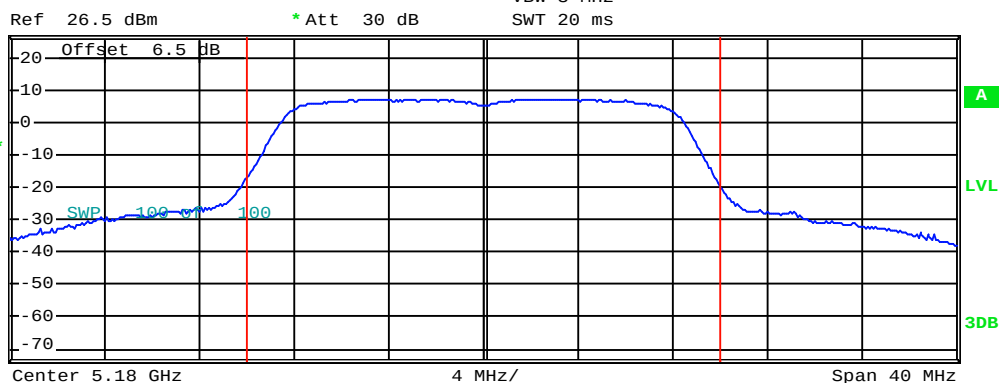

Tx Channel


Bandwidth

20 MHz

Power

17.72 dBm

Lowest channel

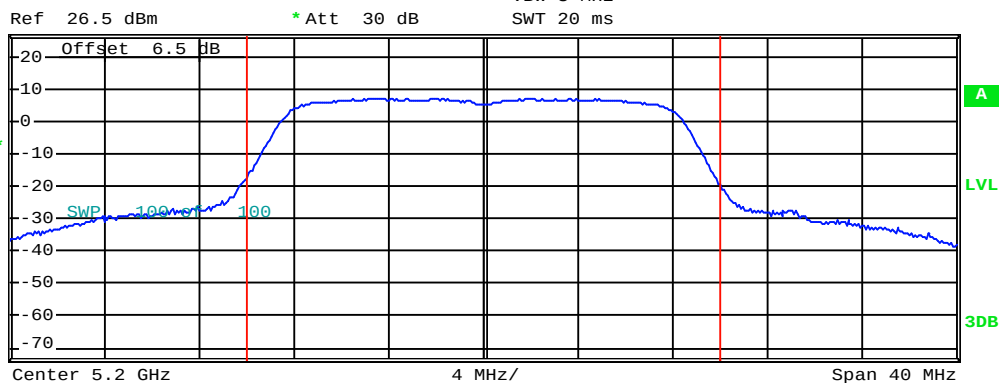

Tx Channel


Bandwidth

20 MHz

Power

17.56 dBm

Middle channel

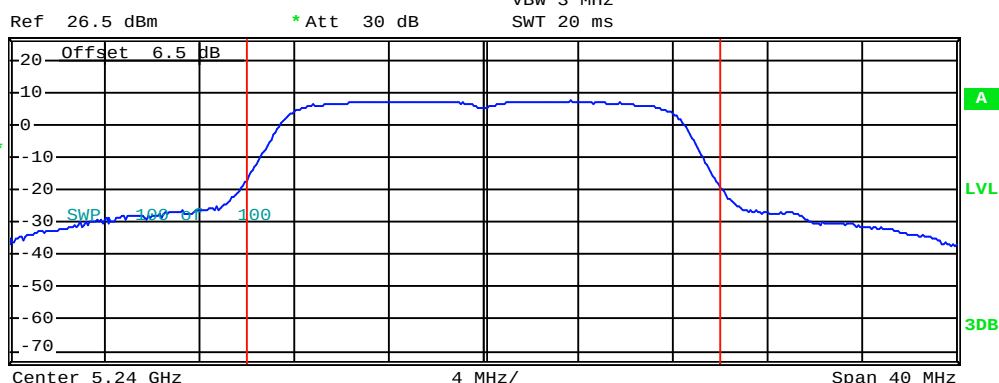

Tx Channel

Bandwidth

20 MHz

Power

17.87 dBm


Highest channel

23dBi Antenna (TX1)

802.11n20



1 RM
MAXH

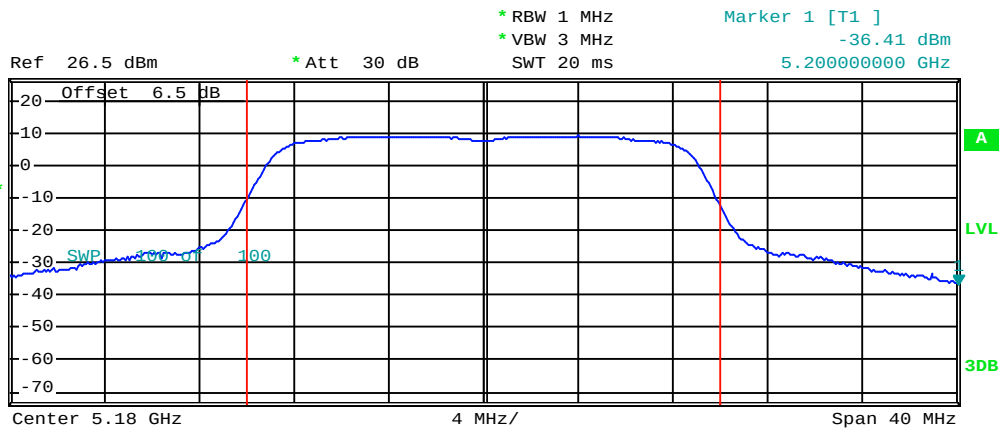


Tx Channel
Bandwidth 20 MHz Power 19.86 dBm

Lowest channel



1 RM
MAXH

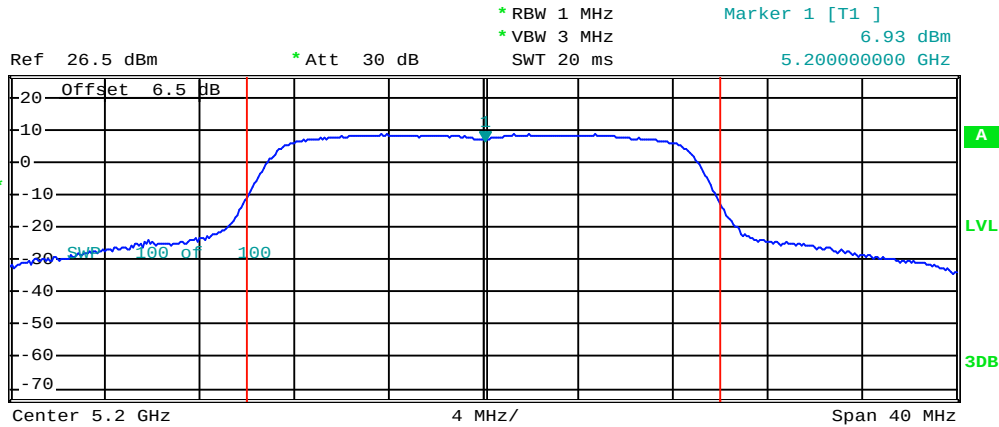


Tx Channel
Bandwidth 20 MHz Power 19.26 dBm

Middle channel



1 RM
MAXH

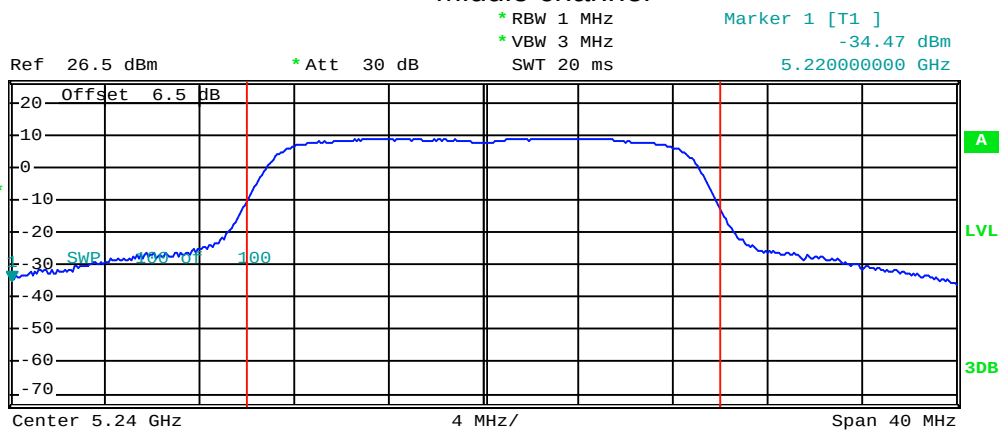


Tx Channel
Bandwidth 20 MHz Power 19.71 dBm

Highest channel

30dBi Antenna (TX1)

802.11n20

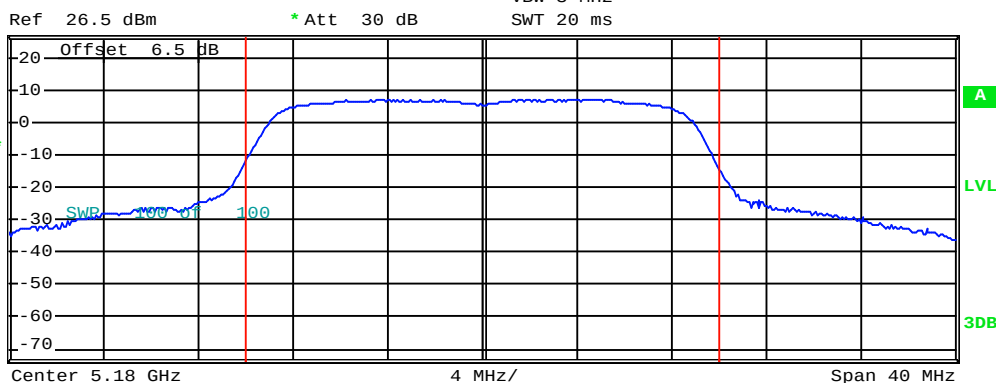

Tx Channel


Bandwidth

20 MHz

Power

17.77 dBm

Lowest channel

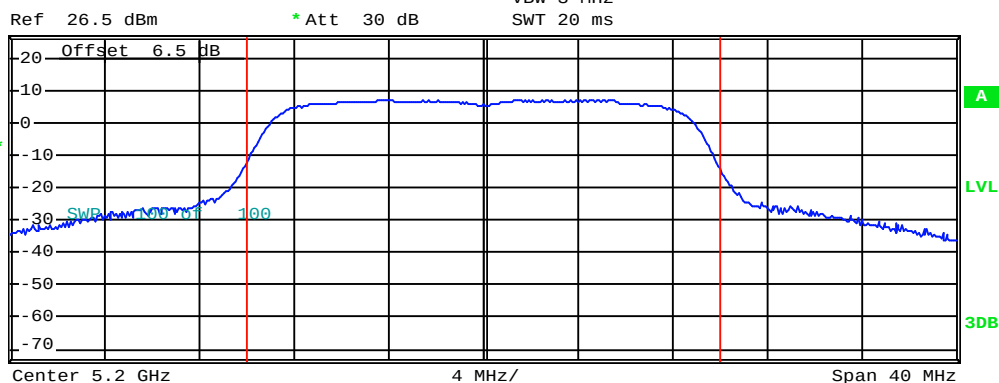

Tx Channel


Bandwidth

20 MHz

Power

17.70 dBm

Middle channel

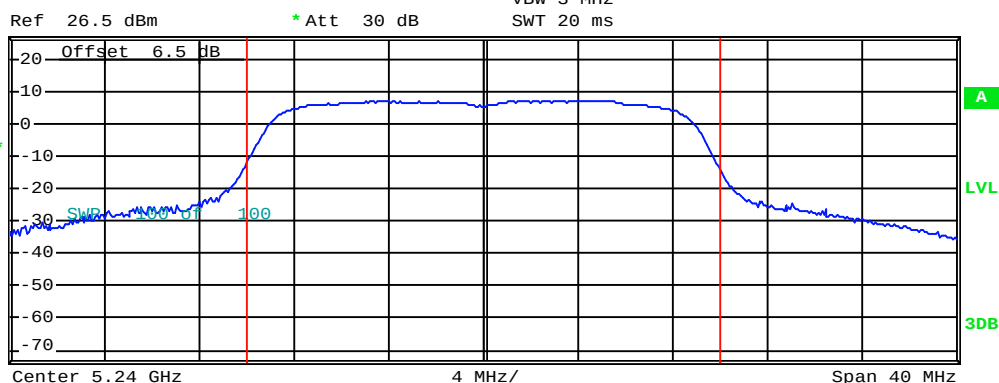

Tx Channel

Bandwidth



20 MHz

Power

17.80 dBm


Highest channel

23dBi Antenna (TX1)

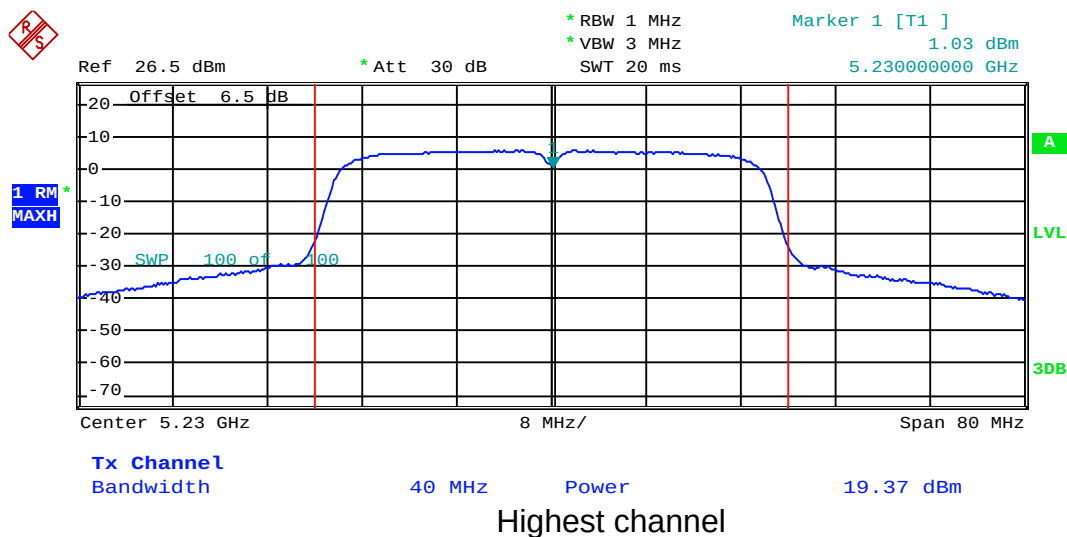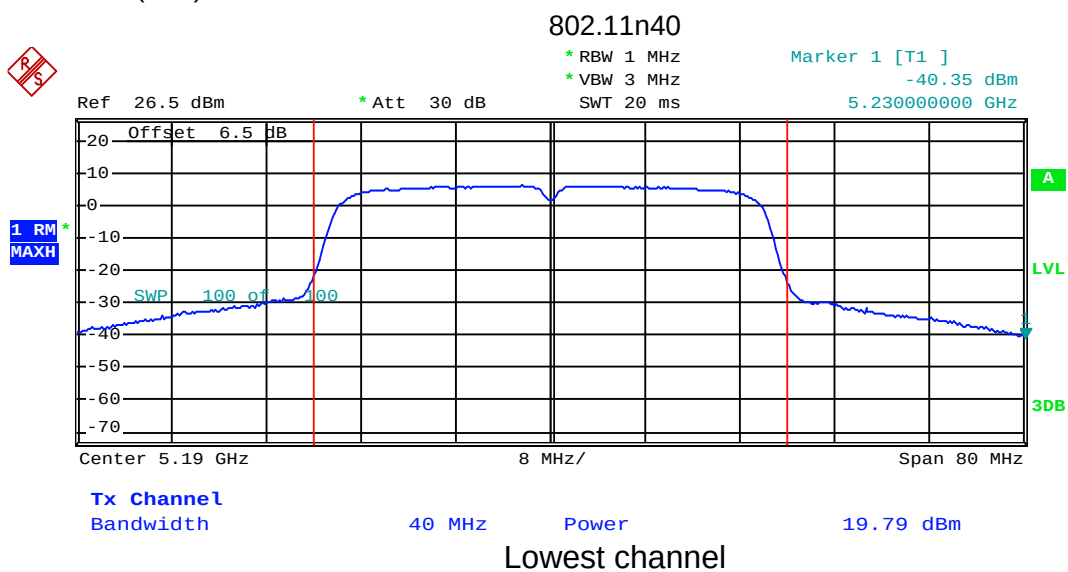


30dBi Antenna (TX1)

802.11n40

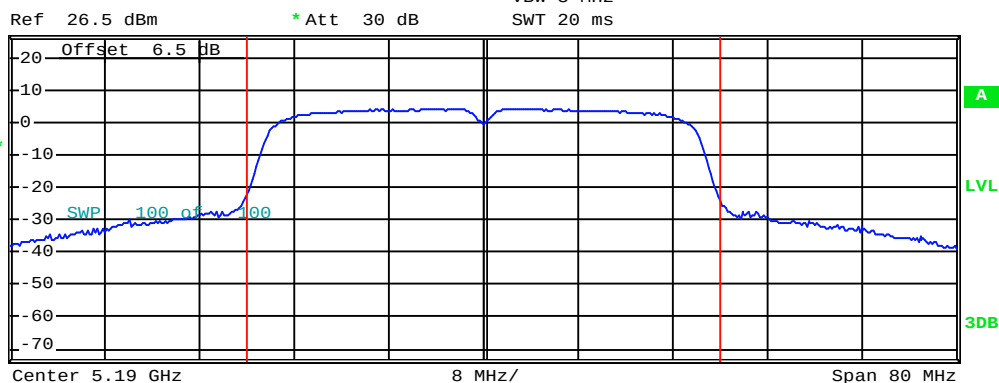

Tx Channel
Bandwidth 40 MHz Power 17.84 dBm

Lowest channel

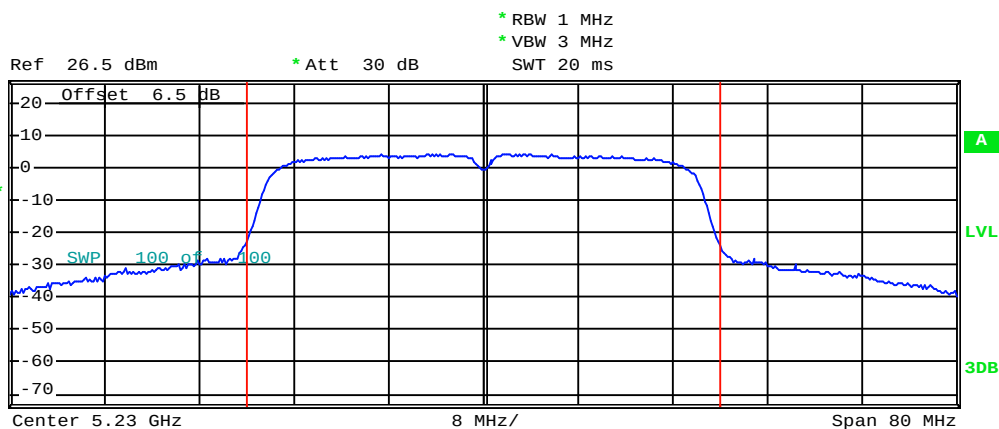


Tx Channel
Bandwidth 40 MHz Power 17.58 dBm

Highest channel


Band 4:

23dBi Antenna (TX0)


802.11a

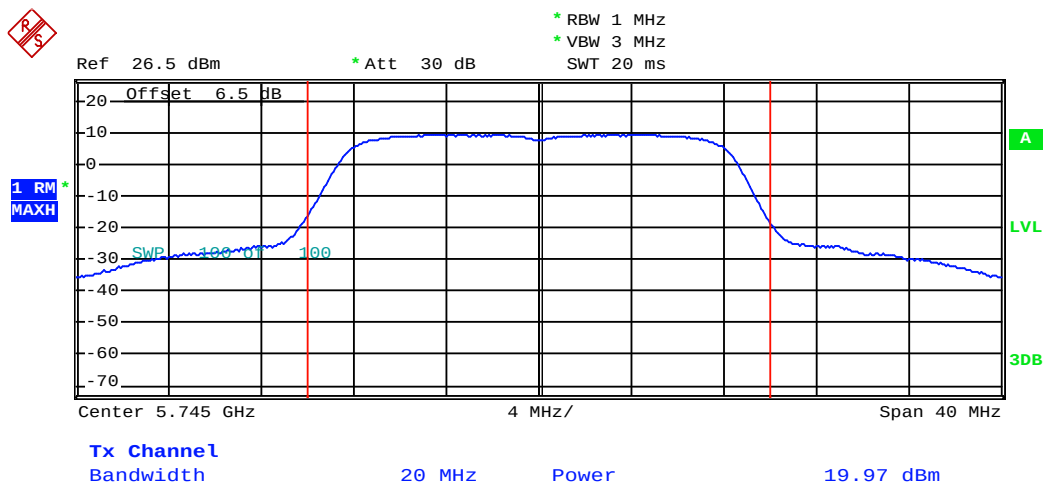

Lowest channel



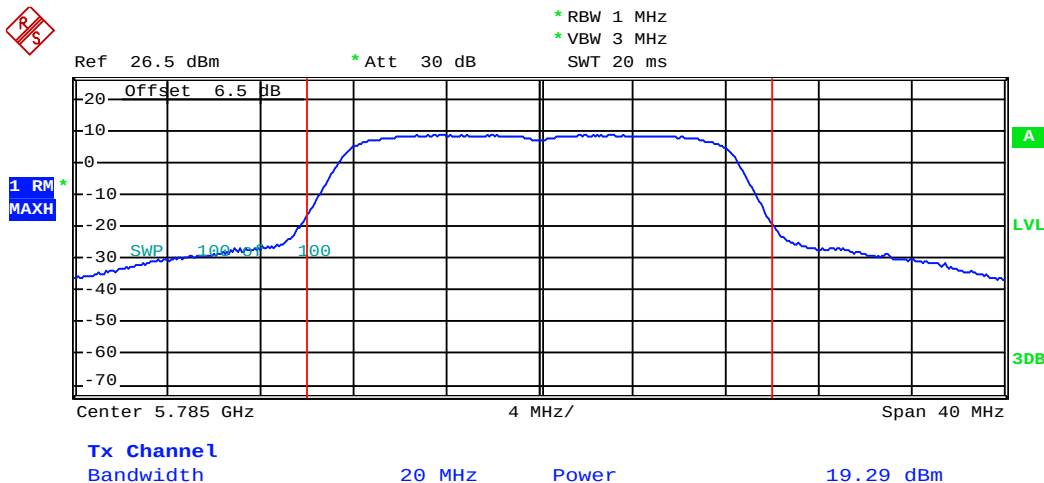


Middle channel

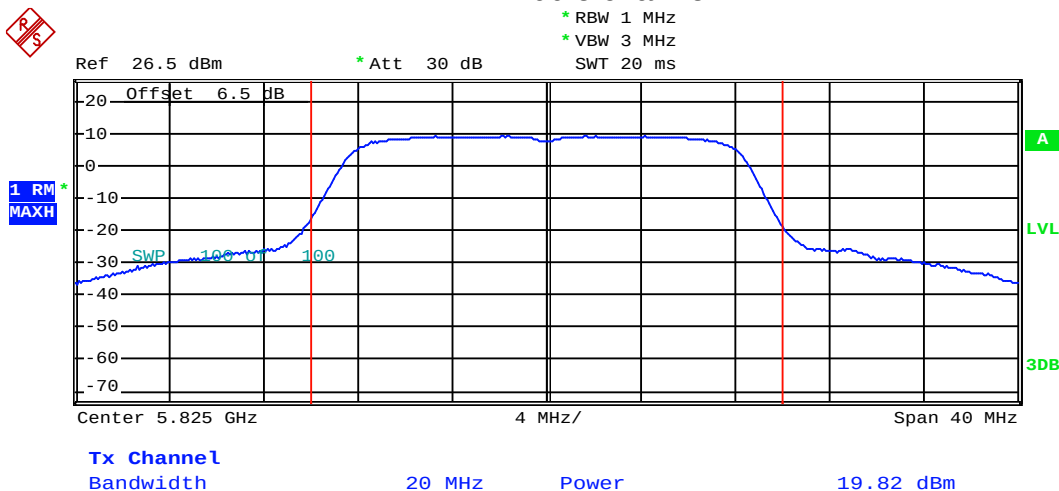

Highest channel


30dBi Antenna (TX0)

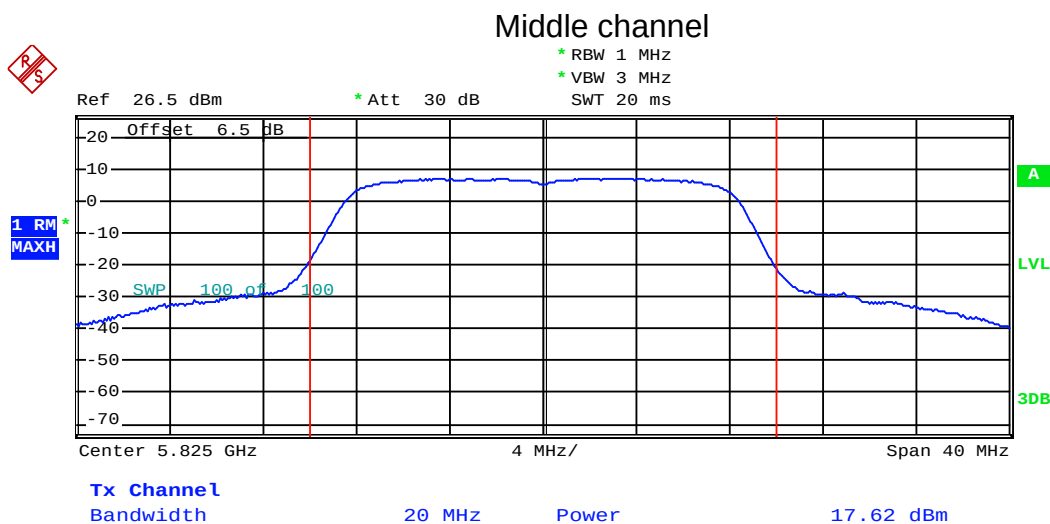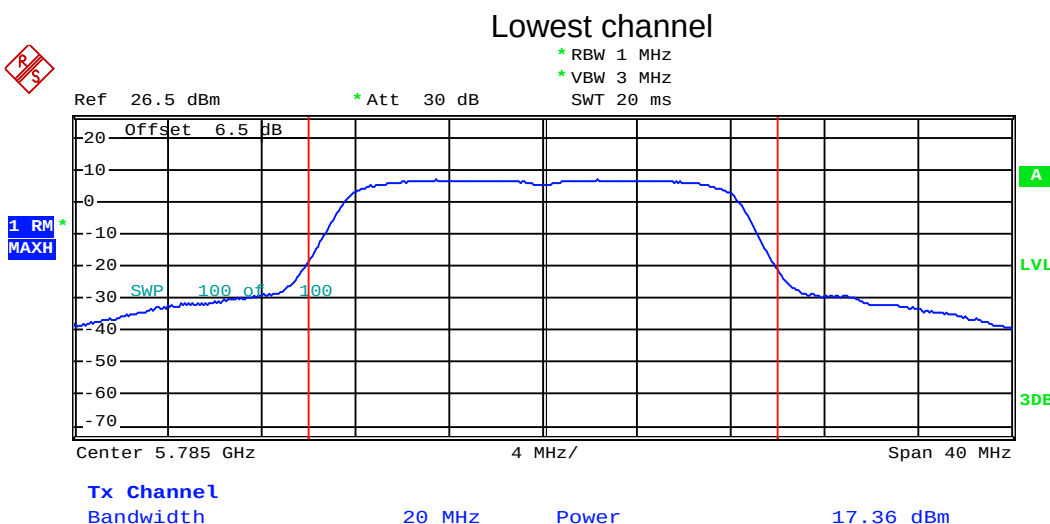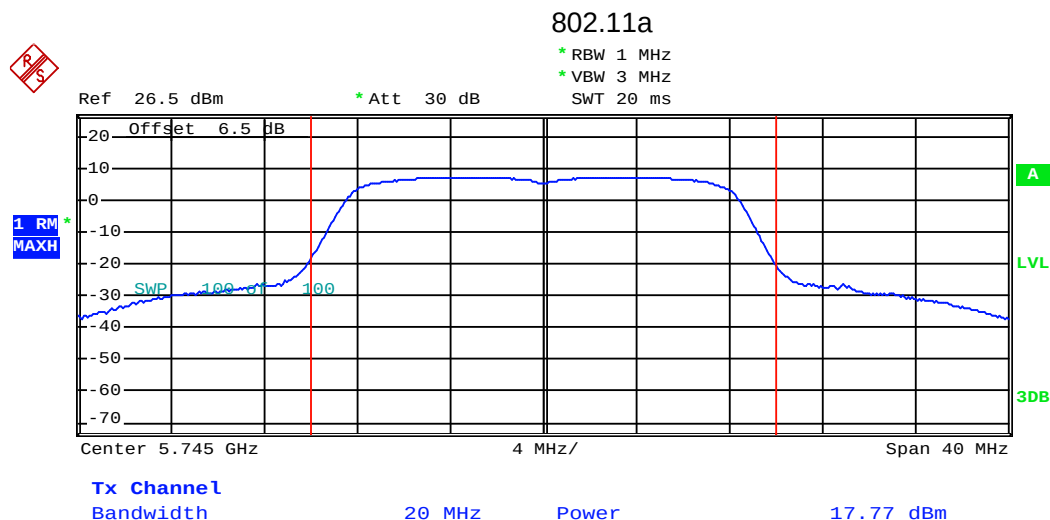


Highest channel

23dBi Antenna (TX0)


802.11n20

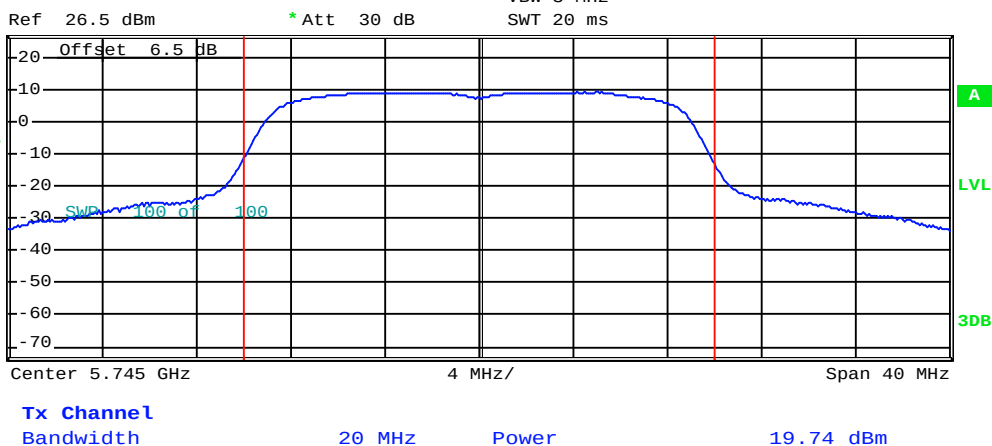

Lowest channel

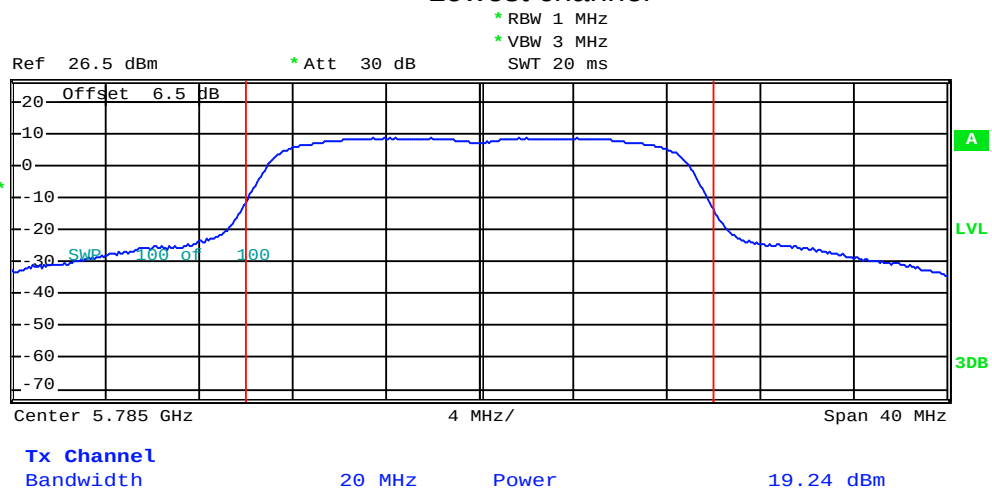


Middle channel

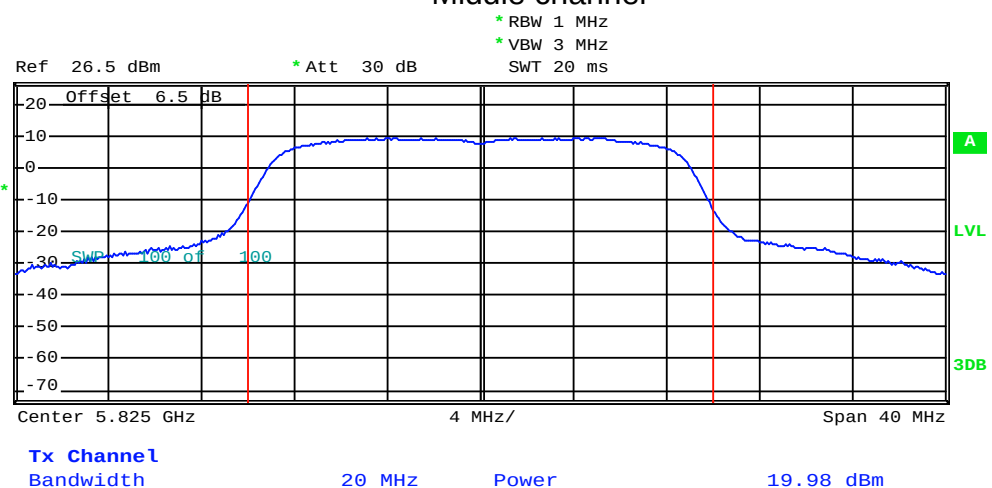

Highest channel

30dBi Antenna (TX0)

802.11n20

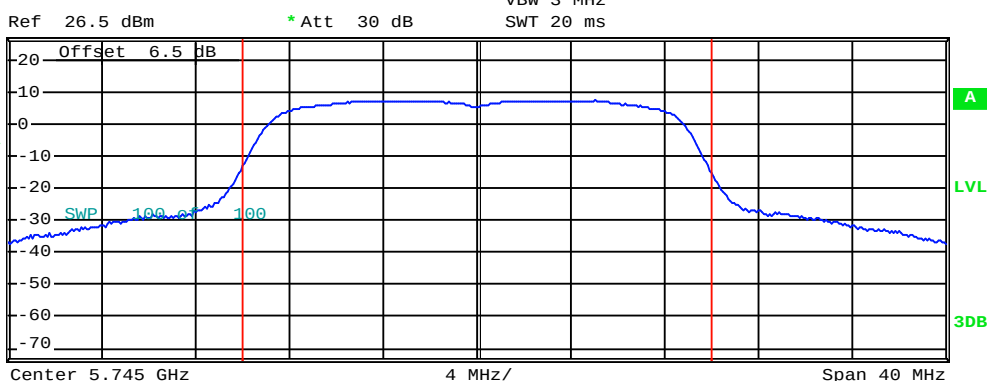


Tx Channel
Bandwidth

20 MHz

Power

17.92 dBm

Lowest channel

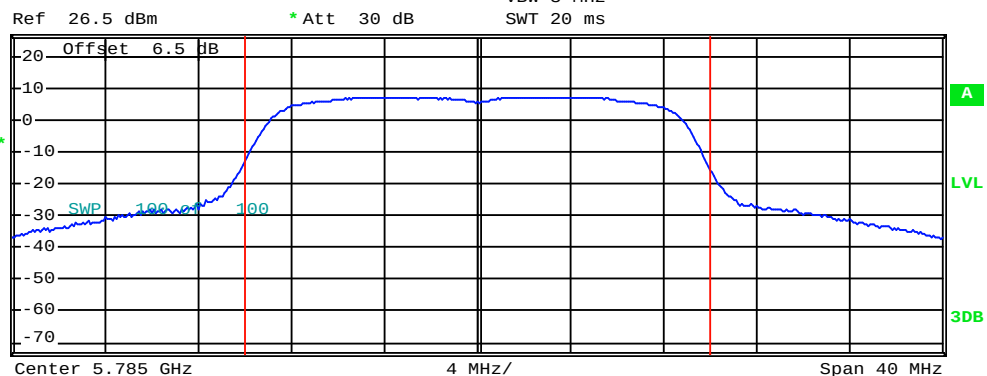


Tx Channel
Bandwidth

20 MHz

Power

17.91 dBm

Middle channel

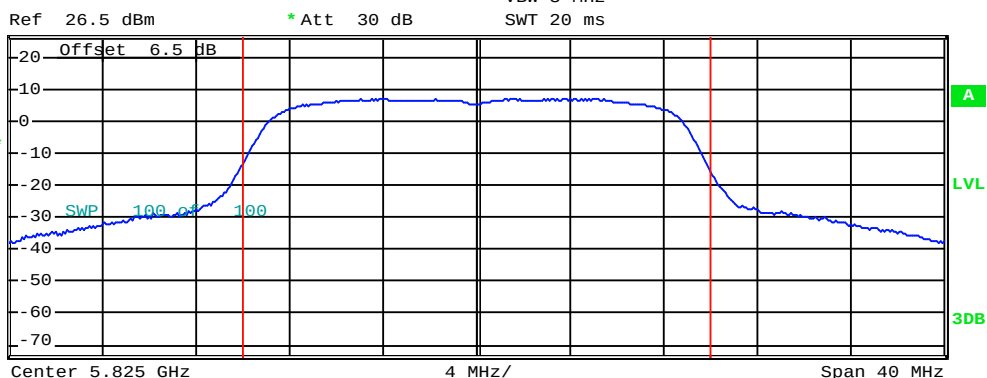

Tx Channel
Bandwidth

20 MHz


Power

17.63 dBm

Highest channel


23dBi Antenna (TX0)

802.11n40

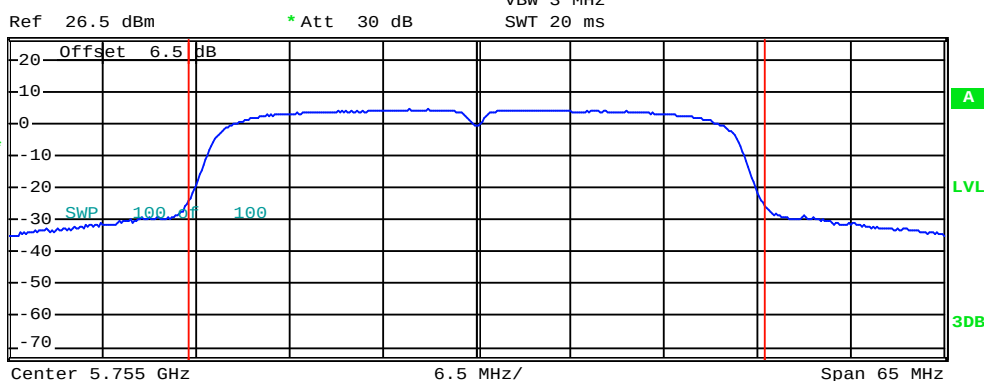

Tx Channel
Bandwidth 40 MHz Power 17.90 dBm

Lowest channel

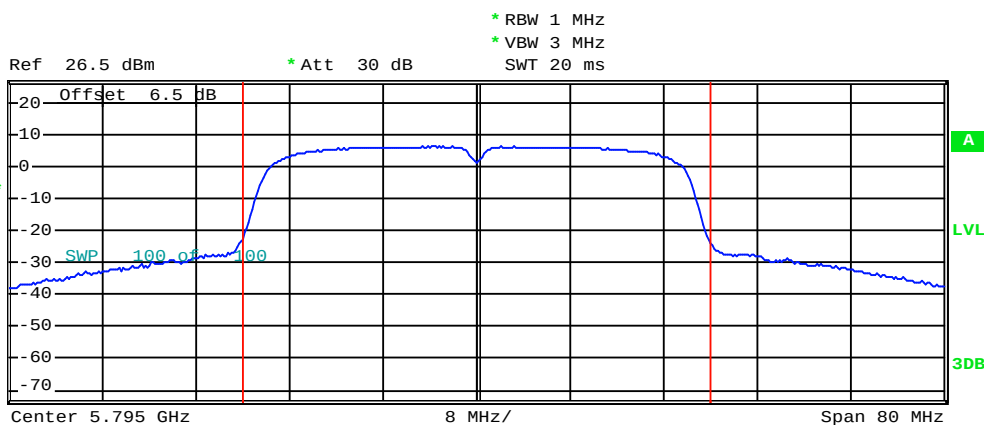


Tx Channel
Bandwidth 40 MHz Power 19.88 dBm

Highest channel


30dBi Antenna (TX0)

802.11n40

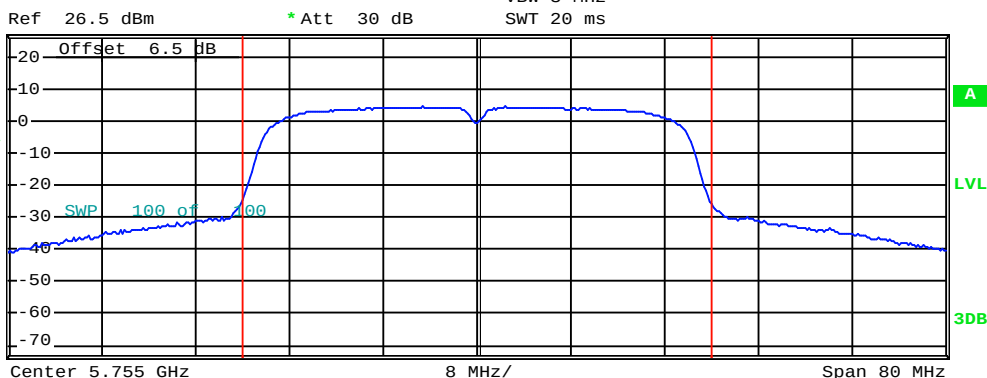

Tx Channel
Bandwidth 40 MHz Power 17.95 dBm

Lowest channel

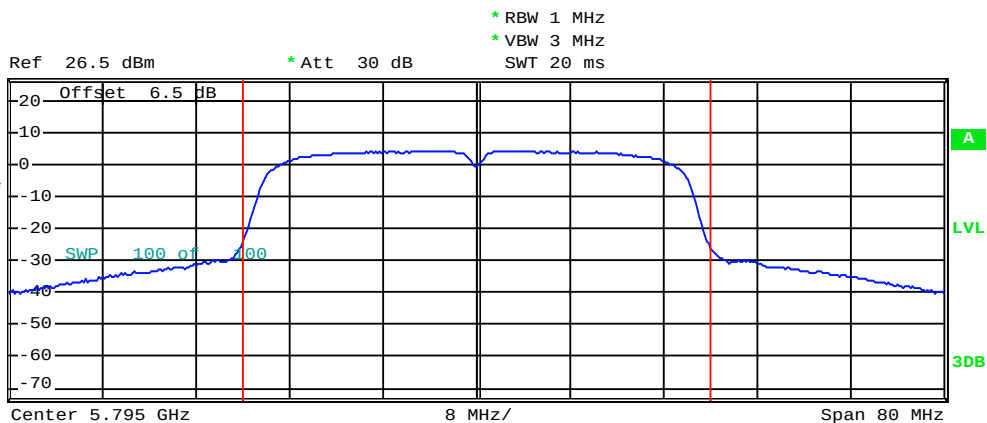


Tx Channel
Bandwidth 40 MHz Power 17.84 dBm

Highest channel


23dBi Antenna (TX1)

802.11a

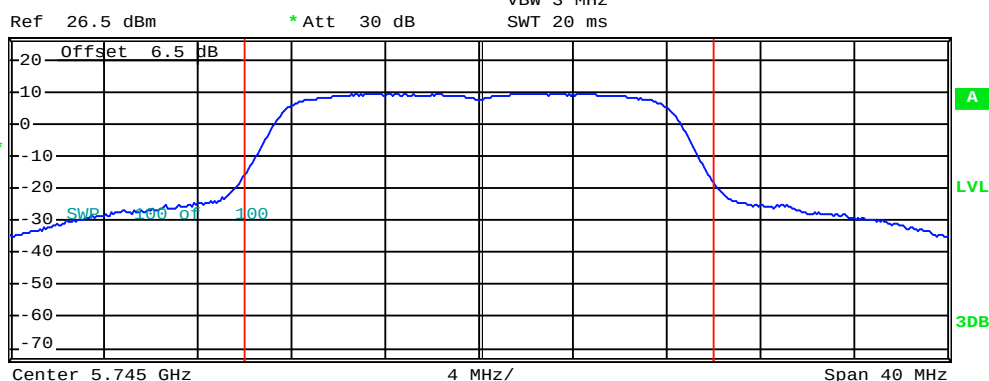


Tx Channel
Bandwidth 20 MHz Power 19.99 dBm

Lowest channel

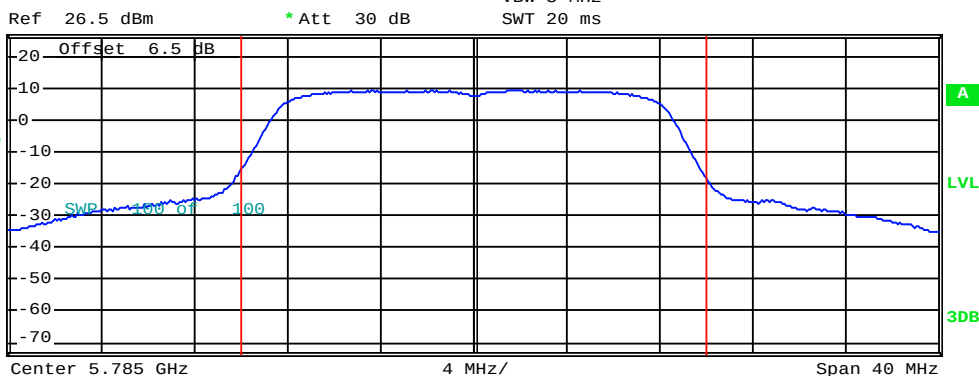

Tx Channel
Bandwidth 20 MHz Power 19.90 dBm

Middle channel

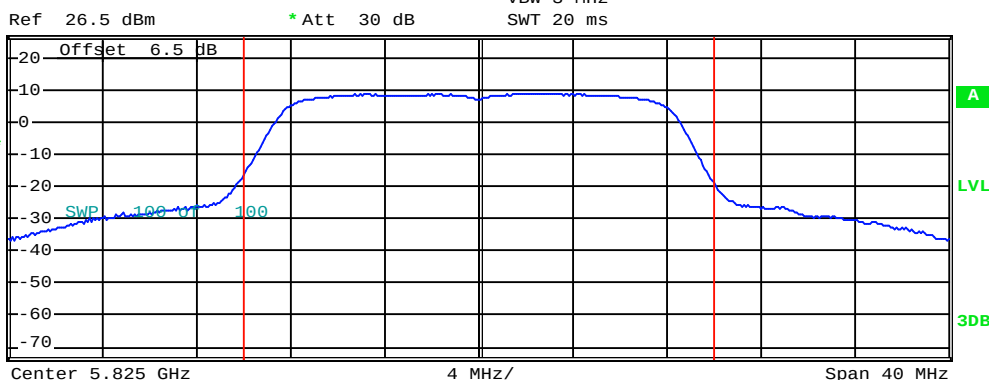


Tx Channel
Bandwidth 20 MHz Power 19.37 dBm


Highest channel

30dBi Antenna (TX1)


802.11a

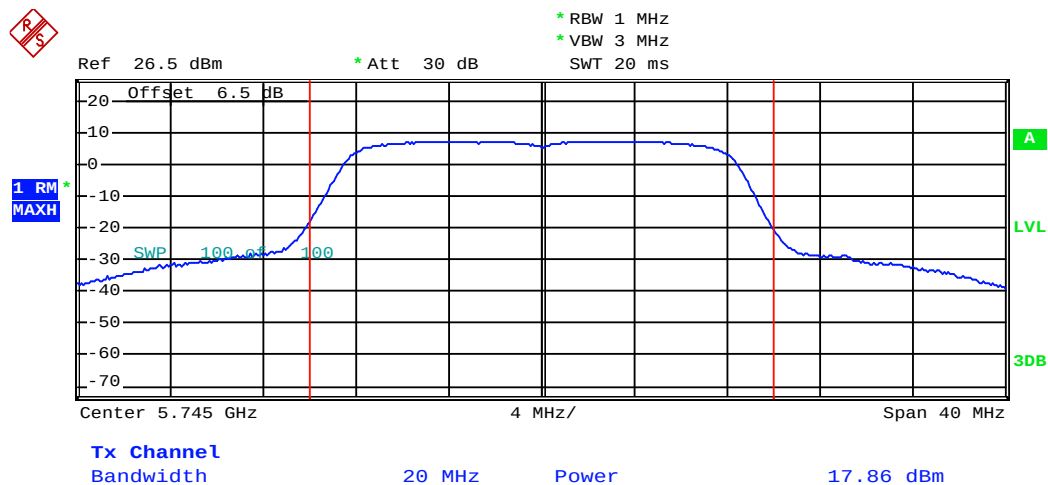

Lowest channel

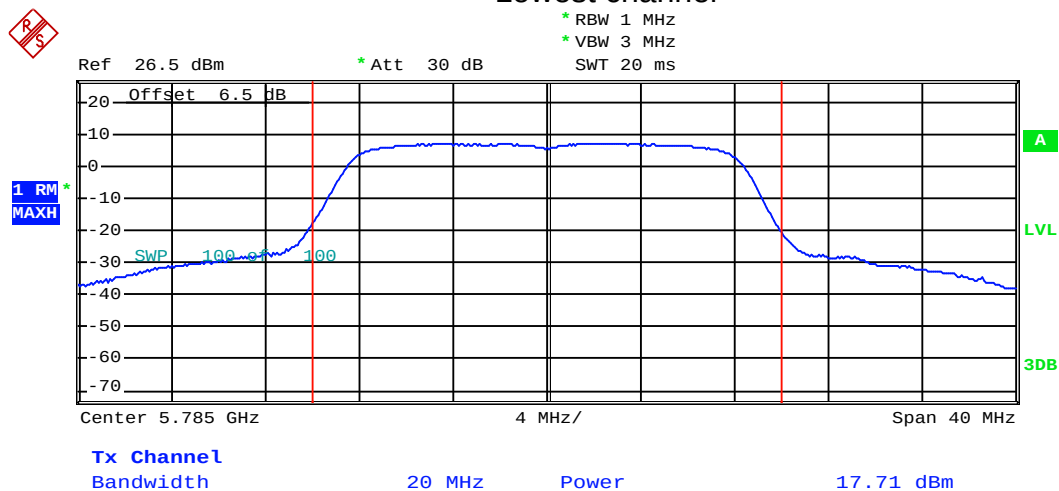


Middle channel

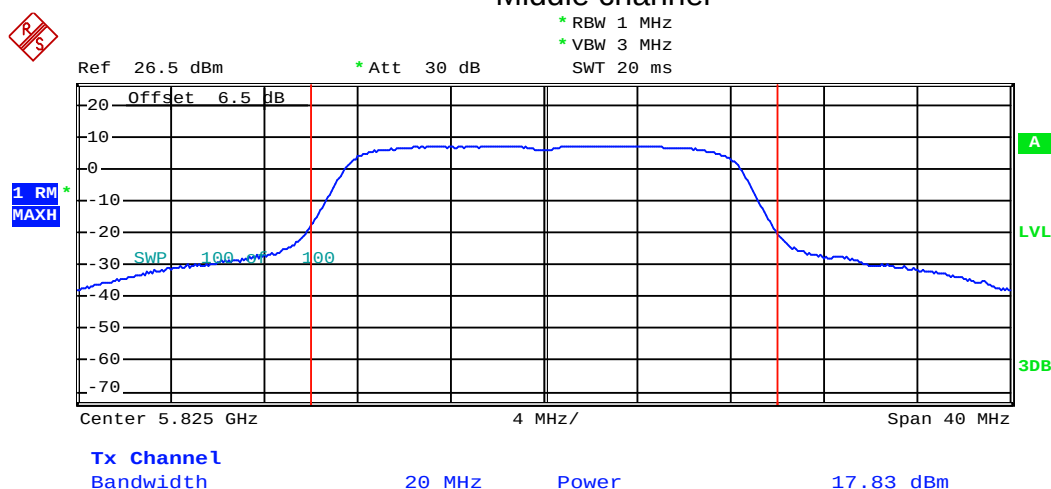


Highest channel

23dBi Antenna (TX1)


802.11n20

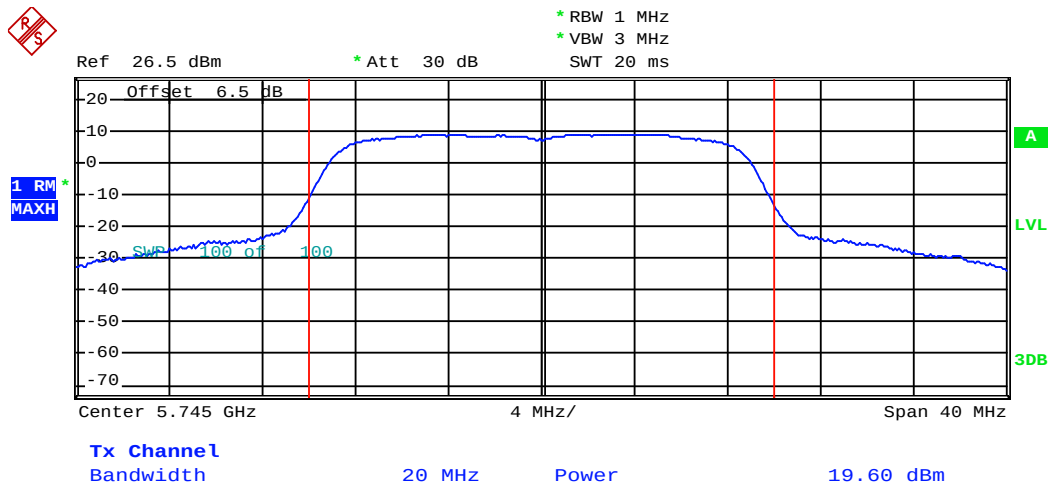

Lowest channel

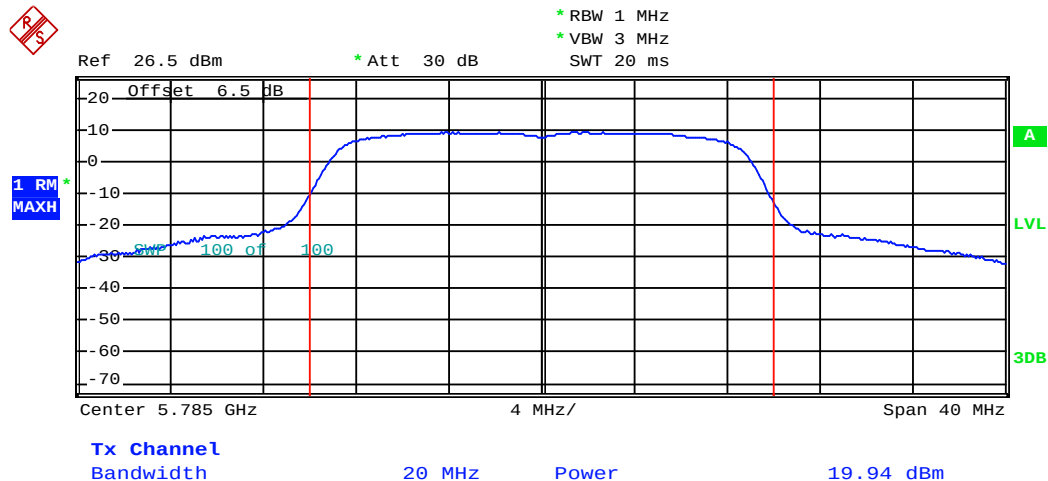


Middle channel

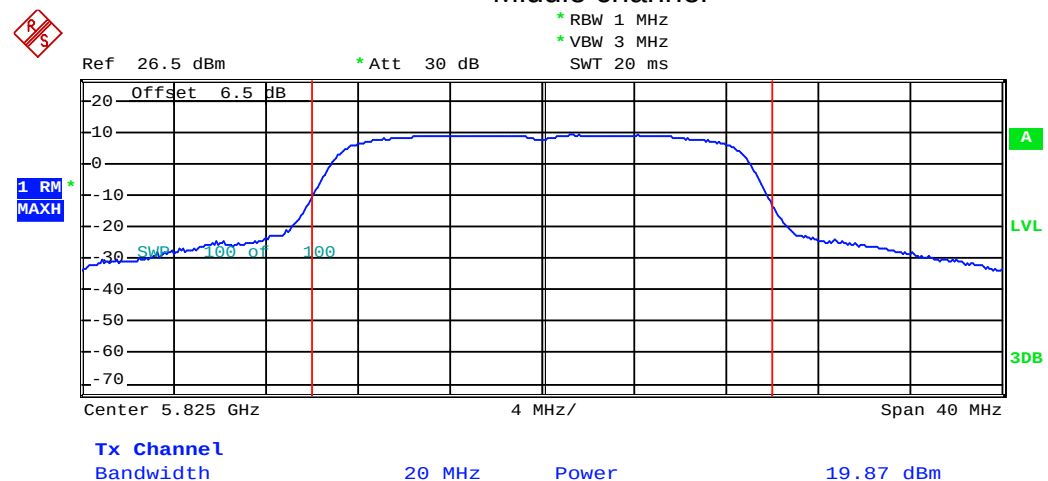


Highest channel

30dBi Antenna (TX1)


802.11n20

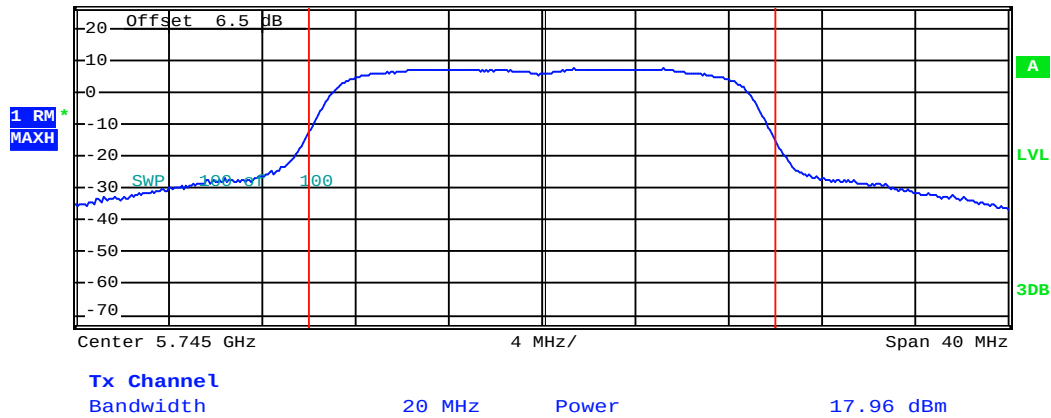

Lowest channel

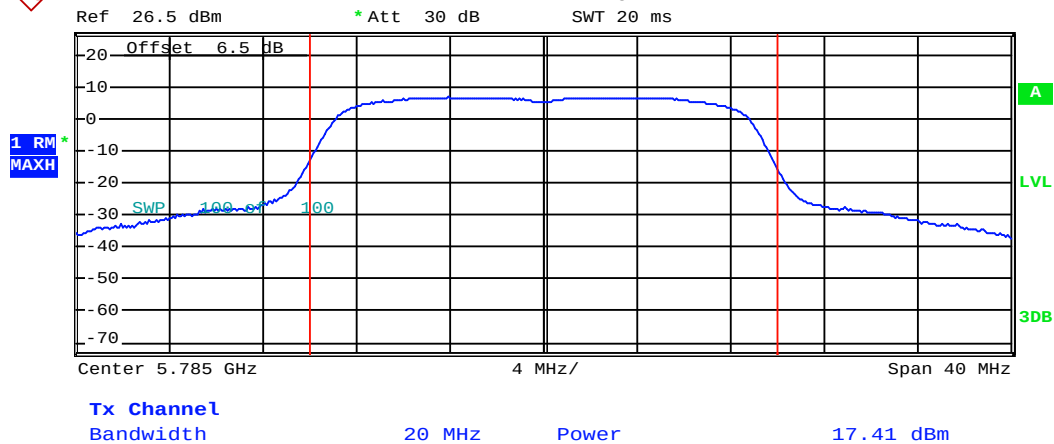

Middle channel

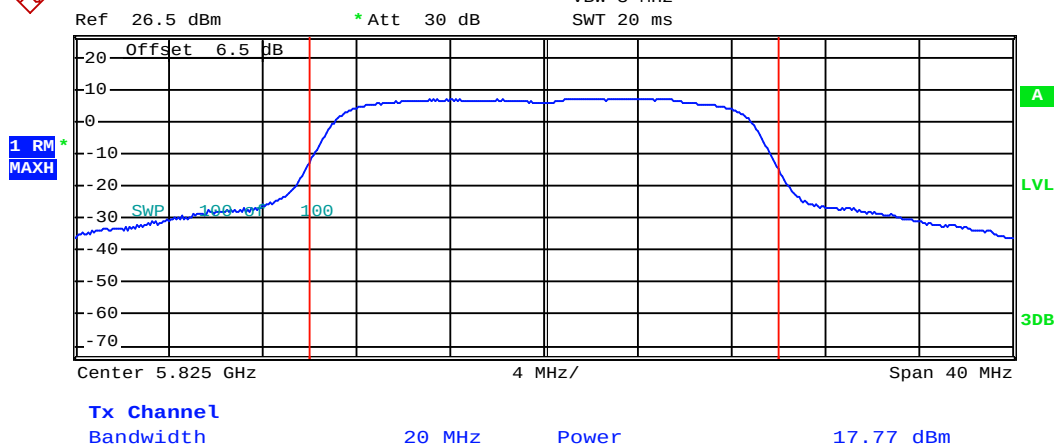


Highest channel

23dBi Antenna (TX1)

802.11n40



1 RM
MAXH

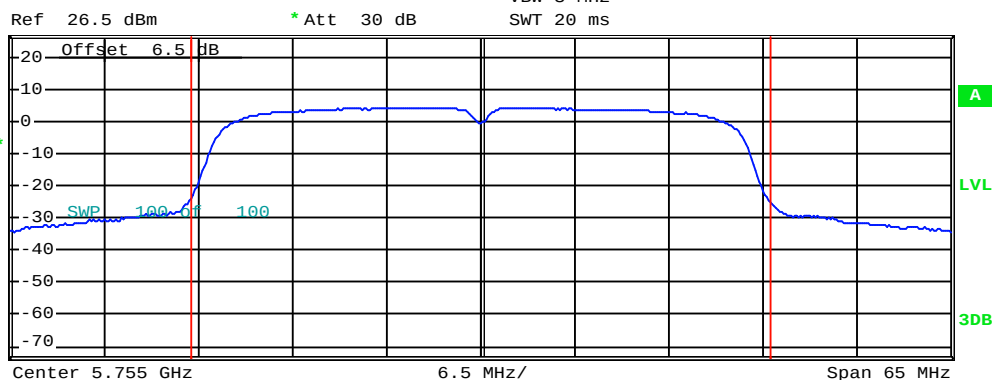

Tx Channel

Bandwidth

40 MHz


Power

17.87 dBm

Lowest channel



1 RM
MAXH

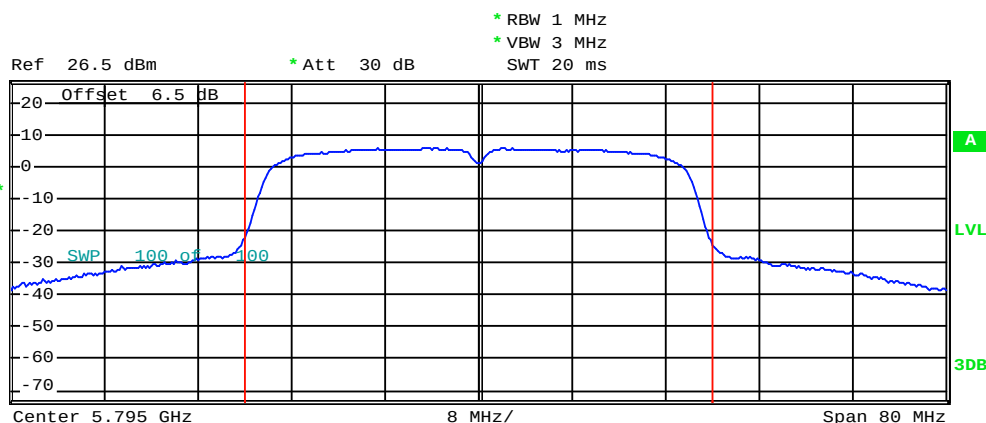

Tx Channel

Bandwidth

40 MHz


Power

19.30 dBm


Highest channel

30dBi Antenna (TX1)

802.11n40

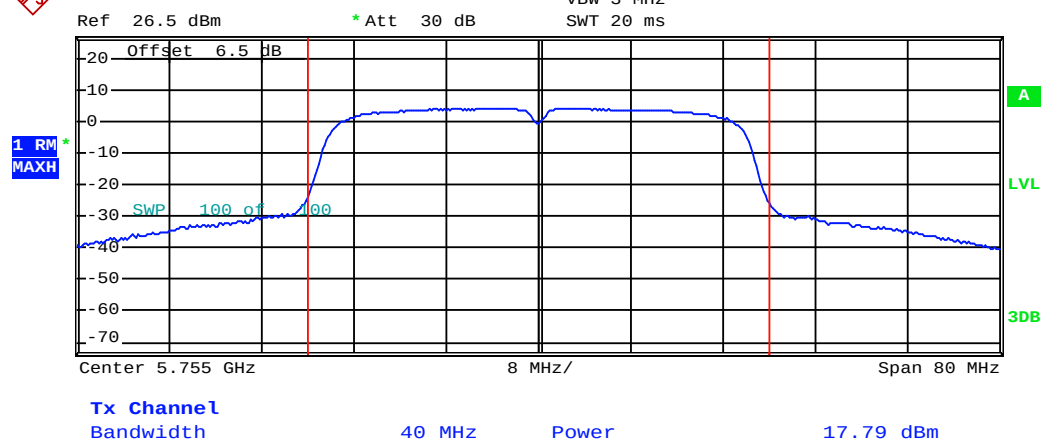


Lowest channel

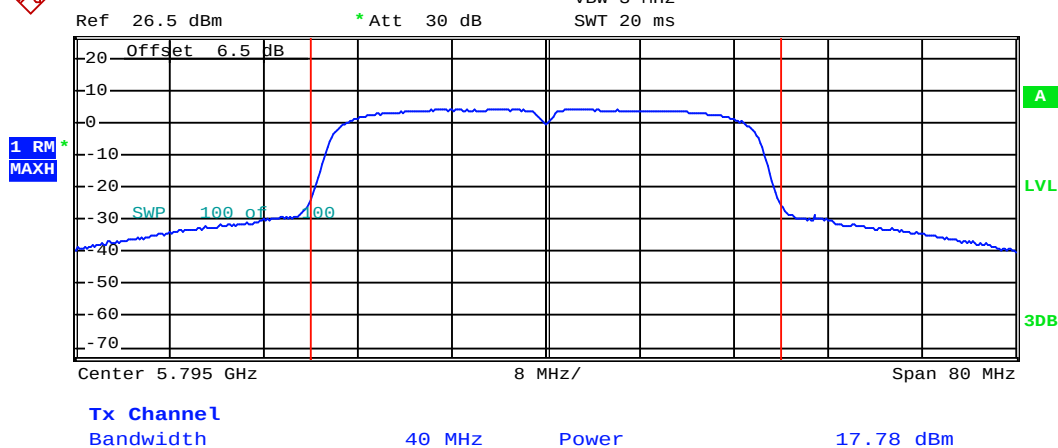

Highest channel

6.5 Emission Bandwidth

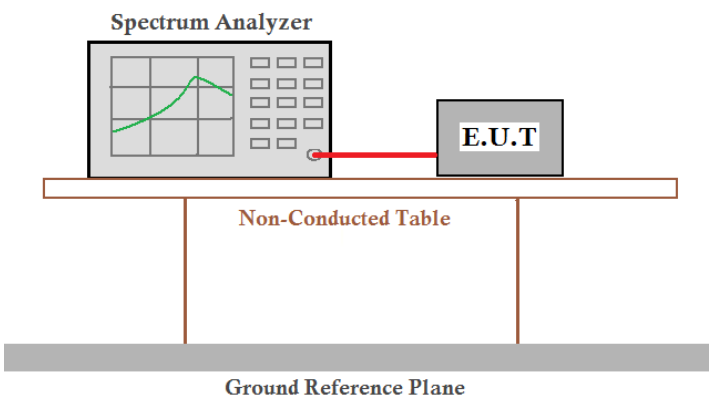Test Requirement:	FCC Part15 E Section 15.407 (a) and Section 15.407 (e)
Test Method:	ANSI C63.4:2003 and KDB 789033
Limit:	Band 1: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: >500kHz(6dB Bandwidth)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Band 1:

Test Channel	26dB Emission Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	19.28	20.16	39.04	N/A	N/A
Middle	19.36	20.08	---		
Highest	19.28	20.24	39.04		

Test Channel	99% Occupy Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	16.56	17.52	35.52	N/A	N/A
Middle	16.64	17.52	---		
Highest	16.64	17.44	35.52		

Band 4:

Test Channel	26dB Emission Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	19.20	19.92	38.40	N/A	N/A
Middle	19.20	20.08	---		
Highest	19.28	20.00	38.56		

Test Channel	99% Occupy Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	16.56	17.36	35.20	N/A	N/A
Middle	16.48	17.36	---		
Highest	16.64	17.36	35.20		


Test Channel	6dB Emission Bandwidth (MHz)			Limit	Result
	802.11a	802.11n20	802.11n40		
Lowest	16.16	16.40	34.08	>500kHz	N/A
Middle	16.08	16.24	---		
Highest	16.24	16.24	34.08		

Test plot as follows:

Band 1:


Test mode: 26dB EBW

802.11a

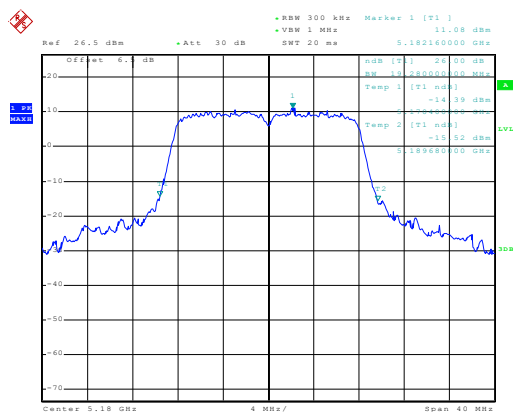


Date: 26.AUG.2014 17:23:43

Lowest channel

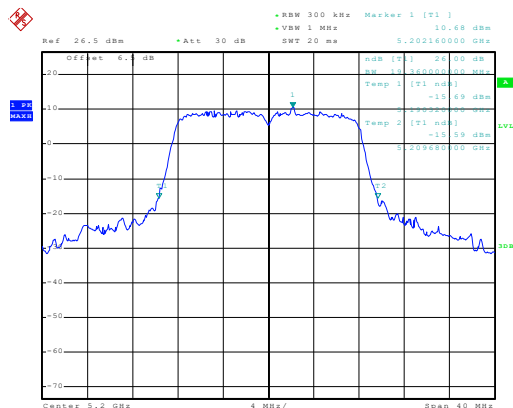

Date: 26.AUG.2014 17:26:47

Middle channel

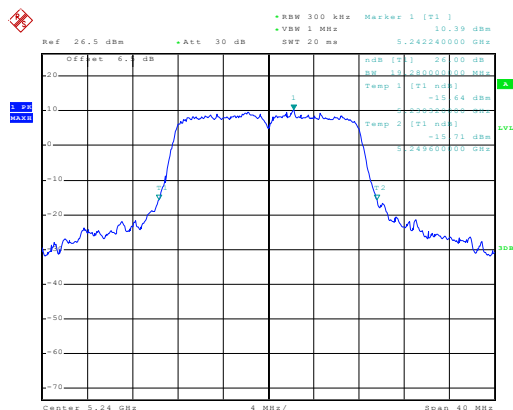


Date: 26.AUG.2014 17:27:15

Highest channel


Test mode: 26dB EBW

802.11n20

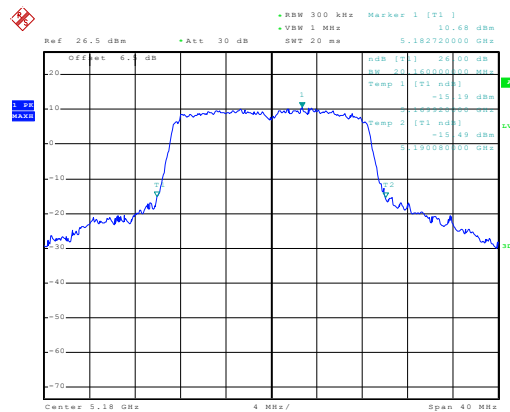


Date: 26.AUG.2014 17:58:42

Lowest channel

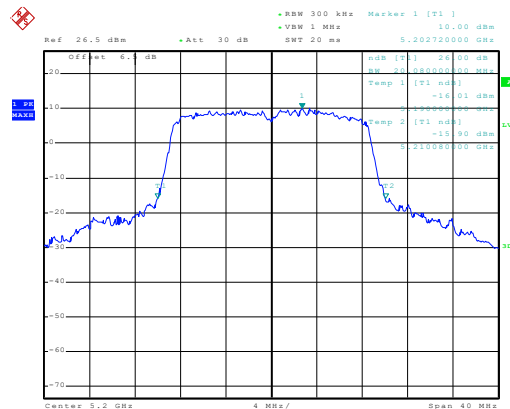

Date: 26.AUG.2014 18:01:35

Middle channel

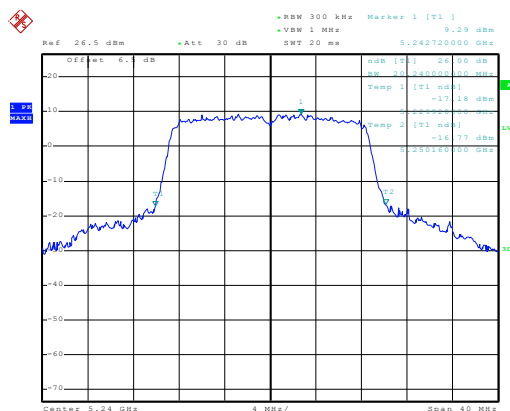


Date: 26.AUG.2014 18:02:01

Highest channel


Test mode: 26dB EBW

802.11n40

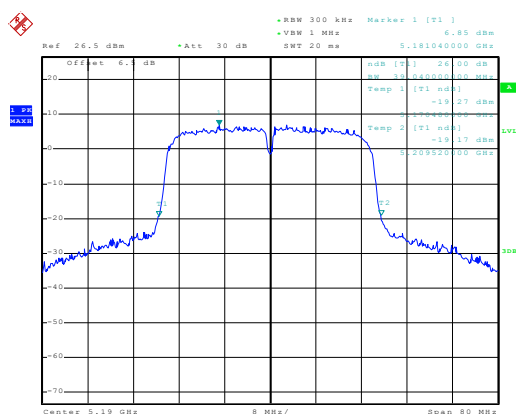

Date: 26. AUG. 2014 18:31:27

Lowest channel

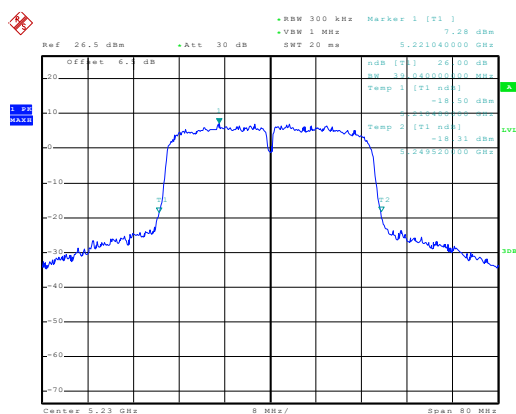


Date: 26. AUG. 2014 18:33:47

Highest channel


Test mode:99% OBW

802.11a

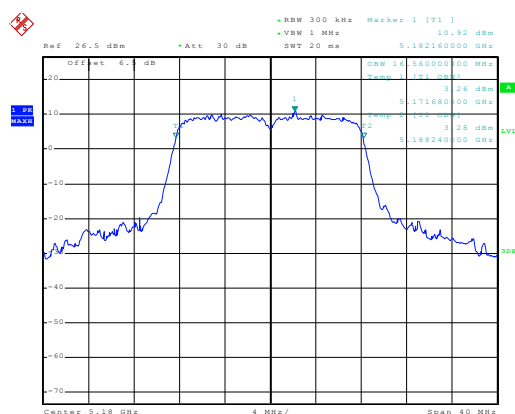


Date: 26.AUG.2014 17:24:00

Lowest channel

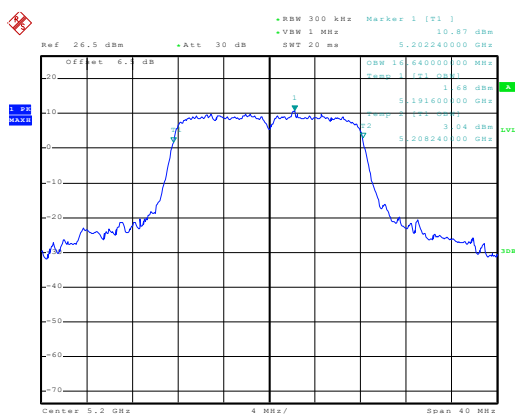

Date: 26.AUG.2014 17:26:23

Middle channel

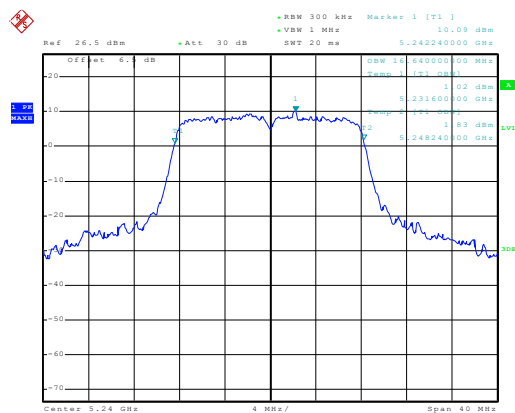


Date: 26.AUG.2014 17:27:31

Highest channel


Test mode: 99% OBW

802.11n20

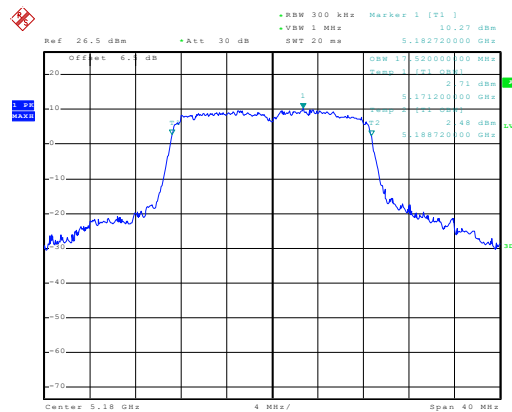


Date: 26.AUG.2014 17:58:56

Lowest channel

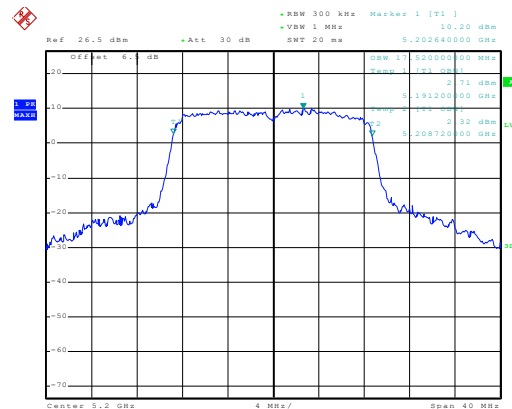

Date: 26.AUG.2014 18:01:19

Middle channel

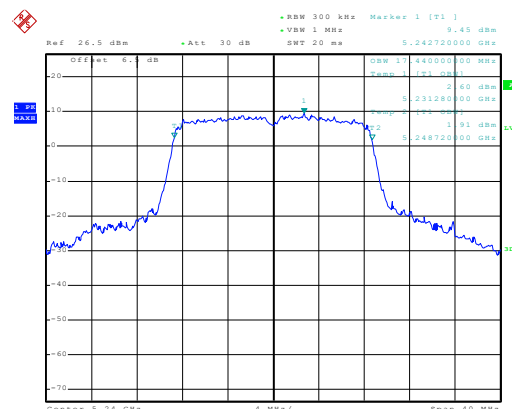


Date: 26.AUG.2014 18:02:19

Highest channel


Test mode: 99% OBW

802.11n40

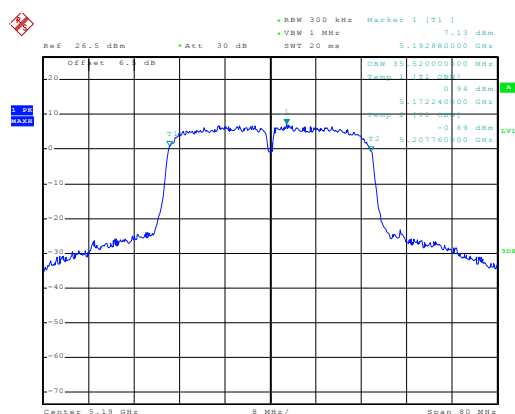

Date: 26.AUG.2014 18:11:13

Lowest channel

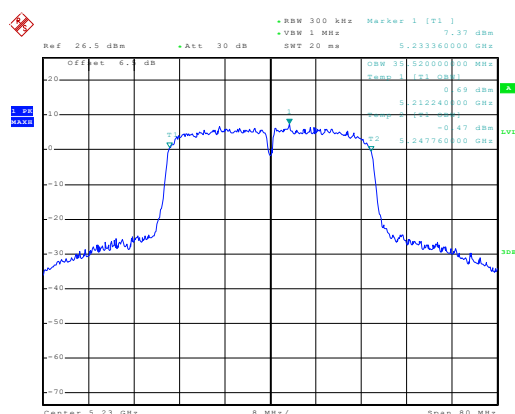


Date: 26.AUG.2014 18:33:56

Highest channel

Band 4:


Test mode: 26dB EBW

802.11a

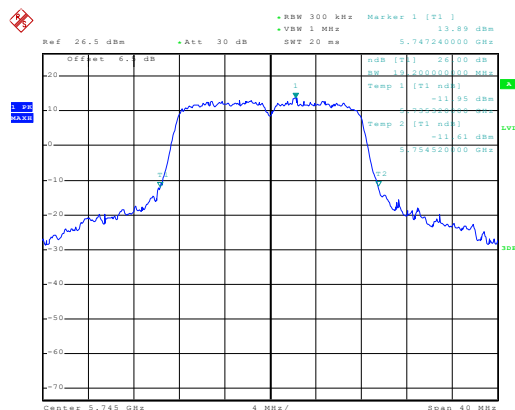


Date: 24.OCT.2014 11:39:22

Lowest channel

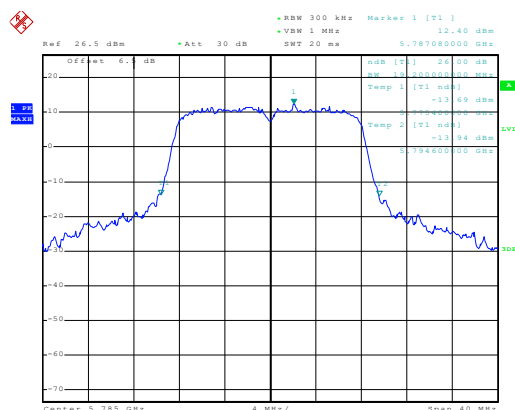

Date: 24.OCT.2014 11:29:52

Middle channel

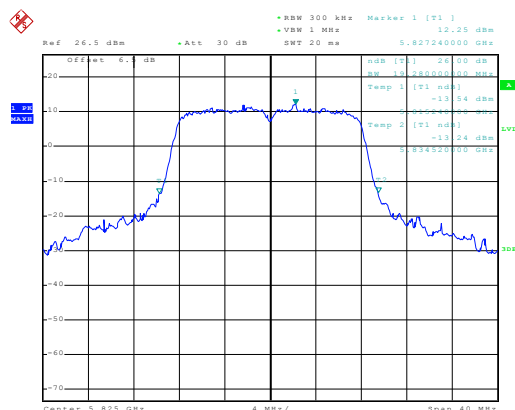


Date: 24.OCT.2014 11:32:10

Highest channel


Test mode: 26dB EBW

802.11n20

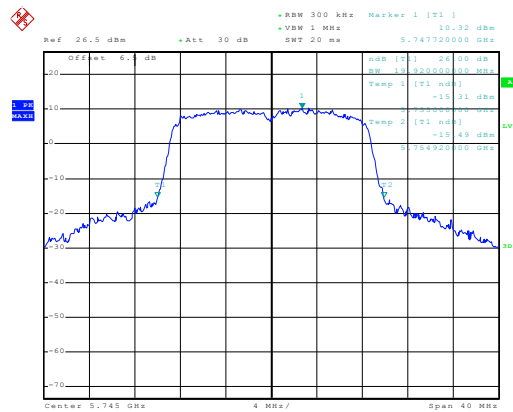


Date: 24.OCT.2014 15:37:20

Lowest channel

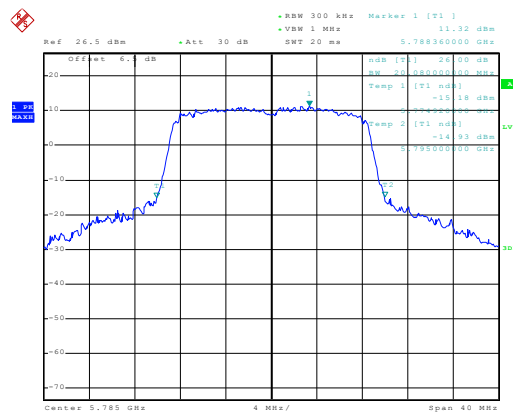

Date: 24.OCT.2014 15:36:27

Middle channel

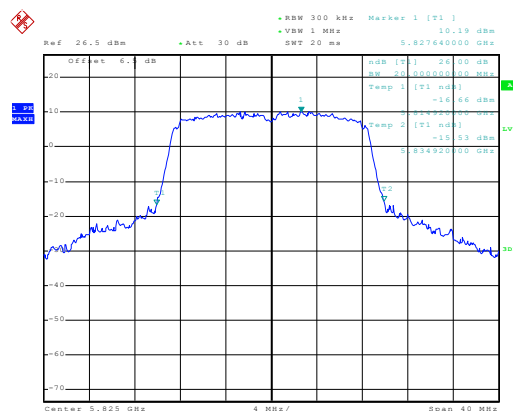


Date: 24.OCT.2014 15:33:31

Highest channel


Test mode: 26dB EBW

802.11n40

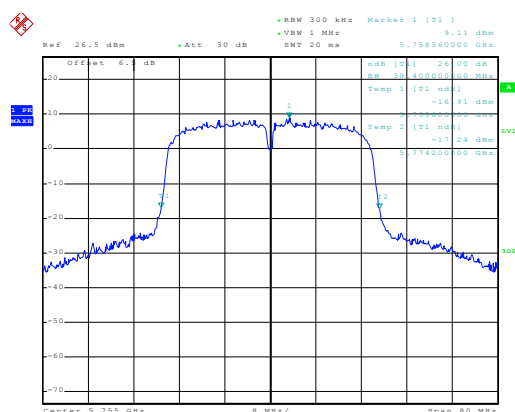

Date: 24.OCT.2014 16:24:07

Lowest channel

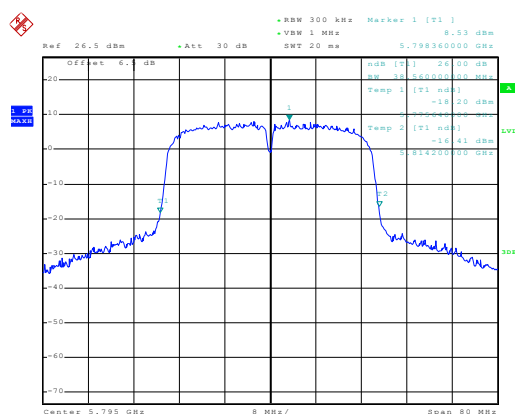


Date: 24.OCT.2014 16:25:09

Highest channel


Test mode:99% OBW

802.11a

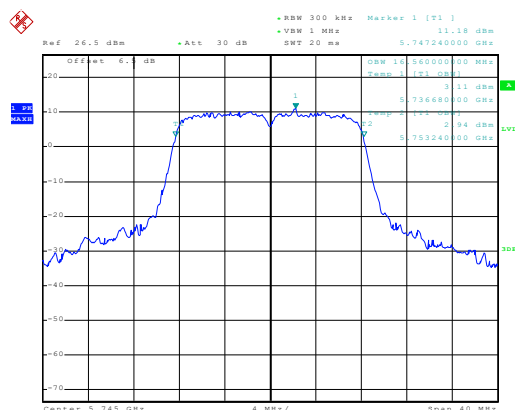


Date: 24.OCT.2014 10:08:16

Lowest channel

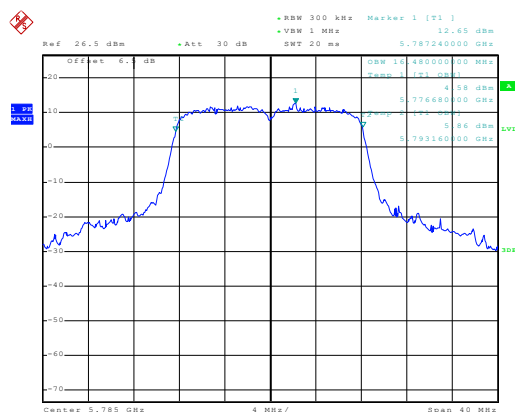

Date: 24.OCT.2014 11:29:37

Middle channel

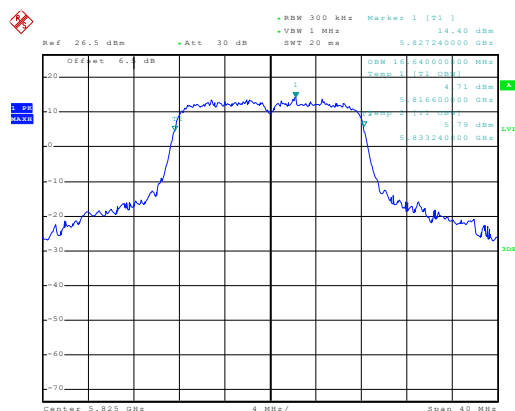


Date: 24.OCT.2014 11:38:33

Highest channel


Test mode: 99% OBW

802.11n20

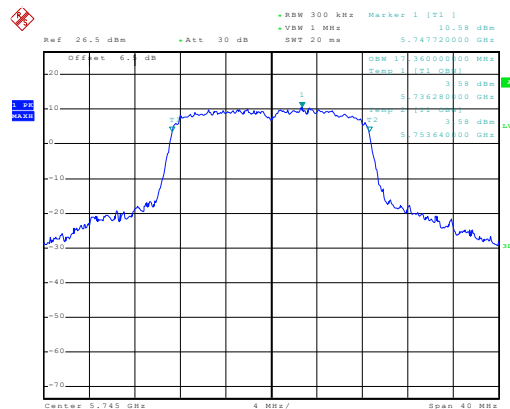


Date: 24.OCT.2014 15:37:07

Lowest channel

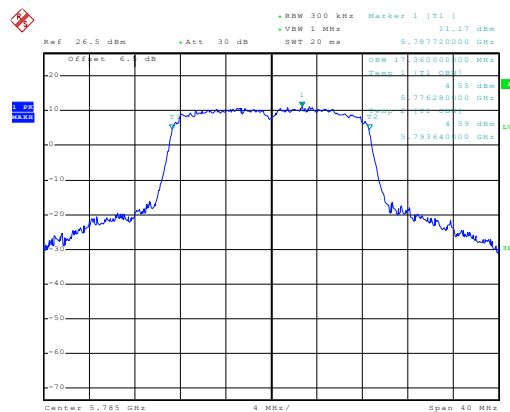

Date: 24.OCT.2014 15:36:42

Middle channel

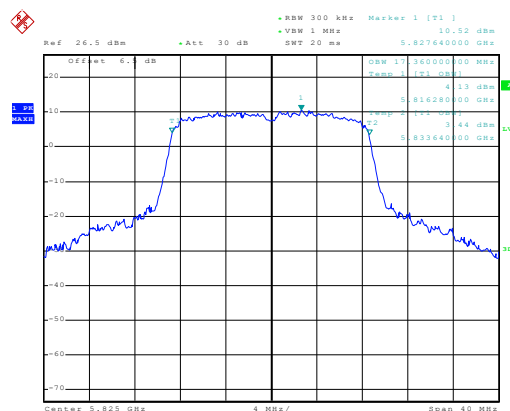


Date: 24.OCT.2014 15:33:11

Highest channel


Test mode: 99% OBW

802.11n40

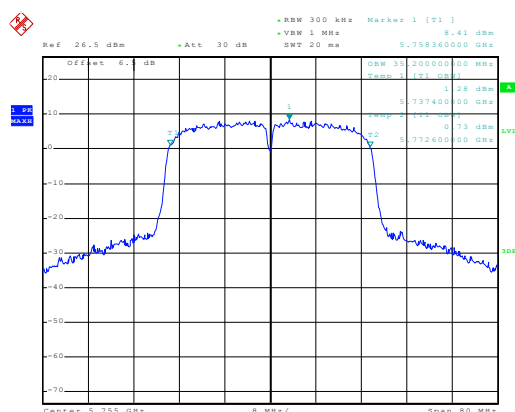

Date: 24.OCT.2014 16:24:26

Lowest channel

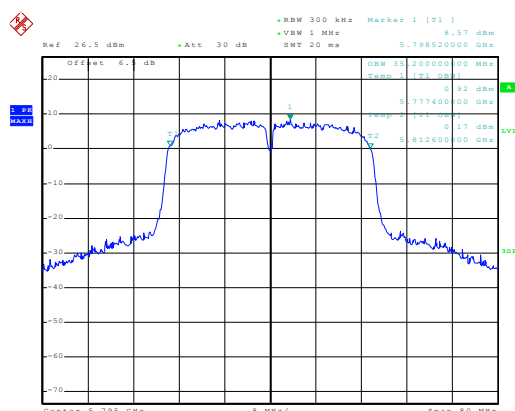


Date: 24.OCT.2014 16:24:55

Highest channel


Test mode:6dB BW

802.11a

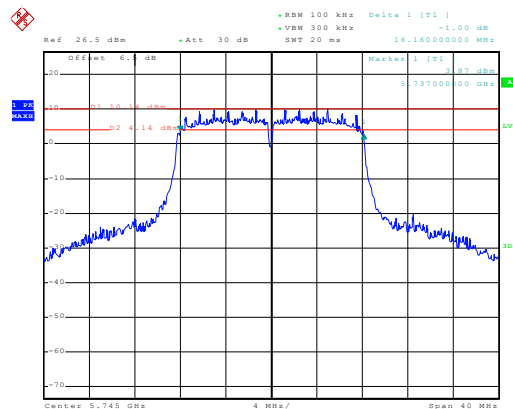


Date: 24.OCT.2014 11:50:58

Lowest channel

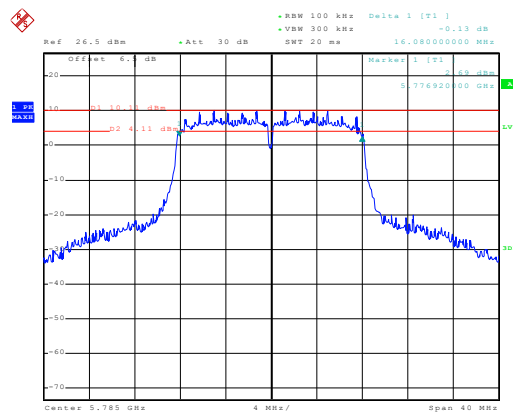

Date: 24.OCT.2014 11:50:00

Middle channel

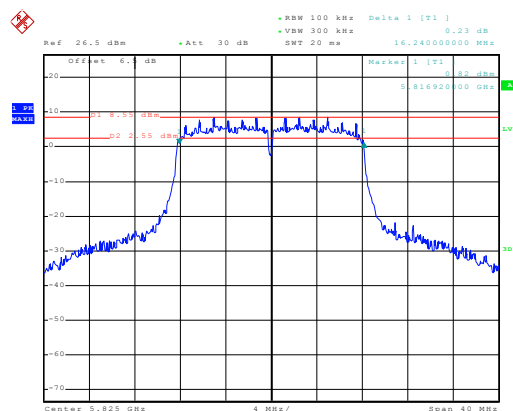


Date: 24.OCT.2014 11:54:33

Highest channel


Test mode: 6dB BW

802.11n20

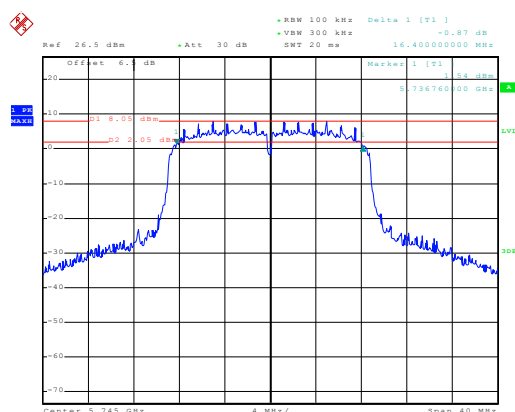


Date: 24.OCT.2014 15:27:01

Lowest channel

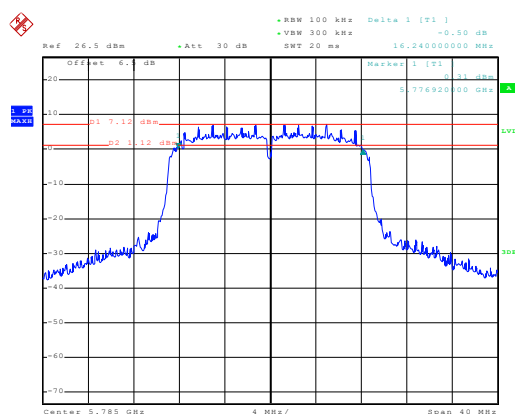

Date: 24.OCT.2014 15:30:15

Middle channel

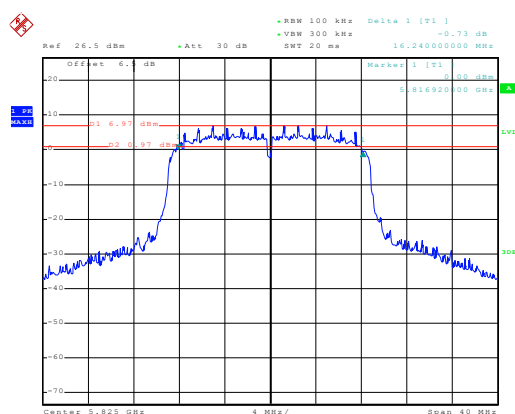


Date: 24.OCT.2014 15:31:24

Highest channel


Test mode: 6dB BW

802.11n40

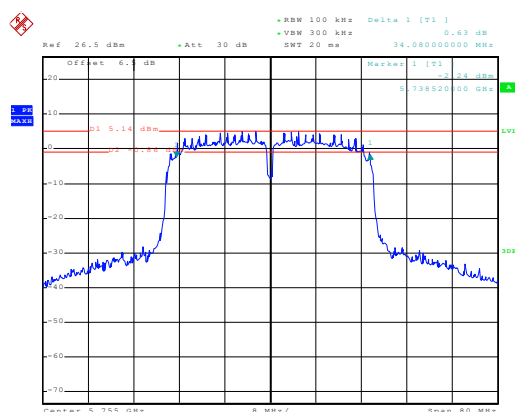

Date: 24.OCT.2014 16:21:06


Lowest channel

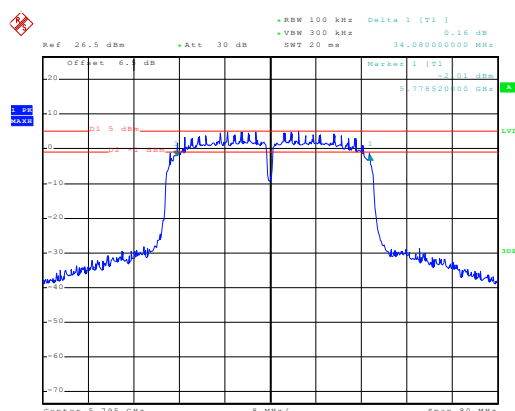

Date: 24.OCT.2014 16:19:45

Highest channel

6.6 Power Spectral Density

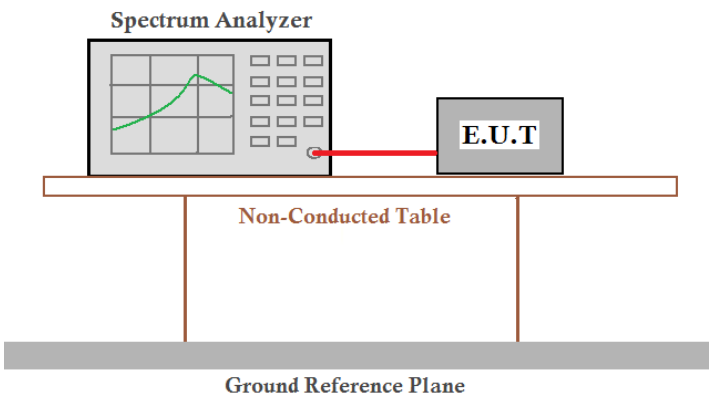Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	ANSI C63.4:2003 , KDB 789033
Limit:	Band 1: 17 dBm/MHz (For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi); Band 4: 30dBm/500kHz(For fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power).
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a thick grey horizontal bar labeled 'Ground Reference Plane'.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed

Measurement Data

Band 1:

23dBi Antenna:

Mode	Test Channel	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	8.37	11.68	17.00	Pass
		TX1	8.95			
	Middle	TX0	8.22	11.71	17.00	Pass
		TX1	9.14			
	Highest	TX0	8.04	11.32	17.00	Pass
		TX1	8.56			
802.11n 20	Lowest	TX0	7.90	11.41	17.00	Pass
		TX1	8.84			
	Middle	TX0	7.85	11.37	17.00	Pass
		TX1	8.81			
	Highest	TX0	7.70	10.81	17.00	Pass
		TX1	7.90			
802.11n 40	Lowest	TX0	4.97	8.43	17.00	Pass
		TX1	5.83			
	Highest	TX0	4.86	8.15	17.00	Pass
		TX1	5.40			

Remark:

1. Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .
2. The directional Gain of antenna is less than 23 dBi, so the limit of power spectral density is 17 dBm.

30dBi Antenna:

Mode	Test Channel	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	5.68	8.80	10.00	Pass
		TX1	5.90			
	Middle	TX0	5.72	8.88	10.00	Pass
		TX1	6.01			
	Highest	TX0	5.87	8.99	10.00	Pass
		TX1	6.08			
802.11n 20	Lowest	TX0	6.04	8.95	10.00	Pass
		TX1	5.83			
	Middle	TX0	5.76	8.90	10.00	Pass
		TX1	6.02			
	Highest	TX0	5.50	8.61	10.00	Pass
		TX1	5.70			
802.11n 40	Lowest	TX0	5.81	8.90	10.00	Pass
		TX1	5.97			
	Highest	TX0	5.69	8.61	10.00	Pass
		TX1	5.51			

Remark:

1. Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .
2. The directional Gain of antenna is greater than 23 dBi, so the limit of power spectral density is 10 dBm.

Band 4:

23dBi Antenna:

Mode	Test Channel	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	11.37	13.99	30.00	Pass
		TX1	10.54			
	Middle	TX0	11.41	14.76	30.00	Pass
		TX1	12.07			
	Highest	TX0	10.58	13.66	30.00	Pass
		TX1	10.72			
802.11n 20	Lowest	TX0	11.11	13.49	30.00	Pass
		TX1	9.74			
	Middle	TX0	10.01	13.39	30.00	Pass
		TX1	10.72			
	Highest	TX0	9.85	13.00	30.00	Pass
		TX1	10.13			
802.11n 40	Lowest	TX0	6.40	8.88	30.00	Pass
		TX1	5.27			
	Highest	TX0	6.41	9.64	30.00	Pass
		TX1	6.83			

Remark:

- Factor=10log(500kHz/RBW)=7, RBW=100kHz.
- Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .

30dBi Antenna:

Mode	Test Channel	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	7.50	10.39	30.00	Pass
		TX1	7.25			
	Middle	TX0	7.61	10.74	30.00	Pass
		TX1	7.85			
	Highest	TX0	7.10	10.47	30.00	Pass
		TX1	7.80			
802.11n 20	Lowest	TX0	7.66	10.73	30.00	Pass
		TX1	7.77			
	Middle	TX0	7.97	10.71	30.00	Pass
		TX1	7.42			
	Highest	TX0	7.45	10.42	30.00	Pass
		TX1	7.37			
802.11n 40	Lowest	TX0	4.30	7.29	30.00	Pass
		TX1	4.25			
	Highest	TX0	4.61	7.49	30.00	Pass
		TX1	4.34			

Remark:


- Factor=10log(500kHz/RBW)=7, RBW=100kHz.
- Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .

Test plot as follows:

Band 1:


23dBi Antenna (TX0):

802.11a

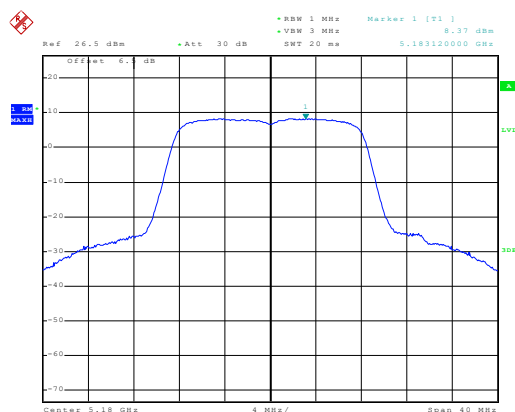


Date: 26.AUG.2014 17:22:57

Lowest channel

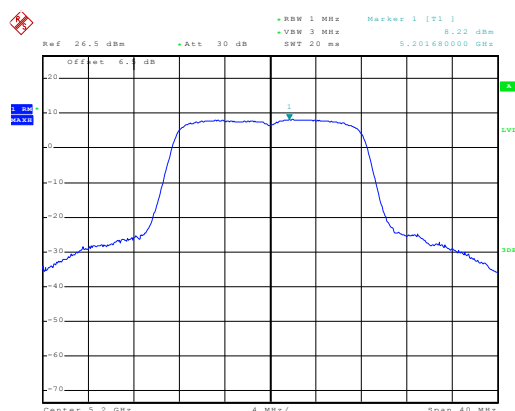

Date: 26.AUG.2014 17:19:59

Middle channel

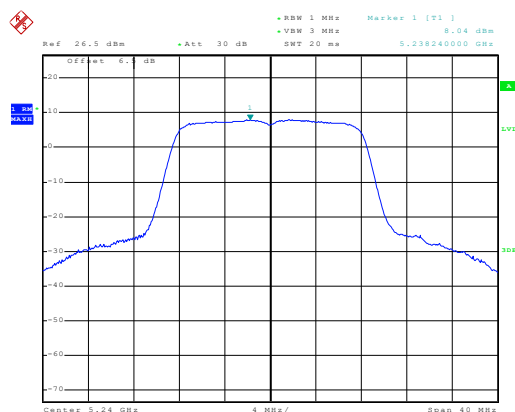


Date: 26.AUG.2014 17:20:56

Highest channel


30dBi Antenna (TX0):

802.11a

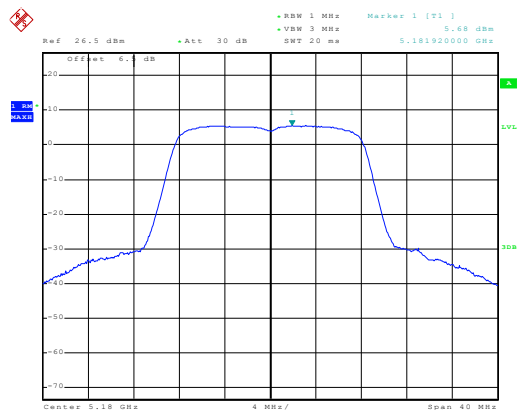


Date: 25.SEP.2014 10:23:41

Lowest channel

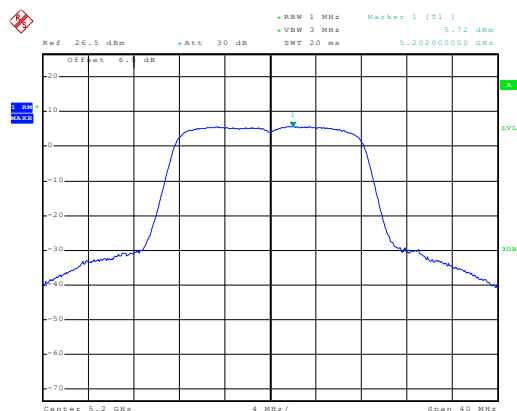

Date: 25.SEP.2014 10:26:19

Middle channel

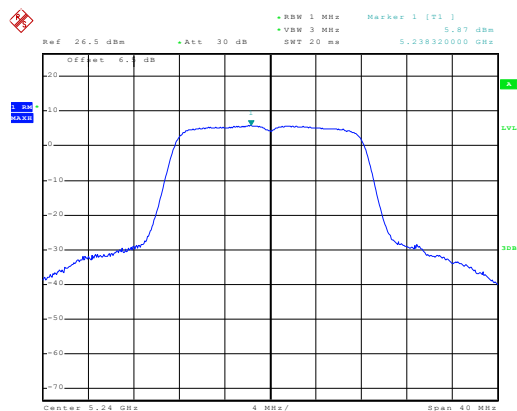


Date: 25.SEP.2014 10:27:28

Highest channel


23dBi Antenna (TX0):

802.11n20

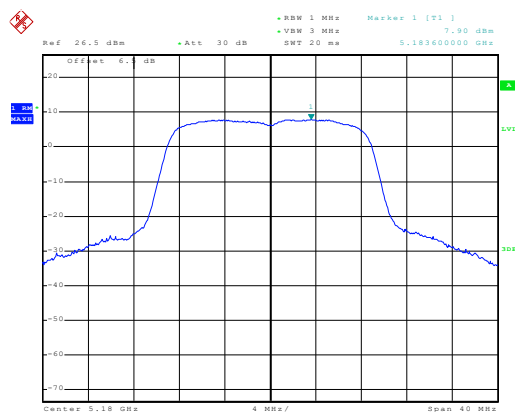


Date: 26.AUG.2014 17:58:00

Lowest channel

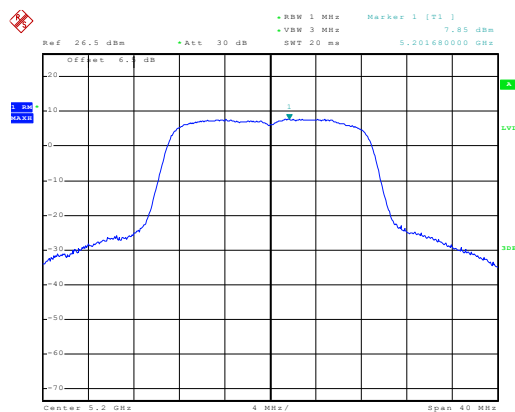

Date: 26.AUG.2014 17:55:59

Middle channel

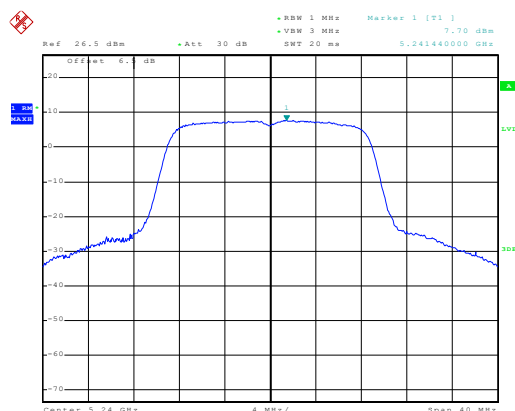


Date: 26.AUG.2014 17:55:20

Highest channel


30dBi Antenna (TX0):

802.11n20

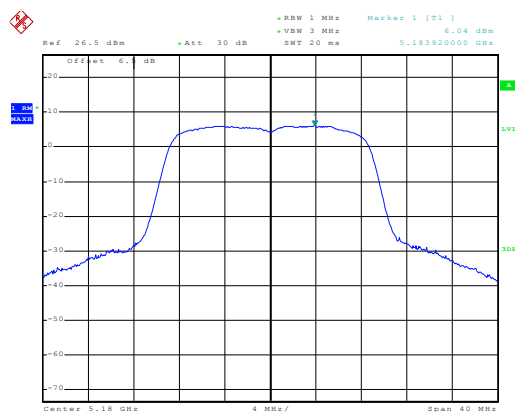


Date: 25.SEP.2014 10:35:07

Lowest channel

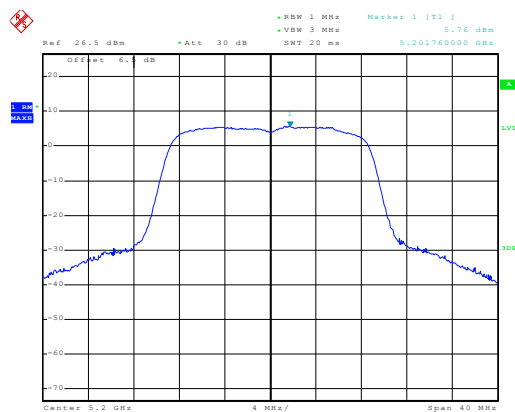

Date: 25.SEP.2014 10:35:54

Middle channel

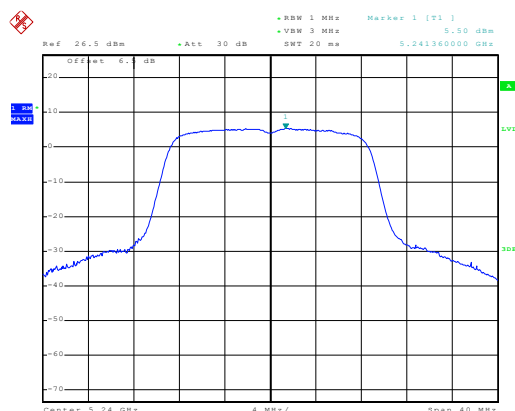


Date: 25.SEP.2014 10:42:36

Highest channel


23dBi Antenna (TX0):

802.11n40

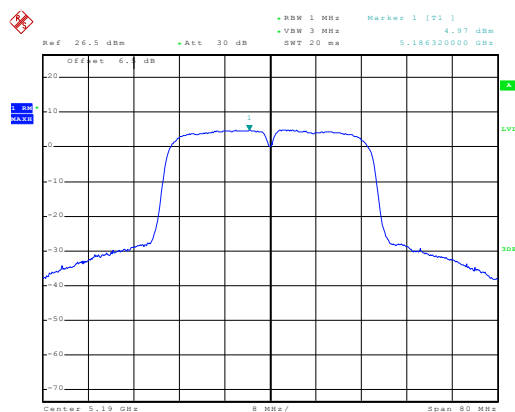

Date: 26.AUG.2014 18:30:42

Lowest channel

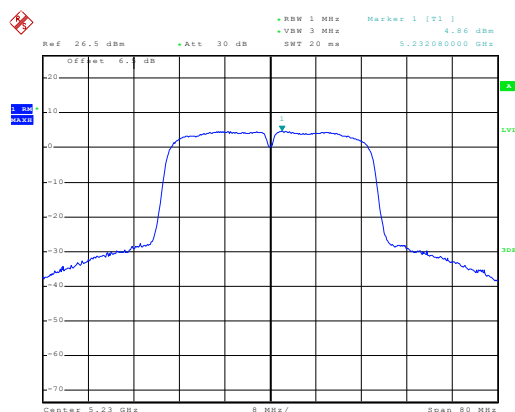


Date: 26.AUG.2014 18:38:46

Highest channel


30dBi Antenna (TX0):

802.11n40

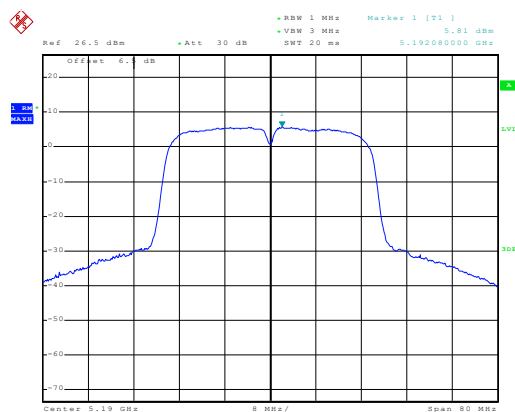

Date: 25.SEP.2014 10:45:40

Lowest channel

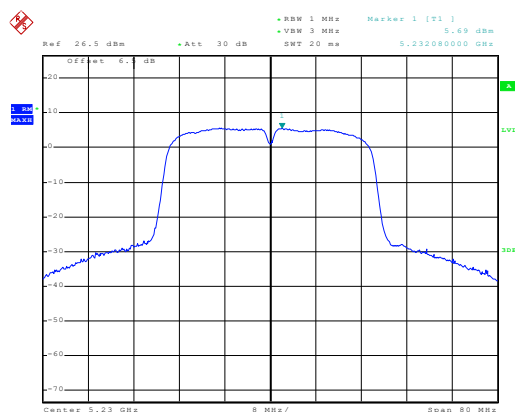


Date: 25.SEP.2014 10:48:07

Highest channel


23dBi Antenna (TX1):

802.11a

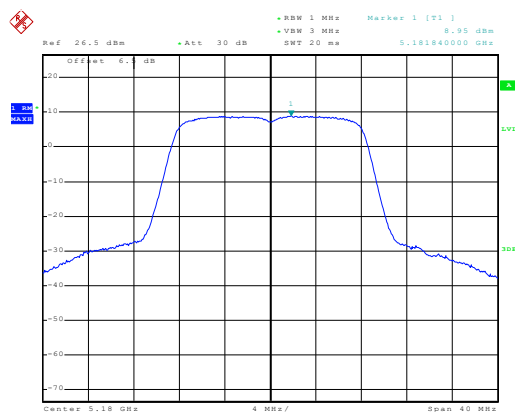


Date: 26.AUG.2014 17:22:13

Lowest channel

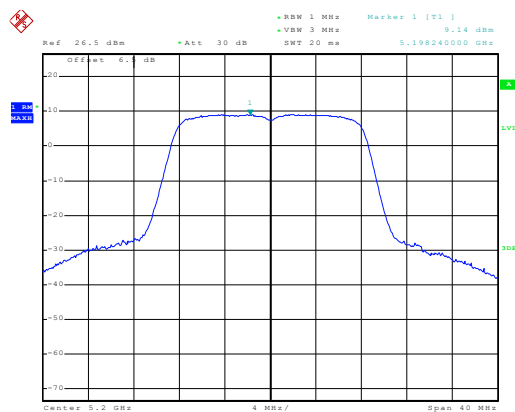

Date: 26.AUG.2014 17:19:05

Middle channel

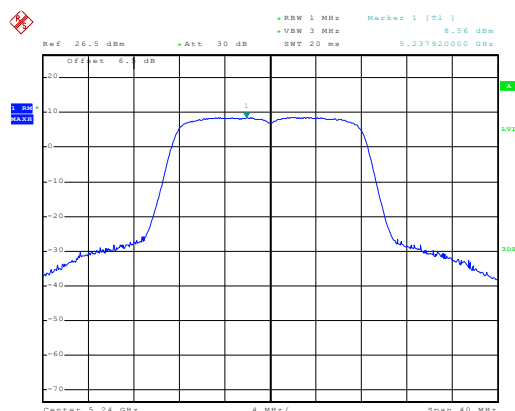


Date: 26.AUG.2014 17:21:35

Highest channel


30dBi Antenna (TX1):

802.11a

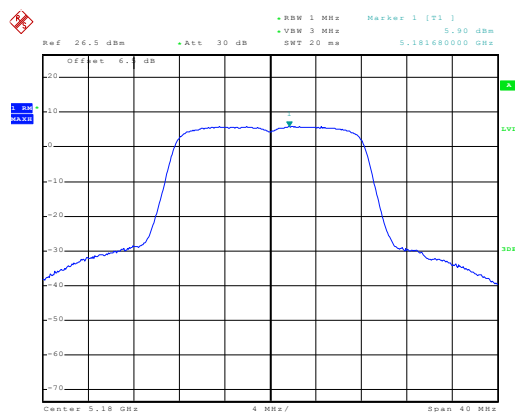


Date: 25.SEP.2014 10:24:29

Lowest channel

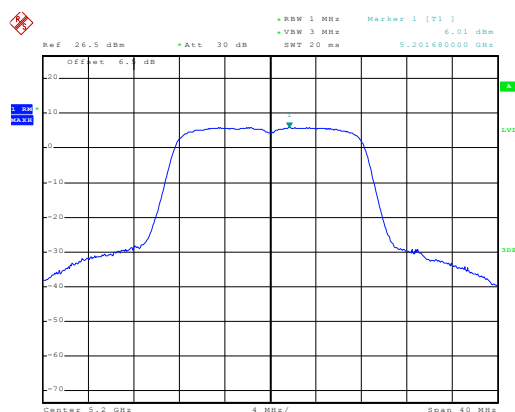

Date: 25.SEP.2014 10:25:36

Middle channel

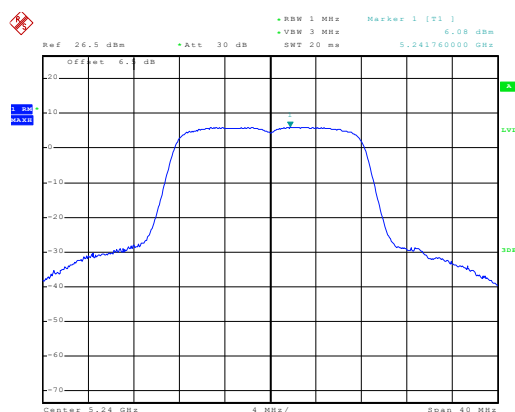


Date: 25.SEP.2014 10:28:12

Highest channel


23dBi Antenna (TX1):

802.11n20

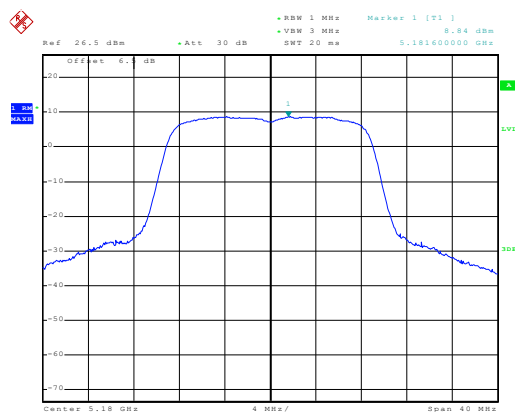


Date: 26.AUG.2014 17:57:16

Lowest channel

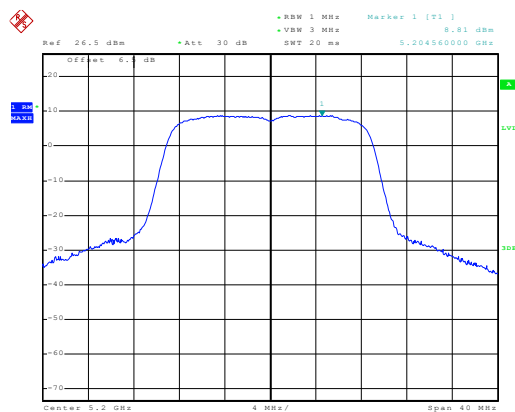

Date: 26.AUG.2014 17:56:52

Middle channel

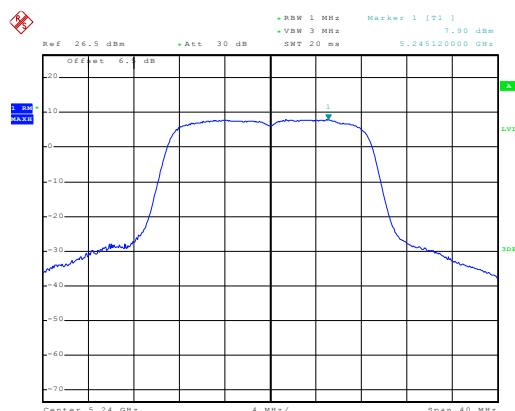


Date: 26.AUG.2014 17:54:40

Highest channel


30dBi Antenna (TX1):

802.11n20

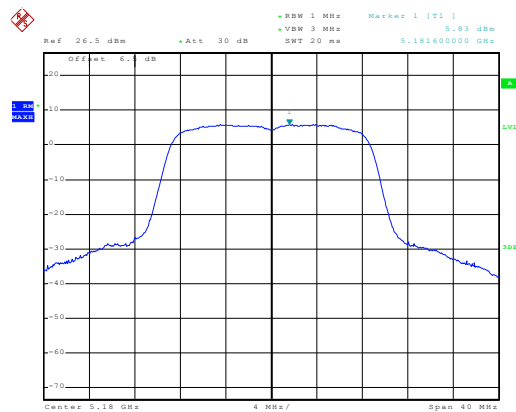


Date: 25.SEP.2014 10:31:10

Lowest channel

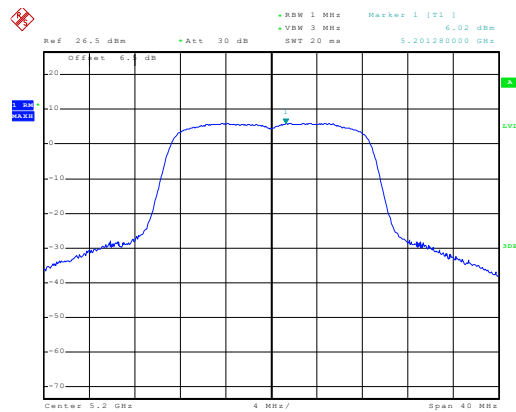

Date: 25.SEP.2014 10:36:30

Middle channel

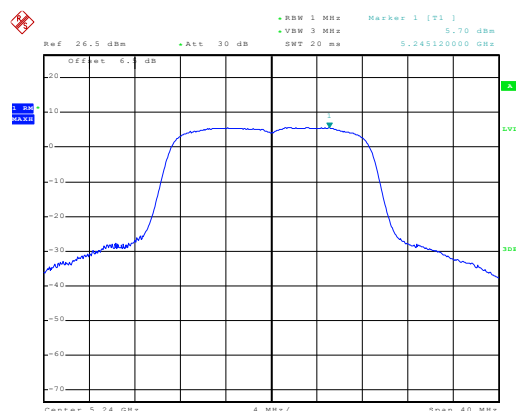


Date: 25.SEP.2014 10:40:35

Highest channel


23dBi Antenna (TX1):

802.11n40

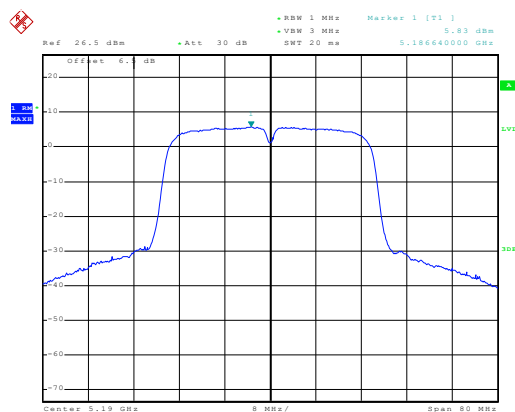

Date: 26.AUG.2014 18:30:06

Lowest channel

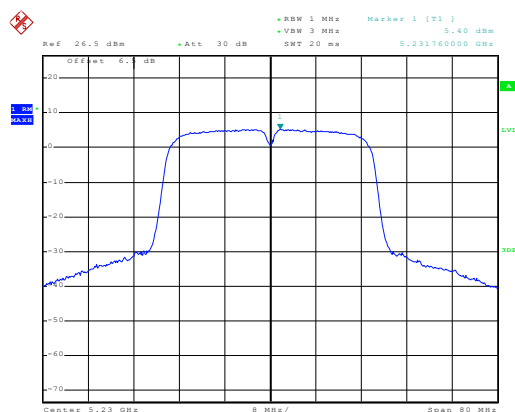


Date: 26.AUG.2014 18:30:30

Highest channel


30dBi Antenna (TX1):

802.11n40

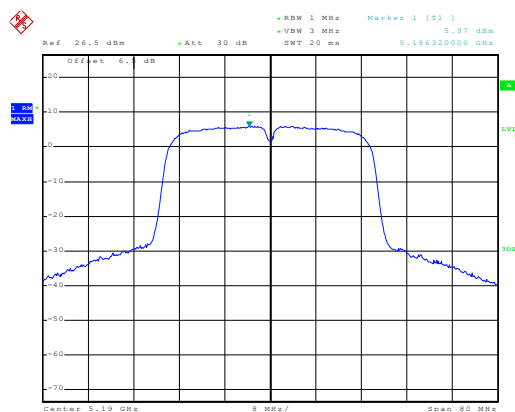

Date: 25.SEP.2014 10:46:18

Lowest channel

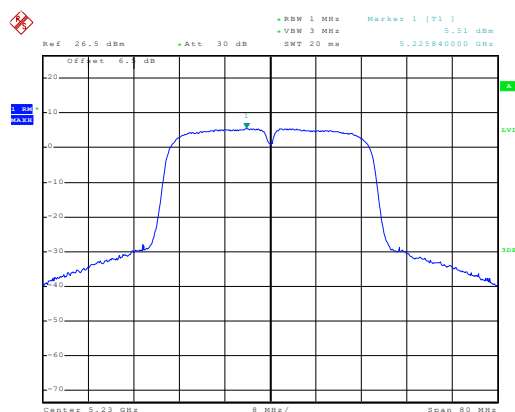


Date: 25.SEP.2014 10:47:02

Highest channel


Band 4:
23dBi Antenna (TX0):

802.11a

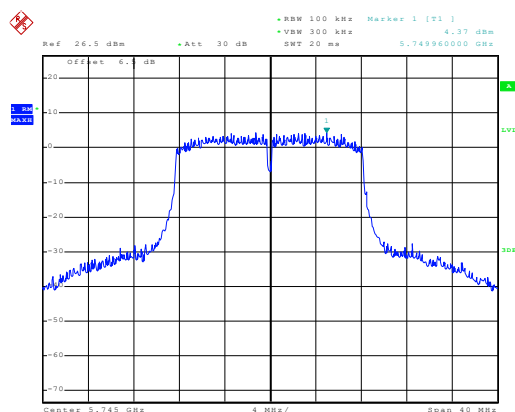


Date: 24.OCT.2014 11:25:05

Lowest channel

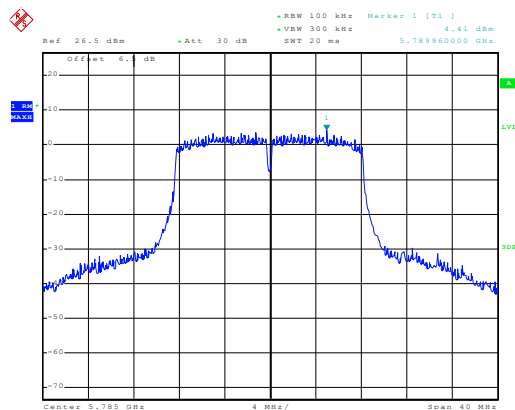

Date: 24.OCT.2014 11:22:15

Middle channel

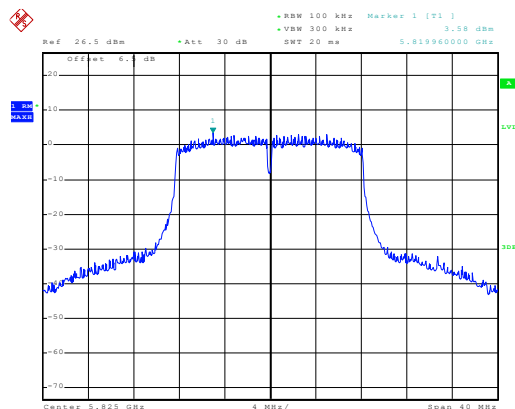


Date: 24.OCT.2014 11:21:02

Highest channel


30dBi Antenna (TX0):

802.11a

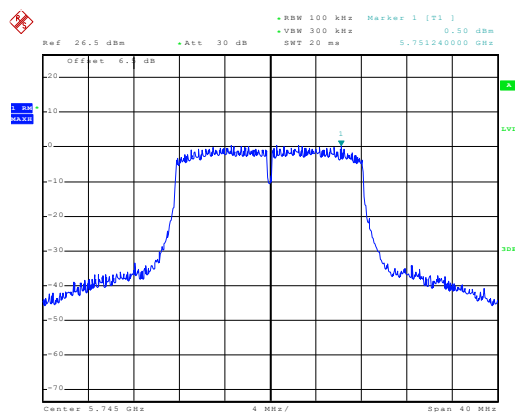


Date: 27.OCT.2014 13:16:46

Lowest channel

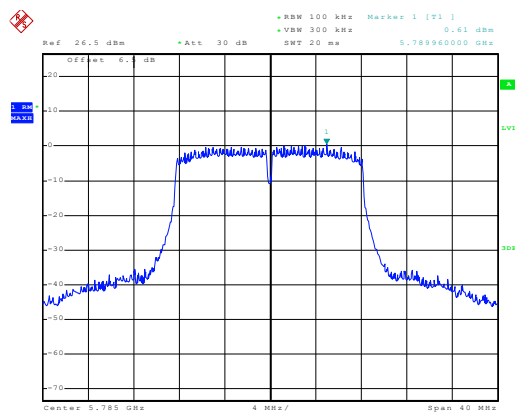

Date: 27.OCT.2014 13:20:49

Middle channel

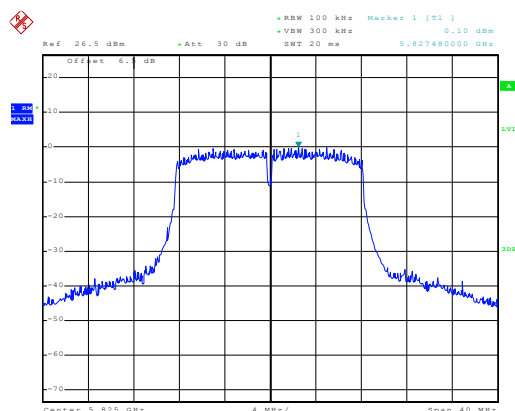


Date: 27.OCT.2014 13:25:13

Highest channel


23dBi Antenna (TX0):

802.11n20

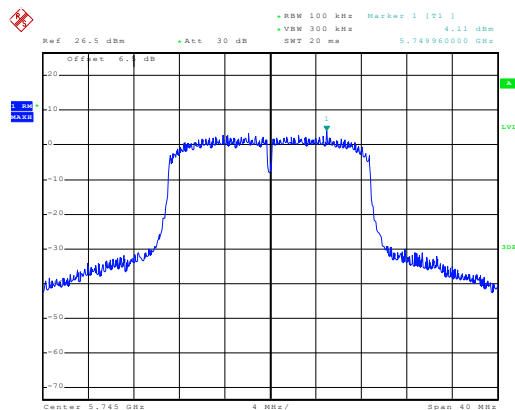


Date: 24.OCT.2014 15:25:33

Lowest channel

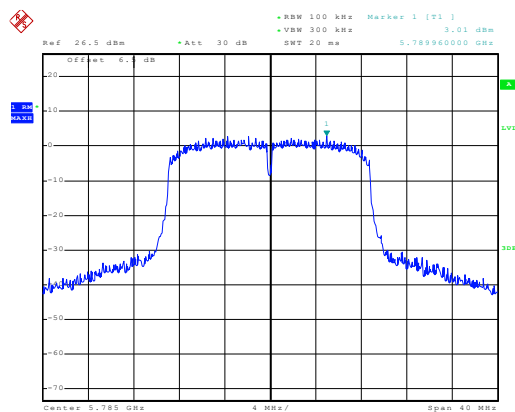

Date: 24.OCT.2014 15:23:54

Middle channel

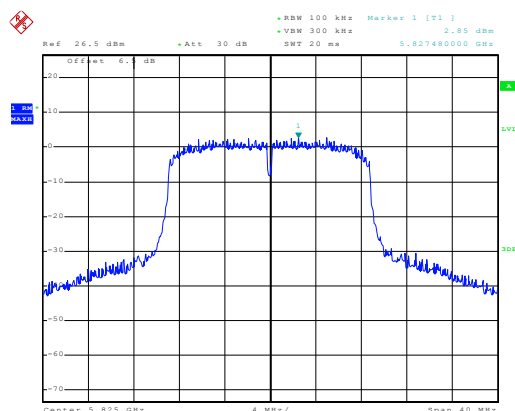


Date: 24.OCT.2014 15:22:19

Highest channel


30dBi Antenna (TX0):

802.11n20

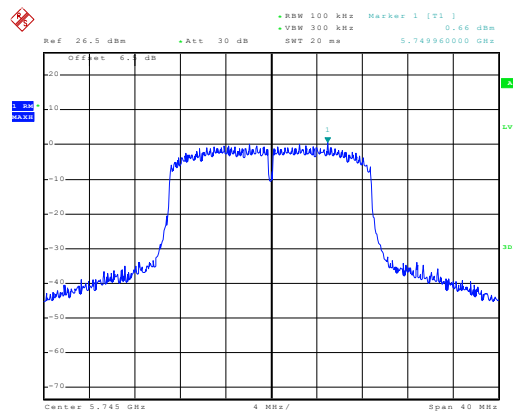


Date: 27.OCT.2014 13:31:53

Lowest channel

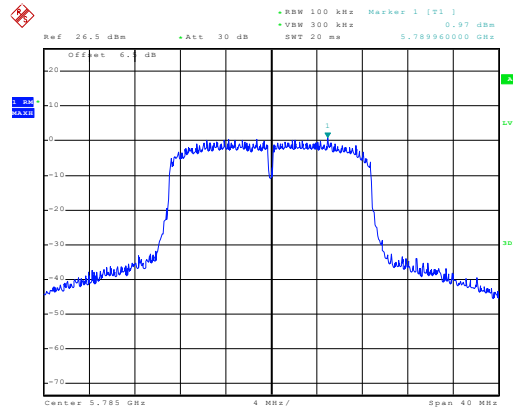

Date: 27.OCT.2014 13:34:18

Middle channel

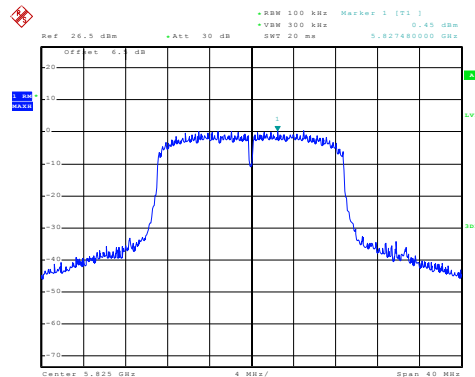


Date: 27.OCT.2014 13:39:05

Highest channel


23dBi Antenna (TX0):

802.11n40

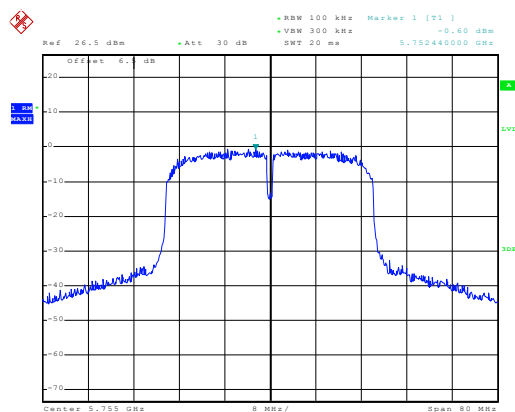

Date: 24.OCT.2014 16:14:20

Lowest channel

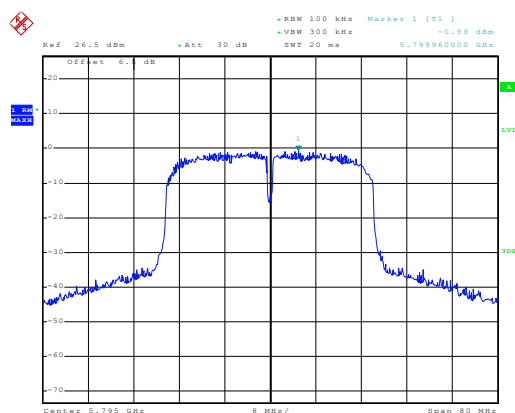


Date: 24.OCT.2014 16:11:43

Highest channel


30dBi Antenna (TX0):

802.11n40

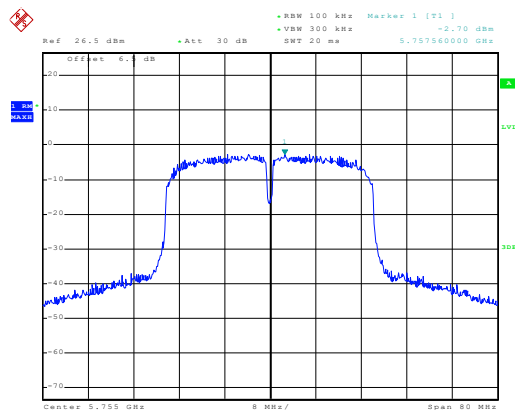

Date: 27.OCT.2014 13:46:19

Lowest channel

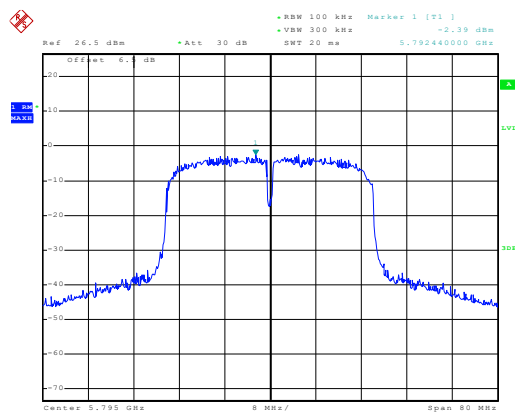


Date: 27.OCT.2014 13:49:28

Highest channel


23dBi Antenna (TX1):

802.11a

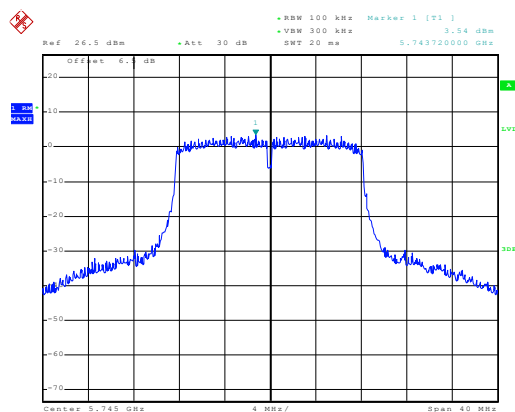


Date: 24.OCT.2014 11:24:25

Lowest channel

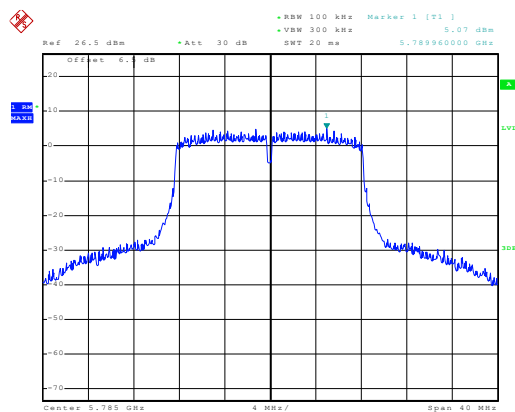

Date: 24.OCT.2014 11:40:33

Middle channel

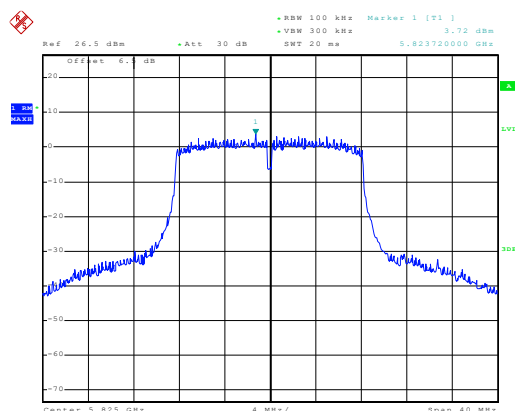


Date: 24.OCT.2014 11:20:24

Highest channel


30dBi Antenna (TX1):

802.11a

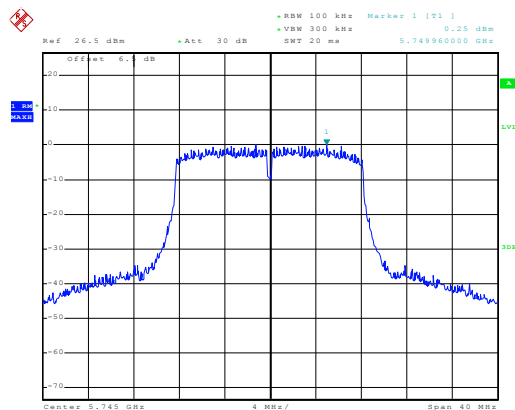


Date: 27.OCT.2014 13:14:14

Lowest channel

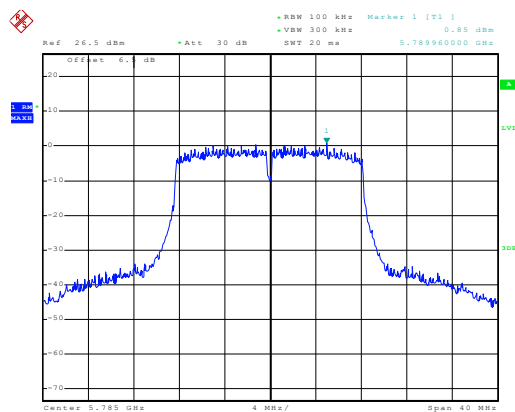

Date: 27.OCT.2014 13:19:57

Middle channel

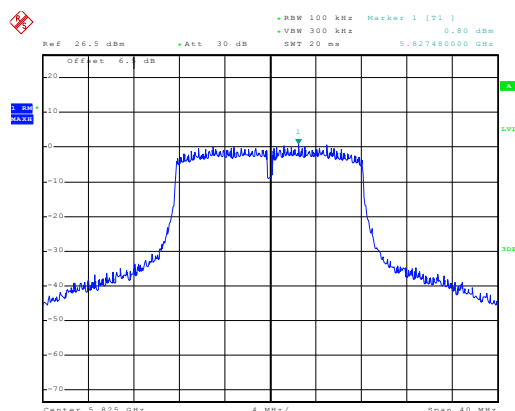


Date: 27.OCT.2014 13:23:52

Highest channel


23dBi Antenna (TX1):

802.11n20

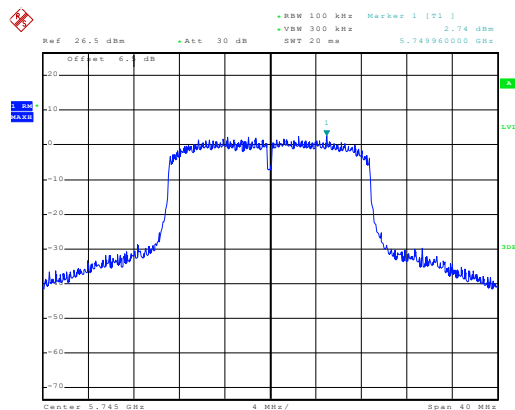


Date: 24.OCT.2014 15:24:57

Lowest channel

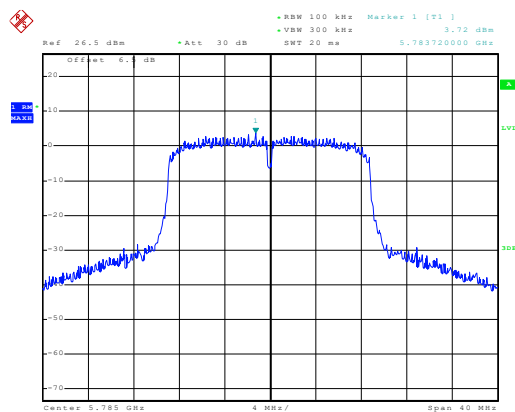

Date: 24.OCT.2014 15:24:31

Middle channel

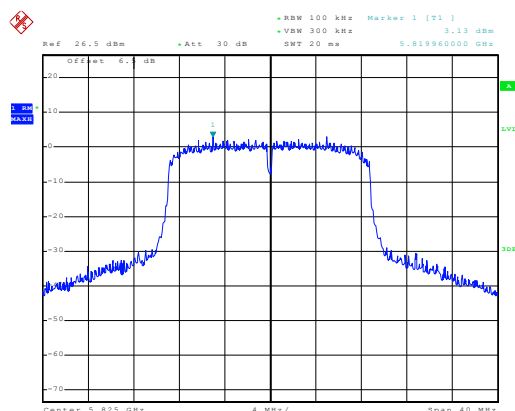


Date: 24.OCT.2014 15:21:32

Highest channel


30dBi Antenna (TX1):

802.11n20

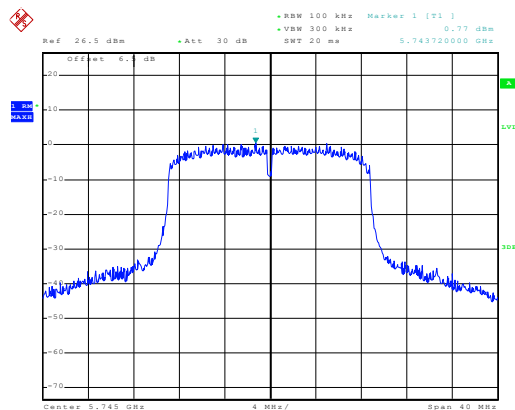


Date: 27.OCT.2014 13:30:56

Lowest channel

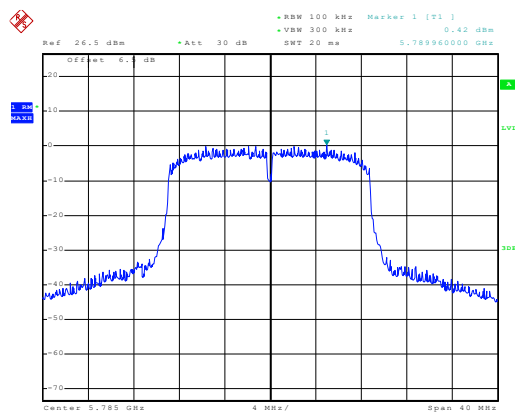

Date: 27.OCT.2014 13:35:18

Middle channel

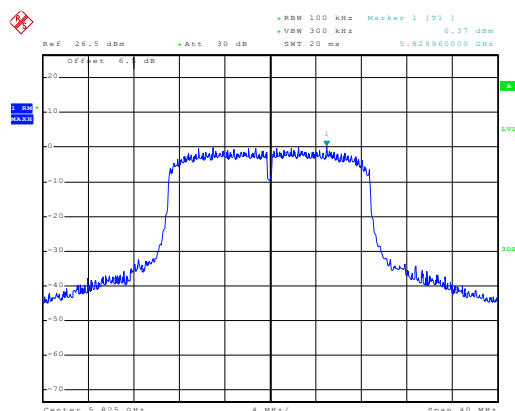


Date: 27.OCT.2014 13:39:54

Highest channel


23dBi Antenna (TX1):

802.11n40

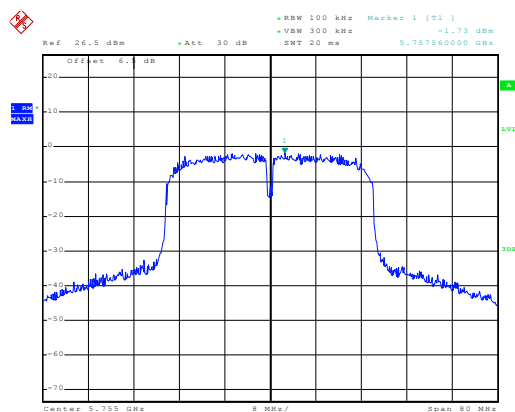

Date: 24.OCT.2014 16:13:36

Lowest channel

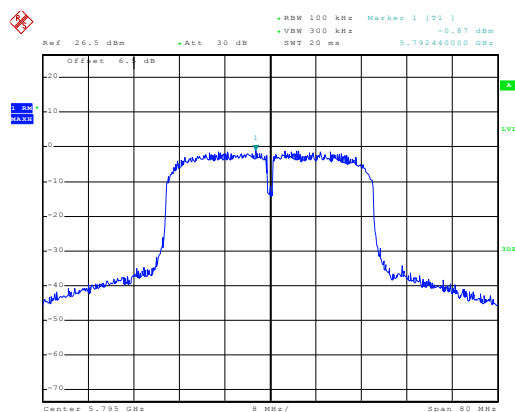


Date: 24.OCT.2014 16:12:31

Highest channel


30dBi Antenna (TX1):

802.11n40

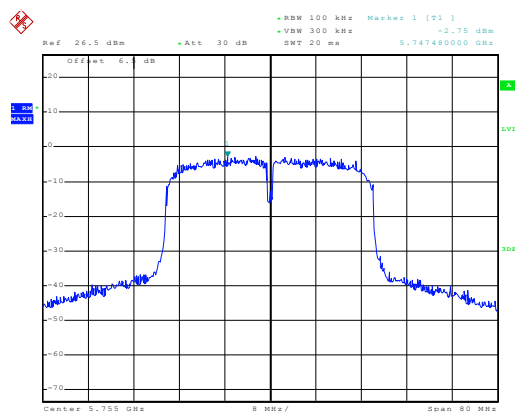

Date: 27.OCT.2014 13:47:11


Lowest channel

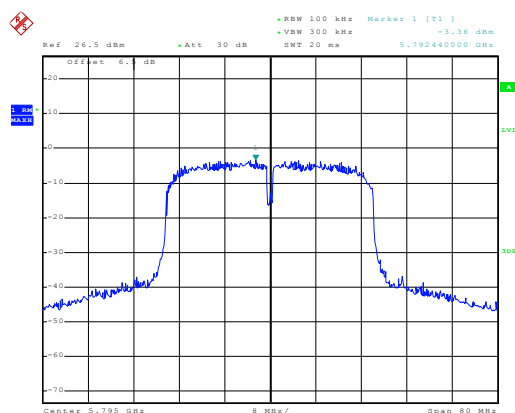

Date: 27.OCT.2014 13:50:20

Highest channel

6.7 Band Edge

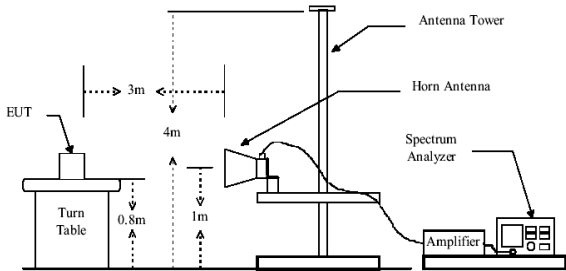Test Requirement:	FCC Part15 E Section 15.407 (b)												
Test Method:	ANSI C63.4:2003 , KDB 789033												
Receiver setup:	<table><tr><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>Quasi-peak</td><td>100kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr></table>	Detector	RBW	VBW	Remark	Quasi-peak	100kHz	300kHz	Quasi-peak Value	Peak	1MHz	3MHz	Peak Value
Detector	RBW	VBW	Remark										
Quasi-peak	100kHz	300kHz	Quasi-peak Value										
Peak	1MHz	3MHz	Peak Value										
Limit:	<table><tr><td></td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>Band 1</td><td>68.2</td><td>Peak Value</td></tr><tr><td>Band 4</td><td>78.2</td><td>Peak Value</td></tr></table> Remark: 1. Band 1 limit: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIPR}[\text{dBm}] = -27\text{dBm}$. 2. Band 4 limit: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIPR}[\text{dBm}] = -17\text{dBm}$.		Limit (dBuV/m @3m)	Remark	Band 1	68.2	Peak Value	Band 4	78.2	Peak Value			
	Limit (dBuV/m @3m)	Remark											
Band 1	68.2	Peak Value											
Band 4	78.2	Peak Value											
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.												
Test setup:	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a turn table at a height of 0.8m. The turn table is rotated 360 degrees. The EUT is positioned 3m away from the antenna tower. The antenna tower is a variable-height tower with a horn antenna at the top. The antenna height is varied from 1m to 4m. The spectrum analyzer is connected to the antenna tower via an amplifier.												
Test Instruments:	Refer to section 5.6 for details												
Test mode:	Refer to section 5.3 for details												
Test results:	Passed												

Band 1:

23dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	32.22	32.07	9.13	40.06	44.46	68.20	-34.84	Horizontal
5150.00	33.96	32.07	9.13	40.06	35.10	68.20	-33.10	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.58	31.78	9.15	40.18	35.33	68.20	-32.87	Horizontal
5350.00	34.14	31.78	9.15	40.18	34.89	68.20	-33.31	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	32.69	32.07	9.13	40.06	33.83	68.20	-34.37	Horizontal
5150.00	32.36	32.07	9.13	40.06	33.50	68.20	-34.70	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.28	31.78	9.15	40.18	35.03	68.20	-33.17	Horizontal
5350.00	35.25	31.78	9.15	40.18	36.00	68.20	-32.20	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	33.63	32.07	9.13	40.06	34.77	68.20	-33.43	Horizontal
5150.00	33.35	32.07	9.13	40.06	34.49	68.20	-33.71	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.25	31.78	9.15	40.18	35.00	68.20	-33.20	Horizontal
5350.00	34.58	31.78	9.15	40.18	35.33	68.20	-32.87	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

30dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	34.52	32.07	9.13	40.06	35.66	68.20	-32.54	Horizontal
5150.00	33.32	32.07	9.13	40.06	34.46	68.20	-33.74	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.65	31.78	9.15	40.18	34.40	68.20	-33.80	Horizontal
5350.00	33.95	31.78	9.15	40.18	34.70	68.20	-33.50	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	33.68	32.07	9.13	40.06	34.82	68.20	-33.38	Horizontal
5150.00	34.10	32.07	9.13	40.06	35.24	68.20	-32.96	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	35.21	31.78	9.15	40.18	35.96	68.20	-32.24	Horizontal
5350.00	35.14	31.78	9.15	40.18	35.89	68.20	-32.31	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	34.52	32.07	9.13	40.06	35.66	68.20	-32.54	Horizontal
5150.00	33.74	32.07	9.13	40.06	34.88	68.20	-33.32	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.52	31.78	9.15	40.18	34.27	68.20	-33.93	Horizontal
5350.00	33.25	31.78	9.15	40.18	34.00	68.20	-34.20	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4:
23dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	37.54	32.27	9.30	40.54	38.57	78.20	-39.63	Horizontal
5725.00	36.25	32.27	9.30	40.54	37.28	78.20	-40.92	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	36.54	32.71	9.37	40.69	37.93	78.20	-40.27	Horizontal
5850.00	37.14	32.71	9.37	40.69	38.53	78.20	-39.67	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	36.52	32.27	9.30	40.54	37.55	78.20	-40.65	Horizontal
5725.00	36.24	32.27	9.30	40.54	37.27	78.20	-40.93	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	37.52	32.71	9.37	40.69	38.91	78.20	-39.29	Horizontal
5850.00	37.51	32.71	9.37	40.69	38.90	78.20	-39.30	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	34.69	32.27	9.30	40.54	35.72	78.20	-42.48	Horizontal
5725.00	35.74	32.27	9.30	40.54	36.77	78.20	-41.43	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	35.25	32.71	9.37	40.69	36.64	78.20	-41.56	Horizontal
5850.00	34.88	32.71	9.37	40.69	36.27	78.20	-41.93	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

30dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	37.52	32.27	9.30	40.54	38.55	78.20	-39.65	Horizontal
5725.00	36.95	32.27	9.30	40.54	37.98	78.20	-40.22	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	36.58	32.71	9.37	40.69	37.97	78.20	-40.23	Horizontal
5850.00	36.32	32.71	9.37	40.69	37.71	78.20	-40.49	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	37.88	32.27	9.30	40.54	38.91	78.20	-39.29	Horizontal
5725.00	36.17	32.27	9.30	40.54	37.20	78.20	-41.00	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	36.52	32.71	9.37	40.69	37.91	78.20	-40.29	Horizontal
5850.00	37.25	32.71	9.37	40.69	38.64	78.20	-39.56	Vertical


802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	34.52	32.27	9.30	40.54	35.55	78.20	-42.65	Horizontal
5725.00	35.11	32.27	9.30	40.54	36.14	78.20	-42.06	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	34.58	32.71	9.37	40.69	35.97	78.20	-42.23	Horizontal
5850.00	34.55	32.71	9.37	40.69	35.94	78.20	-42.26	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.8 Spurious Emission

6.8.1 Restricted Band

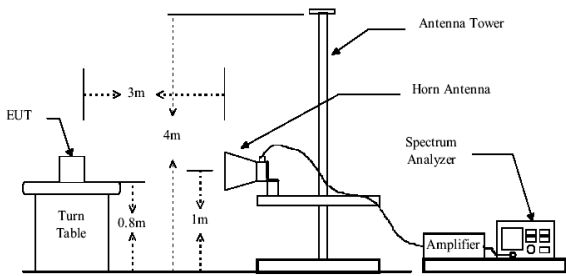Test Requirement:	FCC Part15 E Section 15.407(b)																		
Test Method:	ANSI C63.4: 2003																		
Test Frequency Range:	Band 1: 4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz Band 4: 5.35 GHz to 5.46 GHz																		
Test site:	Measurement Distance: 3m																		
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark															
Above 1GHz	Peak	1MHz	3MHz	Peak Value															
	Peak	1MHz	10Hz	Average Value															
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.00</td><td>Average Value</td></tr><tr><td>74.00</td><td>Peak Value</td></tr></table>					Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.00	Average Value	74.00	Peak Value						
Frequency	Limit (dBuV/m @3m)	Remark																	
Above 1GHz	54.00	Average Value																	
	74.00	Peak Value																	
Test Procedure:	7. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 8. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 9. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 10. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 11. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 12. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																		
Test setup:	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a Turn Table at a height of 0.8m. The Turn Table is rotated 360 degrees. The EUT is positioned 3m away from the Antenna Tower. The Antenna Tower is a variable-height tower with a Horn Antenna at the top. The Horn Antenna is connected to a Spectrum Analyzer via an Amplifier. The Spectrum Analyzer is connected to a computer. The diagram shows the antenna height being varied from 1m to 4m.																		
Test Instruments:	Refer to section 5.6 for details																		
Test mode:	Refer to section 5.3 for details																		
Test results:	Passed																		

Band 1:

23dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	33.99	30.72	8.54	40.67	32.58	74.00	-41.42	Horizontal
5150.00	32.22	32.07	9.13	40.06	33.36	74.00	-40.64	Horizontal
4500.00	34.25	30.72	8.54	40.67	32.84	74.00	-41.16	Vertical
5150.00	33.96	32.07	9.13	40.06	35.10	74.00	-38.90	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	23.55	30.72	8.54	40.67	22.14	54.00	-31.86	Horizontal
5150.00	23.01	32.07	9.13	40.06	24.15	54.00	-29.85	Horizontal
4500.00	22.65	30.72	8.54	40.67	21.24	54.00	-32.76	Vertical
5150.00	23.54	32.07	9.13	40.06	24.68	54.00	-29.32	Vertical

802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.58	31.78	9.15	40.18	35.33	74.00	-38.67	Horizontal
5460.00	34.84	31.99	9.16	40.23	35.76	74.00	-38.24	Horizontal
5350.00	34.14	31.78	9.15	40.18	34.89	74.00	-39.11	Vertical
5460.00	34.87	31.99	9.16	40.23	35.79	74.00	-38.21	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	22.54	31.78	9.15	40.18	23.29	54.00	-30.71	Horizontal
5460.00	22.14	31.99	9.16	40.23	23.06	54.00	-30.94	Horizontal
5350.00	22.57	31.78	9.15	40.18	23.32	54.00	-30.68	Vertical
5460.00	22.74	31.99	9.16	40.23	23.66	54.00	-30.34	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	34.25	30.72	8.54	40.67	32.84	74.00	-41.16	Horizontal
5150.00	32.69	32.07	9.13	40.06	33.83	74.00	-40.17	Horizontal
4500.00	33.14	30.72	8.54	40.67	31.73	74.00	-42.27	Vertical
5150.00	32.36	32.07	9.13	40.06	33.50	74.00	-40.50	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	22.62	30.72	8.54	40.67	21.21	54.00	-32.79	Horizontal
5150.00	23.41	32.07	9.13	40.06	24.55	54.00	-29.45	Horizontal
4500.00	33.62	30.72	8.54	40.67	32.21	54.00	-21.79	Vertical
5150.00	33.14	32.07	9.13	40.06	34.28	54.00	-19.72	Vertical

802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.28	31.78	9.15	40.18	35.03	74.00	-38.97	Horizontal
5460.00	35.87	31.99	9.16	40.23	36.79	74.00	-37.21	Horizontal
5350.00	35.25	31.78	9.15	40.18	36.00	74.00	-38.00	Vertical
5460.00	35.81	31.99	9.16	40.23	36.73	74.00	-37.27	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	23.74	31.78	9.15	40.18	24.49	54.00	-29.51	Horizontal
5460.00	23.77	31.99	9.16	40.23	24.69	54.00	-29.31	Horizontal
5350.00	23.65	31.78	9.15	40.18	24.40	54.00	-29.60	Vertical
5460.00	23.58	31.99	9.16	40.23	24.50	54.00	-29.50	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	33.25	30.72	8.54	40.67	31.84	74.00	-42.16	Horizontal
5150.00	33.63	32.07	9.13	40.06	34.77	74.00	-39.23	Horizontal
4500.00	33.14	30.72	8.54	40.67	31.73	74.00	-42.27	Vertical
5150.00	33.35	32.07	9.13	40.06	34.49	74.00	-39.51	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	22.52	30.72	8.54	40.67	21.11	54.00	-32.89	Horizontal
5150.00	23.52	32.07	9.13	40.06	24.66	54.00	-29.34	Horizontal
4500.00	23.69	30.72	8.54	40.67	22.28	54.00	-31.72	Vertical
5150.00	24.55	32.07	9.13	40.06	25.69	54.00	-28.31	Vertical

802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.25	31.78	9.15	40.18	35.00	74.00	-39.00	Horizontal
5460.00	34.25	31.99	9.16	40.23	35.17	74.00	-38.83	Horizontal
5350.00	34.58	31.78	9.15	40.18	35.33	74.00	-38.67	Vertical
5460.00	34.12	31.99	9.16	40.23	35.04	74.00	-38.96	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	22.54	31.78	9.15	40.18	23.29	54.00	-30.71	Horizontal
5460.00	22.94	31.99	9.16	40.23	23.86	54.00	-30.14	Horizontal
5350.00	22.52	31.78	9.15	40.18	23.27	54.00	-30.73	Vertical
5460.00	22.47	31.99	9.16	40.23	23.39	54.00	-30.61	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

30dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	33.25	30.72	8.54	40.67	31.84	74.00	-42.16	Horizontal
5150.00	34.52	32.07	9.13	40.06	35.66	74.00	-38.34	Horizontal
4500.00	33.69	30.72	8.54	40.67	32.28	74.00	-41.72	Vertical
5150.00	33.32	32.07	9.13	40.06	34.46	74.00	-39.54	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	23.62	30.72	8.54	40.67	22.21	54.00	-31.79	Horizontal
5150.00	24.25	32.07	9.13	40.06	25.39	54.00	-28.61	Horizontal
4500.00	23.66	30.72	8.54	40.67	22.25	54.00	-31.75	Vertical
5150.00	24.52	32.07	9.13	40.06	25.66	54.00	-28.34	Vertical

802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.65	31.78	9.15	40.18	34.40	74.00	-39.60	Horizontal
5460.00	34.51	31.99	9.16	40.23	35.43	74.00	-38.57	Horizontal
5350.00	33.95	31.78	9.15	40.18	34.70	74.00	-39.30	Vertical
5460.00	34.15	31.99	9.16	40.23	35.07	74.00	-38.93	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	22.65	31.78	9.15	40.18	23.40	54.00	-30.60	Horizontal
5460.00	33.41	31.99	9.16	40.23	34.33	54.00	-19.67	Horizontal
5350.00	22.48	31.78	9.15	40.18	23.23	54.00	-30.77	Vertical
5460.00	22.55	31.99	9.16	40.23	23.47	54.00	-30.53	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	34.52	30.72	8.54	40.67	33.11	74.00	-40.89	Horizontal
5150.00	33.68	32.07	9.13	40.06	34.82	74.00	-39.18	Horizontal
4500.00	33.55	30.72	8.54	40.67	32.14	74.00	-41.86	Vertical
5150.00	34.10	32.07	9.13	40.06	35.24	74.00	-38.76	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	23.69	30.72	8.54	40.67	22.28	54.00	-31.72	Horizontal
5150.00	24.52	32.07	9.13	40.06	25.66	54.00	-28.34	Horizontal
4500.00	23.66	30.72	8.54	40.67	22.25	54.00	-31.75	Vertical
5150.00	24.14	32.07	9.13	40.06	25.28	54.00	-28.72	Vertical

802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	35.21	31.78	9.15	40.18	35.96	74.00	-38.04	Horizontal
5460.00	35.25	31.99	9.16	40.23	36.17	74.00	-37.83	Horizontal
5350.00	35.14	31.78	9.15	40.18	35.89	74.00	-38.11	Vertical
5460.00	35.25	31.99	9.16	40.23	36.17	74.00	-37.83	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	23.58	31.78	9.15	40.18	24.33	54.00	-29.67	Horizontal
5460.00	23.65	31.99	9.16	40.23	24.57	54.00	-29.43	Horizontal
5350.00	23.47	31.78	9.15	40.18	24.22	54.00	-29.78	Vertical
5460.00	23.56	31.99	9.16	40.23	24.48	54.00	-29.52	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	33.62	30.72	8.54	40.67	32.21	74.00	-41.79	Horizontal
5150.00	34.52	32.07	9.13	40.06	35.66	74.00	-38.34	Horizontal
4500.00	33.66	30.72	8.54	40.67	32.25	74.00	-41.75	Vertical
5150.00	33.74	32.07	9.13	40.06	34.88	74.00	-39.12	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	23.65	30.72	8.54	40.67	22.24	54.00	-31.76	Horizontal
5150.00	24.15	32.07	9.13	40.06	25.29	54.00	-28.71	Horizontal
4500.00	23.62	30.72	8.54	40.67	22.21	54.00	-31.79	Vertical
5150.00	23.14	32.07	9.13	40.06	24.28	54.00	-29.72	Vertical

802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.52	31.78	9.15	40.18	34.27	74.00	-39.73	Horizontal
5460.00	33.58	31.99	9.16	40.23	34.50	74.00	-39.50	Horizontal
5350.00	33.25	31.78	9.15	40.18	34.00	74.00	-40.00	Vertical
5460.00	33.39	31.99	9.16	40.23	34.31	74.00	-39.70	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	22.54	31.78	9.15	40.18	23.29	54.00	-30.71	Horizontal
5460.00	22.68	31.99	9.16	40.23	23.60	54.00	-30.40	Horizontal
5350.00	22.74	31.78	9.15	40.18	23.49	54.00	-30.51	Vertical
5460.00	22.69	31.99	9.16	40.23	23.61	54.00	-30.39	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4:

23dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.65	31.78	9.15	40.18	47.40	74.00	-26.60	Horizontal
5460.00	47.52	31.99	9.16	40.23	48.44	74.00	-25.56	Horizontal
5350.00	47.21	31.78	9.15	40.18	47.96	74.00	-26.04	Vertical
5460.00	47.85	31.99	9.16	40.23	48.77	74.00	-25.23	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.58	31.78	9.15	40.18	34.33	54.00	-19.67	Horizontal
5460.00	32.64	31.99	9.16	40.23	33.56	54.00	-20.44	Horizontal
5350.00	33.55	31.78	9.15	40.18	34.30	54.00	-19.70	Vertical
5460.00	33.19	31.99	9.16	40.23	34.11	54.00	-19.89	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.52	31.78	9.15	40.18	48.27	74.00	-25.73	Horizontal
5460.00	47.55	31.99	9.16	40.23	48.47	74.00	-25.53	Horizontal
5350.00	46.65	31.78	9.15	40.18	47.40	74.00	-26.60	Vertical
5460.00	48.54	31.99	9.16	40.23	49.46	74.00	-24.54	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	32.54	31.78	9.15	40.18	33.29	54.00	-20.71	Horizontal
5460.00	33.47	31.99	9.16	40.23	34.39	54.00	-19.61	Horizontal
5350.00	33.17	31.78	9.15	40.18	33.92	54.00	-20.08	Vertical
5460.00	32.98	31.99	9.16	40.23	33.90	54.00	-20.10	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.85	31.78	9.15	40.18	47.60	74.00	-26.40	Horizontal
5460.00	47.70	31.99	9.16	40.23	48.62	74.00	-25.38	Horizontal
5350.00	47.57	31.78	9.15	40.18	48.32	74.00	-25.68	Vertical
5460.00	47.00	31.99	9.16	40.23	47.92	74.00	-26.08	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.66	31.78	9.15	40.18	34.41	54.00	-19.59	Horizontal
5460.00	32.20	31.99	9.16	40.23	33.12	54.00	-20.88	Horizontal
5350.00	33.62	31.78	9.15	40.18	34.37	54.00	-19.63	Vertical
5460.00	32.68	31.99	9.16	40.23	33.60	54.00	-20.40	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

30dBi Antenna:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.55	31.78	9.15	40.18	48.30	74.00	-25.70	Horizontal
5460.00	48.62	31.99	9.16	40.23	49.54	74.00	-24.47	Horizontal
5350.00	47.68	31.78	9.15	40.18	48.43	74.00	-25.57	Vertical
5460.00	46.95	31.99	9.16	40.23	47.87	74.00	-26.13	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	32.65	31.78	9.15	40.18	33.40	54.00	-20.61	Horizontal
5460.00	33.66	31.99	9.16	40.23	34.58	54.00	-19.42	Horizontal
5350.00	34.65	31.78	9.15	40.18	35.40	54.00	-18.60	Vertical
5460.00	33.99	31.99	9.16	40.23	34.91	54.00	-19.09	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.00	31.78	9.15	40.18	47.75	74.00	-26.25	Horizontal
5460.00	47.55	31.99	9.16	40.23	48.47	74.00	-25.53	Horizontal
5350.00	48.65	31.78	9.15	40.18	49.40	74.00	-24.60	Vertical
5460.00	47.86	31.99	9.16	40.23	48.78	74.00	-25.22	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.64	31.78	9.15	40.18	34.39	54.00	-19.61	Horizontal
5460.00	34.20	31.99	9.16	40.23	35.12	54.00	-18.89	Horizontal
5350.00	32.95	31.78	9.15	40.18	33.70	54.00	-20.30	Vertical
5460.00	33.97	31.99	9.16	40.23	34.89	54.00	-19.11	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.65	31.78	9.15	40.18	48.40	74.00	-25.60	Horizontal
5460.00	46.98	31.99	9.16	40.23	47.90	74.00	-26.10	Horizontal
5350.00	46.65	31.78	9.15	40.18	47.40	74.00	-26.60	Vertical
5460.00	47.65	31.99	9.16	40.23	48.57	74.00	-25.43	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.51	31.78	9.15	40.18	34.26	54.00	-19.74	Horizontal
5460.00	32.59	31.99	9.16	40.23	33.51	54.00	-20.49	Horizontal
5350.00	33.68	31.78	9.15	40.18	34.43	54.00	-19.57	Vertical
5460.00	33.81	31.99	9.16	40.23	34.73	54.00	-19.27	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																						
Test Method:	ANSI C63.4:2003																						
Test Frequency Range:	30MHz to 40GHz																						
Test site:	Measurement Distance: 3m																						
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td>Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
Frequency	Detector	RBW	VBW	Remark																			
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value																			
Above 1GHz	Peak	1MHz	3MHz	Peak Value																			
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td>Above 1GHz</td><td>68.2</td><td>Peak Value</td></tr></table> Remark: 3. Above 1GHz limit: E[dBμV/m] = EIRP[dBm] + 95.2=68.2 dBuV/m, for EIPR[dBm]=-27dBm.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																					
30MHz-88MHz	40.0	Quasi-peak Value																					
88MHz-216MHz	43.5	Quasi-peak Value																					
216MHz-960MHz	46.0	Quasi-peak Value																					
960MHz-1GHz	54.0	Quasi-peak Value																					
Above 1GHz	68.2	Peak Value																					
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																						

Test setup:	Below 1GHz Above 1GHz
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Band 1:

Below 1GHz

23dBi Antenna

POE: FAS4800070-C55


Horizontal:

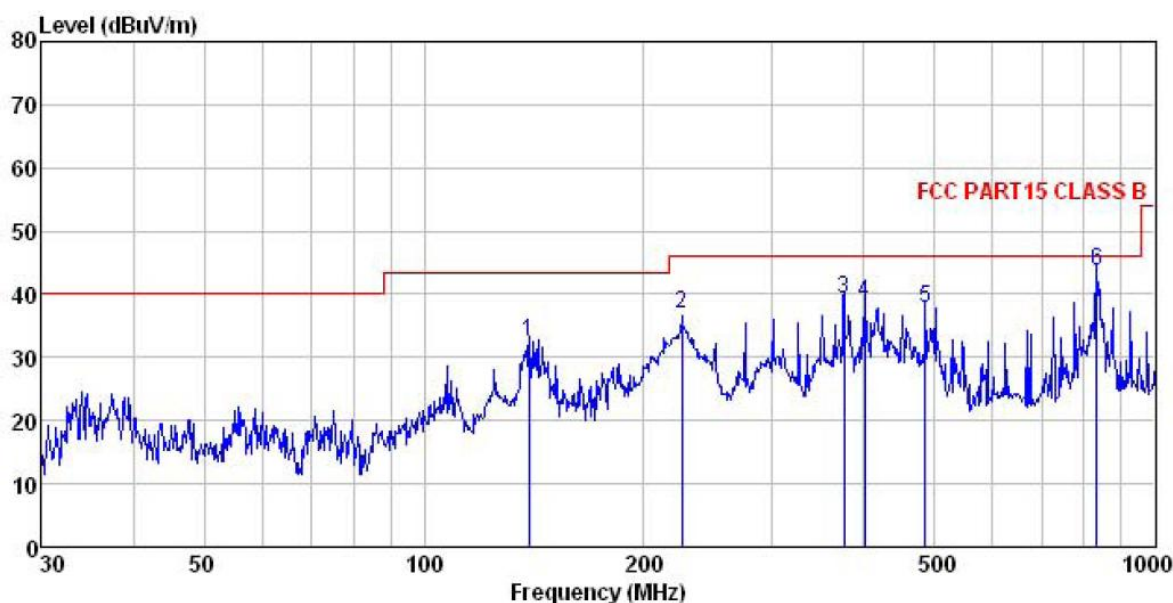

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:FAS4800070-C55

	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	139.361	52.21	8.19	1.25	29.28	32.37	43.50
2	225.308	52.76	11.41	1.51	28.68	37.00	46.00
3	375.939	51.33	14.56	2.03	28.68	39.24	46.00
4	400.432	50.15	15.10	2.12	28.78	38.59	46.00
5	485.609	48.14	16.26	2.36	28.93	37.83	46.00
6	833.317	48.02	20.42	3.22	28.07	43.59	46.00

Vertical:

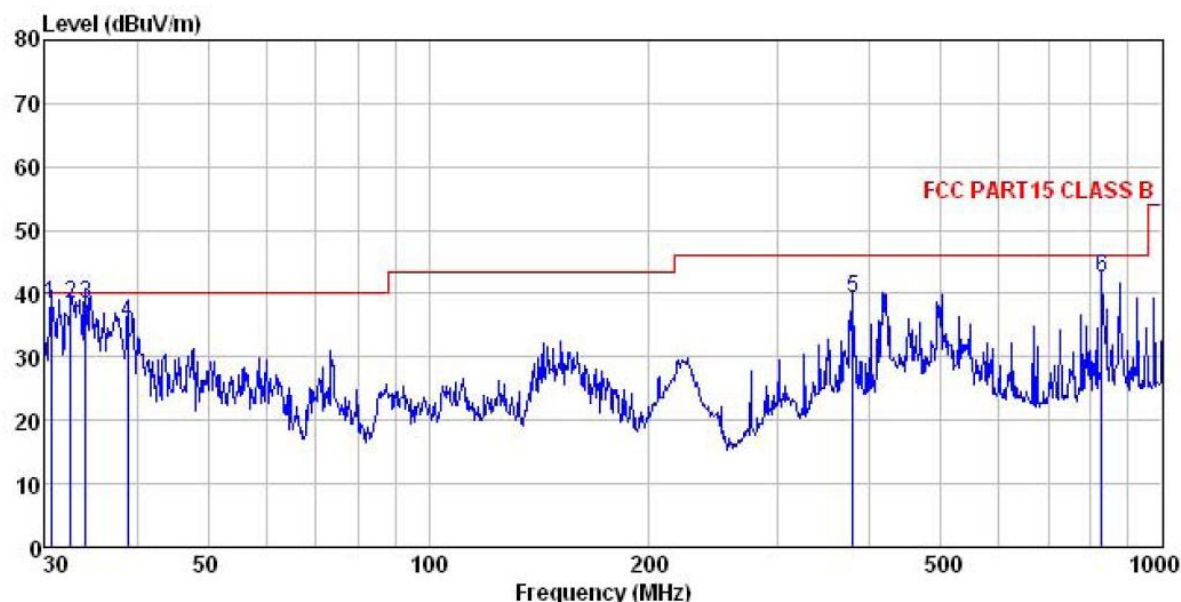


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:FAS4800070-C55

		ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----MHz	-----dBuV	-----dB/m	-----dB	-----dB	-----dBuV/m	-----dBuV/m	-----dB	-----
1	30.531	55.56	12.33	0.44	29.98	38.35	40.00	-1.65 QP
2	32.520	55.44	12.31	0.46	29.96	38.25	40.00	-1.75 QP
3	34.037	55.54	12.31	0.47	29.96	38.36	40.00	-1.64 QP
4	38.888	51.43	13.30	0.51	29.91	35.33	40.00	-4.67 QP
5	378.584	51.20	14.57	2.04	28.69	39.12	46.00	-6.88 QP
6	827.493	47.00	20.37	3.21	28.09	42.49	46.00	-3.51 QP

POE: VX-PI1000GB


Horizontal:

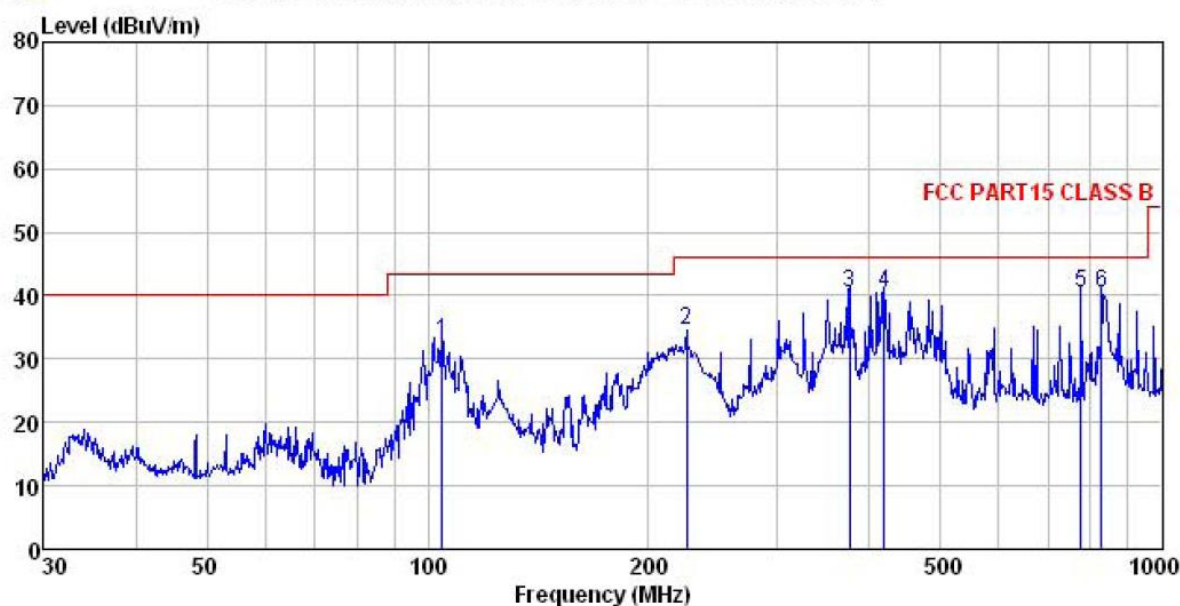

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:VX-PI1000GB

		ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	104.536	48.60	12.73	1.00	29.50	32.83	43.50	-10.67 QP
2	225.308	50.30	11.41	1.51	28.68	34.54	46.00	-11.46 QP
3	375.939	52.65	14.56	2.03	28.68	40.56	46.00	-5.44 QP
4	419.108	51.57	15.43	2.17	28.82	40.35	46.00	-5.65 QP
5	776.878	45.86	19.77	3.11	28.32	40.42	46.00	-5.58 QP
6	827.493	45.00	20.37	3.21	28.09	40.49	46.00	-5.51 QP

Vertical:

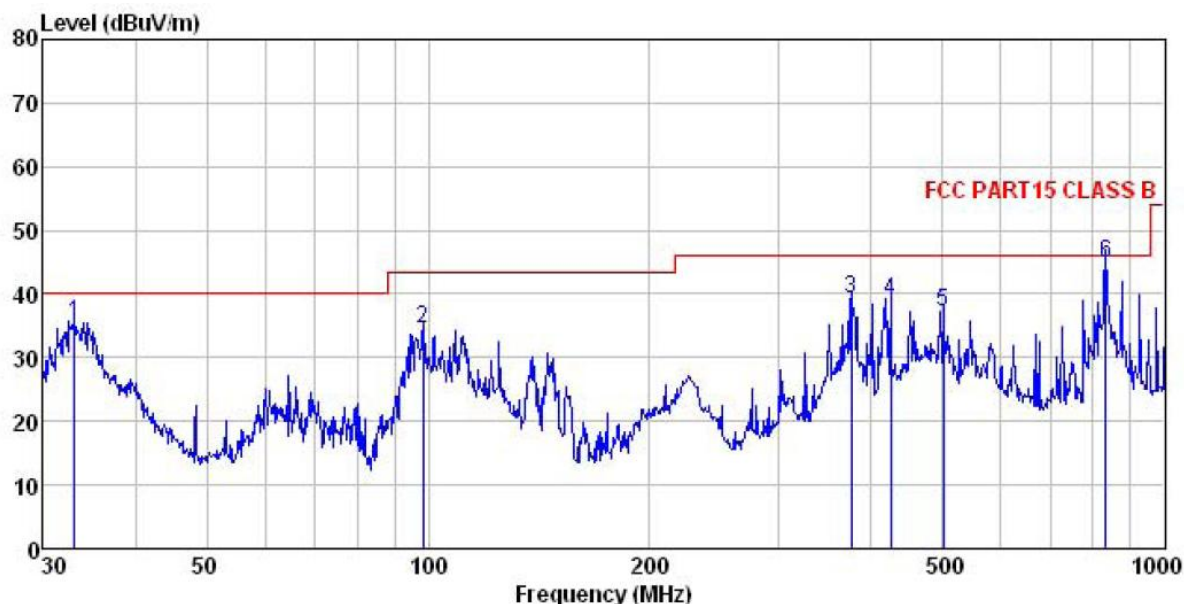


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:VX-PI1000GB

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB
1	33.095	52.49	12.31	0.46	29.96	35.30	40.00 -4.70 QP
2	98.487	50.12	13.06	0.95	29.54	34.59	43.50 -8.91 QP
3	375.939	51.45	14.56	2.03	28.68	39.36	46.00 -6.64 QP
4	425.028	50.25	15.49	2.19	28.83	39.10	46.00 -6.90 QP
5	501.179	47.05	16.63	2.41	28.96	37.13	46.00 -8.87 QP
6	833.317	49.25	20.42	3.22	28.07	44.82	46.00 -1.18 QP

POE: AY032E-ZF483


Horizontal:

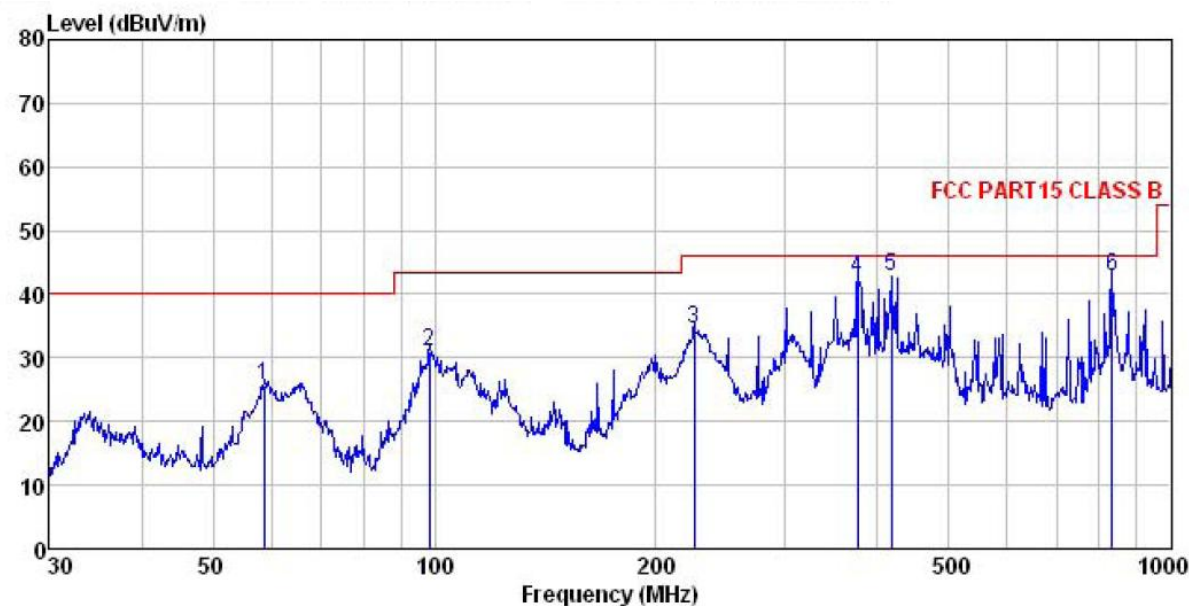

Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
Job No. : 588RF
EUT : Broadband Digital Transmission System
Model : FWBD1401
Test mode : WIFI mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5℃ Humi:55%
Test Engineer: Winner
Remark : 23dBi POE:AY032E-ZF483

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	58.613	41.94	12.79	0.68	29.78	25.63	40.00	-14.37 QP
2	98.487	46.64	13.06	0.95	29.54	31.11	43.50	-12.39 QP
3	225.308	50.30	11.41	1.51	28.68	34.54	46.00	-11.46 QP
4	375.939	54.55	14.56	2.03	28.68	42.46	46.00	-3.54 QP
5	417.641	54.12	15.43	2.17	28.81	42.91	46.00	-3.09 QP
6	833.317	47.29	20.42	3.22	28.07	42.86	46.00	-3.14 QP

Vertical:

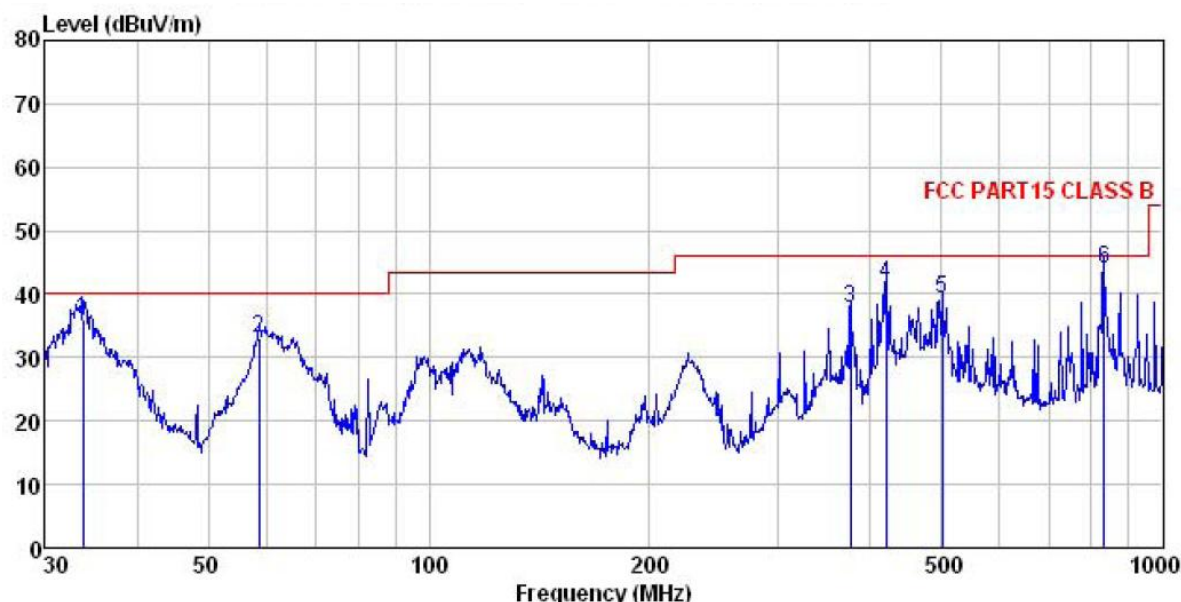


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:AY032E-ZF483

Mark	Freq	Level	ReadAntenna	Cable	Preamp	Limit	Over	Remark
			Factor	Loss	Factor	Line	Limit	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	33.799	53.22	12.31	0.47	29.96	36.04	40.00	-3.96 QP
2	58.613	49.36	12.79	0.68	29.78	33.05	40.00	-6.95 QP
3	375.939	49.88	14.56	2.03	28.68	37.79	46.00	-8.21 QP
4	420.580	52.84	15.47	2.18	28.82	41.67	46.00	-4.33 QP
5	501.179	49.05	16.63	2.41	28.96	39.13	46.00	-6.87 QP
6	833.317	48.50	20.42	3.22	28.07	44.07	46.00	-1.93 QP

30dBi Antenna

POE: FAS4800070-C55


Horizontal:

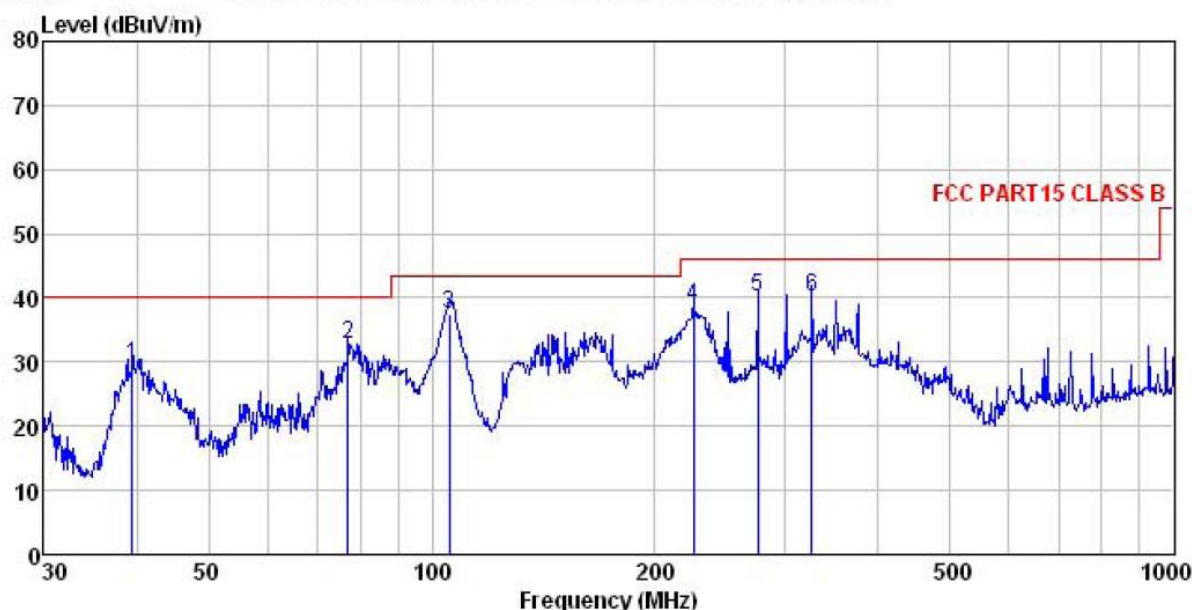

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:FAS4800070-C55

	Freq	ReadAntenna Level	Cable Preamp Factor	Loss Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	39.437	45.40	13.44	0.52	29.91	29.45	40.00	-10.55 QP
2	77.051	53.56	8.14	0.83	29.66	32.87	40.00	-7.13 QP
3	105.642	53.45	12.63	1.01	29.49	37.60	43.50	-5.90 QP
4	225.308	54.51	11.41	1.51	28.68	38.75	46.00	-7.25 QP
5	275.157	54.36	12.55	1.70	28.49	40.12	46.00	-5.88 QP
6	325.596	53.10	13.59	1.86	28.51	40.04	46.00	-5.96 QP

Vertical:

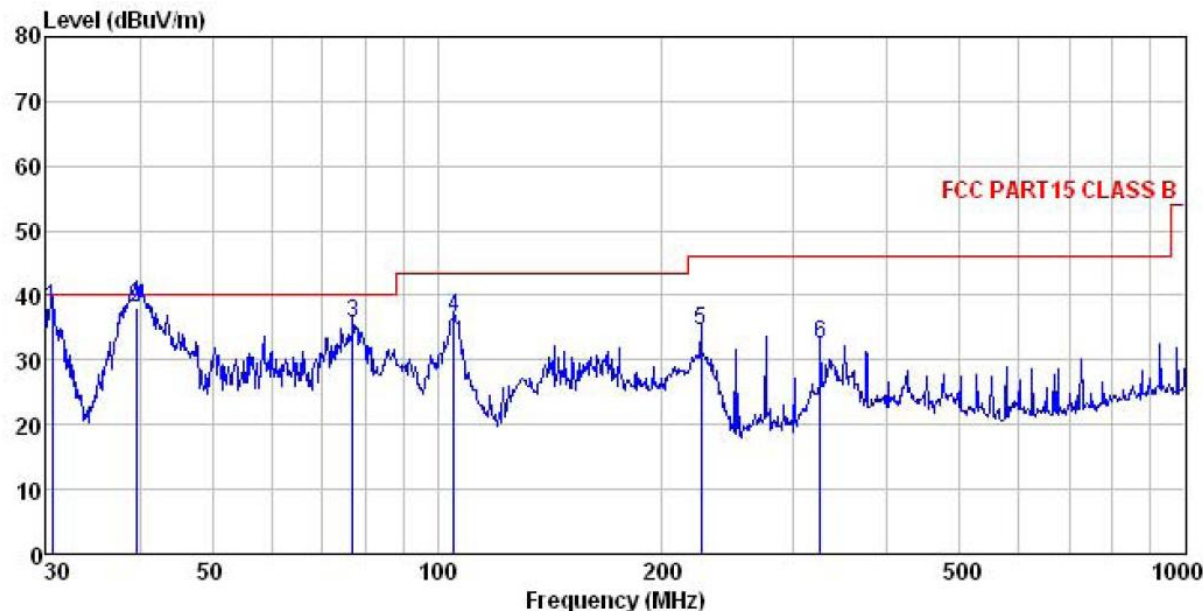


Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
Job No. : 588RF
EUT : Broadband Digital Transmission System
Model : FWBD1401
Test mode : WIFI mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5'C Humi:55%
Test Engineer: Winner
Remark : 30dBi POE:FAS4800070-C55

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.531	55.16	12.33	0.44	29.98	37.95	40.00	-2.05	QP
2	39.576	53.97	13.49	0.52	29.90	38.08	40.00	-1.92	QP
3	77.051	56.39	8.14	0.83	29.66	35.70	40.00	-4.30	QP
4	105.272	52.29	12.68	1.01	29.49	36.49	43.50	-7.01	QP
5	225.308	50.17	11.41	1.51	28.68	34.41	46.00	-11.59	QP
6	325.596	45.50	13.59	1.86	28.51	32.44	46.00	-13.56	QP

POE: VX-PI1000GB


Horizontal:

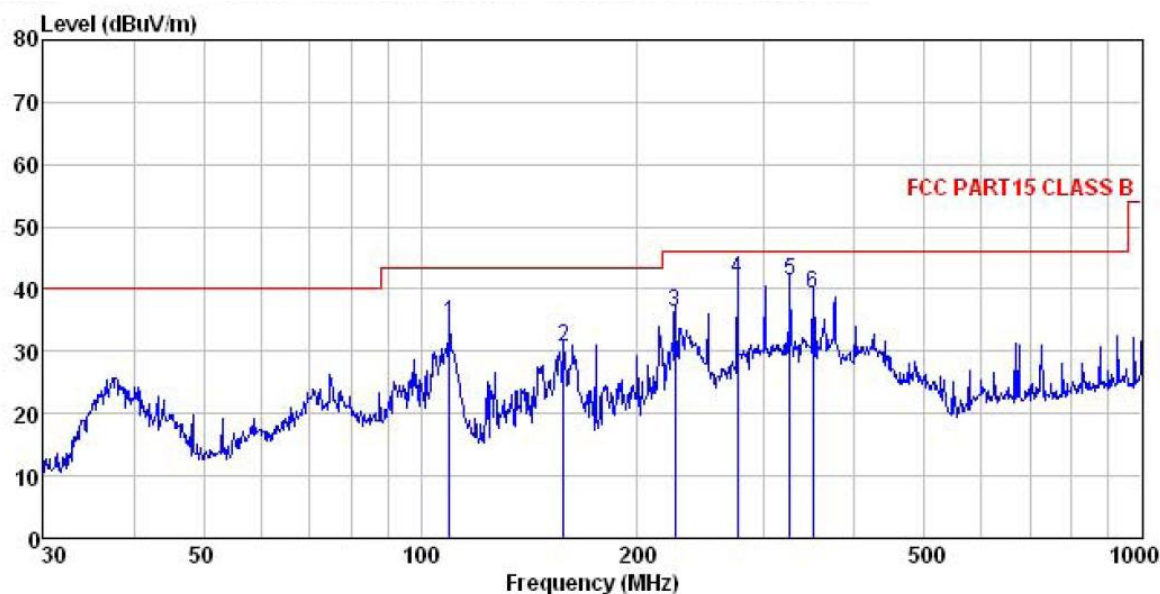

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:VX-PI1000GB

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
		Level Factor	Loss Factor	Factor		Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	109.796	50.76	12.25	1.04	29.46	34.59	43.50	-8.91 QP
2	158.112	49.94	8.58	1.33	29.15	30.70	43.50	-12.80 QP
3	225.308	52.05	11.41	1.51	28.68	36.29	46.00	-9.71 QP
4	275.157	56.00	12.55	1.70	28.49	41.76	46.00	-4.24 QP
5	325.596	54.44	13.59	1.86	28.51	41.38	46.00	-4.62 QP
6	350.477	51.65	14.27	1.94	28.56	39.30	46.00	-6.70 QP

Vertical:

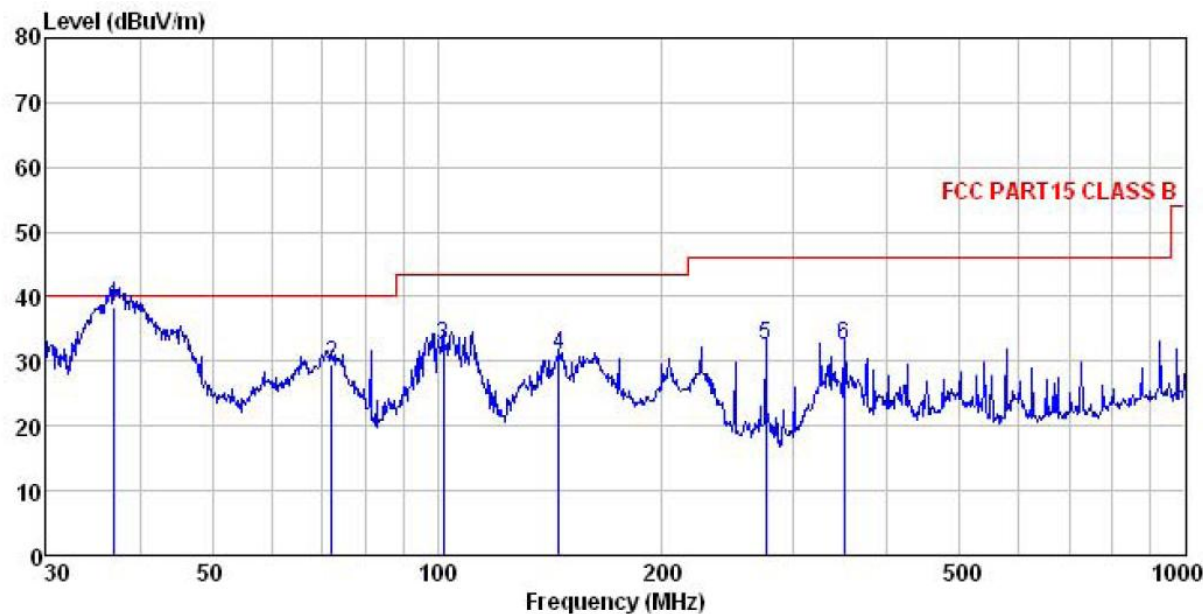


Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
Job No. : 588RF
EUT : Broadband Digital Transmission System
Model : FWBD1401
Test mode : WIFI mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5'C Humi:55%
Test Engineer: Winner
Remark : 30dBi POE:VX-PI1000GB

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
		Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	37.025	54.97	12.82	0.50	29.93	38.36	40.00	-1.64 QP
2	72.338	50.27	8.26	0.80	29.70	29.63	40.00	-10.37 QP
3	102.001	48.18	12.97	0.98	29.51	32.62	43.50	-10.88 QP
4	145.351	50.74	8.23	1.29	29.24	31.02	43.50	-12.48 QP
5	275.157	46.57	12.55	1.70	28.49	32.33	46.00	-13.67 QP
6	350.477	44.80	14.27	1.94	28.56	32.45	46.00	-13.55 QP

POE: AY032E-ZF483


Horizontal:

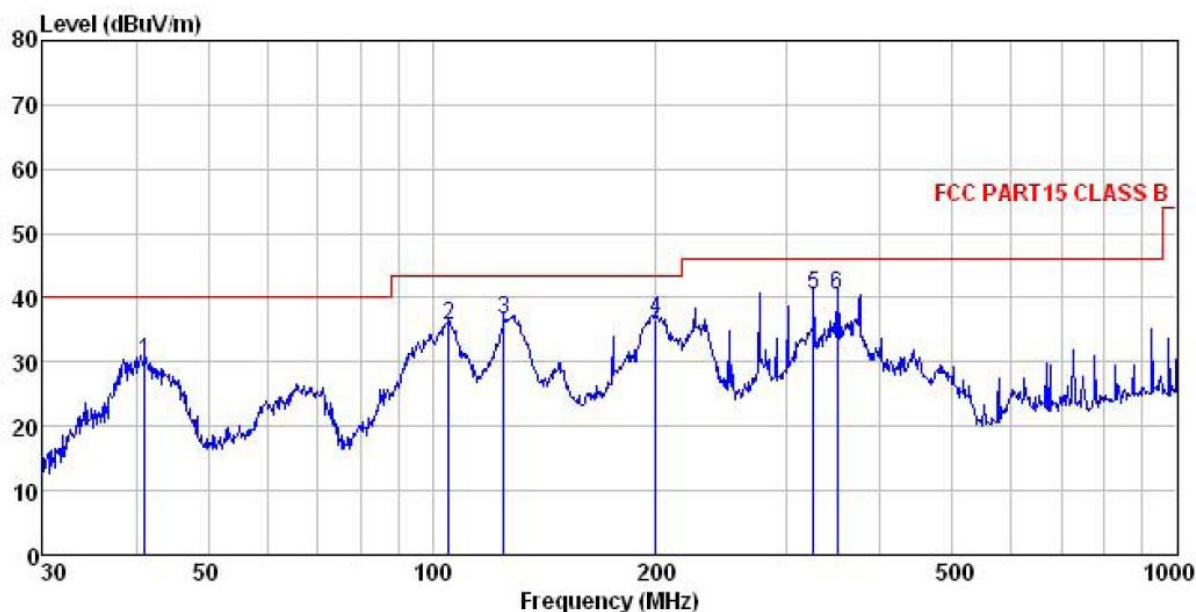

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:AY032E-ZF483

	Freq	Level	Antenna Factor	Cable Loss	Preamplifier	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	41.132	45.98	13.57	0.53	29.89	30.19	40.00	-9.81	QP
2	105.272	51.44	12.68	1.01	29.49	35.64	43.50	-7.86	QP
3	125.007	54.96	9.70	1.16	29.36	36.46	43.50	-7.04	QP
4	199.986	53.58	10.57	1.38	28.83	36.70	43.50	-6.80	QP
5	325.596	53.59	13.59	1.86	28.51	40.53	46.00	-5.47	QP
6	350.477	52.93	14.27	1.94	28.56	40.58	46.00	-5.42	QP

Vertical:

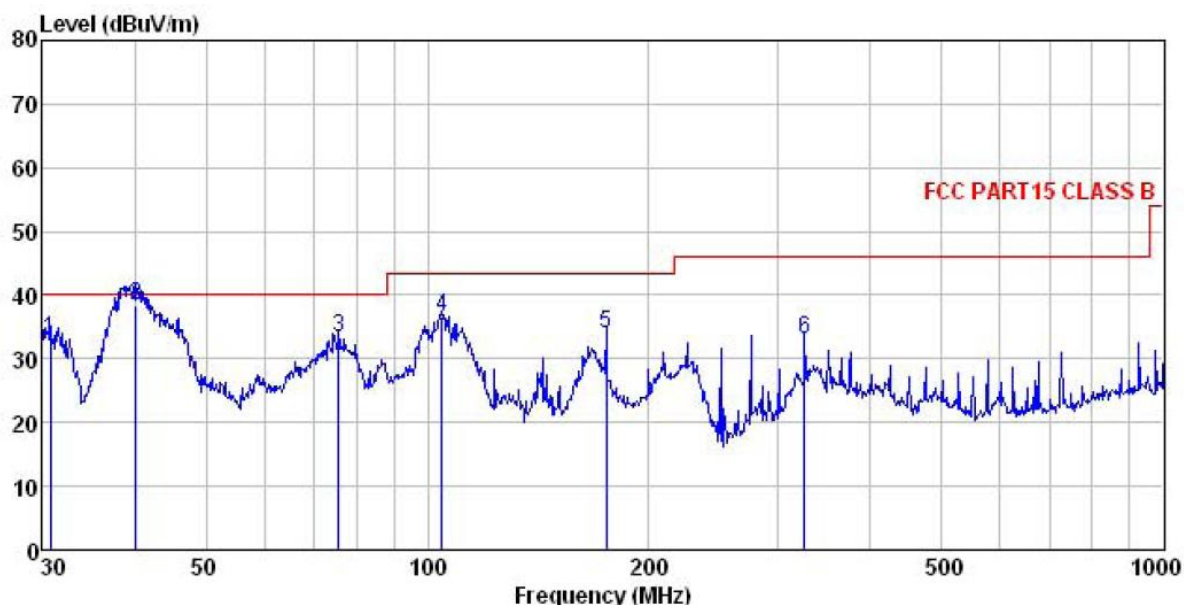

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:AY032E-ZF483


	Freq	Level	Factor	ReadAntenna	Cable	Preamp	Limit	Over	
	MHz	dBuV	dB/m	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.745	50.23	12.32	0.44	29.98	33.01	40.00	-6.99	QP
2	40.135	54.07	13.58	0.52	29.90	38.27	40.00	-1.73	QP
3	75.711	54.23	7.91	0.82	29.67	33.29	40.00	-6.71	QP
4	104.536	52.35	12.73	1.00	29.50	36.58	43.50	-6.92	QP
5	175.037	52.25	9.29	1.35	29.01	33.88	43.50	-9.62	QP
6	325.596	46.23	13.59	1.86	28.51	33.17	46.00	-12.83	QP

Band 4:

23dBi Antenna

POE: FAS4800070-C55


Horizontal:

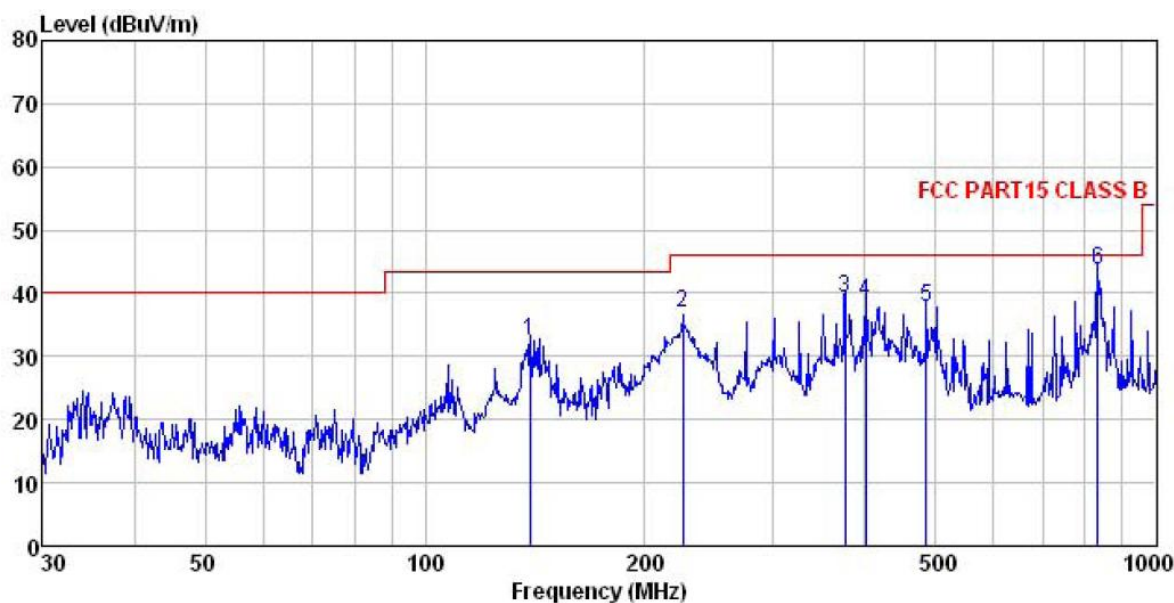

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:FAS4800070-C55

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	139.361	52.21	8.19	1.25	29.28	32.37	43.50	-11.13	QP
2	225.308	52.76	11.41	1.51	28.68	37.00	46.00	-9.00	QP
3	375.939	51.33	14.56	2.03	28.68	39.24	46.00	-6.76	QP
4	400.432	50.15	15.10	2.12	28.78	38.59	46.00	-7.41	QP
5	485.609	48.14	16.26	2.36	28.93	37.83	46.00	-8.17	QP
6	833.317	48.02	20.42	3.22	28.07	43.59	46.00	-2.41	QP

Vertical:

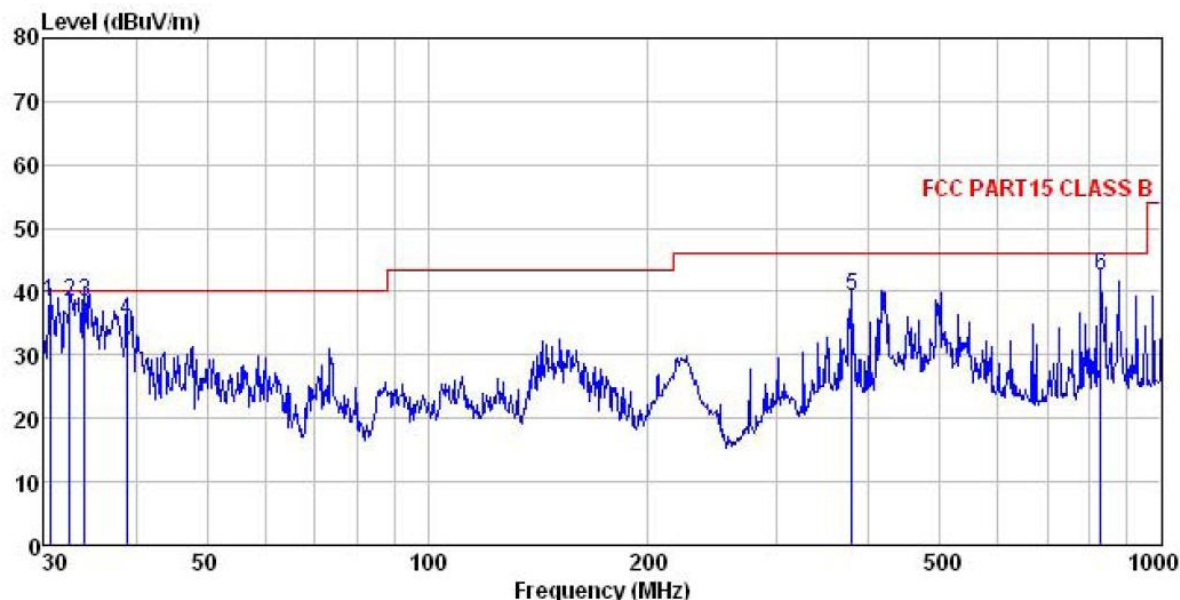


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:FAS4800070-C55

		ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----MHz	-----dBuV	-----dB/m	-----dB	-----dB	-----dBuV/m	-----dBuV/m	-----dB	-----
1	30.531	55.56	12.33	0.44	29.98	38.35	40.00	-1.65 QP
2	32.520	55.44	12.31	0.46	29.96	38.25	40.00	-1.75 QP
3	34.037	55.54	12.31	0.47	29.96	38.36	40.00	-1.64 QP
4	38.888	51.43	13.30	0.51	29.91	35.33	40.00	-4.67 QP
5	378.584	51.20	14.57	2.04	28.69	39.12	46.00	-6.88 QP
6	827.493	47.00	20.37	3.21	28.09	42.49	46.00	-3.51 QP

POE: VX-PI1000GB


Horizontal:

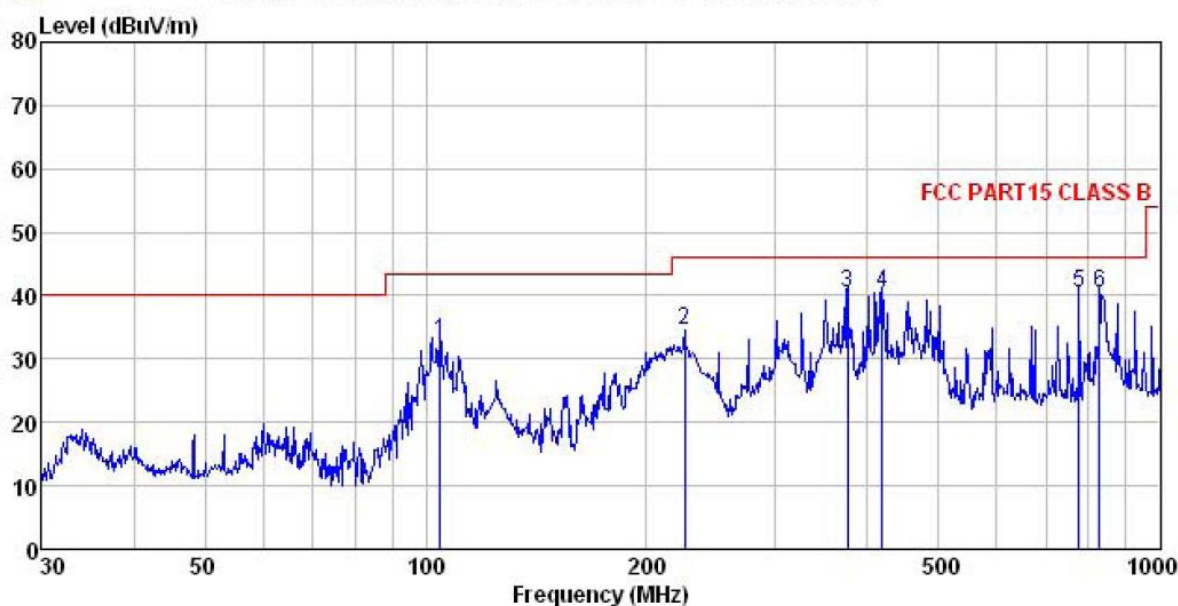

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:VX-PI1000GB

		ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	104.536	48.60	12.73	1.00	29.50	32.83	43.50	-10.67 QP
2	225.308	50.30	11.41	1.51	28.68	34.54	46.00	-11.46 QP
3	375.939	52.65	14.56	2.03	28.68	40.56	46.00	-5.44 QP
4	419.108	51.57	15.43	2.17	28.82	40.35	46.00	-5.65 QP
5	776.878	45.86	19.77	3.11	28.32	40.42	46.00	-5.58 QP
6	827.493	45.00	20.37	3.21	28.09	40.49	46.00	-5.51 QP

Vertical:

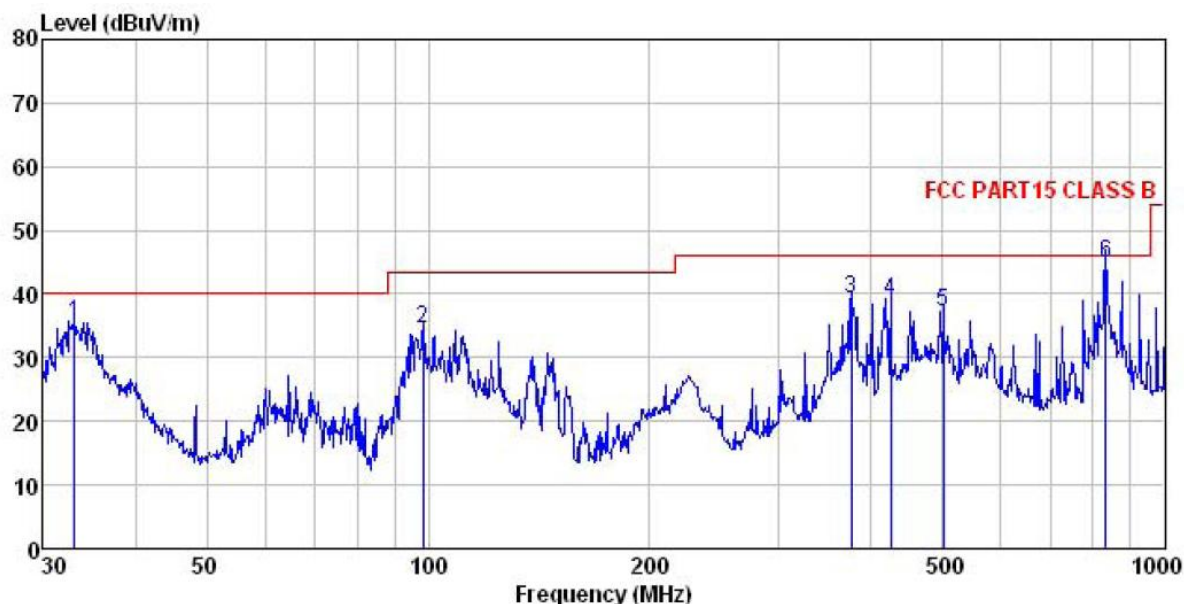


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:VX-PI1000GB

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	33.095	52.49	12.31	0.46	29.96	35.30	40.00
2	98.487	50.12	13.06	0.95	29.54	34.59	43.50
3	375.939	51.45	14.56	2.03	28.68	39.36	46.00
4	425.028	50.25	15.49	2.19	28.83	39.10	46.00
5	501.179	47.05	16.63	2.41	28.96	37.13	46.00
6	833.317	49.25	20.42	3.22	28.07	44.82	46.00

POE: AY032E-ZF483


Horizontal:

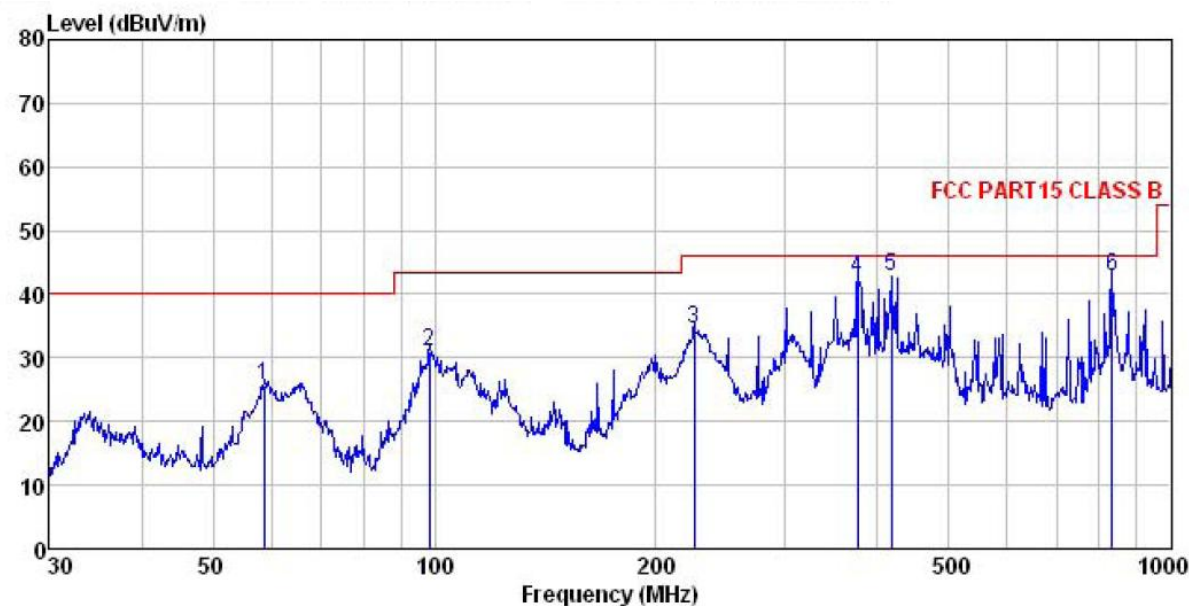

Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
Job No. : 588RF
EUT : Broadband Digital Transmission System
Model : FWBD1401
Test mode : WIFI mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5℃ Humi:55%
Test Engineer: Winner
Remark : 23dBi POE:AY032E-ZF483

	Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark
		Level	Factor	Loss	Factor	Line	Limit	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	58.613	41.94	12.79	0.68	29.78	25.63	40.00	-14.37 QP
2	98.487	46.64	13.06	0.95	29.54	31.11	43.50	-12.39 QP
3	225.308	50.30	11.41	1.51	28.68	34.54	46.00	-11.46 QP
4	375.939	54.55	14.56	2.03	28.68	42.46	46.00	-3.54 QP
5	417.641	54.12	15.43	2.17	28.81	42.91	46.00	-3.09 QP
6	833.317	47.29	20.42	3.22	28.07	42.86	46.00	-3.14 QP

Vertical:

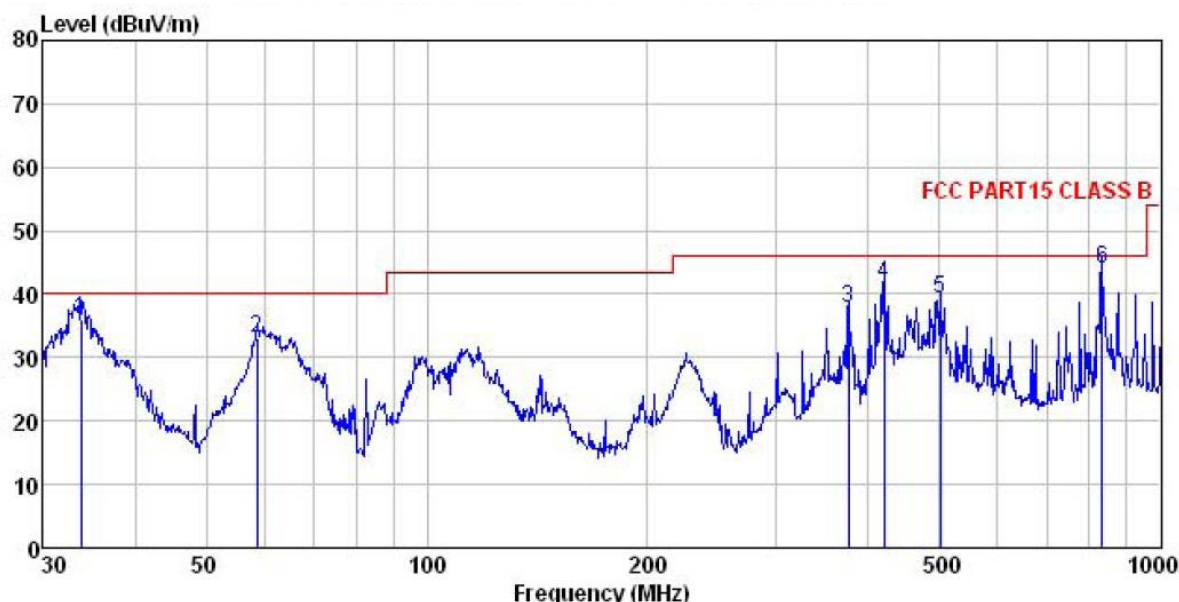


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 23dBi POE:AY032E-ZF483

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	33.799	53.22	12.31	0.47	29.96	36.04	40.00
2	58.613	49.36	12.79	0.68	29.78	33.05	40.00
3	375.939	49.88	14.56	2.03	28.68	37.79	46.00
4	420.580	52.84	15.47	2.18	28.82	41.67	46.00
5	501.179	49.05	16.63	2.41	28.96	39.13	46.00
6	833.317	48.50	20.42	3.22	28.07	44.07	46.00

30dBi Antenna

POE: FAS4800070-C55


Horizontal:

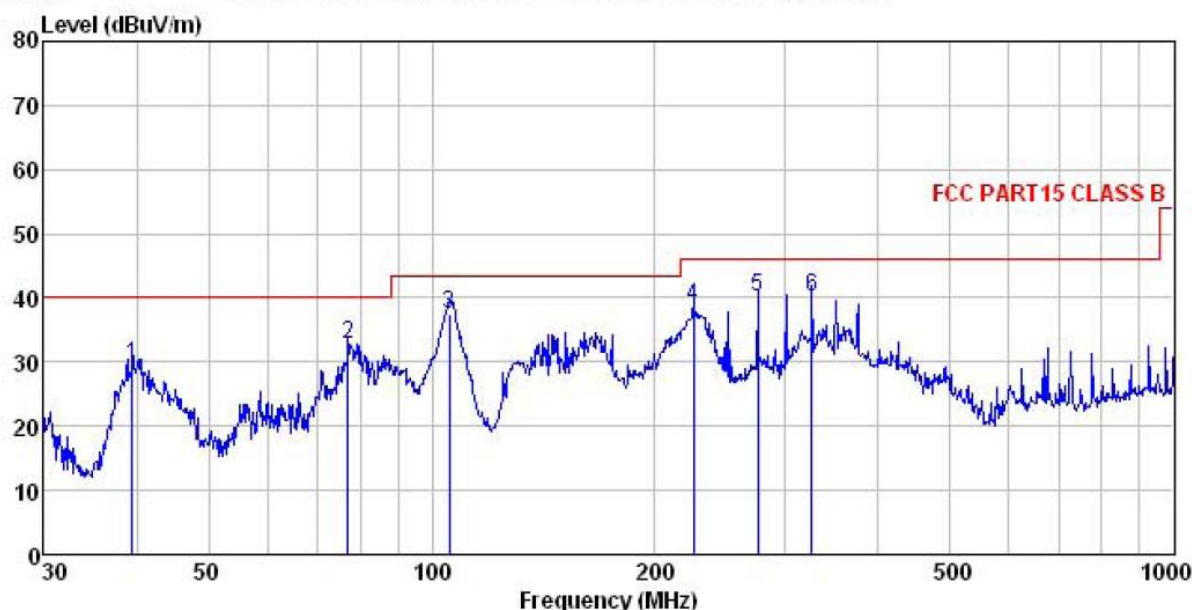

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:FAS4800070-C55

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
		Level	Factor	Loss Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	39.437	45.40	13.44	0.52	29.91	29.45	40.00 -10.55 QP
2	77.051	53.56	8.14	0.83	29.66	32.87	40.00 -7.13 QP
3	105.642	53.45	12.63	1.01	29.49	37.60	43.50 -5.90 QP
4	225.308	54.51	11.41	1.51	28.68	38.75	46.00 -7.25 QP
5	275.157	54.36	12.55	1.70	28.49	40.12	46.00 -5.88 QP
6	325.596	53.10	13.59	1.86	28.51	40.04	46.00 -5.96 QP

Vertical:

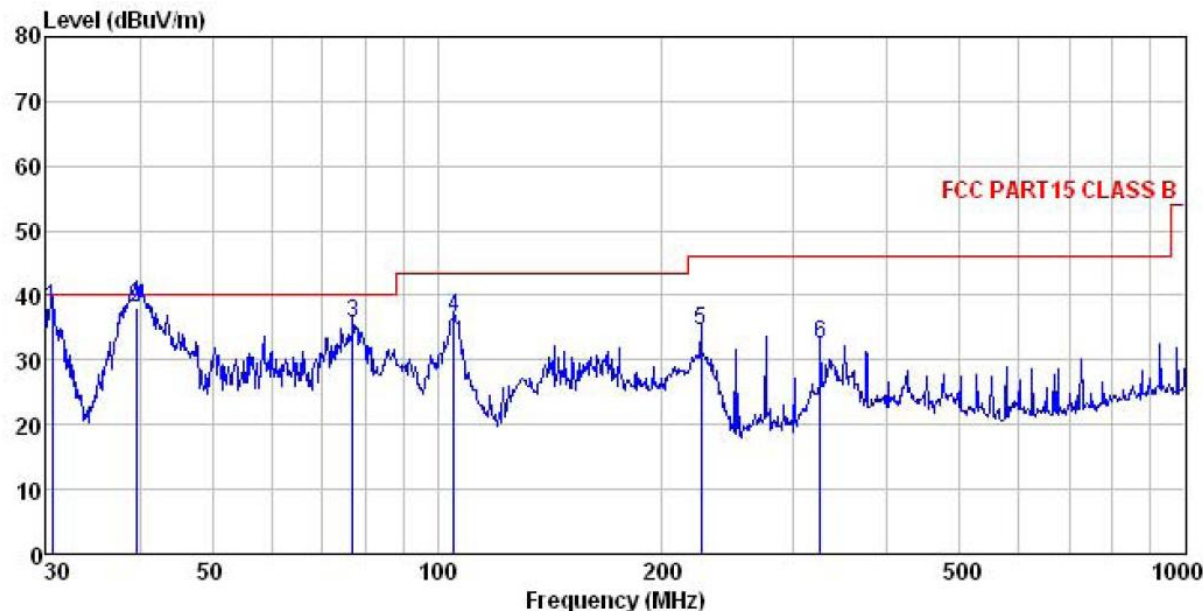


Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
Job No. : 588RF
EUT : Broadband Digital Transmission System
Model : FWBD1401
Test mode : WIFI mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Humi:55%
Test Engineer: Winner
Remark : 30dBi POE:FAS4800070-C55

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.531	55.16	12.33	0.44	29.98	37.95	40.00	-2.05	QP
2	39.576	53.97	13.49	0.52	29.90	38.08	40.00	-1.92	QP
3	77.051	56.39	8.14	0.83	29.66	35.70	40.00	-4.30	QP
4	105.272	52.29	12.68	1.01	29.49	36.49	43.50	-7.01	QP
5	225.308	50.17	11.41	1.51	28.68	34.41	46.00	-11.59	QP
6	325.596	45.50	13.59	1.86	28.51	32.44	46.00	-13.56	QP

POE: VX-PI1000GB


Horizontal:

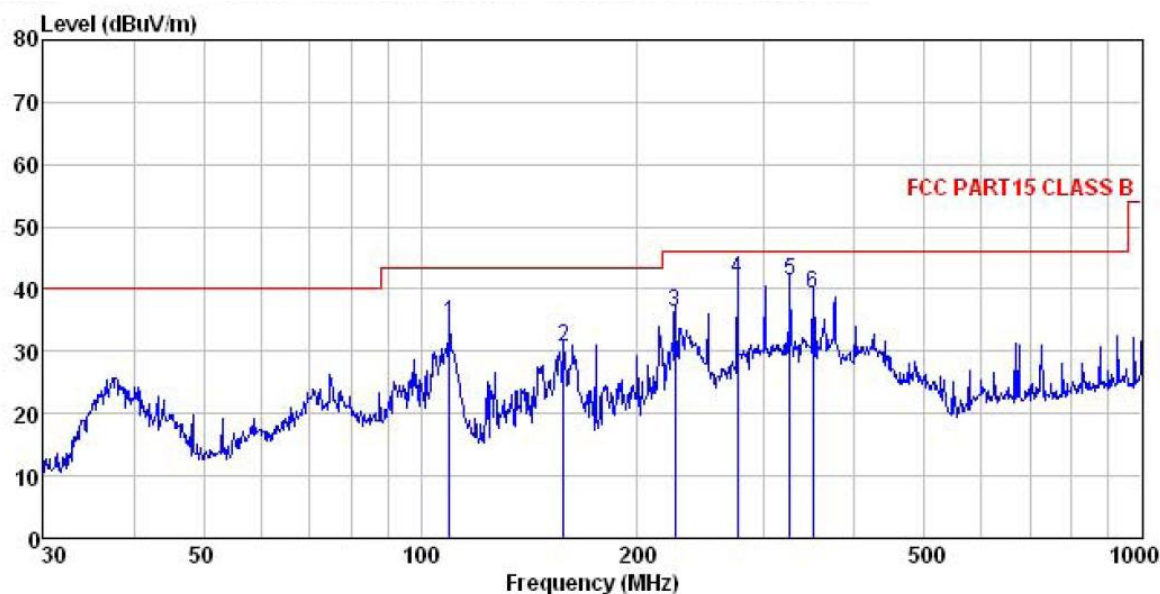

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:VX-PI1000GB

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss Factor	dB	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	109.796	50.76	12.25	1.04	29.46	34.59	43.50	-8.91 QP
2	158.112	49.94	8.58	1.33	29.15	30.70	43.50	-12.80 QP
3	225.308	52.05	11.41	1.51	28.68	36.29	46.00	-9.71 QP
4	275.157	56.00	12.55	1.70	28.49	41.76	46.00	-4.24 QP
5	325.596	54.44	13.59	1.86	28.51	41.38	46.00	-4.62 QP
6	350.477	51.65	14.27	1.94	28.56	39.30	46.00	-6.70 QP

Vertical:

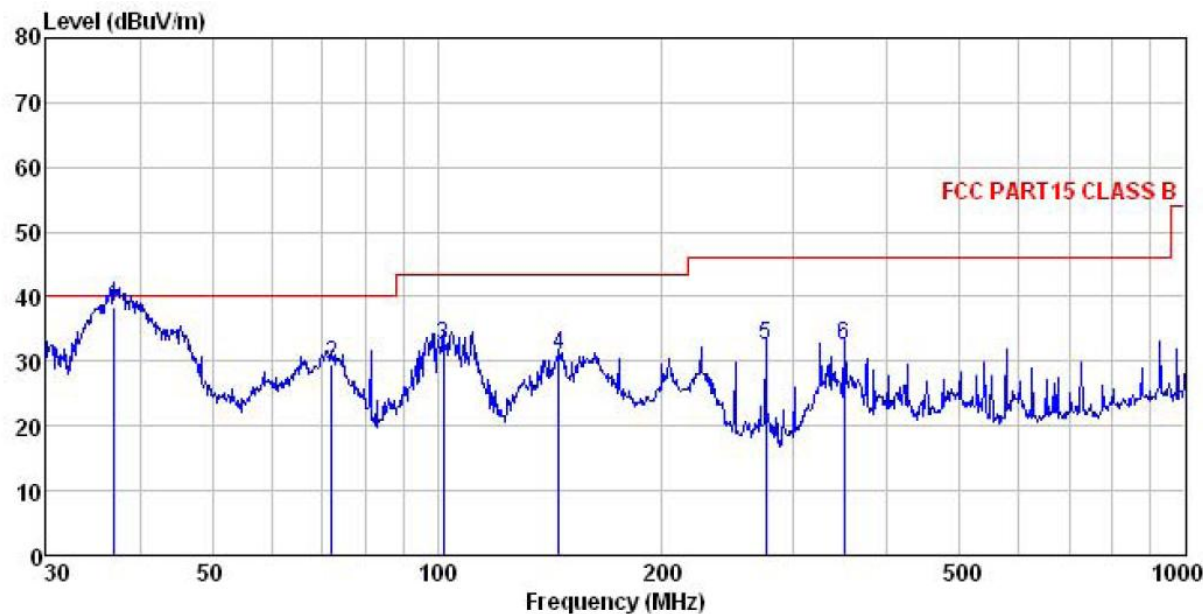


Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
Job No. : 588RF
EUT : Broadband Digital Transmission System
Model : FWBD1401
Test mode : WIFI mode
Power Rating : AC 120V/60Hz
Environment : Temp:25.5°C Humi:55%
Test Engineer: Winner
Remark : 30dBi POE:VX-PI1000GB

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
		Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	37.025	54.97	12.82	0.50	29.93	38.36	40.00	-1.64 QP
2	72.338	50.27	8.26	0.80	29.70	29.63	40.00	-10.37 QP
3	102.001	48.18	12.97	0.98	29.51	32.62	43.50	-10.88 QP
4	145.351	50.74	8.23	1.29	29.24	31.02	43.50	-12.48 QP
5	275.157	46.57	12.55	1.70	28.49	32.33	46.00	-13.67 QP
6	350.477	44.80	14.27	1.94	28.56	32.45	46.00	-13.55 QP

POE: AY032E-ZF483


Horizontal:

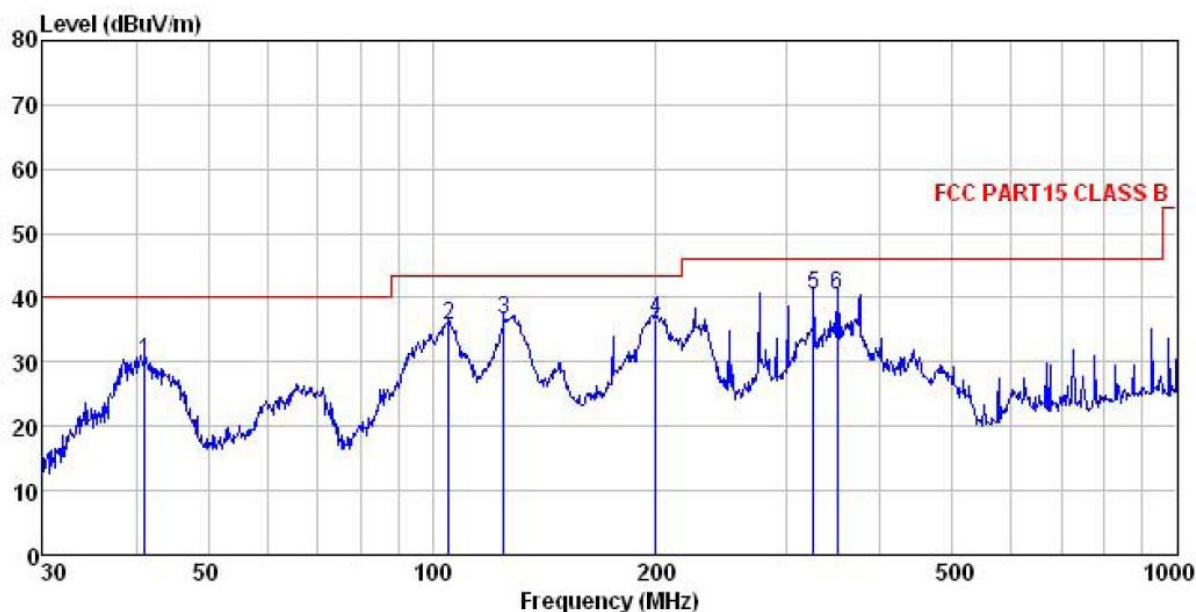

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:AY032E-ZF483

	Freq	Level	ReadAntenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	41.132	45.98	13.57	0.53	29.89	30.19	40.00	-9.81	QP
2	105.272	51.44	12.68	1.01	29.49	35.64	43.50	-7.86	QP
3	125.007	54.96	9.70	1.16	29.36	36.46	43.50	-7.04	QP
4	199.986	53.58	10.57	1.38	28.83	36.70	43.50	-6.80	QP
5	325.596	53.59	13.59	1.86	28.51	40.53	46.00	-5.47	QP
6	350.477	52.93	14.27	1.94	28.56	40.58	46.00	-5.42	QP

Vertical:

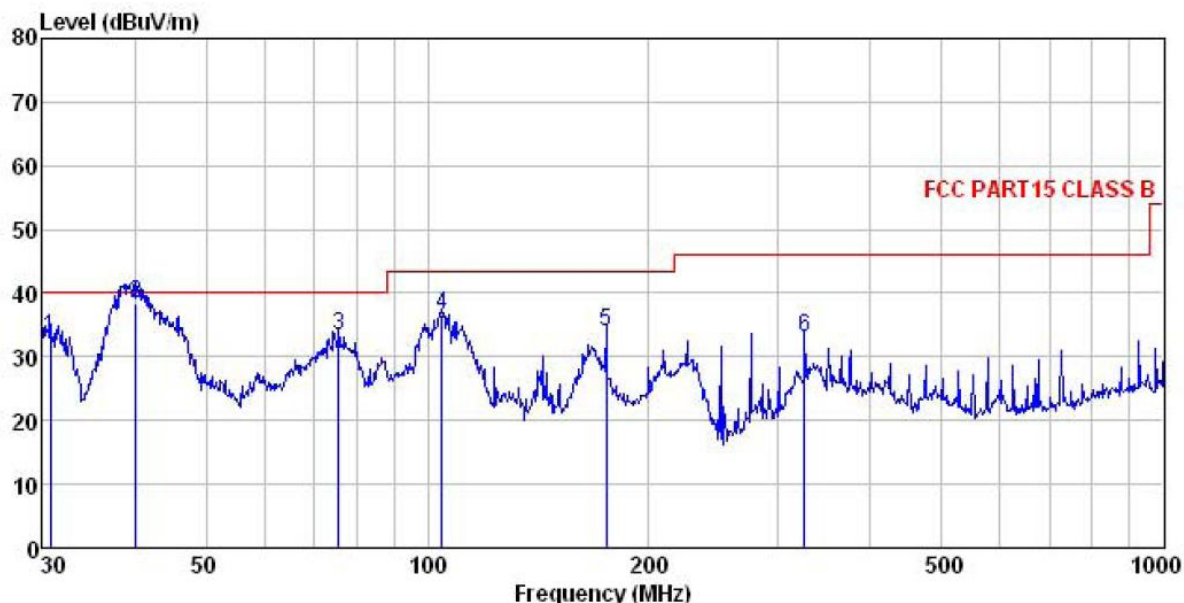

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 588RF
 EUT : Broadband Digital Transmission System
 Model : FWBD1401
 Test mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : 30dBi POE:AY032E-ZF483

	Freq	Level	Factor	ReadAntenna	Cable	Preamp	Limit	Over	
	MHz	dBuV	dB/m	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.745	50.23	12.32	0.44	29.98	33.01	40.00	-6.99	QP
2	40.135	54.07	13.58	0.52	29.90	38.27	40.00	-1.73	QP
3	75.711	54.23	7.91	0.82	29.67	33.29	40.00	-6.71	QP
4	104.536	52.35	12.73	1.00	29.50	36.58	43.50	-6.92	QP
5	175.037	52.25	9.29	1.35	29.01	33.88	43.50	-9.62	QP
6	325.596	46.23	13.59	1.86	28.51	33.17	46.00	-12.83	QP

Above 1GHz:

Band 1:
23dBi ant

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	43.69	39.23	13.84	41.34	55.42	68.20	-12.78	Vertical
10360.00	43.21	39.23	13.84	41.34	54.94	68.20	-13.26	Horizontal
802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	44.12	39.36	13.85	41.27	56.06	68.20	-12.14	Vertical
10400.00	43.65	39.36	13.85	41.27	55.59	68.20	-12.61	Horizontal
802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	43.68	39.56	13.90	41.06	56.08	68.20	-12.12	Vertical
10480.00	43.45	39.56	13.90	41.06	55.85	68.20	-12.35	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	43.58	39.23	13.84	41.34	55.31	68.20	-12.89	Vertical
10360.00	43.14	39.23	13.84	41.34	54.87	68.20	-13.33	Horizontal
802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	43.84	39.36	13.85	41.27	55.78	68.20	-12.42	Vertical
10400.00	44.54	39.36	13.85	41.27	56.48	68.20	-11.72	Horizontal
802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	43.56	39.56	13.90	41.06	55.96	68.20	-12.24	Vertical
10480.00	43.22	39.56	13.90	41.06	55.62	68.20	-12.58	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	43.52	39.29	13.84	41.31	55.34	68.20	-12.86	Vertical
10380.00	43.87	39.29	13.84	41.31	55.69	68.20	-12.51	Horizontal
802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	43.58	39.54	13.88	41.17	55.83	68.20	-12.37	Vertical
10460.00	43.12	39.54	13.88	41.17	55.37	68.20	-12.83	Horizontal
Remark: 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor</i> 2. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>								

30dBi ant

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	44.11	39.23	13.84	41.34	55.84	68.20	-12.36	Vertical
10360.00	43.98	39.23	13.84	41.34	55.71	68.20	-12.49	Horizontal
802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	43.62	39.36	13.85	41.27	55.56	68.20	-12.64	Vertical
10400.00	43.28	39.36	13.85	41.27	55.22	68.20	-12.98	Horizontal
802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	44.25	39.56	13.90	41.06	56.65	68.20	-11.55	Vertical
10480.00	44.17	39.56	13.90	41.06	56.57	68.20	-11.63	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	43.65	39.23	13.84	41.34	55.38	68.20	-12.82	Vertical
10360.00	43.84	39.23	13.84	41.34	55.57	68.20	-12.63	Horizontal
802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	43.65	39.36	13.85	41.27	55.59	68.20	-12.61	Vertical
10400.00	43.87	39.36	13.85	41.27	55.81	68.20	-12.39	Horizontal
802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	44.15	39.56	13.90	41.06	56.55	68.20	-11.65	Vertical
10480.00	44.19	39.56	13.90	41.06	56.59	68.20	-11.61	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	43.69	39.29	13.84	41.31	55.51	68.20	-12.69	Vertical
10380.00	43.70	39.29	13.84	41.31	55.52	68.20	-12.69	Horizontal
802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	43.98	39.54	13.88	41.17	56.23	68.20	-11.97	Vertical
10460.00	43.25	39.54	13.88	41.17	55.50	68.20	-12.70	Horizontal
Remark: 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor</i> 2. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>								

Band 4:
23dBi ant

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	41.25	40.25	13.82	40.75	54.57	68.20	-13.63	Vertical
11490.00	42.65	40.25	13.82	40.75	55.97	68.20	-12.23	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	28.36	40.25	13.82	40.75	41.68	54.00	-12.32	Vertical
11490.00	27.74	40.25	13.82	40.75	41.06	54.00	-12.94	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	41.36	40.17	13.78	40.91	54.40	68.20	-13.80	Vertical
11570.00	42.52	40.17	13.78	40.91	55.56	68.20	-12.64	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	28.45	40.17	13.78	40.91	41.49	54.00	-12.51	Vertical
11570.00	29.36	40.17	13.78	40.91	42.40	54.00	-11.60	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	42.36	39.89	13.74	41.06	54.93	68.20	-13.27	Vertical
11650.00	42.57	39.89	13.74	41.06	55.14	68.20	-13.06	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	29.47	39.89	13.74	41.06	42.04	54.00	-11.96	Vertical
11650.00	28.66	39.89	13.74	41.06	41.23	54.00	-12.77	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	41.52	40.25	13.82	40.75	54.84	68.20	-13.36	Vertical
11490.00	41.57	40.25	13.82	40.75	54.89	68.20	-13.31	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	29.36	40.25	13.82	40.75	42.68	54.00	-11.32	Vertical
11490.00	28.47	40.25	13.82	40.75	41.79	54.00	-12.21	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	42.36	40.17	13.78	40.91	55.40	68.20	-12.80	Vertical
11570.00	42.14	40.17	13.78	40.91	55.18	68.20	-13.02	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	28.65	40.17	13.78	40.91	41.69	54.00	-12.31	Vertical
11570.00	29.32	40.17	13.78	40.91	42.36	54.00	-11.64	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	42.54	39.89	13.74	41.06	55.11	68.20	-13.09	Vertical
11650.00	42.11	39.89	13.74	41.06	54.68	68.20	-13.52	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	29.63	39.89	13.74	41.06	42.20	54.00	-11.80	Vertical
11650.00	28.75	39.89	13.74	41.06	41.32	54.00	-12.68	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	41.12	40.26	13.83	40.77	54.44	68.20	-13.76	Vertical
11510.00	42.36	40.26	13.83	40.77	55.68	68.20	-12.52	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	29.60	40.26	13.83	40.77	42.92	54.00	-11.08	Vertical
11510.00	29.47	40.26	13.83	40.77	42.79	54.00	-11.21	Horizontal

802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	41.35	40.08	13.77	40.95	54.25	68.20	-13.95	Vertical
11590.00	41.87	40.08	13.77	40.95	54.77	68.20	-13.43	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	28.62	40.08	13.77	40.95	41.52	54.00	-12.48	Vertical
11590.00	29.77	40.08	13.77	40.95	42.67	54.00	-11.33	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

30dBi ant

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	41.65	40.25	13.82	40.75	54.97	68.20	-13.23	Vertical
11490.00	42.58	40.25	13.82	40.75	55.90	68.20	-12.30	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	29.36	40.25	13.82	40.75	42.68	54.00	-11.32	Vertical
11490.00	28.33	40.25	13.82	40.75	41.65	54.00	-12.35	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	42.62	40.17	13.78	40.91	55.66	68.20	-12.54	Vertical
11570.00	42.74	40.17	13.78	40.91	55.78	68.20	-12.42	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	28.65	40.17	13.78	40.91	41.69	54.00	-12.31	Vertical
11570.00	29.36	40.17	13.78	40.91	42.40	54.00	-11.60	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	41.29	39.89	13.74	41.06	53.86	68.20	-14.35	Vertical
11650.00	42.77	39.89	13.74	41.06	55.34	68.20	-12.86	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	28.32	39.89	13.74	41.06	40.89	54.00	-13.11	Vertical
11650.00	29.71	39.89	13.74	41.06	42.28	54.00	-11.72	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	42.65	40.25	13.82	40.75	55.97	68.20	-12.23	Vertical
11490.00	42.77	40.25	13.82	40.75	56.09	68.20	-12.11	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	28.65	40.25	13.82	40.75	41.97	54.00	-12.03	Vertical
11490.00	28.11	40.25	13.82	40.75	41.43	54.00	-12.57	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	42.69	40.17	13.78	40.91	55.73	68.20	-12.47	Vertical
11570.00	41.74	40.17	13.78	40.91	54.78	68.20	-13.42	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	28.12	40.17	13.78	40.91	41.16	54.00	-12.84	Vertical
11570.00	28.92	40.17	13.78	40.91	41.96	54.00	-12.04	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	42.69	39.89	13.74	41.06	55.26	68.20	-12.95	Vertical
11650.00	41.25	39.89	13.74	41.06	53.82	68.20	-14.38	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	29.42	39.89	13.74	41.06	41.99	54.00	-12.01	Vertical
11650.00	28.65	39.89	13.74	41.06	41.22	54.00	-12.78	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	41.25	40.26	13.83	40.77	54.57	68.20	-13.63	Vertical
11510.00	42.36	40.26	13.83	40.77	55.68	68.20	-12.52	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	28.65	40.26	13.83	40.77	41.97	54.00	-12.03	Vertical
11510.00	29.44	40.26	13.83	40.77	42.76	54.00	-11.24	Horizontal

802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	42.36	40.08	13.77	40.95	55.26	68.20	-12.94	Vertical
11590.00	41.25	40.08	13.77	40.95	54.15	68.20	-14.05	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	29.53	40.08	13.77	40.95	42.43	54.00	-11.57	Vertical
11590.00	28.52	40.08	13.77	40.95	41.42	54.00	-12.58	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.9 Frequency stability

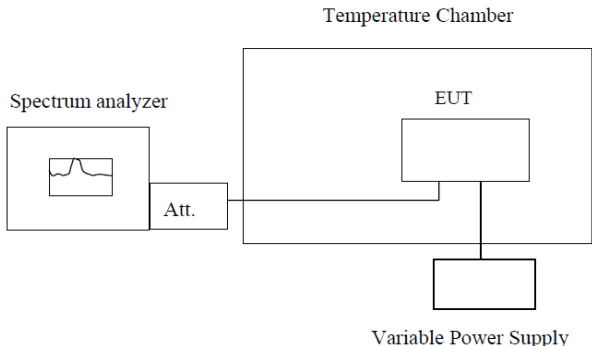Test Requirement:	FCC Part15 E Section 15.407 (g)
Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Passed

Measurement Data (the worst channel):

Band 1:

Voltage vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(AC /60Hz)		
20	138	5179.988500	2.22
	120	5179.986800	2.55
	102	5179.987800	2.36

Temperature vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(AC /60Hz)	Temp(°C)		
120	-20	5179.986300	2.64
	-10	5179.979800	2.90
	0	5179.986200	2.66
	10	5179.987400	2.43
	20	5179.979900	2.88
	30	5179.985800	2.74
	40	5179.989800	1.97
	50	5179.986600	2.59

Band 4:

Voltage vs. Frequency Stability (Lowest channel=5745MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(AC /60Hz)		
20	138	5744.987800	2.12
	120	5744.986700	2.32
	102	5744.988100	2.07

Temperature vs. Frequency Stability (Lowest channel=5748MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(AC /60Hz)	Temp(°C)		
120	-20	5744.984500	2.70
	-10	5744.984700	2.66
	0	5744.987400	2.19
	10	5744.986600	2.33
	20	5744.983600	2.85
	30	5744.986700	2.32
	40	5744.987000	2.26
	50	5744.987800	2.12