

SUBMITTAL APPLICATION REPORT

FOR GRANT OF CERTIFICATION

FOR

Model: WBD5M
5745-5875 MHz
Broadband Digital Transmission System

FOR

LIGOWAVE LLC.
1440 Dutch Valley Place, Suite 1155
Atlanta, GA 30324


Test Report Number: 090805

Authorized Signatory: *Scot D Rogers*
Scot D. Rogers

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Ligowave LLC.
Model: WBD5M
Test #: 090805
Test to: FCC (15.247)
File: Ligowave WBD5M 090805 TstRpt

FCC ID#: V2V-WBD5M
IC: 7607A-WBD5M
SN: ST090500037
Page 1 of 44
Date: September 1, 2009

**ROGERS LABS, INC.**

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report for Application of Grant of Certification

FOR
CFR47, PART 15C - Intentional Radiators Paragraph 15.247 and
Industry Canada RSS-210
License Exempt Intentional Radiator

For

LIGOWAVE LLC.

1440 Dutch Valley Place, Suite 1155
Atlanta, GA 30324

Broadband Digital Transmission System
Model: WBD5M

Frequency Range 5745-5875 MHz
FCC ID#: V2V-WBD5M

Test Date: August 5, 2009

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product endorsement by NVLAP, NIST, or
any agency of the U.S. Government.

Table Of Contents

| | |
|---|-----------|
| TABLE OF CONTENTS..... | 3 |
| FORWARD | 5 |
| OPINION / INTERPRETATION OF RESULTS | 5 |
| ENVIRONMENTAL CONDITIONS..... | 5 |
| EQUIPMENT TESTED..... | 5 |
| 2.1033(B) APPLICATION FOR CERTIFICATION..... | 6 |
| APPLICABLE STANDARDS & TEST PROCEDURES | 7 |
| EQUIPMENT FUNCTION AND TESTING PROCEDURES | 7 |
| EQUIPMENT AND CABLE CONFIGURATIONS | 8 |
| AC Line Conducted Emission Test Procedure..... | 8 |
| Radiated Emission Test Procedure..... | 8 |
| UNITS OF MEASUREMENTS | 8 |
| TEST SITE LOCATIONS | 9 |
| LIST OF TEST EQUIPMENT | 9 |
| SUBPART C - INTENTIONAL RADIATORS..... | 10 |
| Antenna Requirements | 10 |
| Restricted Bands of Operation..... | 10 |
| Radiated Emissions in Restricted Bands Data (worst-case)..... | 11 |
| Summary of Results for Radiated Emissions in Restricted Bands | 11 |
| Statement of Modifications and Deviations for Restricted Bands..... | 11 |
| AC line Conducted Emissions Procedure | 12 |
| Figure One AC Line Conducted Emissions Line 1 | 13 |
| Figure Two AC Line Conducted Emissions Line 2 | 13 |
| AC Line Conducted Emissions Data | 14 |
| Summary of Results for AC Line Conducted Emissions | 14 |
| Statement of Modifications and Deviations AC Line Conducted Emissions | 14 |
| General Radiated Emissions Procedure..... | 15 |
| Figure Three General Radiated Emissions taken at 1 meter in screen room | 16 |
| Figure Four General Radiated Emissions taken at 1 meter in screen room..... | 16 |
| Figure Five General Radiated Emissions taken at 1 meter in screen room | 17 |
| Figure Six General Radiated Emissions taken at 1 meter in screen room | 17 |
| Figure Seven General Radiated Emissions taken at 1 meter in screen room..... | 18 |

| | |
|--|-----------|
| Figure Eight General Radiated Emissions taken at 1 meter in screen room..... | 18 |
| Figure Nine General Radiated Emissions taken at 1 meter in screen room..... | 19 |
| General Radiated Emissions Data (Highest Emissions) | 20 |
| Summary of Results for General Radiated Emissions | 20 |
| Statement of Modifications and Deviations for General Radiated Emissions | 20 |
| Operation in the Band 5725-5850 MHz | 21 |
| Figure Ten Plot of Antenna Port Conducted Emissions | 21 |
| Figure Eleven Plot of Antenna Port Conducted Emissions | 22 |
| Figure Twelve Plot of Antenna Port Conducted Emissions | 22 |
| Figure Thirteen Plot of Antenna Port Conducted Emissions..... | 23 |
| Figure Fourteen Plot of Antenna Port Conducted Emissions..... | 23 |
| Figure Fifteen Plot of Antenna Port Conducted Emissions..... | 24 |
| Figure Sixteen Plot of Power Output Across Operational Band | 24 |
| Figure Seventeen Plot of 6 dB Band width | 25 |
| Figure Eighteen Plot of 6 dB Band width..... | 25 |
| Figure Nineteen Plot of 6 dB Band width | 26 |
| Figure Twenty Plot of Power Spectral Density | 26 |
| Figure Twenty-one Plot of Power Spectral Density | 27 |
| Figure Twenty-two Plot of Power Spectral Density..... | 27 |
| Figure Twenty-three Plot of Power Spectral Density..... | 28 |
| Transmitter Antenna Conducted Emissions Data | 29 |
| 23 dBi Panel Antenna Radiated Emissions Data..... | 30 |
| 32.5 dBi Dish Antenna Radiated Emissions Data | 31 |
| Summary of Results for Radiated Emissions of Intentional Radiator | 32 |
| Statement of Modifications and Deviations | 32 |
| RECEIVER ANTENNA POWER CONDUCTION REQUIREMENTS | 33 |
| Figure Twenty-four Receiver Antenna Port Conducted Emissions..... | 34 |
| Figure Twenty-five Receiver Antenna Port Conducted Emissions | 34 |
| Figure Twenty-six Receiver Antenna Port Conducted Emissions..... | 35 |
| Figure Twenty-seven Receiver Antenna Port Conducted Emissions | 35 |
| Figure Twenty-eight Receiver Antenna Port Conducted Emissions | 36 |
| Figure Twenty-nine Receiver Antenna Port Conducted Emissions | 36 |
| Figure Thirty Receiver Antenna Port Conducted Emissions..... | 37 |
| Receiver Antenna Conducted Emissions Data | 37 |
| Summary of Results for Receiver Antenna Conducted Emissions | 37 |
| ANNEX..... | 38 |
| Annex A Measurement Uncertainty Calculations..... | 39 |
| Annex B Rogers Labs Test Equipment List..... | 41 |
| Annex C Rogers Qualifications..... | 42 |
| Annex D FCC Site Registration Letter | 43 |
| Annex E Industry Canada Site Registration Letter..... | 44 |



NVLAP Lab Code 200087-0

Forward

The following information is submitted for consideration in obtaining Grant of Certification for a License Exempt Intentional Radiator operating under CFR47 Paragraph 15.247 and RSS-210.

Name of Applicant:

LIGOWAVE LLC. FRN: 0014 43 1100
1440 Dutch Valley Place, Suite 1155
Atlanta, GA 30324

Model: WBD5M

FCC I.D.: V2V-WBD5M IC: 7607A-WBD5M

Frequency Range: 5745-5875 MHz

Operating Power: 0.3724 Watt total antenna port conducted power, Occupied Bandwidth 17.51 MHz

Opinion / Interpretation of Results

| Tests Performed | Results |
|--|----------|
| Emissions Tests | |
| Emissions as per CFR47 paragraphs 2 and 15.205 and RSS-210 | Complies |
| Emissions as per CFR47 paragraphs 2 and 15.207 and RSS-210 | Complies |
| Emissions as per CFR47 paragraphs 2 and 15.209 and RSS-210 | Complies |
| Emissions as per CFR47 paragraphs 2 and 15.247 and RSS-210 | Complies |

Environmental Conditions

Ambient Temperature 25.9° C

Relative Humidity 44%

Atmospheric Pressure 1016.4 mb

Equipment Tested

| Equipment | Model | FCC I.D.# |
|-----------|-------|-----------|
| EUT | WBD5M | V2V-WBD5M |
| CPU | PP15L | N/A |

Antennas

23 dBi Dual Polarity Panel [model: MTI MT 4850 25],
32.5 dBi Dish [model: HDDA5W-32-DP]

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Ligowave LLC.
Model: WBD5M
Test #: 090805
Test to: FCC (15.247)
File: Ligowave WBD5M 090805 TstRpt

FCC ID#: V2V-WBD5M
IC: 7607A-WBD5M
SN: ST090500037
Page 5 of 44
Date: September 1, 2009

2.1033(b) Application for Certification

(1) Manufacturer: LIGOWAVE LLC.
1440 Dutch Valley Place, Suite 1155
Atlanta, GA 30324

(2) Identification: Model: WBD5M
FCC I.D.: V2V-WBD5M IC:7607A-WBD5M

(3) Instruction Book:
Refer to Exhibit for Instruction Manual.

(4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.

(5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.

(6) Report of Measurements:
Report of measurements follows in this Report.

(7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.

(8) List of Peripheral Equipment Necessary for operation. The equipment operates from power received from the authorized AC power adapter (power over Ethernet POE) and was interfaced with a laptop computer during testing. Two antenna configurations were tested and requested approval.

(9) Transition Provisions of 15.37 are not being requested.

(10) Not Applicable. The unit is not a scanning receiver.

(11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.

(12) The equipment is not software defined and this section is not applicable.

Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2008, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247 and RSS-210 Issue 7 the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 Document FCC, documents DA00-1407 and DA00-705 and/or TIA/EIA 603-1. Testing for the AC line-conducted emissions were performed as defined in sections 7 and 13.1.3, testing of the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4. Testing of the intentional radiated emissions was performed as defined in section 13 of ANSI C63.4.

Equipment Function and Testing Procedures

The EUT is a 5745-5875 MHz transmitter used to transmit data in applications offering broadband wireless connectivity. The design utilizes the 2x2 Multiple Input Multiple Output (MIMO) spatial multiplexing design. The equipment is marketed for use to incorporate a wireless link to exchange data information from one point to another. For testing purposes the WBD5M transceiver was connected to the AC power supply and communicating to the laptop computer allowing for operational control of the transmitter and communications over the network interface between the EUT and supporting computer system. The WBD5M receives power from the supplied AC power adapter connected to the utility power system. No other interfacing options are provided on the design. For testing purposes the WBD5M and support equipment were powered from the AC power adapter supply and set to transmit in all maximum data modes available. The device is marketed for professionally installed use with approved antenna structure as documented in this report and complies with the unique antenna connection requirements.

Equipment and Cable Configurations

AC Line Conducted Emission Test Procedure

The EUT operates from DC power only and must be connected to an approved AC adapter for operation. For testing purposes, the manufacturer supplied AC power adapter was used to power the system. Testing for the AC line-conducted emissions testing was performed as defined in sections 7 and 13.1.3 of ANSI C63.4. The test setup including the EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50 μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Testing for the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the test setup exhibits for EUT placement during testing.

Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Test Site Locations

| | |
|---------------|--|
| Conducted EMI | The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259 th Terrace, Louisburg, KS |
| Radiated EMI | The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259 th Terrace, Louisburg, KS |
| Site Approval | Refer to Annex for Site Registration Letter |
| NVLAP | Lab code 200087-0 |

List of Test Equipment

A Rohde & Schwarz ESU40 and/or Hewlett Packard 8591EM Spectrum Analyzer was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde & Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

| Analyzer Settings | | |
|--------------------------------|----------|-------------------|
| AC Line Conducted Emissions | | |
| RBW | AVG. BW | Detector Function |
| 9 kHz | 30 kHz | Peak / Quasi Peak |
| Radiated Emissions Below 1 GHz | | |
| RBW | AVG. BW | Detector Function |
| 120 kHz | 300 kHz | Peak / Quasi Peak |
| Analyzer Settings Above 1 GHz | | |
| RBW | Video BW | Detector Function |
| 100 kHz | 100 kHz | Peak |
| 1 MHz | 1 MHz | Peak / Average |



NVLAP Lab Code 200087-0

| <u>Equipment</u> | <u>Manufacturer</u> | <u>Model</u> | <u>Calibration Date</u> | <u>Due</u> |
|------------------|---------------------|-------------------|-------------------------|------------|
| LISN | Comp. Design | FCC-LISN-2-MOD.CD | 10/08 | 10/09 |
| LISN | Comp. Design | 1762 | 2/09 | 2/10 |
| Antenna | ARA | BCD-235-B | 10/08 | 10/09 |
| Antenna | EMCO | 3147 | 10/08 | 10/09 |
| Antenna | EMCO | 3143 | 5/09 | 5/10 |
| Analyzer | Rohde & Schwarz | ESU40 | 2/09 | 2/10 |
| Analyzer | HP | 8591EM | 5/09 | 5/10 |
| Analyzer | HP | 8562A | 5/09 | 5/10 |

Subpart C - Intentional Radiators

As per CFR47, Subpart C, paragraph 15.247 the following information is submitted.

Antenna Requirements

The product is marketed for professional installation and use with approved antennas as described in accompanying documentation. The antenna connection point complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled and there are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at a distance of three meters at the OATS. The EUT utilizes frequency determining circuitry, which generates harmonics falling in the restricted bands. Emissions were measured at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

Sample Calculations:

$$\begin{aligned} \text{RFS (dB}\mu\text{V/m @ 3m)} &= \text{FSM(dB}\mu\text{V)} + \text{A.F.(dB)} - \text{Gain(dB)} \\ &= 36.7 + 7.8 - 30 \\ &= 14.5 \end{aligned}$$

Radiated Emissions in Restricted Bands Data (worst-case)

| Frequency in MHz | FSM Horz. (dB μ V) | FSM Vert. (dB μ V) | A.F. (dB/m) | Amp. Gain (dB) | RFS Horz. @ 3m (dB μ V/m) | RFS Vert. @ 3m (dB μ V/m) | FCC Class B Limit @ 3m (dB μ V/m) |
|------------------|------------------------|------------------------|-------------|----------------|-------------------------------|-------------------------------|---------------------------------------|
| 124.6 | 36.7 | 38.2 | 7.8 | 30 | 14.5 | 16.0 | 43.5 |
| 134.0 | 35.1 | 39.5 | 8.4 | 30 | 13.5 | 17.9 | 43.5 |
| 134.8 | 35.6 | 40.8 | 8.4 | 30 | 14.0 | 19.2 | 43.5 |
| 136.0 | 35.5 | 41.0 | 8.4 | 30 | 13.9 | 19.4 | 43.5 |
| 250.0 | 49.5 | 52.4 | 12.2 | 30 | 31.7 | 34.6 | 43.5 |
| 264.4 | 45.8 | 47.1 | 12.9 | 30 | 28.7 | 30.0 | 43.5 |
| 267.5 | 39.7 | 39.7 | 12.8 | 30 | 22.5 | 22.5 | 43.5 |
| 272.0 | 41.8 | 41.4 | 12.8 | 30 | 24.6 | 24.2 | 43.5 |
| 11490.0 | 25.2 | 27.2 | 38.8 | 25 | 38.9 | 37.1 | 54.0 |
| 11570.0 | 26.3 | 27.3 | 39.9 | 25 | 39.0 | 38.4 | 54.0 |
| 11650.0 | 25.5 | 25.7 | 39.9 | 25 | 37.4 | 37.9 | 54.0 |

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements for FCC Part 15C and RSS-210 Intentional Radiators. The EUT demonstrated a minimum margin of 8.9 dB below the requirements. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

Statement of Modifications and Deviations for Restricted Bands

No modifications to the EUT were required for the unit to demonstrate compliance with the FCC Part 15C paragraph 15.205 or RSS-210 emissions requirements. There were no deviations or exceptions to the specifications.

AC line Conducted Emissions Procedure

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied AC power adapter for the EUT was connected to the LISN. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the AC Line conducted emissions.

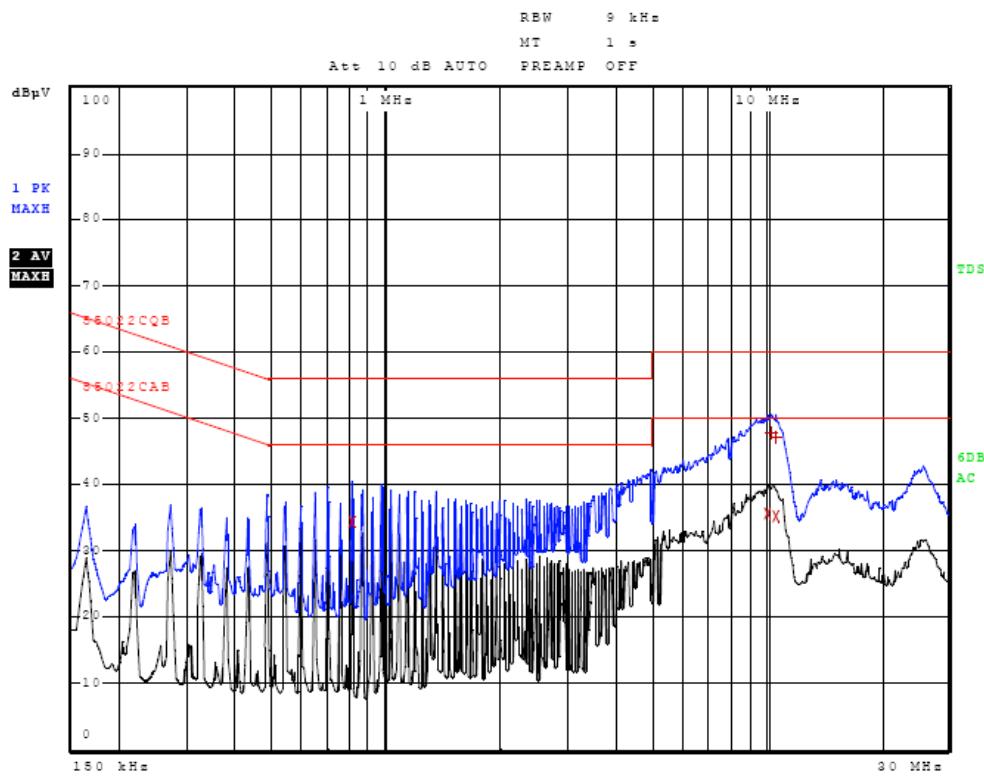


Figure One AC Line Conducted Emissions Line 1

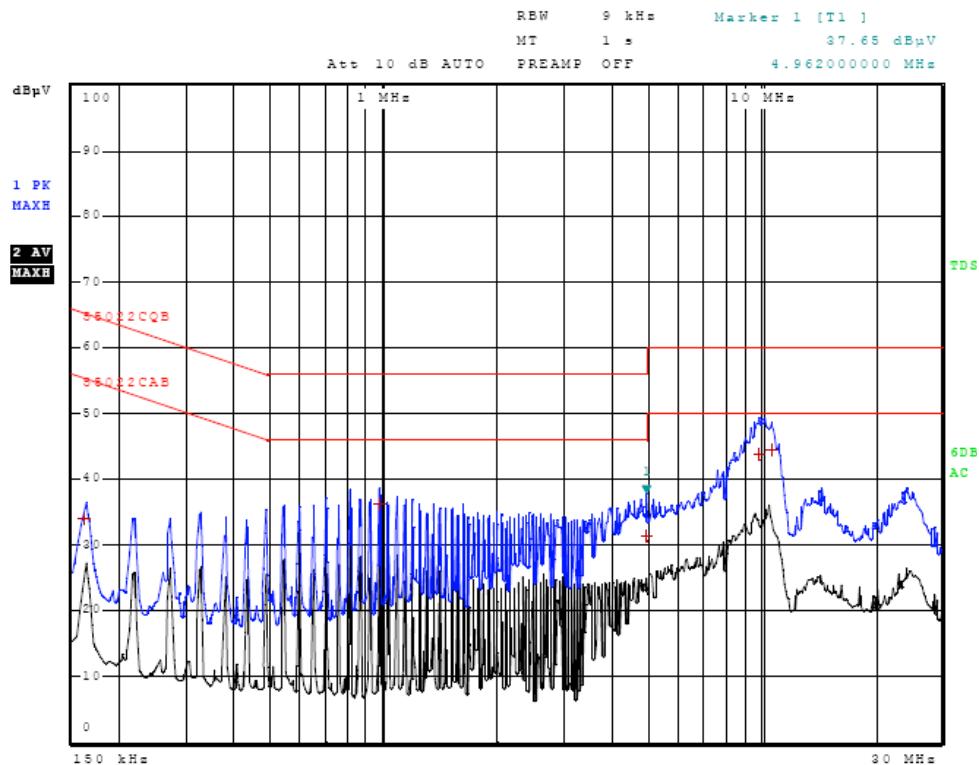


Figure Two AC Line Conducted Emissions Line 2

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Ligowave LLC.
Model: WBD5M
Test #: 090805
Test to: FCC (15.247)
File: Ligowave WBD5M 090805 TstRpt

FCC ID#: V2V-WBD5M
IC: 7607A-WBD5M
SN: ST090500037
Page 13 of 44
Date: September 1, 2009

AC Line Conducted Emissions Data

Line 1

| Trace | Frequency | Level (dB μ V) | Detector | Delta Limit/dB |
|-------|-------------------|--------------------|------------|----------------|
| 2 | 810.000000000 kHz | 34.45 | Average | -11.55 |
| 2 | 9.992000000 MHz | 35.67 | Average | -14.33 |
| 1 | 10.256000000 MHz | 47.70 | Quasi Peak | -12.30 |
| 1 | 10.524000000 MHz | 47.27 | Quasi Peak | -12.73 |
| 2 | 10.584000000 MHz | 35.29 | Average | -14.71 |

Line 2

| Trace | Frequency | Level (dB μ V) | Detector | Delta Limit/dB |
|-------|-------------------|--------------------|------------|----------------|
| 1 | 162.000000000 kHz | 34.01 | Quasi Peak | -31.35 |
| 1 | 970.000000000 kHz | 36.16 | Quasi Peak | -19.84 |
| 1 | 4.962000000 MHz | 31.36 | Quasi Peak | -24.64 |
| 1 | 9.824000000 MHz | 43.77 | Quasi Peak | -16.23 |
| 1 | 10.632000000 MHz | 44.43 | Quasi Peak | -15.57 |

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance with the conducted emissions requirements for RSS-210 and CFR47 Part 15C equipment. The EUT demonstrated minimum margin of 11.5 dB below the limit. Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.

Statement of Modifications and Deviations AC Line Conducted Emissions

No modifications to the EUT were required for the equipment to demonstrate compliance with the RSS-210 or CFR47 emissions requirements. There were no deviations or exceptions to the specifications.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the radiated frequency spectrum from 30 MHz to 24,000 MHz for the preliminary testing. Refer to figures three through nine for plots of the general radiated emissions spectrum taken in a screen room. The highest radiated emission was then re-maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 5 GHz and or, pyramidal horns and mixers from 4 GHz to 30 GHz, notch filters and appropriate amplifiers were utilized.

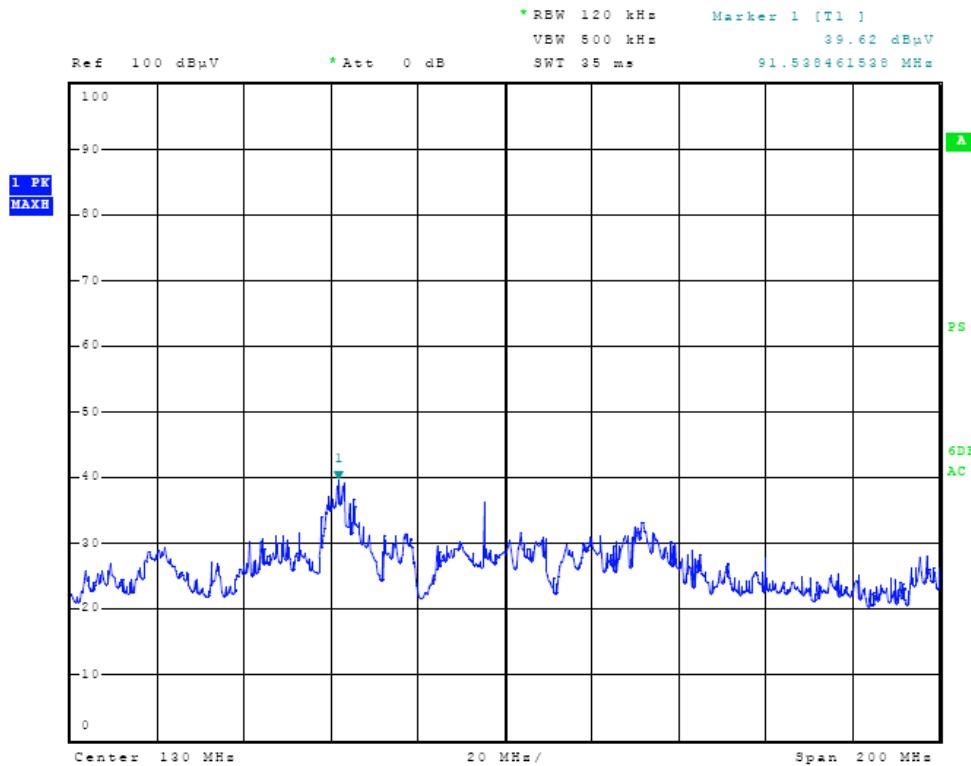


Figure Three General Radiated Emissions taken at 1 meter in screen room

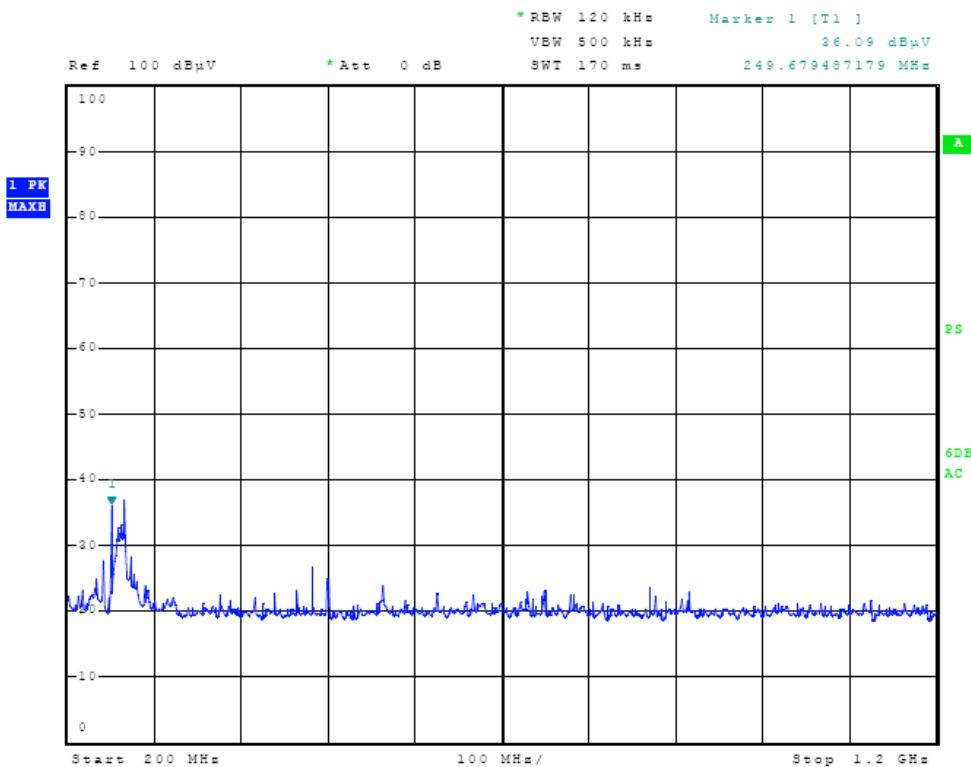


Figure Four General Radiated Emissions taken at 1 meter in screen room

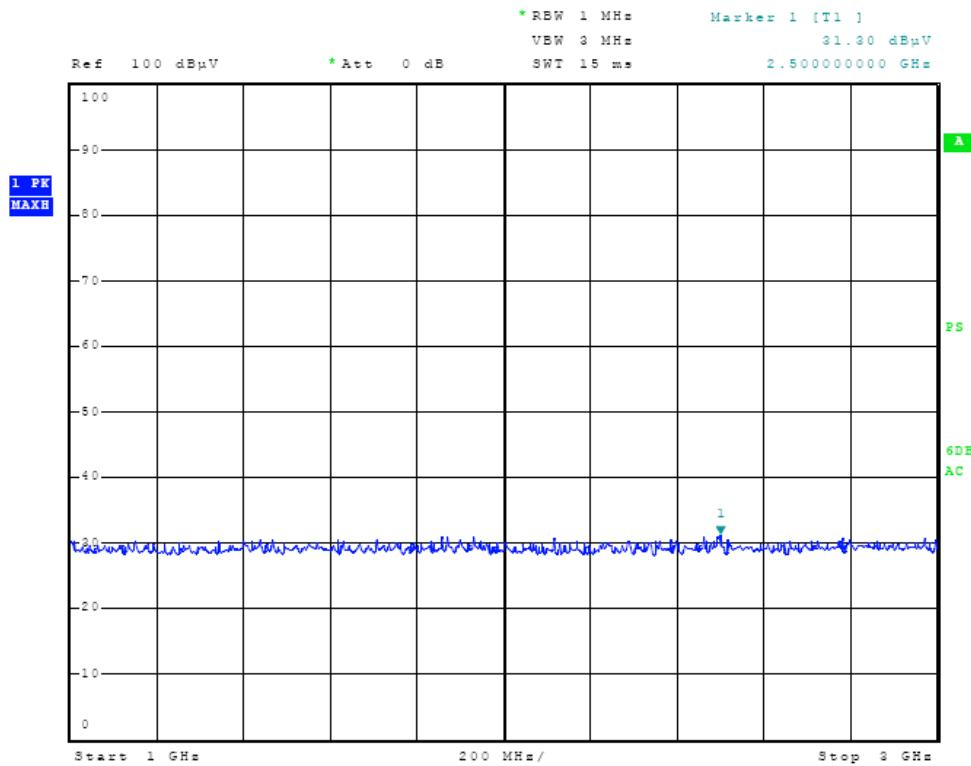


Figure Five General Radiated Emissions taken at 1 meter in screen room

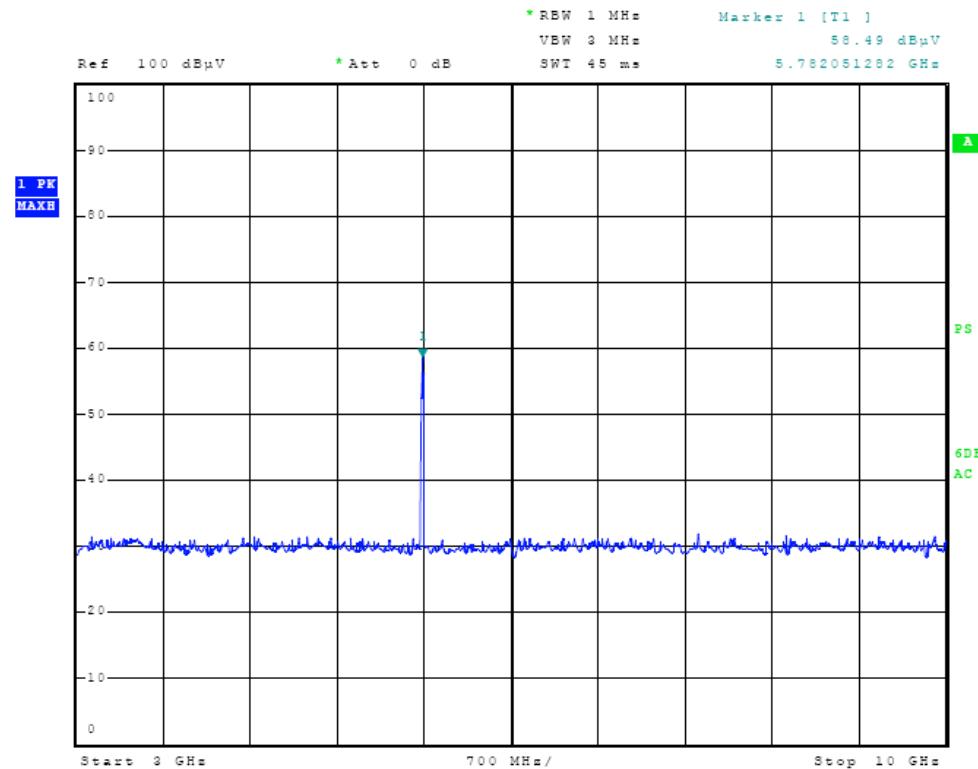


Figure Six General Radiated Emissions taken at 1 meter in screen room

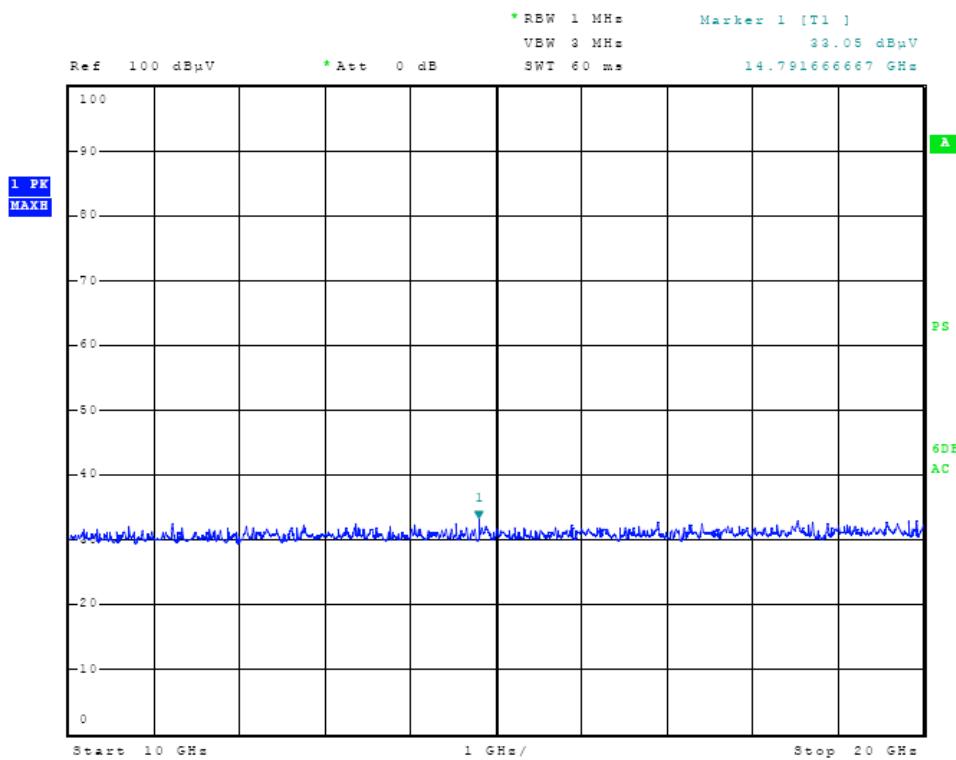


Figure Seven General Radiated Emissions taken at 1 meter in screen room

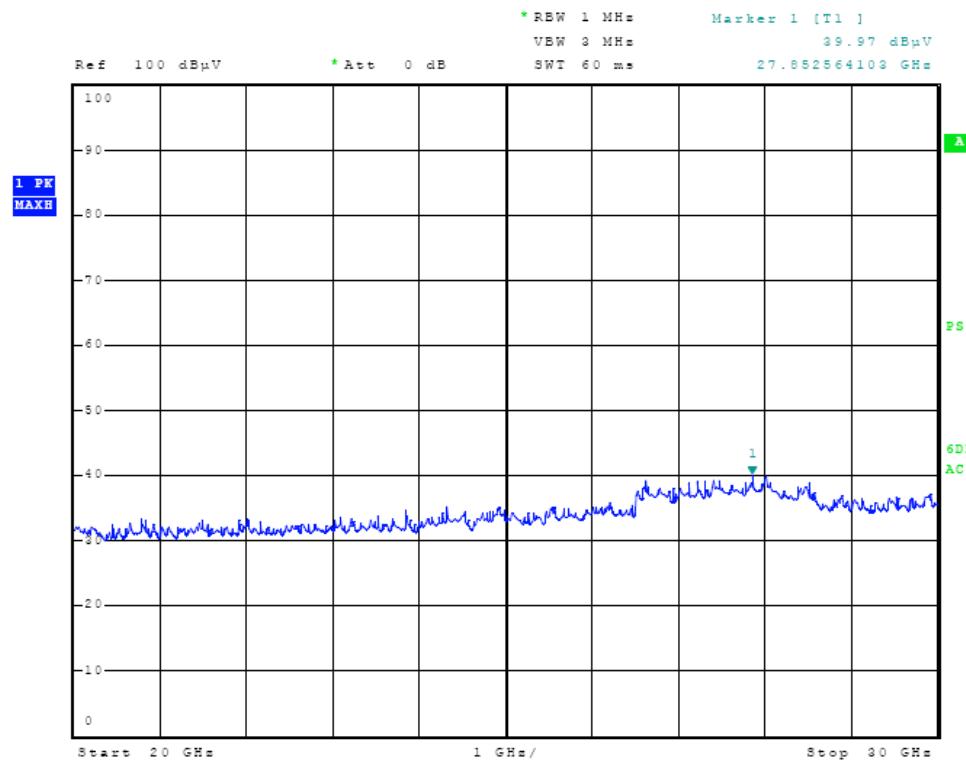


Figure Eight General Radiated Emissions taken at 1 meter in screen room

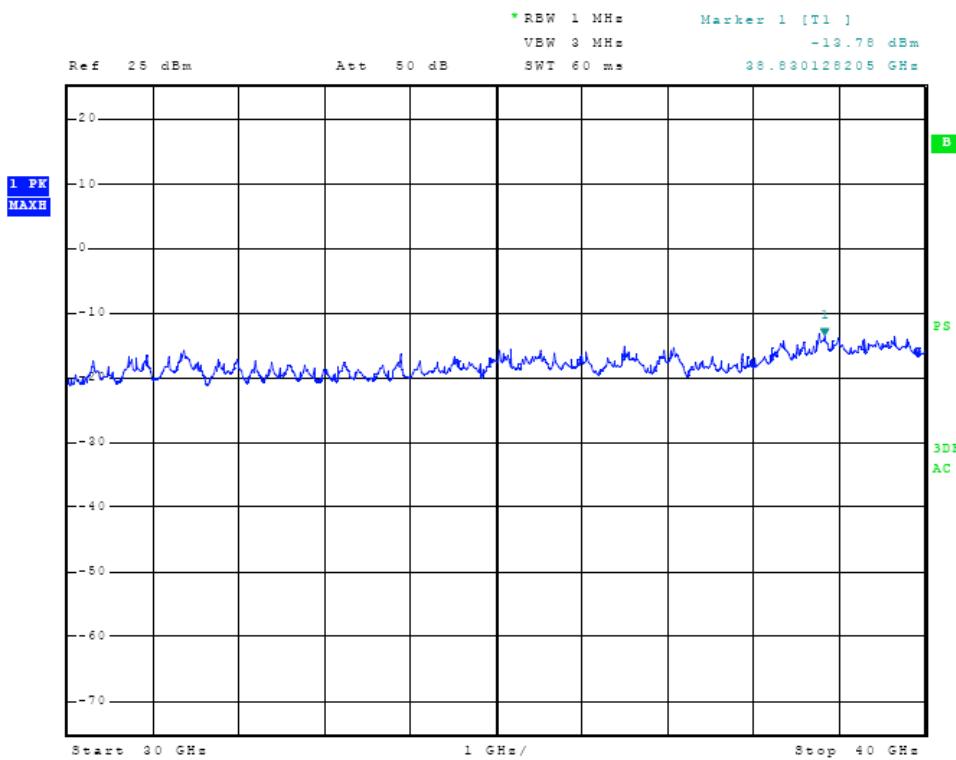


Figure Nine General Radiated Emissions taken at 1 meter in screen room

General Radiated Emissions Data (Highest Emissions)

| Frequency in MHz | FSM Horz. (dB μ V) | FSM Vert. (dB μ V) | A.F. (dB/m) | Amp. Gain (dB) | RFS Horz. @ 3m (dB μ V/m) | RFS Vert. @ 3m (dB μ V/m) | Limit @ 3m (dB μ V/m) |
|------------------|------------------------|------------------------|-------------|----------------|-------------------------------|-------------------------------|---------------------------|
| 89.4 | 28.1 | 46.8 | 7.4 | 30 | 5.5 | 24.2 | 43.5 |
| 93.4 | 54.3 | 54.0 | 7.3 | 30 | 31.6 | 31.3 | 43.5 |
| 149.7 | 38.5 | 40.3 | 10.2 | 30 | 18.7 | 20.5 | 43.5 |
| 153.4 | 39.5 | 42.2 | 9.3 | 30 | 18.8 | 21.5 | 43.5 |
| 160.5 | 37.7 | 40.6 | 8.8 | 30 | 16.5 | 19.4 | 43.5 |
| 160.6 | 35.9 | 39.3 | 8.8 | 30 | 14.7 | 18.1 | 43.5 |
| 162.0 | 37.2 | 39.8 | 8.7 | 30 | 15.9 | 18.5 | 43.5 |
| 250.0 | 49.5 | 52.4 | 12.2 | 30 | 31.7 | 34.6 | 46.0 |
| 264.4 | 45.8 | 47.1 | 12.9 | 30 | 28.7 | 30.0 | 46.0 |
| 267.5 | 39.7 | 39.7 | 12.8 | 30 | 22.5 | 22.5 | 46.0 |
| 272.0 | 41.8 | 41.4 | 12.8 | 30 | 24.6 | 24.2 | 46.0 |

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 and RSS-210 Intentional Radiators. The EUT demonstrated a minimum margin of 11.4 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Statement of Modifications and Deviations for General Radiated Emissions

No modifications to the EUT were required for the equipment to demonstrate compliance with the RSS-210 or CFR47 emissions requirements. There were no deviations or exceptions to the specifications.

Operation in the Band 5725-5850 MHz

The power output was measured both at the antenna connection ports offered for testing and at the open area test site at a three-meter distance with the authorized antenna systems. Figures ten through fifteen demonstrate worst-case antenna conducted emissions and compliance with the requirements of 15.247(c) and RSS-210 for emission limitations. Figure sixteen demonstrates compliance with maximum output power requirements across the operational frequency band. Figures seventeen through nineteen demonstrate compliance with the minimum 6 db bandwidth requirements. Figures twenty through twenty-three demonstrate compliance to power spectral density requirements. Compliance to band edge requirements per RSS-210 and 15.247 are demonstrated in radiated emissions tables.

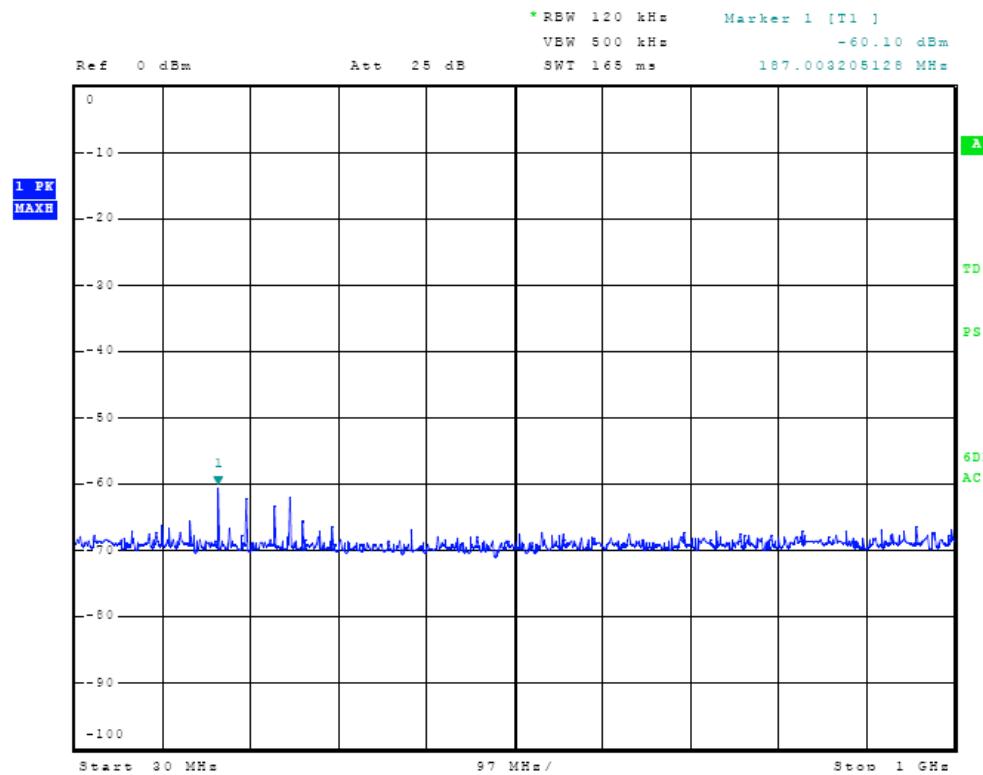


Figure Ten Plot of Antenna Port Conducted Emissions

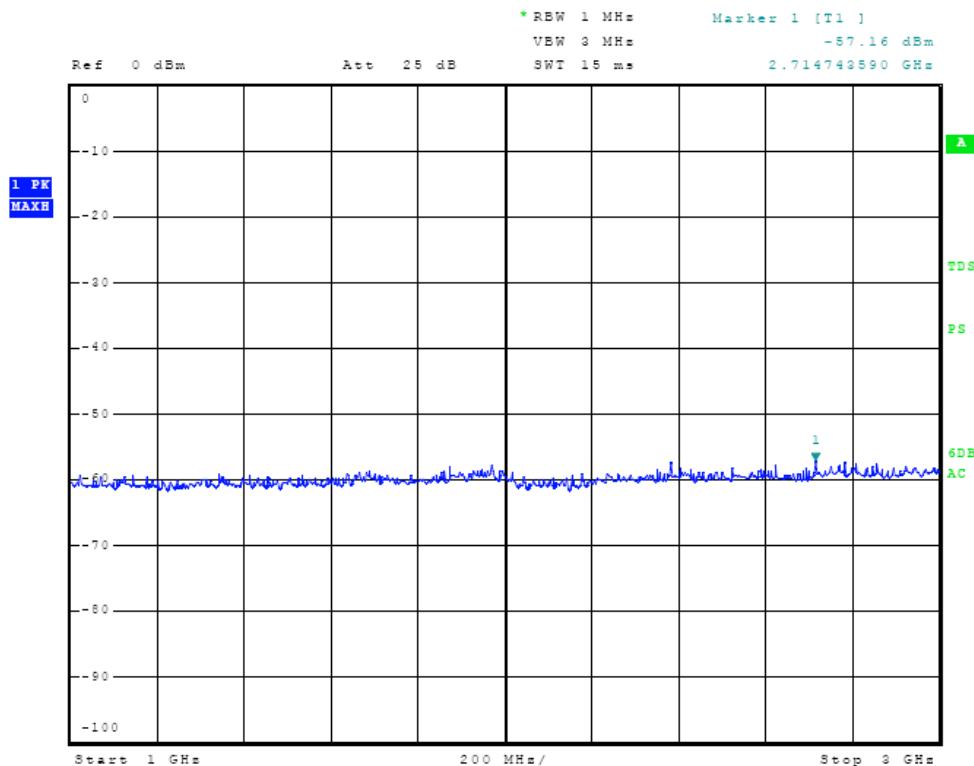


Figure Eleven Plot of Antenna Port Conducted Emissions

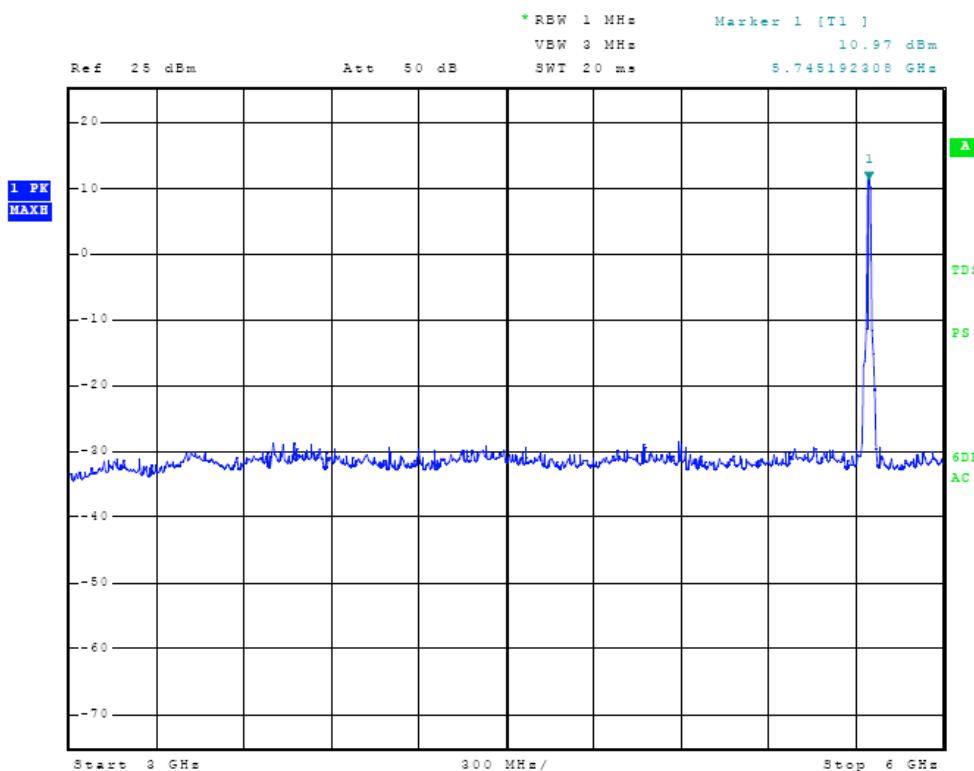


Figure Twelve Plot of Antenna Port Conducted Emissions

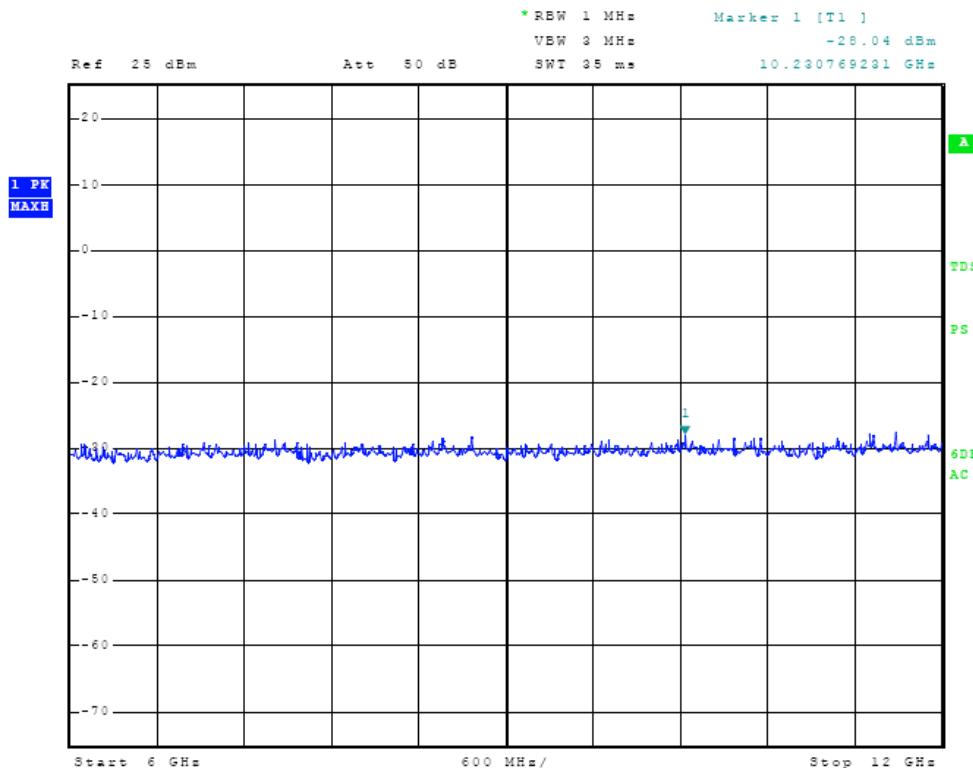


Figure Thirteen Plot of Antenna Port Conducted Emissions

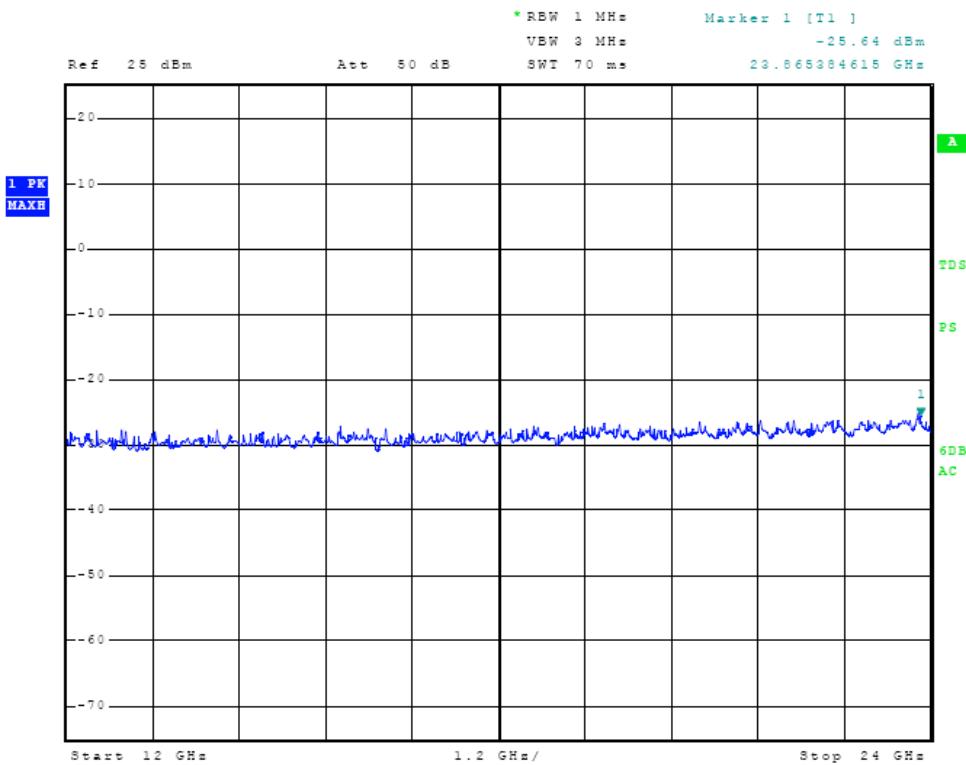
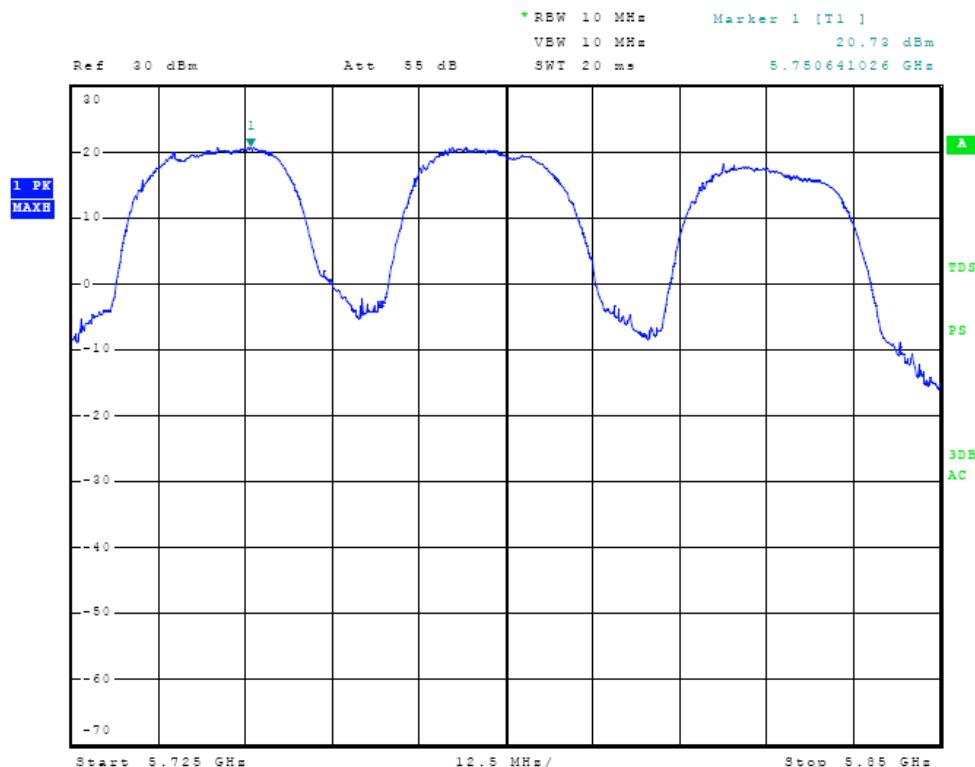
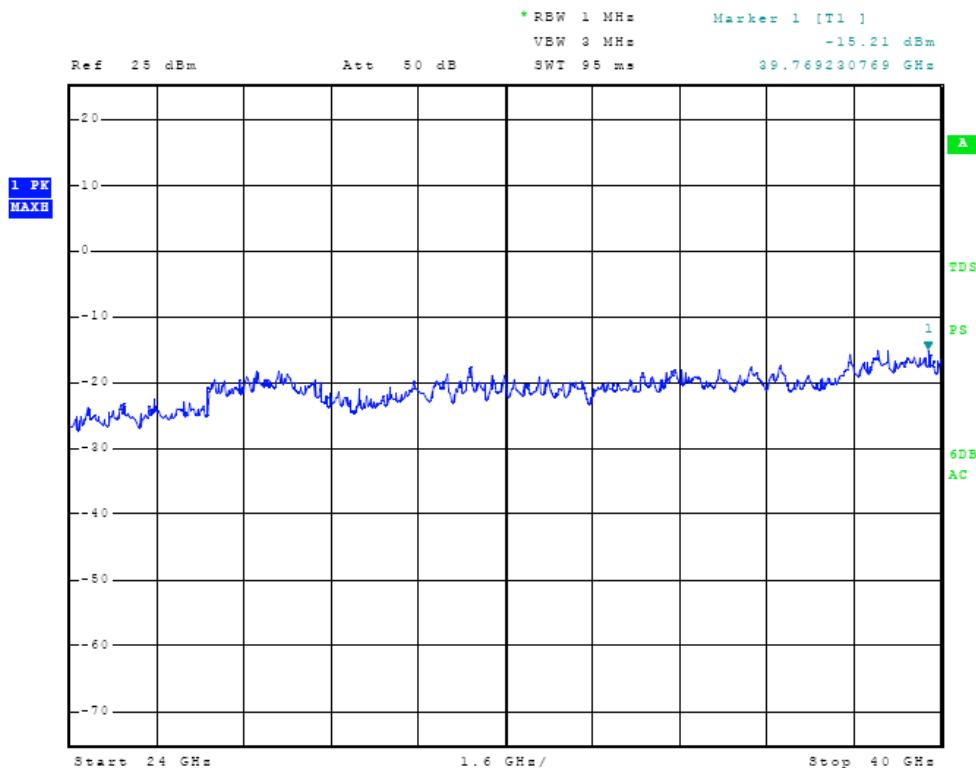


Figure Fourteen Plot of Antenna Port Conducted Emissions



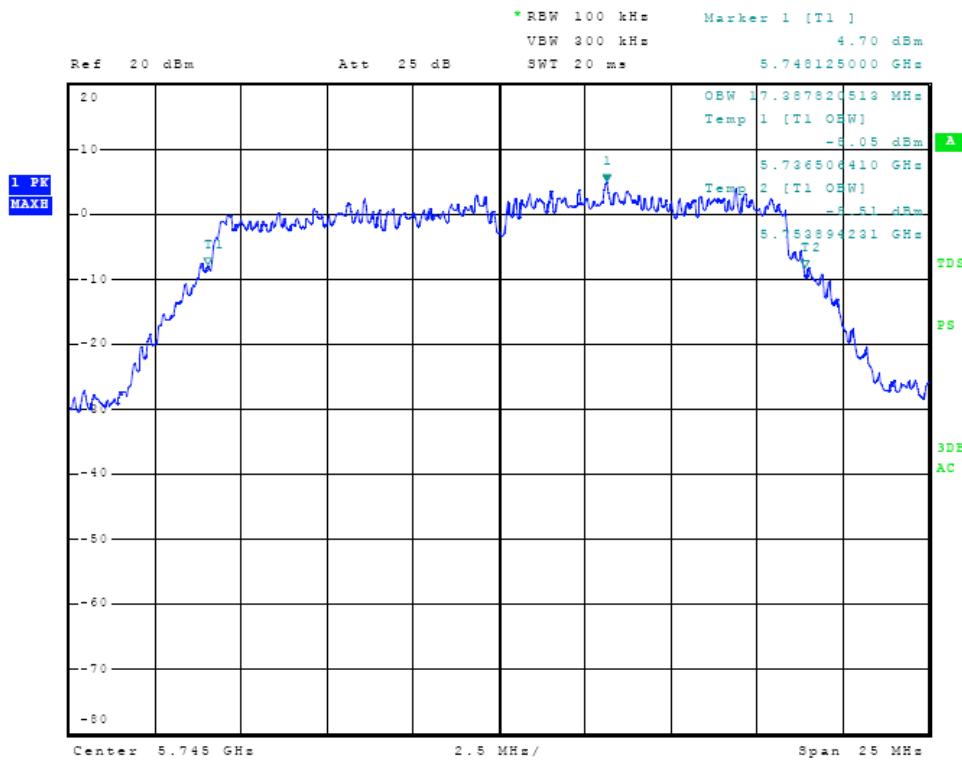


Figure Seventeen Plot of 6 dB Band width

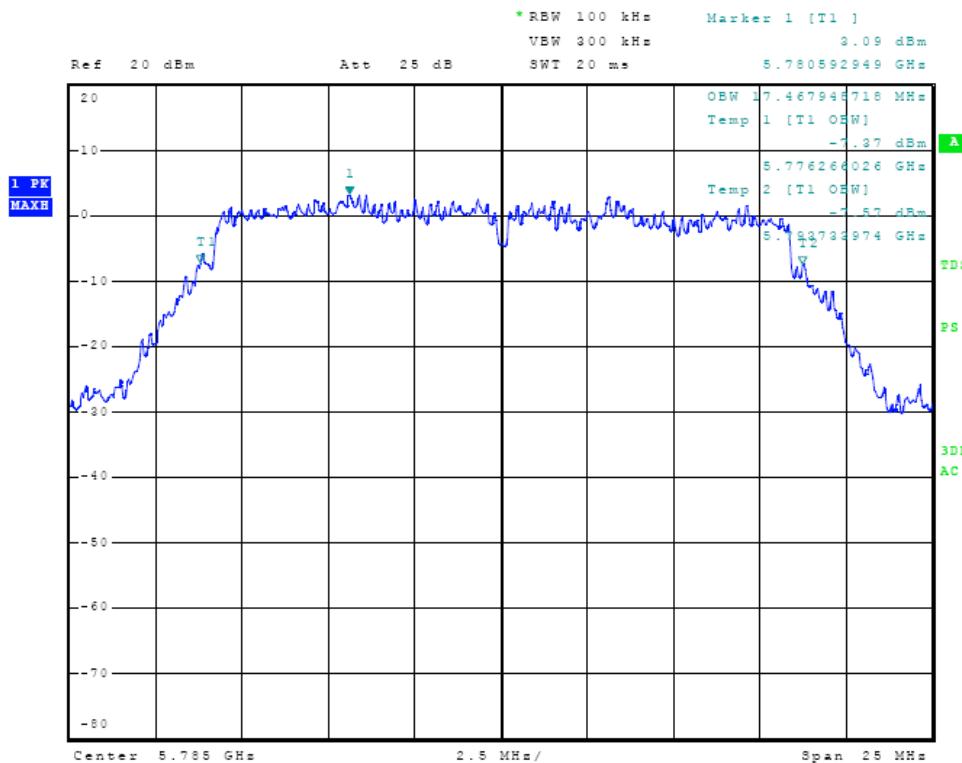


Figure Eighteen Plot of 6 dB Band width

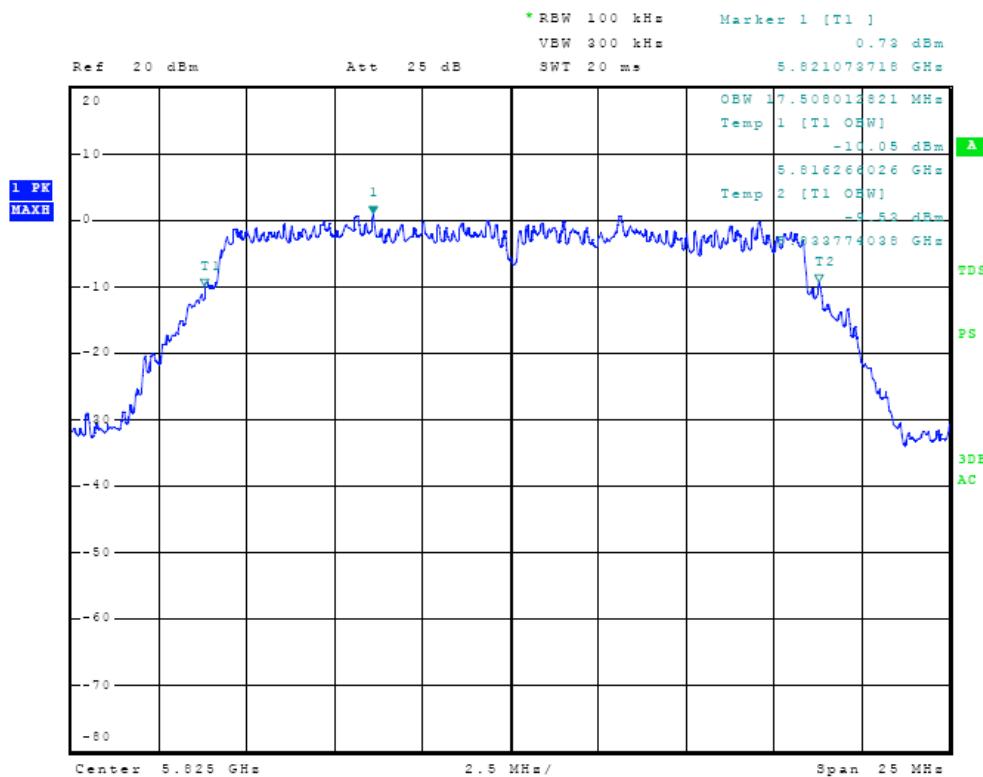
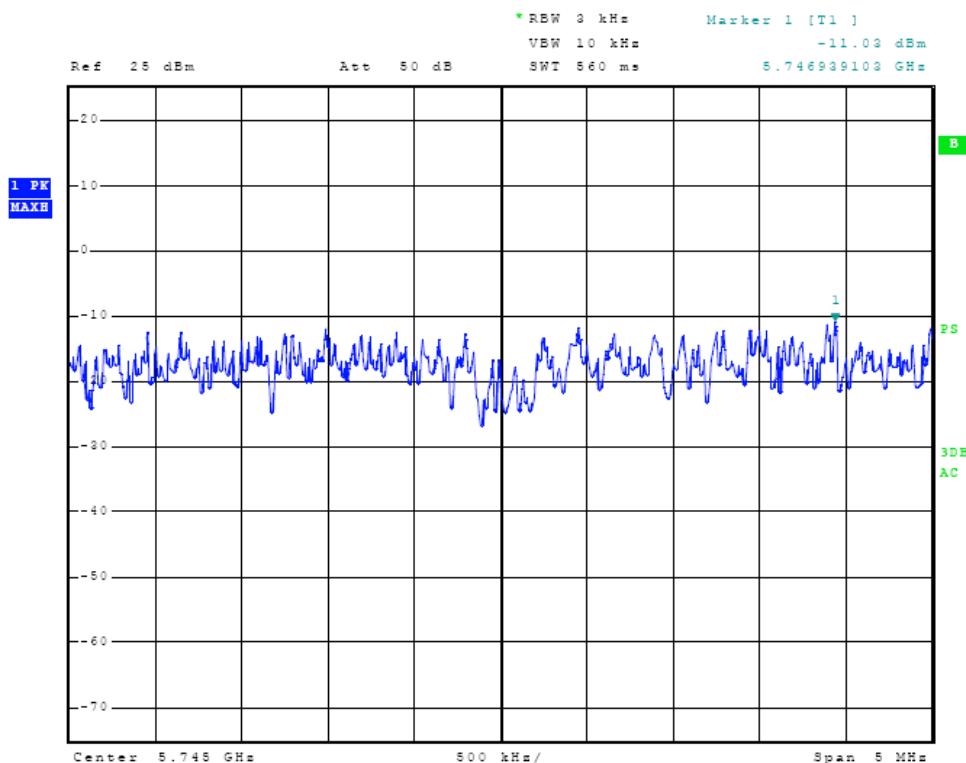


Figure Nineteen Plot of 6 dB Band width



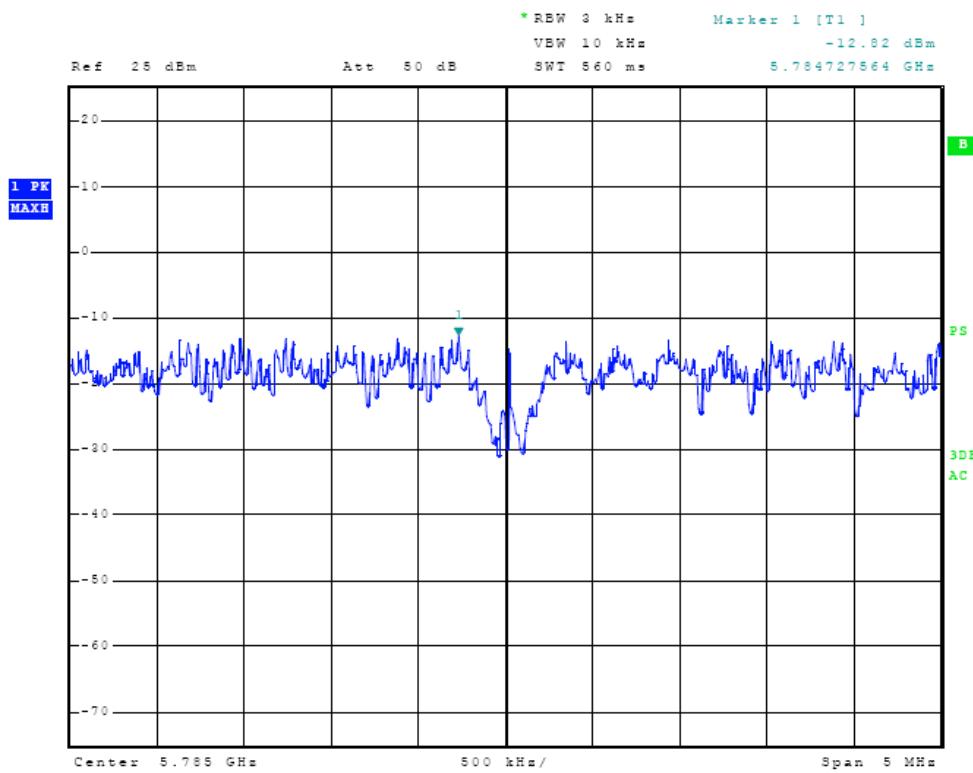


Figure Twenty-one Plot of Power Spectral Density

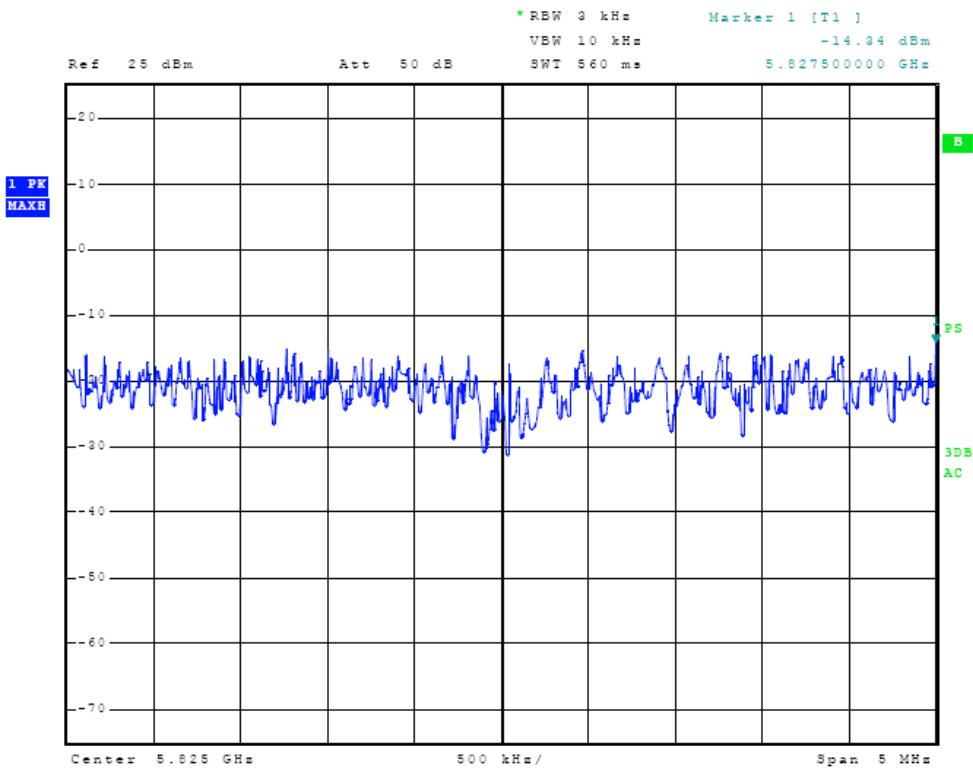


Figure Twenty-two Plot of Power Spectral Density

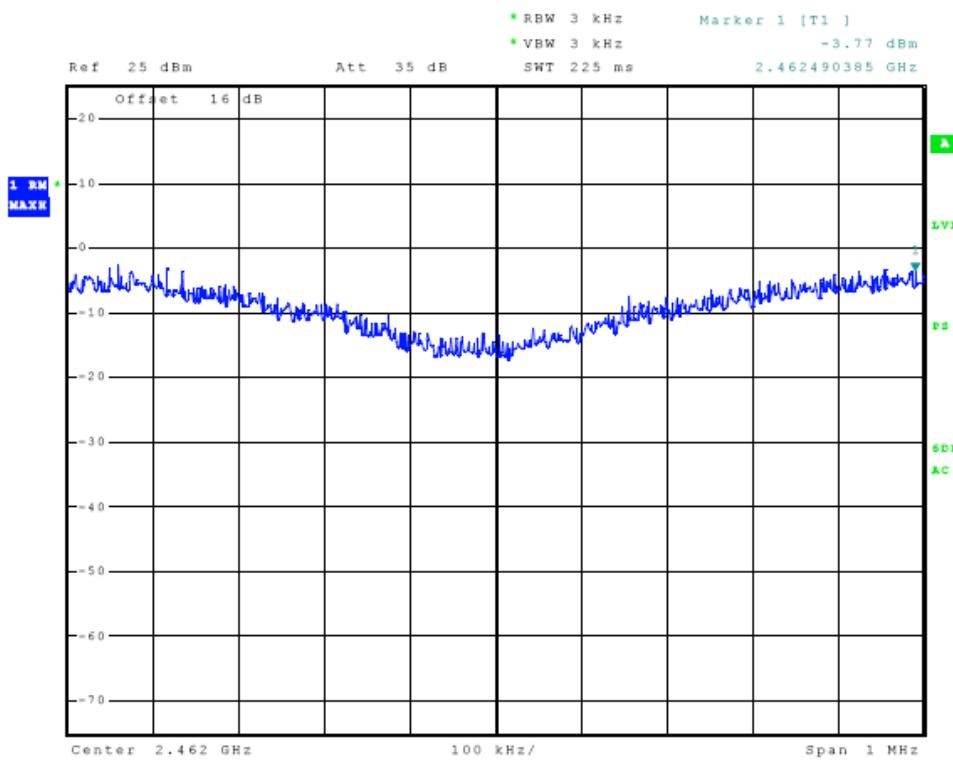


Figure Twenty-three Plot of Power Spectral Density

Transmitter Antenna Conducted Emissions Data

The antenna conducted output power, power spectral density, and 6-dB bandwidth were measured while operating in available modes. The data reported below represents the worst-case operational conditions.

| Frequency MHz | Antenna Conducted Output Power dBm | Occupied Bandwidth MHz | Power Spectral Density dBm |
|------------------|--|---------------------------|-------------------------------|
| Antenna Port 1 | | | |
| 5745 | 22.4 | 17.387 | -11.73 |
| 5785 | 21.4 | 17.508 | -12.82 |
| 5825 | 18.7 | 17.468 | -14.35 |
| Antenna Port 2 | | | |
| 5745 | 23.0 | 17.386 | -11.03 |
| 5785 | 21.6 | 17.498 | -12.69 |
| 5825 | 17.3 | 17.423 | -15.55 |

23 dBi Panel Antenna Radiated Emissions Data

| Frequency in MHz | FSM Horz. (dB μ V) | FSM Vert. (dB μ V) | A.F. (dB/m) | Amp. Gain (dB) | RFS Horz. @ 3m (dB μ V/m) | RFS Vert. @ 3m (dB μ V/m) | Limit @ 3m (dB μ V/m) |
|----------------------|------------------------|------------------------|-------------|----------------|-------------------------------|-------------------------------|---------------------------|
| 5745.0 | 108.6 | 108.5 | 33.1 | 0 | 141.7 | 141.6 | -- |
| 11490.0 | 25.2 | 27.2 | 38.8 | 25 | 39.0 | 41.0 | 54.0 |
| 17235.0 | 28.6 | 29.2 | 43.6 | 25 | 47.2 | 47.8 | 54.0 |
| 22980.0 | 30.0 | 30.1 | 21.1 | 25 | 26.1 | 26.2 | 54.0 |
| 28725.0 | 31.3 | 33.4 | 23.5 | 25 | 29.8 | 31.9 | 54.0 |
| 5785.0 | 108.2 | 107.8 | 33.1 | 0 | 141.3 | 140.9 | -- |
| 11570.0 | 26.3 | 27.3 | 39.9 | 25 | 41.2 | 42.2 | 54.0 |
| 17355.0 | 27.2 | 28.7 | 45.2 | 25 | 47.4 | 48.9 | 54.0 |
| 23140.0 | 29.5 | 29.9 | 21.1 | 25 | 25.6 | 26.0 | 54.0 |
| 28925.0 | 34.3 | 33.5 | 23.5 | 25 | 32.8 | 32.0 | 54.0 |
| 5825.0 | 108.2 | 108.0 | 33.1 | 0 | 141.3 | 141.1 | -- |
| 11650.0 | 25.5 | 25.7 | 39.9 | 25 | 40.4 | 40.6 | 54.0 |
| 17475.0 | 26.5 | 27.0 | 48.1 | 25 | 49.6 | 50.1 | 54.0 |
| 23300.0 | 28.3 | 28.5 | 21.1 | 25 | 24.4 | 24.6 | 54.0 |
| 29125.0 | 33.6 | 33.8 | 23.5 | 25 | 32.1 | 32.3 | 54.0 |
| Band Edge Compliance | | | | | | | |
| 5725.0 | 31.2 | 31.3 | 33.1 | 25 | 39.3 | 39.4 | 54.0 |
| 5850.0 | 33.7 | 36.5 | 33.1 | 25 | 41.8 | 44.6 | 54.0 |

Other emissions present had amplitudes at least 20 dB below the limit.

32.5 dBi Dish Antenna Radiated Emissions Data

| Frequency in MHz | FSM Horz. (dB μ V) | FSM Vert. (dB μ V) | A.F. (dB/m) | Amp. Gain (dB) | RFS Horz. @ 3m (dB μ V/m) | RFS Vert. @ 3m (dB μ V/m) | Limit @ 3m (dB μ V/m) |
|----------------------|------------------------|------------------------|-------------|----------------|-------------------------------|-------------------------------|---------------------------|
| 5745.0 | 115.1 | 115.7 | 33.1 | 0 | 148.2 | 148.8 | -- |
| 11490.0 | 26.1 | 26.5 | 38.8 | 25 | 39.9 | 40.3 | 54.0 |
| 17235.0 | 27.3 | 27.3 | 43.6 | 25 | 45.9 | 45.9 | 54.0 |
| 22980.0 | 28.5 | 28.6 | 21.1 | 25 | 24.6 | 24.7 | 54.0 |
| 28725.0 | 33.2 | 33.0 | 23.5 | 25 | 31.7 | 31.5 | 54.0 |
| 5785.0 | 114.8 | 115.5 | 33.1 | 0 | 147.9 | 148.6 | -- |
| 11570.0 | 25.7 | 25.7 | 39.9 | 25 | 40.6 | 40.6 | 54.0 |
| 17355.0 | 26.5 | 26.9 | 45.2 | 25 | 46.7 | 47.1 | 54.0 |
| 23140.0 | 28.7 | 28.8 | 21.1 | 25 | 24.8 | 24.9 | 54.0 |
| 28925.0 | 34.3 | 34.4 | 23.5 | 25 | 32.8 | 32.9 | 54.0 |
| 5825.0 | 114.2 | 115.2 | 33.1 | 0 | 147.3 | 148.3 | -- |
| 11650.0 | 26.0 | 26.0 | 39.9 | 25 | 40.9 | 40.9 | 54.0 |
| 17475.0 | 26.8 | 27.3 | 48.1 | 25 | 49.9 | 50.4 | 54.0 |
| 23300.0 | 28.3 | 28.4 | 21.1 | 25 | 24.4 | 24.5 | 54.0 |
| 29125.0 | 33.3 | 33.7 | 23.5 | 25 | 31.8 | 32.2 | 54.0 |
| Band Edge Compliance | | | | | | | |
| 5725.0 | 36.3 | 33.3 | 33.1 | 25 | 44.4 | 41.4 | 54.0 |
| 5850.0 | 38.8 | 35.5 | 33.1 | 25 | 46.9 | 43.6 | 54.0 |

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for Radiated Emissions of Intentional Radiator

The EUT demonstrated antenna conducted output power of 22.4 dBm (antenna 1) and 23.0 dBm (antenna 2) for a total output power of 25.7 dBm (372.4 milliwatt) at antenna ports. The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15.247 with highest emission level measured of 141.7 dB μ V/m (23 dBi panel), 148.8 dB μ V/m (32.5 dBi Dish) at 3 meters. The EUT demonstrated a worst-case margin below the harmonic emissions requirements of 3.6 dB below the limit. The EUT demonstrated compliance with the radiated emissions requirements for CFR47 Part 15.247 and RSS-210 Intentional Radiators. There are no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. The specifications of 15.247 and RSS-210 were met; there are no deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C and RSS-210 emissions standards. There were no deviations to the specifications.

Receiver Antenna Power Conduction Requirements

receivers which provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of 15.109, RSS-210 and RSS-GEN with the antenna terminals shielded and terminated with a termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in 15.33 shall not exceed 2.0 nanowatts. The EUT incorporates an integral antenna system for production. A test sample was offered for testing allowing connection to antenna port for testing purposes. The test antenna port was connected to a spectrum analyzer for testing the antenna-conducted emissions. The antenna connection under test was connected to the spectrum analyzer through a short coaxial cable. The spectrum analyzer provided the 50-ohm load for the antenna port. The frequency spectrum was investigated at the antenna port with the worst case data presented. Refer to figures twenty-four through thirty showing the spectrum analyzer display of worst-case antenna conduction emissions. Antenna Port conducted emissions data is shown below. Compliance to receiver radiated emissions requirements were tested at 3 meter OATS with data presented elsewhere in this report.

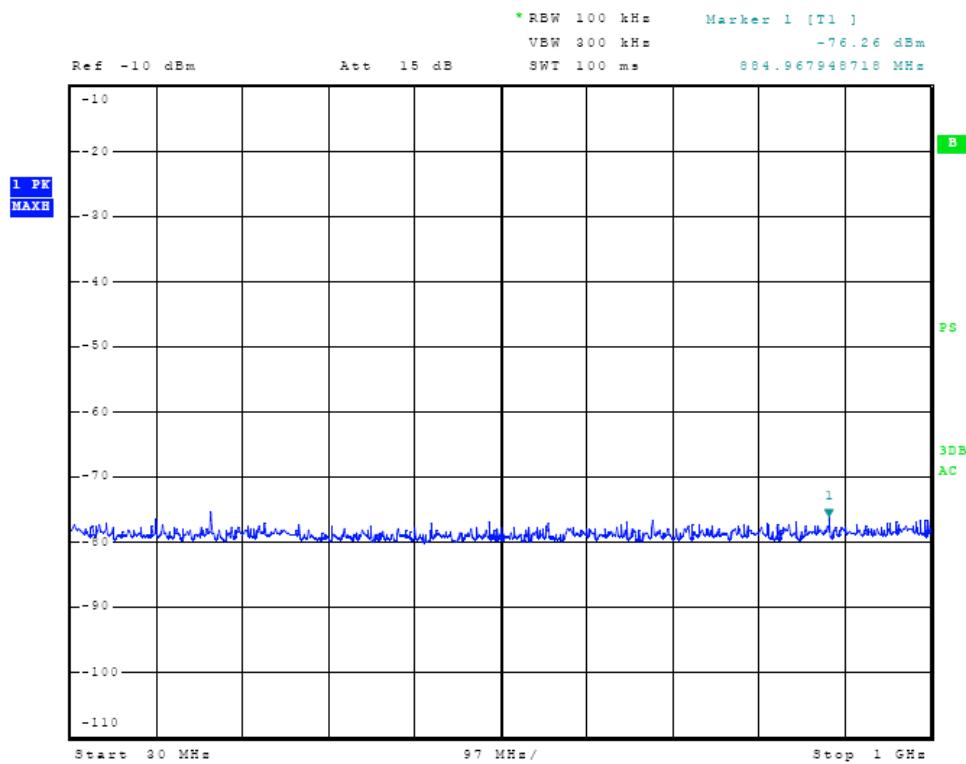


Figure Twenty-four Receiver Antenna Port Conducted Emissions

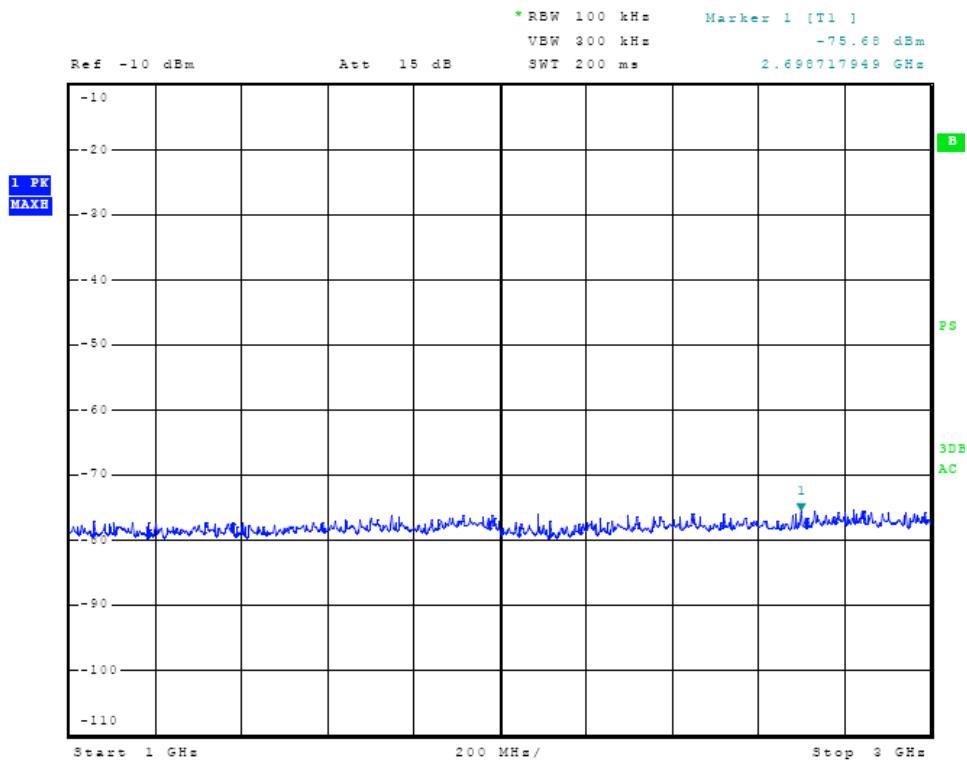


Figure Twenty-five Receiver Antenna Port Conducted Emissions

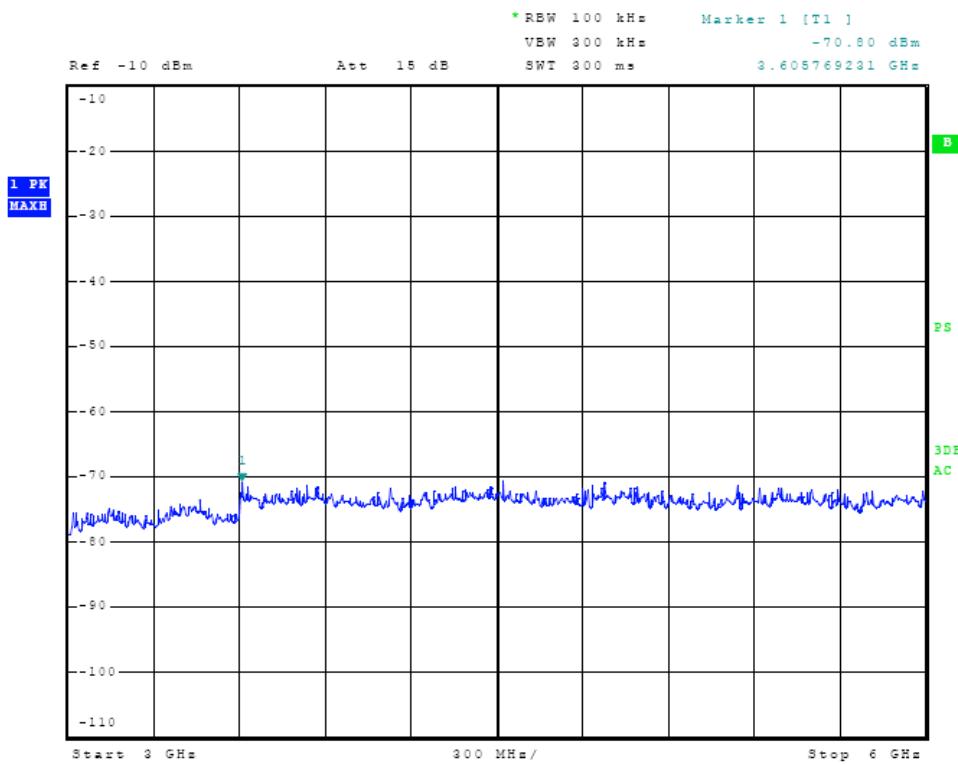


Figure Twenty-six Receiver Antenna Port Conducted Emissions

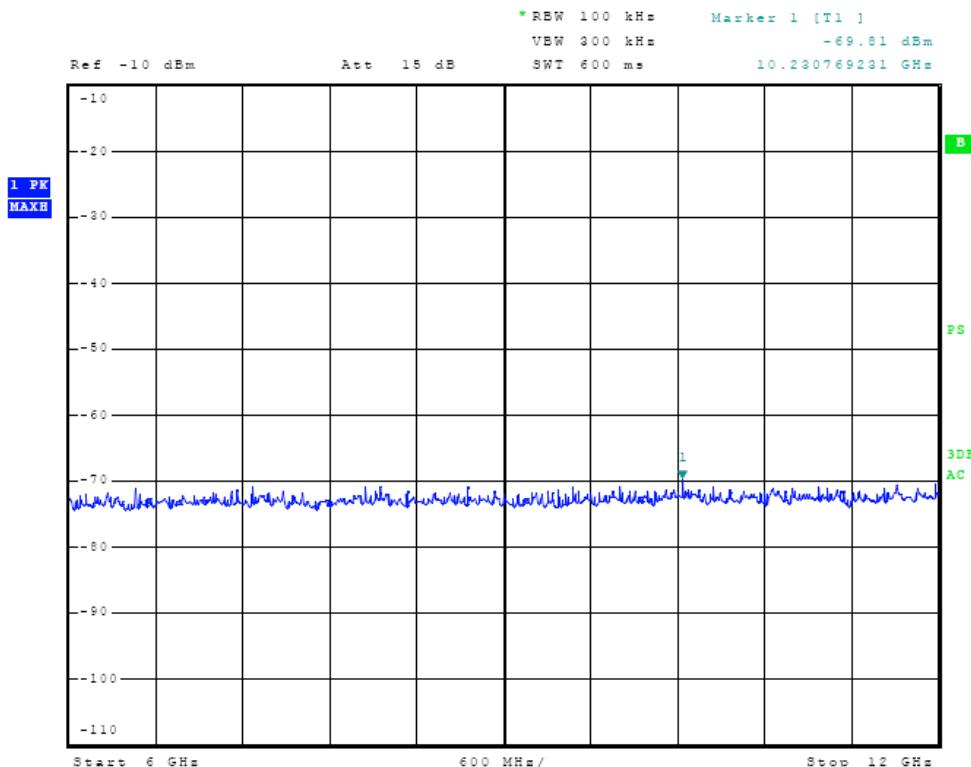


Figure Twenty-seven Receiver Antenna Port Conducted Emissions

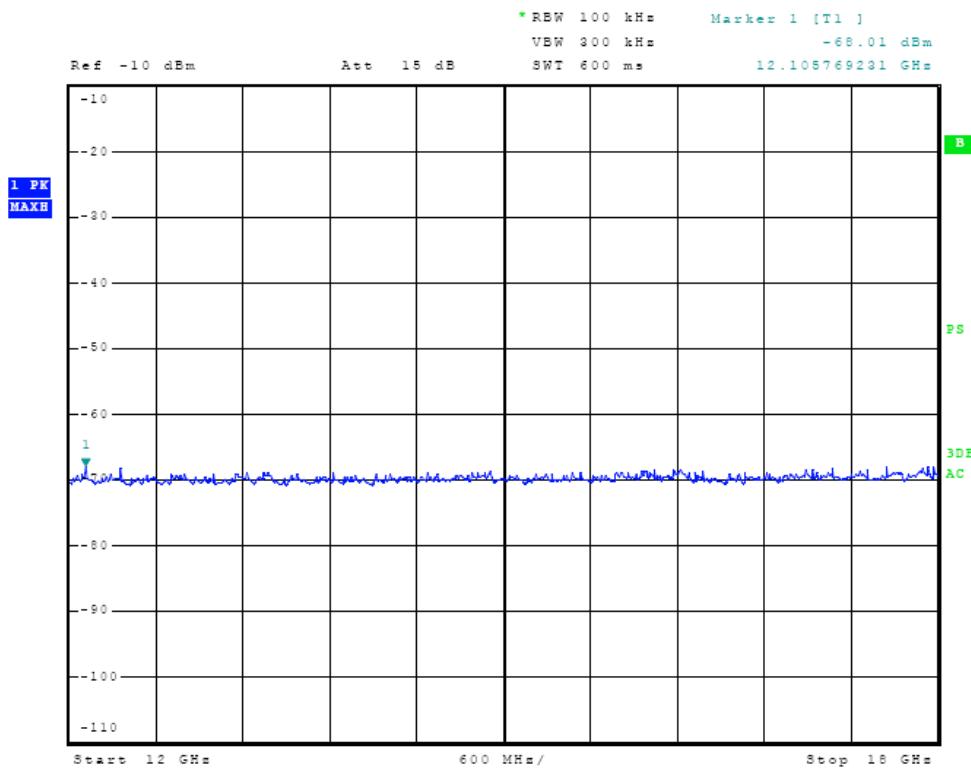


Figure Twenty-eight Receiver Antenna Port Conducted Emissions

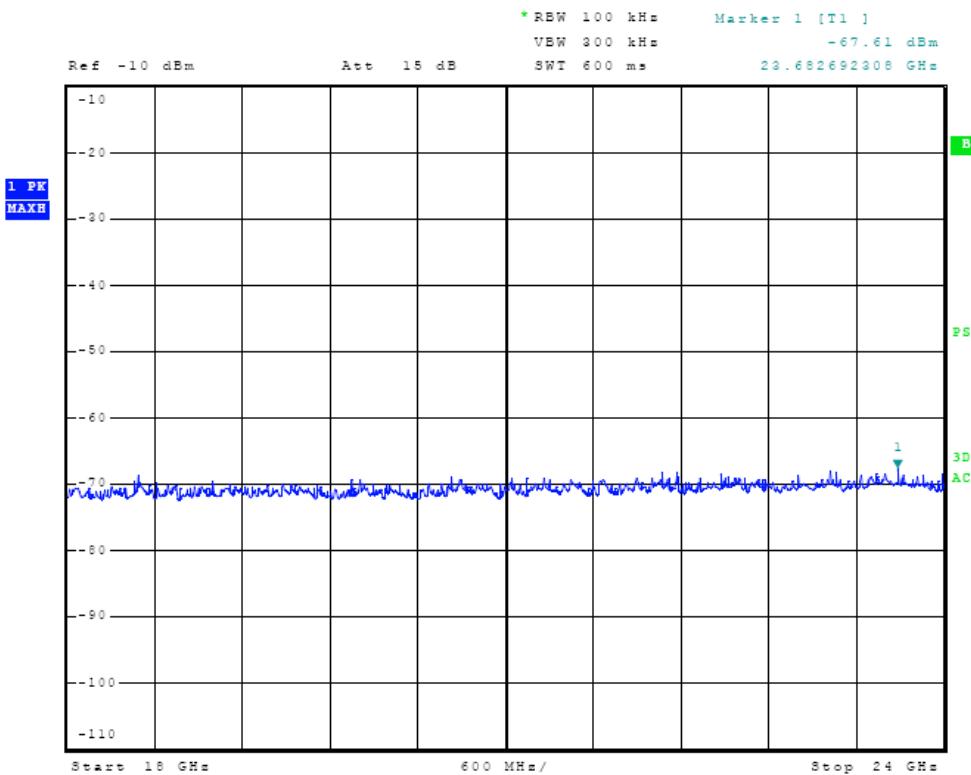


Figure Twenty-nine Receiver Antenna Port Conducted Emissions

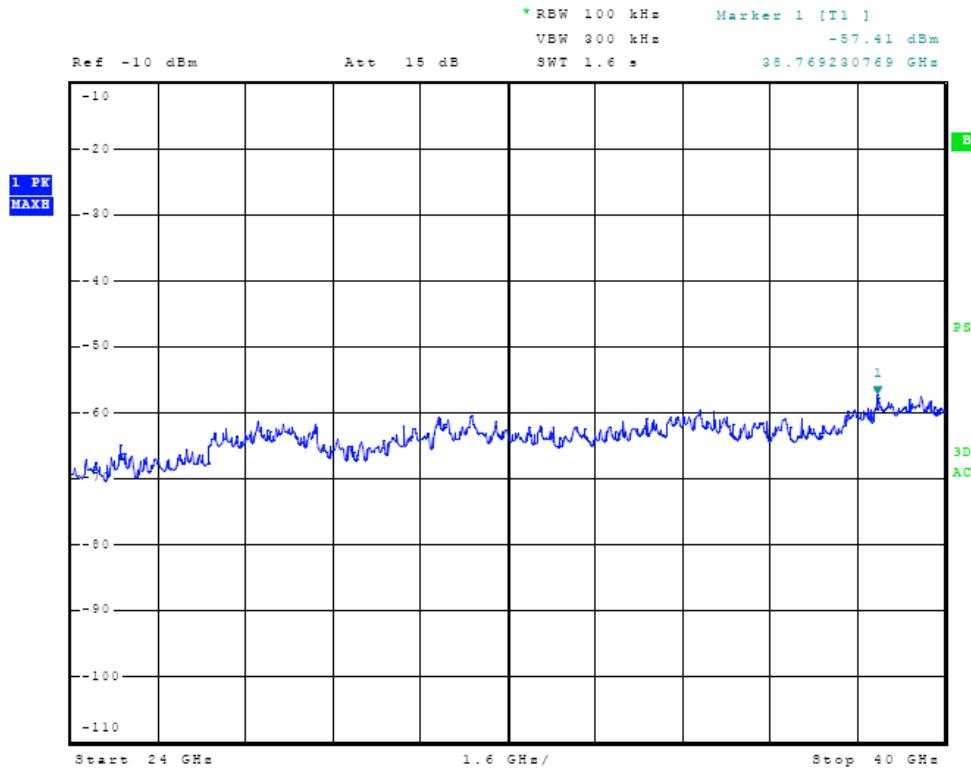


Figure Thirty Receiver Antenna Port Conducted Emissions

Receiver Antenna Conducted Emissions Data

| Frequency (MHz) | Emission Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------|-------------|-------------|
| 5745.0 | -78.5 | -57.0 | 21.5 |
| 5785.0 | -77.9 | -57.0 | 20.9 |
| 5825.0 | -78.7 | -57.0 | 21.7 |

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for Receiver Antenna Conducted Emissions

The EUT demonstrated compliance with the antenna conducted emissions requirements of CFR47 Part 15 and RSS-GEN with a minimum 20.9 dB margin below the limit. Other emissions were present with amplitudes at least 20 dB below the CFR47 15 and RSS-GEN limits.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Ligowave LLC.
Model: WBD5M
Test #: 090805
Test to: FCC (15.247)
File: Ligowave WBD5M 090805 TstRpt

FCC ID#: V2V-WBD5M
IC: 7607A-WBD5M
SN: ST090500037
Page 38 of 44
Date: September 1, 2009

Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

| Contribution | Probability Distribution | Uncertainty (dB) |
|--|--------------------------|------------------|
| Antenna factor calibration | normal ($k = 2$) | ± 0.58 |
| Cable loss calibration | normal ($k = 2$) | ± 0.2 |
| Receiver specification | rectangular | ± 1.0 |
| Antenna directivity | rectangular | ± 0.1 |
| Antenna factor variation with height | rectangular | ± 2.0 |
| Antenna factor frequency interpolation | rectangular | ± 0.1 |
| Measurement distance variation | rectangular | ± 0.2 |
| Site Imperfections | rectangular | ± 1.5 |

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2} \right]^2 + \left[\frac{0.2}{2} \right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3} \right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that $u_c(y) / s(q_k) > 3$, where $s(q_k)$ is estimated standard deviation from a sample of n readings unless the repeatability of the EUT is particularly poor, and a coverage factor of $k = 2$ will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with $k = 2$.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
 - Unwanted reflections from adjacent objects.
 - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
 - Losses or reflections from "transparent" cabins for the EUT or site coverings.
 - Earth currents in antenna cable (mainly effect biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

| Contribution | Probability | Uncertainty (dB) |
|--|--------------|------------------|
| Receiver specification | rectangular | ± 1.5 |
| LISN coupling specification | rectangular | ± 1.5 |
| Cable and input attenuator calibration | normal (k=2) | ± 0.5 |

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that $u_c(y) / s(q_k) > 3$ and a coverage factor of $k = 2$ will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$



NVLAP Lab Code 200087-0

Annex B Rogers Labs Test Equipment List

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

| List of Test Equipment | Calibration Date |
|---|------------------|
| Oscilloscope Scope: Tektronix 2230 | 2/09 |
| Wattmeter: Bird 43 with Load Bird 8085 | 2/09 |
| Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140 | 2/09 |
| H/V Power Supply: Fluke Model: 408B (SN: 573) | 2/09 |
| R.F. Generator: HP 606A | 2/09 |
| R.F. Generator: HP 8614A | 2/09 |
| R.F. Generator: HP 8640B | 2/09 |
| Spectrum Analyzer: Rohde & Schwarz ESU40 | 2/09 |
| Spectrum Analyzer: HP 8562A, | 5/09 |
| Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W | |
| HP Adapters: 11518, 11519, 11520 | |
| Spectrum Analyzer: HP 8591EM | 5/09 |
| Frequency Counter: Leader LDC825 | 2/09 |
| Antenna: EMCO Biconilog Model: 3143 | 5/09 |
| Antenna: EMCO Log Periodic Model: 3147 | 10/08 |
| Antenna: Antenna Research Biconical Model: BCD 235 | 10/08 |
| Antenna: EMCO Dipole Set 3121C | 2/09 |
| Antenna: C.D. B-101 | 2/09 |
| Antenna: Solar 9229-1 & 9230-1 | 2/09 |
| Antenna: EMCO 6509 | 2/09 |
| Audio Oscillator: H.P. 201CD | 2/09 |
| R.F. Power Amp 65W Model: 470-A-1010 | 2/09 |
| R.F. Power Amp 50W M185- 10-501 | 2/09 |
| R.F. PreAmp CPPA-102 | 2/09 |
| LISN 50 μ Hy/50 ohm/0.1 μ f | 10/08 |
| LISN Compliance Eng. 240/20 | 2/09 |
| LISN Fischer Custom Communications FCC-LISN-50-16-2-08 | 2/09 |
| Peavey Power Amp Model: IPS 801 | 2/09 |
| Power Amp A.R. Model: 10W 1010M7 | 2/09 |
| Power Amp EIN Model: A301 | 2/09 |
| ELGAR Model: 1751 | 2/09 |
| ELGAR Model: TG 704A-3D | 2/09 |
| ESD Test Set 2010i | 2/09 |
| Fast Transient Burst Generator Model: EFT/B-101 | 2/09 |
| Current Probe: Singer CP-105 | 2/09 |
| Current Probe: Solar 9108-1N | 2/09 |
| Field Intensity Meter: EFM-018 | 2/09 |
| KEYTEK Ecat Surge Generator | 2/09 |



NVLAP Lab Code 200087-0

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

Bachelor of Science Degree in Electrical Engineering from Kansas State University

Bachelor of Science Degree in Business Administration Kansas State University

Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming

Scot D Rogers

Scot D. Rogers

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Ligowave LLC.
Model: WBD5M
Test #: 090805
Test to: FCC (15.247)
File: Ligowave WBD5M 090805 TstRpt

FCC ID#: V2V-WBD5M
IC: 7607A-WBD5M
SN: ST090500037
Page 42 of 44
Date: September 1, 2009



NVLAP Lab Code 200087-0

Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

June 18, 2008

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers

Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: June 18, 2008

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parish
Industry Analyst

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Ligowave LLC.
Model: WBD5M
Test #: 090805
Test to: FCC (15.247)
File: Ligowave WBD5M 090805 TstRpt

FCC ID#: V2V-WBD5M
IC: 7607A-WBD5M
SN: ST090500037
Page 43 of 44
Date: September 1, 2009

Annex E Industry Canada Site Registration Letter**Industry
Canada****Industrie
Canada**

July 29th, 2008

OUR FILE: 46405-3041

Submission No: 127059

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg KY 66053
USA

Attention: Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the registration / renewal of a 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (3040A-1). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please be informed that the Bureau is now utilizing a **new site numbering scheme** in order to simplify the electronic filing process. Our goal is to reduce the number of secondary codes associated to one particular company. The following changes have been made to your records.

Your primary code is: **3041**

The company number associated to the site(s) located at the above address is: **3041A**

The table below is a summary of the changes made to the unique site registration number(s):


| New Site Number | Obsolete Site Number | Description of Site | Expiry Date (YYYY-MM-DD) |
|-----------------|----------------------|---------------------|--------------------------|
| 3041A-1 | 3041-1 | 3 / 10m OATS | 2010-07-29 |

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 meter OATS or 3 meter chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca
Please reference our file and submission number above for all correspondence.

Yours sincerely,


S. Proulx Wireless Laboratory
Manager Certification and
Engineering Bureau Industry Canada
3701 Carling Ave., Building 94
Ottawa, Ontario K2H 8S2
Canada

