



RF TEST REPORT

Report No.: SET2016-03875
Product Name: Mini Computer (Mobile Computer)
FCC ID: V2X-PM200
Model No. : PM200
Applicant: POINTMOBILE CO.,LTD.
Address: B-9F Kabul Great Valley 32, Digital-ro9-gil, Geumcheon-gu, Seoul, Korea
Dates of Testing: 03/07/2016 — 03/22/2016
Issued by: CCIC-SET
Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China
Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : Mini Computer (Mobile Computer)

Brand Name : POINTMOBILE

Trade Name : POINTMOBILE

Applicant : POINTMOBILE CO.,LTD.


Applicant Address : B-9F Kabul Great Valley 32, Digital-ro9-gil, Geumcheon-gu,
Seoul, Korea


Manufacturer : POINTMOBILE CO.,LTD.

Manufacturer Address : B-9F Kabul Great Valley 32, Digital-ro9-gil, Geumcheon-gu,
Seoul, Korea

Test Standards : 47 CFR Part 15 Subpart C: Radio Frequency Devices
ANSI C63.10-2013: American National Standard for Testing
Unlicensed Wireless Devices
RSS-247 Issue 1, May 2015 Digital Transmission Systems
(DTSs), Frequency Hopping Systems (FHSs) and
Licence-Exempt Local Area Network (LE-LAN) Devices
KDB 558074D01 v03r03

Test Result : PASS

Tested by : 
2016.03.22
Lu Lei, Test Engineer

Reviewed by : 
2016.03.22
Zhu Qi, Senior Engineer


Approved by : 
2016.03.22
Wu Li'an, Manager



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1. EUT Description 4
- 1.2. Test Standards and Results..... 5
- 1.3. Description of test environment test modes 6
- 1.4. Table for Supporting Units..... 6
- 1.5. Test Facilities 7
- 2. 47 CFR PART 15C REQUIREMENTS.....8**
- 2.1. Antenna requirement..... 8
- 2.2. Peak Output Power..... 9
- 2.3. Bandwidth 11
- 2.3.7. Conducted Band Edges and Spurious Emissions..... 22
- 2.4. Power spectral density (PSD) 35
- 2.5. Conducted Emission 42
- 2.6. Radiated Band Edge and Spurious Emission..... 46
- 3. LIST OF MEASURING EQUIPMENT60**
- 4. UNCERTAINTY OF EVALUATION61**

| Change History | | |
|----------------|------------|-------------------|
| Issue | Date | Reason for change |
| 1.0 | 2016.03.22 | First edition |
| | | |
| | | |

1. General Information

1.1. EUT Description

| | |
|---------------------------------|--|
| EUT Type | Mini Computer (Mobile Computer) |
| Hardware Version | 1 |
| Software Version | 20.00 |
| Power Supply | 3.8V DC |
| EUT supports Radios application | WLAN2.4GHz 802.11b/g/n (HT20) |
| Frequency Range | 802.11b/g/n-20MHz: 2.412GHz - 2.462GHz |
| Channel Number | 802.11b/g/n-20MHz: 11 |
| Bit Rate of Transmitter | 802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n : up to 65 Mbps |
| Modulation Type | DSSS (802.11b), OFDM (802.11g/n) |
| Antenna Type | Internal Antenna |
| Antenna Gain | 2.2dBi |

Note 1: The EUT is a Mini Computer, it contain WIFI operating at 2.4GHz ISM band; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

Note 2: The frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1ch (2412MHz), 6ch(2437MHz), 11ch(2462MHz) for 802.11b/g/n-20MHz.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 4: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.



1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC/IC Certification:

| No. | Identity | Document Title |
|-----|----------------------------------|--|
| 1 | 47 CFR Part 15 Subpart C 2013 | Radio Frequency Devices |
| 2 | ANSI C63.10 2013 | American National Standard for Testing Unlicensed Wireless Devices |
| 3 | RSS-GEN: Issue 4, November 2014: | General Requirements and Information for the Certification of Radio Apparatus |
| 4 | RSS-247: Issue 1, December 2015: | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Standard(s) Section | | Description | Result |
|-----|------------------------|-----------------------------------|---|--------|
| | FCC | IC | | |
| 1 | 15.203 | 8.3 | Antenna Requirement | PASS |
| 2 | 15.247(b)(3) | RSS-247 Issue1 - 5.4(4) | Peak Output Power | PASS |
| 3 | 15.247(a)(2) | RSS-247 Issue1 - 5.2(1) | Bandwidth – 6dB bandwidth | PASS |
| 4 | / | RSS Gen clause - 4.6.1 | 99% Occupied Bandwidth | PASS |
| 5 | 15.247(d) | RSS-247 Issue1 - 5.5 | Conducted Spurious Emission | PASS |
| 6 | 15.247(e) | RSS-247 Issue1 - 5.2(2) | Power spectral density (PSD) | PASS |
| 7 | 15.205 15.247(d) | RSS-247 Issue1 - 5.5 RSS - Gen | Band Edge | PASS |
| 8 | 15.209(a) | RSS-GEN | Spurious emissions radiated below 30MHz | PASS |
| 9 | 15.247(d) 15.109 | RSS-247 Issue1 - 5.5 RSS-Gen | Spurious emissions radiated 30 MHz to 1GHz and above 1GHz | PASS |
| 10 | 15.107(a), 15.20(c) | RSS-GEN | Conducted Emission | PASS |

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 V03r03.



1.3. Description of test environment test modes

For 20MHz bandwidth systems, use Channel 1~ Channel 11

| Channel No. | Frequency | Channel No. | Frequency | Channel No. | Frequency |
|-------------|-----------|-------------|-----------|-------------|-----------|
| 1 | 2412MHz | 5 | 2432MHz | 9 | 2452MHz |
| 2 | 2417MHz | 6 | 2437MHz | 10 | 2457MHz |
| 3 | 2422MHz | 7 | 2442MHz | 11 | 2462MHz |
| 4 | 2427MHz | 8 | 2447MHz | | |

| Test Items | Mode | Data Rate | Channel |
|---|-----------------|-----------|---------|
| Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Conducted and Spurious Emission Radiated and Spurious Emission | 11b/DSSS | 1 Mbps | 1/6/11 |
| | 11g/OFDM | 6 Mbps | 1/6/11 |
| | 11n(20MHz)/OFDM | MCS 0 | 1/6/11 |
| Band Edge | 11b/DSSS | 1 Mbps | 1/11 |
| | 11g/OFDM | 6 Mbps | 1/11 |
| | 11n(20MHz)/OFDM | MCS 0 | 1/11 |

| Operating Environment | |
|--------------------------------|---|
| Temperature | 24°C |
| Humidity | 57 % RH |
| Atmospheric Pressure | 1010 mbar |
| Test mode: | |
| Continuously transmitting mode | Keeps the EUT in 100% duty cycle transmitting; duty cycle factor is not required. |

1.4. Table for Supporting Units

| No. | Equipment | Brand Name | Model Name | Manufacturer | Serial No. | Note |
|-----|-----------|------------|------------|--------------|------------|---------|
| 1 | Notebook | DELL | PP11L | DELL | H5914A03 | FCC DOC |



1.5. Test Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

IC-Registration No.: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on July. 15, 2013, valid time is until July. 15, 2016.

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna Category: Internal antenna

An Internal antenna was placed on PCB, can't be removed.

Antenna General Information:

| No. | EUT Model | Ant. Cat. | Gain(dBi) |
|-----|---------------------------------|-----------|-----------|
| 1 | Mini Computer (Mobile Computer) | Internal | 2.2 |

2.1.3. Result: comply

The module contain a unique antenna connector, and be marketed and operated only with specific antenna(s).

2.2. Peak Output Power


2.2.1. Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup



2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

**2.2.5. Test Result**

| Test mode | Channel | Frequency (MHz) | RF Power(dBm) | Gain(dBi) Calculated | Radiated power (dBm) | Limit (dBm) | Verdict |
|-----------|---------|-----------------|---------------|----------------------|----------------------|-------------|---------|
| 802.11b | 1 | 2412 | 18.93 | 2.2 | 21.13 | 30 | PASS |
| | 6 | 2437 | 19.00 | | 21.20 | | PASS |
| | 11 | 2462 | 19.05 | | 21.25 | | PASS |
| 802.11g | 1 | 2412 | 17.33 | | 19.53 | | PASS |
| | 6 | 2437 | 16.95 | | 19.15 | | PASS |
| | 11 | 2462 | 17.09 | | 19.29 | | PASS |
| 802.11n20 | 1 | 2412 | 16.78 | | 18.98 | | PASS |
| | 6 | 2437 | 16.98 | | 19.18 | | PASS |
| | 11 | 2462 | 17.02 | | 19.22 | | PASS |

Note: All data rates are testing, but the worse case data rate was record in the report.

2.3. Bandwidth


2.3.1. Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

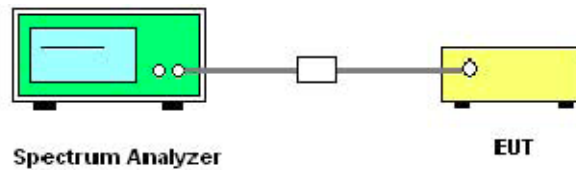

2.3.4. Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.

2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

3. Set to the maximum power setting and enable the EUT transmit continuously.

4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.

Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.

5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30 kHz and set the Video bandwidth (VBW) = 100 kHz.


6. Measure and record the results in the test report.

**2.3.5. Test Results of 6dB Bandwidth and 99% Bandwidth**


| Test mode | Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Limits (MHz) | Result |
|-----------|---------|-----------------|----------------------|---------------------|--------------|--------|
| 802.11b | 1 | 2412 | 8.91 | 13.95 | ≥0.5 | PASS |
| | 6 | 2437 | 9.05 | 13.95 | | PASS |
| | 11 | 2462 | 9.15 | 14.00 | | PASS |
| 802.11g | 1 | 2412 | 15.50 | 16.40 | | PASS |
| | 6 | 2437 | 15.50 | 16.45 | | PASS |
| | 11 | 2462 | 15.50 | 16.45 | | PASS |
| 802.11n20 | 1 | 2412 | 15.80 | 17.65 | | PASS |
| | 6 | 2437 | 15.50 | 17.60 | | PASS |
| | 11 | 2462 | 15.50 | 17.60 | | PASS |

2.3.6. Test Results (plots) of 6dB Bandwidth

802.11b - 6 dB Bandwidth Plot on channel 1

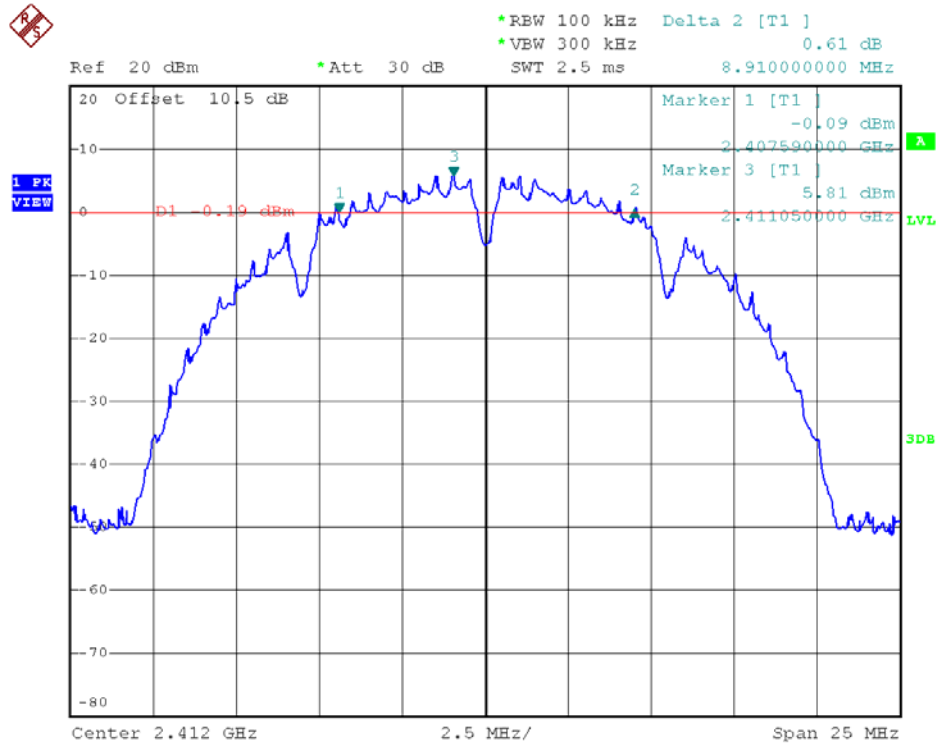


802.11b - 6 dB Bandwidth Plot on channel 6

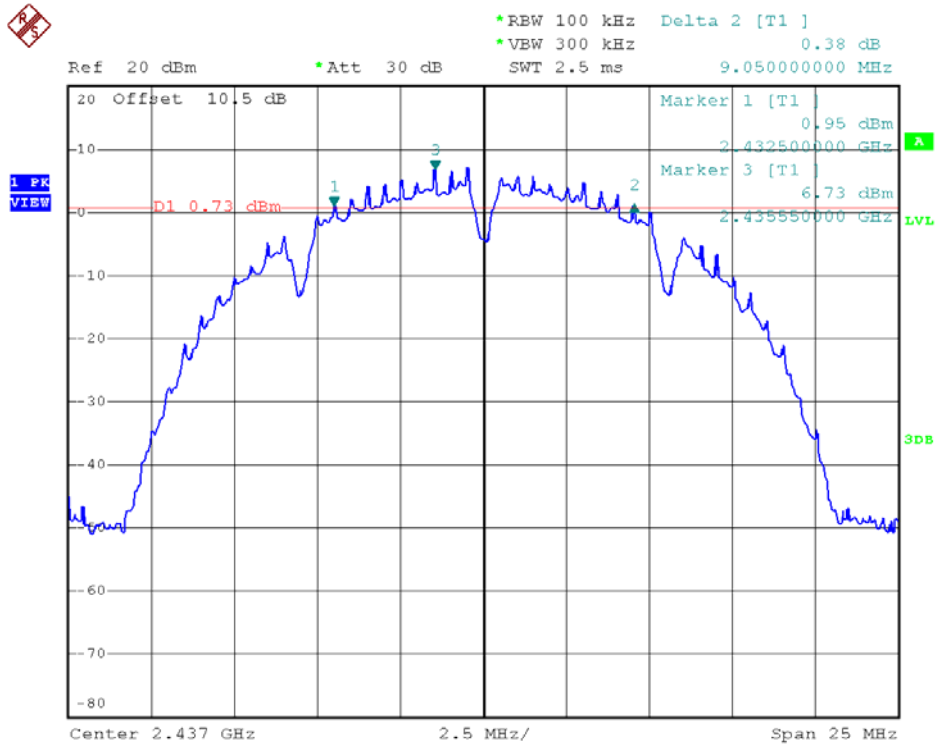




802.11b - 6 dB Bandwidth Plot on channel 11

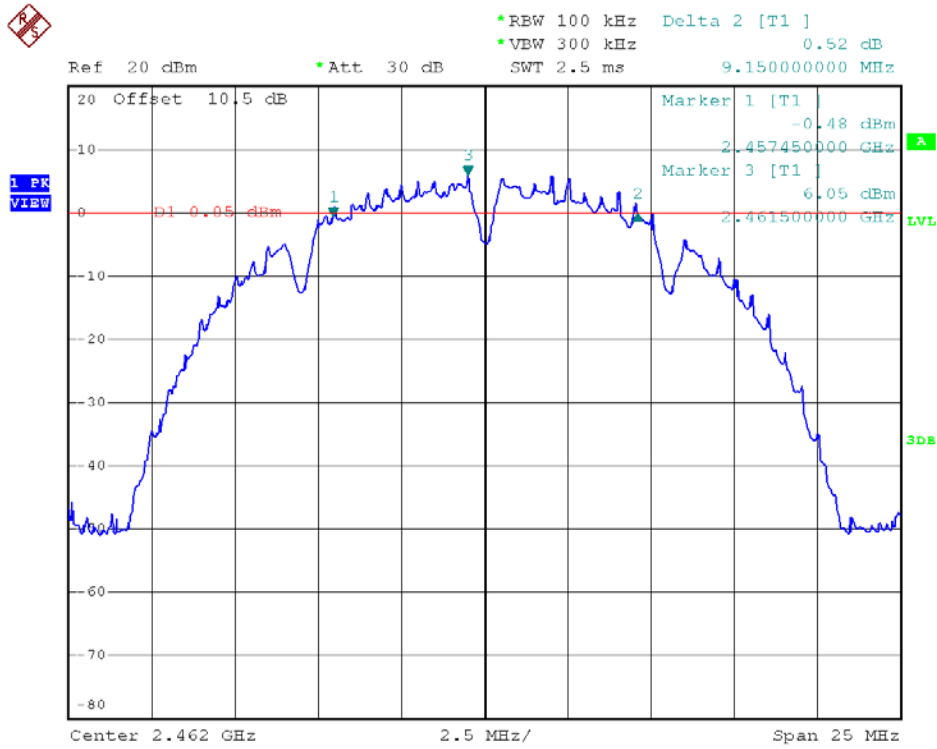


802.11g - 6 dB Bandwidth Plot on channel 1

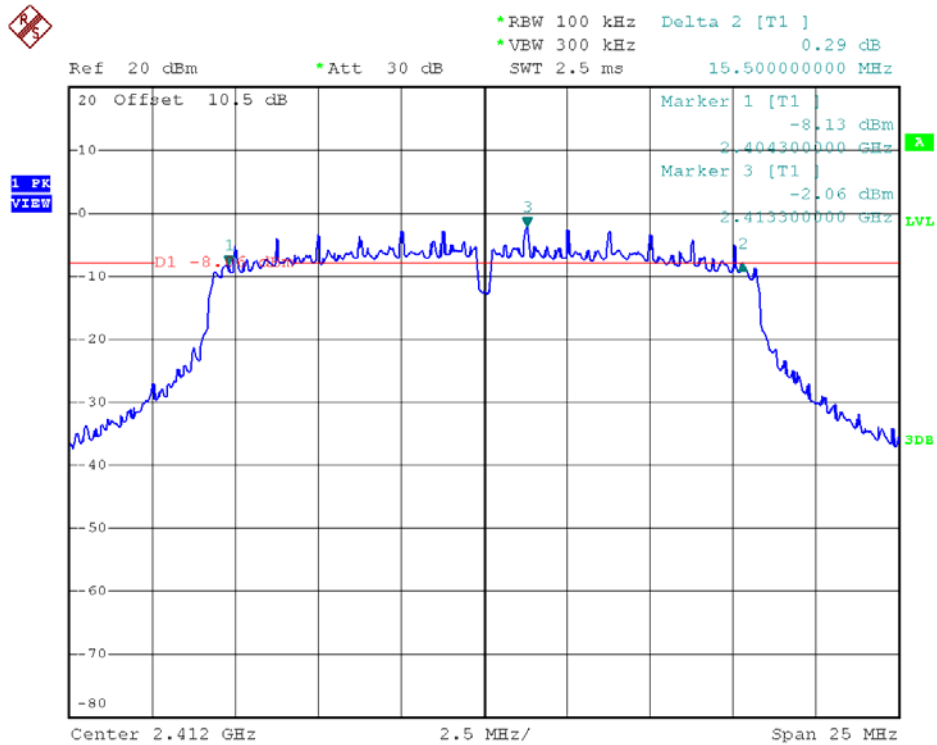




802.11g - 6 dB Bandwidth Plot on channel 6

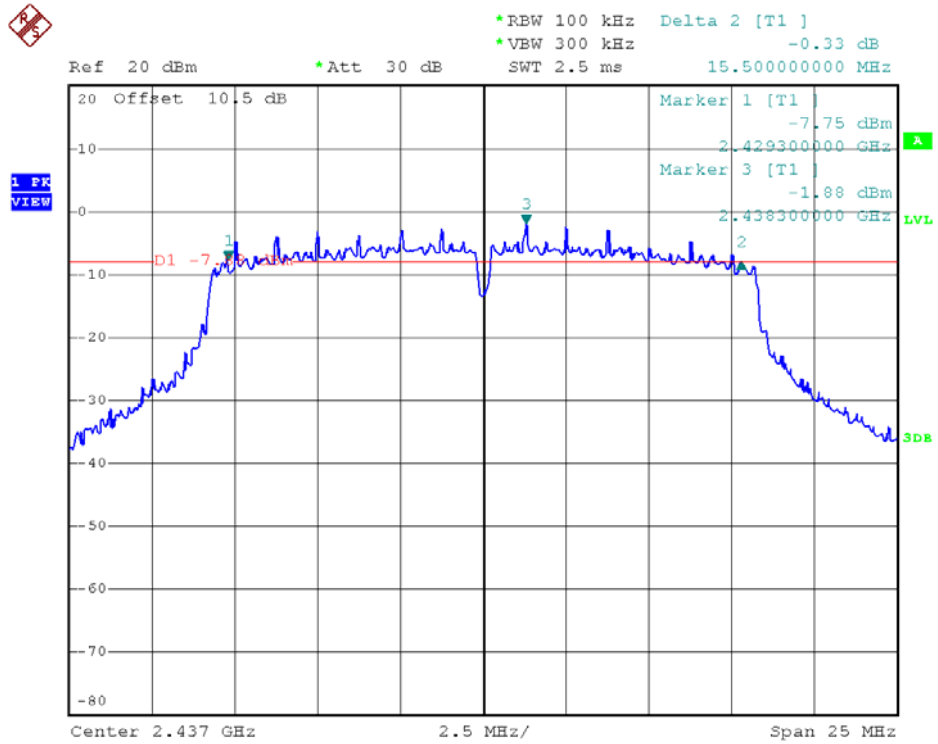


802.11g - 6 dB Bandwidth Plot on channel 11

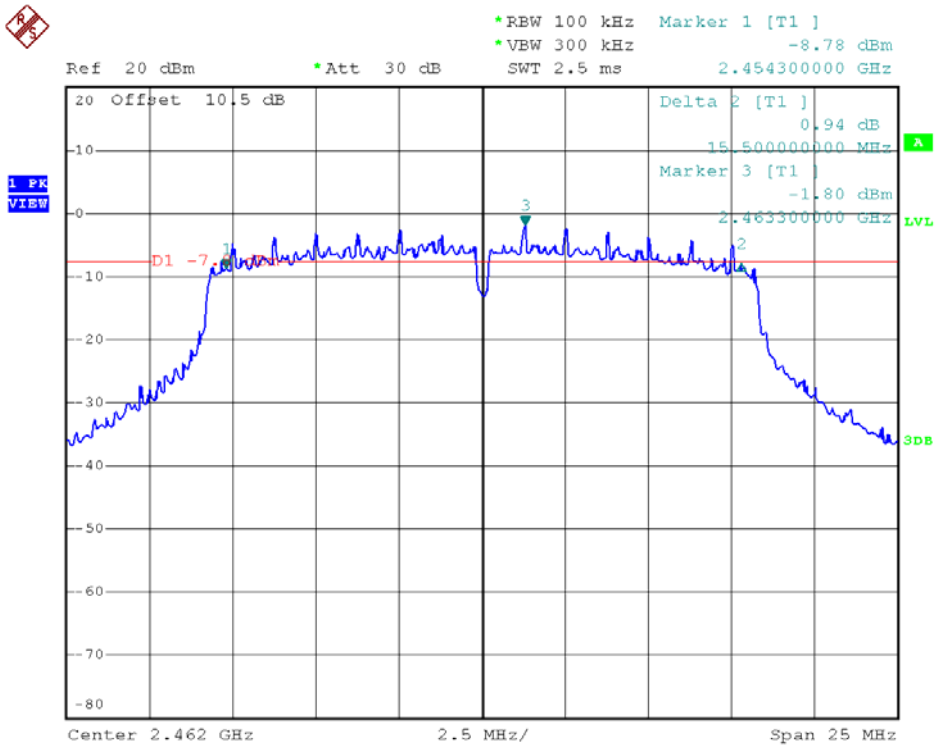




802.11n20 - 6 dB Bandwidth Plot on channel 1

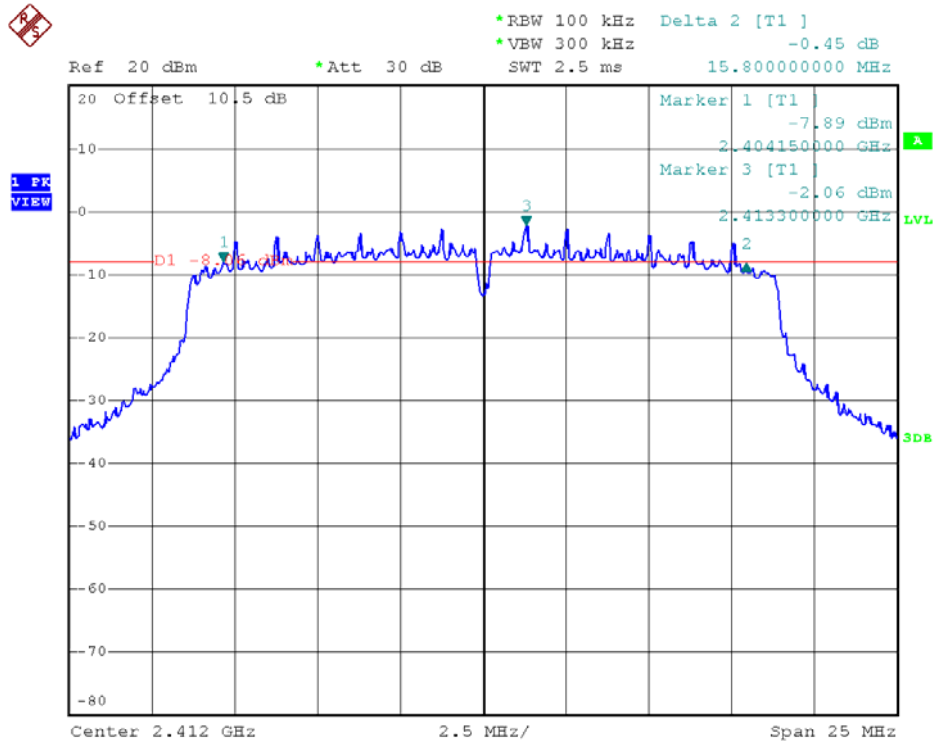


802.11 n20 - 6 dB Bandwidth Plot on channel 6

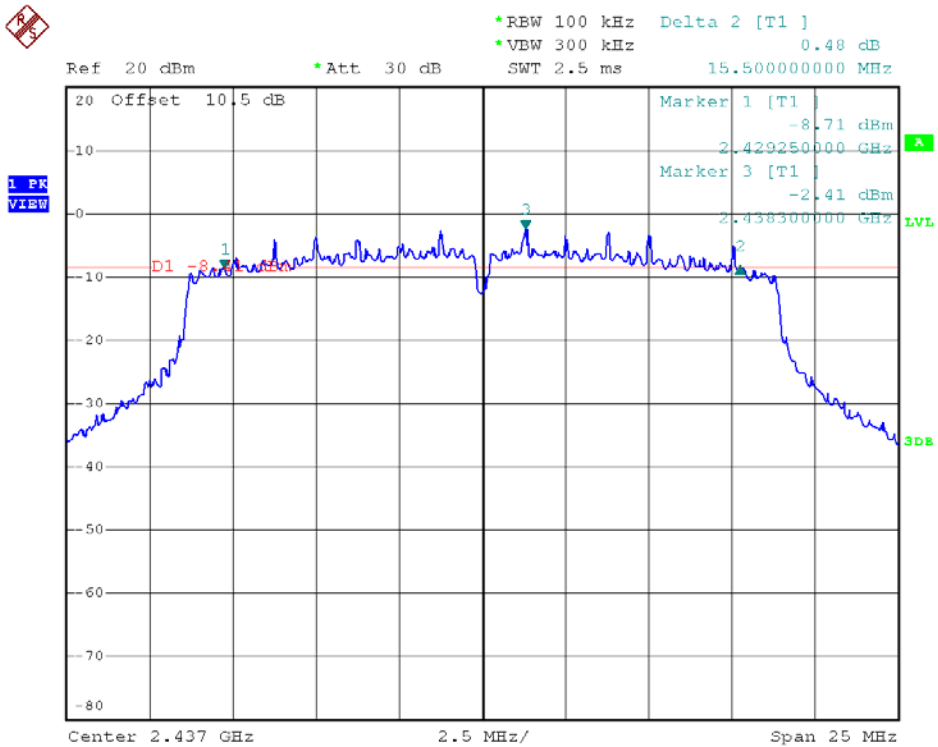




802.11 n20 - 6 dB Bandwidth Plot on channel 11

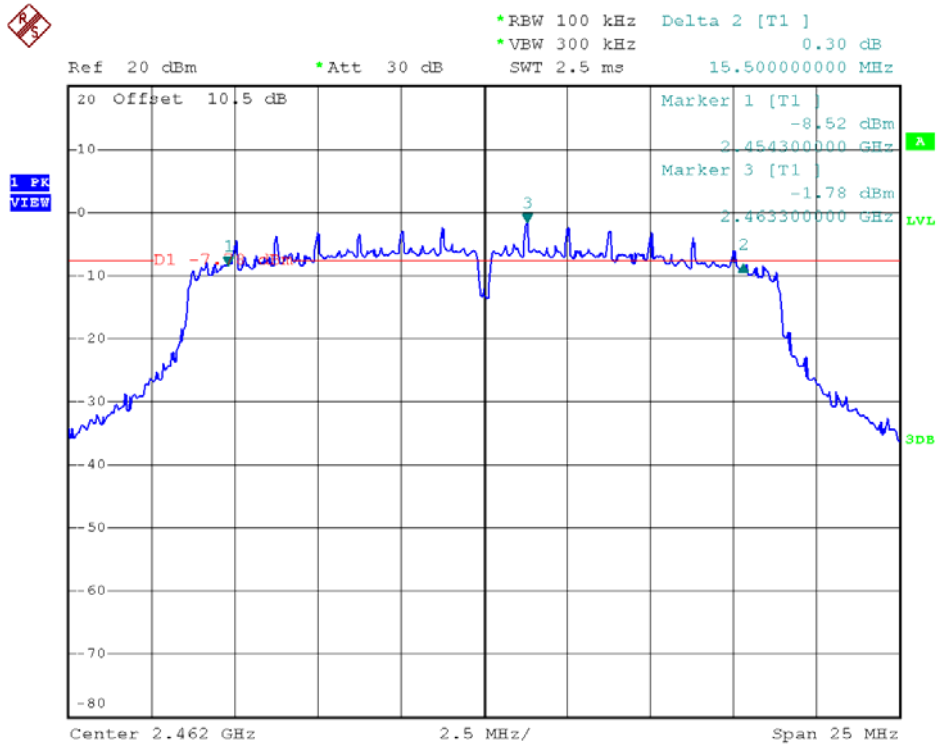


802.11b - 99% Bandwidth Plot on channel 1

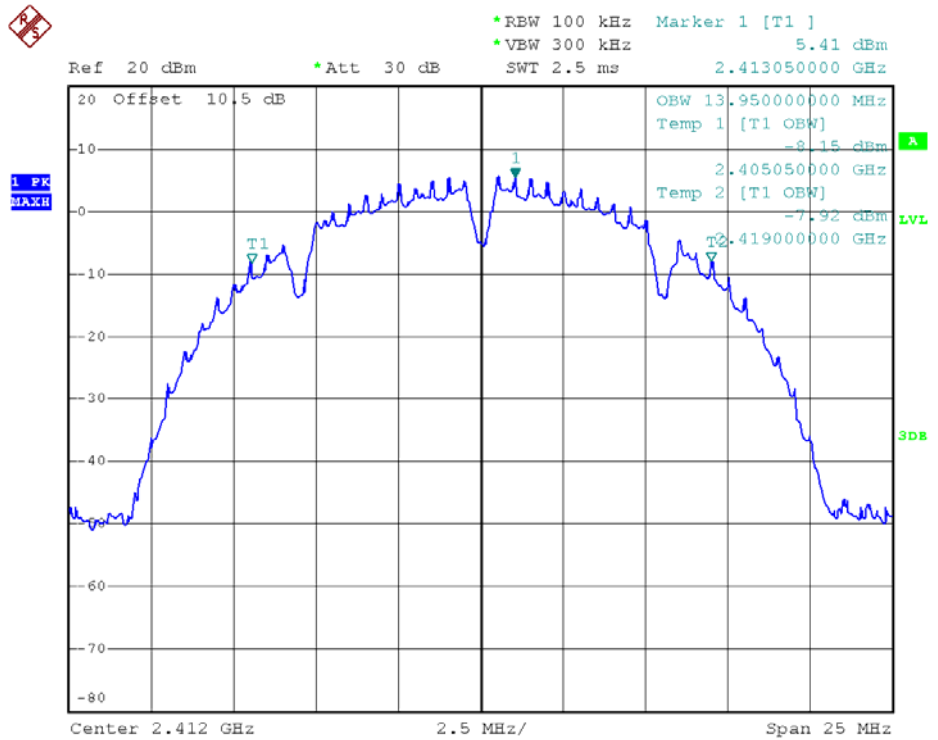




802.11b - 99% Bandwidth Plot on channel 6

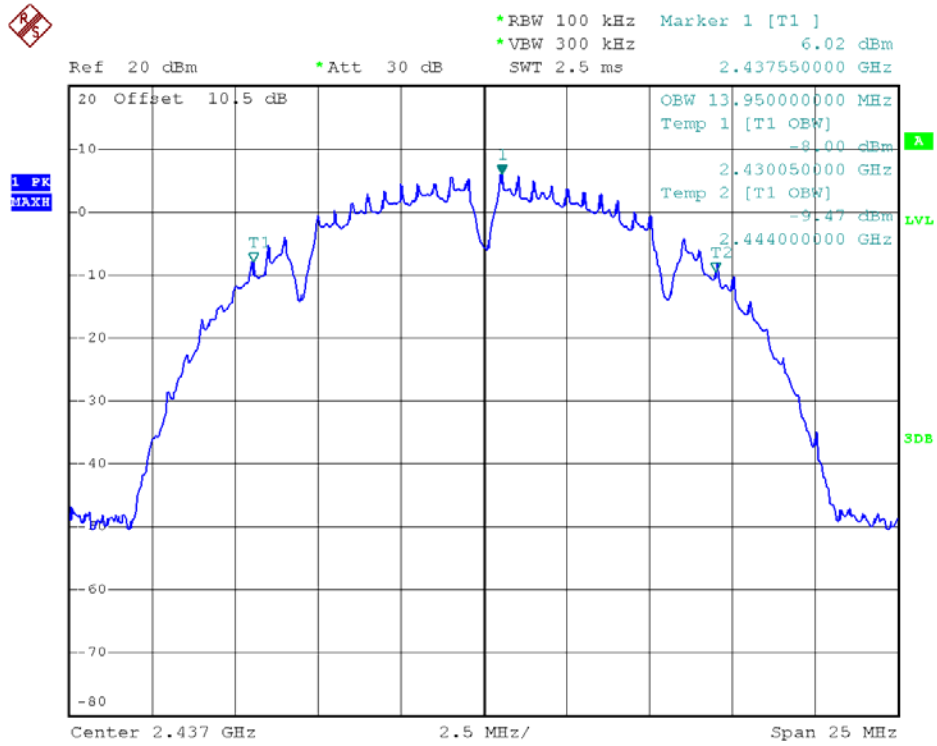


802.11b - 99% Bandwidth Plot on channel 11

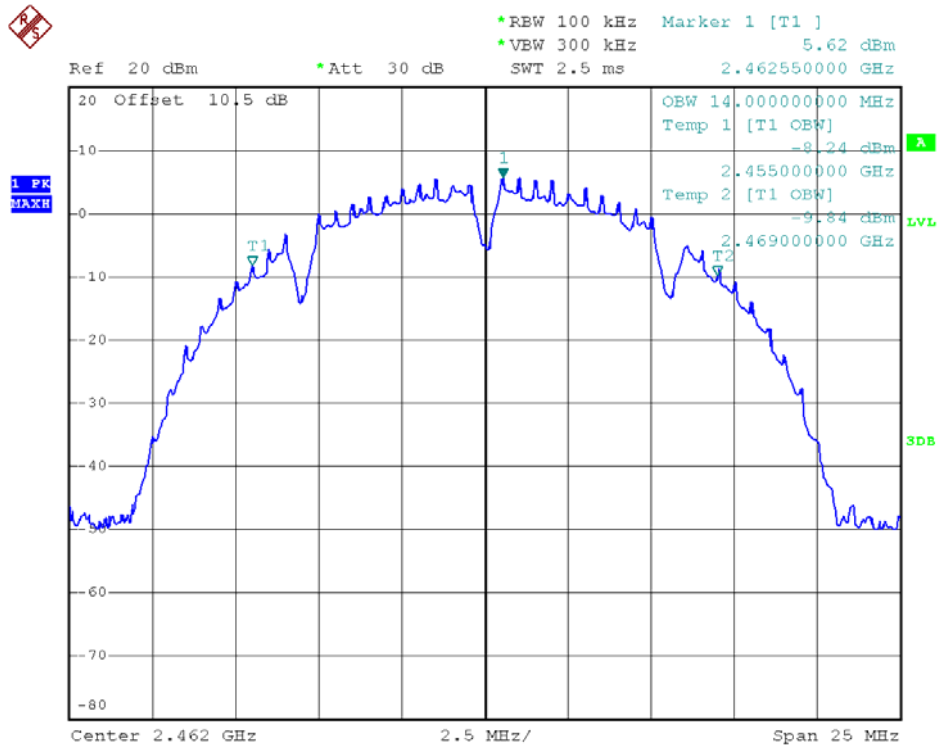




802.11g - 99% Bandwidth Plot on channel 1

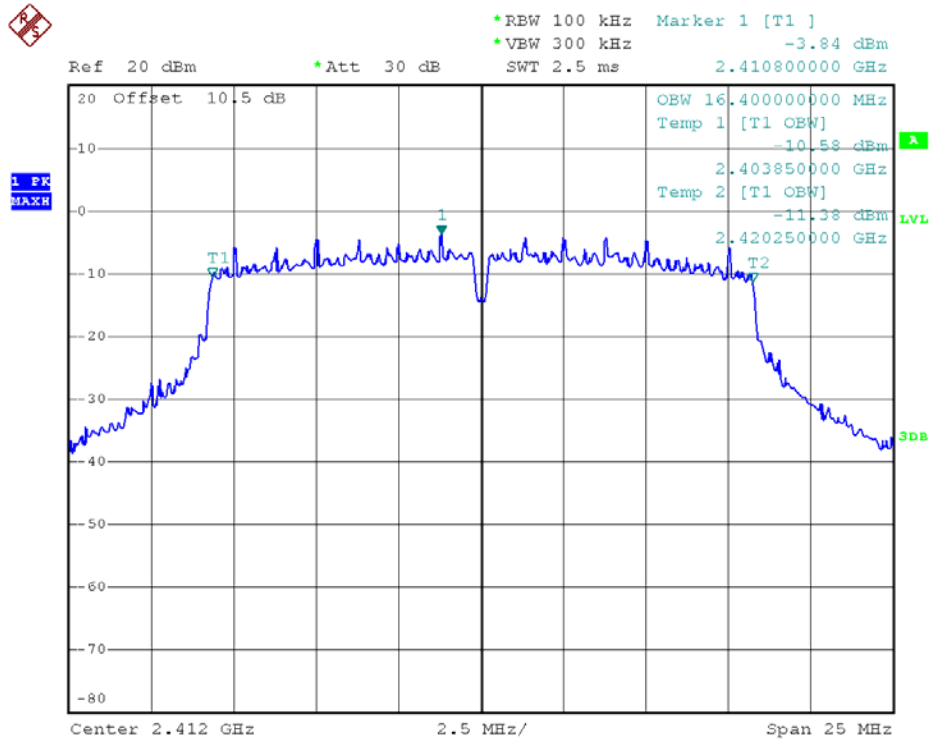


802.11g - 99% Bandwidth Plot on channel 6

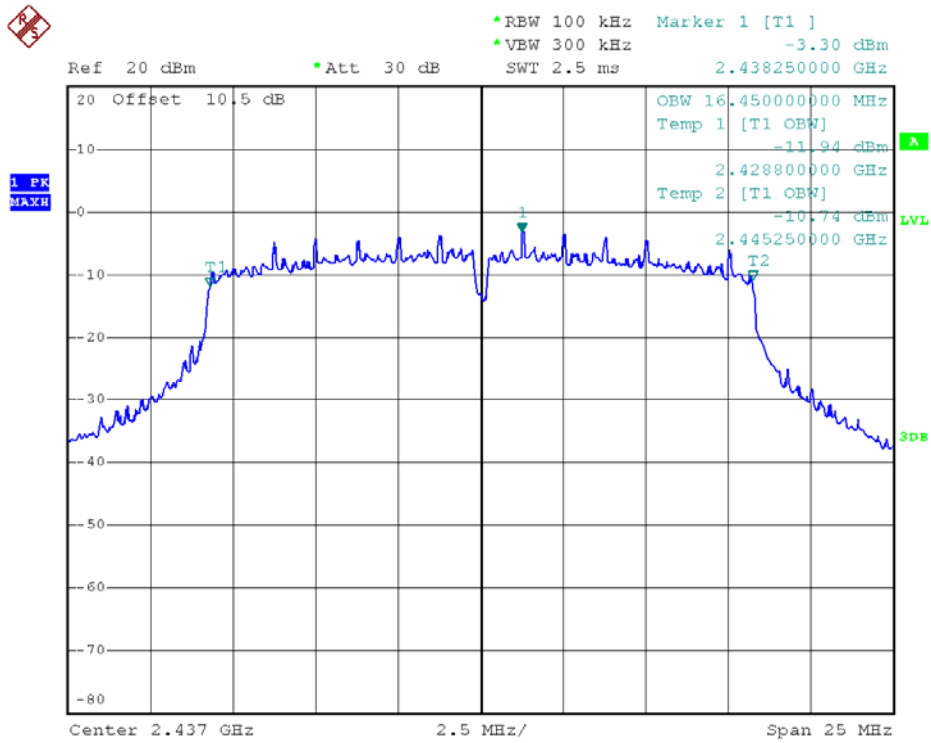




802.11g - 99% Bandwidth Plot on channel 11

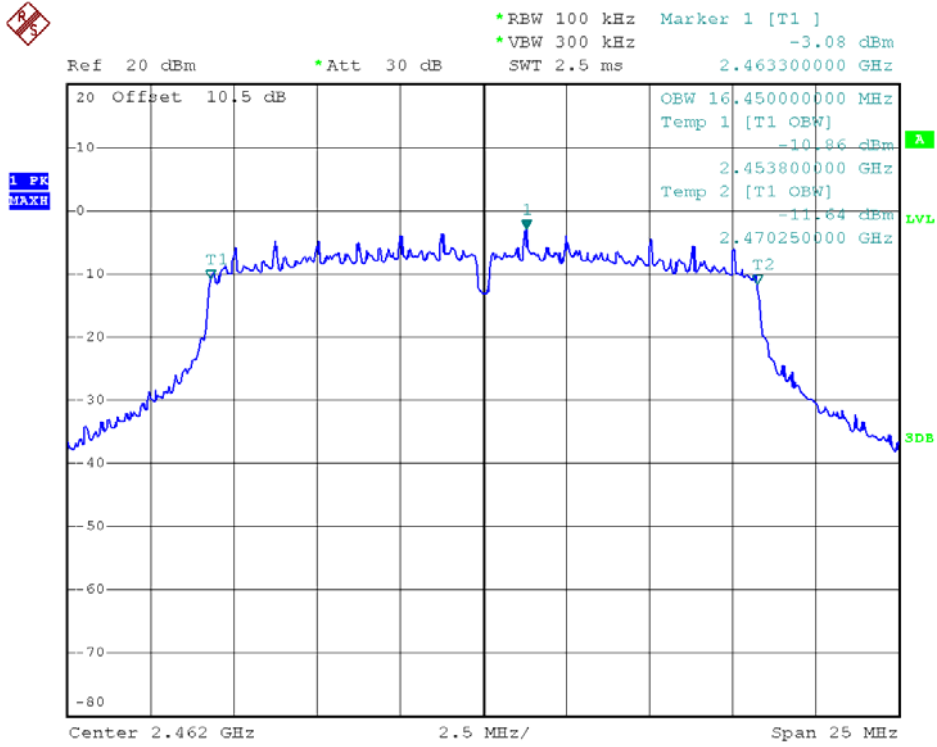


802.11n20 - 99% Bandwidth Plot on channel 1

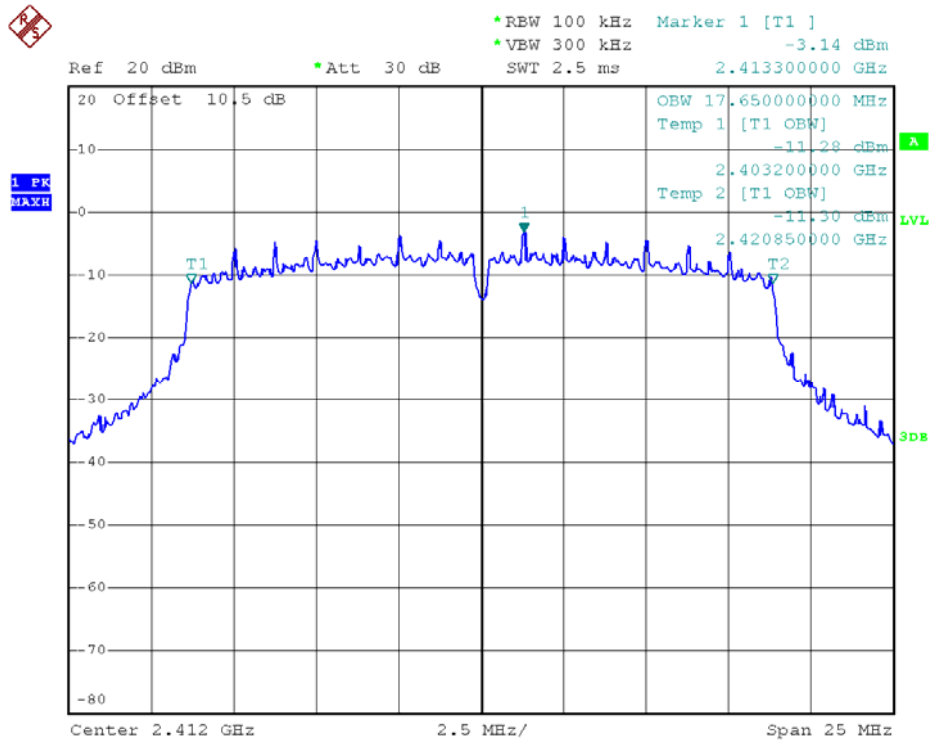




802.11 n20 - 99% Bandwidth Plot on channel 6

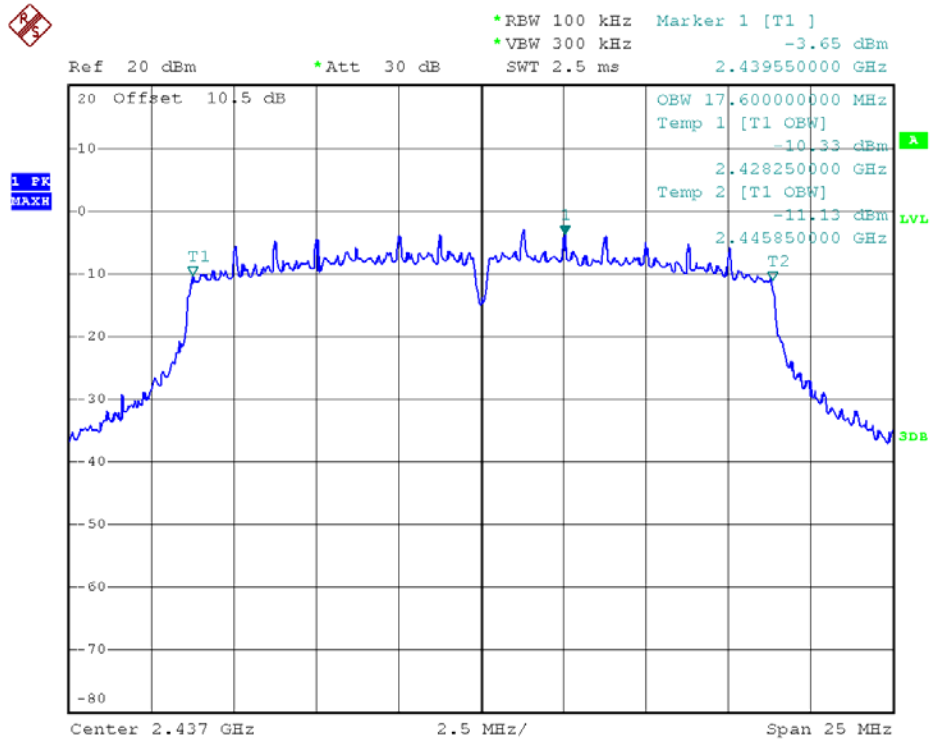

802.11 n20 - 99% Bandwidth Plot on channel 11

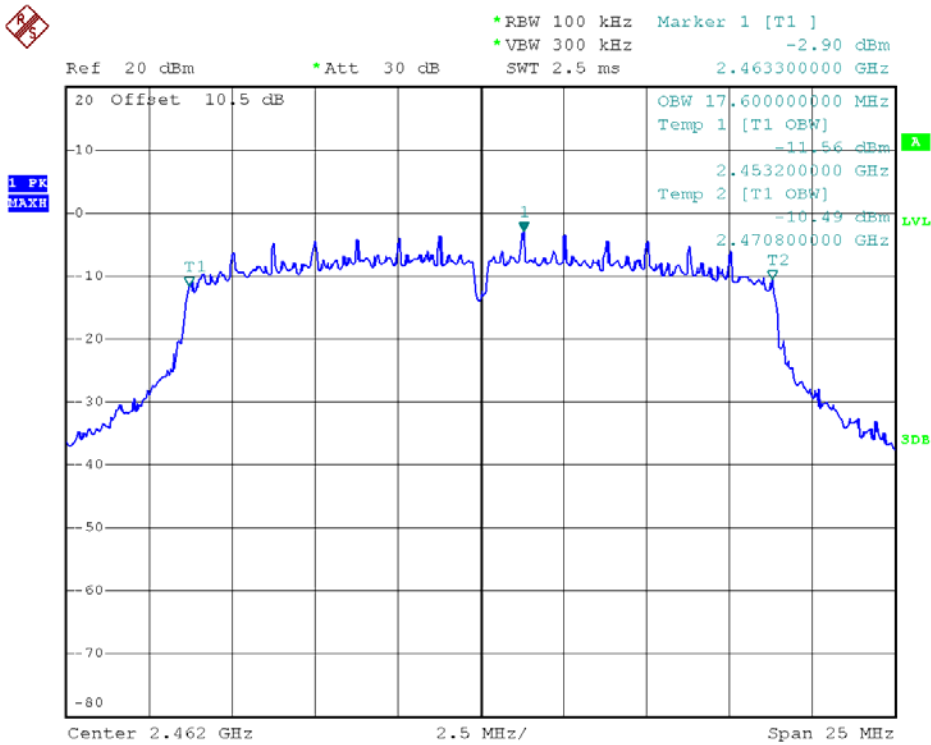

2.3.7. Conducted Band Edges and Spurious Emissions


2.3.8. Limit of Conducted Band Edges and Spurious Emissions

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

2.3.9. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.


2.3.10. Test Setup

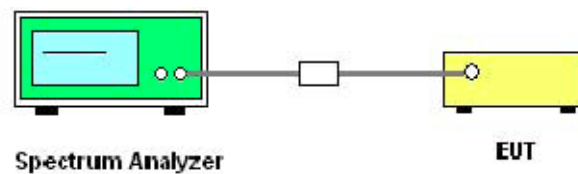


2.3.11. Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


2.3.12. Test Result (Plots) of Conducted Band Edges

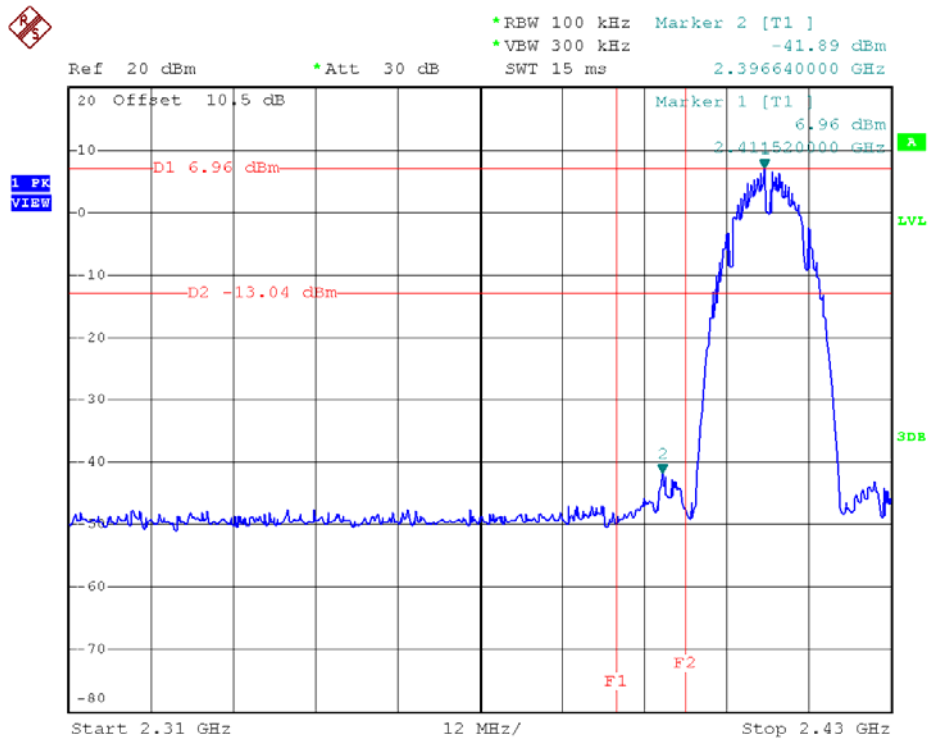


802.11b - Low Band Edge Plot on Channel 1

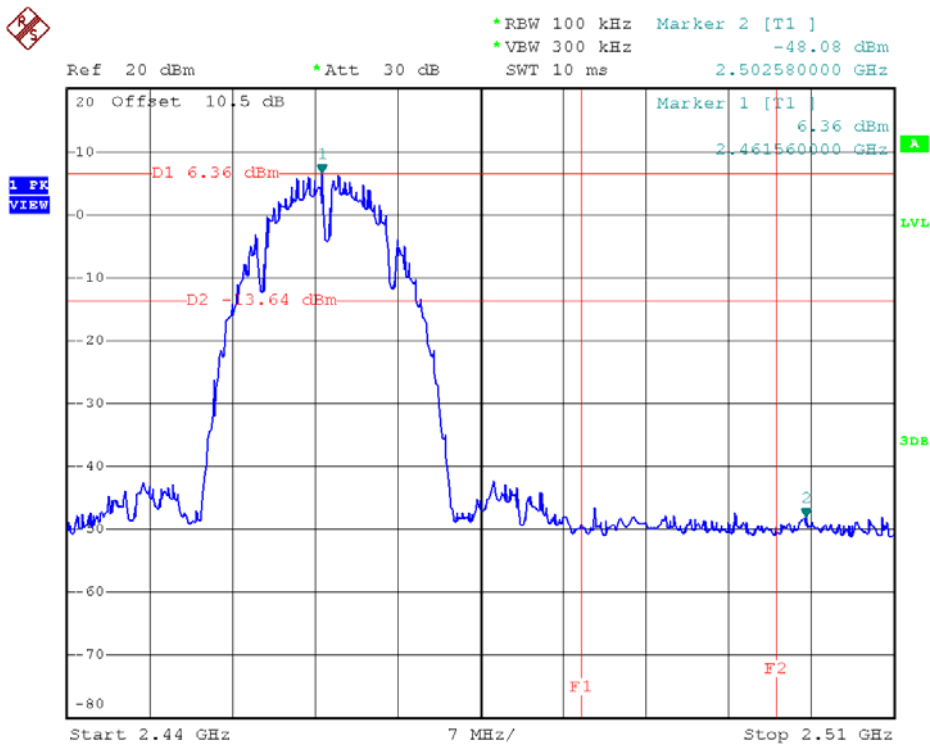


802.11b - High Band Edge Plot on Channel 11

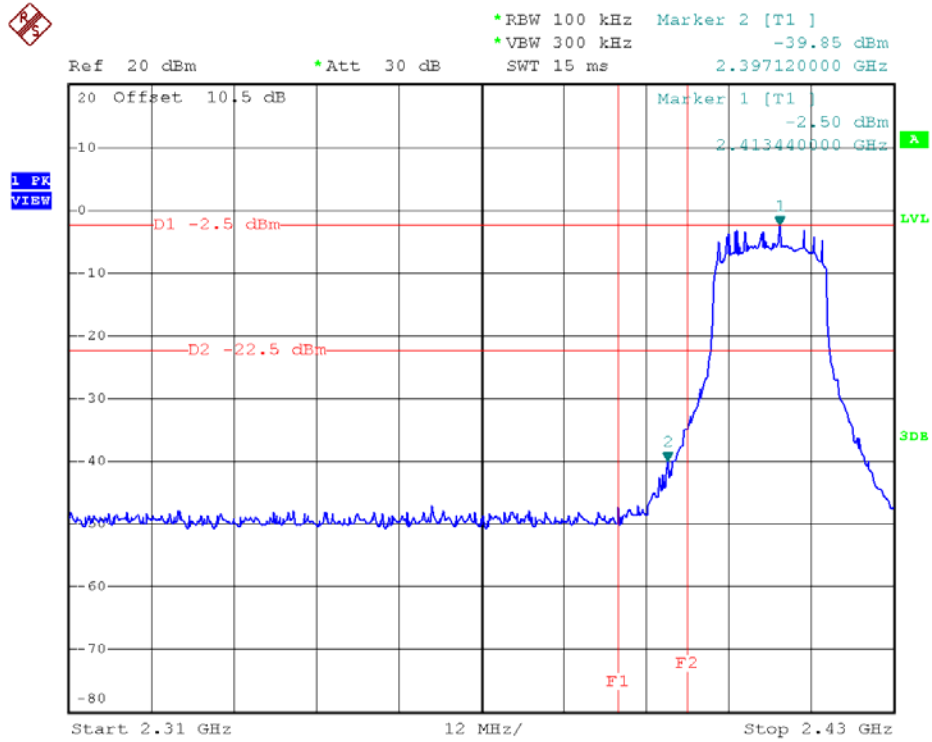


802.11g - Low Band Edge Plot on Channel 1

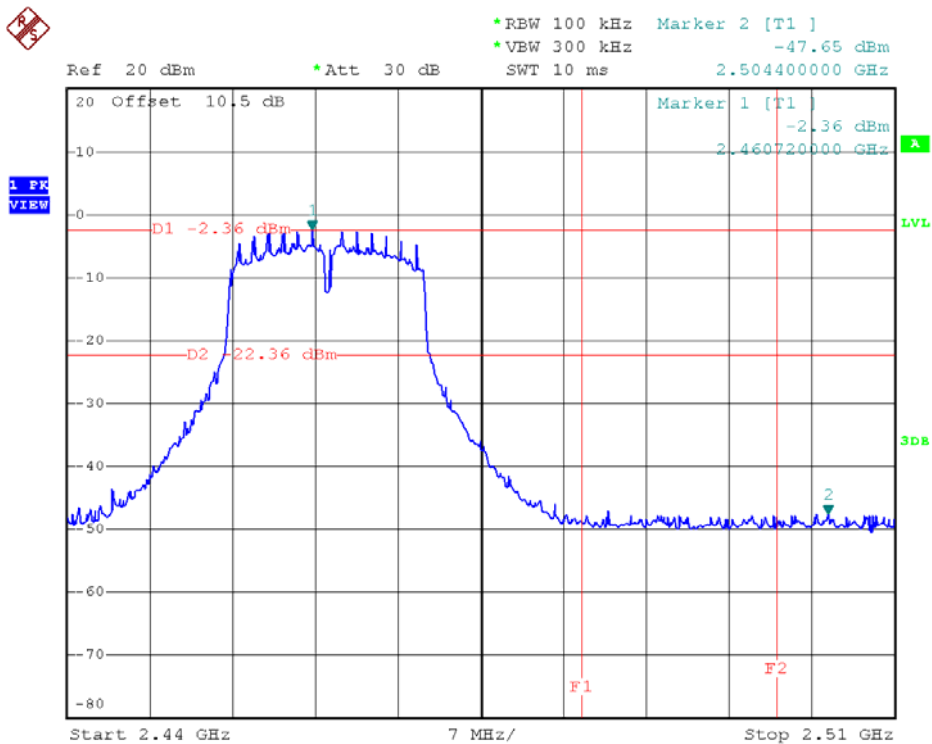

802.11g - High Band Edge Plot on Channel 11

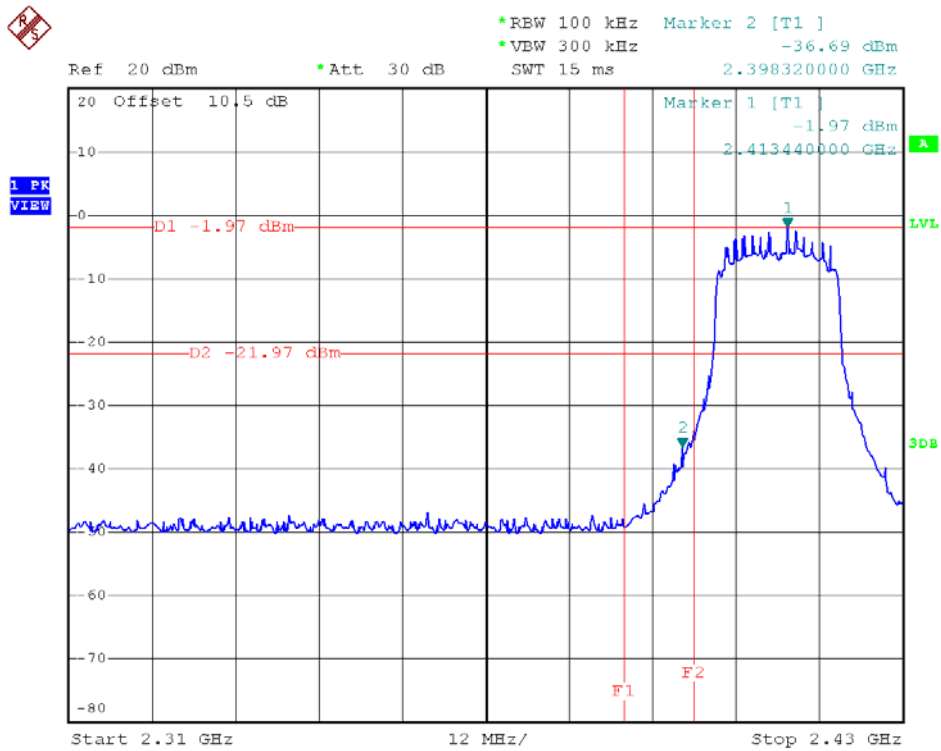

802.11n20 - Low Band Edge Plot on Channel 1

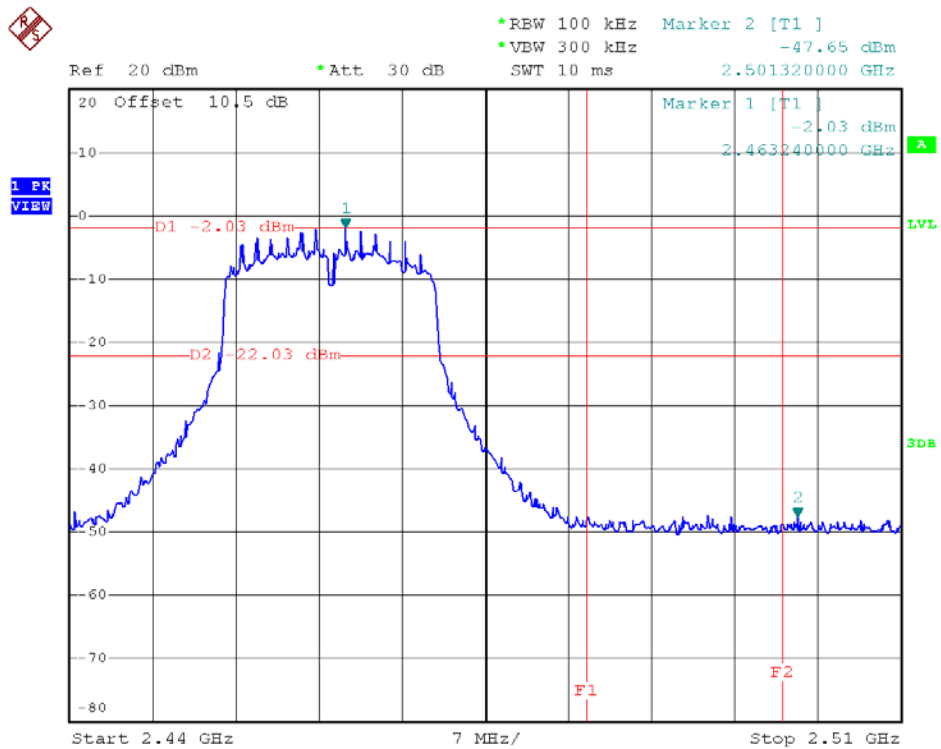


802.11n20 - High Band Edge Plot on Channel 11


2.3.13. Test Result (Plots) of Conducted Spurious Emission

Note: For 9 kHz to 30MHz the amplitude of conducted spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11b - Conducted Spurious Emission Plot on channel 1

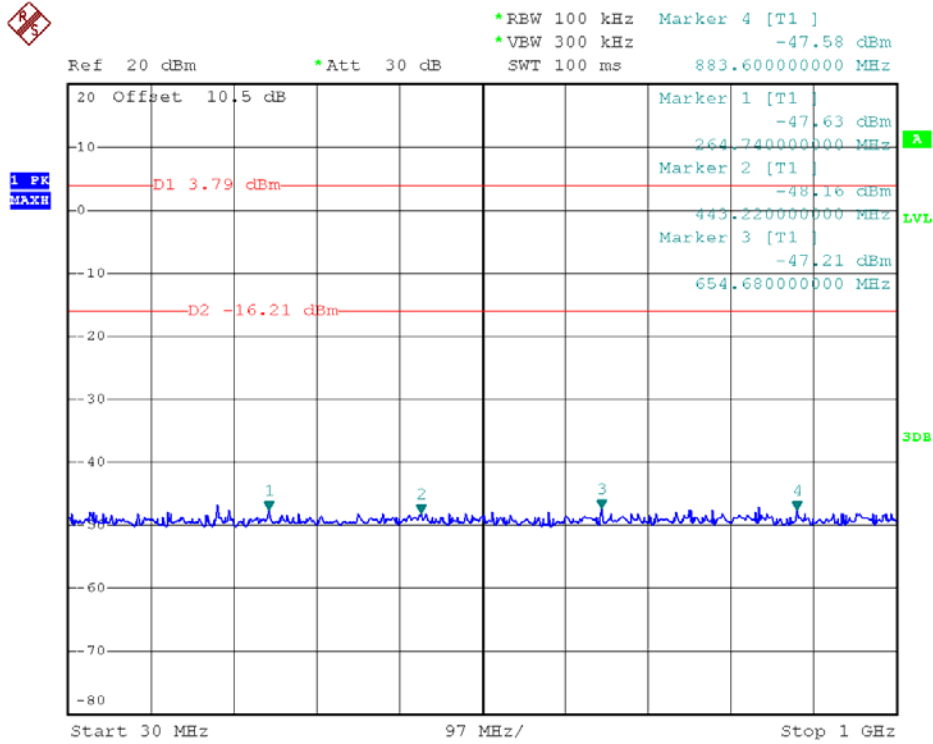


Channel = 1, 30MHz to 1GHz

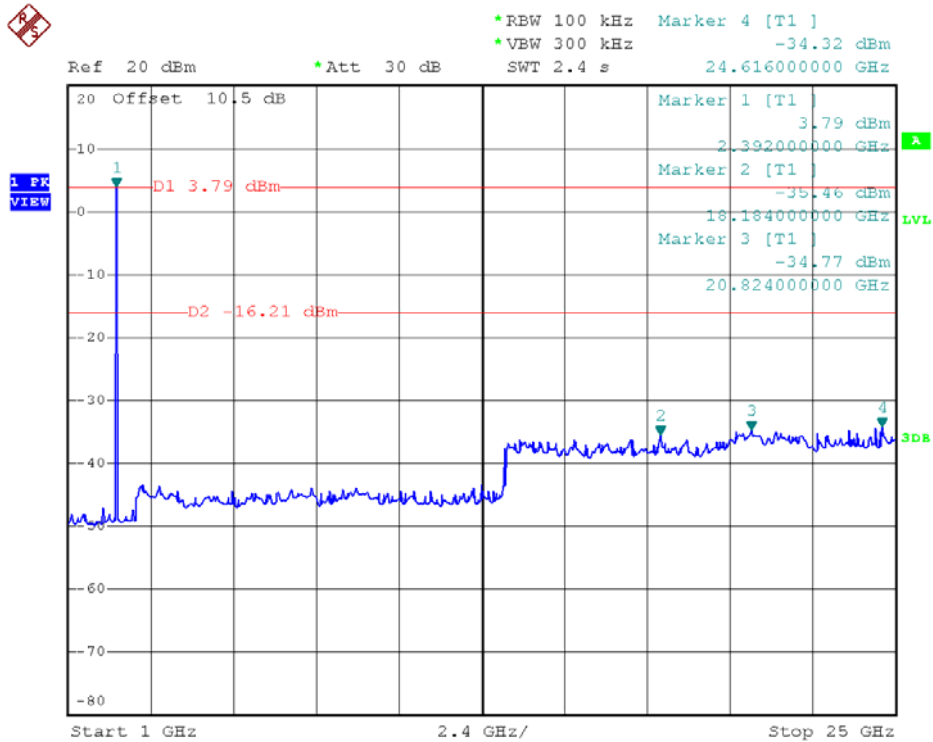


Channel = 1, 1GHz to 25GHz

802.11b - Conducted Spurious Emission Plot on channel 6

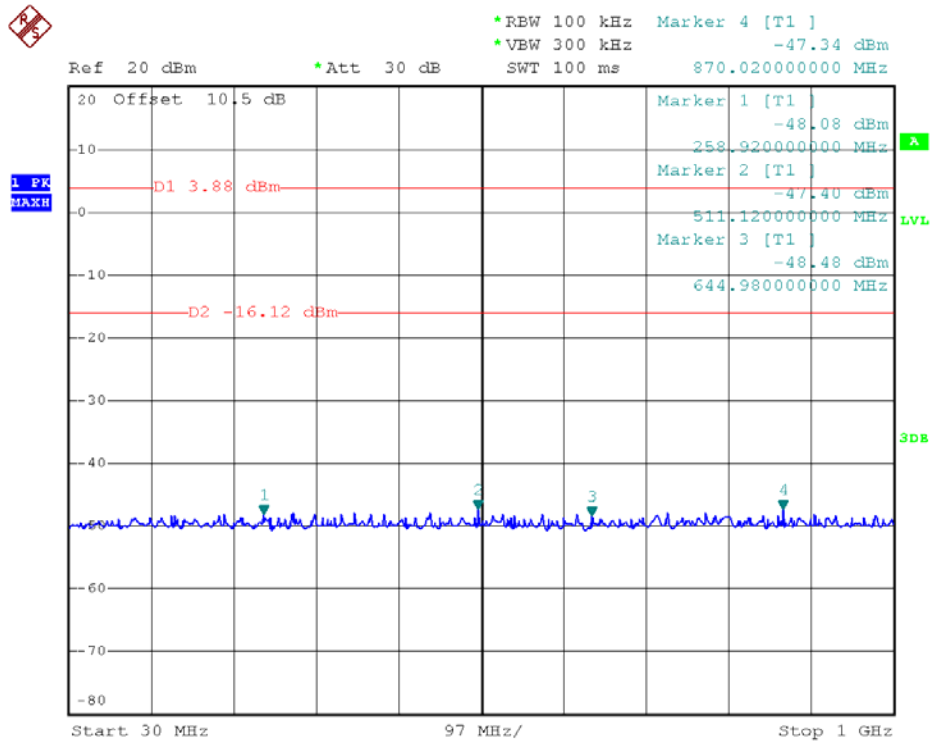


Channel = 1, 30MHz to 1GHz

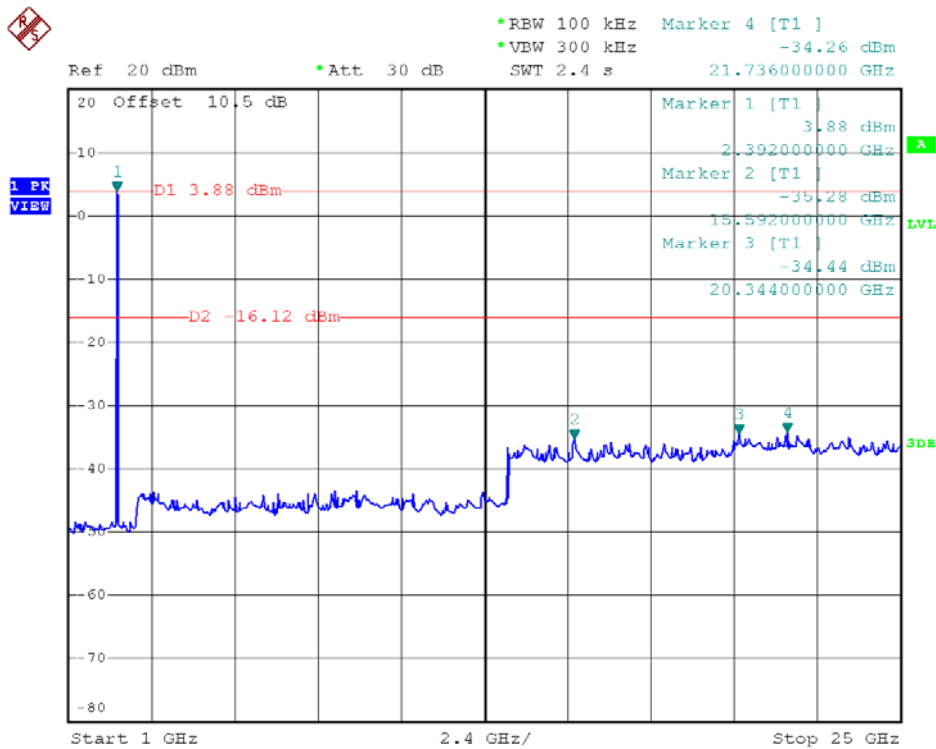


Channel = 1, 1GHz to 25GHz

802.11b - Conducted Spurious Emission Plot on channel 11

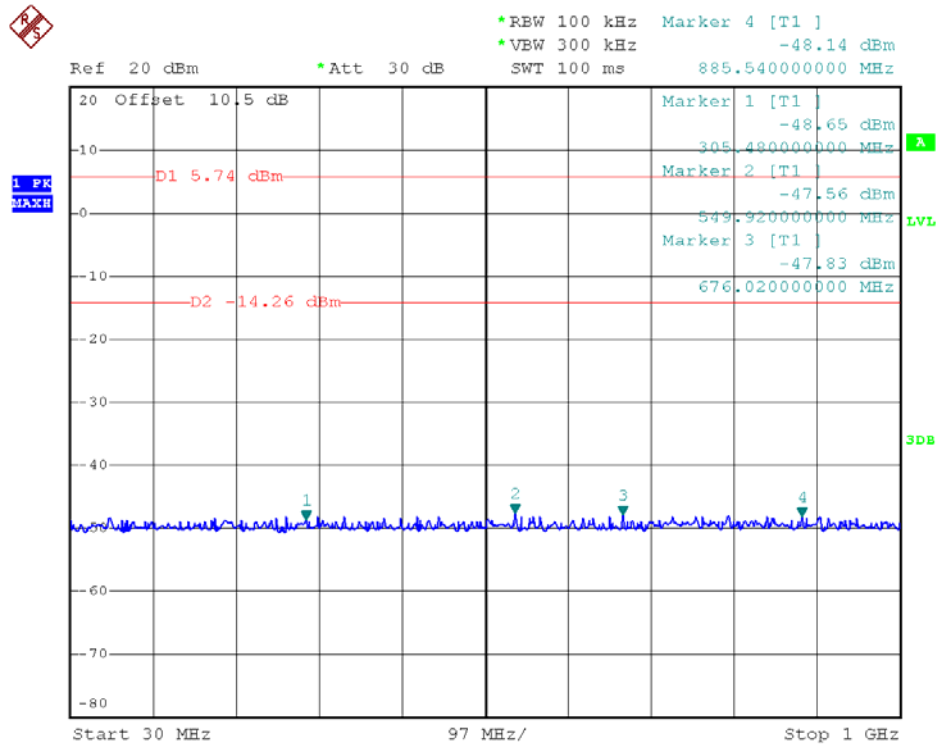


Channel = 1, 30MHz to 1GHz

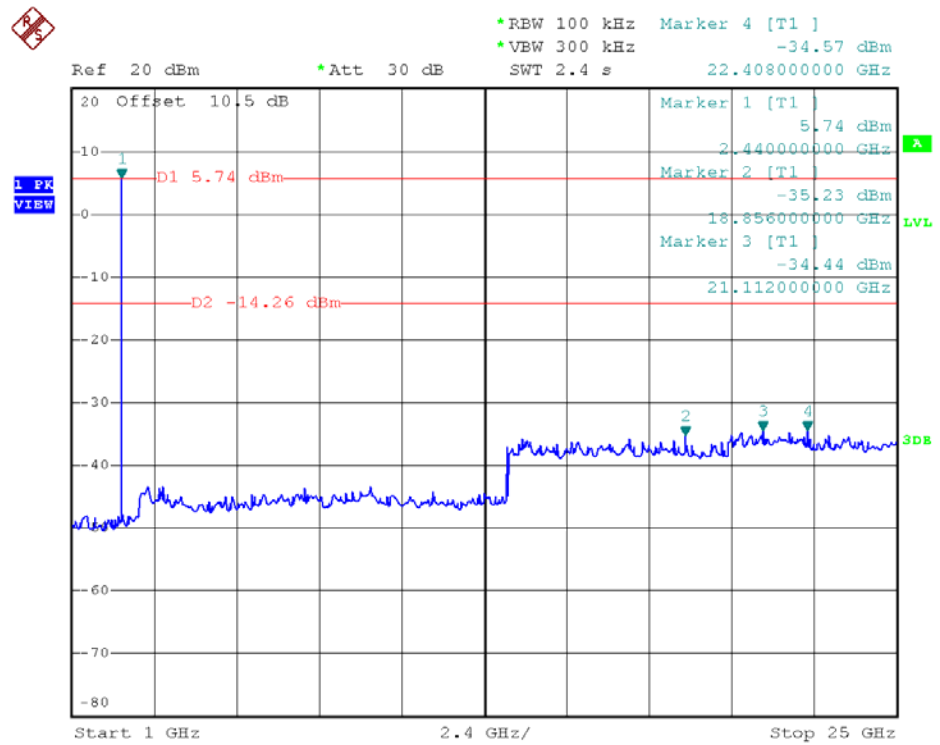


Channel = 1, 1GHz to 25GHz

802.11g - Conducted Spurious Emission Plot on channel 1

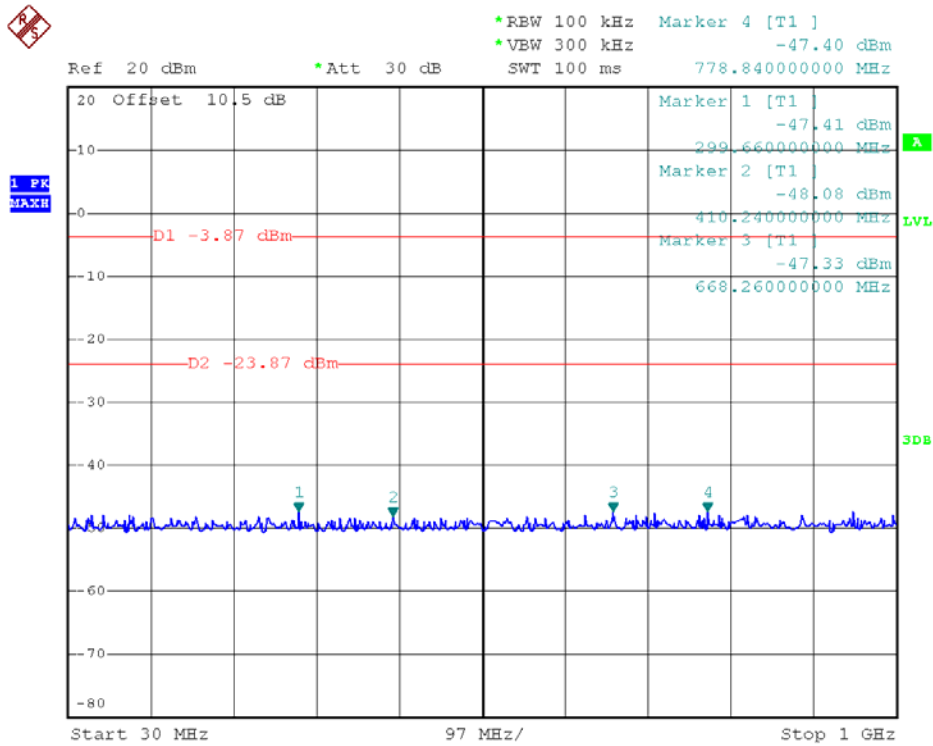


Channel = 1, 30MHz to 1GHz

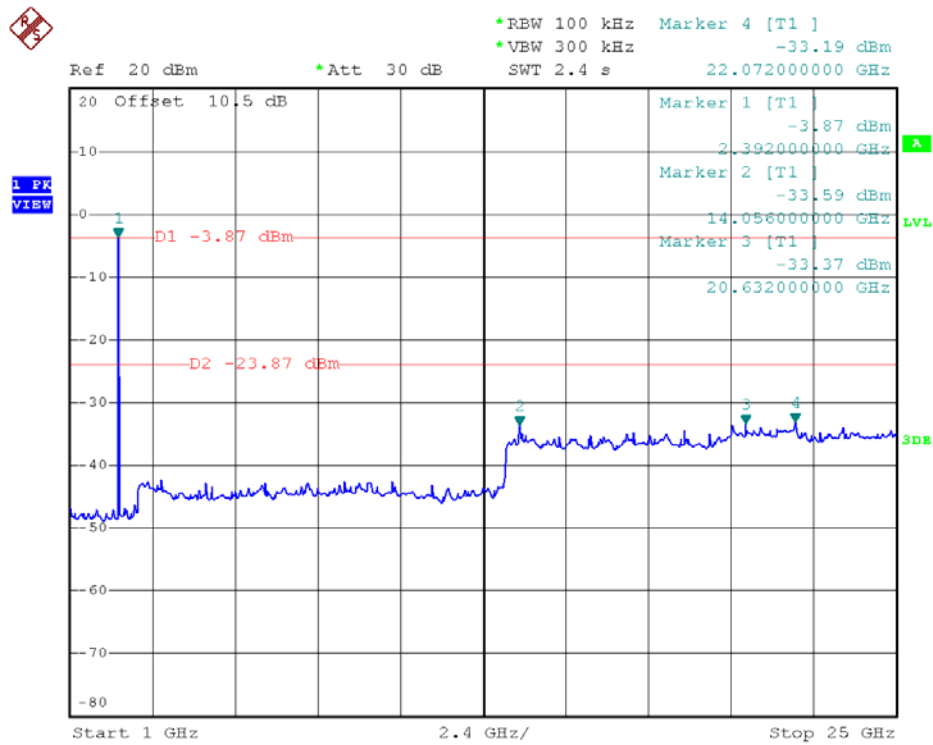


Channel = 1, 1GHz to 25GHz



802.11g - Conducted Spurious Emission Plot on channel 6

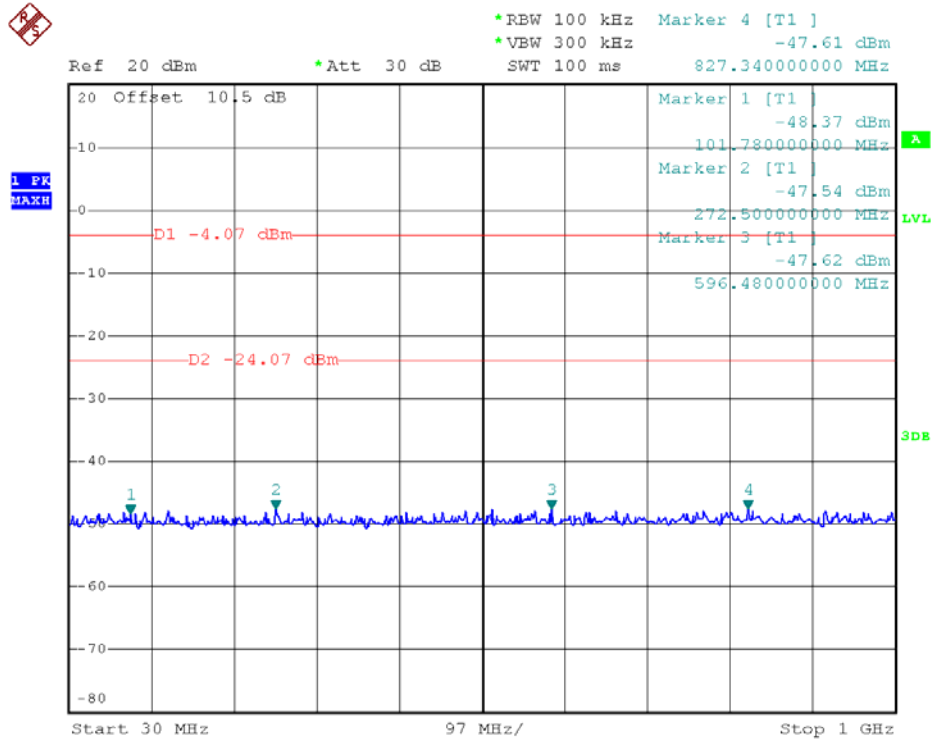


Channel = 1, 30MHz to 1GHz

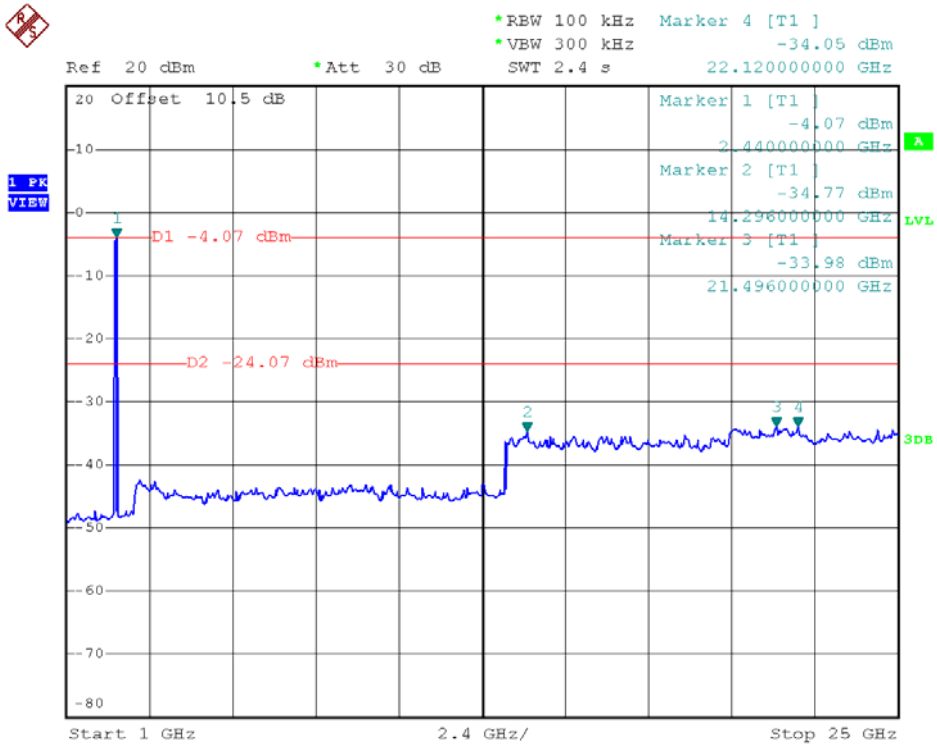


Channel = 1, 1GHz to 25GHz

802.11g - Conducted Spurious Emission Plot on channel 11

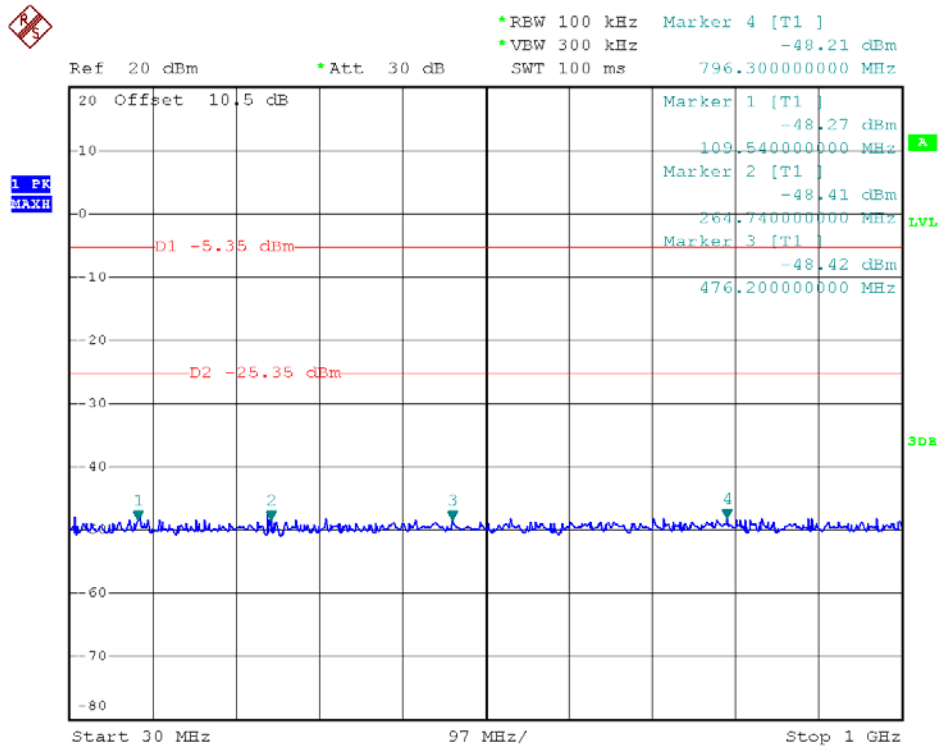


Channel = 1, 30MHz to 1GHz

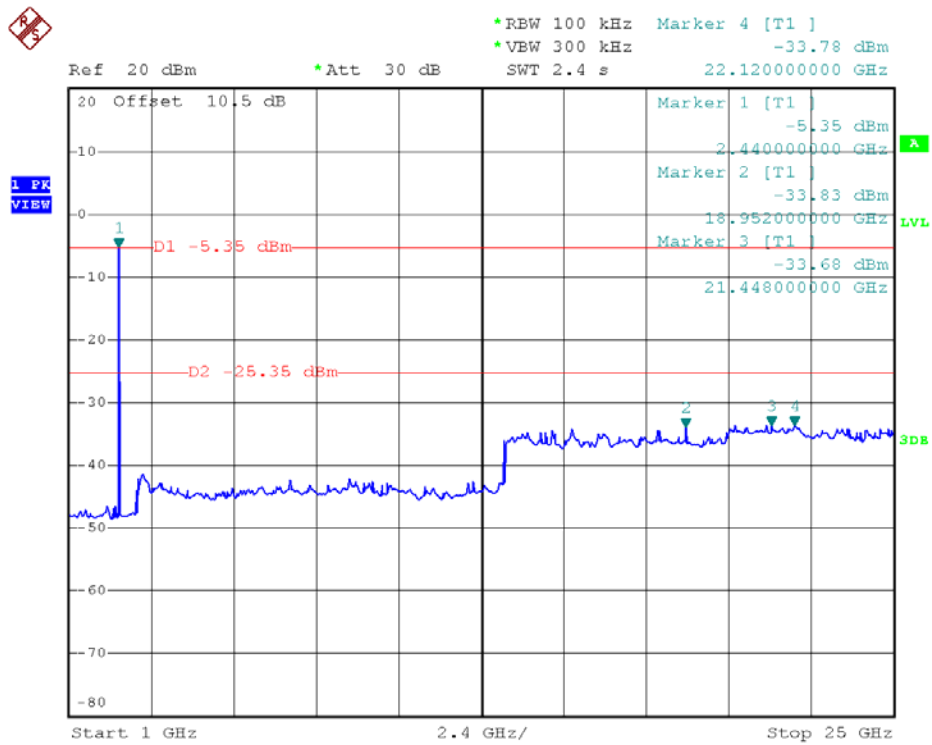


Channel = 1, 1GHz to 25GHz

802.11n20 - Conducted Spurious Emission Plot on channel 1

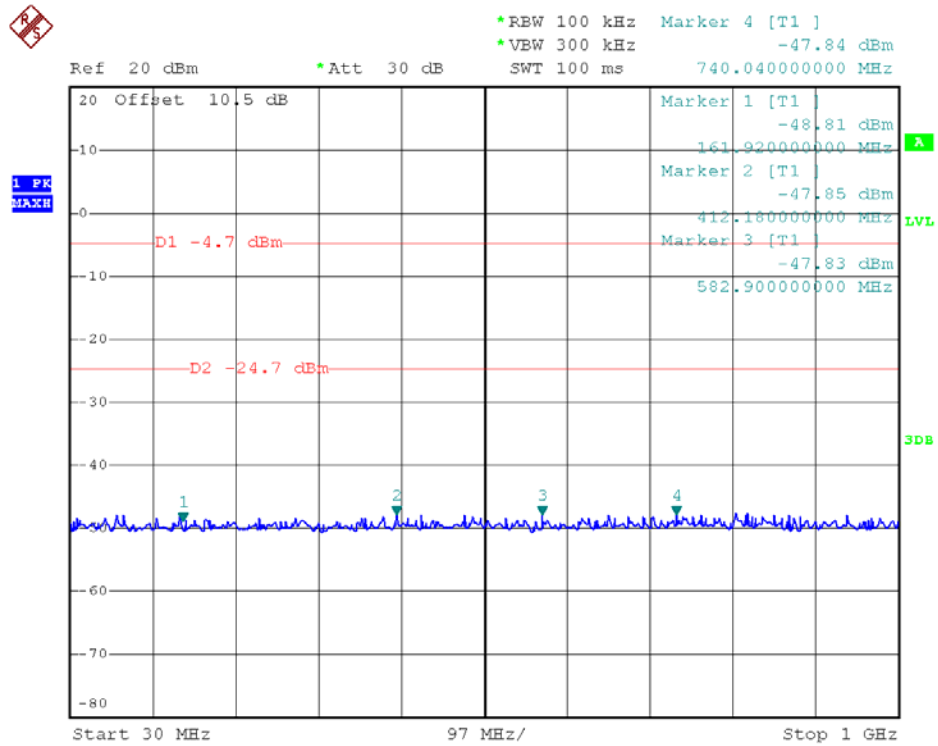


Channel = 1, 30MHz to 1GHz

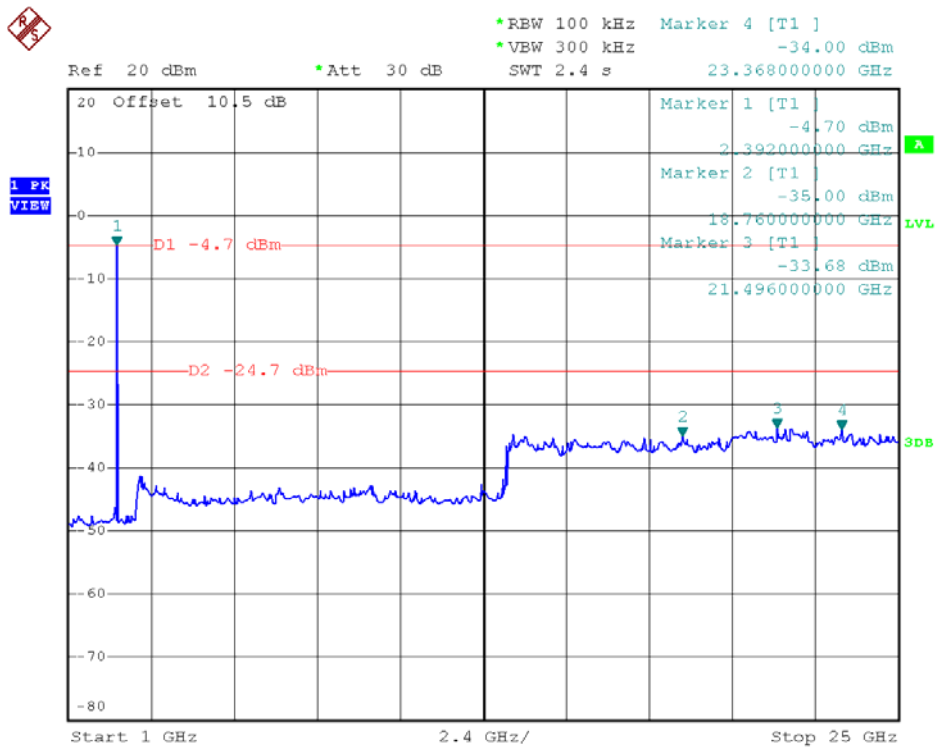


Channel = 1, 1GHz to 25GHz



802.11n20 - Conducted Spurious Emission Plot on channel 6

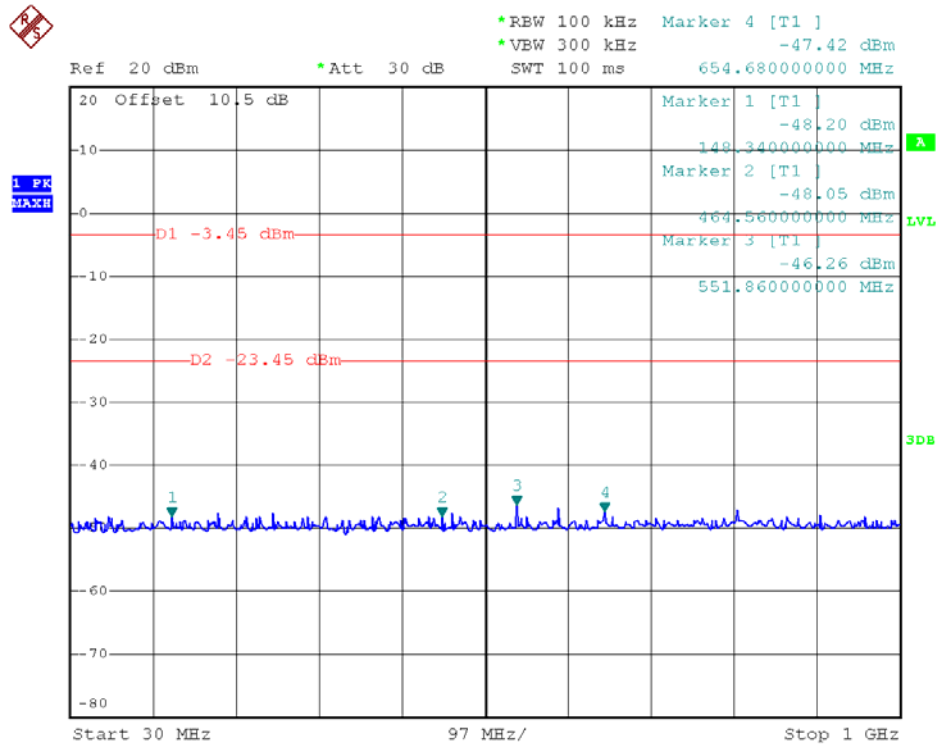


Channel = 1, 30MHz to 1GHz

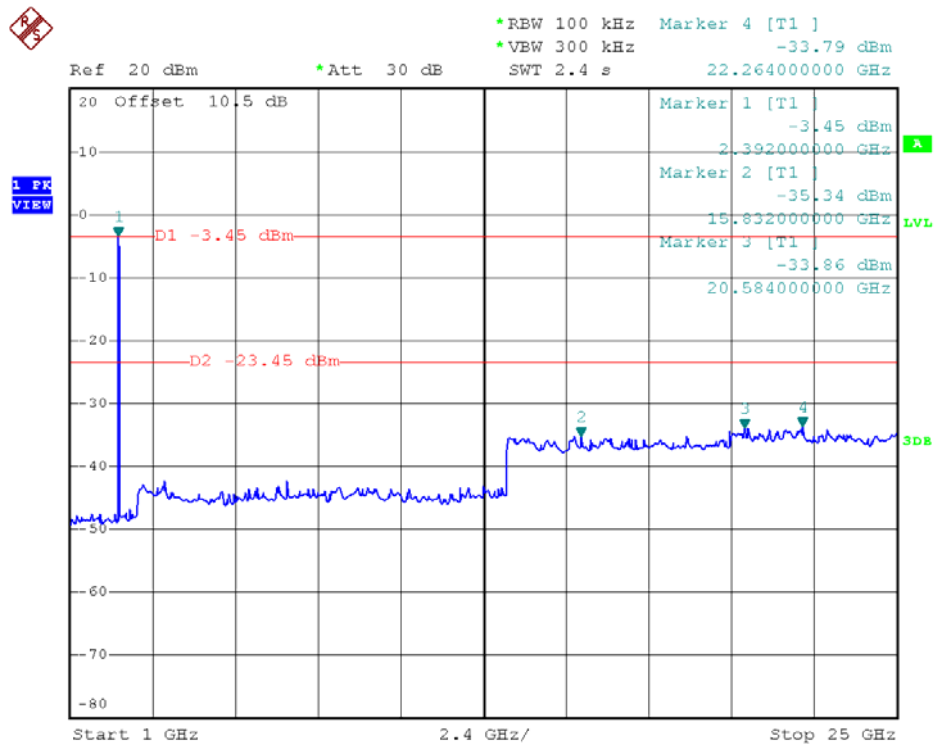


Channel = 1, 1GHz to 25GHz



802.11n20 - Conducted Spurious Emission Plot on channel 11

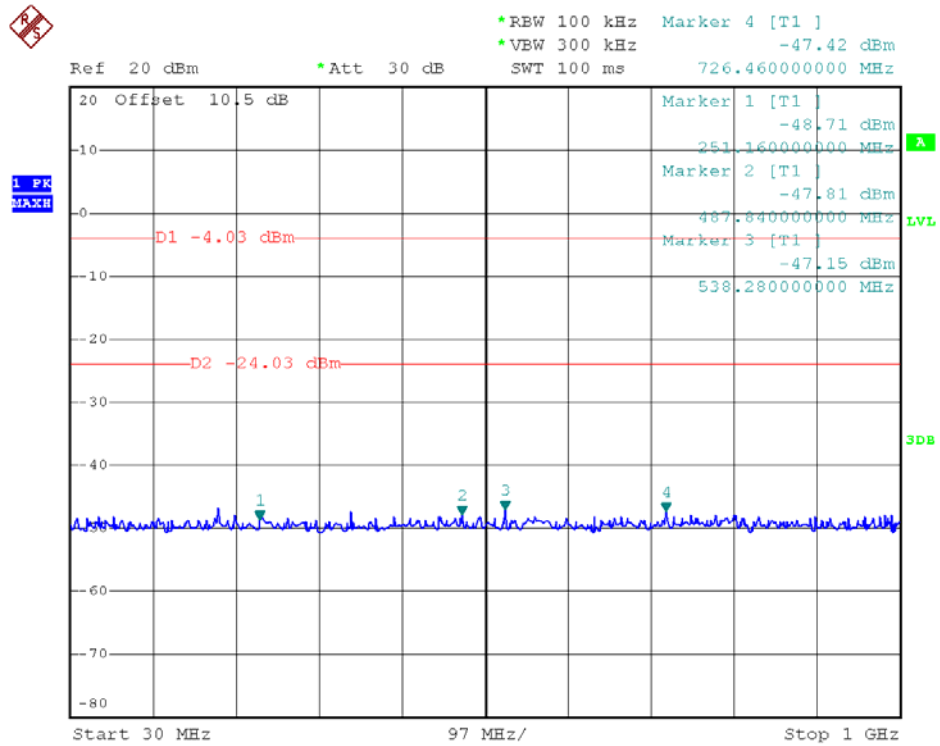

Channel = 1, 30MHz to 1GHz

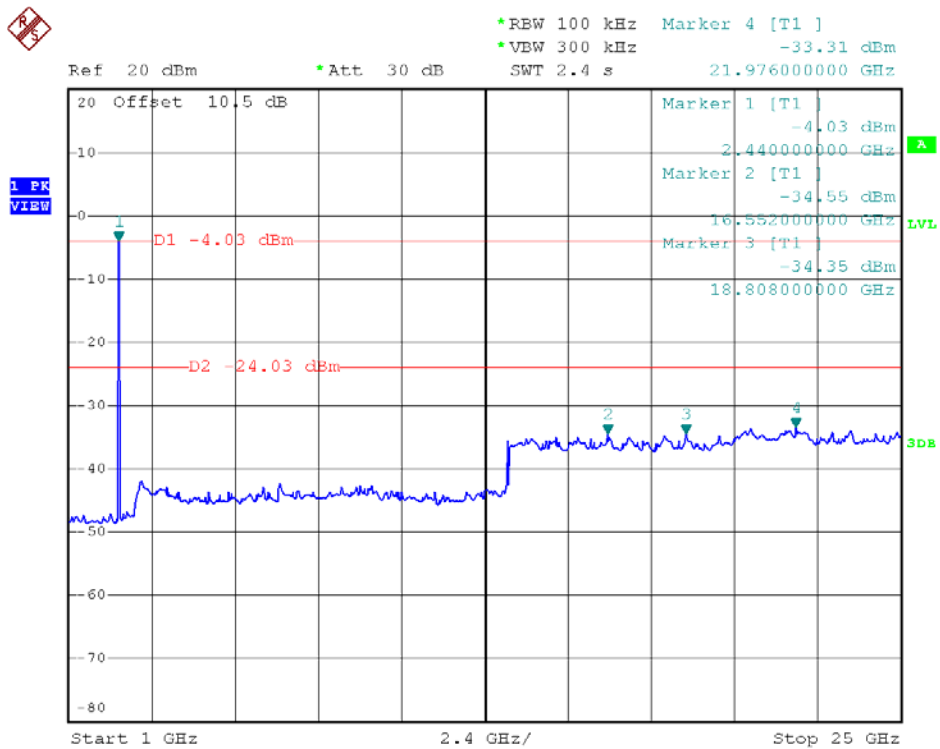

Channel = 1, 1GHz to 25GHz

2.4. Power spectral density (PSD)


2.4.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Setup

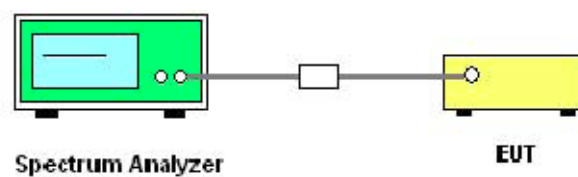

2.4.4. Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.


**2.4.5. Test Results of Power spectral density**

| Spectral power density (dBm) | | | | | |
|---------------------------------------|---------|-----------------|----------------|------------------|---------|
| Test mode | Channel | Frequency (MHz) | PSD/3kHz (dBm) | Limit (dBm/3kHz) | Verdict |
| 802.11b | 1 | 2412 | -7.42 | 8 | PASS |
| | 6 | 2437 | -8.08 | | PASS |
| | 11 | 2462 | -8.02 | | PASS |
| 802.11g | 1 | 2412 | -16.85 | | PASS |
| | 6 | 2437 | -16.04 | | PASS |
| | 11 | 2462 | -15.81 | | PASS |
| 802.11n20 | 1 | 2412 | -16.90 | | PASS |
| | 6 | 2437 | -15.75 | | PASS |
| | 11 | 2462 | -17.31 | | PASS |
| Measurement uncertainty: ± 1.3 dB | | | | | |


Note:

1. Measured power density (dBm) has offset with cable loss.


2.4.6. Test Results (plots) of Power spectral density

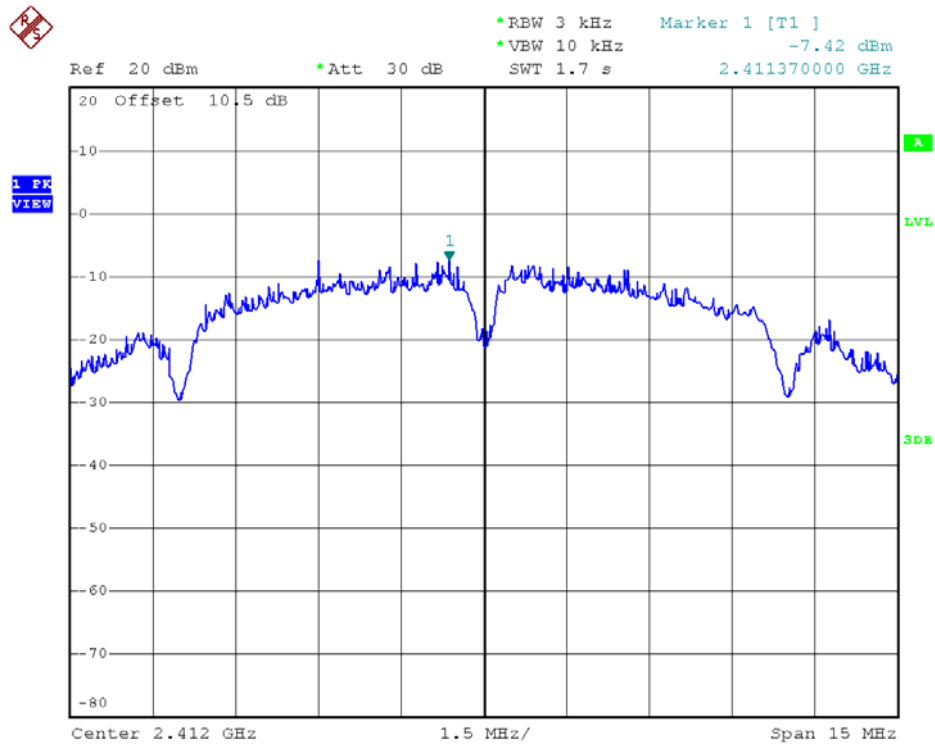


802.11b - Channel 1

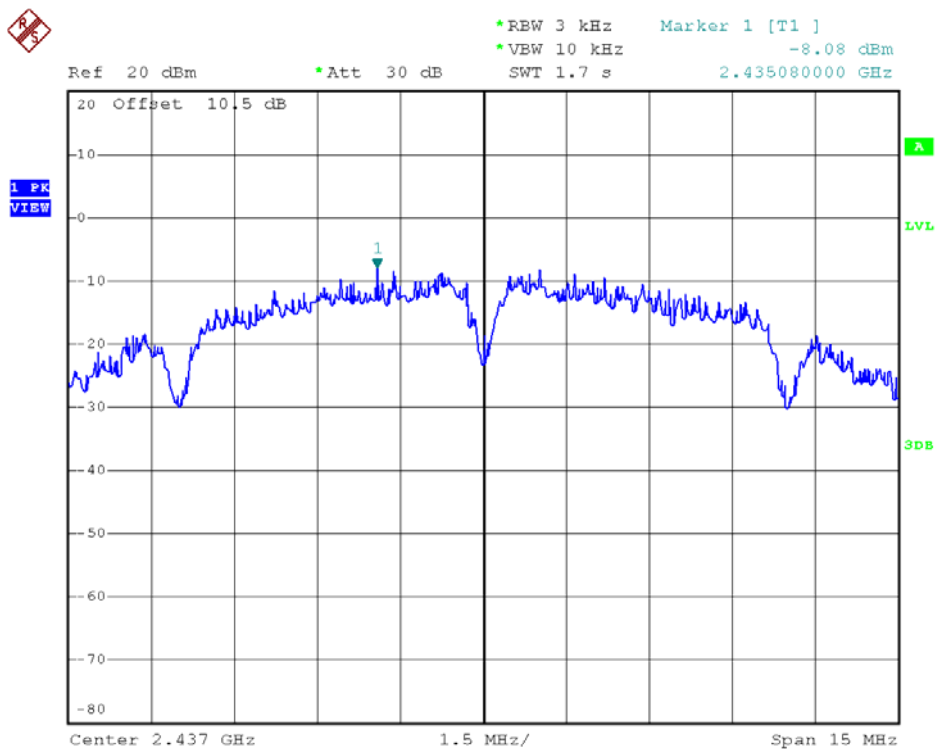


802.11b - Channel 6

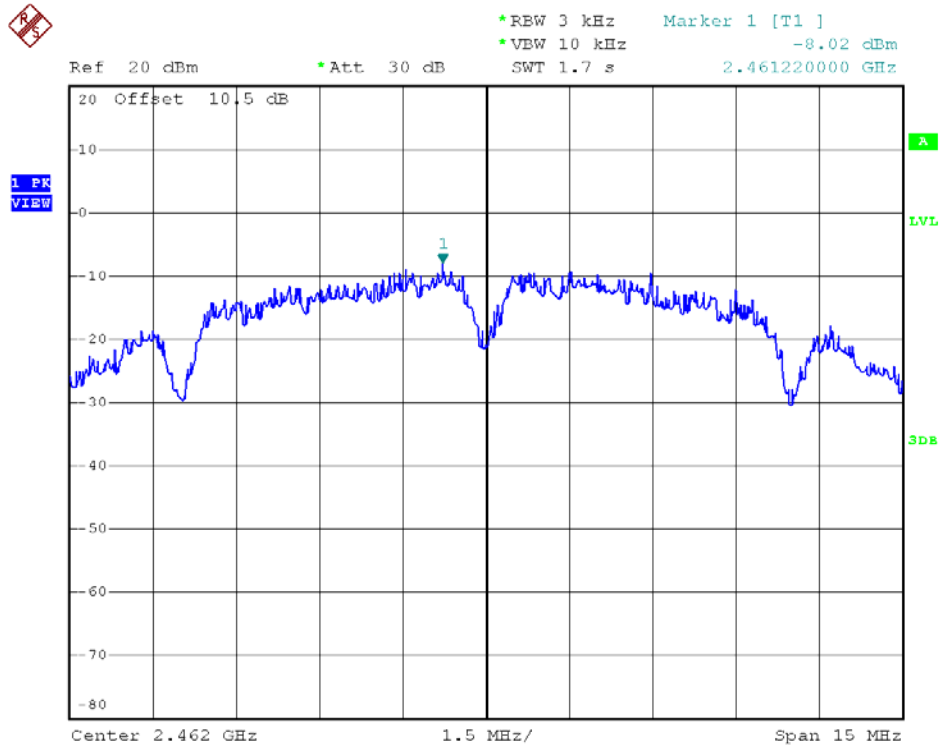


802.11b - Channel 11

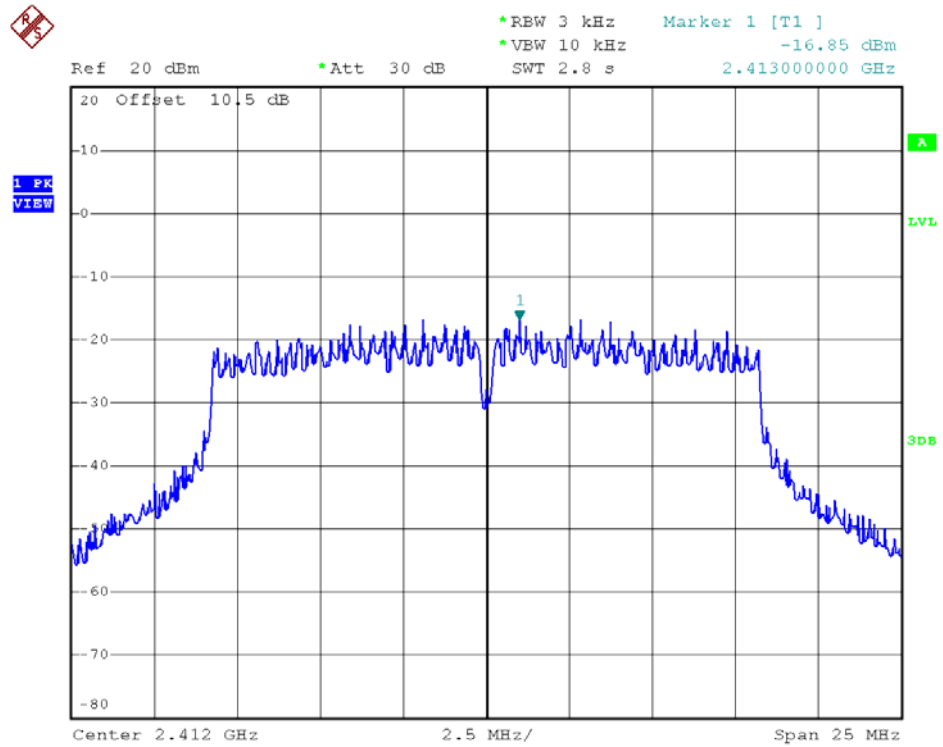


802.11g - Channel 1

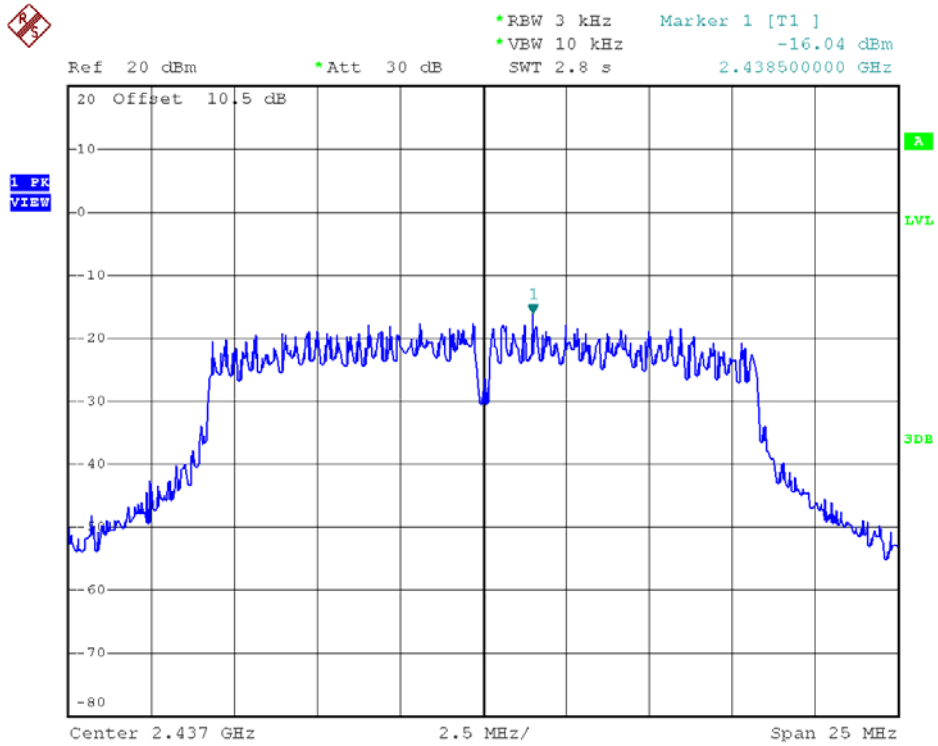


802.11g - Channel 6

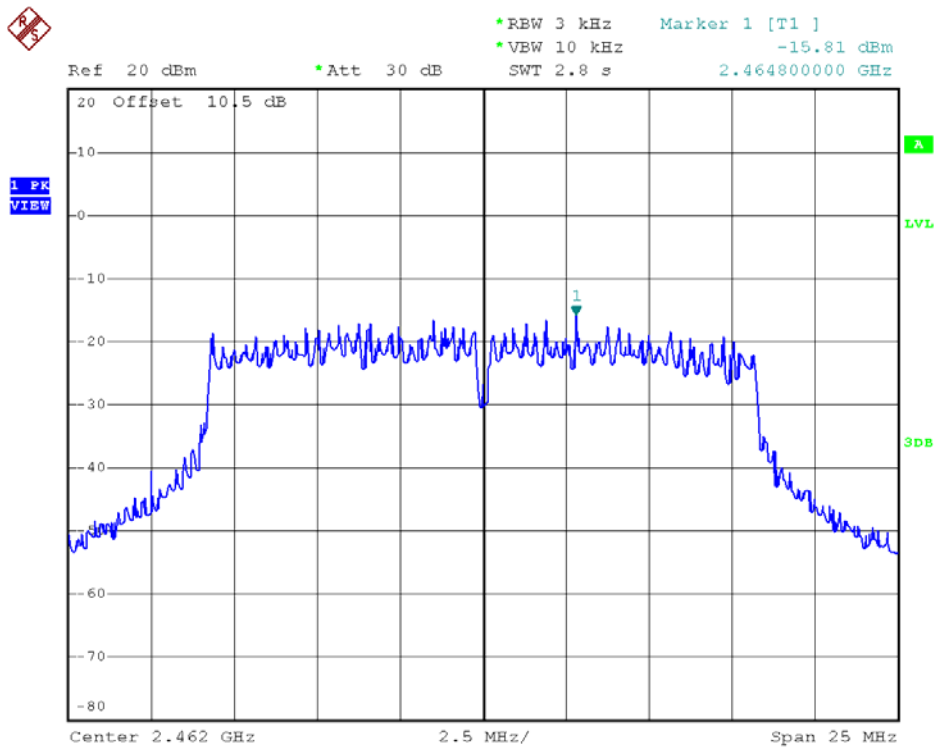


802.11g - Channel 11

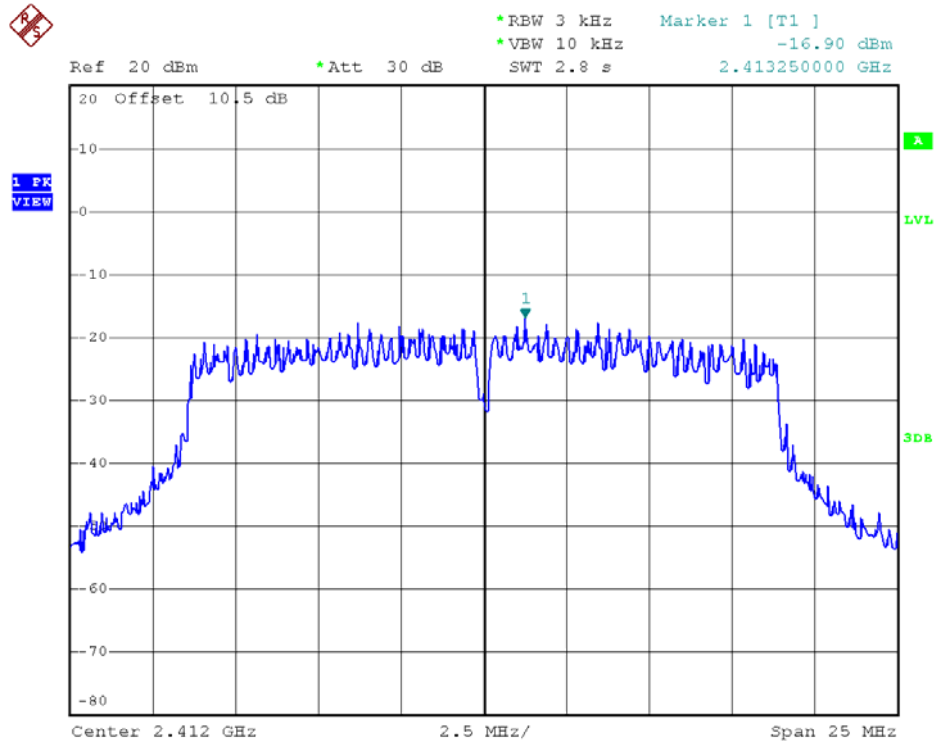

802.11n20 - Channel 1

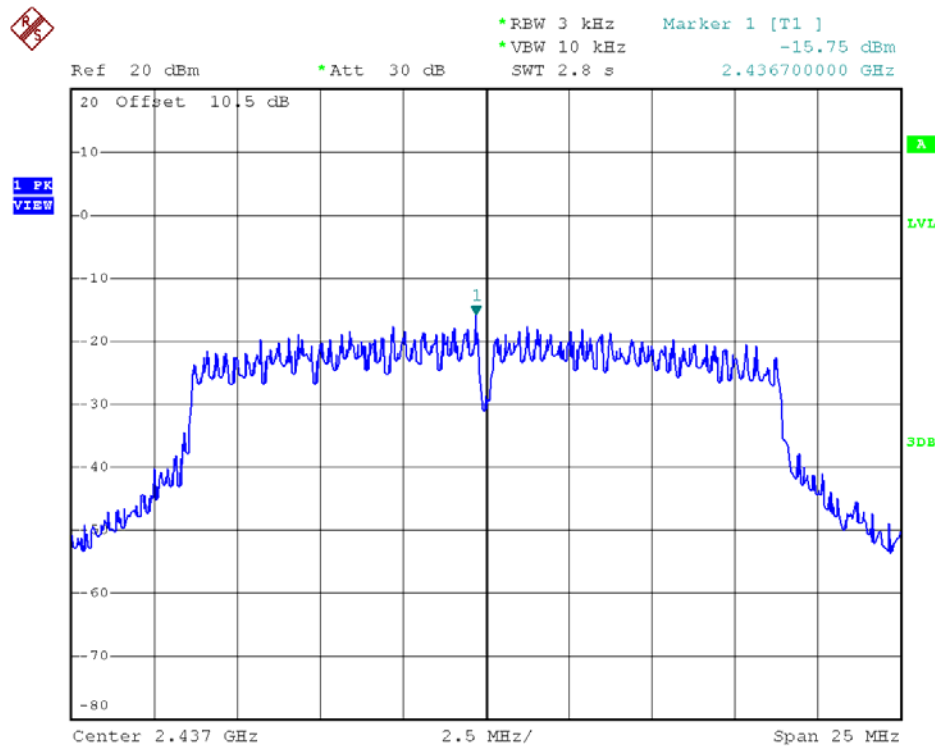

802.11n20 - Channel 6

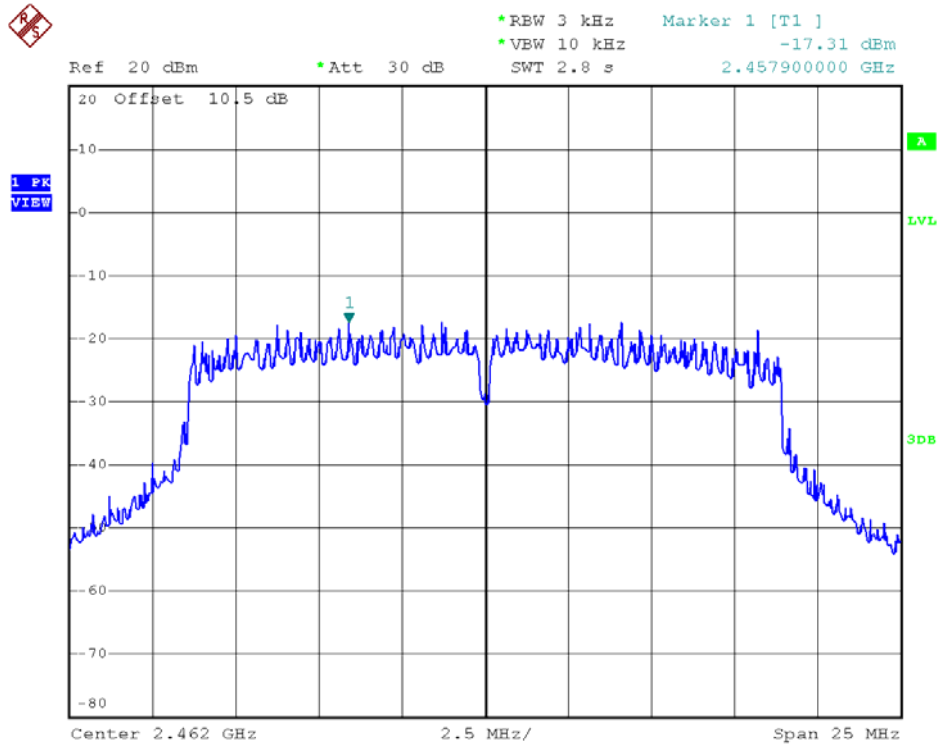

802.11n20 - Channel 11

2.5. Conducted Emission

2.5.1. Limit of Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency range (MHz) | Conducted Limit (dB μ V) | |
|-----------------------|------------------------------|----------|
| | Quai-peak | Average |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 |
| 0.50 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

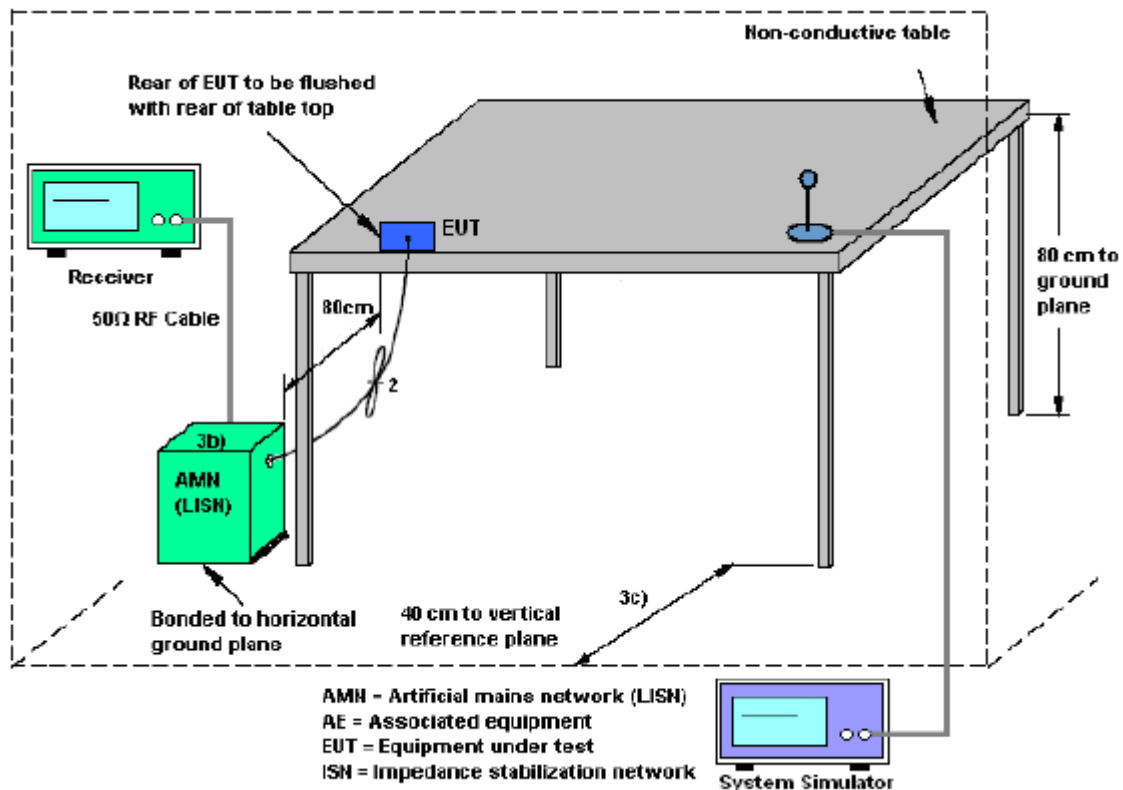




2.5.4. Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


2.5.5. Test Results of Conducted Emission

1. The EUT configuration of the emission tests is WLAN Link + USB Cable (Charging from Adapter).
2. The power adapter support (100~240V AC, 50/60Hz), the EUT was tested at the both available voltages (120, 240V AC), and 60Hz. Only the worst-case mode (120V/60Hz) was record in this report.

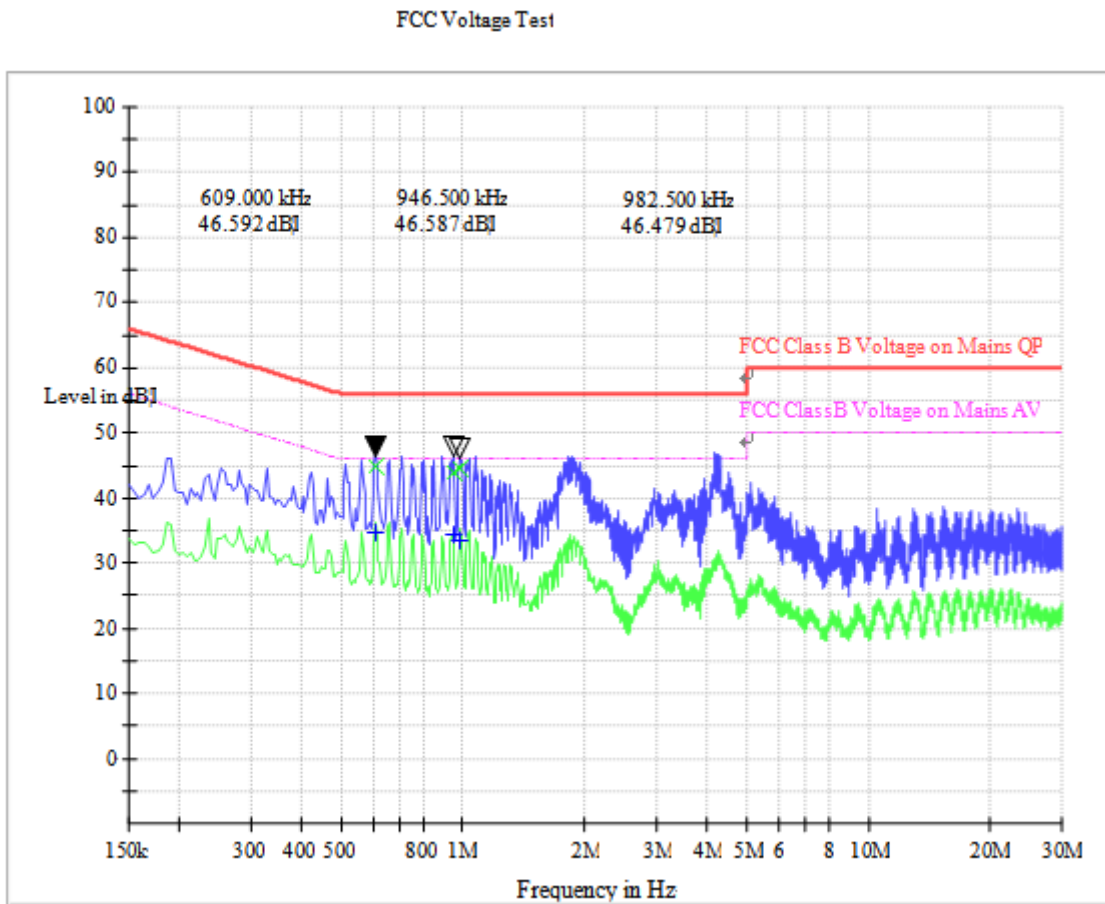

(Plot A: L Phase)

| Conducted Disturbance at Mains Terminals | | | | | |
|--|---------------|--------------------------|-----------------|---------------|--------------------------|
| L Test Data | | | | | |
| QP | | | AV | | |
| Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) |
| 0.609000 | 56.0 | 46.59 | 0.609000 | 46.0 | 35.65 |
| 0.946500 | 56.0 | 46.59 | 0.946500 | 46.0 | 34.59 |
| 0.982500 | 56.0 | 46.48 | 0.982500 | 46.0 | 33.46 |

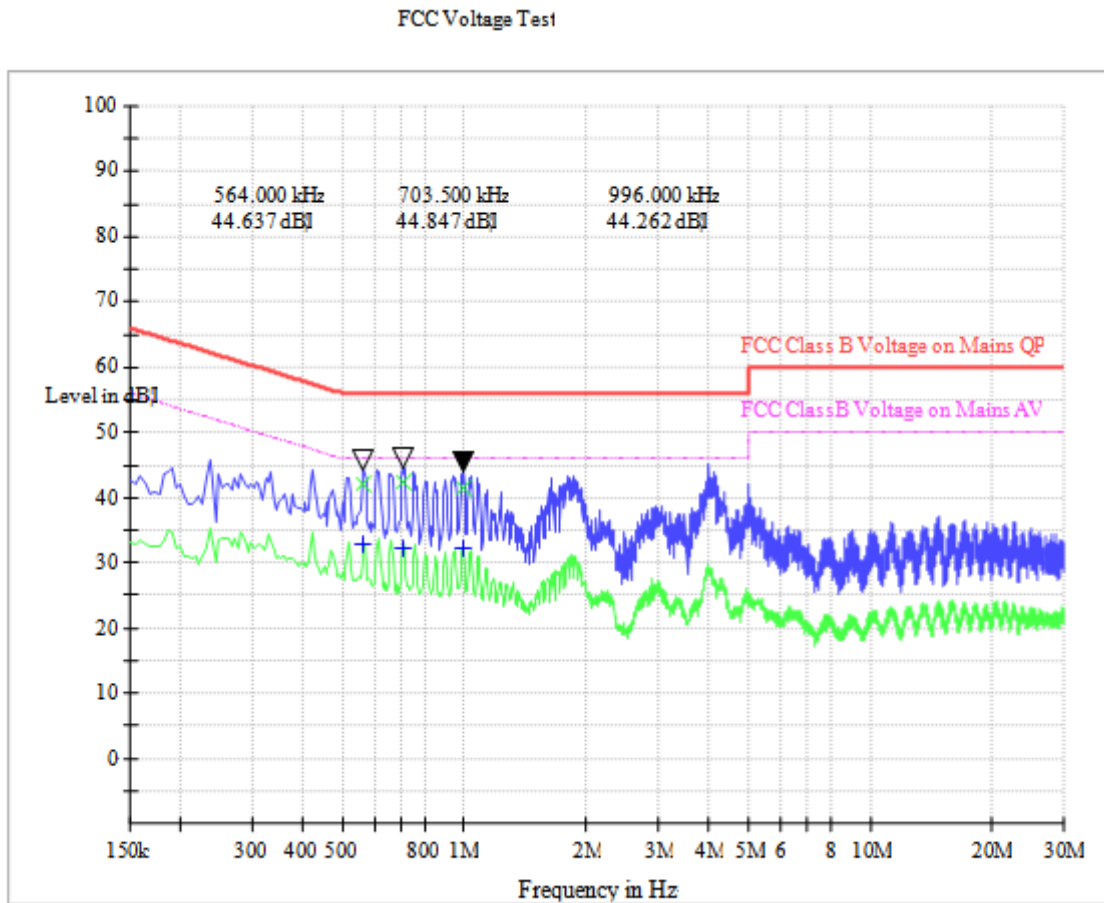

(Plot B: N Phase)

| Conducted Disturbance at Mains Terminals | | | | | |
|--|---------------------|--------------------------------|-----------------|---------------------|--------------------------------|
| N Test Data | | | | | |
| QP | | | AV | | |
| Frequency (MHz) | Limits (dB μ V) | Measurement Value (dB μ V) | Frequency (MHz) | Limits (dB μ V) | Measurement Value (dB μ V) |
| 0.564000 | 56.0 | 44.64 | 0.564000 | 46.0 | 33.70 |
| 0.703500 | 56.0 | 44.85 | 0.703500 | 46.0 | 33.30 |
| 0.996000 | 56.0 | 44.26 | 0.996000 | 46.0 | 33.35 |

Test Result: PASS

2.6. Radiated Band Edge and Spurious Emission

2.6.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Note: Wireless charger configuration was evaluated.


| Frequency (MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Measurement Distance (m) |
|-----------------|---|--------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup


- 1) For radiated emissions from 9kHz to 30MHz

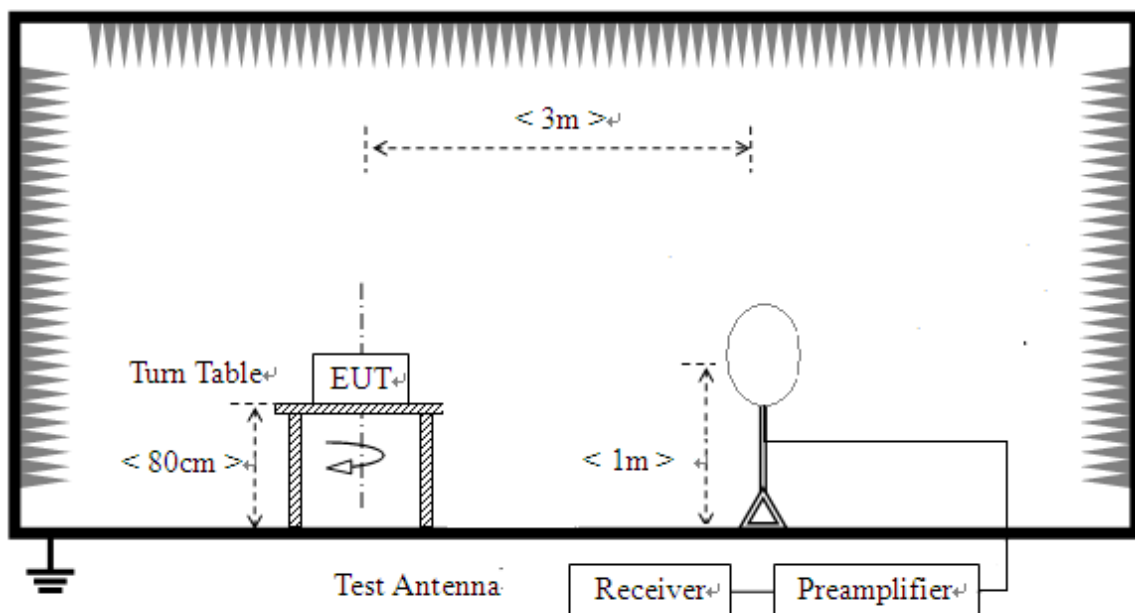

2) For radiated emissions from 30MHz to 1GHz

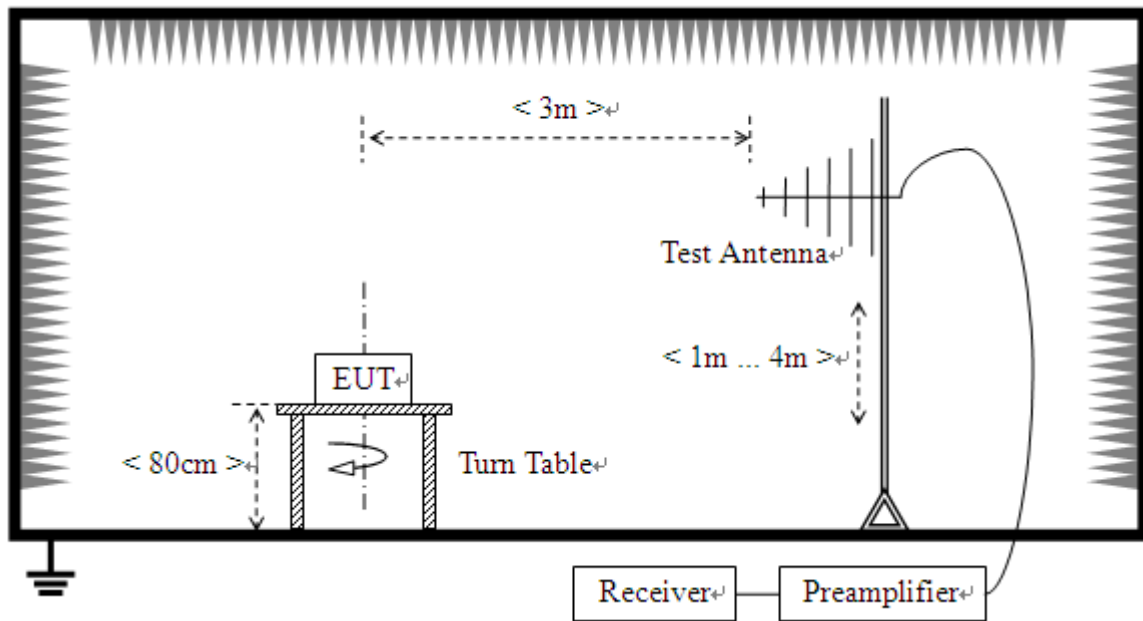

3) For radiated emissions above 1GHz

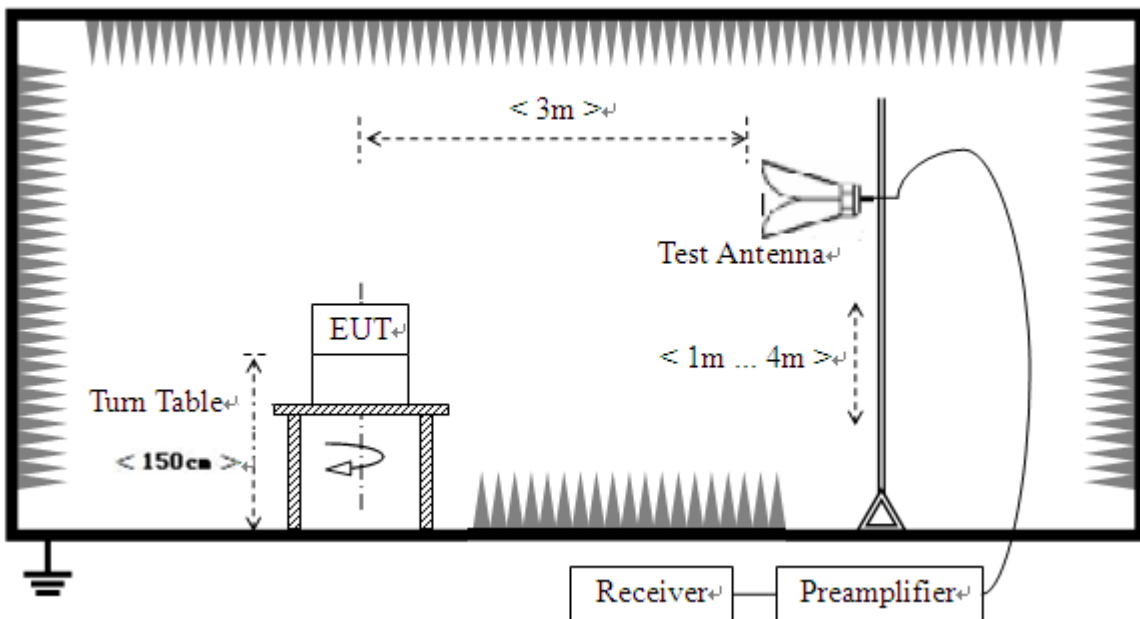

2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes (three orthogonal orientations) of operation were investigated and the worst-case emissions are reported.

2.6.5. Test Results of Radiated Band Edge and Spurious Emission

For 9KHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For 30MHz to 1000 MHz

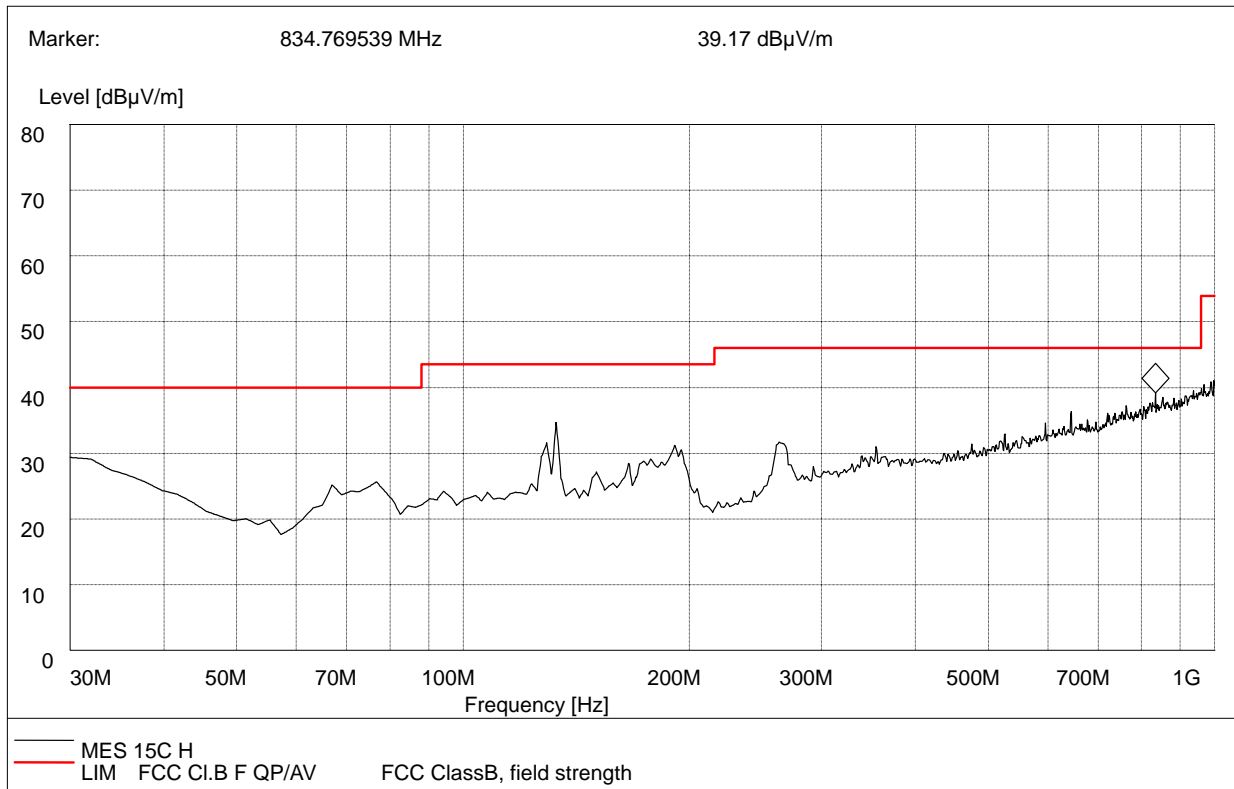

(Plot A: 30MHz to 1GHz, Antenna Horizontal)

| Frequency (MHz) | QuasiPeak (dBµV/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dBµV/m) | Antenna | Verdict |
|-----------------|--------------------|-----------------|---------------------|----------------|------------|---------|
| 133.7200 | 33.17 | 120.000 | 100.0 | 43.5 | Horizontal | Pass |
| 834.7695 | 39.17 | 120.000 | 100.0 | 46.0 | Horizontal | Pass |

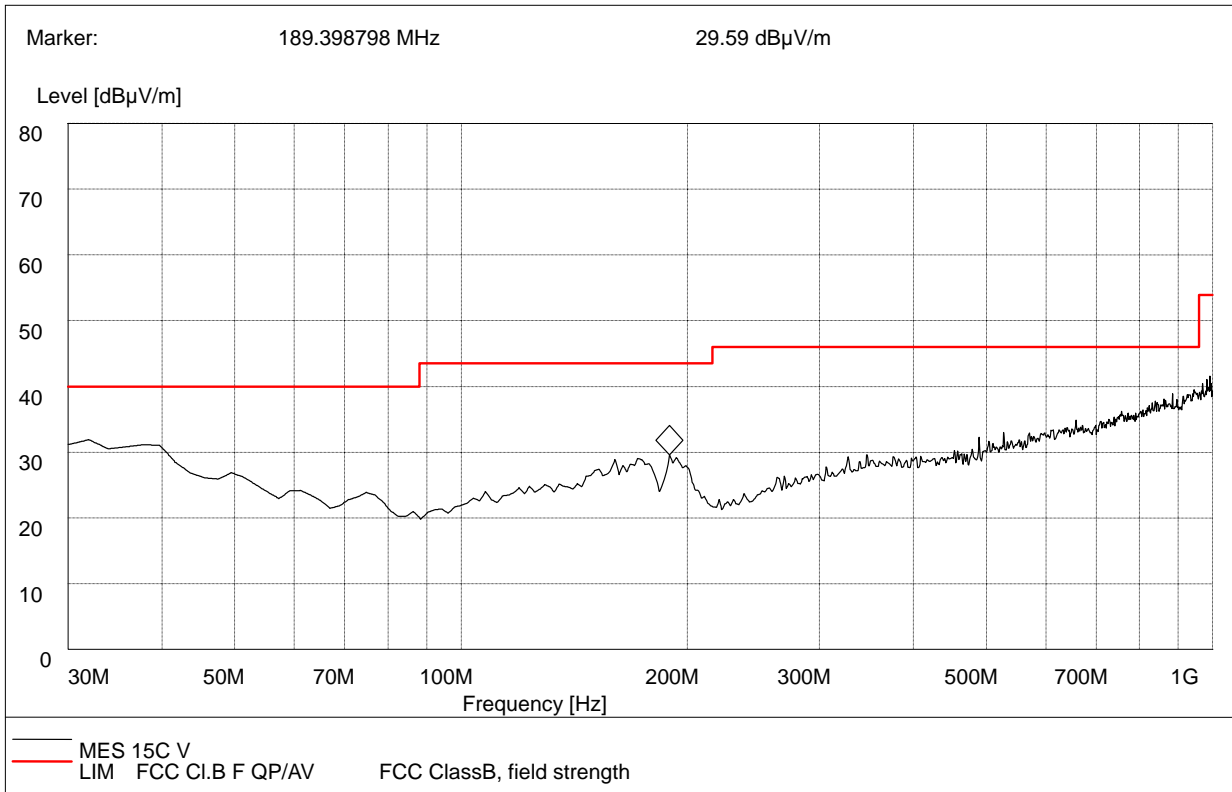

(Plot B: 30MHz to 1GHz, Antenna Vertical)

| Frequency (MHz) | QuasiPeak (dB μ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB μ V/m) | Antenna | Verdict |
|-----------------|--------------------------|-----------------|---------------------|----------------------|----------|---------|
| 32.4900 | 32.41 | 120.000 | 100.0 | 40.0 | Vertical | Pass |
| 189.1500 | 29.43 | 120.000 | 100.0 | 43.5 | Vertical | Pass |

**For 1GHz to 25 GHz****ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b_2412MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | 2390.00 | 56.40 | PK | 74.00 | -17.60 | 1.01 H | 228 | 24.20 | 32.20 |
| 2 | 2390.00 | 43.60 | AV | 54.00 | -10.40 | 1.01 H | 228 | 11.40 | 32.20 |
| 3 | *2412.00 | 101.70 | PK | / | / | 1.03 H | 112 | 69.50 | 32.20 |
| 4 | *2412.00 | 97.70 | AV | / | / | 1.03 H | 112 | 65.50 | 32.20 |
| 5 | 4824.00 | 51.40 | PK | 74.00 | -22.60 | 1.00 H | 254 | 46.10 | 5.30 |
| 6 | 4824.00 | 46.50 | AV | 54.00 | -7.50 | 1.00 H | 254 | 41.20 | 5.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b_2412MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | 2390.00 | 55.4 | PK | 74.00 | -18.6 | 1.11 V | 228 | 23.20 | 32.20 |
| 2 | 2390.00 | 44.3 | AV | 54.00 | -9.7 | 1.11 V | 228 | 12.10 | 32.20 |
| 3 | *2412.00 | 114.7 | PK | / | / | 1.09 V | 112 | 82.50 | 32.20 |
| 4 | *2412.00 | 112.9 | AV | / | / | 1.03 V | 112 | 80.70 | 32.20 |
| 5 | 4824.00 | 54.4 | PK | 74.00 | -19.6 | 1.21 V | 254 | 49.10 | 5.30 |
| 6 | 4824.00 | 43.5 | AV | 54.00 | -10.5 | 1.21 V | 254 | 38.20 | 5.30 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b_2437MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2437.00 | 107.7 | PK | / | / | 1.01 H | 210 | 75.50 | 32.20 |
| 2 | *2437.00 | 106.4 | AV | / | / | 1.01 H | 210 | 74.20 | 32.20 |
| 3 | 4874.00 | 54.2 | PK | 74.00 | -19.8 | 1.03 H | 272 | 48.90 | 5.30 |
| 4 | 4874.00 | 44.0 | AV | 54.00 | -10.0 | 1.03 H | 272 | 38.70 | 5.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b_2437MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2437.00 | 109.00 | PK | / | / | 1.09 V | 112 | 76.80 | 32.20 |
| 2 | *2437.00 | 105.30 | AV | / | / | 1.09 V | 112 | 73.10 | 32.20 |
| 3 | 4874.00 | 56.80 | PK | 74.00 | -17.20 | 1.21 V | 254 | 51.50 | 5.30 |
| 4 | 4874.00 | 46.50 | AV | 54.00 | -7.50 | 1.21 V | 254 | 41.20 | 5.30 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b_2462MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2462.00 | 107.7 | PK | / | / | 1.05 H | 215 | 75.40 | 32.30 |
| 2 | *2462.00 | 105.5 | AV | / | / | 1.05 H | 215 | 73.20 | 32.30 |
| 3 | 2483.50 | 56.8 | PK | 74.00 | -17.2 | 1.05 H | 211 | 24.40 | 32.40 |
| 4 | 2483.50 | 44.5 | AV | 54.00 | -9.5 | 1.05 H | 211 | 12.10 | 32.40 |
| 5 | 4924.00 | 52.1 | PK | 74.00 | -21.9 | 1.45 H | 320 | 46.60 | 5.50 |
| 6 | 4924.00 | 46.3 | AV | 54.00 | -7.7 | 1.45 H | 320 | 40.80 | 5.50 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b_2462MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2462.00 | 114.5 | PK | / | / | 1.05 V | 174 | 82.20 | 32.30 |
| 2 | *2462.00 | 113.8 | AV | / | / | 1.05 V | 174 | 81.50 | 32.30 |
| 3 | 2483.50 | 57.5 | PK | 74.00 | -16.5 | 1.05 V | 177 | 25.10 | 32.40 |
| 4 | 2483.50 | 44.7 | AV | 54.00 | -9.3 | 1.05 V | 177 | 12.30 | 32.40 |
| 5 | 4924.00 | 54.9 | PK | 74.00 | -19.1 | 1.45 V | 201 | 49.40 | 5.50 |
| 6 | 4924.00 | 45.6 | AV | 54.00 | -8.4 | 1.45 V | 201 | 40.10 | 5.50 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g_2412MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | 2390.00 | 56.3 | PK | 74.0 | -17.7 | 1.01 H | 228 | 24.10 | 32.20 |
| 2 | 2390.00 | 43.4 | AV | 54.0 | -10.6 | 1.01 H | 228 | 11.20 | 32.20 |
| 3 | *2412.00 | 102.1 | PK | / | / | 1.03 H | 112 | 69.90 | 32.20 |
| 4 | *2412.00 | 97.6 | AV | / | / | 1.03 H | 112 | 65.40 | 32.20 |
| 5 | 4824.00 | 51.7 | PK | 74.00 | -22.3 | 1.00 H | 254 | 46.40 | 5.30 |
| 6 | 4824.00 | 48.5 | AV | 54.00 | -5.5 | 1.00 H | 254 | 43.20 | 5.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g_2412MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | 2390.00 | 56.1 | PK | 74.0 | -17.9 | 1.11 V | 228 | 23.90 | 32.20 |
| 2 | 2390.00 | 43.4 | AV | 54.0 | -10.6 | 1.11 V | 228 | 11.20 | 32.20 |
| 3 | *2412.00 | 116.9 | PK | / | / | 1.09 V | 112 | 84.70 | 32.20 |
| 4 | *2412.00 | 113.6 | AV | / | / | 1.03 V | 112 | 81.40 | 32.20 |
| 5 | 4824.00 | 54.4 | PK | 74.00 | -19.6 | 1.21 V | 254 | 49.10 | 5.30 |
| 6 | 4824.00 | 44.7 | AV | 54.00 | -9.3 | 1.21 V | 254 | 39.40 | 5.30 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g_2437MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2437.00 | 108.0 | PK | / | / | 1.01 H | 210 | 75.80 | 32.20 |
| 2 | *2437.00 | 105.6 | AV | / | / | 1.01 H | 210 | 73.40 | 32.20 |
| 3 | 4874.00 | 53.4 | PK | 74.00 | -20.6 | 1.03 H | 272 | 48.10 | 5.30 |
| 4 | 4874.00 | 44.0 | AV | 54.00 | -10.0 | 1.03 H | 272 | 38.70 | 5.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g_2437MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2437.00 | 108.3 | PK | / | / | 1.09 V | 112 | 76.10 | 32.20 |
| 2 | *2437.00 | 107.7 | AV | / | / | 1.09 V | 112 | 75.50 | 32.20 |
| 3 | 4874.00 | 56.8 | PK | 74.00 | -17.2 | 1.21 V | 254 | 51.50 | 5.30 |
| 4 | 4874.00 | 44.5 | AV | 54.00 | -9.5 | 1.21 V | 254 | 39.20 | 5.30 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g_2462MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2462.00 | 109.7 | PK | / | / | 1.05 H | 215 | 77.40 | 32.30 |
| 2 | *2462.00 | 107.9 | AV | / | / | 1.05 H | 215 | 75.60 | 32.30 |
| 3 | 2483.50 | 57.3 | PK | 74.0 | -16.7 | 1.05 H | 211 | 24.90 | 32.40 |
| 4 | 2483.50 | 44.2 | AV | 54.0 | -9.8 | 1.05 H | 211 | 11.80 | 32.40 |
| 5 | 4924.00 | 52.4 | PK | 74.0 | -21.6 | 1.45 H | 320 | 46.90 | 5.50 |
| 6 | 4924.00 | 44.2 | AV | 54.0 | -9.8 | 1.45 H | 320 | 38.70 | 5.50 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g_2462MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2462.00 | 120.6 | PK | / | / | 1.05 V | 174 | 88.30 | 32.30 |
| 2 | *2462.00 | 116.8 | AV | / | / | 1.05 V | 174 | 84.50 | 32.30 |
| 3 | 2483.50 | 55.5 | PK | 74.0 | -18.5 | 1.05 V | 177 | 23.10 | 32.40 |
| 4 | 2483.50 | 44.7 | AV | 54.0 | -9.3 | 1.05 V | 177 | 12.30 | 32.40 |
| 5 | 4924.00 | 53.9 | PK | 74.0 | -20.1 | 1.45 V | 201 | 48.40 | 5.50 |
| 6 | 4924.00 | 45.9 | AV | 54.0 | -8.1 | 1.45 V | 201 | 40.40 | 5.50 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20_2412MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | 2390.00 | 59.3 | PK | 74.0 | -14.7 | 1.01 H | 228 | 27.10 | 32.20 |
| 2 | 2390.00 | 42.7 | AV | 54.0 | -11.3 | 1.01 H | 228 | 10.50 | 32.20 |
| 3 | *2412.00 | 104.4 | PK | / | / | 1.03 H | 112 | 72.20 | 32.20 |
| 4 | *2412.00 | 102.0 | AV | / | / | 1.03 H | 112 | 69.80 | 32.20 |
| 5 | 4824.00 | 54.8 | PK | 74.00 | -19.2 | 1.00 H | 254 | 49.50 | 5.30 |
| 6 | 4824.00 | 46.6 | AV | 54.00 | -7.4 | 1.00 H | 254 | 41.30 | 5.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20_2412MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | 2390.00 | 57.7 | PK | 74.0 | -16.3 | 1.11 V | 228 | 25.50 | 32.20 |
| 2 | 2390.00 | 43.7 | AV | 54.0 | -10.3 | 1.11 V | 228 | 11.50 | 32.20 |
| 3 | *2412.00 | 117.1 | PK | / | / | 1.09 V | 112 | 84.90 | 32.20 |
| 4 | *2412.00 | 115 | AV | / | / | 1.03 V | 112 | 82.80 | 32.20 |
| 5 | 4824.00 | 54.4 | PK | 74.00 | -19.6 | 1.21 V | 254 | 49.10 | 5.30 |
| 6 | 4824.00 | 44.9 | AV | 54.00 | -9.1 | 1.21 V | 254 | 39.60 | 5.30 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20_2437MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2437.00 | 114.3 | PK | / | / | 1.01 H | 210 | 82.10 | 32.20 |
| 2 | *2437.00 | 114.1 | AV | / | / | 1.01 H | 210 | 81.90 | 32.20 |
| 3 | 4874.00 | 57.8 | PK | 74.00 | -16.2 | 1.03 H | 272 | 52.50 | 5.30 |
| 4 | 4874.00 | 45.2 | AV | 54.00 | -8.8 | 1.03 H | 272 | 39.90 | 5.30 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20_2437MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2437.00 | 114.0 | PK | / | / | 1.09 V | 112 | 81.80 | 32.20 |
| 2 | *2437.00 | 115.3 | AV | / | / | 1.09 V | 112 | 83.10 | 32.20 |
| 3 | 4874.00 | 56.8 | PK | 74.00 | -17.2 | 1.21 V | 254 | 51.50 | 5.30 |
| 4 | 4874.00 | 45.5 | AV | 54.00 | -8.5 | 1.21 V | 254 | 40.20 | 5.30 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20_2462MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2462.00 | 111.2 | PK | / | / | 1.05 H | 215 | 78.90 | 32.30 |
| 2 | *2462.00 | 109.9 | AV | / | / | 1.05 H | 215 | 77.60 | 32.30 |
| 3 | 2483.50 | 56.3 | PK | 74.0 | -17.7 | 1.05 H | 211 | 23.90 | 32.40 |
| 4 | 2483.50 | 44.1 | AV | 54.0 | -9.9 | 1.05 H | 211 | 11.70 | 32.40 |
| 5 | 4924.00 | 53.4 | PK | 74.0 | -20.6 | 1.45 H | 320 | 47.90 | 5.50 |
| 6 | 4924.00 | 46.3 | AV | 54.0 | -7.7 | 1.45 H | 320 | 40.80 | 5.50 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20_2462MHz)

| No. | Frequency (MHz) | Emission Level (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Correction Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|--------------------------|
| 1 | *2462.00 | 110.5 | PK | / | / | 1.05 V | 174 | 78.20 | 32.30 |
| 2 | *2462.00 | 107.8 | AV | / | / | 1.05 V | 174 | 75.50 | 32.30 |
| 3 | 2483.50 | 55.5 | PK | 74.0 | -18.5 | 1.05 V | 177 | 23.10 | 32.40 |
| 4 | 2483.50 | 44.7 | AV | 54.0 | -9.3 | 1.05 V | 177 | 12.30 | 32.40 |
| 5 | 4924.00 | 55.9 | PK | 74.0 | -18.1 | 1.45 V | 201 | 50.40 | 5.50 |
| 6 | 4924.00 | 46.4 | AV | 54.0 | -7.6 | 1.45 V | 201 | 40.90 | 5.50 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
- Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level - Limit value
5. " * ": Fundamental frequency.

**3. List of measuring equipment**

| Description | Manufacturer | Model | Serial No. | Test Date | Due Date | Remark |
|-------------------------------------|-------------------|-----------------------------|---------------|------------|------------|-----------|
| EMI Test Receiver | R&S | ESIB26 | A0304218 | 2015.06.02 | 2016.06.01 | Radiation |
| Full-Anechoic Chamber | Albatross | 12.8m*6.8m *6.4m | A0412372 | 2015.06.02 | 2016.06.01 | Radiation |
| Loop Antenna | Schwarz beck | HFH2-Z2 | 100047 | 2015.06.02 | 2016.06.01 | Radiation |
| Bilog Antenna | Schwarzbeck | VULB 9163 | 9163-274 | 2015.06.02 | 2016.06.01 | Radiation |
| Double ridge horn antenna | R&S | HF906 | 100150 | 2015.06.02 | 2016.06.01 | Radiation |
| Ultra-wideband antenna | R&S | HL562 | 100089 | 2015.06.02 | 2016.06.01 | Radiation |
| Test Antenna – Horn (18-26.5GHz) | ETS | 3160-09 | A0902607 | 2015.06.02 | 2016.06.01 | Radiation |
| Amplifier 20M~3GHz | R&S | PAP-0203H | 22018 | 2015.06.02 | 2016.06.01 | Radiation |
| Ampilier 1G~18GHz | R&S | MITEQ AFS42-0010 1800 | 25-S-42 | 2015.06.02 | 2016.06.01 | Radiation |
| Ampilier 18G~40GHz | R&S | JS42-180026 00-28-5A | 12111.0980.00 | 2015.06.02 | 2016.06.01 | Radiation |
| Spectrum Analyzer | R&S | FSP40 | 1164.4391.40 | 2015.07.07 | 2016.07.06 | Conducted |
| Power Meter | R&S | NRP2 | 1020.1809.02 | 2015.06.02 | 2016.06.01 | Conducted |
| Power Sensor | R&S | NRP-Z81 | 823.3618.03 | 2015.06.02 | 2016.06.01 | Conducted |
| LISN | ROHDE&SC HWARZ | ESH2-Z5 | A0304221 | 2015.06.02 | 2016.06.01 | Conducted |
| Test Receiver | R&S | ESCS30 | A0304260 | 2015.06.02 | 2016.06.01 | Conducted |
| Cable | SUNHNER | SUCOFLEX 100 | / | 2015.06.02 | 2016.06.01 | Radiation |
| Cable | SUNHNER | SUCOFLEX 104 | / | 2015.06.02 | 2016.06.01 | Radiation |

4. Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

| Measurement | Frequency | Uncertainty |
|---------------------|---------------|-------------|
| Conducted emissions | 9kHz~30MHz | 2.35dB |
| Radiated emissions | 30MHz~1000MHz | 2.45dB |
| | 1G~18GHz | 2.21dB |
| | 18G~40GHz | 1.96dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

**** END OF REPORT ****