

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC2105-0033(1)

2. Customer

• Name : Point Mobile Co., LTD.

• Address : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Mobile Computer / PM30

FCC ID : V2X-PM30

5. FCC Regulation(s) : CFR 47 Part 2 subpart 2.1093

Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)


6. Date of Test : 2021.02.25 ~ 2021.04.21

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : Refer to appended test report.

9. Test Result : Refer to attached test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by Name : BumJun Park	 Reviewed by Name : HakMin Kim	
-------------	-------------------------------------	---	---

2021 . 05 . 20 .

DT&C Co., Ltd.

This test report is a general report that does not use the KOLAS accreditation mark and
is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Tested by	Reviewed by
DRRFCC2105-0033	May. 12, 2021	Initial issue	BumJun Park	HakMin Kim
DRRFCC2105-0033(1)	May. 20, 2021	Revise of section 1.2	BumJun Park	HakMin Kim

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 General Information.....	5
1.2 Power Reduction for SAR.....	7
1.3 Nominal and Maximum Output Power Specifications.....	7
1.4 DUT Antenna Locations.....	7
1.5 Simultaneous Transmission Capabilities.....	7
1.6 Miscellaneous SAR Test Considerations.....	8
1.7 Guidance Applied	8
1.8 Device Serial Numbers.....	8
2. LTE INFORMATION.....	9
3. INTROCUTION.....	10
4. DOSIMETRIC ASSESSMENT	11
4.1 Measurement Procedure	11
5. DEFINITION OF REFERENCE POINTS	13
5.1 Ear Reference Point	13
5.2 Handset Reference Points.....	13
6. TEST CONFIGURATION POSITIONS FOR HANDSETS.....	14
6.1 Device Holder	14
6.2 Positioning for Cheek/Touch.....	14
6.3 Positioning for Ear / 15 ° Tilt	14
6.4 Body-Worn Accessory Configurations	15
6.5 Extremity Exposure Configurations	15
6.6 Wireless Router Configurations.....	16
7. RF EXPOSURE LIMITS.....	17
8. FCC MEASUREMENT PROCEDURES	18
8.1 Measured and Reported SAR	18
8.2 Procedures Used to Establish RF Signal for SAR.....	18
8.3 SAR Measurement Conditions for WCDMA (UMTS).....	18
8.3.1 Output Power Verification.....	18
8.3.2 Head SAR Measurements for Handsets	18
8.3.3 Body SAR Measurements	19
8.3.4 Release 5 HSDPA Data Devices.....	19
8.3.5 Release 6 HSUPA Data Devices.....	19
8.3.6 SAR Measurement Conditions for DC-HSDPA	20
8.4 SAR Measurement Conditions for LTE.....	21
8.4.1 Spectrum Plots for RB Configurations.....	21
8.4.2 MPR	21
8.4.3 A-MPR	21
8.4.4 Required RB Size and RB Offsets for SAR Testing	21
8.4.5 LTE TDD Consideration setup for SAR measurement	22
8.5 SAR Testing with 802.11 Transmitters.....	23
8.5.1 General Device Setup	23
8.5.2 U-NII and U-NII-2A	24
8.5.3 U-NII-2C and U-NII-3.....	24
8.5.4 Initial Test Position Procedure	24
8.5.5 2.4 GHz SAR Test Requirements	24
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection	25
8.5.7 Initial Test Configuration Procedure	25
8.5.8 Subsequent Test Configuration Procedures	25
9. RF CONDUCTED POWERS.....	26
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers	26
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	27
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers	28
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers	28
9.5 Bluetooth Conducted Powers	52

10. SYSTEM VERIFICATION	54
10.1 Tissue Verification.....	54
10.2 Test System Verification.....	56
11. SAR TEST RESULTS	57
11.1 Head SAR Results	57
11.2 Standalone Body-Worn SAR Worn SAR Results	62
11.3 Standalone Hotspot SAR Results	64
11.4 SAR Test Notes.....	69
12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	72
12.1 Introduction.....	72
12.2 Simultaneous Transmission Procedures	72
12.3 Simultaneous Transmission Capabilities.....	72
12.4 Head SAR Simultaneous Transmission Analysis	74
12.5 Body-Worn Simultaneous Transmission Analysis	79
12.6 Hotspot SAR Simultaneous Transmission Analysis.....	81
12.7 Simultaneous Transmission Conclusion.....	86
13. SAR MEASUREMENT VARIABILITY	87
13.1 Measurement Variability	87
13.2 Measurement Uncertainty	87
14. EQUIPMENT LIST	88
15. MEASUREMENT UNCERTAINTIES	89
16. CONCLUSION	104
17. REFERENCES	105
APPENDIX A. – Probe Calibration Data.....	107
APPENDIX B. – Dipole Calibration Data.....	183
APPENDIX C. – SAR Tissue Specifications	248
APPENDIX D. – SAR SYSTEM VALIDATION.....	251
APPENDIX E. – Description of Test Equipment.....	253

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Computer				
FCC ID	V2X-PM30				
Equipment model name	PM30				
Equipment add model name	N/A				
Equipment serial no.	Identical prototype				
HW version	MP				
SW version	30.00xx				
FCC & ISED MRA Designation No.	KR0034				
ISED#	5470A				
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 17, 13, 14, 26, 5, 66, 4, 25, 2, 7, 41, 38, 2.4 G W-LAN (802.11b/g/n-HT20/n-HT40), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80), Bluetooth				
	Band	Mode	Operating Modes	Bandwidth	Frequency
TX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 ~ 848.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1850.2 ~ 1909.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	1712.4 ~ 1752.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1852.4 ~ 1907.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 ~ 713.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	779.5 ~ 784.5 MHz
	LTE Band 14	LTE	Voice/Data	5/10MHz	790.5 ~ 795.5 MHz
	LTE Band 26	LTE	Voice/Data	1.4/3/5/10/15MHz	814.7 ~ 848.3 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz
	LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1779.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1754.3 MHz
	LTE Band 25	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1850.7 ~ 1914.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1850.7 ~ 1909.3 MHz
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2502.5 ~ 2567.5 MHz
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2498.5 ~ 2687.5 MHz
	LTE Band 38	LTE	Voice/Data	5/10/15/20MHz	2572.5 ~ 2617.5 MHz
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20/HT40	2412 ~ 2462 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/h/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
	Bluetooth	-	Data	-	2402 ~ 2480 MHz
RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 ~ 893.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1930.2 ~ 1989.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	2112.4 ~ 2152.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1932.4 ~ 1987.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	736.5 ~ 743.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	748.5 ~ 753.5 MHz
	LTE Band 14	LTE	Voice/Data	5/10MHz	760.5 ~ 765.5 MHz
	LTE Band 26	LTE	Voice/Data	1.4/3/5/10/15MHz	859.7 ~ 893.3 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz
	LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2179.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2154.3 MHz
	LTE Band 25	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1930.7 ~ 1994.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1930.7 ~ 1989.3 MHz
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2622.5 ~ 2687.5 MHz
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2498.5 ~ 2687.5 MHz
	LTE Band 38	LTE	Voice/Data	5/10/15/20MHz	2572.5 ~ 2617.5 MHz
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20/HT40	2412 ~ 2462 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT200	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/h/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
	Bluetooth	-	Data	-	2402 ~ 2480 MHz

SAR Summary Table

Equipment Class	Band	Reported SAR		
		1g SAR (W/kg)		
		Head	Body-Worn	Hotspot
PCE	GSM 850	0.45	0.57	-
PCE	GPRS 850	0.54	0.65	1.03
PCE	GSM 1900	0.31	0.31	-
PCE	GPRS 1900	0.50	0.40	0.96
PCE	WCDMA 850	0.22	0.72	0.94
PCE	WCDMA 1700	0.52	0.72	1.16
PCE	WCDMA 1900	0.55	0.60	1.19
PCE	LTE Band 12	0.22	0.40	0.46
PCE	LTE Band 17	-	-	-
PCE	LTE Band 13	0.27	0.51	0.56
PCE	LTE Band 14	0.26	0.45	0.54
PCE	LTE Band 26	0.46	0.55	0.70
PCE	LTE Band 5	-	-	-
PCE	LTE Band 66	0.65	0.60	1.17
PCE	LTE Band 4	-	-	-
PCE	LTE Band 25	0.70	0.56	0.95
PCE	LTE Band 2	-	-	-
PCE	LTE Band 7	0.77	0.67	1.12
PCE	LTE Band 41	0.47	0.56	1.09
PCE	LTE Band 38	-	-	-
DTS	2.4 GHz W-LAN	0.79	0.30	0.33
U-NII-1	5.2 GHz W-LAN	-	-	1.18
U-NII-2A	5.3 GHz W-LAN	0.71	0.74	-
U-NII-2C	5.6 GHz W-LAN	1.19	0.83	-
U-NII-3	5.8 GHz W-LAN	1.16	0.81	1.15
DSS	Bluetooth	< 0.1	< 0.1	< 0.1
Simultaneous SAR per KDB 690783 D01v01r03		1.56	1.57	1.55
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)			
Date(s) of Tests	2021.02.25 ~ 2021.04.21			
Antenna Type	Internal Antenna			
Functions	<ul style="list-style-type: none"> ● GSM/GPRS/EDGE (GPRS/EDGE Class: 33) supported. * DTM not supported. ● No simultaneous transmission between BT & 2.4GHz WLAN ● Simultaneous transmission between [GSM, WCDMA voice & WLAN], [GPRS, WCDMA & WLAN], [LTE & WLAN]. ● VoIP is supported. ● WLAN 2.4GHz is supported Hotspot. ● WLAN 5 GHz is supported Hotspot. 			

1.2 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for WLAN 5GHz operations during receiver & hotspot mode. Detailed descriptions of the power reduction mechanism are included in the operational description.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in (PM30)_Antenna Location. Since the diagonal dimension of this device is < 160 mm and the diagonal display is < 150 mm, it is not considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	O	O
GSM/GPRS/EDGE 1900	X	O	O	O	O	O
WCDMA 850	X	O	O	O	O	O
WCDMA 1700	X	O	O	O	O	O
WCDMA 1900	X	O	O	O	O	O
LTE Band 12	X	O	O	O	O	O
LTE Band 17	X	O	O	O	O	O
LTE Band 13	X	O	O	O	O	O
LTE Band 14	X	O	O	O	O	O
LTE Band 26	X	O	O	O	O	O
LTE Band 5	X	O	O	O	O	O
LTE Band 66	X	O	O	O	O	O
LTE Band 4	X	O	O	O	O	O
LTE Band 25	X	O	O	O	O	O
LTE Band 2	X	O	O	O	O	O
LTE Band 7	X	O	O	O	O	O
LTE Band 41	X	O	O	O	O	O
LTE Band 38	X	O	O	O	O	O
2.4G W-LAN	O	X	O	O	X	O
5G W-LAN	O	X	O	O	X	O
Bluetooth	O	X	O	O	X	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: O - Test / X - Not test.

Note 3: This DUT has NFC operations. The NFC antenna is integrated into the back side.

The SAR tests were performed with NFC antenna already incorporated.

A diagram showing the location of the device antenna can be found in (PM30)_Antenna Location.

1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01(Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

2. LTE INFORMATION

LTE Information					
FCC ID	V2X-PM30				
Form Factor	Mobile Computer				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 13 (779.5 ~ 784.5 MHz) LTE Band 14 (790.5 ~ 795.5 MHz) LTE Band 26 (Cell) (814.7 ~ 848.3 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 66 (AWS) (1710.7 ~ 1779.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 25 (PCS) (1850.7 ~ 1914.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 7 (2502.5 ~ 2567.5 MHz) LTE Band 41 (2498.5 ~ 2687.5 MHz) LTE Band 38 (2572.5 ~ 2617.5 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 13 : 5 MHz, 10 MHz LTE Band 14 : 5 MHz, 10 MHz LTE Band 26 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 25 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 7 : 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41 : 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 38 : 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) Note1	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5 (23755)	N/A	710.0 (23790)	N/A	713.5 (23825)
LTE Band 17: 10 MHz	709.0 (23780)	N/A	710.0 (23790)	N/A	711.0 (23800)
LTE Band 13: 5 MHz	779.5 (23205)	N/A	782.0 (23230) Note2	N/A	784.5 (23255)
LTE Band 13: 10 MHz	N/A	N/A	782.0 (23230)	N/A	N/A
LTE Band 14: 5 MHz	790.5 (23305)	N/A	793.0 (23330) Note3	N/A	795.0 (23355)
LTE Band 14: 10 MHz	N/A	N/A	793.0 (23330)	N/A	N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	N/A	831.5 (26865)	N/A	848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	N/A	831.5 (26865)	N/A	847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	N/A	831.5 (26865)	N/A	846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819.0 (26740)	N/A	831.5 (26865)	N/A	844.0 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)	N/A	831.5 (26865) Note4	N/A	841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) Note5	N/A	844.0 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	N/A	1745.0 (132322)	N/A	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	N/A	1745.0 (132322)	N/A	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	N/A	1745.0 (132322)	N/A	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715.0 (132022)	N/A	1745.0 (132322)	N/A	1775.0 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	N/A	1745.0 (132322)	N/A	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720.0 (132072)	N/A	1745.0 (132322)	N/A	1770.0 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175) Note6	N/A	1745.0 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	N/A	1882.5 (26365)	N/A	1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	N/A	1882.5 (26365)	N/A	1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	N/A	1882.5 (26365)	N/A	1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855.0 (26090)	N/A	1882.5 (26365)	N/A	1910.0 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	N/A	1882.5 (26365)	N/A	1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860.0 (26140)	N/A	1882.5 (26365)	N/A	1905.0 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	N/A	2535.0 (21100)	N/A	2567.5 (21425)
LTE Band 7: 10 MHz	2505.0 (20800)	N/A	2535.0 (21100)	N/A	2565.0 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	N/A	2535.0 (21100)	N/A	2562.5 (21375)
LTE Band 7: 20 MHz	2510.0 (20850)	N/A	2535.0 (21100)	N/A	2560.0 (21350)
LTE Band 41: 5 MHz	2498.5 (39675)	2545.8 (40148)	2593.0 (40620)	2640.3 (41093)	2687.5 (41565)
LTE Band 41: 10 MHz	2501.0 (39700)	2547.0 (40160)	2593.0 (40620)	2639.0 (41080)	2685.0 (41540)
LTE Band 41: 15 MHz	2503.5 (39725)	2548.3 (40173)	2593.0 (40620)	2637.8 (41068)	2682.5 (41515)
LTE Band 41: 20 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
LTE Band 38: 5 MHz	2572.5 (37775)	N/A	2595.0 (38000)	N/A	2617.5 (38225)
LTE Band 38: 10 MHz	2575.0 (37800)	N/A	2595.0 (38000)	N/A	2615.0 (38200)
LTE Band 38: 15 MHz	2577.5 (37825)	N/A	2595.0 (38000)	N/A	2612.5 (38175)
LTE Band 38: 20 MHz	2580.0 (37850)	N/A	2595.0 (38000)	N/A	2610.0 (38150)
UE Category	LTE Rel.10, UE Cat 4				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	LTE Carrier Aggregation is not supported.				
LTE Additional Information	This device does not support CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WiFi Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

Note(s)

1. LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.
2. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
3. LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.
4. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
5. LTE B14 can not contain three non-overlapping channels of 5 MHz bandwidth.
6. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE B4 (AWS) can not contain three non-overlapping channels of 20 MHz bandwidth.
9. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3. INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$\boxed{SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)}$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

4. DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points ($10 \times 10 \times 10$) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

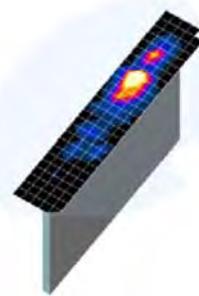


Figure 4.1
Sample SAR Area Scan

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{between } 1^{\text{st}} \text{ two points closest to phantom surface}$ $\Delta z_{\text{Zoom}}(n>1): \text{between subsequent points}$	$\leq 4 \text{ mm}$ $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.			
* When zoom scan is required and the <i>reported SAR</i> from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}, \leq 8 \text{ mm}, \leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

5. DEFINITION OF REFERENCE POINTS

5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point(ERP), and "RE" is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.

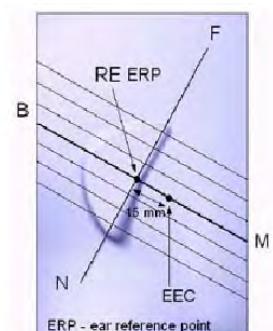


Figure 5.1
Close-up side view
of ERP

5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 5.3). The "test device reference point" was than located at the same level as the center of the ear reference point. The test device was positioned so that the "vertical centerline" was bisecting the front surface of the handset at it's top and bottom edges, positioning the "ear reference point" on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5.2 Front, back and side view SAM Twin Phantom

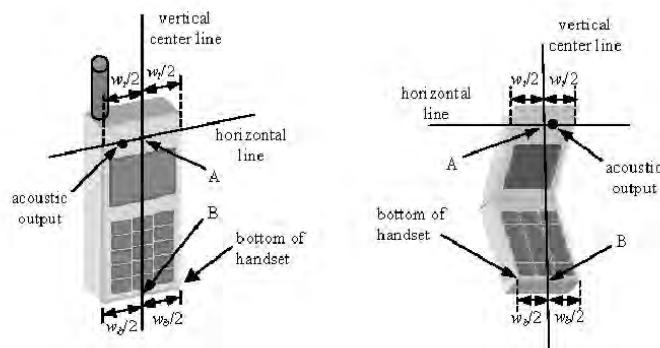


Figure 5.3 Handset Vertical Center & Horizontal Line Reference Points

6. TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

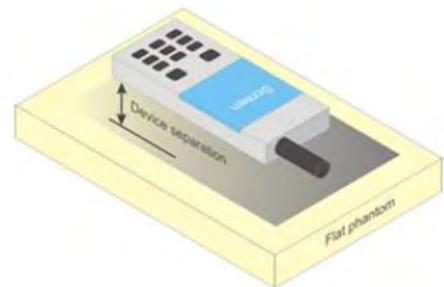


Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

HUMAN EXPOSURE LIMITS		
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for WCDMA (UMTS)

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”.

8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.
Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Figure 9.1 Table 1

8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_a (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF) (codes)	β_{ed} (codes)	CM ⁽²⁾	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ad}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15		56/75	4	1	3.0	2.0	17
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
 Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
 Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
 Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
 Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

8.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Addition MPR) has been disable for all SAR tests by setting NS=01 on the base station simulator.

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is $\leq 0.8 \text{ W/kg}$, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is $> 1.45 \text{ W/kg}$, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is $< 0.8 \text{ W/kg}$. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is $> 1.45 \text{ W/kg}$, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is $< 1.45 \text{ W/kg}$.

8.4.5 LTE TDD Consideration setup for SAR measurement

According to KDB 941225 D05 SAR for LTE Devices v02r05 for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configuration and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · T_s	2192 · T_s	2560 · T_s	7680 · T_s	2192 · T_s	2560 · T_s
1	19760 · T_s			20480 · T_s		
2	21952 · T_s			23040 · T_s		
3	24144 · T_s			25600 · T_s		
4	26336 · T_s			7680 · T_s		
5	6592 · T_s	4384 · T_s	5120 · T_s	20480 · T_s	4384 · T_s	5120 · T_s
6	19760 · T_s			23040 · T_s		
7	21952 · T_s			-	-	-
8	24144 · T_s			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U

$T_s = 1/(15000 * 2048)$ seconds

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 * [1/(15000 * 2048)] * 2 + 6 \text{ ms} = 63.33 \%$

8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4 \text{ W/kg}$, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test position are measured.

8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is $> 0.8 \text{ W/kg}$, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is $> 1.2 \text{ W/kg}$. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n or 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is $\leq 0.8 \text{ W/kg}$, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is $\leq 1.2 \text{ W/kg}$ or all channels are measured.

8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is $\leq 1.2 \text{ W/kg}$, no additional SAR testing for the subsequent test configurations is required.

9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	32.50	32.50	30.50	28.50	26.50	27.00	25.50	24.00	22.50
	Nominal	32.00	32.00	30.00	28.00	26.00	26.50	25.00	23.50	22.00
GSM/GPRSEdge 1900	Maximum	29.50	29.50	28.00	26.00	24.00	25.50	24.50	23.50	22.00
	Nominal	29.00	29.00	27.50	25.50	23.50	25.00	24.00	23.00	21.50

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
			GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot
GSM850	128	32.32	32.31	30.43	28.19	26.41	26.68	25.38	23.77	22.01
	190	32.37	32.31	30.49	28.15	26.11	26.77	25.47	23.93	22.10
	251	32.42	32.40	30.45	28.30	26.10	26.93	25.40	23.89	22.05
PCS 1900	512	29.31	29.39	27.91	25.82	23.72	25.40	24.08	23.00	21.68
	661	29.25	29.25	27.95	25.62	23.59	25.48	24.32	23.49	21.79
	810	29.32	29.34	27.93	25.58	23.55	25.36	24.16	23.17	21.55
Calculated Maximum Frame-Averaged Output Power(dBm)										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
			GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot
	128	23.29	23.28	24.41	23.93	23.40	17.65	19.36	19.51	19.00
GSM850	190	23.34	23.28	24.47	23.89	23.10	17.74	19.45	19.67	19.09
	251	23.39	23.37	24.43	24.04	23.09	17.90	19.38	19.63	19.04
	512	20.28	20.36	21.89	21.56	20.71	16.37	18.06	18.74	18.67
PCS 1900	661	20.22	20.22	21.93	21.36	20.58	16.45	18.30	19.23	18.78
	810	20.29	20.31	21.91	21.32	20.54	16.33	18.14	18.91	18.54
GSM850	Frame Avg. Targets:	22.97	22.97	23.98	23.74	22.99	17.47	18.98	19.24	18.99
PCS 1900		19.97	19.97	21.48	21.24	20.49	15.97	17.98	18.74	18.49

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 33 (max 4 TX Uplink slots)
EDGE Multislot class: 33 (max 4 TX Uplink slots)
DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode		Cellular Band (dBm)		AWS Band (dBm)		PCS Band (dBm)		3GPP MPR (dB)
99	WCDMA		Voice	Maximum Nominal	23.2 22.7	23.1 22.6	23.3 22.8	-	
5	HSDPA		Subtest 1	Maximum Nominal	23.2 22.7	23.1 22.6	23.3 22.8	0	
5			Subtest 2	Maximum Nominal	23.2 22.7	23.1 22.6	23.3 22.8	0	
5			Subtest 3	Maximum Nominal	22.7 22.2	22.6 22.1	22.8 22.3	0.5	
5			Subtest 4	Maximum Nominal	22.7 22.2	22.6 22.1	22.8 22.3	0.5	
6			Subtest 1	Maximum Nominal	23.2 22.7	23.1 22.6	23.3 22.8	0	
6	HSUPA		Subtest 2	Maximum Nominal	21.2 20.7	21.1 20.6	21.3 20.8	2	
6			Subtest 3	Maximum Nominal	22.2 21.7	22.1 21.6	22.3 21.8	1	
6			Subtest 4	Maximum Nominal	21.2 20.7	21.1 20.6	21.3 20.8	2	
6			Subtest 5	Maximum Nominal	23.2 22.7	23.1 22.6	23.3 22.8	0	
8	DC-HSDPA		Subtest 1	Maximum Nominal	23.2 22.7	23.1 22.6	23.3 22.8	0	
8			Subtest 2	Maximum Nominal	23.2 22.7	23.1 22.6	23.3 22.8	0	
8			Subtest 3	Maximum Nominal	22.7 22.2	22.6 22.1	22.8 22.3	0.5	
8			Subtest 4	Maximum Nominal	22.7 22.2	22.6 22.1	22.8 22.3	0.5	

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.18	23.19	23.15	23.07	23.09	23.08	23.27	23.29	23.28	-
99		12.2 kbps AMR	23.12	23.13	23.11	23.04	23.08	23.05	23.24	23.22	23.13	-
5	HSDPA	Subtest 1	23.14	23.16	23.13	23.01	23.07	23.04	23.22	23.21	23.13	0
5		Subtest 2	23.14	23.16	23.17	23.02	23.08	23.06	23.23	23.22	23.15	0
5		Subtest 3	22.64	22.66	22.69	22.55	22.58	22.57	22.75	22.77	22.57	0.5
5		Subtest 4	22.65	22.66	22.63	22.54	22.57	22.57	22.76	22.75	22.57	0.5
6	HSUPA	Subtest 1	23.14	23.13	23.07	23.01	23.03	22.98	23.24	23.22	23.15	0
6		Subtest 2	21.03	21.03	21.07	21.07	21.09	21.01	21.26	21.23	21.08	2
6		Subtest 3	22.17	22.14	22.08	22.08	22.09	22.03	22.29	22.24	22.07	1
6		Subtest 4	21.19	21.17	21.12	20.97	21.05	20.99	21.25	21.24	21.08	2
6		Subtest 5	23.15	23.13	23.10	23.05	23.06	23.01	23.21	23.22	23.16	0
8	DC-HSDPA	Subtest 1	23.14	23.16	23.13	23.01	23.06	23.05	23.22	23.20	23.15	0
8		Subtest 2	23.14	23.15	23.13	23.00	23.06	23.04	23.23	23.21	23.14	0
8		Subtest 3	22.64	22.65	22.67	22.53	22.58	22.57	22.74	22.71	22.56	0.5
8		Subtest 4	22.62	22.65	22.66	22.55	22.58	22.55	22.75	22.70	22.58	0.5

Table 9.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.



Figure 9.2 Power Measurement Setup

9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode			Modulated Average[dBm]
LTE Band 12		Maximum	23.0
		Nominal	22.5

Table 9.3.1.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23095 (707.5 MHz)	Conducted Power (dBm)			
			23095 (707.5 MHz)	Conducted Power (dBm)			
QPSK	1	0	22.93		≤ 1	0	
	1	25	22.99				
	1	49	22.96				
	25	0	21.90			1	
	25	12	21.99				
	25	25	21.97				
	50	0	21.95			1	
16QAM	1	0	21.93		≤ 1	1	
	1	25	21.99				
	1	49	21.97				
	25	0	20.90			2	
	25	12	20.99		≤ 2		
	25	25	20.95				
	50	0	20.97		2		

Table 9.3.1.2 LTE Conducted Power

Note: LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power- 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	22.74	22.85	22.79	≤ 1	0	
	1	12	22.82	22.89	22.87			
	1	24	22.76	22.86	22.83			
	12	0	21.80	21.84	21.82		1	
	12	6	21.83	21.90	21.88			
	12	13	21.82	21.86	21.85			
	25	0	21.76	21.89	21.81		1	
16QAM	1	0	21.71	21.82	21.79	≤ 1	1	
	1	12	21.80	21.88	21.85			
	1	24	21.77	21.85	21.80			
	12	0	20.78	20.83	20.80		2	
	12	6	20.90	20.95	20.94	≤ 2		
	12	13	20.80	20.89	20.85			
	25	0	20.77	20.88	20.83	2		

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.77	22.83	22.81	≤ 1	0
	1	7	22.83	22.90	22.87		1
	1	14	22.79	22.85	22.83		1
	8	0	21.77	21.83	21.80		1
	8	4	21.83	21.89	21.87		1
	8	7	21.79	21.86	21.83		1
	15	0	21.80	21.87	21.83		1
16QAM	1	0	21.71	21.82	21.79	≤ 1	1
	1	7	21.81	21.93	21.88		1
	1	14	21.77	21.89	21.83		1
	8	0	20.81	20.89	20.87		2
	8	4	20.89	20.96	20.92	≤ 2	2
	8	7	20.85	20.91	20.90		2
	15	0	20.87	20.95	20.91		2

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.66	22.72	22.70	≤ 1	0
	1	2	22.75	22.79	22.78		0
	1	5	22.69	22.73	22.71		0
	3	0	22.61	22.70	22.68		1
	3	2	22.70	22.76	22.73		1
	3	3	22.67	22.71	22.69		1
	6	0	21.77	21.83	21.80		1
16QAM	1	0	21.70	21.77	21.73	≤ 1	1
	1	2	21.77	21.83	21.79		1
	1	5	21.73	21.80	21.75		1
	3	0	21.64	21.73	21.69		1
	3	2	21.73	21.79	21.75	≤ 2	1
	3	3	21.70	21.76	21.71		1
	6	0	20.74	20.79	20.77		2

Table 9.3.1.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]	
LTE Band 13		Maximum	23.0
		Nominal	22.5

Table 9.3.2.1 Nominal and Maximum Output Power Spec

2) LTE Band 13

LTE Band 13 Conducted Power- 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23230 (782.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	22.94	≤ 1	0
	1	25	22.99		
	1	49	22.98		
	25	0	21.89		1
	25	12	21.94		
	25	25	21.91		
	50	0	21.91		
16QAM	1	0	21.88	≤ 1	1
	1	25	21.98		
	1	49	21.91		
	25	0	20.84		
	25	12	20.90	≤ 2	2
	25	25	20.87		
	50	0	20.87		

Table 9.3.2.2 LTE Conducted Power

LTE Band 13 Conducted Power- 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23230 (782.0 MHz)			
			Conducted Power (dBm)			
QPSK	1	0	22.81	≤ 1	0	
	1	12	22.90			
	1	24	22.83			
	12	0	21.80			
	12	6	21.89		1	
	12	13	21.83			
	25	0	21.87			
16QAM	1	0	21.86	≤ 1	1	
	1	12	21.89			
	1	24	21.88			
	12	0	20.77		2	
	12	6	20.83	≤ 2		
	12	13	20.79			
	25	0	20.80			

Table 9.3.2.3 LTE Conducted Power

Note: LTE B13 can not contain three non-overlapping channels of 5 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band & Mode		Modulated Average[dBm]	
LTE Band 14		Maximum	23.0
		Nominal	22.5

Table 9.3.3.1 Nominal and Maximum Output Power Spec

3) LTE Band 14

LTE Band 14 Conducted Power- 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23330 (793.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	22.96	≤ 1	0
	1	25	22.98		
	1	49	22.95		
	25	0	21.93		1
	25	12	21.97		
	25	25	21.86		
	50	0	21.88		
16QAM	1	0	21.93	≤ 1	1
	1	25	21.97		
	1	49	21.91		
	25	0	20.96		
	25	12	20.98	≤ 2	2
	25	25	20.92		
	50	0	20.88		

Table 9.3.3.2 LTE Conducted Power

LTE Band 14 Conducted Power- 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23330 (793.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	22.93	≤ 1	0
	1	12	22.94		
	1	24	22.92		
	12	0	21.90		
	12	6	21.96		1
	12	13	21.83		
	25	0	21.80		
16QAM	1	0	21.89	≤ 1	1
	1	12	21.92		
	1	24	21.81		
	12	0	20.91		
	12	6	20.93	≤ 2	2
	12	13	20.86		
	25	0	20.81		

Table 9.3.3.3 LTE Conducted Power

Note: LTE B14 can not contain three non-overlapping channels of 5 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band & Mode		Modulated Average[dBm]	
LTE Band 26		Maximum	23.0
		Nominal	22.5

Table 9.3.4.1 Nominal and Maximum Output Power Spec

4) LTE Band 26 (Cell)

LTE Band 26 (Cell) Conducted Power- 15 MHz Bandwidth								
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)		
			26865 (831.5 MHz)					
			Conducted Power (dBm)					
QPSK	1	0	22.97		≤ 1	0		
	1	36	22.99			1		
	1	74	22.91			1		
	36	0	21.93			1		
	36	18	21.99			1		
	36	37	21.90			1		
	75	0	21.98			1		
16QAM	1	0	21.96		≤ 1	1		
	1	36	21.99			1		
	1	74	21.93			1		
	36	0	20.93			2		
	36	18	20.94		≤ 2	2		
	36	37	20.86			2		
	75	0	20.86			2		

Table 9.3.4.2 LTE Conducted Power

Note: LTE B26 can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 26 (Cell) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.80	22.85	22.84	≤ 1	0
	1	25	22.85	22.93	22.90		1
	1	49	22.78	22.81	22.80		1
	25	0	21.90	21.94	21.92		1
	25	12	21.93	21.97	21.95		1
	25	25	21.80	21.90	21.87		1
	50	0	21.86	21.93	21.90		1
16QAM	1	0	21.81	21.88	21.85	≤ 1	1
	1	25	21.89	21.93	21.90		1
	1	49	21.77	21.85	21.83		1
	25	0	20.86	20.90	20.88		2
	25	12	20.93	20.97	20.95	≤ 2	2
	25	25	20.81	20.88	20.85		2
	50	0	20.90	20.96	20.94		2

Table 9.3.4.3 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) Conducted Power- 5 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel 26715 (816.5 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27015 (846.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.81	22.89	22.85	≤ 1	0
	1	12	22.89	22.94	22.92		
	1	24	22.77	22.85	22.79		
	12	0	21.79	21.84	21.80		1
	12	6	21.83	21.96	21.89		
	12	13	21.74	21.77	21.75		
	25	0	21.80	21.91	21.85		
16QAM	1	0	21.80	21.90	21.86	≤ 1	1
	1	12	21.83	21.94	21.90		
	1	24	21.75	21.84	21.81		
	12	0	20.77	20.86	20.83		2
	12	6	20.82	20.96	20.93		
	12	13	20.70	20.82	20.78		
	25	0	20.79	20.93	20.89		

Table 9.3.4.4 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) Conducted Power- 3 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel 26705 (815.5 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27025 (847.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.75	22.82	22.80	0	0
	1	7	22.82	22.90	22.88		
	1	14	22.71	22.79	22.78		
	8	0	21.79	21.83	21.80		1
	8	4	21.83	21.95	21.87		
	8	7	21.76	21.79	21.77		
	15	0	21.78	21.82	21.80		
16QAM	1	0	21.77	21.80	21.78	0-1	1
	1	7	21.79	21.86	21.82		
	1	14	21.69	21.77	21.72		
	8	0	20.71	20.87	20.77		2
	8	4	20.80	20.97	20.82		
	8	7	20.68	20.79	20.73		
	15	0	20.79	20.84	20.80		

Table 9.3.4.5 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) Conducted Power- 1.4 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel 26697 (814.7 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27033 (848.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.71	22.81	22.79	0	0
	1	2	22.79	22.89	22.83		
	1	5	22.62	22.80	22.78		
	3	0	22.65	22.80	22.75		0
	3	2	22.71	22.88	22.81		
	3	3	22.60	22.76	22.73		
	6	0	21.71	21.84	21.79		1
16QAM	1	0	21.69	21.90	21.85	0-1	1
	1	2	21.73	21.91	21.90		
	1	5	21.61	21.85	21.83		
	3	0	21.61	21.86	21.82		1
	3	2	21.70	21.89	21.86		
	3	3	21.58	21.81	21.79		
	6	0	20.81	20.94	20.89		

Table 9.3.4.6 LTE Conducted Power

Band & Mode			Modulated Average[dBm]	
LTE Band 66 (AWS)			Maximum	23.3
		Nominal		22.8

Table 9.3.5.1 Nominal and Maximum Output Power Spec

5) LTE Band 66 (AWS)

Modulation	RB Size	RB Offset	LTE Band 66 (AWS) Conducted Power- 20 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.20	23.26	23.24	≤ 1	0
	1	50	23.26	23.29	23.28		
	1	99	23.15	23.20	23.19		
	50	0	22.13	22.20	22.18		
	50	25	22.23	22.28	22.26		
	50	50	22.08	22.17	22.10		
	100	0	22.11	22.26	22.18		
16QAM	1	0	22.20	22.26	22.23	≤ 1	1
	1	50	22.23	22.28	22.26		
	1	99	22.16	22.23	22.18		
	50	0	21.18	21.25	21.23		
	50	25	21.20	21.28	21.25	≤ 2	2
	50	50	21.11	21.20	21.16		
	100	0	21.13	21.24	21.20		

Table 9.3.5.2 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 66 (AWS) Conducted Power- 15 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.18	23.24	23.21	≤ 1	0
	1	36	23.20	23.25	23.24		
	1	74	23.06	23.10	23.07		
	36	0	22.05	22.16	22.10		
	36	18	22.14	22.21	22.17		
	36	37	21.99	22.04	22.03		
	75	0	22.02	22.08	22.07		
16QAM	1	0	22.13	22.18	22.16	≤ 1	1
	1	36	22.18	22.26	22.20		
	1	74	22.10	22.15	22.13		
	36	0	21.08	21.21	21.11		
	36	18	21.10	21.28	21.19	≤ 2	2
	36	37	21.02	21.10	21.05		
	75	0	21.09	21.23	21.15		

Table 9.3.5.3 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 66 (AWS) Conducted Power- 10 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.08	23.22	23.10	≤ 1	0
	1	25	23.11	23.23	23.14		
	1	49	23.01	23.10	23.03		
	25	0	22.08	22.22	22.13		
	25	12	22.17	22.25	22.23		
	25	25	22.06	22.10	22.08		
	50	0	22.15	22.20	22.17		
16QAM	1	0	22.03	22.17	22.10	≤ 1	1
	1	25	22.10	22.20	22.15		
	1	49	22.00	22.11	22.05		
	25	0	21.12	21.20	21.17		
	25	12	21.15	21.26	21.21	≤ 2	2
	25	25	21.05	21.11	21.10		
	50	0	21.11	21.23	21.20		

Table 9.3.5.4 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.96	23.07	23.00	≤ 1	0
	1	12	23.19	23.27	23.21		
	1	24	22.90	23.02	22.94		
	12	0	22.10	22.16	22.13		1
	12	6	22.15	22.25	22.20		1
	12	13	22.06	22.10	22.08		1
16QAM	25	0	22.09	22.23	22.18	≤ 1	1
	1	0	21.99	22.11	22.05		1
	1	12	22.08	22.15	22.13		1
	1	24	21.91	22.10	21.99	≤ 2	2
	12	0	21.17	21.26	21.20		2
	12	6	21.22	21.28	21.27		2
	12	13	21.14	21.23	21.15		2
	25	0	21.11	21.21	21.19		2

Table 9.3.5.5 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.00	23.09	23.04	≤ 1	0
	1	7	23.12	23.21	23.19		
	1	14	22.98	23.05	23.00		
	8	0	22.14	22.20	22.16		1
	8	4	22.15	22.23	22.17		1
	8	7	22.08	22.17	22.10		1
16QAM	15	0	22.11	22.17	22.14	≤ 1	1
	1	0	22.01	22.15	22.11		1
	1	7	22.10	22.23	22.18		1
	1	14	21.95	22.10	22.03	≤ 2	2
	8	0	21.15	21.23	21.18		2
	8	4	21.18	21.28	21.23		2
	8	7	21.06	21.20	21.15		2
	15	0	21.10	21.27	21.20		2

Table 9.3.5.6 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.13	23.20	23.14	≤ 1	0
	1	2	23.21	23.28	23.26		
	1	5	23.11	23.16	23.13		
	3	0	23.01	23.15	23.08		0
	3	2	23.18	23.20	23.14		1
	3	3	23.07	23.13	23.09		1
16QAM	6	0	22.20	22.25	22.22	≤ 1	1
	1	0	22.10	22.18	22.15		1
	1	2	22.12	22.20	22.18		1
	1	5	22.05	22.10	22.07	≤ 1	1
	3	0	22.07	22.15	22.13		1
	3	2	22.09	22.18	22.15		1
	3	3	22.01	22.05	22.04		2

Table 9.3.5.7 LTE Conducted Power

Band & Mode			Modulated Average[dBm]	
LTE Band 25(PCS)			Maximum	23.5
		Nominal		23.0

Table 9.3.6.1 Nominal and Maximum Output Power Spec

6) LTE Band 25 (PCS)

LTE Band 25 (PCS) Conducted Power- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.42	23.47	23.40	≤ 1	0
	1	50	23.48	23.49	23.47		1
	1	99	23.40	23.45	23.38		1
	50	0	22.40	22.48	22.36		1
	50	25	22.43	22.49	22.40		1
	50	50	22.37	22.46	22.35		1
	100	0	22.40	22.47	22.35		1
16QAM	1	0	22.44	22.47	22.40	≤ 1	1
	1	50	22.46	22.49	22.44		1
	1	99	22.39	22.41	22.37		1
	50	0	21.44	21.45	21.40		2
	50	25	21.45	21.48	21.42	≤ 2	2
	50	50	21.40	21.41	21.39		2
	100	0	21.43	21.47	21.32		2

Table 9.3.6.2 LTE Conducted Power

LTE Band 25 (PCS) Conducted Power- 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.21	23.29	23.12	≤ 1	0
	1	36	23.29	23.33	23.20		1
	1	74	23.11	23.18	23.07		1
	36	0	22.37	22.43	22.31		1
	36	18	22.41	22.46	22.34		1
	36	37	22.35	22.42	22.30		1
	75	0	22.35	22.40	22.32		1
16QAM	1	0	22.27	22.30	22.15	≤ 1	1
	1	36	22.35	22.39	22.23		1
	1	74	22.19	22.22	22.13		1
	36	0	21.39	21.40	21.38		2
	36	18	21.40	21.45	21.39	≤ 2	2
	36	37	21.33	21.38	21.36		2
	75	0	21.39	21.43	21.35		2

Table 9.3.6.3 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.21	23.28	23.12	≤ 1	0
	1	25	23.27	23.35	23.21		1
	1	49	23.19	23.21	23.11		1
	25	0	22.31	22.39	22.20		1
	25	12	22.33	22.41	22.23		1
	25	25	22.28	22.36	22.18		1
	50	0	22.28	22.31	22.15		1
16QAM	1	0	22.30	22.33	22.25	≤ 1	1
	1	25	22.33	22.37	22.29		1
	1	49	22.20	22.27	22.16		1
	25	0	21.29	21.36	21.28		2
	25	12	21.30	21.40	21.29	≤ 2	2
	25	25	21.27	21.34	21.22		2
	50	0	21.29	21.35	21.20		2

Table 9.3.6.4 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 2 (PCS) Conducted Power- 5 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.25	23.33	23.11	≤ 1	0
	1	12	23.32	23.40	23.29		
	1	24	23.22	23.29	23.05		
	12	0	22.33	22.39	22.17		
	12	6	22.35	22.42	22.20		
	12	13	22.28	22.37	22.16		
16QAM	25	0	22.30	22.38	22.19	≤ 2	1
	1	0	22.25	22.40	22.20		
	1	12	22.28	22.43	22.23		
	1	24	22.19	22.27	22.10		
	12	0	21.37	21.40	21.22		
	12	6	21.40	21.44	21.27		
16QAM	12	13	21.36	21.38	21.21		
	25	0	21.35	21.39	21.23		

Table 9.3.6.5 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 2 (PCS) Conducted Power- 3 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.36	23.44	23.30	≤ 1	0
	1	7	23.38	23.47	23.35		
	1	14	23.31	23.39	23.28		
	8	0	22.29	22.37	22.20		
	8	4	22.32	22.41	22.22		
	8	7	22.28	22.30	22.16		
16QAM	15	0	22.28	22.38	22.20	≤ 2	1
	1	0	22.36	22.43	22.31		
	1	7	22.39	22.45	22.34		
	1	14	22.33	22.42	22.30		
	8	0	21.38	21.39	21.25		
	8	4	21.40	21.43	21.28		
16QAM	8	7	21.26	21.33	21.24		
	15	0	21.37	21.41	21.22		

Table 9.3.6.6 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 2 (PCS) Conducted Power- 1.4 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
Conducted Power (dBm)							
QPSK	1	0	23.09	23.10	23.01	≤ 1	0
	1	2	23.15	23.19	23.10		
	1	5	23.04	23.06	23.00		
	3	0	23.05	23.09	23.00		
	3	2	23.11	23.16	23.08		
	3	3	23.00	23.05	22.97		
16QAM	6	0	22.17	22.20	22.15	≤ 2	1
	1	0	22.11	22.18	22.07		
	1	2	22.13	22.20	22.12		
	1	5	22.10	22.16	22.05		
	3	0	22.09	22.10	22.01		
	3	2	22.10	22.15	22.08		
16QAM	3	3	22.07	22.09	22.00		
	6	0	21.21	21.23	21.16		

Table 9.3.6.7 LTE Conducted Power

Band & Mode			Modulated Average[dBm]	
LTE Band 7	RB Size	RB Offset	Maximum	23.1
			Nominal	22.6

Table 9.3.7.1 Nominal and Maximum Output Power Spec

7) LTE Band 7

Modulation	RB Size	RB Offset	LTE Band 7 Conducted Power- 20 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
Conducted Power (dBm)							
QPSK	1	0	22.93	23.06	23.01	≤ 1	0
	1	50	23.07	23.09	23.08		
	1	99	23.04	23.07	23.05		
	50	0	21.95	22.04	22.01	≤ 1	1
	50	25	22.03	22.09	22.07		
	50	50	22.00	22.07	22.03		
16QAM	100	0	22.02	22.08	22.03		
	1	0	21.99	22.03	22.01	≤ 1	1
	1	50	22.01	22.09	22.05		
	1	99	22.00	22.07	22.04		
	50	0	21.00	21.06	21.01	≤ 2	2
	50	25	21.03	21.09	21.05		
	50	50	21.01	21.07	21.04		
	100	0	21.00	21.07	21.03		

Table 9.3.7.2 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 7 Conducted Power- 15 MHz Bandwidth			MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Mid Channel	High Channel		
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
Conducted Power (dBm)							
QPSK	1	0	22.89	23.00	22.90	≤ 1	0
	1	36	22.95	23.04	22.97		
	1	74	22.91	23.01	22.93		
	36	0	21.91	22.01	22.00	≤ 1	1
	36	18	22.01	22.08	22.05		
	36	37	21.95	22.06	22.03		
	75	0	21.98	22.03	22.00		
16QAM	1	0	21.83	21.91	21.88	≤ 1	1
	1	36	21.90	22.02	21.95		
	1	74	21.89	21.99	21.92		
	36	0	20.93	21.01	20.98	≤ 2	2
	36	18	20.97	21.07	21.03		
	36	37	20.95	21.03	21.00		
	75	0	20.91	21.05	21.01		

Table 9.3.7.3 LTE Conducted Power

LTE Band 7 Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.91	23.01	22.97	≤ 1	0
	1	25	23.01	23.07	23.05		1
	1	49	22.99	23.05	23.01		1
	25	0	21.89	21.96	21.93		1
	25	12	21.96	22.02	22.00		1
	25	25	21.91	22.00	21.96		1
	50	0	21.94	22.01	21.98		1
16QAM	1	0	21.93	22.01	22.00	≤ 1	1
	1	25	22.01	22.07	22.05		1
	1	49	22.00	22.06	22.01		1
	25	0	21.00	21.03	21.01		2
	25	12	21.05	21.08	21.06	≤ 2	2
	25	25	21.03	21.06	21.05		2
	50	0	21.03	21.07	21.05		2

Table 9.3.7.4 LTE Conducted Power

LTE Band 7 Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.91	22.95	22.93	≤ 1	0
	1	12	22.95	23.03	22.98		1
	1	24	22.92	23.01	22.97		1
	12	0	21.88	21.98	21.91		1
	12	6	21.98	22.06	22.03		1
	12	13	21.91	22.05	22.01		1
	25	0	21.95	22.04	22.01		1
16QAM	1	0	21.83	21.90	21.86	≤ 1	1
	1	12	21.94	21.99	21.95		1
	1	24	21.86	21.95	21.88		1
	12	0	20.80	20.91	20.90		2
	12	6	20.88	20.99	20.95	≤ 2	2
	12	13	20.86	20.96	20.93		2
	25	0	20.85	20.96	20.91		2

Table 9.3.7.5 LTE Conducted Power

Band & Mode			Modulated Average[dBm]		
LTE Band 41			Maximum		23.2
			Nominal		22.7

Table 9.3.8.1 Nominal and Maximum Output Power Spec

8) LTE Band 41

Modulation	RB Size	RB Offset	LTE Band 41 Conducted Power- 20 MHz Bandwidth					MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel		
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power (dBm)									
QPSK	1	0	23.10	23.03	23.17	23.04	23.15	≤ 1	0
	1	50	23.17	23.10	23.19	23.11	23.18		
	1	99	23.06	23.01	23.15	23.02	23.11		
	50	0	22.03	21.89	22.18	21.96	22.16	1	1
	50	25	22.16	21.95	22.19	22.00	22.18		
	50	50	22.01	21.86	22.16	21.91	22.14		
16QAM	100	0	22.08	21.91	22.18	21.99	22.11	≤ 1	1
	1	0	22.06	22.01	22.17	22.09	22.15		
	1	50	22.10	22.03	22.18	22.12	22.16		
	1	99	22.01	22.00	22.14	22.06	22.13		
	50	0	21.10	20.88	21.16	21.01	21.12	≤ 2	2
	50	25	21.13	20.90	21.18	21.03	21.16		
	50	50	21.01	20.81	21.12	20.99	21.05		
	100	0	21.10	20.86	21.17	21.00	21.14	2	2

Table 9.3.8.2 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 41 Conducted Power- 15 MHz Bandwidth					MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel		
			39725 (2503.5 MHz)	40173 (2548.3 MHz)	40620 (2593.0 MHz)	41068 (2637.8 MHz)	41515 (2682.5 MHz)		
Conducted Power (dBm)									
QPSK	1	0	23.11	22.85	23.16	22.88	23.13	≤ 1	0
	1	36	23.16	22.92	23.18	22.96	23.17		
	1	74	22.94	22.83	23.10	22.85	23.08		
	36	0	22.02	21.86	22.15	21.90	22.07	1	1
	36	18	22.11	21.88	22.18	21.96	22.13		
	36	37	22.00	21.81	22.13	21.88	22.06		
16QAM	75	0	22.04	21.83	22.16	21.92	22.11	≤ 1	1
	1	0	22.07	21.81	22.15	21.83	22.10		
	1	36	22.12	21.89	22.19	21.94	22.15		
	1	74	22.03	21.79	22.13	21.80	22.08		
	36	0	21.08	20.83	21.14	20.86	21.09	≤ 2	2
	36	18	21.15	20.87	21.19	20.90	21.16		
	36	37	21.01	20.80	21.09	20.82	21.03		
	75	0	21.11	20.85	21.18	20.89	21.14	2	2

Table 9.3.8.3 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 41 Conducted Power- 10 MHz Bandwidth					MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel		
			39700 (2501.0 MHz)	40160 (2547.0 MHz)	40620 (2593.0 MHz)	41080 (2639.0 MHz)	41540 (2685.0 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	22.99	22.79	23.11	22.83	23.02	≤ 1	0
	1	25	23.03	22.88	23.15	22.93	23.10		
	1	49	22.96	22.71	23.05	22.80	23.01		
	25	0	22.09	21.83	22.13	21.90	22.11		
	25	12	22.10	21.88	22.17	21.99	22.15	≤ 2	1
	25	25	22.01	21.75	22.10	21.85	22.08		
	50	0	22.08	21.80	22.16	21.91	22.11		
16QAM	1	0	22.01	21.77	22.10	21.80	22.08	≤ 1	1
	1	25	22.05	21.86	22.16	21.89	22.13		
	1	49	21.95	21.73	22.04	21.77	22.00		
	25	0	21.10	20.79	21.16	20.83	21.14	≤ 2	2
	25	12	21.11	20.83	21.19	20.95	21.16		
	25	25	21.02	20.77	21.11	20.80	21.05		
	50	0	21.05	20.76	21.18	20.93	21.12		

Table 9.3.8.4 LTE Conducted Power

Modulation	RB Size	RB Offset	LTE Band 41 Conducted Power- 5 MHz Bandwidth					MPR Allowed Per 3GPP(dB)	MPR (dB)
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel		
			39675 (2498.5 MHz)	40148 (2545.8 MHz)	40620 (2593.0 MHz)	41093 (2640.3 MHz)	41565 (2687.5 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	23.04	22.77	23.15	22.80	23.05	≤ 1	0
	1	12	23.08	22.83	23.18	22.87	23.15		
	1	24	22.98	22.71	23.13	22.78	23.02		
	12	0	22.10	21.65	22.16	21.86	22.13		
	12	6	22.11	21.70	22.17	21.88	22.16	≤ 2	1
	12	13	22.09	21.61	22.13	21.80	22.10		
	25	0	22.08	21.66	22.16	21.86	22.14		
16QAM	1	0	22.05	21.75	22.13	21.87	22.11	≤ 1	1
	1	12	22.10	21.79	22.16	21.93	22.13		
	1	24	22.03	21.70	22.11	21.85	22.10		
	12	0	21.06	20.66	21.16	20.85	21.14	≤ 2	2
	12	6	21.07	20.73	21.19	20.90	21.16		
	12	13	21.00	20.63	21.11	20.83	21.08		
	25	0	21.04	20.70	21.17	20.89	21.12		

Table 9.3.8.5 LTE Conducted Power

9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average(dBm)		Nominal
			Maximum	Average	
2.4	802.11b	1	20.0	19.5	19.5
		6	20.0	19.5	19.5
		11	20.0	19.5	19.5
	802.11g	1	19.0	18.5	18.5
		6	19.0	18.5	18.5
		11	18.0	17.5	17.5
	802.11n (HT20)	1	18.0	17.5	17.5
		6	19.0	18.5	18.5
		11	18.0	17.5	17.5
	802.11n (HT40)	3	17.0	16.5	16.5
		6	19.0	18.5	18.5
		9	16.0	15.5	15.5

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]		
			2412	2437	2462
802.11b	2412	1	19.67		
	2437	6		19.85	
	2462	11			19.84
802.11g	2412	1	18.24		
	2437	6		18.43	
	2462	11			17.63
802.11n (HT-20)	2412	1	17.60		
	2437	6		18.46	
	2462	11			17.68
802.11n (HT40)	2422	3	16.35		
	2437	6		18.47	
	2452	9			15.45

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a	36-64	17.0	16.5
		100	15.0	14.5
		116-165	17.0	16.5
	802.11n (20MHz)	36-64	17.0	16.5
		100	14.5	14.0
		116-165	17.0	16.5
	802.11n (40MHz)	38	17.0	16.5
		46-54	17.0	16.5
		62	14.0	13.5
		102	15.0	14.5
		110-159	17.0	16.5
	802.11ac (20MHz)	36-64	17.0	16.5
		100	14.5	14.0
		116-165	17.0	16.5
	802.11ac (40MHz)	38	16.0	15.5
		46-54	17.0	16.5
		62	14.0	13.5
		102	15.0	14.5
		110-159	16.5	16.0
	802.11ac (80MHz)	42	15.5	15.0
		58	13.0	12.5
		106	14.0	13.5
		138-155	16.5	16.0

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]
802.11a	5180	36	16.67
	5200	40	16.46
	5220	44	16.33
	5240	48	16.38
	5260	52	16.54
	5280	56	16.35
	5300	60	16.84
	5320	64	16.94
	5500	100	14.57
	5580	116	16.72
	5660	132	16.70
	5720	144	16.75
	5745	149	16.31
	5785	157	16.41
	5825	165	16.46

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]
802.11n (HT-20)	5180	36	16.36
	5200	40	16.17
	5220	44	16.39
	5240	48	16.47
	5260	52	16.39
	5280	56	16.44
	5300	60	16.77
	5320	64	16.45
	5500	100	13.87
	5580	116	16.27
	5660	132	16.13
	5720	144	16.39
	5745	149	16.48
	5785	157	16.18
	5825	165	16.42

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-20)	5180	36	16.32
	5200	40	16.15
	5220	44	16.41
	5240	48	16.44
	5260	52	16.33
	5280	56	16.62
	5300	60	16.73
	5320	64	16.46
	5500	100	13.88
	5580	116	16.23
	5660	132	16.48
	5720	144	16.31
	5745	149	16.49
	5785	157	16.19
	5825	165	16.41

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq.	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]
	(MHz)		
802.11n (HT-40)	5190	38	15.48
	5230	46	16.41
	5270	54	16.54
	5310	62	13.81
	5510	102	14.75
	5550	110	16.33
	5670	134	16.35
	5710	142	16.37
	5755	151	16.13
	5795	159	16.47

Table 9.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq.	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]
	(MHz)		
802.11ac (VHT-40)	5190	38	15.42
	5230	46	16.39
	5270	54	16.52
	5310	62	13.80
	5510	102	14.72
	5550	110	16.25
	5670	134	16.27
	5710	142	16.36
	5755	151	16.10
	5795	159	16.44

Table 9.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq.	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]
	(MHz)		
802.11ac (VHT-80)	5210	42	15.09
	5290	58	12.64
	5530	106	13.19
	5690	138	16.47
	5775	155	16.27

Table 9.4.9 IEEE 802.11ac VHT80 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a	36-64	17.0	16.5
		100	15.0	14.5
		116-165	14.0	13.5
	802.11n (20MHz)	36-64	17.0	16.5
		100	14.5	14.0
		116-165	14.0	13.5
	802.11n (40MHz)	38	17.0	16.5
		46-54	17.0	16.5
		62	14.0	13.5
		102	15.0	14.5
		110-159	14.0	13.5
	802.11ac (20MHz)	36-64	17.0	16.5
		100	14.5	14.0
		116-165	14.0	13.5
	802.11ac (40MHz)	38	16.0	15.5
		46-54	17.0	16.5
		62	14.0	13.5
		102	15.0	14.5
		110-159	14.0	13.5
	802.11ac (80MHz)	42	15.5	15.0
		58	13.0	12.5
		106	14.0	13.5
		138-155	14.0	13.5

Table 9.4.10 Nominal and Maximum Output Power Spec for Receiver Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]
802.11a	5180	36	16.67
	5200	40	16.46
	5220	44	16.33
	5240	48	16.38
	5260	52	16.54
	5280	56	16.43
	5300	60	16.84
	5320	64	16.94
	5500	100	14.57
	5580	116	13.60
	5660	132	13.55
	5720	144	13.66
	5745	149	13.48
	5785	157	13.60
	5825	165	13.63

Table 9.4.11 IEEE 802.11a Average RF Power for Receiver Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]
802.11n (HT-20)	5180	36	16.36
	5200	40	16.17
	5220	44	16.20
	5240	48	16.47
	5260	52	16.39
	5280	56	16.53
	5300	60	16.77
	5320	64	16.45
	5500	100	13.87
	5580	116	13.49
	5660	132	13.19
	5720	144	13.47
	5745	149	13.41
	5785	157	13.35
	5825	165	13.50

Table 9.4.12 IEEE 802.11n Average RF Power for Receiver Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-20)	5180	36	16.32
	5200	40	16.15
	5220	44	16.23
	5240	48	16.44
	5260	52	16.33
	5280	56	16.22
	5300	60	16.73
	5320	64	16.46
	5500	100	13.88
	5580	116	13.44
	5660	132	13.41
	5720	144	13.39
	5745	149	13.33
	5785	157	13.32
	5825	165	13.46

Table 9.4.13 IEEE 802.11n Average RF Power for Receiver Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq.	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]
	(MHz)		
802.11n (HT-40)	5190	38	15.48
	5230	46	16.41
	5270	54	16.54
	5310	62	13.81
	5510	102	14.75
	5550	110	13.68
	5670	134	13.67
	5710	142	13.49
	5755	151	13.45
	5795	159	13.73

Table 9.4.14 IEEE 802.11n Average RF Power for Receiver Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq.	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]
	(MHz)		
802.11ac (VHT-40)	5190	38	15.42
	5230	46	16.39
	5270	54	16.52
	5310	62	13.80
	5510	102	14.72
	5550	110	13.66
	5670	134	13.33
	5710	142	13.47
	5755	151	13.44
	5795	159	13.71

Table 9.4.15 IEEE 802.11ac Average RF Power for Receiver Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq.	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]
	(MHz)		
802.11ac (VHT-80)	5210	42	15.09
	5290	58	12.64
	5530	106	13.19
	5690	138	13.57
	5775	155	13.41

Table 9.4.16 IEEE 802.11ac Average RF Power for Receiver Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a	36-144	13.0	12.5
		149-165	10.0	9.5
	802.11n (20MHz)	36-144	13.0	12.5
		149-165	10.0	9.5
	802.11n (40MHz)	38-142	13.0	12.5
		151-159	10.0	9.5
	802.11ac (20MHz)	36-144	13.0	12.5
		149-165	10.0	9.5
	802.11ac (40MHz)	38-142	13.0	12.5
		151-159	10.0	9.5
	802.11ac (80MHz)	42-138	13.0	12.5
		155	10.0	9.5

Table 9.4.17 Nominal and Maximum Output Power Spec for Hotspot Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]
802.11a	5180	36	12.29
	5200	40	11.99
	5220	44	11.83
	5240	48	11.96
	5260	52	12.09
	5280	56	12.06
	5300	60	12.39
	5320	64	12.33
	5500	100	11.69
	5580	116	12.38
	5660	132	12.15
	5720	144	11.69
	5745	149	9.43
	5785	157	9.50
	5825	165	9.56

Table 9.4.18 IEEE 802.11a Average RF Power for Hotspot Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]
802.11n (HT-20)	5180	36	12.28
	5200	40	11.93
	5220	44	11.65
	5240	48	11.75
	5260	52	11.89
	5280	56	11.96
	5300	60	12.23
	5320	64	12.14
	5500	100	11.41
	5580	116	12.11
	5660	132	11.99
	5720	144	11.65
	5745	149	9.40
	5785	157	9.47
	5825	165	9.53

Table 9.4.19 IEEE 802.11n Average RF Power for Hotspot Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-20)	5180	36	12.22
	5200	40	11.95
	5220	44	11.71
	5240	48	11.80
	5260	52	11.94
	5280	56	11.94
	5300	60	12.20
	5320	64	12.08
	5500	100	11.46
	5580	116	12.23
	5660	132	12.04
	5720	144	11.59
	5745	149	9.22
	5785	157	9.54
	5825	165	9.48

Table 9.4.20 IEEE 802.11n Average RF Power for Hotspot Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]
802.11n (HT-40)	5190	38	12.28
	5230	46	12.02
	5270	54	11.77
	5310	62	12.33
	5510	102	11.49
	5550	110	12.27
	5670	134	11.98
	5710	142	11.64
	5755	151	9.06
	5795	159	9.16

Table 9.4.21 IEEE 802.11n Average RF Power for Hotspot Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-40)	5190	38	12.21
	5230	46	12.04
	5270	54	11.84
	5310	62	12.22
	5510	102	11.61
	5550	110	12.24
	5670	134	11.94
	5710	142	11.65
	5755	151	9.06
	5795	159	9.22

Table 9.4.22 IEEE 802.11ac Average RF Power for Hotspot Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]
802.11ac (VHT-80)	5210	42	12.97
	5290	58	12.27
	5530	106	12.15
	5690	138	12.05
	5775	155	9.98

Table 9.4.23 IEEE 802.11ac Average RF Power for Hotspot Mode (Reduced Output Power during Scenarios with 5 GHz WLAN)

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is $\leq 1.2 \text{ W/kg}$.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	5.50
	Nominal	5.00
Bluetooth 2 Mbps	Maximum	5.40
	Nominal	4.90
Bluetooth 3 Mbps	Maximum	5.00
	Nominal	4.50
Bluetooth (LE / 1Mbps)	Maximum	4.80
	Nominal	4.30
Bluetooth (LE / 2Mbps)	Maximum	3.19
	Nominal	2.69

Table 9.5.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency (MHz)	Frame AVG Output Power (1Mbps)	Frame AVG Output Power (2Mbps)	Frame AVG Output Power (3Mbps)
		(dBm)	(dBm)	(dBm)
Low	2402	5.35	5.30	4.99
Mid	2441	4.63	4.67	4.33
High	2480	4.61	4.66	4.32

Table 9.5.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency (MHz)	Frame AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 2Mbps)
		(dBm)	(dBm)
Low	2402	4.78	3.08
Mid	2440	4.38	2.64
High	2480	4.71	3.09

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

- Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

- Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

- Instruments and EUT were connected like Figure 9.5.1.

- The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

- Power levels were measured by a Power Meter.

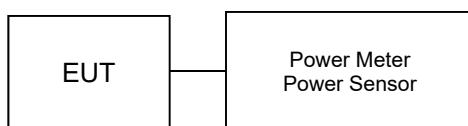


Figure 9.5.1 Average Power Measurement Setup

- Bluetooth Transmission Plot

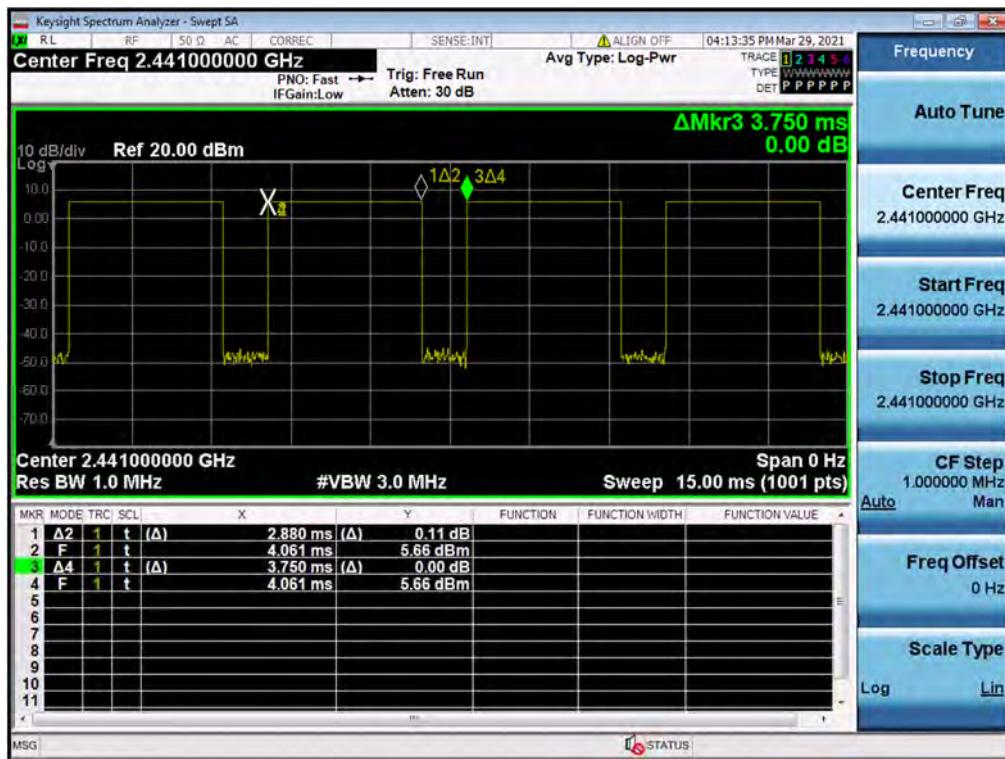


Figure 9.5.2 Bluetooth Transmission Plot

- Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse}/\text{Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

10. SYSTEM VERIFICATION

10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	ϵ_r Deviation [%]	σ Deviation [%]
Mar. 8. 2021	750 Head	21.9	21.8	707.5	42.129	0.887	42.199	0.864	0.17	-2.59
				750.0	41.900	0.890	41.883	0.899	-0.04	1.01
				782.0	41.749	0.894	41.528	0.928	-0.53	3.80
Mar. 6. 2021	750 Head	21.0	20.9	750.0	41.900	0.890	42.282	0.883	0.91	-0.79
				793.0	41.698	0.895	41.777	0.921	0.19	2.91
Mar. 4. 2021	835 Head	21.0	20.9	824.2	41.552	0.899	43.065	0.918	3.64	2.11
				826.4	41.542	0.899	43.026	0.919	3.57	2.22
				829.0	41.528	0.899	42.982	0.921	3.50	2.45
				835.0	41.500	0.900	42.884	0.926	3.33	2.89
				836.5	41.500	0.901	42.865	0.927	3.29	2.89
				836.6	41.500	0.901	42.859	0.927	3.27	2.89
				844.0	41.500	0.910	42.733	0.933	2.97	2.53
				846.6	41.500	0.912	42.696	0.935	2.88	2.52
				848.8	41.500	0.914	42.660	0.936	2.80	2.41
				821.5	41.566	0.898	42.930	0.908	3.28	1.11
Mar. 10. 2021	835 Head	21.2	21.1	831.5	41.519	0.900	42.826	0.917	3.15	1.89
				835.0	41.500	0.900	42.793	0.920	3.12	2.22
				841.5	41.500	0.906	42.725	0.925	2.95	2.10
				1712.4	40.126	1.350	40.148	1.315	0.05	-2.59
Feb. 25. 2021	1800 Head	21.2	21.0	1720.0	40.114	1.354	40.102	1.321	-0.03	-2.44
				1732.4	40.097	1.361	40.033	1.332	-0.16	-2.13
				1732.5	40.097	1.361	40.032	1.332	-0.16	-2.13
				1745.0	40.079	1.369	39.957	1.342	-0.30	-1.97
				1752.6	40.069	1.373	39.905	1.347	-0.41	-1.89
				1770.0	40.043	1.383	39.778	1.362	-0.66	-1.52
Mar. 9. 2021	1900 Head	20.3	20.2	1800.0	40.000	1.400	39.571	1.389	-1.07	-0.79
				1850.2	40.000	1.400	41.124	1.391	2.81	-0.64
				1852.4	40.000	1.400	41.116	1.393	2.79	-0.50
				1880.0	40.000	1.400	40.985	1.420	2.46	1.43
				1900.0	40.000	1.400	40.876	1.439	2.19	2.79
				1907.6	40.000	1.400	40.834	1.446	2.09	3.29
Mar. 11. 2021	1900 Head	20.7	20.6	1909.8	40.000	1.400	40.823	1.448	2.06	3.43
				1860.0	40.000	1.400	40.997	1.381	2.49	-1.36
				1882.5	40.000	1.400	40.916	1.403	2.29	0.21
				1900.0	40.000	1.400	40.853	1.420	2.13	1.43
Apr. 12. 2021	2450 Head	20.1	20.0	1905.0	40.000	1.400	40.835	1.425	2.09	1.79
				2412.0	39.265	1.766	40.630	1.752	3.48	-0.79
				2422.0	39.248	1.775	40.628	1.768	3.52	-0.39
				2437.0	39.222	1.788	40.627	1.788	3.58	0.00
				2450.0	39.200	1.800	40.586	1.799	3.54	-0.06
Mar. 24. 2021	2450 Head	20.4	21.0	2452.0	39.197	1.802	40.577	1.800	3.52	-0.11
				2462.0	39.184	1.813	40.520	1.805	3.41	-0.44
				2402.0	39.282	1.757	39.800	1.762	1.32	0.28
				2441.0	39.215	1.792	39.650	1.807	1.11	0.84
				2450.0	39.200	1.800	39.618	1.818	1.07	1.00
				2480.0	39.160	1.832	39.515	1.850	0.91	0.98

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Apr. 1. 2021	2600 Head	20.7	20.6	2506.0	39.125	1.860	38.849	1.838	-0.71	-1.18
				2549.5	39.068	1.906	38.735	1.907	-0.85	0.05
				2593.0	39.009	1.953	38.592	1.937	-1.07	-0.82
				2600.0	39.000	1.960	38.551	1.942	-1.15	-0.92
				2636.5	38.955	2.000	38.378	1.989	-1.48	-0.55
				2680.0	38.900	2.048	38.302	2.053	-1.54	0.24
Apr. 1. 2021	2600 Head	21.2	21.1	2510.0	39.120	1.864	38.769	1.876	-0.90	0.64
				2535.0	39.087	1.891	38.694	1.903	-1.01	0.63
				2560.0	39.053	1.917	38.589	1.931	-1.19	0.73
				2600.0	39.000	1.960	38.462	1.974	-1.38	0.71
Apr. 13. 2021	5200 Head	20.9	20.8	5180.0	36.020	4.639	35.537	4.578	-1.34	-1.31
				5190.0	36.010	4.650	35.513	4.589	-1.38	-1.31
				5200.0	36.000	4.660	35.488	4.603	-1.42	-1.22
				5210.0	35.990	4.670	35.469	4.617	-1.45	-1.13
				5220.0	35.980	4.680	35.452	4.627	-1.47	-1.13
				5230.0	35.970	4.690	35.429	4.638	-1.50	-1.11
				5240.0	35.960	4.700	35.403	4.651	-1.55	-1.04
Apr. 13. 2021	5300 Head	20.9	20.8	5260.0	35.940	4.720	35.361	4.681	-1.61	-0.83
				5270.0	35.930	4.730	35.348	4.695	-1.62	-0.74
				5280.0	35.920	4.740	35.340	4.705	-1.61	-0.74
				5290.0	35.910	4.750	35.324	4.715	-1.63	-0.74
				5300.0	35.900	4.760	35.296	4.726	-1.68	-0.71
				5310.0	35.890	4.770	35.273	4.740	-1.72	-0.63
				5320.0	35.880	4.780	35.255	4.753	-1.74	-0.56
Apr. 20. 2021	5600 Head	20.4	20.3	5500.0	35.650	4.965	36.711	5.029	2.98	1.29
				5510.0	35.635	4.976	36.689	5.036	2.96	1.21
				5530.0	35.605	4.997	36.622	5.058	2.86	1.22
				5550.0	35.575	5.018	36.562	5.084	2.77	1.32
				5580.0	35.530	5.049	36.485	5.137	2.69	1.74
				5600.0	35.500	5.070	36.484	5.167	2.77	1.91
				5660.0	35.440	5.130	36.357	5.217	2.59	1.70
				5670.0	35.430	5.140	36.315	5.231	2.50	1.77
				5690.0	35.410	5.160	36.249	5.270	2.37	2.13
				5710.0	35.390	5.180	36.238	5.304	2.40	2.39
				5720.0	35.380	5.190	36.240	5.313	2.43	2.37
				5800.0	35.300	5.270	36.040	5.403	2.10	2.52
Apr. 21. 2021	5800 Head	20.1	20.0	5745.0	35.355	5.215	34.956	5.279	-1.13	1.23
				5755.0	35.345	5.225	34.938	5.293	-1.15	1.30
				5775.0	35.325	5.245	34.914	5.314	-1.16	1.32
				5785.0	35.315	5.255	34.894	5.322	-1.19	1.27
				5795.0	35.305	5.265	34.872	5.335	-1.23	1.33
				5800.0	35.300	5.270	34.861	5.341	-1.24	1.35
				5825.0	35.275	5.296	34.825	5.374	-1.28	1.47

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity , for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

10.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 10.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
F	750	D750V3, SN:1049	Mar. 8. 2021	Head	21.9	21.8	3328	250	8.39	2.13	8.52	1.55
F	750	D750V3, SN:1049	Mar. 6. 2021	Head	21.0	20.3	3328	250	8.39	2.11	8.44	0.60
F	835	D835V2, SN:4d159	Mar. 4. 2021	Head	21.0	20.9	3328	250	9.47	2.39	9.56	0.95
F	835	D835V2, SN:4d159	Mar. 10. 2021	Head	21.2	21.1	3328	250	9.47	2.41	9.64	1.80
F	1800	D1800V2, SN:2d202	Feb. 25. 2021	Head	21.2	21.0	3327	100	39.6	3.81	38.10	-3.79
F	1800	D1800V2, SN:2d202	Feb. 25. 2021	Head	21.2	21.0	3328	100	39.6	3.83	38.30	-3.28
F	1900	D1900V2, SN:5d176	Mar. 9. 2021	Head	20.3	20.2	3328	100	39.3	3.98	39.80	1.27
F	1900	D1900V2, SN:5d176	Mar. 11. 2021	Head	20.7	20.6	3328	100	39.3	4.02	40.20	2.29
D	2450	D2450V2, SN:920	Apr. 12. 2021	Head	20.1	20.0	3327	100	52.0	5.36	53.60	3.08
A	2450	D2450V2, SN:920	Mar. 24. 2021	Head	20.4	21.0	3930	100	52.0	5.21	52.10	0.19
A	2600	D2600V2, SN:1016	Apr. 1. 2021	Head	21.2	21.1	3930	100	55.9	5.44	54.00	-3.40
D	2600	D2600V2, SN:1016	Apr. 1. 2021	Head	20.7	20.6	3327	100	55.9	5.39	53.90	-3.58
D	5200	D5GHzV2, SN:1103	Apr. 13. 2021	Head	20.9	20.8	3866	100	82.3	7.79	77.90	-5.35
D	5300	D5GHzV2, SN:1103	Apr. 13. 2021	Head	20.9	20.8	3866	100	84.7	8.16	81.60	-3.66
D	5500	D5GHzV2, SN:1103	Apr. 20. 2021	Head	20.4	20.3	3866	100	87.7	8.40	84.00	-4.22
D	5600	D5GHzV2, SN:1103	Apr. 20. 2021	Head	20.4	20.3	3866	100	86.4	8.44	84.40	-2.31
D	5800	D5GHzV2, SN:1103	Apr. 20. 2021	Head	20.4	20.3	3866	100	83.5	8.36	83.60	0.12
D	5800	D5GHzV2, SN:1103	Apr. 21. 2021	Head	20.1	20.0	7368	100	83.5	8.33	83.30	-0.24

Note1 : System Verification was measured with input 250 mW, 100 mW and normalized to 1W.

Note2 : Full system validation status and results can be found in Appendix D.

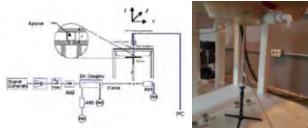


Figure 10.1 Dipole Verification Test Setup Diagram & Photo

11. SAR TEST RESULTS

11.1 Head SAR Results

Table 11.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	32.50	32.37	-0.170	Left Touch	FCC #1	1	1:8.3	0.439	1.030	0.452	A1
836.6	190	GSM850	GSM	32.50	32.37	0.050	Right Touch	FCC #1	1	1:8.3	0.381	1.030	0.392	
836.6	190	GSM850	GSM	32.50	32.37	-0.020	Left Tilt	FCC #1	1	1:8.3	0.253	1.030	0.261	
836.6	190	GSM850	GSM	32.50	32.37	0.080	Right Tilt	FCC #1	1	1:8.3	0.267	1.030	0.275	
836.6	190	GSM850	GRPS	30.50	30.49	-0.030	Left Touch	FCC #1	2	1:4.15	0.541	1.002	0.542	A2
836.6	190	GSM850	GRPS	30.50	30.49	0.060	Right Touch	FCC #1	2	1:4.15	0.447	1.002	0.448	
836.6	190	GSM850	GRPS	30.50	30.49	-0.020	Left Tilt	FCC #1	2	1:4.15	0.253	1.002	0.254	
836.6	190	GSM850	GRPS	30.50	30.49	0.040	Right Tilt	FCC #1	2	1:4.15	0.304	1.002	0.305	
836.6	190	GSM850	GRPS	30.50	30.49	0.020	Left Touch	FCC #1	2	1:4.15	0.540	1.002	0.541	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	29.50	29.25	0.190	Left Touch	FCC #1	1	1:8.3	0.239	1.059	0.253	
1880.0	661	PCS1900	PCS	29.50	29.25	0.150	Right Touch	FCC #1	1	1:8.3	0.293	1.059	0.310	A3
1880.0	661	PCS1900	PCS	29.50	29.25	0.170	Left Tilt	FCC #1	1	1:8.3	0.081	1.059	0.085	
1880.0	661	PCS1900	PCS	29.50	29.25	0.110	Right Tilt	FCC #1	1	1:8.3	0.079	1.059	0.084	
1880.0	661	PCS1900	GRPS	28.00	27.95	-0.020	Left Touch	FCC #1	2	1:4.15	0.368	1.012	0.372	
1880.0	661	PCS1900	GRPS	28.00	27.95	0.040	Right Touch	FCC #1	2	1:4.15	0.494	1.012	0.500	A4
1880.0	661	PCS1900	GRPS	28.00	27.95	-0.060	Left Tilt	FCC #1	2	1:4.15	0.124	1.012	0.125	
1880.0	661	PCS1900	GRPS	28.00	27.95	-0.110	Right Tilt	FCC #1	2	1:4.15	0.121	1.012	0.122	
1880.0	661	PCS1900	GRPS	28.00	27.95	0.180	Right Touch	FCC #1	2	1:4.15	0.462	1.012	0.468	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	4183	WCDMA 850	RMC	23.20	23.19	-0.010	Left Touch	FCC #1	1:1	0.219	1.002	0.219	A5	
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.030	Right Touch	FCC #1	1:1	0.163	1.002	0.163		
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.060	Left Tilt	FCC #1	1:1	0.102	1.002	0.102		
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.170	Right Tilt	FCC #1	1:1	0.100	1.002	0.100		
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.010	Left Touch	FCC #1	1:1	0.217	1.002	0.217		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.4 WCDMA 1700 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.060	Left Touch	FCC #1	1:1	0.453	1.002	0.454		
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.140	Right Touch	FCC #1	1:1	0.514	1.002	0.515	A6	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	-0.110	Left Tilt	FCC #1	1:1	0.152	1.002	0.152		
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.020	Right Tilt	FCC #1	1:1	0.149	1.002	0.149		
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	-0.020	Left Touch	FCC #1	1:1	0.498	1.002	0.499		
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.5 WCDMA 1900 Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #			
MHz	Ch															
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.180	Left Touch	FCC #1	1:1	0.459	1.002	0.460				
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.100	Right Touch	FCC #1	1:1	0.549	1.002	0.550	A7			
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.180	Left Tilt	FCC #1	1:1	0.171	1.002	0.171				
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	-0.010	Right Tilt	FCC #1	1:1	0.144	1.002	0.144				
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.120	Right Touch	FCC #1	1:1	0.548	1.002	0.549				
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.6 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	23.00	22.99	0.060	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.221	1.002	0.221	A8
707.5	23095	LTE B12	10	22.00	21.99	0.040	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.174	1.002	0.174	
707.5	23095	LTE B12	10	23.00	22.99	0.180	0	Right Touch	FCC #1	QPSK	1	25		0.202	1.002	0.202	
707.5	23095	LTE B12	10	22.00	21.99	0.170	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.163	1.002	0.163	
707.5	23095	LTE B12	10	23.00	22.99	0.030	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.160	1.002	0.160	
707.5	23095	LTE B12	10	22.00	21.99	0.050	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.139	1.002	0.139	
707.5	23095	LTE B12	10	23.00	22.99	0.020	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.140	1.002	0.140	
707.5	23095	LTE B12	10	22.00	21.99	0.070	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.117	1.002	0.117	
707.5	23095	LTE B12	10	23.00	22.99	0.010	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.191	1.002	0.191	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.7 LTE Band 13 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
782.0	23230	LTE B13	10	23.00	22.99	0.080	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.267	1.002	0.268	A9
782.0	23230	LTE B13	10	22.00	21.94	0.030	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.214	1.014	0.217	
782.0	23230	LTE B13	10	23.00	22.99	0.170	0	Right Touch	FCC #1	QPSK	1	25		0.220	1.002	0.220	
782.0	23230	LTE B13	10	22.00	21.94	0.170	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.171	1.014	0.173	
782.0	23230	LTE B13	10	23.00	22.99	0.030	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.180	1.002	0.180	
782.0	23230	LTE B13	10	22.00	21.94	0.120	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.157	1.014	0.159	
782.0	23230	LTE B13	10	23.00	22.99	0.010	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.173	1.002	0.173	
782.0	23230	LTE B13	10	22.00	21.94	0.080	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.138	1.014	0.140	
782.0	23230	LTE B13	10	23.00	22.99	0.050	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.266	1.002	0.267	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.8 LTE Band 14 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
793.0	23330	LTE B14	10	23.00	22.98	0.030	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.261	1.005	0.262	A10
793.0	23330	LTE B14	10	22.00	21.97	0.010	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.206	1.007	0.207	
793.0	23330	LTE B14	10	23.00	22.98	-0.160	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.211	1.005	0.212	
793.0	23330	LTE B14	10	22.00	21.97	0.130	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.163	1.007	0.164	
793.0	23330	LTE B14	10	23.00	22.98	0.190	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.177	1.005	0.178	
793.0	23330	LTE B14	10	22.00	21.97	0.110	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.151	1.007	0.152	
793.0	23330	LTE B14	10	23.00	22.98	0.020	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.129	1.005	0.130	
793.0	23330	LTE B14	10	22.00	21.97	0.150	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.112	1.007	0.113	
793.0	23330	LTE B14	10	23.00	22.98	0.020	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.258	1.005	0.259	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.9 LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
831.5	26865	LTE B26	15	23.00	22.99	0.120	0	Left Touch	FCC #1	QPSK	1	36	1:1	0.462	1.002	0.463	A11
831.5	26865	LTE B26	15	22.00	21.99	0.080	1	Left Touch	FCC #1								

Table 11.1.10 LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1745.0	132322	LTE B66	20	23.30	23.29	0.150	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.581	1.002	0.582	A12
1745.0	132322	LTE B66	20	22.30	22.28	0.130	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.446	1.005	0.448	
1745.0	132322	LTE B66	20	23.30	23.29	0.130	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.651	1.002	0.652	
1745.0	132322	LTE B66	20	22.30	22.28	0.070	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.492	1.005	0.494	
1745.0	132322	LTE B66	20	23.30	23.29	0.090	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.161	1.002	0.161	
1745.0	132322	LTE B66	20	22.30	22.28	0.190	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.127	1.005	0.128	
1745.0	132322	LTE B66	20	23.30	23.29	0.160	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.149	1.005	0.150	
1745.0	132322	LTE B66	20	23.30	23.29	0.100	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.617	1.002	0.618	
ANSI / IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.11 LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1882.5	26365	LTE B25	20	23.50	23.49	0.180	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.549	1.002	0.550	A13
1882.5	26365	LTE B25	20	22.50	22.49	-0.180	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.460	1.002	0.461	
1882.5	26365	LTE B25	20	23.50	23.49	0.030	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.694	1.002	0.695	
1882.5	26365	LTE B25	20	22.50	22.49	0.090	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.543	1.002	0.544	
1882.5	26365	LTE B25	20	23.50	23.49	-0.060	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.155	1.002	0.155	
1882.5	26365	LTE B25	20	22.50	22.49	-0.060	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.153	1.002	0.153	
1882.5	26365	LTE B25	20	23.50	23.49	0.140	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.219	1.002	0.219	
1882.5	26365	LTE B25	20	22.50	22.49	0.090	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.168	1.002	0.168	
1882.5	26365	LTE B25	20	23.50	23.49	0.080	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.686	1.002	0.687	
ANSI / IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.12 LTE Band 7 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2535.0	21100	LTE B7	20	23.10	23.09	0.100	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.405	1.002	0.406	A14
2535.0	21100	LTE B7	20	22.10	22.09	0.010	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.328	1.002	0.329	
2535.0	21100	LTE B7	20	23.10	23.09	0.180	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.764	1.002	0.766	
2535.0	21100	LTE B7	20	22.10	22.09	-0.020	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.605	1.002	0.606	
2535.0	21100	LTE B7	20	23.10	23.09	-0.000	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.274	1.002	0.275	
2535.0	21100	LTE B7	20	22.10	22.09	-0.090	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.223	1.002	0.223	
2535.0	21100	LTE B7	20	23.10	23.09	0.180	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.149	1.002	0.149	
2535.0	21100	LTE B7	20	22.10	22.09	-0.010	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.108	1.002	0.108	
2535.0	21100	LTE B7	20	23.10	23.09	-0.110	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.763	1.002	0.765	
ANSI / IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.13 LTE Band 41 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2437.0	6	802.11b	20.00	19.85	0.040	0	Left Touch	FCC #2	0.144	1	97.6	0.141	1.035	1.025	0.150	A16	
2437.0	6	802.11b	20.00	19.85	0.070	1	Right Touch	FCC #2	0.865	1	97.6	0.745	1.035	1.025	0.790		
2437.0	6	802.11b	20.00	19.85	0.130	1	Left Tilt	FCC #2	0.056	1	97.6	0.053	1.035	1.025	0.056		
2437.0	6	802.11b	20.00	19.85	0.110	1	Right Tilt	FCC #2	0.224	1	97.6	0.209	1.035	1.025	0.222		
ANSI / IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.1.15 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5270.0	54	802.11n HT40	17.00	16.54	-0.160	Left Touch	FCC #2	0.263	6	96.6	0.283	1.112	1.035	0.326	
5270.0	54	802.11n HT40	17.00	16.54	-0.160	Right Touch	FCC #2	0.533	6	96.6	0.620	1.112	1.035	0.714	A17
5270.0	54	802.11n HT40	17.00	16.54	-0.180	Left Tilt	FCC #2	0.271	6	96.6	0.282	1.112	1.035	0.325	
5270.0	54	802.11n HT40	17.00	16.54	-0.160	Right Tilt	FCC #2	0.415	6	96.6	0.480	1.112	1.035	0.553	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram					

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Head
1.6 W/kg (mW/g)
averaged over 1 gram

ANSI / IEEE C95.1-1992- SAFETY LIMIT

Spatial Peak

Uncontrolled Exposure/General Population Exposure

Note: U-NII-1 and U-NII-2 Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.1.16 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Service	Maximum Allowed Power [dBm]	1g SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	Scaling Factor	SAR for the band with lower maximum output power	Plots #
MHz	Ch													
5270.0	54	802.11n HT40	OFDM	17.0	0.714	5230	802.11a	OFDM	17.0	1.000	0.714	X		
5270.0	54	802.11n HT40	OFDM	17.0	0.714	5230	802.11a	OFDM	17.0	1.000	0.714	X		
5270.0	54	802.11n HT40	OFDM	17.0	0.714	5230	802.11a	OFDM	17.0	1.000	0.714	X		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram				

ANSI / IEEE C95.1-1992- SAFETY LIMIT

Spatial Peak

Uncontrolled Exposure/General Population Exposure

Note: Yellow entries represent variability measurements.

Table 11.1.17 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5510.0	102	802.11n HT40	15.00	14.75	-0.040	Left Touch	FCC #2	0.466	6	96.6	0.502	1.059	1.035	0.550	
5550.0	110	802.11n HT40	17.00	16.33	0.110	Left Touch	FCC #2	0.836	6	96.6	0.723	1.167	1.035	0.873	
5670.0	134	802.11n HT40	17.00	16.35	0.130	Left Touch	FCC #2	0.832	6	96.6	0.755	1.161	1.035	0.907	
5710.0	142	802.11n HT40	17.00	16.37	0.010	Left Touch	FCC #2	0.759	6	96.6	0.824	1.156	1.035	0.986	
5510.0	102	802.11n HT40	15.00	14.75	-0.040	Right Touch	FCC #2	0.592	6	96.6	0.687	1.059	1.035	0.753	
5550.0	110	802.11n HT40	17.00	16.33	0.130	Right Touch	FCC #2	0.825	6	96.6	0.909	1.167	1.035	1.098	
5670.0	134	802.11n HT40	17.00	16.35	0.060	Right Touch	FCC #2	0.811	6	96.6	0.839	1.161	1.035	1.008	
5710.0	142	802.11n HT40	17.00	16.37	-0.170	Right Touch	FCC #2	0.930	6	96.6	0.991	1.156	1.035	1.186	A18
5710.0	142	802.11n HT40	17.00	16.37	0.180	Left Tilt	FCC #2	0.570	6	96.6	0.623	1.156	1.035	0.746	
5510.0	102	802.11n HT40	15.00	14.75	0.110	Right Tilt	FCC #2	0.771	6	96.6	0.783	1.059	1.035	0.858	
5550.0	110	802.11n HT40	17.00	16.33	0.130	Right Tilt	FCC #2	0.693	6	96.6	0.705	1.167	1.035	0.852	
5670.0	134	802.11n HT40	17.00	16.35	0.190	Right Tilt	FCC #2	0.732	6	96.6	0.739	1.161	1.035	0.888	
5710.0	142	802.11n HT40	17.00	16.37	0.060	Right Tilt	FCC #2	0.927	6	96.6	0.988	1.156	1.035	1.182	
5710.0	142	802.11n HT40	17.00	16.37	-0.040	Right Touch	FCC #2	0.927	6	96.6	0.983	1.156	1.035	1.176	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram					

ANSI / IEEE C95.1-1992- SAFETY LIMIT

Spatial Peak

Uncontrolled Exposure/General Population Exposure

Note: Yellow entries represent variability measurements.

Table 11.1.18 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5755.0	151	802.11n HT40	17.00	16.13	0.020	Left Touch	FCC #2	0.613	6	96.6	0.633	1.222	1.035	0.801	
5795.0	159	802.11n HT40	17.00	16.47	-0.140	Left Touch	FCC #2	0.789	6	96.6	0.847	1.130	1.035	0.991	
5755.0	151	802.11n HT40	17.00	16.13	0.110	Right Touch	FCC #2	0.857	6	96.6	0.835	1.222	1.035	1.056	
5795.0	159	802.11n HT40	17.00	16.47	0.190	Right Touch	FCC #2	1.090	6	96.6	0.993	1.130	1.035	1.162	A20
5795.0	159	802.11n HT40	17.00	16.47	0.070	Left Tilt	FCC #2	0.535	6	96.6	0.581	1.130	1.035	0.680	
5755.0	151	802.11n HT40	17.00	16.13	0.020	Right Tilt	FCC #2	0.602	6	96.6	0.560	1.222	1.035	0.708	
5795.0	159	802.11n HT40	17.00	16.47	0.070	Right Tilt	FCC #2	0.658	6	96.6	0.718	1.130	1.035	0.840	
5795.0	159	802.11n HT40	17.00	16.47	-0.120	Right Touch	FCC #2	1.060	6	96.6	0.990	1.130	1.035	1.158	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram					

ANSI / IEEE C95.1-1992- SAFETY LIMIT

Spatial Peak

Uncontrolled Exposure/General Population Exposure

Note: Yellow entries represent variability measurements.

Table 11.1.19 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W
-----------	--	-------------------	--------------------------------------	-----------------------------	---------------------	---------------------	----------------------------	--------------------------	------------------------	---------------	---------------------	-------------------	--------------------------------------	---------------------------

Table 11.1.20 Bluetooth Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	5.50	4.63	0.000	Left Touch	FCC #2	1	76.8	0.009	1.222	1.302	0.014	
2441.0	39	Bluetooth	5.50	4.63	0.000	Right Touch	FCC #2	1	76.8	0.016	1.222	1.302	0.025	A22
2441.0	39	Bluetooth	5.50	4.63	0.000	Left Tilt	FCC #2	1	76.8	0.008	1.222	1.302	0.013	
2441.0	39	Bluetooth	5.50	4.63	0.000	Right Tilt	FCC #2	1	76.8	0.007	1.222	1.302	0.011	

ANSI / IEEE C95.1-1992- SAFETY LIMIT
 Spatial Peak
 Uncontrolled Exposure/General Population Exposure

Head
 1.6 W/kg (mW/g)
 averaged over 1 gram

11.2 Standalone Body-Worn SAR Worn SAR Results

Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/ Band		Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
836.6	190	GSM850	GSM	32.50	32.37	-0.080	15 mm [Rear]	FCC #1	1	1:8.3	0.550	1.030	0.567	A23	
836.6	190	GSM850	GPRS	30.50	30.49	0.020	15 mm [Rear]	FCC #1	2	1:4.15	0.645	1.002	0.646	A24	
836.6	190	GSM850	GPRS	30.50	30.49	0.070	15 mm [Rear]	FCC #1	2	1:4.15	0.642	1.002	0.643		
1880.0	661	PCS1900	PCS	29.50	29.25	0.050	15 mm [Rear]	FCC #1	1	1:8.3	0.292	1.059	0.309	A25	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.080	15 mm [Rear]	FCC #1	2	1:4.15	0.392	1.012	0.397	A26	
1880.0	661	PCS1900	GPRS	28.00	27.95	-0.010	15 mm [Rear]	FCC #1	2	1:4.15	0.370	1.012	0.374		
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.010	15 mm [Rear]	FCC #1	N/A	1:1	0.715	1.002	0.716	A27	
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.030	15 mm [Rear]	FCC #1	N/A	1:1	0.713	1.002	0.714		
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.060	15 mm [Rear]	FCC #1	N/A	1:1	0.716	1.002	0.717	A28	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.000	15 mm [Rear]	FCC #1	N/A	1:1	0.700	1.002	0.701		
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.000	15 mm [Rear]	FCC #1	N/A	1:1	0.596	1.002	0.597	A29	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.030	15 mm [Rear]	FCC #1	N/A	1:1	0.588	1.002	0.589		

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Note(s):

1. The rear with 15 mm spacing configuration was tested since only the rear is 15 mm spacing to human body-worn with accessory of this device.

2. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.2 LTE B12, B13, B14, B26, B66 Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode/ Band		BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																	
707.5	23095	LTE B12	10	23.00	22.99	0.010	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.399	1.002	0.400	A30	
707.5	23095	LTE B12	10	22.00	21.99	0.030	1	15 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.316	1.002	0.317		
707.5	23095	LTE B12	10	23.00	22.99	0.000	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.308	1.002	0.309		
782.0	23230	LTE B13	10	23.00	22.99	0.010	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.508	1.002	0.509	A31	
782.0	23230	LTE B13	10	22.00	21.94	0.080	1	15 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.448	1.014	0.454		
782.0	23230	LTE B13	10	23.00	22.99	0.100	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.491	1.002	0.492		
793.0	23330	LTE B14	10	23.00	22.98	0.190	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.449	1.005	0.451	A32	
793.0	23330	LTE B14	10	22.00	21.97	0.130	1	15 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.415	1.007	0.418		
793.0	23330	LTE B14	10	23.00	22.98	0.110	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.448	1.005	0.450		
831.5	26865	LTE B26	15	23.00	22.99	0.010	0	15 mm [Rear]	FCC #1	QPSK	1	36	1:1	0.550	1.002	0.551	A33	
831.5	26865	LTE B26	15	22.00	21.99	0.030	1	15 mm [Rear]	FCC #1	QPSK	25	18	1:1	0.424	1.002	0.425		
831.5	26865	LTE B26	15	23.00	22.99	0.040	0	15 mm [Rear]	FCC #1	QPSK	1	36	1:1	0.440	1.002	0.441		
1745.0	132322	LTE B66	20	23.30	23.29	0.020	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.602	1.002	0.603	A34	
1745.0	132322	LTE B66	20	22.30	22.28	-0.020	1	15 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.489	1.005	0.491		
1745.0	132322	LTE B66	20	23.30	23.29	0.010	0	15 mm [Rear]	FCC #1	OPSK	1	50	1:1	0.588	1.002	0.589		

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Note(s):

1. The rear with 15 mm spacing configuration was tested since only the rear is 15 mm spacing to human body-worn with accessory of this device.

2. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.3 LTE B25, B7, B41 Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode/ Band		BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																	
1882.5	26365	LTE B25	20	23.50	23.49	-0.030	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.562	1.002	0.563	A35	
1882.5	26365	LTE B25	20	22.50	22.49	0.030	1	15 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.445	1.002	0.446		
1882.5	26365	LTE B25	20	23.50	23.49	0.010	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.502	1.002	0.503		
2535.0	21100	LTE B7	20	23.10	23.09	0.000	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.671	1.002	0.672	A36	
2535.0	21100	LTE B7	20	22.10	22.09	0.020	1	15 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.579	1.002	0.580		
2535.0	21100	LTE B7	20	23.10	23.09	0.020	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.670	1.002	0.671		
2593.0	40620	LTE B41	20	23.20	23.19	-0.000	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	0.561	1.002	0.562	A37	
2593.0	40620	LTE B41	20	22.20	22.19	0.010	1	15 mm [Rear]	FCC #1	QPSK	50	25	1:1.58	0.430	1.002	0.431		
2593.0	40620	LTE B41	20	23.20	23.19	0.100	0	15 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	0.549	1.002	0.550		

ANSI / IEEE C95.1-1992- SAFETY LIMIT
Spatial Peak
Uncontrolled Exposure/General Population Exposure

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Note(s):

1. The rear with 15 mm spacing configuration was tested since only the rear is 15 mm spacing to human body-worn with accessory of this device.

2. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.4 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2437.0	6	802.11p	20.00	19.85	0.020	15 mm [Rear]	FCC #2	0.276	1	97.6	0.278	1.035	1.025	0.295	A38
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure														Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: The rear with 15 mm spacing configuration was tested since only the rear is 15 mm spacing to human body-worn with accessory of this device.

Adjusted SAR results for OFDM SAR														
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Determine OFDM SAR
MHz	Ch													
2437.0	6	802.11b	DSSS	20.00	0.295	2437	802.11g	OFDM	19.00	0.794	0.234	X		
2437.0	6	802.11b	DSSS	20.00	0.295	2437	802.11n (HT20)	OFDM	19.00	0.794	0.234	X		
2437.0	6	802.11b	DSSS	20.00	0.295	2437	802.11n (HT40)	OFDM	19.00	0.794	0.234	X		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure														Body 1.6 W/kg (mW/g) averaged over 1 gram

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
5270.0	54	802.11n HT40	17.00	16.54	-0.090	15 mm [Rear]	FCC #2	0.618	6	96.6	0.641	1.112	1.035	0.738	A39
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure														Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: The rear with 15 mm spacing configuration was tested since only the rear is 15 mm spacing to human body-worn with accessory of this device.

Adjusted SAR results for UNII-1 and UNII-2A SAR														
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch													
5270.0	54	802.11n HT40	OFDM	17.0	0.738	5230	802.11a	OFDM	17.0	1.000	0.738	X		
5270.0	54	802.11n HT40	OFDM	17.0	0.738	5230	802.11a	OFDM	17.0	1.000	0.738	X		
5270.0	54	802.11n HT40	OFDM	17.0	0.738	5230	802.11a	OFDM	17.0	1.000	0.738	X		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure														Body 1.6 W/kg (mW/g) averaged over 1 gram

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.2.6 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
5510.0	102	802.11n HT40	15.00	14.75	-0.040	15 mm [Rear]	FCC #2	0.318	6	96.6	0.338	1.059	1.035	0.371	
5550.0	110	802.11n HT40	17.00	16.33	-0.110	15 mm [Rear]	FCC #2	0.468	6	96.6	0.496	1.167	1.035	0.599	
5670.0	134	802.11n HT40	17.00	16.35	-0.060	15 mm [Rear]	FCC #2	0.569	6	96.6	0.592	1.161	1.035	0.712	
5710.0	142	802.11n HT40	17.00	16.37	-0.040	15 mm [Rear]	FCC #2	0.689	6	96.6	0.695	1.156	1.035	0.832	A40
5755.0	151	802.11n HT40	17.00	16.13	-0.000	15 mm [Rear]	FCC #2	0.619	6	96.6	0.633	1.222	1.035	0.801	
5795.0	159	802.11n HT40	17.00	16.47	-0.030	15 mm [Rear]	FCC #2	0.703	6	96.6	0.688	1.130	1.035	0.805	A41
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure														Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: The rear with 15 mm spacing configuration was tested since only the rear is 15 mm spacing to human body-worn with accessory of this device.

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	5.50	4.63	-0.050	15 mm [Rear]	FCC #2	1	76.8	0.010	1.222	1.302	0.016	A42
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure														Body 1.6 W/kg (mW/g) averaged over 1 gram

Note: The rear with 15 mm spacing configuration was tested since only the rear is 15 mm spacing to human body-worn with accessory of this device.

11.3 Standalone Hotspot SAR Results

Table 11.3.1 GPRS/WCDMA Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	30.50	30.49	-0.120	10 mm [Bottom]	FCC #1	2	1:4.15	0.216	1.002	0.216	
836.6	190	GSM850	GPRS	30.50	30.49	0.090	10 mm [Front]	FCC #1	2	1:4.15	0.538	1.002	0.539	
824.2	128	GSM850	GPRS	30.50	30.43	-0.020	10 mm [Rear]	FCC #1	2	1:4.15	0.621	1.016	0.834	
836.6	190	GSM850	GPRS	30.50	30.49	-0.050	10 mm [Rear]	FCC #1	2	1:4.15	1.030	1.002	1.032	A43
848.8	251	GSM850	GPRS	30.50	30.45	0.000	10 mm [Rear]	FCC #1	2	1:4.15	0.904	1.012	0.915	
836.6	190	GSM850	GPRS	30.50	30.49	-0.110	10 mm [Right]	FCC #1	2	1:4.15	0.190	1.002	0.190	
836.6	190	GSM850	GPRS	30.50	30.49	-0.150	10 mm [Left]	FCC #1	2	1:4.15	0.439	1.002	0.440	
836.6	190	GSM850	GPRS	30.50	30.49	-0.040	10 mm [Rear]	FCC #1	2	1:4.15	1.020	1.002	1.022	
836.6	190	GSM850	GPRS	30.50	30.49	0.020	10 mm [Rear]	FCC #1	2	1:4.15	1.000	1.002	1.002	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.010	10 mm [Bottom]	FCC #1	2	1:4.15	0.604	1.012	0.611	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.010	10 mm [Front]	FCC #1	2	1:4.15	0.534	1.012	0.540	
1850.2	512	PCS1900	GPRS	28.00	27.91	0.050	10 mm [Rear]	FCC #1	2	1:4.15	0.769	1.021	0.785	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.030	10 mm [Rear]	FCC #1	2	1:4.15	0.953	1.012	0.964	A44
1909.8	810	PCS1900	GPRS	28.00	27.93	0.030	10 mm [Rear]	FCC #1	2	1:4.15	0.715	1.016	0.726	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.090	10 mm [Right]	FCC #1	2	1:4.15	0.472	1.012	0.478	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.060	10 mm [Left]	FCC #1	2	1:4.15	0.197	1.012	0.199	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.060	10 mm [Rear]	FCC #1	2	1:4.15	0.928	1.012	0.939	
1880.0	661	PCS1900	GPRS	28.00	27.95	0.090	10 mm [Rear]	FCC #1	2	1:4.15	0.946	1.012	0.957	
836.6	4183	WCDMA 850	RMC	23.20	23.19	-0.100	10 mm [Bottom]	FCC #1	N/A	1:1	0.120	1.002	0.120	
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.010	10 mm [Front]	FCC #1	N/A	1:1	0.554	1.002	0.555	
826.4	4132	WCDMA 850	RMC	23.20	23.18	0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.931	1.005	0.936	
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.935	1.002	0.937	A45
846.6	4233	WCDMA 850	RMC	23.20	23.15	0.000	10 mm [Rear]	FCC #1	N/A	1:1	0.902	1.012	0.913	
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.030	10 mm [Right]	FCC #1	N/A	1:1	0.420	1.002	0.421	
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.040	10 mm [Left]	FCC #1	N/A	1:1	0.701	1.002	0.702	
836.6	4183	WCDMA 850	RMC	23.20	23.19	-0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.934	1.002	0.936	
836.6	4183	WCDMA 850	RMC	23.20	23.19	0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.934	1.002	0.936	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.100	10 mm [Bottom]	FCC #1	N/A	1:1	0.755	1.002	0.757	
1712.4	1312	WCDMA 1700	RMC	23.10	23.07	-0.050	10 mm [Front]	FCC #1	N/A	1:1	0.807	1.007	0.813	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	-0.030	10 mm [Front]	FCC #1	N/A	1:1	0.861	1.002	0.863	
1752.6	1513	WCDMA 1700	RMC	23.10	23.08	0.000	10 mm [Front]	FCC #1	N/A	1:1	0.836	1.005	0.840	
1712.4	1312	WCDMA 1700	RMC	23.10	23.07	0.060	10 mm [Rear]	FCC #1	N/A	1:1	1.110	1.007	1.118	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.070	10 mm [Rear]	FCC #1	N/A	1:1	1.160	1.002	1.162	A46
1752.6	1513	WCDMA 1700	RMC	23.10	23.08	0.060	10 mm [Rear]	FCC #1	N/A	1:1	1.150	1.005	1.156	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	-0.010	10 mm [Right]	FCC #1	N/A	1:1	0.591	1.002	0.592	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.010	10 mm [Left]	FCC #1	N/A	1:1	0.201	1.002	0.201	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.040	10 mm [Rear]	FCC #1	N/A	1:1	1.130	1.002	1.132	
1732.4	1412	WCDMA 1700	RMC	23.10	23.09	0.070	10 mm [Rear]	FCC #1	N/A	1:1	1.150	1.002	1.152	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.090	10 mm [Bottom]	FCC #1	N/A	1:1	0.731	1.002	0.732	
1852.4	9262	WCDMA 1900	RMC	23.30	23.27	-0.030	10 mm [Front]	FCC #1	N/A	1:1	0.842	1.007	0.848	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	-0.060	10 mm [Front]	FCC #1	N/A	1:1	0.870	1.002	0.872	
1907.6	9538	WCDMA 1900	RMC	23.30	23.28	-0.010	10 mm [Front]	FCC #1	N/A	1:1	0.799	1.005	0.803	
1852.4	9262	WCDMA 1900	RMC	23.30	23.27	0.010	10 mm [Rear]	FCC #1	N/A	1:1	1.180	1.007	1.188	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.000	10 mm [Rear]	FCC #1	N/A	1:1	1.190	1.002	1.192	A47
1907.6	9538	WCDMA 1900	RMC	23.30	23.28	0.090	10 mm [Rear]	FCC #1	N/A	1:1	1.180	1.005	1.186	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.080	10 mm [Right]	FCC #1	N/A	1:1	0.680	1.002	0.681	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.050	10 mm [Left]	FCC #1	N/A	1:1	0.256	1.002	0.257	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	0.090	10 mm [Rear]	FCC #1	N/A	1:1	1.160	1.002	1.162	
1880.0	9400	WCDMA 1900	RMC	23.30	23.29	-0.090	10 mm [Rear]	FCC #1	N/A	1:1	1.170	1.002	1.172	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):

1. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

2. Yellow entries represent variability measurements.

Table 11.3.2 LTE B12, B13, B14, B26 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	23.00	22.99	-0.010	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.063	1.002	0.064	
707.5	23095	LTE B12	10	22.00	21.99	-0.000	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.061	1.002	0.061	
707.5	23095	LTE B12	10	23.00	22.99	0.030	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.265	1.002	0.266	
707.5	23095	LTE B12	10	22.00	21.99	0.040	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.213	1.002	0.213	
707.5	23095	LTE B12	10	23.00	22.99	0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.463	1.002	0.464	A48
707.5	23095	LTE B12	10	22.00	21.99	0.030	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.345	1.002	0.346	
707.5	23095	LTE B12	10	23.00	22.99	-0.010	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.111	1.002	0.111	
707.5	23095	LTE B12	10	22.00	21.99	0.040	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.099	1.002	0.099	
707.5	23095	LTE B12	10	23.00	22.99	-0.020	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.114	1.002	0.114	
707.5	23095	LTE B12	10	22.00	21.99	-0.030	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.099	1.002	0.099	
707.5	23095	LTE B12	10	23.00	22.99	0.020	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.438	1.002	0.439	
782.0	23230	LTE B13	10	23.00	22.99	0.050	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.071	1.002	0.071	
782.0	23230	LTE B13	10	22.00	21.94	0.100	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.069	1.014	0.070	
782.0	23230	LTE B13	10	23.00	22.99	0.000	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.339	1.002	0.340	
782.0	23230	LTE B13	10	22.00	21.94	0.020	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.264	1.014	0.268	
782.0	23230	LTE B13	10	23.00	22.99	0.000	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.555	1.002	0.556	A49
782.0	23230	LTE B13	10	22.00	21.94	0.030	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.427	1.014	0.433	
782.0	23230	LTE B13	10	23.00	22.99	-0.050	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.166	1.002	0.166	
782.0	23230	LTE B13	10	22.00	21.94	0.020	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.161	1.014	0.163	
782.0	23230	LTE B13	10	23.00	22.99	-0.010	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.214	1.002	0.214	
782.0	23230	LTE B13	10	22.00	21.94	-0.030	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.210	1.014	0.213	
782.0	23230	LTE B13	10	23.00	22.99	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.546	1.002	0.547	
793.0	23330	LTE B14	10	23.00	22.98	0.090	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.065	1.005	0.065	
793.0	23330	LTE B14	10	22.00	21.97	0.010	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.058	1.007	0.058	
793.0	23330	LTE B14	10	23.00	22.98	0.030	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.312	1.005	0.314	
793.0	23330	LTE B14	10	22.00	21.97	0.020	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.259	1.007	0.261	
793.0	23330	LTE B14	10	23.00	22.98	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.536	1.005	0.539	A50
793.0	23330	LTE B14	10	22.00	21.97	0.170	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.411	1.007	0.414	
793.0	23330	LTE B14	10	23.00	22.98	0.120	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.147	1.005	0.148	
793.0	23330	LTE B14	10	22.00	21.97	0.110	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.140	1.007	0.141	
793.0	23330	LTE B14	10	23.00	22.98	0.030	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.203	1.005	0.204	
793.0	23330	LTE B14	10	22.00	21.97	0.080	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.192	1.007	0.193	
793.0	23330	LTE B14	10	23.00	22.98	-0.110	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.533	1.005	0.536	
831.5	26865	LTE B26	15	23.00	22.99	-0.010	0	10 mm [Bottom]	FCC #1	QPSK	1	36	1:1	0.100	1.002	0.100	
831.5	26865	LTE B26	15	22.00	21.99	0.020	1	10 mm [Bottom]	FCC #1	QPSK	25	18	1:1	0.095	1.002	0.095	
831.5	26865	LTE B26	15	23.00	22.99	-0.000	0	10 mm [Front]	FCC #1	QPSK	1	36	1:1	0.443	1.002	0.444	
831.5	26865	LTE B26	15	22.00	21.99	0.040	1	10 mm [Front]	FCC #1	QPSK	25	18	1:1	0.435	1.002	0.436	
831.5	26865	LTE B26	15	23.00	22.99	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	36	1:1	0.699	1.002	0.700	A51
831.5	26865	LTE B26	15	22.00	21.99	0.040	1	10 mm [Rear]	FCC #1	QPSK	25	18	1:1	0.585	1.002	0.586	
831.5	26865	LTE B26	15	23.00	22.99	-0.010	0	10 mm [Right]	FCC #1	QPSK	1	36	1:1	0.112	1.002	0.112	
831.5	26865	LTE B26	15	22.00	21.99	-0.020	1	10 mm [Right]	FCC #1	QPSK	25	18	1:1	0.110	1.002	0.110	
831.5	26865	LTE B26	15	23.00	22.99	-0.010	0	10 mm [Left]	FCC #1	QPSK	1	36	1:1	0.218	1.002	0.218	
831.5	26865	LTE B26	15	22.00	21.99	-0.010	1	10 mm [Left]	FCC #1	QPSK	25	18	1:1	0.216	1.002	0.216	
831.5	26865	LTE B26	15	23.00	22.99	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	36	1:1	0.668	1.002	0.669	
ANSI / IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

Note(s):

1. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.

2. Yellow entries represent variability measurements.

Table 11.3.3 LTE B66 Hotspot SAR

MEASUREMENT RESULTS																	
MHz	Ch	Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
FREQUENCY	Ch																
1745.0	132322	LTE B66	20	23.30	23.29	0.040	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.553	1.002	0.554	
1745.0	132322	LTE B66	20	22.30	22.28	0.040	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.449	1.005	0.451	
1745.0	132322	LTE B66	20	23.30	23.29	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.722	1.002	0.723	
1745.0	132322	LTE B66	20	22.30	22.28	-0.030	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.586	1.005	0.589	
1720.0	132072	LTE B66	20	23.30	23.26	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.918	1.009	0.926	
1720.0	132072	LTE B66	20	22.30	22.23	0.020	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.887	1.016	0.901	
1745.0	132322	LTE B66	20	23.30	23.29	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.170	1.002	1.172	A52
1745.0	132322	LTE B66	20	22.30	22.28	0.050	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1</				

Table 11.3.4 LTE B25 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1882.5	26365	LTE B25	20	23.50	23.49	-0.070	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.689	1.002	0.690	
1882.5	26365	LTE B25	20	22.50	22.49	-0.070	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.566	1.002	0.567	
1882.5	26140	LTE B25	20	23.50	23.47	-0.100	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.799	1.007	0.805	
1882.5	26365	LTE B25	20	23.50	23.49	-0.040	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.841	1.002	0.843	
1882.5	26365	LTE B25	20	22.50	22.49	0.020	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.744	1.002	0.745	
1882.5	26365	LTE B25	20	22.50	22.47	-0.030	1	10 mm [Front]	FCC #1	QPSK	100	0	1:1	0.673	1.007	0.678	
1905.0	26590	LTE B25	20	23.50	23.44	-0.110	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.637	1.014	0.649	
1882.5	26140	LTE B25	20	23.50	23.47	-0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.832	1.007	0.838	
1882.5	26140	LTE B25	20	22.50	22.44	0.020	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.762	1.014	0.773	
1882.5	26365	LTE B25	20	23.50	23.49	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.947	1.002	0.949	A53
1882.5	26365	LTE B25	20	22.50	22.49	-0.050	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.806	1.002	0.808	
1882.5	26365	LTE B25	20	22.50	22.47	0.010	1	10 mm [Rear]	FCC #1	QPSK	100	0	1:1	0.746	1.007	0.751	
1905.0	26590	LTE B25	20	23.50	23.44	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.872	1.014	0.884	
1905.0	26590	LTE B25	20	22.50	22.40	0.010	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.781	1.023	0.799	
1882.5	26365	LTE B25	20	23.50	23.49	0.100	0	10 mm [Right]	FCC #1	QPSK	1	50	1:1	0.548	1.002	0.549	
1882.5	26365	LTE B25	20	22.50	22.49	0.030	1	10 mm [Right]	FCC #1	QPSK	50	25	1:1	0.500	1.002	0.501	
1882.5	26365	LTE B25	20	23.50	23.49	0.090	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.231	1.002	0.231	
1882.5	26365	LTE B25	20	22.50	22.49	0.030	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.192	1.002	0.192	
1882.5	26365	LTE B25	20	23.50	23.49	-0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.894	1.002	0.896	
1882.5	26365	LTE B25	20	23.50	23.49	-0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.927	1.002	0.929	
ANSI / IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.
2. Yellow entries represent variability measurements.

Table 11.3.5 LTE B7 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2510.0	20850	LTE B7	20	23.10	23.07	0.060	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.876	1.007	0.882	
2510.0	20850	LTE B7	20	22.10	22.03	-0.040	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.759	1.016	0.771	
2535.0	21100	LTE B7	20	23.10	23.09	0.050	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.924	1.002	0.926	
2535.0	21100	LTE B7	20	22.10	22.09	-0.030	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.823	1.002	0.825	
2535.0	21100	LTE B7	20	22.10	22.08	0.010	1	10 mm [Bottom]	FCC #1	QPSK	100	0	1:1	0.793	1.005	0.797	
2560.0	21350	LTE B7	20	23.10	23.08	0.040	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.912	1.005	0.917	
2560.0	21350	LTE B7	20	22.10	22.07	0.010	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.797	1.007	0.803	
2535.0	21100	LTE B7	20	23.10	23.09	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.749	1.002	0.750	
2535.0	21100	LTE B7	20	22.10	22.09	0.030	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.614	1.002	0.615	
2510.0	20850	LTE B7	20	23.10	23.07	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.070	1.007	1.077	
2510.0	20850	LTE B7	20	22.10	22.03	0.090	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.863	1.016	0.877	
2535.0	21100	LTE B7	20	23.10	23.09	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.120	1.002	1.122	A54
2535.0	21100	LTE B7	20	22.10	22.09	0.020	1	10 mm [Rear]	FCC #1	QPSK	100	0	1:1	0.759	1.005	0.763	
2560.0	21350	LTE B7	20	23.10	23.08	0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.839	1.005	0.843	
2560.0	21350	LTE B7	20	22.10	22.07	0.170	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.733	1.007	0.738	
2535.0	21100	LTE B7	20	23.10	23.09	0.070	0	10 mm [Right]	FCC #1	QPSK	1	50	1:1	0.702	1.002	0.703	
2535.0	21100	LTE B7	20	22.10	22.09	0.040	1	10 mm [Right]	FCC #1	QPSK	50	25	1:1	0.530	1.002	0.531	
2535.0	21100	LTE B7	20	23.10	23.09	0.030	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.130	1.002	0.130	
2535.0	21100	LTE B7	20	22.10	22.09	0.030	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.103	1.002	0.103	
2535.0	21100	LTE B7	20	23.10	23.09	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.961	1.002	0.963	
2535.0	21100	LTE B7	20	23.10	23.09	0.040	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	1.030	1.002	1.032	
ANSI / IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.
2. Yellow entries represent variability measurements.

Table 11.3.6 LTE B41 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2593.0	40620	LTE B41	20	23.20	23.19	-0.020	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1.58	0.719	1.002	0.720	
2593.0	40620	LTE B41	20	22.20	22.19	-0.010	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1.58	0.708	1.002	0.709	
2593.0	40620	LTE B41	20	23.20	23.19	0.040	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1.58	0.791	1.002	0.793	
2593.0	40620	LTE B41	20	22.20	22.19	-0.050	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1.58	0.629	1.002	0.630	
2506.0	39750	LTE B41	20	23.20	23.17	-0.050	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	0.761	1.007	0.766	
2506.0	39750	LTE B41	20	22.20	22.16	-0.020	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1.58	0.659	1.009	0.665	
2549.5	40185	LTE B41	20	23.20	23.10	0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	0.756	1.023	0.773	
2549.5	40185	LTE B41	20	22.20	21.95	0.030	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1.58	0.663	1.059	0.702	
2593.0	40620	LTE B41	20	23.20	23.19	0.080	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	1.090	1.002	1.092	A55
2593.0	40620	LTE B41	20	22.20	22.19	0.010	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1.58	0.848	1.002	0.850	
2593.0	40620	LTE B41	20	22.20	22.18	0.040	1	10 mm [Rear]	FCC #1	QPSK	100	0	1:1.58	0.826	1.005	0.830	
2636.5	41055	LTE B41	20	23.20	23.11	0.130	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	0.853	1.021	0.871	
2636.5	41055	LTE B41	20	22.20	22.00	-0.070	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1.58	0.809	1.047	0.847	
2680.0	41490	LTE B41	20	23.20	23.18	-0.050	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	0.849	1.005	0.853	
2680.0	41490	LTE B41	20	22.20	22.18	0.010	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1.58	0.807	1.005	0.811	
2593.0	40620	LTE B41	20	23.20	23.19	0.050	0	10 mm [Right]	FCC #1	QPSK	1	50	1:1.58	0.319	1.002	0.320	
2593.0	40620	LTE B41	20	22.20	22.19	0.040	1	10 mm [Right]	FCC #1	QPSK	50	25	1:1.58	0.241	1.002	0.241	
2593.0	40620	LTE B41	20	23.20	23.19	-0.090	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1.58	0.081	1.002	0.081	
2593.0	40620	LTE B41	20	22.20	22.19	-0.070	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1.58	0.064	1.002	0.064	
2593.0	40620	LTE B41	20	23.20	23.19	-0.060	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1.58	0.894	1.002	0.896	
2593.0	40620	LTE B41	20	23.20	23.19	0.000	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1.58	1.030	1.002	1.032	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):
1. Blue entries represent SIM2 (This device supports Dual SIM and is 1 RF Path.) measurements.
2. Yellow entries represent variability measurements.

Table 11.3.7 DTS Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #		
MHz	Ch																
2437.0	6	802.11b	20.00	19.85	0.130	10 mm [Top]	FCC #2	0.019	1	97.6	0.015	1.035	1.025	0.016			
2437.0	6	802.11b	20.00	19.85	0.030	10 mm [Front]	FCC #2	0.091	1	97.6	0.089	1.035	1.025	0.094			
2437.0	6	802.11b	20.00	19.85	0.120	10 mm [Rear]	FCC #2	0.313	1	97.6	0.312	1.035	1.025	0.331			A56
2437.0	6	802.11b	20.00	19.85	0.150	10 mm [Left]	FCC #2	0.250	1	97.6	0.250	1.035	1.025	0.265			
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.3.8 UNII Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g Adjusted SAR (W/kg)	Scaling Factor	Determine OFDM SAR	SAR (W/kg)	Plots #	
MHz	Ch																
5230.0	46	802.11n HT40	20.00	16.41	-0.120	10 mm [Top]	FCC #2	0.065	6	96.6	0.064	1.146	1.035	0.076			
5230.0	46	802.11n HT40	20.00	16.41	0.060	10 mm [Front]	FCC #2	0.108	6	96.6	0.110	1.146	1.035	0.130			
5190.0	38	802.11n HT40	17.00	15.48	-0.120	10 mm [Rear]	FCC #2	0.752	6	96.6	0.805	1.419	1.035	1.183			A57
5230.0	46	802.11n HT40	17.00	16.41	-0.070	10 mm [Rear]	FCC #2	0.766	6	96.6	0.825	1.146	1.035	0.979			
5230.0	46	802.11n HT40	17.00	16.41	-0.080	10 mm [Left]	FCC #2	0.358	6	96.6	0.376	1.146	1.035	0.446			
5230.0	46	802.11n HT40	17.00	16.41	0.000	10 mm [Rear]	FCC #2	0.660	6	96.6	0.705	1.146	1.035	0.836			
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Yellow entries represent variability measurements.

Table 11.3.9 UNII Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #		
MHz	Ch																
5210.0	42	802.11ac VHT80	13.00	12.97	0.040	10 mm [Top]	FCC #2	0.020	6	85.5	0.018	1.007	1.170	0.021			
5210.0	42	802.11ac VHT80	13.00	12.97	-0.000	10 mm [Front]	FCC #2	0.038	6	85.5	0.037	1.007	1.170	0.044			
5210.0	42	802.11ac VHT80	13.00	12.97	-0.110	10 mm [Rear]	FCC #2	0.268	6	85.5	0.276	1.007	1.170	0.325			A58
5210.0	42	802.11ac VHT80	13.00	12.97	-0.190	10 mm [Left]	FCC #2	0.146	6	85.5	0.153	1.007	1.170	0.180			
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure																	

Table 11.3.10 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	$1g$ SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	$1g$ Scaled SAR (W/kg)	Plots #
MHz	Ch														
5795.0	159	802.11n HT40	17.00	16.47	-0.030	10 mm [Top]	FCC #2	0.268	6	96.6	0.279	1.130	1.035	0.326	
5795.0	159	802.11n HT40	17.00	16.47	-0.140	10 mm [Front]	FCC #2	0.310	6	96.6	0.314	1.130	1.035	0.367	
5795.0	151	802.11n HT40	17.00	16.13	-0.080	10 mm [Rear]	FCC #2	0.833	6	96.6	0.879	1.222	1.035	1.112	
5795.0	159	802.11n HT40	17.00	16.47	-0.020	10 mm [Rear]	FCC #2	0.981	6	96.6	0.985	1.130	1.035	1.152	A59
5795.0	149	802.11n HT40	17.00	16.13	-0.180	10 mm [Left]	FCC #2	0.867	6	96.6	0.873	1.222	1.035	1.104	
5795.0	159	802.11n HT40	17.00	16.47	-0.170	10 mm [Left]	FCC #2	0.855	6	96.6	0.899	1.130	1.035	1.052	
5795.0	159	802.11n HT40	17.00	16.47	-0.020	10 mm [Rear]	FCC #2	0.980	6	96.6	0.983	1.130	1.035	1.150	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure															Body 1.6 W/kg (mW/g) averaged over 1 gram

Note: Yellow entries represent variability measurements.

Table 11.3.11 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	$1g$ SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	$1g$ Scaled SAR (W/kg)	Plots #
MHz	Ch														
5775.0	155	802.11ac VHT80	10.00	9.98	0.030	10 mm [Top]	FCC #2	0.037	6	85.5	0.031	1.005	1.170	0.036	
5775.0	155	802.11ac VHT80	10.00	9.98	-0.010	10 mm [Front]	FCC #2	0.068	6	85.5	0.052	1.005	1.170	0.061	
5775.0	155	802.11ac VHT80	10.00	9.98	-0.160	10 mm [Rear]	FCC #2	0.190	6	85.5	0.189	1.005	1.170	0.222	
5775.0	155	802.11ac VHT80	10.00	9.98	-0.150	10 mm [Left]	FCC #2	0.204	6	85.5	0.205	1.005	1.170	0.241	A60
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure															Body 1.6 W/kg (mW/g) averaged over 1 gram

Note: UNII was evaluated at the maximum allowed output power during operations with simultaneous hotspot mode.

Table 11.3.12 Bluetooth Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	$1g$ SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	$1g$ Scaled SAR (W/kg)	Plots #	
MHz	Ch														
2441.0	39	Bluetooth	5.50	4.63	0.000	10 mm [Top]	FCC #2	1	76.8	0.001	1.222	1.302	0.002		
2441.0	39	Bluetooth	5.50	4.63	0.000	10 mm [Front]	FCC #2	1	76.8	0.005	1.222	1.302	0.008		
2441.0	39	Bluetooth	5.50	4.63	0.000	10 mm [Rear]	FCC #2	1	76.8	0.020	1.222	1.302	0.032	A61	
2441.0	39	Bluetooth	5.50	4.63	0.000	10 mm [Left]	FCC #2	1	76.8	0.018	1.222	1.302	0.029		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure															Body 1.6 W/kg (mW/g) averaged over 1 gram

11.4 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported boy-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is $\leq 0.8 \text{ W/kg}$ then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not $> \frac{1}{2} \text{ dB}$, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
6. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r05. Testing was performed using UL-DL configuration 0 with 6 UL sub frames and 2S sub frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633 (cf=1.58).
7. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is $\leq 1.6 \text{ W/kg}$. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 12.3.1 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Power conditions						Note	
		Head		Body-Worn		Hotspot			
		Licensed	Wi-Fi	Licensed	Wi-Fi	Licensed	Wi-Fi		
1	GSM Voice + Wi-Fi 2.4 GHz	Yes		Yes				N/A	
		Normal	Reduced ^b	Normal	Normal				
2	GSM Voice + Wi-Fi 5 GHz	Yes		Yes				N/A	
		Normal	Reduced ^b	Normal	Normal				
3	GSM Voice + Bluetooth 2.4 GHz	Yes		Yes				N/A	
		Normal	Reduced ^b	Normal	Normal				
7	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes		Yes				N/A	
		Normal	Reduced ^b	Normal	Normal				
8	WCDMA + Wi-Fi 2.4 GHz	Yes		Yes			Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Normal		
9	WCDMA + Wi-Fi 5 GHz	Yes*		Yes*			Yes*	^ Reduced - Power reduction is applied in Hotspot Mode Only. - Wi-Fi 5 GHz	
		Normal	Reduced ^b	Normal	Normal	Normal	Reduced ^a		
10	WCDMA + Bluetooth 2.4 GHz	Yes		Yes			Yes	^ Reduced - Power reduction is applied in Receiver Mode Only. - Wi-Fi 5 GHz	
		Normal	Reduced ^b	Normal	Normal	Normal	Normal		
14	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes*		Yes*			Yes*	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Reduced ^a		
15	LTE + Wi-Fi 2.4 GHz	Yes		Yes			Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Normal		
16	LTE + Wi-Fi 5 GHz	Yes*		Yes*			Yes*	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Reduced ^a		
17	LTE + Bluetooth 2.4 GHz	Yes		Yes			Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Normal		
21	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes*		Yes*			Yes*	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Reduced ^a		
22	GPRS/EDGE + Wi-Fi 2.4 GHz	Yes		Yes			Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Normal		
23	GPRS/EDGE + Wi-Fi 5 GHz	Yes*		Yes*			Yes*	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Reduced ^a		
24	GPRS/EDGE + Bluetooth 2.4 GHz	Yes		Yes			Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Normal		
28	GPRS/EDGE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes*		Yes*			Yes*	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.	
		Normal	Reduced ^b	Normal	Normal	Normal	Reduced ^a		

Notes:

- WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
- WiFi 5GHz is supported Hotspot in UNII B1,B3 and WiFi-Direct(GO/GC) in UNII B1,B3.
- LTE, WCDMA, GPRS/EDGE is supported Hotspot.
- VoIP is supported in LTE, WCDMA, GSM
- Bluetooth and WiFi can not transmit simultaneously at 2.4G band.
- GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WiFi Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WiFi direct are included in the above table.

12.4 Head SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)		ΣSAR (W/kg)		
			1	2		3	1+2	1+3	1+2+3	
Head SAR	GSM 850	Left Touch	0.452	0.014	0.326	0.466	0.778	0.792		
		Right Touch	0.392	0.025	0.714	0.417	1.106	1.131		
		Left Tilt	0.261	0.013	0.325	0.274	0.586	0.599		
		Right Tilt	0.275	0.011	0.553	0.286	0.828	0.839		
	GPRS 850	Left Touch	0.542	0.014	0.326	0.556	0.868	0.882		
		Right Touch	0.448	0.025	0.714	0.473	1.162	1.187		
		Left Tilt	0.254	0.013	0.325	0.267	0.579	0.592		
		Right Tilt	0.305	0.011	0.553	0.316	0.858	0.869		
	GSM 1900	Left Touch	0.253	0.014	0.326	0.267	0.579	0.593		
		Right Touch	0.310	0.025	0.714	0.335	1.024	1.049		
		Left Tilt	0.085	0.013	0.325	0.098	0.410	0.423		
		Right Tilt	0.084	0.011	0.553	0.095	0.637	0.648		
	GPRS 1900	Left Touch	0.372	0.014	0.326	0.386	0.698	0.712		
		Right Touch	0.500	0.025	0.714	0.525	1.214	1.239		
		Left Tilt	0.125	0.013	0.325	0.138	0.450	0.463		
		Right Tilt	0.122	0.011	0.553	0.133	0.675	0.686		
	WCDMA 850	Left Touch	0.219	0.014	0.326	0.233	0.545	0.559		
		Right Touch	0.163	0.025	0.714	0.188	0.877	0.902		
		Left Tilt	0.102	0.013	0.325	0.115	0.427	0.440		
		Right Tilt	0.100	0.011	0.553	0.111	0.653	0.664		
	WCDMA 1700	Left Touch	0.499	0.014	0.326	0.513	0.825	0.839		
		Right Touch	0.515	0.025	0.714	0.540	1.229	1.254		
		Left Tilt	0.152	0.013	0.325	0.165	0.477	0.490		
		Right Tilt	0.149	0.011	0.553	0.160	0.702	0.713		
	WCDMA 1900	Left Touch	0.460	0.014	0.326	0.474	0.786	0.800		
		Right Touch	0.550	0.025	0.714	0.575	1.264	1.289		
		Left Tilt	0.171	0.013	0.325	0.184	0.496	0.509		
		Right Tilt	0.144	0.011	0.553	0.155	0.697	0.708		
	LTE Band 12	Left Touch	0.221	0.014	0.326	0.235	0.547	0.561		
		Right Touch	0.202	0.025	0.714	0.227	0.916	0.941		
		Left Tilt	0.160	0.013	0.325	0.173	0.485	0.498		
		Right Tilt	0.140	0.011	0.553	0.151	0.693	0.704		
	LTE Band 13	Left Touch	0.268	0.014	0.326	0.282	0.594	0.608		
		Right Touch	0.220	0.025	0.714	0.245	0.934	0.959		
		Left Tilt	0.180	0.013	0.325	0.193	0.505	0.518		
		Right Tilt	0.173	0.011	0.553	0.184	0.726	0.737		
	LTE Band 14	Left Touch	0.262	0.014	0.326	0.276	0.588	0.602		
		Right Touch	0.212	0.025	0.714	0.237	0.926	0.951		
		Left Tilt	0.178	0.013	0.326	0.191	0.503	0.516		
		Right Tilt	0.130	0.011	0.553	0.141	0.683	0.694		
	LTE Band 26	Left Touch	0.463	0.014	0.326	0.477	0.789	0.803		
		Right Touch	0.296	0.025	0.714	0.321	1.010	1.035		
		Left Tilt	0.293	0.013	0.325	0.306	0.618	0.631		
		Right Tilt	0.215	0.011	0.553	0.226	0.768	0.779		
	LTE Band 66	Left Touch	0.582	0.014	0.326	0.596	0.908	0.922		
		Right Touch	0.632	0.025	0.714	0.677	1.386	1.391		
		Left Tilt	0.161	0.013	0.325	0.174	0.486	0.499		
		Right Tilt	0.176	0.011	0.553	0.187	0.729	0.740		
	LTE Band 25	Left Touch	0.550	0.014	0.326	0.564	0.876	0.890		
		Right Touch	0.695	0.025	0.714	0.720	1.409	1.434		
		Left Tilt	0.155	0.013	0.325	0.168	0.480	0.493		
		Right Tilt	0.219	0.011	0.553	0.230	0.772	0.783		
	LTE Band 7	Left Touch	0.406	0.014	0.326	0.420	0.732	0.746		
		Right Touch	0.766	0.025	0.714	0.791	1.480	1.505		
		Left Tilt	0.275	0.013	0.325	0.288	0.600	0.613		
		Right Tilt	0.149	0.011	0.553	0.160	0.702	0.713		
	LTE Band 41	Left Touch	0.267	0.014	0.326	0.281	0.593	0.607		
		Right Touch	0.474	0.025	0.714	0.499	1.188	1.213		
		Left Tilt	0.152	0.013	0.325	0.165	0.477	0.490		
		Right Tilt	0.083	0.011	0.553	0.094	0.636	0.647		

Table 12.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)		ΣSAR (W/kg)		
			1	2		3	1+2	1+3	1+2+3	
Head SAR	GSM 850	Left Touch	0.452	0.014	0.550	0.466	1.002	1.016		
		Right Touch	0.392	0.025	0.753	0.417	1.145	1.170		
		Left Tilt	0.261	0.013	0.567	0.274	0.828	0.841		
		Right Tilt	0.275	0.011	0.554	0.286	0.829	0.840		
	GPRS 850	Left Touch	0.542	0.014	0.550	0.556	1.092	1.106		
		Right Touch	0.448	0.025	0.753	0.473	1.201	1.226		
		Left Tilt	0.254	0.013	0.567	0.267	0.821	0.834		
		Right Tilt	0.305	0.011	0.554	0.316	0.859	0.870		
	GSM 1900	Left Touch	0.253	0.014	0.550	0.267	0.803	0.817		
		Right Touch	0.310	0.025	0.753	0.335	1.063	1.088		
		Left Tilt	0.085	0.013	0.567	0.098	0.652	0.665		
		Right Tilt	0.084	0.011	0.554	0.095	0.638	0.649		
	GPRS 1900	Left Touch	0.372	0.014	0.550	0.386	0.922	0.936		
		Right Touch	0.500	0.025	0.753	0.525	1.253	1.278		
		Left Tilt	0.125	0.013	0.567	0.138	0.692	0.705		
		Right Tilt	0.122	0.011	0.554	0.133	0.676	0.687		
	WCDMA 850	Left Touch	0.219	0.014	0.550	0.233	0.769	0.783		
		Right Touch	0.163	0.025	0.753	0.188	0.916	0.941		
		Left Tilt	0.102	0.013	0.567	0.115	0.669	0.682		
		Right Tilt	0.100	0.011	0.554	0.111	0.654	0.665		
	WCDMA 1700	Left Touch	0.499	0.014	0.550	0.513	1.049	1.063		
		Right Touch	0.515	0.025	0.753	0.540	1.268	1.293		
		Left Tilt	0.152	0.013	0.567	0.165	0.719	0.732		
		Right Tilt	0.149	0.011	0.554	0.160	0.703	0.714		
	WCDMA 1900	Left Touch	0.460	0.014	0.550	0.474	1.010	1.024		
		Right Touch	0.550	0.025	0.753	0.575	1.303	1.328		
		Left Tilt	0.171	0.013	0.567	0.184	0.738	0.751		
		Right Tilt	0.144	0.011	0.554	0.155	0.698	0.709		
	LTE Band 12	Left Touch	0.221	0.014	0.550	0.235	0.771	0.785		
		Right Touch	0.202	0.025	0.753	0.227	0.955	0.980		
		Left Tilt	0.160	0.013	0.567	0.173	0.727	0.740		
		Right Tilt	0.140	0.011	0.554	0.151	0.694	0.705		
	LTE Band 13	Left Touch	0.268	0.014	0.550	0.282	0.818	0.832		
		Right Touch	0.220	0.025	0.753	0.245	0.973	0.998		
		Left Tilt	0.180	0.013	0.567	0.193	0.747	0.760		
		Right Tilt	0.173	0.011	0.554	0.184	0.727	0.738		
	LTE Band 14	Left Touch	0.262	0.014	0.550	0.276	0.812	0.826		
		Right Touch	0.212	0.025	0.753	0.237	0.965	0.990		
		Left Tilt	0.178	0.013	0.567	0.191	0.745	0.758		
		Right Tilt	0.130	0.011	0.554	0.141	0.684	0.695		
	LTE Band 26	Left Touch	0.463	0.014	0.550	0.477	1.013	1.0		

		Right Tilt	0.083	0.011	0.554	0.094	0.637	0.648
--	--	------------	-------	-------	-------	-------	-------	-------

Table 12.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)		Σ SAR (W/kg)	
			1	2		3	1+2		
Head SAR	GSM 850	Left Touch	0.452		0.014	0.445	0.468	0.897	0.911
		Right Touch	0.392		0.025	0.732	0.417	1.124	1.149
		Left Tilt	0.261		0.013	0.303	0.274	0.564	0.577
		Right Tilt	0.275		0.011	0.501	0.286	0.776	0.787
	GPRS 850	Left Touch	0.542		0.014	0.445	0.556	0.987	1.001
		Right Touch	0.448		0.025	0.732	0.473	1.180	1.205
		Left Tilt	0.254		0.013	0.303	0.267	0.557	0.570
		Right Tilt	0.305		0.011	0.501	0.316	0.806	0.817
	GSM 1900	Left Touch	0.253		0.014	0.445	0.267	0.698	0.712
		Right Touch	0.310		0.025	0.732	0.355	1.042	1.057
		Left Tilt	0.085		0.013	0.303	0.098	0.388	0.401
		Right Tilt	0.094		0.011	0.501	0.095	0.365	0.396
	GPRS 1900	Left Touch	0.372		0.014	0.445	0.386	0.817	0.831
		Right Touch	0.500		0.025	0.732	0.525	1.232	1.257
		Left Tilt	0.125		0.013	0.303	0.138	0.428	0.441
		Right Tilt	0.122		0.011	0.501	0.133	0.623	0.634
	WCDMA 850	Left Touch	0.219		0.014	0.445	0.233	0.664	0.678
		Right Touch	0.163		0.025	0.732	0.188	0.895	0.920
		Left Tilt	0.102		0.013	0.303	0.115	0.405	0.418
		Right Tilt	0.100		0.011	0.501	0.111	0.601	0.612
	WCDMA 1700	Left Touch	0.499		0.014	0.445	0.513	0.944	0.958
		Right Touch	0.515		0.025	0.732	0.540	1.247	1.272
		Left Tilt	0.152		0.013	0.303	0.165	0.455	0.468
		Right Tilt	0.149		0.011	0.501	0.160	0.650	0.661
	WCDMA 1900	Left Touch	0.460		0.014	0.445	0.474	0.905	0.919
		Right Touch	0.550		0.025	0.732	0.575	1.282	1.307
		Left Tilt	0.171		0.013	0.303	0.184	0.474	0.487
		Right Tilt	0.144		0.011	0.501	0.155	0.645	0.656
	LTE Band 12	Left Touch	0.221		0.014	0.445	0.235	0.666	0.680
		Right Touch	0.202		0.025	0.732	0.227	0.934	0.959
		Left Tilt	0.160		0.013	0.303	0.173	0.463	0.476
		Right Tilt	0.140		0.011	0.501	0.151	0.641	0.652
	LTE Band 13	Left Touch	0.268		0.014	0.445	0.282	0.713	0.727
		Right Touch	0.220		0.025	0.732	0.245	0.952	0.977
		Left Tilt	0.180		0.013	0.303	0.193	0.483	0.496
		Right Tilt	0.173		0.011	0.501	0.184	0.674	0.685
	LTE Band 14	Left Touch	0.262		0.014	0.445	0.276	0.707	0.721
		Right Touch	0.212		0.025	0.732	0.237	0.944	0.969
		Left Tilt	0.178		0.013	0.303	0.191	0.481	0.494
		Right Tilt	0.130		0.011	0.501	0.141	0.631	0.642
	LTE Band 26	Left Touch	0.463		0.014	0.445	0.477	0.908	0.922
		Right Touch	0.296		0.025	0.732	0.321	1.028	1.053
		Left Tilt	0.293		0.013	0.303	0.306	0.596	0.609
		Right Tilt	0.215		0.011	0.501	0.226	0.716	0.727
	LTE Band 66	Left Touch	0.582		0.014	0.445	0.596	1.027	1.041
		Right Touch	0.652		0.025	0.732	0.677	1.384	1.409
		Left Tilt	0.161		0.013	0.303	0.174	0.464	0.477
		Right Tilt	0.176		0.011	0.501	0.187	0.677	0.688
	LTE Band 25	Left Touch	0.550		0.014	0.445	0.564	0.995	1.009
		Right Touch	0.695		0.025	0.732	0.720	1.427	1.452
		Left Tilt	0.155		0.013	0.303	0.168	0.458	0.471
		Right Tilt	0.219		0.011	0.501	0.230	0.720	0.731
	LTE Band 7	Left Touch	0.406		0.014	0.445	0.420	0.851	0.865
		Right Touch	0.766		0.025	0.732	0.791	1.498	1.523
		Left Tilt	0.275		0.013	0.303	0.288	0.578	0.591
		Right Tilt	0.149		0.011	0.501	0.160	0.650	0.661
	LTE Band 41	Left Touch	0.267		0.014	0.445	0.281	0.712	0.726
		Right Touch	0.474		0.025	0.732	0.499	1.206	1.234
		Left Tilt	0.152		0.013	0.303	0.165	0.455	0.468
		Right Tilt	0.083		0.011	0.501	0.094	0.584	0.595

Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		2.4G W-LAN SAR (W/kg)	Σ SAR (W/kg)	
			1	2		1+2	
Head SAR	GSM 850	Left Touch	0.452		0.150	0.602	
		Right Touch	0.392		0.790	1.182	
		Left Tilt	0.261		0.056	0.317	
		Right Tilt	0.275		0.222	0.497	
	GPRS 850	Left Touch	0.542		0.150	0.692	
		Right Touch	0.448		0.790	1.238	
		Left Tilt	0.254		0.056	0.310	
		Right Tilt	0.305		0.222	0.527	
	GSM 1900	Left Touch	0.253		0.150	0.403	
		Right Touch	0.310		0.790	1.100	
		Left Tilt	0.085		0.056	0.141	
		Right Tilt	0.084		0.222	0.306	
	GPRS 1900	Left Touch	0.372		0.150	0.522	
		Right Touch	0.500		0.790	1.290	
		Left Tilt	0.125		0.056	0.181	
		Right Tilt	0.122		0.222	0.344	
	WCDMA 850	Left Touch	0.219		0.150	0.369	
		Right Touch	0.163		0.790	0.953	
		Left Tilt	0.102		0.056	0.158	
		Right Tilt	0.100		0.222	0.322	
	WCDMA 1700	Left Touch	0.499		0.150	0.649	
		Right Touch	0.515		0.790	1.305	
		Left Tilt	0.152		0.056	0.208	
		Right Tilt	0.149		0.222	0.371	
	WCDMA 1900	Left Touch	0.460		0.150	0.610	
		Right Touch	0.550		0.790	1.340	
		Left Tilt	0.171		0.056	0.227	
		Right Tilt	0.144		0.222	0.366	
	LTE Band 12	Left Touch	0.221		0.150	0.371	
		Right Touch	0.202		0.790	0.992	
		Left Tilt	0.160		0.056	0.216	
		Right Tilt	0.140		0.222	0.362	
	LTE Band 13	Left Touch	0.268		0.150	0.418	
		Right Touch	0.220		0.790	1.010	
		Left Tilt	0.180		0.056	0.236	
		Right Tilt	0.173		0.222	0.395	
	LTE Band 14	Left Touch	0.262		0.150	0.412	
		Right Touch	0.212		0.790	1.002	
		Left Tilt	0.178		0.056	0.234	
		Right Tilt	0.130		0.222	0.352	
	LTE Band 26	Left Touch	0.463		0.150	0.813	
		Right Touch	0.296		0.790	1.086	
		Left Tilt	0.283		0.056	0.349	
		Right Tilt	0.215		0.222	0.437	
	LTE Band 66	Left Touch	0.532		0.150	0.732	
		Right Touch	0.652		0.790	1.442	
		Left Tilt	0.161		0.056	0.217	
		Right Tilt	0.176		0.222	0.398	
	LTE Band 25	Left Touch	0.550		0.150	0.700	
		Right Touch	0.695		0.790	1.456	
		Left Tilt	0.155		0.056	0.211	
		Right Tilt	0.219		0.222	0.441	
	LTE Band 7	Left Touch	0.406		0.150	0.556	
		Right Touch	0.766	0.790	1.556		

Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Head SAR	GSM 850	Left Touch	0.452	0.326	0.778
		Right Touch	0.392	0.714	1.106
		Left Tilt	0.261	0.325	0.586
		Right Tilt	0.275	0.553	0.828
	GPRS 850	Left Touch	0.542	0.326	0.868
		Right Touch	0.448	0.714	1.162
		Left Tilt	0.254	0.325	0.579
		Right Tilt	0.305	0.553	0.858
	GSM 1900	Left Touch	0.253	0.326	0.579
		Right Touch	0.310	0.714	1.024
		Left Tilt	0.085	0.325	0.410
		Right Tilt	0.084	0.553	0.637
	GPRS 1900	Left Touch	0.372	0.326	0.698
		Right Touch	0.509	0.714	1.214
		Left Tilt	0.125	0.325	0.450
		Right Tilt	0.122	0.553	0.675
	WCDMA 850	Left Touch	0.219	0.326	0.545
		Right Touch	0.163	0.714	0.877
		Left Tilt	0.102	0.325	0.427
		Right Tilt	0.100	0.553	0.653
	WCDMA 1700	Left Touch	0.499	0.326	0.825
		Right Touch	0.515	0.714	1.229
		Left Tilt	0.152	0.325	0.477
		Right Tilt	0.149	0.553	0.702
	WCDMA 1900	Left Touch	0.460	0.326	0.786
		Right Touch	0.550	0.714	1.264
		Left Tilt	0.111	0.325	0.395
		Right Tilt	0.144	0.553	0.697
	LTE Band 12	Left Touch	0.221	0.326	0.547
		Right Touch	0.202	0.714	0.916
		Left Tilt	0.160	0.325	0.485
		Right Tilt	0.140	0.553	0.693
	LTE Band 13	Left Touch	0.268	0.326	0.594
		Right Touch	0.220	0.714	0.934
		Left Tilt	0.180	0.325	0.505
		Right Tilt	0.173	0.553	0.726
	LTE Band 14	Left Touch	0.262	0.326	0.588
		Right Touch	0.212	0.714	0.926
		Left Tilt	0.178	0.325	0.503
		Right Tilt	0.130	0.553	0.683
	LTE Band 26	Left Touch	0.463	0.326	0.789
		Right Touch	0.296	0.714	1.010
		Left Tilt	0.293	0.325	0.618
		Right Tilt	0.215	0.553	0.768
	LTE Band 66	Left Touch	0.582	0.326	0.908
		Right Touch	0.652	0.714	1.366
		Left Tilt	0.161	0.325	0.486
		Right Tilt	0.176	0.553	0.729
	LTE Band 25	Left Touch	0.550	0.326	0.876
		Right Touch	0.695	0.714	1.409
		Left Tilt	0.155	0.325	0.480
		Right Tilt	0.219	0.553	0.772
	LTE Band 7	Left Touch	0.406	0.326	0.732
		Right Touch	0.766	0.714	1.480
		Left Tilt	0.275	0.325	0.600
		Right Tilt	0.149	0.553	0.702
	LTE Band 41	Left Touch	0.267	0.326	0.593
		Right Touch	0.474	0.714	1.188
		Left Tilt	0.152	0.325	0.477
		Right Tilt	0.083	0.553	0.636

Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Head SAR	GSM 850	Left Touch	0.452	0.550	1.002
		Right Touch	0.392	0.753	1.145
		Left Tilt	0.261	0.567	0.828
		Right Tilt	0.275	0.554	0.829
	GPRS 850	Left Touch	0.542	0.550	1.092
		Right Touch	0.446	0.753	1.201
		Left Tilt	0.254	0.567	0.821
		Right Tilt	0.305	0.554	0.859
	GSM 1900	Left Touch	0.253	0.550	0.803
		Right Touch	0.310	0.753	1.063
		Left Tilt	0.085	0.567	0.652
		Right Tilt	0.084	0.554	0.638
	GPRS 1900	Left Touch	0.372	0.550	0.922
		Right Touch	0.500	0.753	1.253
		Left Tilt	0.125	0.567	0.692
		Right Tilt	0.122	0.554	0.676
	WCDMA 850	Left Touch	0.219	0.550	0.769
		Right Touch	0.163	0.753	0.916
		Left Tilt	0.102	0.567	0.669
		Right Tilt	0.100	0.554	0.654
	WCDMA 1700	Left Touch	0.499	0.550	1.049
		Right Touch	0.515	0.753	1.268
		Left Tilt	0.152	0.567	0.719
		Right Tilt	0.149	0.554	0.703
	WCDMA 1900	Left Touch	0.460	0.550	1.010
		Right Touch	0.550	0.753	1.303
		Left Tilt	0.171	0.567	0.738
		Right Tilt	0.144	0.554	0.698
	LTE Band 12	Left Touch	0.221	0.550	0.771
		Right Touch	0.202	0.753	0.955
		Left Tilt	0.160	0.567	0.727
		Right Tilt	0.140	0.554	0.694
	LTE Band 13	Left Touch	0.268	0.550	0.818
		Right Touch	0.220	0.753	0.973
		Left Tilt	0.180	0.567	0.747
		Right Tilt	0.173	0.554	0.727
	LTE Band 14	Left Touch	0.262	0.550	0.812
		Right Touch	0.212	0.753	0.965
		Left Tilt	0.178	0.567	0.745
		Right Tilt	0.130	0.554	0.684
	LTE Band 26	Left Touch	0.463	0.550	1.013
		Right Touch	0.296	0.753	1.049
		Left Tilt	0.293	0.567	0.860
		Right Tilt	0.215	0.554	0.769
	LTE Band 66	Left Touch	0.582	0.550	1.132
		Right Touch	0.652	0.753	1.405
		Left Tilt	0.161	0.567	0.728
		Right Tilt	0.176	0.554	0.730
	LTE Band 25	Left Touch	0.550	0.550	1.100
		Right Touch	0.695	0.753	1.448
		Left Tilt	0.155	0.567	0.722
		Right Tilt	0.219	0.554	0.773
	LTE Band 7	Left Touch	0.406	0.550	0.956
		Right Touch	0.766	0.753	1.519
		Left Tilt	0.275	0.567	0.842
		Right Tilt	0.149	0.554	0.703
	LTE Band 41	Left Touch	0.267	0.550	0.817
		Right Touch	0.474	0.753	1.227
		Left Tilt	0.152	0.567	0.719
		Right Tilt	0.083	0.554	0.637

Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Head SAR	GSM 850	Left Touch	0.452	0.445	0.897
		Right Touch	0.392	0.732	1.124
		Left Tilt	0.261	0.303	0.564
		Right Tilt	0.275	0.501	0.776
	GPRS 850	Left Touch	0.542	0.445	0.987
		Right Touch	0.448	0.732	1.180
		Left Tilt	0.254	0.303	0.557
		Right Tilt	0.305	0.501	0.806
	GSM 1900	Left Touch	0.253	0.445	0.698
		Right Touch	0.310	0.732	1.042
		Left Tilt	0.085	0.303	0.388
		Right Tilt	0.084	0.501	0.885
	GPRS 1900	Left Touch	0.372	0.445	0.817
		Right Touch	0.500	0.732	1.232
		Left Tilt	0.125	0.303	0.428
		Right Tilt	0.122	0.501	0.623
	WCDMA 850	Left Touch	0.219	0.445	0.664
		Right Touch	0.163	0.732	0.895
		Left Tilt	0.102	0.303	0.405
		Right Tilt	0.100	0.501	0.601
	WCDMA 1700	Left Touch	0.499	0.445	0.944
		Right Touch	0.515	0.732	1.247
		Left Tilt	0.152	0.303	0.455
		Right Tilt	0.149	0.501	0.650
	WCDMA 1900	Left Touch	0.460	0.445	0.905
		Right Touch	0.550	0.732	1.282
		Left Tilt	0.171	0.303	0.474
		Right Tilt	0.144	0.501	0.645
	LTE Band 12	Left Touch	0.234	0.445	0.682
		Right Touch	0.202	0.732	0.934
		Left Tilt	0.160	0.303	0.463
		Right Tilt	0.140	0.501	0.641
	LTE Band 13	Left Touch	0.266	0.445	0.713
		Right Touch	0.220	0.732	0.952
		Left Tilt	0.180	0.303	0.483
		Right Tilt	0.173	0.501	0.674
	LTE Band 14	Left Touch	0.262	0.445	0.707
		Right Touch	0.212	0.732	0.944
		Left Tilt	0.176	0.303	0.481
		Right Tilt	0.130	0.501	0.631
	LTE Band 26	Left Touch	0.463	0.445	0.908
		Right Touch	0.296	0.732	1.028
		Left Tilt	0.293	0.303	0.596
		Right Tilt	0.215	0.501	0.716
	LTE Band 66	Left Touch	0.582	0.445	1.027
		Right Touch	0.652	0.732	1.384
		Left Tilt	0.161	0.303	0.464
		Right Tilt	0.176	0.501	0.677
	LTE Band 25	Left Touch	0.550	0.445	0.995
		Right Touch	0.695	0.732	1.427
		Left Tilt	0.155	0.303	0.458
		Right Tilt	0.219	0.501	0.720
	LTE Band 7	Left Touch	0.406	0.445	0.851
		Right Touch	0.766	0.732	1.498
		Left Tilt	0.275	0.303	0.578
		Right Tilt	0.149	0.501	0.650
	LTE Band 41	Left Touch	0.267	0.445	0.712
		Right Touch	0.474	0.732	1.206
		Left Tilt	0.152	0.303	0.455
		Right Tilt	0.083	0.501	0.584

Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Head SAR	GSM 850	Left Touch	0.452	0.014	0.466
		Right Touch	0.392	0.025	0.417
		Left Tilt	0.361	0.013	0.274
		Right Tilt	0.275	0.011	0.286
	GPRS 850	Left Touch	0.542	0.014	0.556
		Right Touch	0.448	0.025	0.473
		Left Tilt	0.254	0.013	0.267
		Right Tilt	0.305	0.011	0.316
	GSM 1900	Left Touch	0.253	0.014	0.267
		Right Touch	0.310	0.025	0.335
		Left Tilt	0.083	0.013	0.098
		Right Tilt	0.084	0.011	0.095
	GPRS 1900	Left Touch	0.372	0.014	0.386
		Right Touch	0.500	0.025	0.525
		Left Tilt	0.125	0.013	0.138
		Right Tilt	0.122	0.011	0.133
	WCDMA 850	Left Touch	0.219	0.014	0.233
		Right Touch	0.163	0.025	0.188
		Left Tilt	0.102	0.013	0.115
		Right Tilt	0.100	0.011	0.111
	WCDMA 1700	Left Touch	0.499	0.014	0.513
		Right Touch	0.515	0.025	0.540
		Left Tilt	0.152	0.013	0.165
		Right Tilt	0.149	0.011	0.160
	WCDMA 1900	Left Touch	0.460	0.014	0.474
		Right Touch	0.550	0.025	0.575
		Left Tilt	0.171	0.013	0.184
		Right Tilt	0.144	0.011	0.155
	LTE Band 12	Left Touch	0.221	0.014	0.235
		Right Touch	0.202	0.025	0.227
		Left Tilt	0.160	0.013	0.173
		Right Tilt	0.140	0.011	0.151
	LTE Band 13	Left Touch	0.268	0.014	0.282
		Right Touch	0.220	0.025	0.245
		Left Tilt	0.180	0.013	0.193
		Right Tilt	0.173	0.011	0.184
	LTE Band 14	Left Touch	0.262	0.014	0.276
		Right Touch	0.212	0.025	0.237
		Left Tilt	0.178	0.013	0.191
		Right Tilt	0.130	0.011	0.141
	LTE Band 26	Left Touch	0.463	0.014	0.477
		Right Touch	0.296	0.025	0.321
		Left Tilt	0.293	0.013	0.306
		Right Tilt	0.215	0.011	0.226
	LTE Band 66	Left Touch	0.582	0.014	0.596
		Right Touch	0.652	0.025	0.677
		Left Tilt	0.161	0.013	0.174
		Right Tilt	0.176	0.011	0.187
	LTE Band 25	Left Touch	0.550	0.014	0.564
		Right Touch	0.695	0.025	0.720
		Left Tilt	0.155	0.013	0.168
		Right Tilt	0.219	0.011	0.230
	LTE Band 7	Left Touch	0.406	0.014	0.420
		Right Touch	0.766	0.025	0.791
		Left Tilt	0.275	0.013	0.288
		Right Tilt	0.149	0.011	0.160
	LTE Band 41	Left Touch	0.267	0.014	0.281
		Right Touch	0.474	0.025	0.499
		Left Tilt	0.152	0.013	0.165
		Right Tilt	0.083	0.011	0.094

Table 12.4.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)		Σ SAR (W/kg) 1+2
			1	2	
Head SAR	5.3G W-LAN	Left Touch	0.014	0.326	0.340
		Right Touch	0.025	0.714	0.739
		Left Tilt	0.013	0.325	0.338
		Right Tilt	0.011	0.553	0.564
	5.6G W-LAN	Left Touch	0.014	0.550	0.564
		Right Touch	0.025	0.753	0.778
		Left Tilt	0.013	0.567	0.580
		Right Tilt	0.011	0.554	0.565
	5.8G W-LAN	Left Touch	0.014	0.445	0.459
		Right Touch	0.025	0.732	0.757
		Left Tilt	0.013	0.303	0.316
		Right Tilt	0.011	0.501	0.512

12.5 Body-Worn Simultaneous Transmission Analysis

Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Rear	0.567	0.016	0.738	0.583	1.305	1.321
	GPRS 850	Rear	0.646	0.016	0.738	0.662	1.384	1.400
	GSM 1900	Rear	0.309	0.016	0.738	0.325	1.047	1.063
	GPRS 1900	Rear	0.397	0.016	0.738	0.413	1.135	1.151
	WCDMA 850	Rear	0.716	0.016	0.738	0.732	1.454	1.470
	WCDMA 1700	Rear	0.717	0.016	0.738	0.733	1.455	1.471
	WCDMA 1900	Rear	0.597	0.016	0.738	0.613	1.335	1.351
	LTE Band 12	Rear	0.400	0.016	0.738	0.416	1.138	1.154
	LTE Band 13	Rear	0.509	0.016	0.738	0.525	1.247	1.263
	LTE Band 14	Rear	0.451	0.016	0.738	0.467	1.189	1.205
	LTE Band 26	Rear	0.551	0.016	0.738	0.567	1.289	1.305
	LTE Band 66	Rear	0.603	0.016	0.738	0.619	1.341	1.357
	LTE Band 25	Rear	0.563	0.016	0.738	0.579	1.301	1.317
	LTE Band 7	Rear	0.672	0.016	0.738	0.688	1.410	1.426
	LTE Band 41	Rear	0.562	0.016	0.738	0.578	1.300	1.316

Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Rear	0.567	0.016	0.832	0.583	1.399	1.415
	GPRS 850	Rear	0.646	0.016	0.832	0.662	1.478	1.494
	GSM 1900	Rear	0.309	0.016	0.832	0.325	1.141	1.157
	GPRS 1900	Rear	0.397	0.016	0.832	0.413	1.229	1.245
	WCDMA 850	Rear	0.716	0.016	0.832	0.732	1.548	1.564
	WCDMA 1700	Rear	0.717	0.016	0.832	0.733	1.549	1.565
	WCDMA 1900	Rear	0.597	0.016	0.832	0.613	1.429	1.445
	LTE Band 12	Rear	0.400	0.016	0.832	0.416	1.232	1.248
	LTE Band 13	Rear	0.509	0.016	0.832	0.525	1.341	1.357
	LTE Band 14	Rear	0.451	0.016	0.832	0.467	1.283	1.299
	LTE Band 26	Rear	0.551	0.016	0.832	0.567	1.383	1.399
	LTE Band 66	Rear	0.603	0.016	0.832	0.619	1.435	1.451
	LTE Band 25	Rear	0.563	0.016	0.832	0.579	1.395	1.411
	LTE Band 7	Rear	0.672	0.016	0.832	0.688	1.504	1.520
	LTE Band 41	Rear	0.562	0.016	0.832	0.578	1.394	1.410

Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Rear	0.567	0.016	0.805	0.583	1.372	1.388
	GPRS 850	Rear	0.646	0.016	0.805	0.662	1.451	1.467
	GSM 1900	Rear	0.309	0.016	0.805	0.325	1.114	1.130
	GPRS 1900	Rear	0.397	0.016	0.805	0.413	1.202	1.218
	WCDMA 850	Rear	0.716	0.016	0.805	0.732	1.521	1.537
	WCDMA 1700	Rear	0.717	0.016	0.805	0.733	1.522	1.538
	WCDMA 1900	Rear	0.597	0.016	0.805	0.613	1.402	1.418
	LTE Band 12	Rear	0.400	0.016	0.805	0.416	1.205	1.221
	LTE Band 13	Rear	0.509	0.016	0.805	0.525	1.314	1.330
	LTE Band 14	Rear	0.451	0.016	0.805	0.467	1.256	1.272
	LTE Band 26	Rear	0.551	0.016	0.805	0.567	1.356	1.372
	LTE Band 66	Rear	0.603	0.016	0.805	0.619	1.408	1.424
	LTE Band 25	Rear	0.563	0.016	0.805	0.579	1.368	1.384
	LTE Band 7	Rear	0.672	0.016	0.805	0.688	1.477	1.493
	LTE Band 41	Rear	0.562	0.016	0.805	0.578	1.367	1.383

Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	Σ SAR (W/kg)		
			1	2	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Rear	0.567	0.295	0.862	0.862	0.862
	GPRS 850	Rear	0.646	0.295	0.941	0.941	0.941
	GSM 1900	Rear	0.309	0.295	0.604	0.604	0.604
	GPRS 1900	Rear	0.397	0.295	0.692	0.692	0.692
	WCDMA 850	Rear	0.716	0.295	1.011	1.011	1.011
	WCDMA 1700	Rear	0.717	0.295	1.012	1.012	1.012
	WCDMA 1900	Rear	0.597	0.295	0.892	0.892	0.892
	LTE Band 12	Rear	0.400	0.295	0.695	0.695	0.695
	LTE Band 13	Rear	0.509	0.295	0.804	0.804	0.804
	LTE Band 14	Rear	0.451	0.295	0.746	0.746	0.746
	LTE Band 26	Rear	0.551	0.295	0.846	0.846	0.846
	LTE Band 66	Rear	0.603	0.295	0.898	0.898	0.898
	LTE Band 25	Rear	0.563	0.295	0.858	0.858	0.858
	LTE Band 7	Rear	0.672	0.295	0.967	0.967	0.967
	LTE Band 41	Rear	0.562	0.295	0.857	0.857	0.857

Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	Σ SAR (W/kg)		
			1	2	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Rear	0.567	0.738	1.305	1.305	1.305
	GPRS 850	Rear	0.646	0.738	1.384	1.384	1.384
	GSM 1900	Rear	0.309	0.738	1.047	1.047	1.047
	GPRS 1900	Rear	0.397	0.738	1.135	1.135	1.135
	WCDMA 850	Rear	0.716	0.738	1.454	1.454	1.454
	WCDMA 1700	Rear	0.717	0.738	1.455	1.455	1.455
	WCDMA 1900	Rear	0.597	0.738	1.335	1.335	1.335
	LTE Band 12	Rear	0.400	0.738	1.138	1.138	1.138
	LTE Band 13	Rear	0.509	0.738	1.247	1.247	1.247
	LTE Band 14	Rear	0.451	0.738	1.189	1.189	1.189
	LTE Band 26	Rear	0.551	0.738	1.289	1.289	1.289
	LTE Band 66	Rear	0.603	0.738	1.341	1.341	1.341
	LTE Band 25	Rear	0.563	0.738	1.301	1.301	1.301
	LTE Band 7	Rear	0.672	0.738	1.410	1.410	1.410
	LTE Band 41	Rear	0.562	0.738	1.300	1.300	1.300

Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Body-Worn SAR	GSM 850	Rear	0.567	0.832	1.399
	GPRS 850	Rear	0.646	0.832	1.478
	GSM 1900	Rear	0.309	0.832	1.141
	GPRS 1900	Rear	0.397	0.832	1.229
	WCDMA 850	Rear	0.716	0.832	1.548
	WCDMA 1700	Rear	0.717	0.832	1.549
	WCDMA 1900	Rear	0.597	0.832	1.429
	LTE Band 12	Rear	0.400	0.832	1.232
	LTE Band 13	Rear	0.509	0.832	1.341
	LTE Band 14	Rear	0.451	0.832	1.283
	LTE Band 26	Rear	0.551	0.832	1.383
	LTE Band 66	Rear	0.603	0.832	1.435
	LTE Band 25	Rear	0.563	0.832	1.395
	LTE Band 7	Rear	0.672	0.832	1.504
	LTE Band 41	Rear	0.562	0.832	1.394

Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Body-Worn SAR	GSM 850	Rear	0.567	0.805	1.372
	GPRS 850	Rear	0.646	0.805	1.451
	GSM 1900	Rear	0.309	0.805	1.114
	GPRS 1900	Rear	0.397	0.805	1.202
	WCDMA 850	Rear	0.716	0.805	1.521
	WCDMA 1700	Rear	0.717	0.805	1.522
	WCDMA 1900	Rear	0.597	0.805	1.402
	LTE Band 12	Rear	0.400	0.805	1.205
	LTE Band 13	Rear	0.509	0.805	1.314
	LTE Band 14	Rear	0.451	0.805	1.256
	LTE Band 26	Rear	0.551	0.805	1.356
	LTE Band 66	Rear	0.603	0.805	1.408
	LTE Band 25	Rear	0.563	0.805	1.368
	LTE Band 7	Rear	0.672	0.805	1.477
	LTE Band 41	Rear	0.562	0.805	1.367

Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Body-Worn SAR	GSM 850	Rear	0.567	0.016	0.583
	GPRS 850	Rear	0.646	0.016	0.662
	GSM 1900	Rear	0.309	0.016	0.325
	GPRS 1900	Rear	0.397	0.016	0.413
	WCDMA 850	Rear	0.716	0.016	0.732
	WCDMA 1700	Rear	0.717	0.016	0.733
	WCDMA 1900	Rear	0.597	0.016	0.613
	LTE Band 12	Rear	0.400	0.016	0.416
	LTE Band 13	Rear	0.509	0.016	0.525
	LTE Band 14	Rear	0.451	0.016	0.467
	LTE Band 26	Rear	0.551	0.016	0.567
	LTE Band 66	Rear	0.603	0.016	0.619
	LTE Band 25	Rear	0.563	0.016	0.579
	LTE Band 7	Rear	0.672	0.016	0.688
	LTE Band 41	Rear	0.562	0.016	0.578

Table 12.5.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Body-Worn at 15 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)		Σ SAR (W/kg)
			1	2	
Body-Worn SAR	5.3G W-LAN	Rear	0.016	0.738	0.754
	5.6G W-LAN	Rear	0.016	0.832	0.848
	5.8G W-LAN	Rear	0.016	0.805	0.821

12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("").

Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)	5.2G W-LAN SAR (W/kg)		ΣSAR (W/kg)		
			1	2		3	1+2	1+3	1+2+3	
Hotspot SAR	GPRS 850	Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.216		0.044	0.216	0.216	0.216	0.216	
		Front	0.539	0.008	0.325	0.547	0.583	0.591		
		Rear	1.032	0.032		1.064	1.357	1.389		
		Right	0.190			0.190	0.190	0.190	0.190	
	GPRS 1900	Left	0.440	0.029	0.180	0.469	0.620	0.649	0.649	
		Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.611	-		0.611	0.611	0.611	0.611	
		Front	0.540	0.008	0.044	0.548	0.584	0.592		
		Rear	0.964	0.032	0.325	0.996	1.289	1.321		
	WCDMA 850	Right	0.478			0.478	0.478	0.478	0.478	
		Left	0.199	0.029	0.180	0.228	0.379	0.408		
		Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.120		0.044	0.563	0.599	0.607	0.607	
		Front	0.555	0.008	0.325	0.969	1.262	1.294		
	WCDMA 1700	Rear	0.937	0.032		0.421	0.421	0.421	0.421	
		Right	0.421			0.731	0.862	0.911		
		Left	0.702	0.029	0.180	0.230	0.381	0.410		
		Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.757	-		0.757	0.757	0.757	0.757	
	WCDMA 1900	Front	0.863	0.008	0.044	0.871	0.907	0.915		
		Rear	1.162	0.032	0.325	1.194	1.487	1.519		
		Right	0.592			0.592	0.592	0.592	0.592	
		Left	0.201	0.029	0.180	0.230	0.381	0.410		
		Top	-	0.002		0.021	0.002	0.021	0.023	
	LTE Band 12	Bottom	0.732	-		0.732	0.732	0.732	0.732	
		Front	0.672	0.008	0.044	0.880	0.916	0.924		
		Rear	1.192	0.032	0.325	1.224	1.517	1.549		
		Right	0.681			0.681	0.681	0.681	0.681	
		Left	0.257	0.029	0.180	0.286	0.437	0.466		
	LTE Band 13	Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.064	-		0.064	0.064	0.064	0.064	
		Front	0.266	0.008	0.044	0.274	0.310	0.318		
		Rear	0.464	0.032	0.325	0.496	0.789	0.821		
		Right	0.111			0.111	0.111	0.111	0.111	
	LTE Band 14	Left	0.114	0.029	0.180	0.143	0.294	0.323		
		Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.071	-		0.071	0.071	0.071	0.071	
		Front	0.340	0.008	0.044	0.348	0.384	0.392		
		Rear	0.556	0.032	0.325	0.588	0.881	0.913		
	LTE Band 26	Right	0.166			0.166	0.166	0.166	0.166	
		Left	0.214	0.029	0.180	0.233	0.384	0.423		
		Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.065	-		0.065	0.065	0.065	0.065	
		Front	0.314	0.008	0.044	0.322	0.358	0.366		
	LTE Band 66	Rear	0.539	0.032	0.325	0.571	0.864	0.896		
		Right	0.148			0.148	0.148	0.148	0.148	
		Left	0.204	0.029	0.180	0.233	0.384	0.413		
		Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.100	-		0.100	0.100	0.100	0.100	
	LTE Band 25	Front	0.444	0.008	0.044	0.452	0.488	0.496		
		Rear	0.700	0.032	0.325	0.732	1.025	1.057		
		Right	0.112			0.112	0.112	0.112	0.112	
		Left	0.216	0.029	0.180	0.247	0.396	0.427		
		Top	-	0.002		0.021	0.002	0.021	0.023	
	LTE Band 7	Bottom	0.554	-		0.554	0.554	0.554	0.554	
		Front	0.723	0.008	0.044	0.731	0.767	0.775		
		Rear	1.172	0.032	0.325	1.204	1.497	1.529		
		Right	0.618			0.618	0.618	0.618	0.618	
		Left	0.215	0.029	0.180	0.244	0.395	0.424		
	LTE Band 41	Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.690	-		0.690	0.690	0.690	0.690	
		Front	0.849	0.008	0.044	0.857	0.893	0.901		
		Rear	0.949	0.032	0.325	0.981	1.274	1.306		
		Right	0.549			0.549	0.549	0.549	0.549	
		Left	0.231	0.029	0.180	0.260	0.411	0.440		
	LTE Band 7	Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.926	-		0.926	0.926	0.926	0.926	
		Front	0.750	0.008	0.044	0.758	0.794	0.802		
		Rear	1.122	0.032	0.325	1.154	1.447	1.479		
		Right	0.703			0.703	0.703	0.703	0.703	
		Left	0.130	0.029	0.180	0.159	0.310	0.339		
	LTE Band 41	Top	-	0.002		0.021	0.002	0.021	0.023	
		Bottom	0.720	-		0.720	0.720	0.720	0.720	
		Front	0.793	0.008	0.044	0.801	0.837	0.845		
		Rear	1.092	0.032	0.325	1.124	1.417	1.449		
		Right	0.320			0.320	0.320	0.320	0.320	
		Left	0.081	0.029	0.180	0.110	0.261	0.290		

Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)		ΣSAR (W/kg)		
			1	2		3	1+2	1+3	1+2+3	
Hotspot SAR	GPRS 850	Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.216				0.216	0.216	0.216	
		Front	0.539	0.008		0.061	0.547	0.600	0.608	
		Rear	1.032	0.032		0.222	1.064	1.254	1.266	
		Right	0.190				0.190	0.190	0.190	
	GPRS 1900	Left	0.440	0.029		0.241	0.469	0.681	0.710	
		Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.611	-			0.611	0.611	0.611	
		Front	0.540	0.008		0.061	0.548	0.601	0.609	
		Rear	0.964	0.032		0.222	0.996	1.186	1.216	
	WCDMA 850	Right	0.478				0.478	0.478	0.478	
		Left	0.199	0.029		0.241	0.226	0.440	0.469	
		Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.120	-			0.120	0.120	0.120	
		Front	0.555	0.008		0.061	0.563	0.616	0.624	
	WCDMA 1700	Rear	0.937	0.032		0.222	0.969	1.159	1.191	
		Right	0.421				0.421	0.421	0.421	
		Left	0.702	0.029		0.241	0.731	0.943	0.972	
		Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.757	-			0.757	0.757	0.757	
	WCDMA 1900	Front	0.863	0.008		0.061	0.871	0.924	0.932	
		Rear	1.162	0.032		0.222	1.194	1.384	1.416	
		Right	0.592				0.592	0.592	0.592	
		Left	0.201	0.029		0.241	0.230	0.442	0.471	
		Top	-	0.002		0.036	0.002	0.036	0.038	
	LTE Band 12	Bottom	0.732	-			0.732	0.732	0.732	
		Front	0.672	0.008		0.061	0.680	0.933	0.941	
		Rear	1.192	0.032		0.222	1.224	1.414	1.446	
		Right	0.681				0.681	0.681	0.681	
		Left	0.257	0.029		0.241	0.286	0.498	0.527	
	LTE Band 13	Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.064	-			0.064	0.064	0.064	
		Front	0.266	0.008		0.061	0.274	0.327	0.335	
		Rear	0.464	0.032		0.222	0.496	0.666	0.718	
		Right	0.111				0.111	0.111	0.111	
	LTE Band 14	Left	0.114	0.029		0.241	0.143	0.355	0.384	
		Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.071	-			0.071	0.071	0.071	
		Front	0.340	0.008		0.061	0.348	0.401	0.409	
		Rear	0.556	0.032		0.222	0.588	0.778	0.810	
	LTE Band 26	Right	0.166				0.166	0.166	0.166	
		Left	0.214	0.029		0.241	0.243	0.455	0.484	
		Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.065	-			0.065	0.065	0.065	
		Front	0.314	0.008		0.061	0.322	0.375	0.383	
	LTE Band 66	Rear	0.539	0.032		0.222	0.571	0.761	0.793	
		Right	0.148				0.148	0.148	0.148	
		Left	0.204	0.029		0.241	0.233	0.445	0.474	
		Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.100	-			0.100	0.100	0.100	
	LTE Band 25	Front	0.444	0.008		0.061	0.452	0.505	0.513	
		Rear	0.700	0.032		0.222	0.732	0.922	0.954	
		Right	0.112				0.112	0.112	0.112	
		Left	0.216	0.029		0.241	0.247	0.459	0.488	
		Top	-	0.002		0.036	0.002	0.036	0.038	
	LTE Band 7	Bottom	0.554	-			0.554	0.554	0.554	
		Front	0.723	0.008		0.061	0.008	0.061	0.069	
		Rear	1.172	0.032		0.222	1.204	1.394	1.426	
		Right	0.618				0.618	0.618	0.618	
		Left	0.215	0.029		0.241	0.029	0.241	0.270	
	LTE Band 41	Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.690	-			0.690	0.690	0.690	
		Front	0.849	0.008		0.061	0.857	0.910	0.918	
		Rear	0.949	0.032		0.222	0.981	1.171	1.203	
		Right	0.549				0.549	0.549	0.549	
		Left	0.231	0.029		0.241	0.260	0.472	0.501	
	LTE Band 41	Top	-	0.002		0.036	0.002	0.036	0.038	
		Bottom	0.926	-			0.926	0.926	0.926	
		Front	0.750	0.008		0.061	0.758	0.811	0.819	
		Rear	1.122	0.032		0.222	1.154	1.344	1.376	
		Right	0.703				0.703	0.703	0.703	
		Left	0.130	0.029		0.241	0.159	0.371	0.400	

Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top		0.016	0.016
		Bottom	0.216		0.216
		Front	0.539	0.094	0.633
		Rear	1.032	0.331	1.363
		Right	0.190	-	0.190
	GPRS 1900	Left	0.440	0.265	0.705
		Top		0.016	0.016
		Bottom	0.611		0.611
		Front	0.540	0.094	0.634
		Rear	0.964	0.331	1.295
	WCDMA 850	Right	0.478	-	0.478
		Left	0.199	0.265	0.464
		Top		0.016	0.016
		Bottom	0.120		0.120
		Front	0.555	0.094	0.649
	WCDMA 1700	Rear	0.937	0.331	1.268
		Right	0.421	-	0.421
		Left	0.702	0.265	0.967
		Top		0.016	0.016
		Bottom	0.757		0.757
	WCDMA 1900	Front	0.863	0.094	0.957
		Rear	1.162	0.331	1.493
		Right	0.592	-	0.592
		Left	0.201	0.265	0.466
		Top		0.016	0.016
	LTE Band 12	Bottom	0.732		0.732
		Front	0.872	0.094	0.966
		Rear	1.392	0.331	1.523
		Right	0.681	-	0.681
		Left	0.257	0.265	0.522
	LTE Band 13	Top		0.016	0.016
		Bottom	0.064		0.064
		Front	0.266	0.094	0.360
		Rear	0.464	0.331	0.795
		Right	0.111	-	0.111
	LTE Band 14	Left	0.114	0.265	0.379
		Top		0.016	0.016
		Bottom	0.071		0.071
		Front	0.340	0.094	0.434
		Rear	0.556	0.331	0.887
	LTE Band 26	Right	0.166	-	0.166
		Left	0.214	0.265	0.479
		Top		0.016	0.016
		Bottom	0.065		0.065
		Front	0.314	0.094	0.408
	LTE Band 66	Rear	0.539	0.331	0.870
		Right	0.148	-	0.148
		Left	0.204	0.265	0.469
		Top		0.016	0.016
		Bottom	0.100		0.100
	LTE Band 25	Front	0.444	0.094	0.538
		Rear	0.709	0.331	1.031
		Right	0.112	-	0.112
		Left	0.218	0.265	0.483
		Top		0.016	0.016
	LTE Band 7	Bottom	0.554		0.554
		Front	0.723	0.094	0.994
		Rear	1.172	0.331	1.503
		Right	0.618	-	0.618
		Left	0.215	0.265	0.465
	LTE Band 41	Top		0.016	0.016
		Bottom	0.690		0.690
		Front	0.849	0.094	0.943
		Rear	0.949	0.331	1.280
		Right	0.549	-	0.549
		Left	0.231	0.265	0.496
		Top		0.016	0.016
		Bottom	0.926		0.926
		Front	0.750	0.094	0.844
		Rear	1.122	0.331	1.453
		Right	0.703	-	0.703
		Left	0.130	0.265	0.395
		Top		0.016	0.016
		Bottom	0.720		0.720
		Front	0.793	0.094	0.887
		Rear	1.092	0.331	1.423
		Right	0.320	-	0.320
		Left	0.081	0.265	0.346

Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		ΣSAR (W/kg)
			1	2	
Hotspot SAR	GPRS 850	Top		0.021	0.021
		Bottom	0.216		0.216
		Front	0.539	0.044	0.583
		Rear	1.032	0.325	1.357
		Right	0.190	-	0.190
	GPRS 1900	Left	0.440	0.180	0.620
		Top		0.021	0.021
		Bottom	0.611		0.611
		Front	0.540	0.044	0.584
		Rear	0.964	0.325	1.289
	WCDMA 850	Right	0.478	-	0.478
		Left	0.199	0.180	0.379
		Top		0.021	0.021
		Bottom	0.120		0.120
		Front	0.555	0.044	0.599
	WCDMA 1700	Rear	0.937	0.325	1.262
		Right	0.421	-	0.421
		Left	0.702	0.180	0.882
		Top		0.021	0.021
		Bottom	0.757		0.757
	WCDMA 1900	Front	0.863	0.044	0.907
		Rear	1.162	0.325	1.487
		Right	0.592	-	0.592
		Left	0.201	0.180	0.381
		Top		0.021	0.021
	LTE Band 12	Bottom	0.732		0.732
		Front	0.872	0.044	0.916
		Rear	1.392	0.325	1.517
		Right	0.681	-	0.681
		Left	0.257	0.180	0.437
	LTE Band 13	Top		0.021	0.021
		Bottom	0.064		0.064
		Front	0.266	0.044	0.310
		Rear	0.464	0.325	0.789
		Right	0.111	-	0.111
	LTE Band 14	Left	0.114	0.180	0.294
		Top		0.021	0.021
		Bottom	0.071		0.071
		Front	0.340	0.044	0.384
		Rear	0.556	0.325	0.881
	LTE Band 26	Right	0.166	-	0.166
		Left	0.214	0.180	0.394
		Top		0.021	0.021
		Bottom	0.065		0.065
		Front	0.314	0.044	0.358
	LTE Band 66	Rear	0.539	0.325	0.864
		Right	0.148	-	0.148
		Left	0.204	0.180	0.384
		Top		0.021	0.021
		Bottom	0.100		0.100
	LTE Band 25	Front	0.444	0.044	0.488
		Rear	0.709	0.325	1.025
		Right	0.112	-	0.112
		Left	0.218	0.180	0.398
		Top		0.021	0.021
	LTE Band 7	Bottom	0.554		0.554
		Front	0.723	0.044	0.844
		Rear	1.172	0.325	1.497
		Right	0.618	-	0.618
		Left	0.215	0.180	0.380
	LTE Band 41	Top		0.021	0.021
		Bottom	0.926		0.926
		Front	0.750	0.044	0.794
		Rear	1.122	0.325	1.447
		Right	0.703	-	0.703
		Left	0.130	0.180	0.310
		Top		0.021	0.021
		Bottom	0.720		0.720
		Front	0.793	0.044	0.837
		Rear	1.092	0.325	1.417
		Right	0.320	-	0.320
		Left	0.081	0.180	0.261

Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		ΣSAR (W/kg)
			1	2	
Hotspot SAR	GPRS 850	Top		0.036	0.036
		Bottom	0.216		0.216
		Front	0.539	0.061	0.600
		Rear	1.032	0.222	1.254
		Right	0.190	-	0.190
	GPRS 1900	Left	0.440	0.241	0.681
		Top		0.036	0.036
		Bottom	0.611		0.611
		Front	0.540	0.061	0.601
		Rear	0.964	0.222	1.186
	WCDMA 850	Right	0.478	-	0.478
		Left	0.199	0.241	0.440
		Top		0.036	0.036
		Bottom	0.120		0.120
		Front	0.555	0.061	0.616
	WCDMA 1700	Rear	0.937	0.222	1.159
		Right	0.421	-	0.421
		Left	0.702	0.241	0.943
		Top		0.036	0.036
		Bottom	0.757		0.757
	WCDMA 1900	Front	0.863	0.061	0.924
		Rear	1.162	0.222	1.384
		Right	0.592	-	0.592
		Left	0.201	0.241	0.442
		Top		0.036	0.036
	LTE Band 12	Bottom	0.732		0.732
		Front	0.872	0.061	0.933
		Rear	1.392	0.222	1.414
		Right	0.681	-	0.681
		Left	0.257	0.241	0.498
	LTE Band 13	Top		0.036	0.036
		Bottom	0.064		0.064
		Front	0.266	0.061	0.327
		Rear	0.464	0.222	0.686
		Right	0.111	-	0.111
	LTE Band 14	Left	0.114	0.241	0.355
		Top		0.036	0.036
		Bottom	0.071		0.071
		Front	0.340	0.061	0.401
		Rear	0.556	0.222	0.778
	LTE Band 26	Right	0.166	-	0.166
		Left	0.214	0.241	0.455
		Top		0.036	0.036
		Bottom	0.065		0.065
		Front	0.314	0.061	0.375
	LTE Band 66	Rear	0.539	0.222	0.761
		Right	0.148	-	0.148
		Left	0.204	0.241	0.445
		Top		0.036	0.036
		Bottom	0.100		0.100
	LTE Band 25	Front	0.444	0.061	0.505
		Rear	0.209	0.222	0.922
		Right	0.112	-	0.112
		Left	0.218	0.241	0.459
		Top		0.036	0.036
	LTE Band 7	Bottom	0.554		0.554
		Front	0.723	0.061	0.661
		Rear	1.172	0.222	1.394
		Right	0.618	-	0.618
		Left	0.215	0.241	0.441
	LTE Band 41	Top		0.036	0.036
		Bottom	0.690		0.690
		Front	0.849	0.061	0.910
		Rear	0.949	0.222	1.171
		Right	0.549	-	0.549
		Left	0.231	0.241	0.472
		Top		0.036	0.036
		Bottom	0.926		0.926
		Front	0.750	0.061	0.811
		Rear	1.122	0.222	1.344
		Right	0.703	-	0.703
		Left	0.130	0.241	0.371
		Top		0.036	0.036
		Bottom	0.720		0.720
		Front	0.793	0.061	0.854
		Rear	1.092	0.222	1.314
		Right	0.320	-	0.320
		Left	0.081	0.241	0.322

Table 12.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)		ΣSAR (W/kg)
			1	2	
Hotspot SAR	GPRS 850	Top	-	0.002	0.002
		Bottom	0.216	-	0.216
		Front	0.539	0.008	0.547
		Rear	1.032	0.032	1.064
		Right	0.190	-	0.190
	GPRS 1900	Left	0.440	0.029	0.469
		Top	-	0.002	0.002
		Bottom	0.611	-	0.611
		Front	0.540	0.008	0.548
		Rear	0.964	0.032	0.996
	WCDMA 850	Right	0.478	-	0.478
		Left	0.199	0.029	0.228
		Top	-	0.002	0.002
		Bottom	0.120	-	0.120
		Front	0.555	0.008	0.563
	WCDMA 1700	Rear	0.937	0.032	0.969
		Right	0.421	-	0.421
		Left	0.702	0.029	0.731
		Top	-	0.002	0.002
		Bottom	0.757	-	0.757
	WCDMA 1900	Front	0.863	0.008	0.871
		Rear	1.162	0.032	1.194
		Right	0.592	-	0.592
		Left	0.201	0.029	0.230
		Top	-	0.002	0.002
	LTE Band 12	Bottom	0.732	-	0.732
		Front	0.872	0.008	0.880
		Rear	1.392	0.032	1.224
		Right	0.681	-	0.681
		Left	0.257	0.029	0.286
	LTE Band 13	Top	-	0.002	0.002
		Bottom	0.064	-	0.064
		Front	0.266	0.008	0.274
		Rear	0.464	0.032	0.496
		Right	0.111	-	0.111
	LTE Band 14	Left	0.114	0.029	0.143
		Top	-	0.002	0.002
		Bottom	0.071	-	0.071
		Front	0.340	0.008	0.348
		Rear	0.556	0.032	0.588
	LTE Band 26	Right	0.166	-	0.166
		Left	0.214	0.029	0.243
		Top	-	0.002	0.002
		Bottom	0.065	-	0.065
		Front	0.314	0.008	0.322
	LTE Band 66	Rear	0.539	0.032	0.571
		Right	0.148	-	0.148
		Left	0.204	0.029	0.233
		Top	-	0.002	0.002
		Bottom	0.100	-	0.100
	LTE Band 25	Front	0.444	0.008	0.452
		Rear	0.709	0.032	0.732
		Right	0.112	-	0.112
		Left	0.218	0.029	0.247
		Top	-	0.002	0.002
	LTE Band 7	Bottom	0.554	-	0.554
		Front	0.723	0.008	0.731
		Rear	1.172	0.032	1.204
		Right	0.618	-	0.618
		Left	0.215	0.029	0.244
	LTE Band 41	Top	-	0.002	0.002
		Bottom	0.690	-	0.690
		Front	0.849	0.008	0.857
		Rear	0.949	0.032	0.981
		Right	0.549	-	0.549
		Left	0.231	0.029	0.260
		Top	-	0.002	0.002
		Bottom	0.926	-	0.926
		Front	0.750	0.008	0.758
		Rear	1.122	0.032	1.154
		Right	0.703	-	0.703
		Left	0.130	0.029	0.159
		Top	-	0.002	0.002
		Bottom	0.720	-	0.720
		Front	0.793	0.008	0.801
		Rear	1.092	0.032	1.124
		Right	0.320	-	0.320
		Left	0.081	0.029	0.110

Table 12.6.7 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)		ΣSAR (W/kg)
			1	2	
Hotspot SAR	5.2G W-LAN	Top	0.002	0.021	0.023
		Bottom	-	-	-
		Front	0.008	0.044	0.052
		Rear	0.032	0.325	0.357
		Right	-	-	-
	5.8G W-LAN	Left	0.029	0.180	0.209
		Top	0.002	0.036	0.038
		Bottom	-	-	-
		Front	0.008	0.061	0.069
		Rear	0.032	0.222	0.254
		Right	-	-	-
		Left	0.029	0.241	0.270

12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

13. SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

Table 13.1 Head SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g) (W/kg)	1st Repeated SAR(1g) (W/kg)	Ratio	2nd Repeated SAR(1g) (W/kg)	Ratio	3rd Repeated SAR(1g) (W/kg)	Ratio
MHz	Ch.											
5710.0	142	802.11n HT40	-	-	Right Touch	0.991	0.983	1.01	-	-	-	-
5795.0	159	802.11n HT40	-	-	Right Touch	0.993	0.990	1.00	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												
Head 1.6 W/kg (mW/g) averaged over 1 gram												

Table 13.2 Hotspot SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g) (W/kg)	1st Repeated SAR(1g) (W/kg)	Ratio	2nd Repeated SAR(1g) (W/kg)	Ratio	3rd Repeated SAR(1g) (W/kg)	Ratio
MHz	Ch.											
836.6	190	GSM850	GPRS	-	10 mm [Rear]	1.030	1.000	1.03	-	-	-	-
1880.0	661	PCS1900	GPRS	-	10 mm [Rear]	0.953	0.946	1.01	-	-	-	-
836.6	4183	WCDMA 850	RMC	-	10 mm [Rear]	0.935	0.934	1.00	-	-	-	-
1732.4	1412	WCDMA 1700	RMC	-	10 mm [Rear]	1.160	1.150	1.01	-	-	-	-
1880.0	9400	WCDMA 1900	RMC	-	10 mm [Rear]	1.190	1.170	1.02	-	-	-	-
1745.0	132322	LTE B66	-	-	10 mm [Rear]	1.170	1.130	1.04	-	-	-	-
1882.5	26365	LTE B25	-	-	10 mm [Rear]	0.947	0.927	1.02	-	-	-	-
2535.0	21100	LTE B7	-	-	10 mm [Rear]	1.120	1.030	1.09	-	-	-	-
2593.0	40620	LTE B41	-	-	10 mm [Rear]	1.090	1.030	1.06	-	-	-	-
5230.0	46	802.11n HT40	-	-	10 mm [Rear]	0.825	0.705	1.17	-	-	-	-
5795.0	159	802.11n HT40	-	-	10 mm [Rear]	0.985	0.983	1.00	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												
Body 1.6 W/kg (mW/g) averaged over 1 gram												

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

14. EQUIPMENT LIST

Table 14.1.1 Test Equipment Calibration

Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
Robot	SPEAG	TX60L	N/A	N/A	F12/5LP5A1/A/01
Robot	SPEAG	TX90XL	N/A	N/A	F13/5RR2A1/A/01
Robot	SPEAG	TX60L	N/A	N/A	F14/5WV5D1/A/01
Robot Controller	SPEAG	CS8C	N/A	N/A	F12/5LP5A1/C/01
Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5RR2A1/C/01
Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5WV5D1/C/01
Joystick	SPEAG	N/A	N/A	N/A	S-12030401
Joystick	SPEAG	N/A	N/A	N/A	S-13200990
Joystick	SPEAG	P21142605A	N/A	N/A	005695
Intel Core i7-2 600 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
Intel Core i7-3 770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
Intel Core i7-3 770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1679
Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1786
Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1837
Data Acquisition Electronics	SPEAG	DAE3V1	2020-11-24	2021-11-24	520
Data Acquisition Electronics	SPEAG	DAE4V1	2020-04-22	2021-04-22	1485
Data Acquisition Electronics	SPEAG	DAE4V1	2020-07-30	2021-07-30	1335
Data Acquisition Electronics	SPEAG	DAE4V1	2020-08-25	2021-08-25	1396
Data Acquisition Electronics	SPEAG	DAE4V1	2020-09-16	2021-09-16	1453
Dosimetric E-Field Probe	SPEAG	ES3DV3	2020-03-25	2021-03-25	3328
Dosimetric E-Field Probe	SPEAG	ES3DV3	2021-01-27	2022-01-27	3327
Dosimetric E-Field Probe	SPEAG	EX3DV4	2020-05-27	2021-05-27	3866
Dosimetric E-Field Probe	SPEAG	EX3DV4	2020-11-27	2021-11-27	7368
Dosimetric E-Field Probe	SPEAG	EX3DV4	2020-07-31	2021-07-31	3930
750MHz SAR Dipole	SPEAG	D750V3	2021-01-21	2023-01-21	1049
835MHz SAR Dipole	SPEAG	D835V2	2020-05-19	2022-05-19	4d159
1800MHz SAR Dipole	SPEAG	D1800V2	2020-03-20	2022-03-20	2d202
1900MHz SAR Dipole	SPEAG	D1900V2	2020-05-19	2022-05-19	5d176
2450MHz SAR Dipole	SPEAG	D2450V2	2020-08-18	2022-08-18	920
2600MHz SAR Dipole	SPEAG	D2600V2	2021-02-18	2023-02-18	1016
5GHz SAR Dipole	SPEAG	D5GHZv2	2021-02-23	2023-02-23	1103
Network Analyzer	Agilent	E5071C	2020-06-24	2021-06-24	MY46106970
Signal Generator	Agilent	E4438C	2020-06-24	2021-06-24	US41461520
Amplifier	RFBAY.Inc	MPA-40-40	2020-12-16	2021-12-16	21151801
Amplifier	EMPOWER	BBS3Q7ELU	2020-06-24	2021-06-24	1020
High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2020-06-24	2021-06-24	1005
Power Meter	HP	EPM-442A	2020-12-16	2021-12-16	GB37170267
Power Meter	HP	EPM-442A	2020-12-16	2021-12-16	GB37170413
Power Sensor	HP	8481A	2020-12-16	2021-12-16	US37294267
Power Sensor	HP	8481A	2020-12-16	2021-12-16	2702A61707
Power Sensor	HP	8481A	2020-12-16	2021-12-16	2702A65976
Dual Directional Coupler	Agilent	778D-012	2020-12-16	2021-12-16	50228
Directional Coupler	HP	772D	2020-06-24	2021-06-24	2889A01064
Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2020-06-24	2021-06-24	165
Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2020-06-24	2021-06-24	2
Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2020-06-24	2021-06-24	2
Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2020-12-16	2021-12-16	03942
Attenuators(10 dB)	WEINSCHEL	23-10-34	2020-12-16	2021-12-16	BP4387
Attenuators	Cernexwave	CFADC2603U5	2020-06-24	2021-06-24	C11711
Dielectric Probe kit	SPEAG	DAK-3.5	2020-11-25	2021-11-25	1092
8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2020-06-24	2021-06-24	GB41321164
Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2020-12-16	2021-12-16	101414
Power Splitter	Anritsu	K241B	2020-12-16	2021-12-16	130183
Bluetooth Tester	TESCOM	TC-3000C	2020-06-24	2021-06-24	3000C000563

NOTE(S):

1. The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.

2. CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3328)

Error Description	Uncertainty value ±%		Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System									
Probe calibration	6.0		Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3		Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0		Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3		Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0		Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25		Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3		Normal	1	1	1	0.3	0.3	∞
Response time	0.8		Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6		Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0		Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0		Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8		Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7		Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0		Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related									
Device Positioning	2.9		Normal	1	1	1	2.9	2.9	145
Device Holder	3.6		Normal	1	1	1	3.6	3.6	5
Power Drift	5.0		Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0		Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters									
Phantom Shell	7.6		Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0		Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0		Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9		Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0		Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1		Normal	1	0.23	0.26	0.94	1.1	10
Temp. unc. - Conductivity	1.9		Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	2.0		Rectangular	√3	0.23	0.26	0.27	0.30	∞
Combined Standard Uncertainty							13	13	330
Expanded Uncertainty (k=2)							26	26	

$U(1 \text{ g}) = k \cdot u_c$
 $= 2 \cdot 13 \%$
 $= 26 \%$ (The confidence level is about 95 % $k = 2$)
 $U(10 \text{ g}) = k \cdot u_c$
 $= 2 \cdot 13 \%$
 $= 26 \%$ (The confidence level is about 95 % $k = 2$)

835 MHz Head (SN: 3328)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	10
Temp. unc. - Conductivity	1.7	Rectangular	√3	0.78	0.71	0.77	0.70	∞
Temp. unc. - Permittivity	1.8	Rectangular	√3	0.23	0.26	0.24	0.27	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

1 800 MHz Head (SN: 3327)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	$\sqrt{3}$	1	1	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1	1	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.92	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.24	0.27	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$U(1 \text{ g}) = k \cdot u_c$
 = 2 · 13 %
 = 26 % \text{ (The confidence level is about 95 \% } k = 2\text{)}

$U(10 \text{ g}) = k \cdot u_c$
 = 2 · 13 %
 = 26 % \text{ (The confidence level is about 95 \% } k = 2\text{)}

1800 MHz Head (SN: 3328)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	$\sqrt{3}$	1	1	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1	1	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.94	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	$\sqrt{3}$	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.24	0.27	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

1 900 MHz Head (SN: 3328)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	$\sqrt{3}$	1	1	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1	1	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.92	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.81	0.74	∞
Temp. unc. - Permittivity	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.24	0.27	∞
Combined Standard Uncertainty								
Expanded Uncertainty (k=2)								
$U(1 \text{ g}) = k \cdot u_c$ = 2 · 13 % = 26 % (The confidence level is about 95 % k = 2)								
$U(10 \text{ g}) = k \cdot u_c$ = 2 · 13 % = 26 % (The confidence level is about 95 % k = 2)								

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

2 450 MHz Head (SN: 3327)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.81	0.74	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.25	0.29	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

2 450 MHz Head (SN: 3930)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

2 600 MHz Head (SN: 3930)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.87	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	√3	0.78	0.71	0.81	0.74	∞
Temp. unc. - Permittivity	2.0	Rectangular	√3	0.23	0.26	0.27	0.30	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

2 600 MHz Head (SN: 3327)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.94	1.1	10
Temp. unc. - Conductivity	2.0	Rectangular	$\sqrt{3}$	0.78	0.71	0.90	0.82	∞
Temp. unc. - Permittivity	2.0	Rectangular	$\sqrt{3}$	0.23	0.26	0.27	0.30	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

5 200 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.1	Normal	1	0.78	0.71	3.2	2.9	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$U(1 \text{ g}) = k \cdot u_c$
 $= 2 \cdot 13 \%$
 $= 26 \%$ (The confidence level is about 95 % $k = 2$)
 $U(10 \text{ g}) = k \cdot u_c$
 $= 2 \cdot 13 \%$
 $= 26 \%$ (The confidence level is about 95 % $k = 2$)

5 300 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	$\sqrt{3}$	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	$\sqrt{3}$	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.94	1.1	10
Temp. unc. - Conductivity	1.8	Rectangular	$\sqrt{3}$	0.78	0.71	0.81	0.74	∞
Temp. unc. - Permittivity	1.9	Rectangular	$\sqrt{3}$	0.23	0.26	0.25	0.29	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

5 500 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.1	Normal	1	0.78	0.71	3.2	2.9	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.2	Normal	1	0.23	0.26	0.97	1.1	10
Temp. unc. - Conductivity	1.8	Rectangular	√3	0.78	0.71	0.81	0.74	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

5 600 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.0	Normal	1	0.23	0.26	0.92	1.0	10
Temp. unc. - Conductivity	1.8	Rectangular	√3	0.78	0.71	0.81	0.74	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

5 800 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.94	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.8	Rectangular	√3	0.23	0.26	0.24	0.27	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

5 800 MHz Head (SN: 7368)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (± %)	Standard 10 g (± %)	vi 2 or Veff
Measurement System								
Probe calibration	6.55	Normal	1	1	1	6.6	6.6	∞
Isotropy	1.3	Normal	1	1	1	1.3	1.3	∞
Boundary Effects	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Probe Linearity	0.3	Normal	1	1	1	0.3	0.3	∞
Probe modulation response	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner	0.8	Rectangular	√3	1	1	0.46	0.46	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Algorithms for Max. SAR Eval.	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	∞
SAR Scaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Physical Parameters								
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	∞
SAR correction	0.0	Normal	1	1	0.84	0.0	0.0	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid permittivity (Meas.)	4.1	Normal	1	0.23	0.26	0.94	1.1	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	∞
Combined Standard Uncertainty						13	13	330
Expanded Uncertainty (k=2)						26	26	

$$U(1 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

$$U(10 \text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13 \%$$

= 26 % (The confidence level is about 95 % k = 2)

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrave, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

APPENDIX A. – Probe Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**Client **DT&C (Dymstec)**Certificate No: **ES3-3328_Mar20**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3328**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7**
Calibration procedure for dosimetric E-field probes

Calibration date: **March 25, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-19 (No. 217-02894)	Apr-20
DAE4	SN: 660	27-Dec-19 (No. DAE4-660_Dec19)	Dec-20
Reference Probe ES3DV2	SN: 3013	31-Dec-19 (No. ES3-3013_Dec19)	Dec-20
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 27, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TS	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 30 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}:** Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)x,y,z = NORMx,y,z * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCPx,y,z:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}:** A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORMx,y,z * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle:** The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

ES3DV3 – SN:3328

March 25, 2020

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3328**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.03	1.05	1.08	$\pm 10.1 \%$
DCP (mV) ^B	106.5	103.5	104.9	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	195.5	$\pm 3.5 \%$	$\pm 4.7 \%$
		Y	0.0	0.0	1.0		194.7		
		Z	0.0	0.0	1.0		193.7		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3328

March 25, 2020

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3328**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-23.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

ES3DV3- SN:3328

March 25, 2020

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3328**Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	6.34	6.34	6.34	0.80	1.30	± 12.0 %
835	41.5	0.90	6.19	6.19	6.19	0.80	1.23	± 12.0 %
900	41.5	0.97	6.01	6.01	6.01	0.80	1.24	± 12.0 %
1750	40.1	1.37	5.34	5.34	5.34	0.80	1.24	± 12.0 %
1900	40.0	1.40	5.09	5.09	5.09	0.80	1.30	± 12.0 %
2450	39.2	1.80	4.70	4.70	4.70	0.78	1.33	± 12.0 %
2600	39.0	1.96	4.57	4.57	4.57	0.80	1.28	± 12.0 %
3500	37.9	2.91	4.30	4.30	4.30	0.65	1.60	± 13.1 %
3700	37.7	3.12	4.23	4.23	4.23	0.70	1.60	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3- SN:3328

March 25, 2020

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3328**Calibration Parameter Determined in Body Tissue Simulating Media**

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	6.18	6.18	6.18	0.51	1.47	± 12.0 %
835	55.2	0.97	6.11	6.11	6.11	0.80	1.19	± 12.0 %
900	55.0	1.05	6.06	6.06	6.06	0.48	1.48	± 12.0 %
1750	53.4	1.49	4.98	4.98	4.98	0.71	1.31	± 12.0 %
1900	53.3	1.52	4.74	4.74	4.74	0.62	1.55	± 12.0 %
2450	52.7	1.95	4.44	4.44	4.44	0.75	1.30	± 12.0 %
2600	52.5	2.16	4.25	4.25	4.25	0.80	1.30	± 12.0 %
3500	51.3	3.31	3.70	3.70	3.70	0.85	1.60	± 13.1 %
3700	51.0	3.55	3.57	3.57	3.57	0.70	1.70	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3– SN:3328

March 25, 2020

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

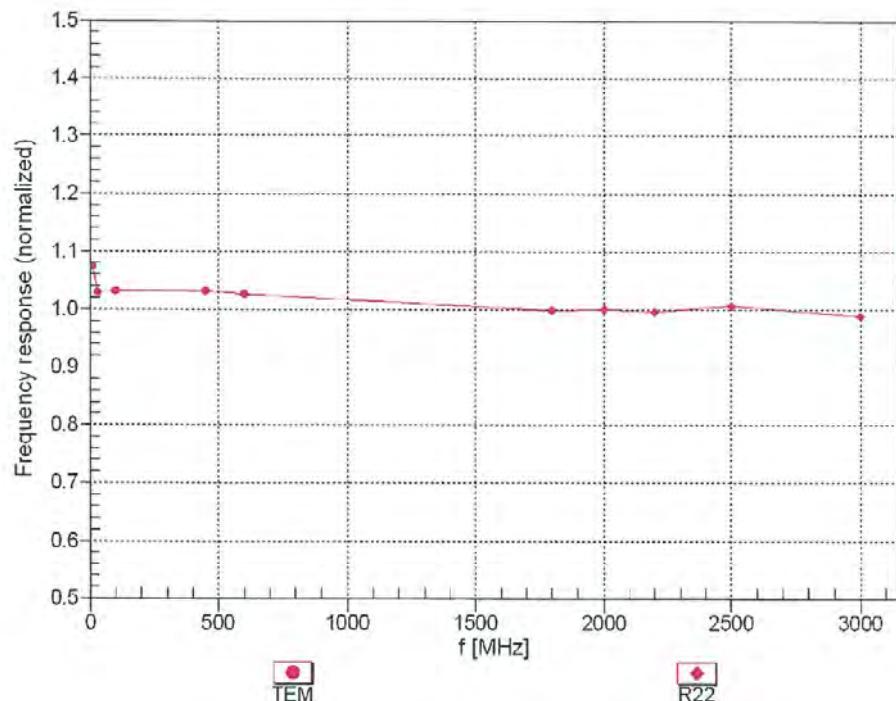

Uncertainty of Frequency Response of E-field: $\pm 6.3\% \text{ (k=2)}$



ES3DV3- SN:3328

March 25, 2020

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM



f=1800 MHz, R22

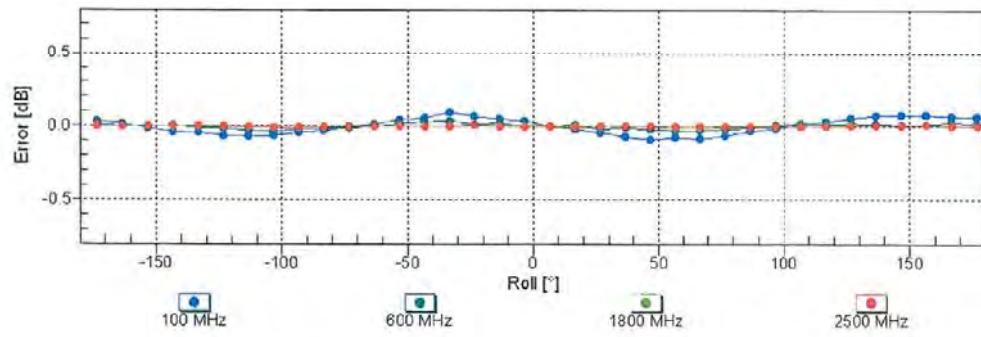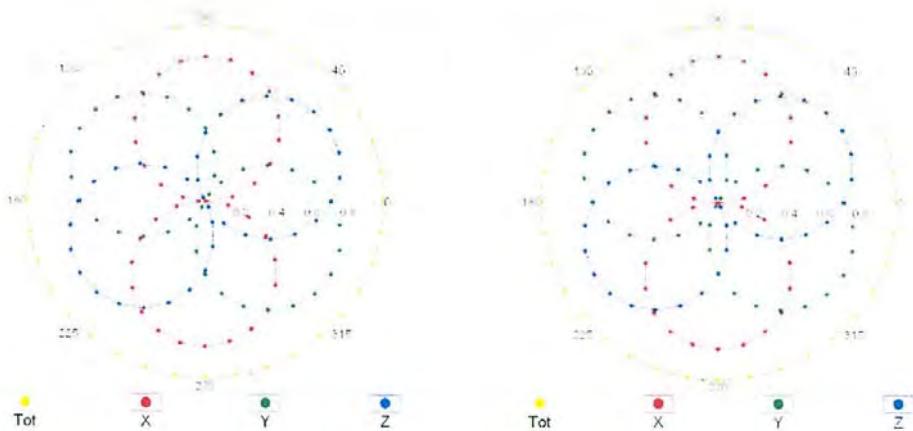**Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)**

ES3DV3- SN:3328

March 25, 2020

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

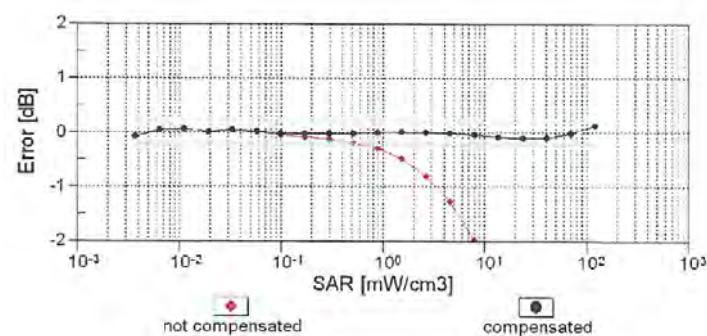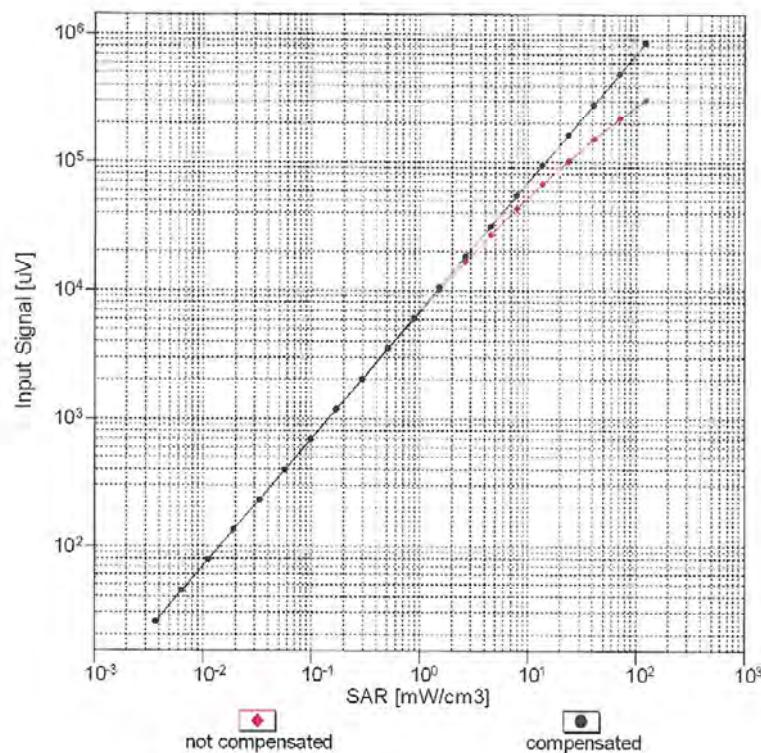


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


ES3DV3- SN:3328

March 25, 2020

Conversion Factor Assessment

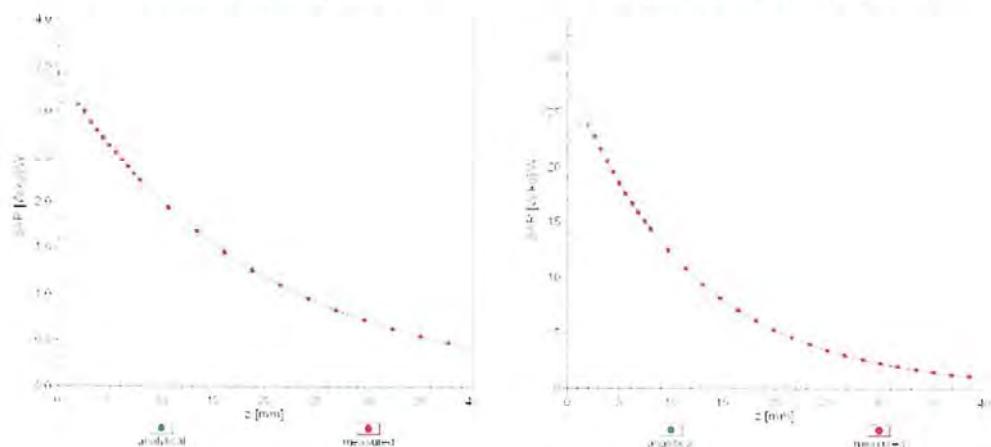 $f = 835 \text{ MHz}, \text{WGLS R9 (H_convF)}$ $f = 1900 \text{ MHz}, \text{WGLS R22 (H_convF)}$ 

Deviation from Isotropy in Liquid Error (ϕ, θ) , $f = 900 \text{ MHz}$

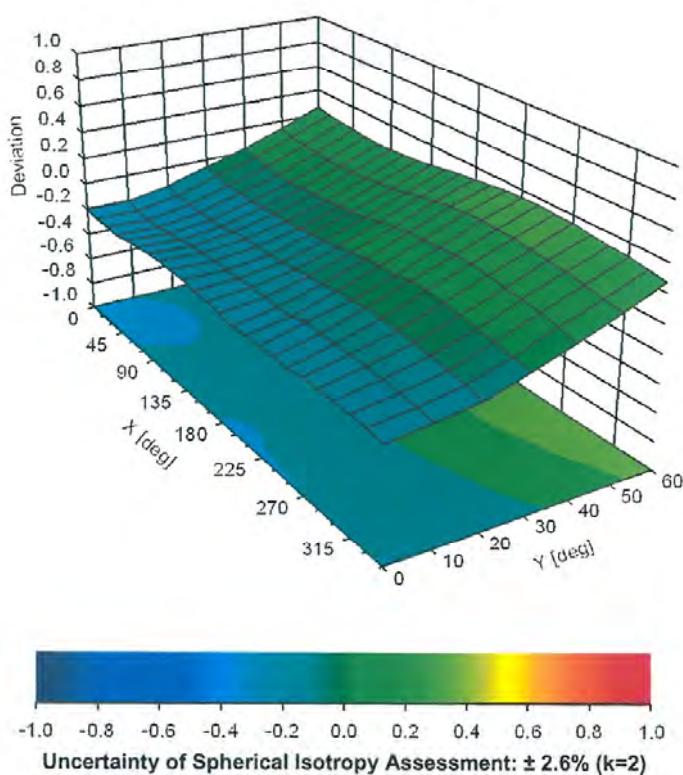

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client DT&C (Dymstec)

Certificate No: ES3-3327_Jan21

CALIBRATION CERTIFICATE

Object ES3DV3 - SN:3327

Calibration procedure(s) QA CAL-01.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7
Calibration procedure for dosimetric E-field probes

Calibration date: January 27, 2021

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: CC2552 (20x)	31-Mar-20 (No. 217-03106)	Apr-21
DAE4	SN: 660	23-Dec-20 (No. DAE4-660_Dec20)	Dec-21
Reference Probe ES3DV2	SN: 3013	30-Dec-20 (No. ES3-3013_Dec20)	Dec-21
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by:	Name	Function	Signature
	Jeffrey Katzman	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 28, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, ", "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORM_{x,y,z} * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D$ are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- $ConvF$ and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- $Spherical Isotropy (3D deviation from isotropy)$: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- $Sensor Offset$: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- $Connector Angle$: The angle is assessed using the information gained by determining the $NORM_x$ (no uncertainty required).

ES3DV3 – SN:3327

January 27, 2021

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.15	1.09	1.03	$\pm 10.1 \%$
DCP (mV) ^B	103.6	106.2	107.2	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	193.6	$\pm 2.5 \%$	$\pm 4.7 \%$
		Y	0.0	0.0	1.0		202.9		
		Z	0.0	0.0	1.0		195.9		

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3– SN:3327

January 27, 2021

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-125.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

ES3DV3– SN:3327

January 27, 2021

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
750	41.9	0.89	6.49	6.49	6.49	0.80	1.26	± 12.0 %
835	41.5	0.90	6.26	6.26	6.26	0.77	1.23	± 12.0 %
900	41.5	0.97	6.08	6.08	6.08	0.40	1.75	± 12.0 %
1750	40.1	1.37	5.41	5.41	5.41	0.73	1.31	± 12.0 %
1900	40.0	1.40	5.13	5.13	5.13	0.68	1.32	± 12.0 %
2450	39.2	1.80	4.68	4.68	4.68	0.80	1.40	± 12.0 %
2600	39.0	1.96	4.47	4.47	4.47	0.80	1.37	± 12.0 %
3500	37.9	2.91	4.23	4.23	4.23	0.90	1.40	± 13.1 %
3700	37.7	3.12	4.13	4.13	4.13	0.90	1.40	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3– SN:3327

January 27, 2021

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3327

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
750	55.5	0.96	6.51	6.51	6.51	0.43	1.58	± 12.0 %
835	55.2	0.97	6.34	6.34	6.34	0.80	1.18	± 12.0 %
900	55.0	1.05	6.23	6.23	6.23	0.57	1.39	± 12.0 %
1750	53.4	1.49	5.26	5.26	5.26	0.48	1.59	± 12.0 %
1900	53.3	1.52	5.01	5.01	5.01	0.48	1.64	± 12.0 %
2450	52.7	1.95	4.49	4.49	4.49	0.80	1.28	± 12.0 %
2600	52.5	2.16	4.34	4.34	4.34	0.80	1.25	± 12.0 %
3500	51.3	3.31	3.81	3.81	3.81	0.80	1.60	± 13.1 %
3700	51.0	3.55	3.71	3.71	3.71	0.80	1.60	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV3– SN:3327

January 27, 2021

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

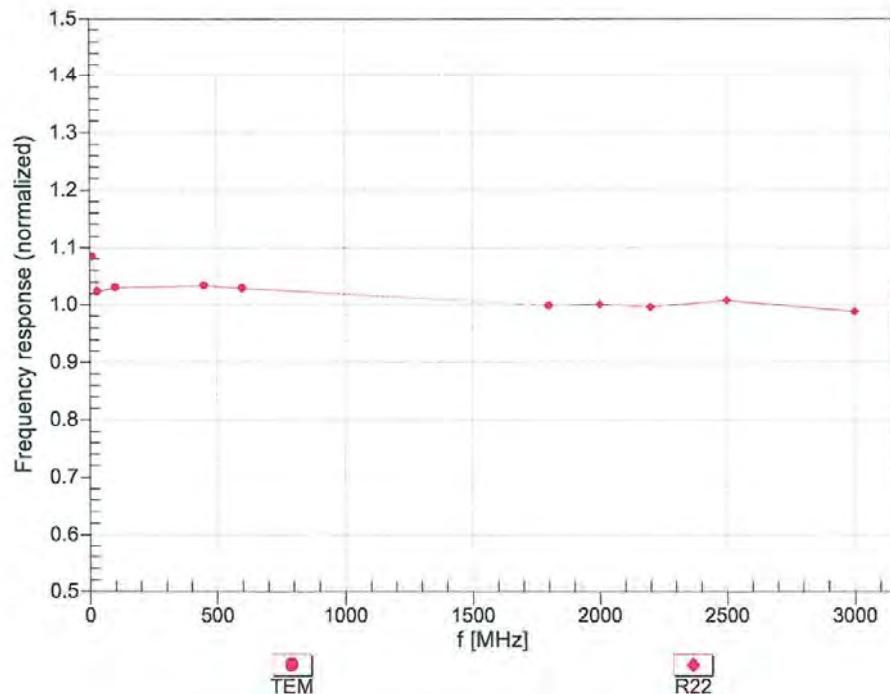


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3– SN:3327



January 27, 2021

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


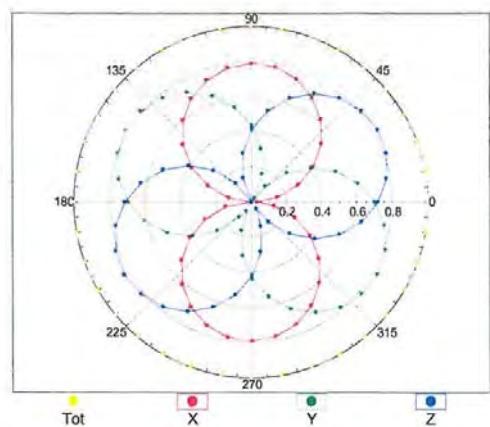


f=1800 MHz,R22

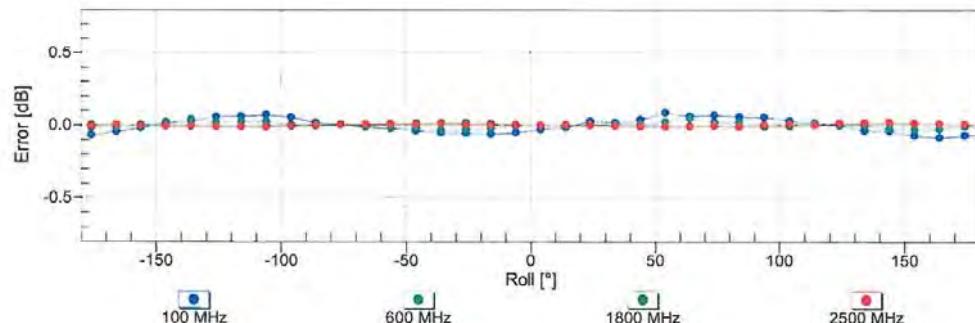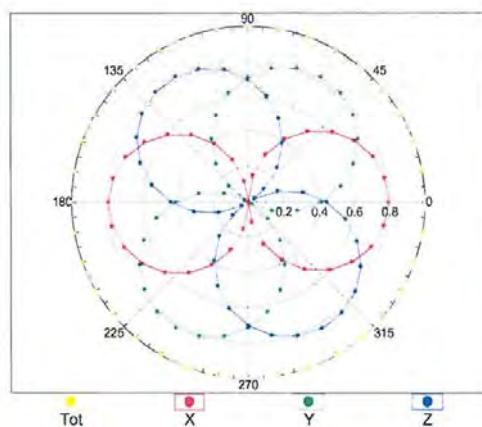Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

ES3DV3- SN.3327



January 27, 2021

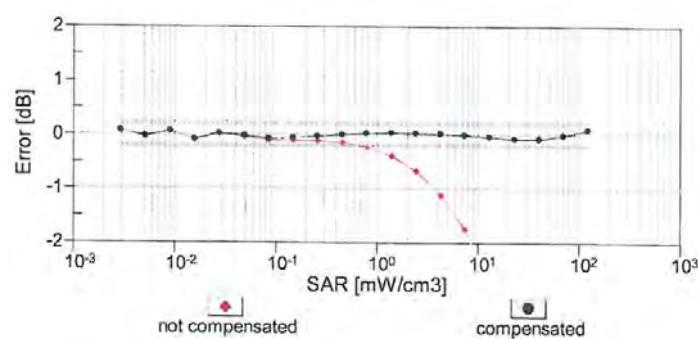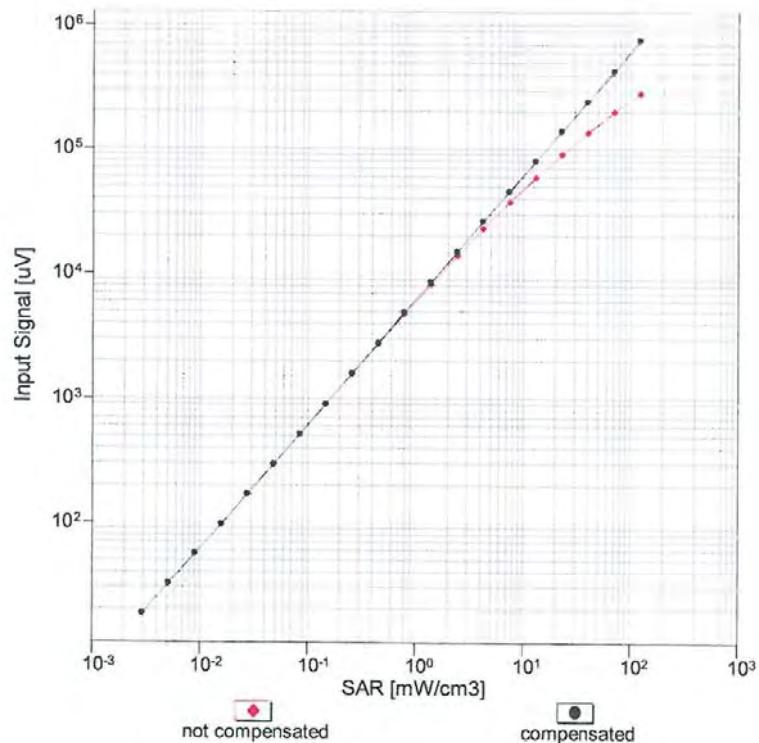Dynamic Range f(SAR_{head})
(TEM cell , f_{eval}= 1900 MHz)**Uncertainty of Linearity Assessment: ± 0.6% (k=2)**


ES3DV3– SN:3327

January 27, 2021

Conversion Factor Assessment

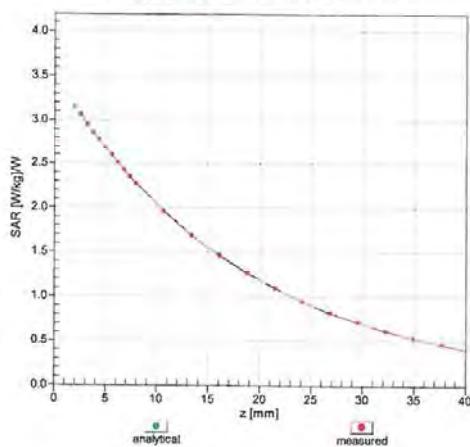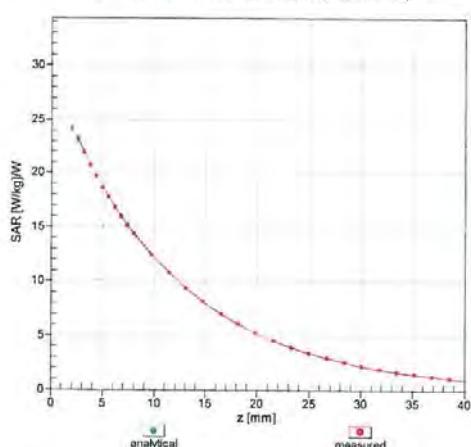 $f = 835 \text{ MHz}, \text{WGLS R9 (H_convF)}$  $f = 1900 \text{ MHz}, \text{WGLS R22 (H_convF)}$ 

Deviation from Isotropy in Liquid

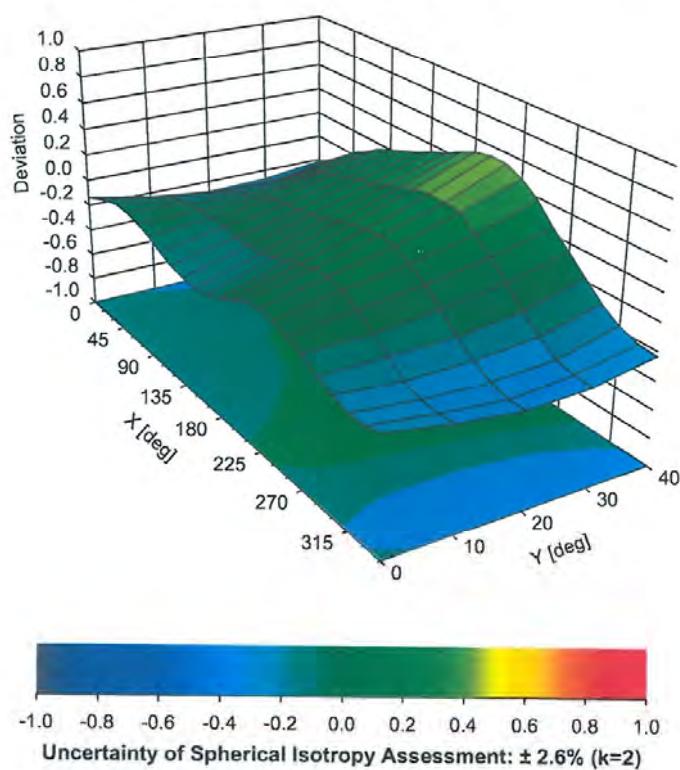Error (ϕ, θ), $f = 900 \text{ MHz}$ 

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**Client **DT&C (Dymstec)**Certificate No: **EX3-3866_May20**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3866**Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7**
Calibration procedure for dosimetric E-field probesCalibration date: **May 27, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: CC2552 (20x)	31-Mar-20 (No. 217-03106)	Apr-21
DAE4	SN: 660	27-Dec-19 (No. DAE4-660_Dec19)	Dec-20
Reference Probe ES3DV2	SN: 3013	31-Dec-19 (No. ES3-3013_Dec19)	Dec-20
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check: Oct-20

Calibrated by:	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 30, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.