

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042

Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2105-0051

2. Customer

- Name (FCC) : Point Mobile Co., LTD. / Name (IC) : POINTMOBILE CO.,LTD
- Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
- Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Mobile Computer / PM30W

FCC ID : V2X-PM30W

IC : 10664A-PM30W

5. FCC Regulation(s): Part 15.247

IC Standard(s): RSS-247 Issue 2

Test Method used: KDB558074 D01v05r02, ANSI C63.10-2013



6. Date of Test : 2021.02.19 ~ 2021.03.29

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

| | | |
|-------------|--|---|
| Affirmation | Tested by | Reviewed by |
| | Name : JaeHyeok Bang  (Signature) | Name : JaeJin Lee  (Signature) |

2021 . 05 . 27 .

DT&C Co., Ltd.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

| Test Report No. | Date | Description | Revised by | Reviewed by |
|-----------------|---------------|---------------|---------------|-------------|
| DRTFCC2105-0051 | May. 27, 2021 | Initial issue | JaeHyeok Bang | JaeJin Lee |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Table of Contents

| | |
|---|-----------|
| 1. General Information | 4 |
| 1.1 Explanations for Reference Test Data | 4 |
| 1.1.1 Introduction..... | 4 |
| 1.1.2 Explain the Differences | 4 |
| 1.1.3 Spot Check Verification Data..... | 4 |
| 1.1.4 Reference Section | 4 |
| 1.2 Testing Laboratory | 5 |
| 1.3 Testing Environment | 5 |
| 1.4 Measurement Uncertainty | 5 |
| 1.5 Details of Applicant | 6 |
| 1.6 Description of EUT | 6 |
| 1.7 Declaration by the applicant / manufacturer | 6 |
| 1.8 Information about the FHSS characteristics | 7 |
| 1.9 Test Equipment List..... | 8 |
| 1.10 Summary of Test Results | 9 |
| 1.11 Conclusion of worst-case and operation mode | 10 |
| 2. Maximum Peak Output Power Measurement | 11 |
| 2.1 Test Setup | 11 |
| 2.2 Limit..... | 11 |
| 2.3 Test Procedure..... | 11 |
| 2.4 Test Results | 12 |
| 3. 20 dB BW & Occupied BW | 18 |
| 3.1 Test Setup | 18 |
| 3.2 Limit..... | 18 |
| 3.3 Test Procedure..... | 18 |
| 3.4 Test Results | 18 |
| 4. Carrier Frequency Separation..... | 24 |
| 4.1 Test Setup | 24 |
| 4.2 Limit..... | 24 |
| 4.3 Procedure..... | 24 |
| 4.4 Test Results | 24 |
| 5. Number of Hopping Frequencies | 29 |
| 5.1 Test Setup | 29 |
| 5.2 Limit..... | 29 |
| 5.3 Procedure..... | 29 |
| 5.4 Test Results | 29 |
| 6. Time of Occupancy (Dwell Time)..... | 35 |
| 6.1 Test Setup | 35 |
| 6.2 Limit..... | 35 |
| 6.3 Test Procedure..... | 35 |
| 6.4 Test Results | 35 |
| 7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission | 40 |
| 7.1 Test Setup | 40 |
| 7.2 Limit..... | 40 |
| 7.3. Test Procedures..... | 42 |
| 7.3.1. Test Procedures for Radiated Spurious Emissions | 42 |
| 7.3.2. Test Procedures for Conducted Spurious Emissions..... | 43 |
| 7.4. Test Results | 44 |
| 7.4.1. Radiated Emissions..... | 44 |
| 7.4.2. Conducted Spurious Emissions | 47 |
| 8. Transmitter AC Power Line Conducted Emission | 71 |
| 8.1 Test Setup | 71 |
| 8.2 Limit..... | 71 |
| 8.3 Test Procedures..... | 71 |
| 8.4 Test Results | 72 |
| 9. Antenna Requirement | 74 |
| APPENDIX I | 75 |
| APPENDIX II | 76 |

1. General Information

1.1 Explanations for Reference Test Data

1.1.1 Introduction

This report includes the Bluetooth test data of FCC ID: V2X-PM30 / IC: 10664A-PM30 with reference to KDB 484596 D01v01. The applicant takes full responsibility that the test data as reference section below represents compliance for FCC ID: V2X-PM30W / IC: 10664A-PM30W.

| Reference FCC ID / IC | Exhibit type | Separated FCC ID / IC |
|---------------------------------------|--|---|
| FCC ID: V2X-PM30 / IC: 10664A-PM30 | Original Grant / New Single Certification | FCC ID: V2X-PM30W / IC: 10664A-PM30W |

1.1.2 Explain the Differences

FCC ID: V2X-PM30W / IC: 10664A-PM30W is same the internal printed circuit board with FCC ID: V2X-PM30 / IC: 10664A-PM30. For FCC ID: V2X-PM30W / IC: 10664-PM30W, WWAN transmitter has been removed. (It does not changed the SW/HW component of Bluetooth.)

1.1.3 Spot Check Verification Data

| Equipment Class (capability) | FCC Part/ RSS Std. | Mode | TX Freq. (MHz) | Test item | Detector Mode | Reference FCC ID: V2X-PM30 / IC: 10664A-PM30 | | Separated FCC ID: V2X-PM30W / IC: 10664A-PM30W | | Limit (dBuV/m) | Deviation (dB) |
|------------------------------|--------------------|-------|----------------|----------------------------|---------------|--|-----------------|--|-----------------|----------------|----------------|
| | | | | | | Frequency (MHz) | Result (dBuV/m) | Frequency (MHz) | Result (dBuV/m) | | |
| DSS (Bluetooth) | 15.247 / RSS-247 | 3Mbps | 2 480 | Radiated Band edge | Peak | 2 483.61 | 56.10 | 2 483.94 | 55.84 | 74.00 | -0.26 |
| | | 3Mbps | 2 480 | Radiated Spurious emission | Peak | 4 959.78 | 53.06 | 4 960.05 | 53.06 | 74.00 | 0.00 |

Note1: The spot check were performed based on worst-case results reported in the original test report.

The spot check test results are within 3dB and two products shows a good correlation. It also complies with the FCC limit.

1.1.4 Reference Section

Reference FCC ID: V2X-PM30 / IC: 10664A-PM30

| Equipment Class | FCC Part/ RSS Std. | Capability | Band(MHz) | Exhibit type | Report title | Reference Sections |
|-----------------|--------------------|------------|---------------|---|--------------|--------------------|
| DSS | 15.247 / RSS-247 | Bluetooth | 2 402 ~ 2 480 | Original Grant/ New Single Certification | DSS | All |

1.2 Testing Laboratory

| | | |
|---|---|------------------|
| DT&C Co., Ltd. | | |
| The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014. | | |
| - FCC & IC MRA Designation No. : KR0034 | | |
| - ISED#: 5740A | | |
| www.dtnet.net | | |
| Telephone | : | + 82-31-321-2664 |
| FAX | : | + 82-31-321-1664 |

1.3 Testing Environment

| Ambient Condition | |
|---------------------|-----------------|
| ▪ Temperature | +20 °C ~ +26 °C |
| ▪ Relative Humidity | +35 % ~ +44 % |

1.4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

| Test items | Measurement uncertainty |
|--|---|
| Antenna-port conducted emission | 0.9 dB (The confidence level is about 95 %, $k = 2$) |
| AC conducted emission | 3.6 dB (The confidence level is about 95 %, $k = 2$) |
| Radiated spurious emission (1 GHz Below) | 4.9 dB (The confidence level is about 95 %, $k = 2$) |
| Radiated spurious emission (1 GHz ~ 18 GHz) | 5.0 dB (The confidence level is about 95 %, $k = 2$) |
| Radiated spurious emission (18 GHz Above) | 5.3 dB (The confidence level is about 95 %, $k = 2$) |

1.5 Details of Applicant

| | |
|----------------------------|--|
| Applicant Name(FCC) | Point Mobile Co., LTD |
| Applicant Name(IC) | POINTMOBILE CO.,LTD |
| Address (FCC) | B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709 |
| Address (IC) | B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of) |

1.6 Description of EUT

| | |
|---|--|
| Equipment Class | Digital Transmission System (DTS) |
| Product Name | Mobile Computer |
| Model Name | PM30W |
| Add Model Name | - |
| Firmware Version Identification Number | 30.00xx |
| EUT Serial Number (Reference product) <small>Note1</small> | Conducted : 2034310066 Radiated: 2033910156 |
| EUT Serial Number (Separated product) <small>Note2</small> | Conducted : 2034310069 Radiated: 2034010538 |
| Power Supply | DC 3.85 V |
| Frequency Range | 2 402 MHz ~ 2 480 MHz |
| Max. RF Output Power | 8.07 dBm (0.006 W) |
| Modulation Technique (Data rate) | GFSK(1 Mbps), π /4DQPSK(2 Mbps), 8DPSK(3 Mbps) |
| Number of Channels | 79 |
| Antenna Specification | Antenna Type: LDS Antenna Gain: 1.49 dBi (PK) |

Note1: Reference FCC ID: V2X-PM30 / IC: 10664A-PM30

Note2: Separated FCC ID: V2X-PM30W / IC: 10664A-PM30W

1.7 Declaration by the applicant / manufacturer

- NA

1.8 Information about the FHSS characteristics

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following :

A) The hopping sequence is pseudorandom

Note 1 : Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 42, 54, 72, 09, 01, 11, 33, 41, 34, 42, 65, 73, 53, 69, 06, 22, 04, 20,
36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 41, 58, 44, 60, 76, 13, 03, 11, 35, 43,
37, 45, 69, 77, 52, 71, 08, 24, 06, 24, 48, 56, 45, 46, 70, 01, 72, 06, 25, 33, 12, 28,
49, 60, 45, 58, 74, 13, 05, 18, 37, 49 etc

The System receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchroniztation with the transmitted signals.

B) All channels are used equally on average

C) The receiver input bandwidth equals the transmit bandwidth

D) The receiver hops in sequence with the transmit signal

- 15.247(g) : In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h) : In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection / hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h) : The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

1.9 Test Equipment List

| Type | Manufacturer | Model | Cal.Date (yy/mm/dd) | Next.Cal.Date (yy/mm/dd) | S/N |
|-------------------------------------|------------------------|-------------------------------|------------------------|-----------------------------|--------------------|
| Spectrum Analyzer | Agilent Technologies | N9020A | 20/06/24 | 21/06/24 | MY50410163 |
| Spectrum Analyzer | Agilent Technologies | N9020A | 20/12/16 | 21/12/16 | MY48011700 |
| Spectrum Analyzer | Agilent Technologies | N9020A | 20/06/24 | 21/06/24 | US47360812 |
| DC Power Supply | Agilent Technologies | 66332A | 20/06/24 | 21/06/24 | MY43000211 |
| Multimeter | FLUKE | 17B+ | 20/12/16 | 21/12/16 | 3630701WS |
| Signal Generator | Rohde Schwarz | SMBV100A | 20/12/16 | 21/12/16 | 255571 |
| Signal Generator | ANRITSU | MG3695C | 20/12/16 | 21/12/16 | 173501 |
| Thermohyrometer | BODYCOM | BJ5478 | 20/12/16 | 21/12/16 | 120612-1 |
| Thermohyrometer | BODYCOM | BJ5478 | 20/12/16 | 21/12/16 | 120612-2 |
| Thermohyrometer | BODYCOM | BJ5478 | 20/07/01 | 21/07/01 | N/A |
| BlueTooth Tester | Tescom | TC-3000C | 20/06/24 | 21/06/24 | 3000C000563 |
| Power Divider | Anritsu | K240B | 20/06/24 | 21/06/24 | 1701099 |
| Loop Antenna | ETS-Lindgren | 6502 | 21/01/28 | 23/01/28 | 00226186 |
| BILOG ANTENNA | Schwarzbeck | VULB 9160 | 20/12/16 | 21/12/16 | 3362 |
| Horn Antenna | ETS-Lindgren | 3117 | 20/10/23 | 21/10/23 | 00143278 |
| Horn Antenna | A.H.Systems Inc. | SAS-574 | 20/06/24 | 21/06/24 | 155 |
| PreAmplifier | tsj | MLA-0118-B01-40 | 20/12/16 | 21/12/16 | 1852267 |
| PreAmplifier | tsj | MLA-1840-J02-45 | 20/06/24 | 21/06/24 | 16966-10728 |
| PreAmplifier | H.P | 8447D | 20/12/16 | 21/12/16 | 2944A07774 |
| High Pass Filter | Wainwright Instruments | WHKX12-935-1000-15000-40SS | 20/06/24 | 21/06/24 | 8 |
| High Pass Filter | Wainwright Instruments | WHKX10-2838-3300-18000-60SS | 20/06/24 | 21/06/24 | 1 |
| High Pass Filter | Wainwright Instruments | WHNX8.0/26.5-6SS | 20/06/24 | 21/06/24 | 3 |
| Attenuator | Hefei Shunze | SS5T2.92-10-40 | 20/06/24 | 21/06/24 | 16012202 |
| Attenuator | SRTechnology | F01-B0606-01 | 20/06/24 | 21/06/24 | 13092403 |
| Attenuator | Aeroflex/Weinschel | 56-3 | 20/06/24 | 21/06/24 | Y2370 |
| Attenuator | SMAJK | SMAJK-2-3 | 20/06/24 | 21/06/24 | 2 |
| Power Meter & Wide Bandwidth Sensor | Anritsu | ML2495A MA2490A | 20/06/24 | 21/06/24 | 1306007 1249001 |
| EMI Receiver | ROHDE&SCHWARZ | ESU | 20/11/16 | 21/11/16 | 100469 |
| PULSE LIMITER | Rohde Schwarz | ESH3-Z2 | 20/08/25 | 21/08/25 | 101333 |
| LISN | SCHWARZBECK | NSLK 8128 RC | 20/10/23 | 21/10/23 | 8128 RC-387 |
| HYGROMETER | TESTO | 608-H1 | 21/01/19 | 22/01/19 | 34862883 |
| Cable | DT&C | Cable | 21/01/08 | 22/01/08 | G-1 |
| Cable | DT&C | Cable | 21/01/08 | 22/01/08 | G-2 |
| Cable | HUBER+SUHNER | SUCOFLEX 100 | 21/01/08 | 22/01/08 | G-3 |
| Cable | DT&C | Cable | 21/01/08 | 22/01/08 | G-4 |
| Cable | Junkosha | MWX241 | 21/01/08 | 22/01/08 | mmW-1 |
| Cable | Junkosha | MWX241 | 21/01/08 | 22/01/08 | mmW-4 |
| Cable | HUBER+SUHNER | SUCOFLEX100 | 21/01/08 | 22/01/08 | M-01 |
| Cable | HUBER+SUHNER | SUCOFLEX100 | 21/01/08 | 22/01/08 | M-02 |
| Cable | JUNFLON | MWX241 | 21/01/08 | 22/01/08 | M-03 |
| Cable | JUNFLON | J12J101757-00 | 21/01/08 | 22/01/08 | M-07 |
| Cable | HUBER+SUHNER | SUCOFLEX106 | 21/01/08 | 22/01/08 | M-09 |
| Cable | DT&C | Cable | 21/01/05 | 22/01/05 | RFC-69 |
| Test Software | tsj | Radiated Emission Measurement | NA | NA | Version 2.00.0177 |
| Test Software | tsj | Noise Terminal Measurement | NA | NA | Version 2.00.0170 |

Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

1.10 Summary of Test Results

| FCC Part RSS Std. | Parameter | Limit (Using in 2400~ 2483.5 MHz) | Test Condition | Status Note 1 |
|--|-------------------------------|---|----------------------|----------------------|
| 15.247(a) RSS-247(5.1) | Carrier Frequency Separation | >= 25 kHz or >= Two thirds of the 20 dB BW, whichever is greater. | Conducted | C |
| | Number of Hopping Frequencies | >= 15 hops | | C |
| | 20 dB Bandwidth | N/A | | C |
| | Dwell Time | =< 0.4 seconds | | C |
| 15.247(b) RSS-247(5.4) | Transmitter Output Power | For FCC =< 1 Watt , if CHs >= 75 Others =< 0.125 W For IC if CHs >= 75 =< 1 Watt For Conducted Power =< 4 Watt For e.i.r.p, Others =< 0.125 W For Conducted Power. =< 4 Watt For e.i.r.p | | C |
| 15.247(d) RSS-247(5.5) | Conducted Spurious Emissions | The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density. | C | |
| RSS Gen(6.7) | Occupied Bandwidth (99 %) | N/A | C | |
| 15.247(d) 15.205 & 209 RSS-247(5.5) RSS-Gen (8.9 & 8.10) | Radiated Spurious Emissions | FCC 15.209 Limits (Refer to section 7) | Radiated | C ^{Note3,4} |
| 15.207 RSS-Gen(8.8) | AC Conducted Emissions | FCC 15.207 Limits (Refer to section 8) | AC Line Conducted | C |
| 15.203 | Antenna Requirements | FCC 15.203 (Refer to section 9) | - | C |

Note 1 : **C** = Comply **NC** = Not Comply **NT** = Not Tested **NA** = Not Applicable

Note 2 : For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3 : This test item was performed in each axis and the worst case data was reported.

Note 4: This device supports wireless charging.

So per KDB648474 D03v01r0, the radiated test items were performed all not charging, charging, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

1.11 Conclusion of worst-case and operation mode

The EUT has three types of modulation (GFSK, $\pi/4$ DQPSK and 8DPSK).
 Therefore all applicable requirements were tested with all the modulations.
 And packet type was tested at the worst case(DH5).

Tested frequency information,

- Hopping Function : Enable

| | TX Frequency (MHz) | RX Frequency (MHz) |
|---------------------|--------------------|--------------------|
| Hopping Band | 2 402 ~ 2 480 | 2 402 ~ 2 480 |

- Hopping Function : Disable

| | TX Frequency (MHz) | RX Frequency (MHz) |
|------------------------|--------------------|--------------------|
| Lowest Channel | 2 402 | 2 402 |
| Middle Channel | 2 441 | 2 441 |
| Highest Channel | 2 480 | 2 480 |

Operation test setup for EUT

- Test Software Version: QRCT_V4.0-00142
- Power setting: Default of EUT

2. Maximum Peak Output Power Measurement

2.1 Test Setup

Refer to the APPENDIX I.

2.2 Limit

■ FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400 MHz -2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 MHz – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 MHz – 5 805 MHz band : 1 Watt.

For all other frequency hopping systems in the 2 400 MHz -2 483.5 MHz band: 0.125 watts.

■ IC Requirements

1. RSS-247(5.4) (b), For FHSS operating in the band 2 400 MHz – 2 483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels, the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p shall not exceed 4 W, except as provided in section 5.4(e)

2.3 Test Procedure

1. The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The peak output power of the fundamental frequency was measured with the spectrum analyzer using ;
Span = approximately 5 times of the 20 dB bandwidth, centered on a hopping channel
RBW \geq 20 dB BW
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold

2.4 Test Results


| Modulation | Tested Channel | Frame Average Output Power | | Peak Output Power | |
|---------------------------------------|----------------|----------------------------|-------------|-------------------|-------------|
| | | dBm | mW | dBm | mW |
| <u>GFSK</u> | Lowest | 5.35 | 3.43 | 6.22 | 4.19 |
| | Middle | 4.63 | 2.90 | 5.93 | 3.92 |
| | Highest | 4.61 | 2.89 | 5.86 | 3.85 |
| <u>$\pi/4$DQPSK</u> | Lowest | 5.30 | 3.39 | 7.77 | 5.98 |
| | Middle | 4.67 | 2.93 | 7.58 | 5.73 |
| | Highest | 4.66 | 2.92 | 7.33 | 5.41 |
| <u>8DPSK</u> | Lowest | 4.99 | 3.16 | 8.07 | 6.41 |
| | Middle | 4.33 | 2.71 | 7.85 | 6.10 |
| | Highest | 4.32 | 2.70 | 7.55 | 5.69 |

Note 1: The Frame average output power was tested using an average power meter for reference only.

Note 2: See next pages for actual measured spectrum plots.


Peak Output Power

Lowest Channel & Modulation : GFSK

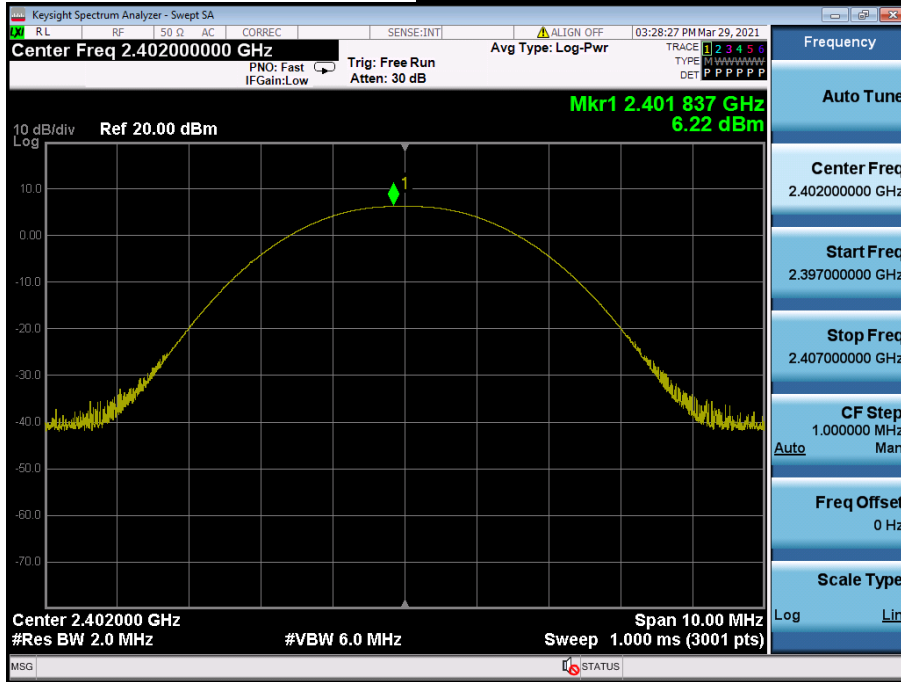


Peak Output Power

Middle Channel & Modulation : GFSK

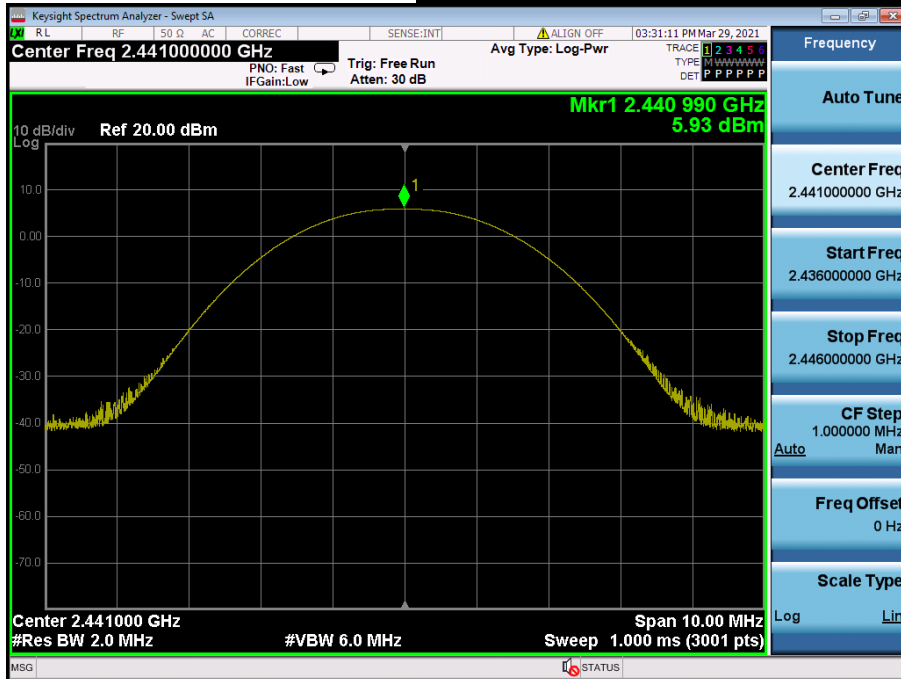


Peak Output Power

Highest Channel & Modulation : GFSK

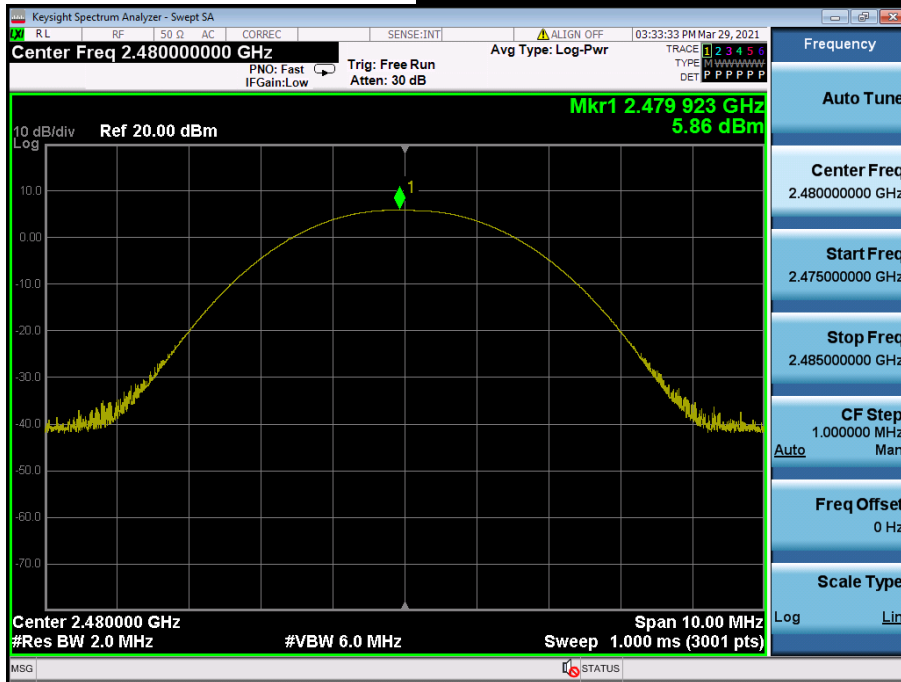


Peak Output Power

Lowest Channel & Modulation : $\pi/4$ DQPSK

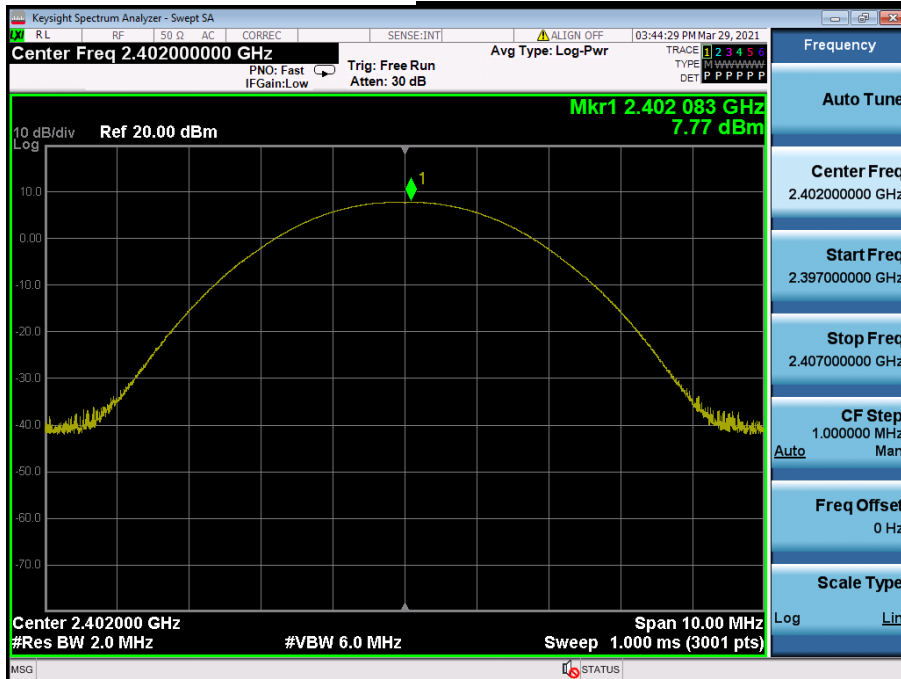


Peak Output Power

Middle Channel & Modulation : $\pi/4$ DQPSK

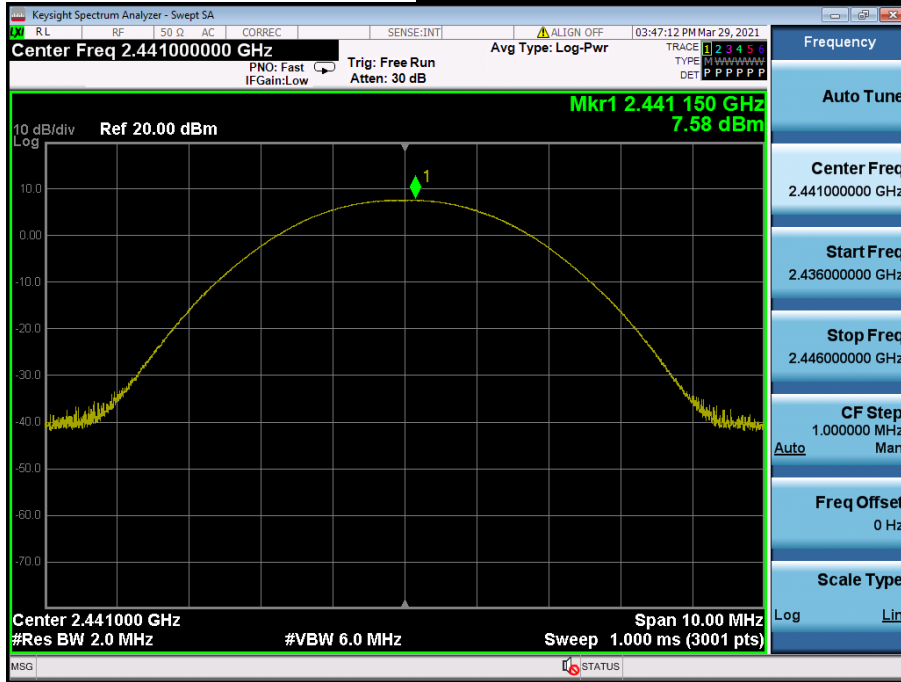


Peak Output Power

Highest Channel & Modulation : $\pi/4$ DQPSK

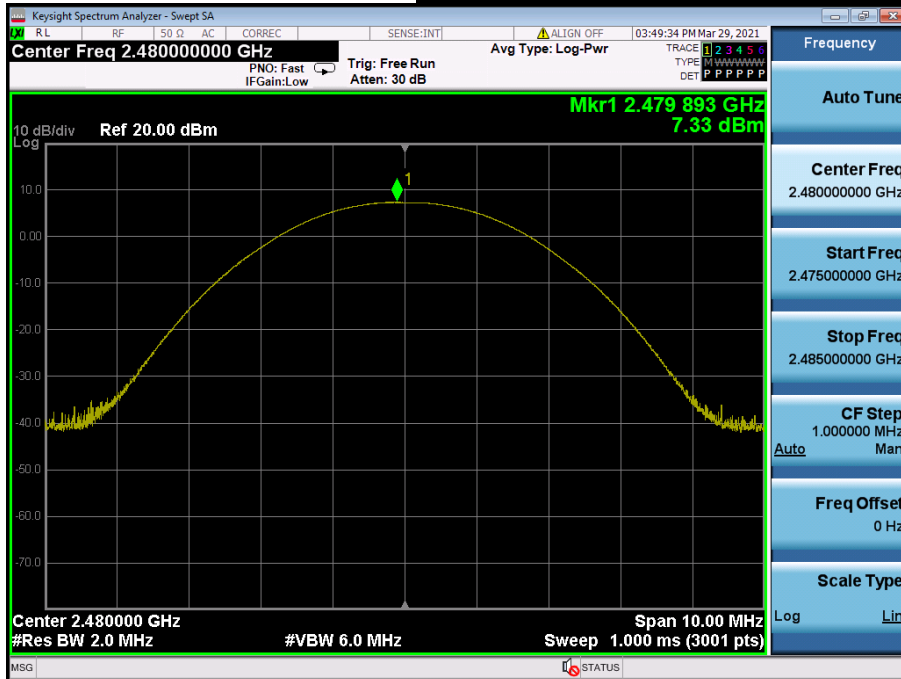


Peak Output Power

Lowest Channel & Modulation : 8DPSK

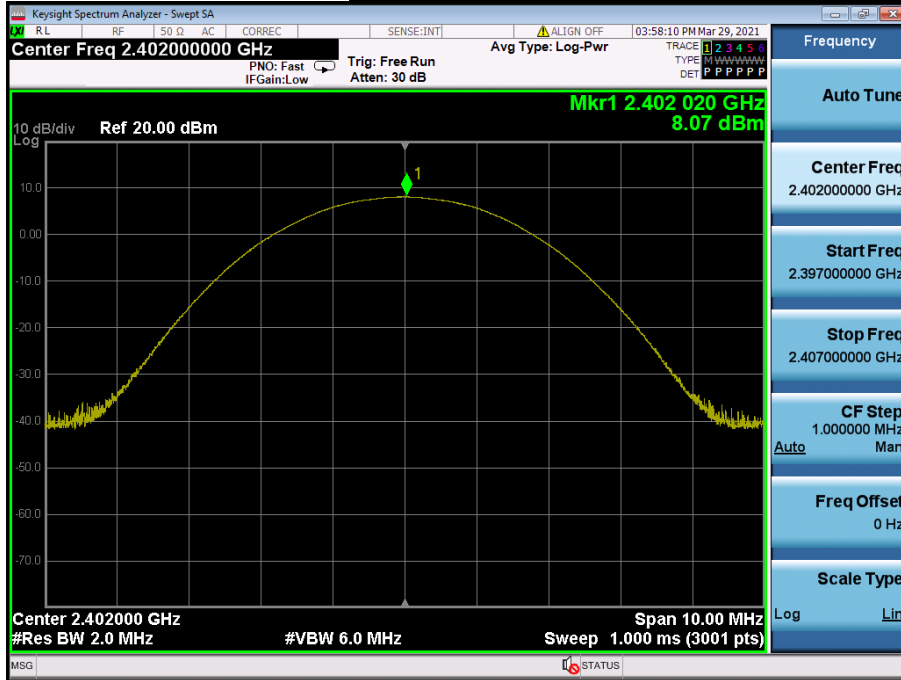


Peak Output Power

Middle Channel & Modulation : 8DPSK

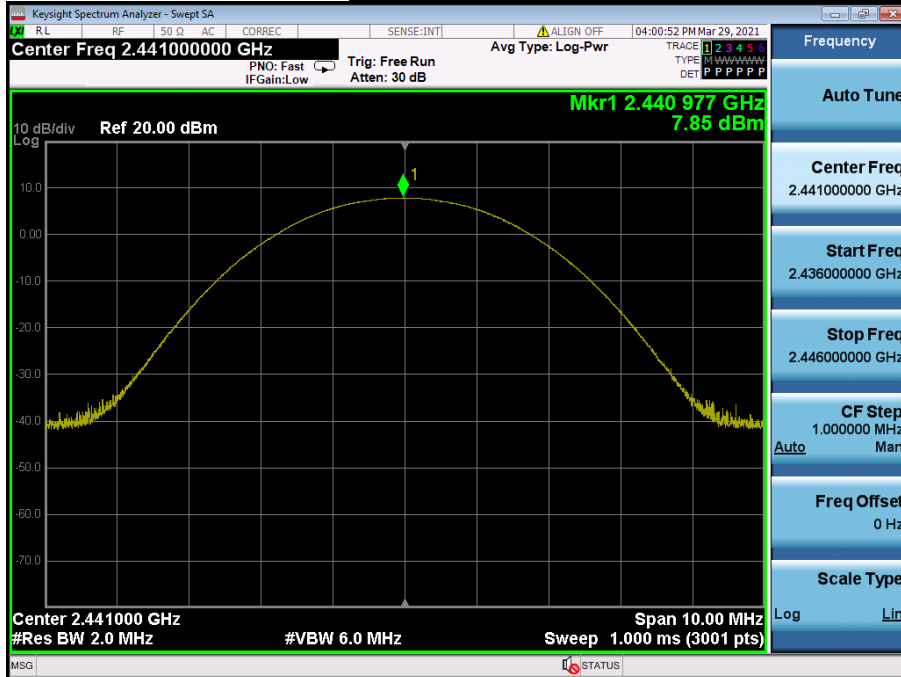

Peak Output Power

Highest Channel & Modulation : 8DPSK

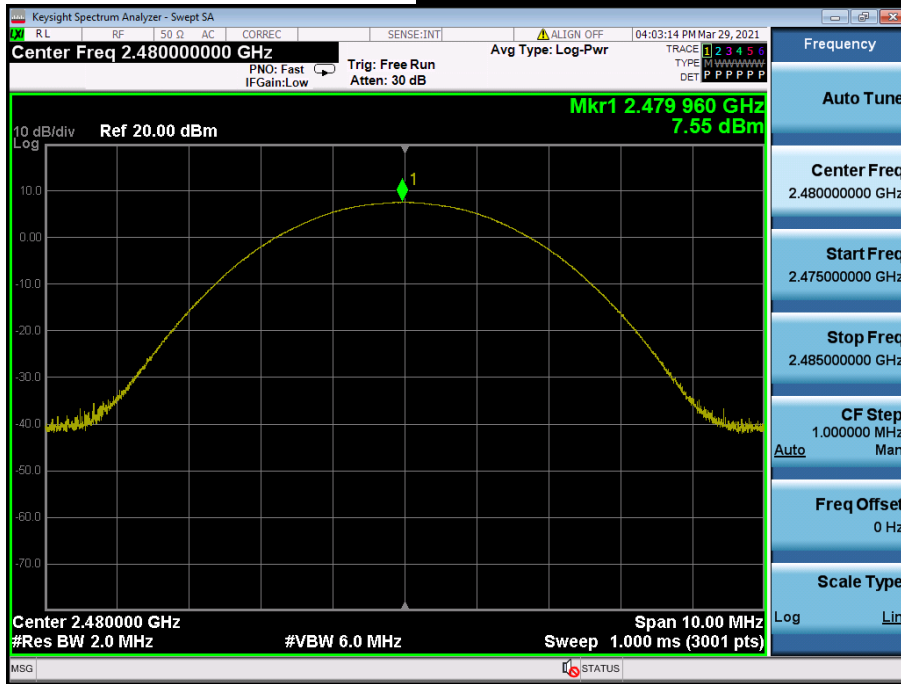

3. 20 dB BW & Occupied BW

3.1 Test Setup

Refer to the APPENDIX I.

3.2 Limit

Limit : Not Applicable

3.3 Test Procedure


1. The 20 dB bandwidth & Occupied bandwidth were measured with a spectrum analyzer connected to RF antenna Connector(conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting:
 - RBW = 1 % to 5 % of the 20 dB BW & Occupied BW
 - VBW $\geq 3 \times$ RBW
 - Span = between two times and five times the 20 dB bandwidth & Occupied BW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

3.4 Test Results

| Modulation | Tested Channel | 20 dB BW (MHz) | Occupied BW (MHz) |
|---------------------------------------|----------------|----------------|-------------------|
| <u>GFSK</u> | Lowest | 0.885 | 0.828 |
| | Middle | 0.884 | 0.830 |
| | Highest | 0.884 | 0.828 |
| <u>$\pi/4$DQPSK</u> | Lowest | 1.320 | 1.175 |
| | Middle | 1.321 | 1.173 |
| | Highest | 1.320 | 1.177 |
| <u>8DPSK</u> | Lowest | 1.291 | 1.183 |
| | Middle | 1.293 | 1.180 |
| | Highest | 1.291 | 1.187 |

20 dB BW & Occupied BW

Lowest Channel & Modulation : GFSK

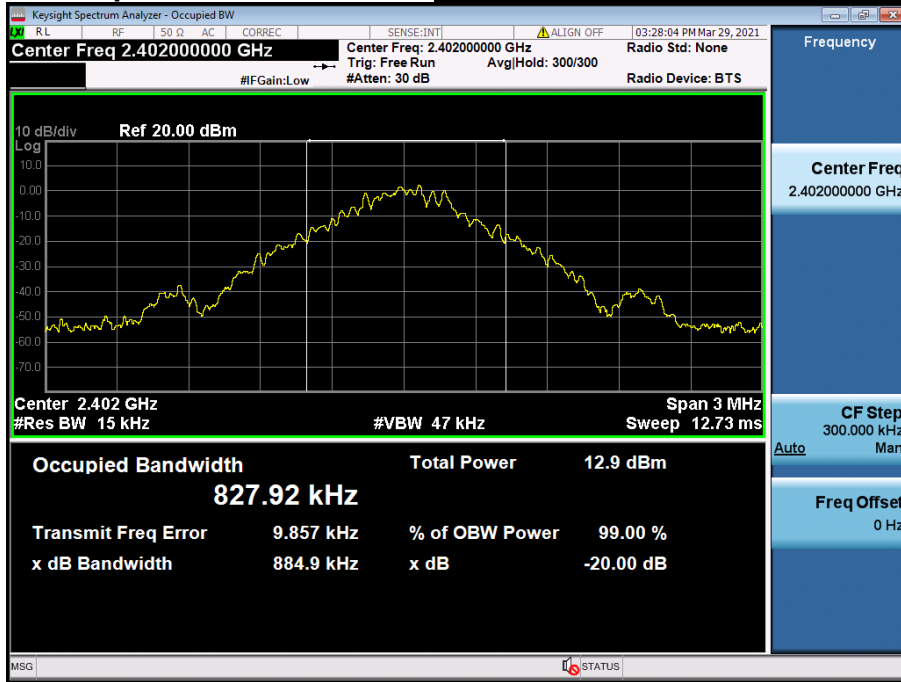


20 dB BW & Occupied BW

Middle Channel & Modulation : GFSK




20 dB BW & Occupied BW

Highest Channel & Modulation : GFSK

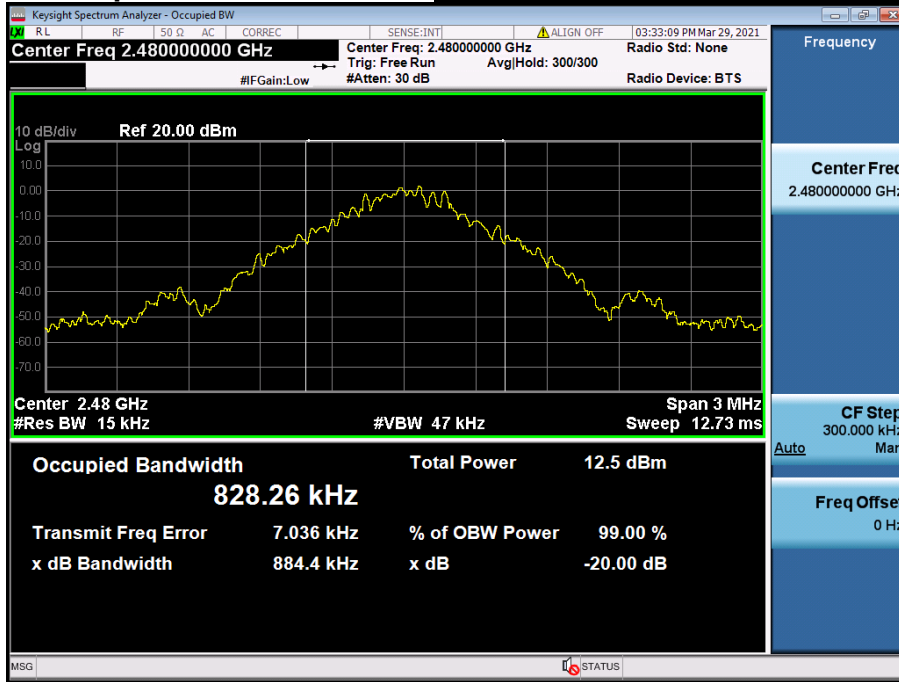


20 dB BW & Occupied BW

Lowest Channel & Modulation : $\pi/4$ QPSK

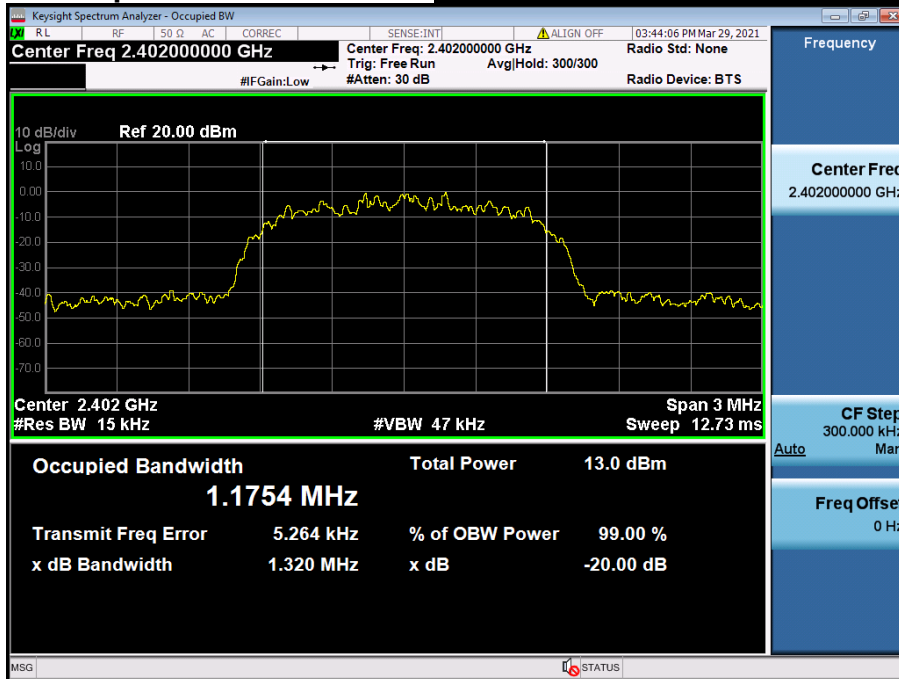


20 dB BW & Occupied BW

Middle Channel & Modulation : $\pi/4$ DQPSK

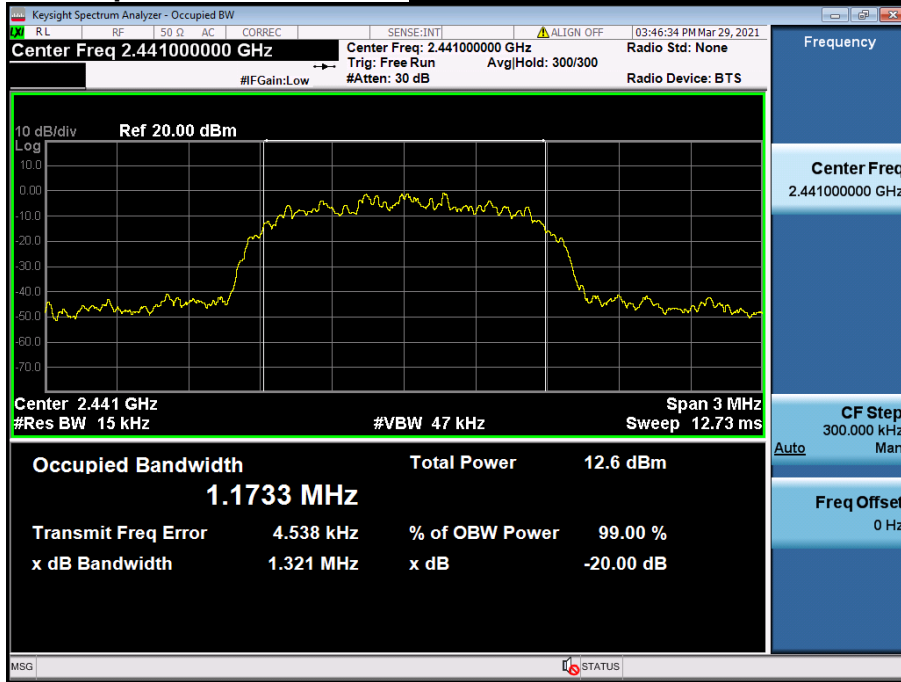


20 dB BW & Occupied BW

Highest Channel & Modulation : $\pi/4$ DQPSK

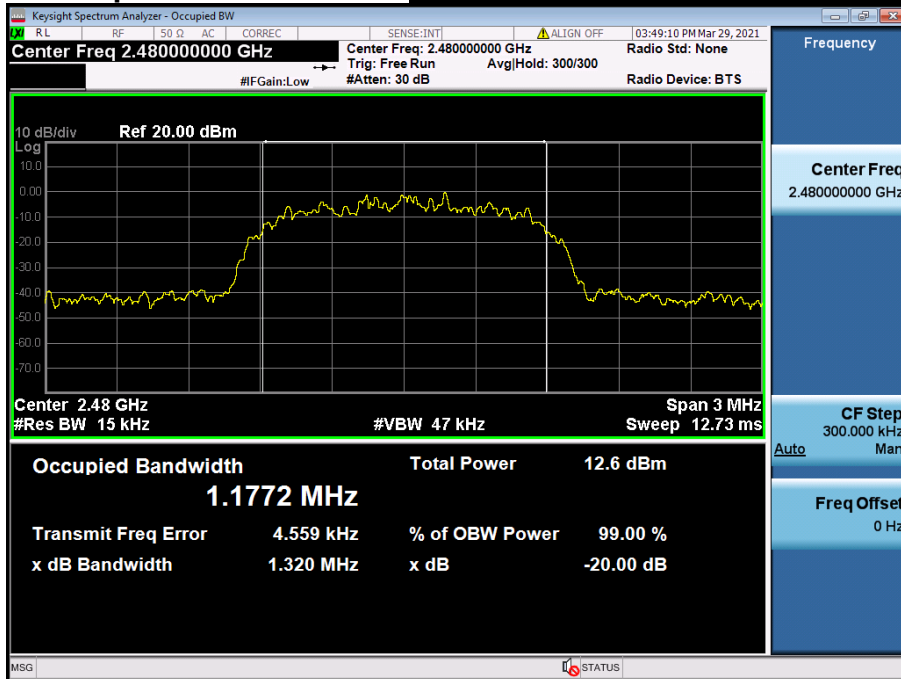


20 dB BW & Occupied BW

Lowest Channel & Modulation : 8DPSK

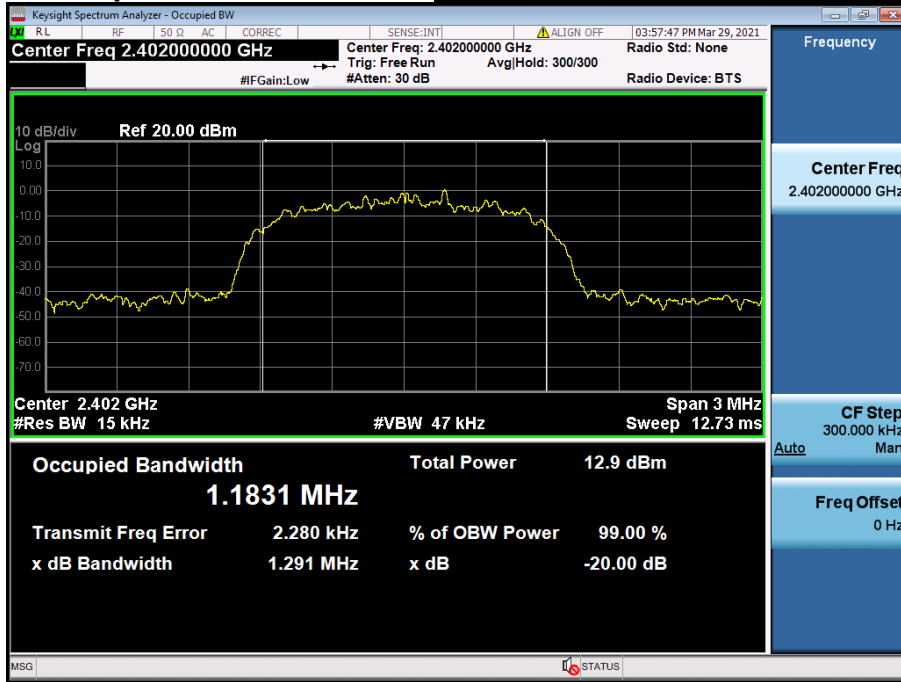


20 dB BW & Occupied BW

Middle Channel & Modulation : 8DPSK

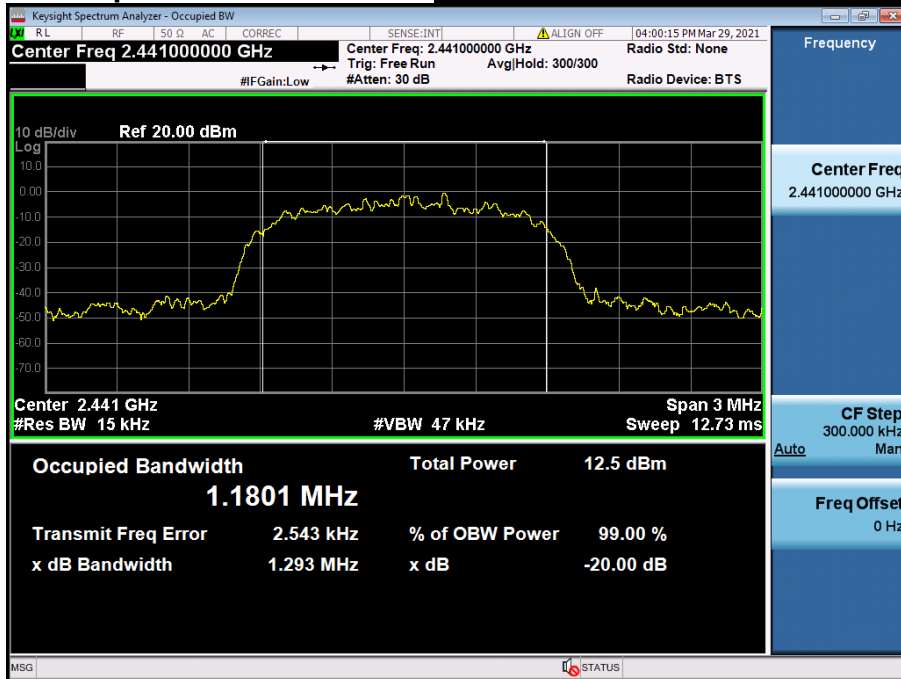

20 dB BW & Occupied BW

Highest Channel & Modulation : 8DPSK

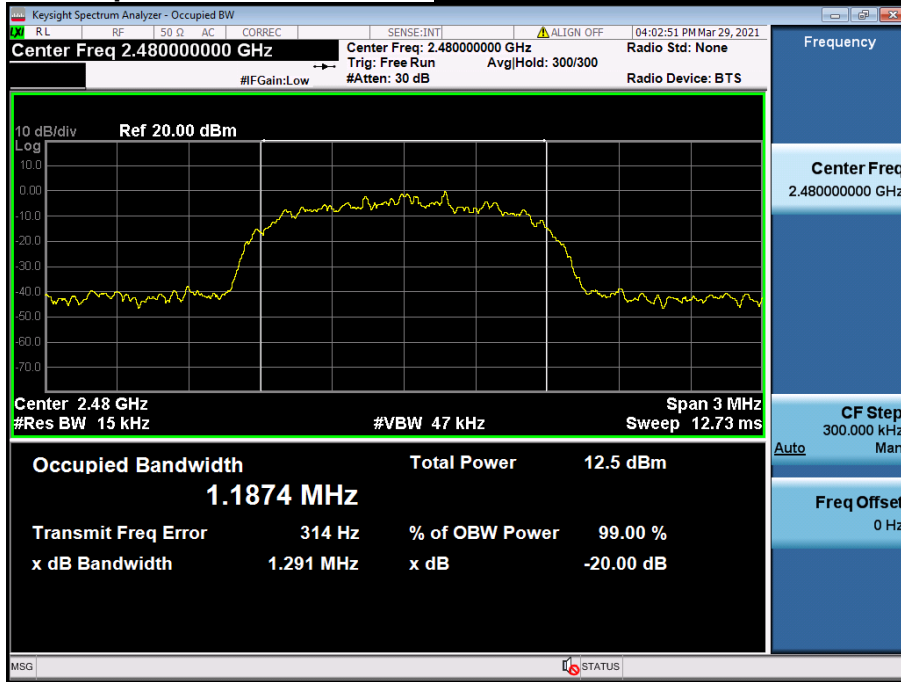

4. Carrier Frequency Separation

4.1 Test Setup

Refer to the APPENDIX I.

4.2 Limit

Limit : ≥ 25 kHz or \geq Two-Thirds of the 20 dB BW whichever is greater.

4.3 Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

4.4 Test Results

FH mode

| Hopping Mode | Modulation | Peak of center channel (MHz) | Peak of adjacent Channel (MHz) | Test Result (MHz) |
|--------------|---------------|------------------------------|--------------------------------|-------------------|
| Enable | GFSK | 2 441.004 | 2 442.006 | 1.002 |
| | $\pi/4$ DQPSK | 2 441.005 | 2 442.007 | 1.002 |
| | 8DPSK | 2 441.006 | 2 442.004 | 0.998 |

AFH mode


| Hopping Mode | Modulation | Peak of center channel (MHz) | Peak of adjacent Channel (MHz) | Test Result (MHz) |
|--------------|---------------|------------------------------|--------------------------------|-------------------|
| Enable | GFSK | 2 441.008 | 2 442.005 | 0.997 |
| | $\pi/4$ DQPSK | 2 441.001 | 2 442.000 | 0.999 |
| | 8DPSK | 2 441.004 | 2 442.004 | 1.000 |

Note 1 : See next pages for actual measured spectrum


- Minimum Standard :

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400 MHz - 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


Carrier Frequency Separation (FH) *Hopping mode : Enable & GFSK*

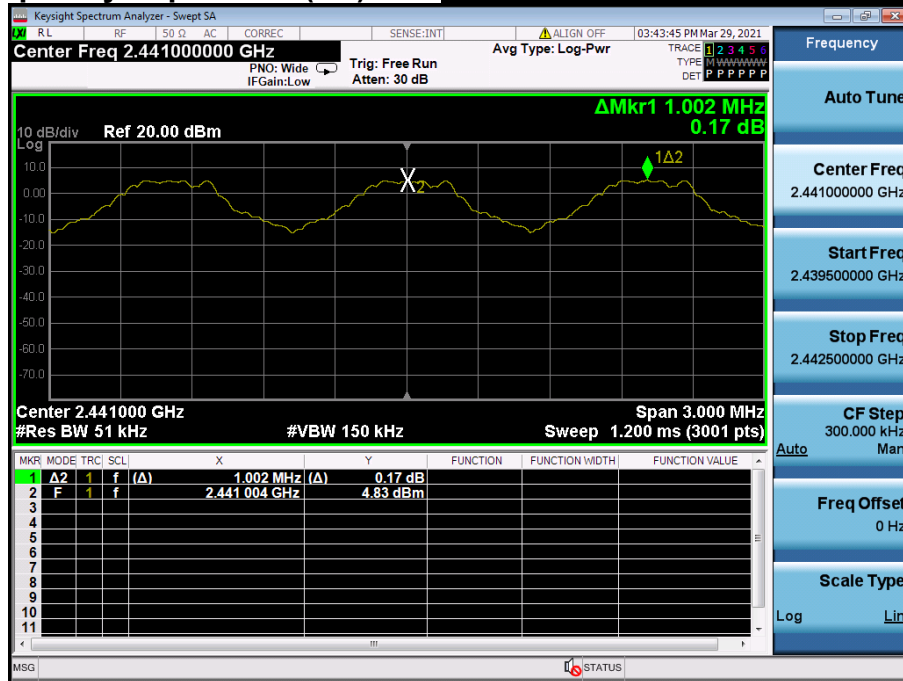


Carrier Frequency Separation (FH) *Hopping mode : Enable & π/4DQPSK*

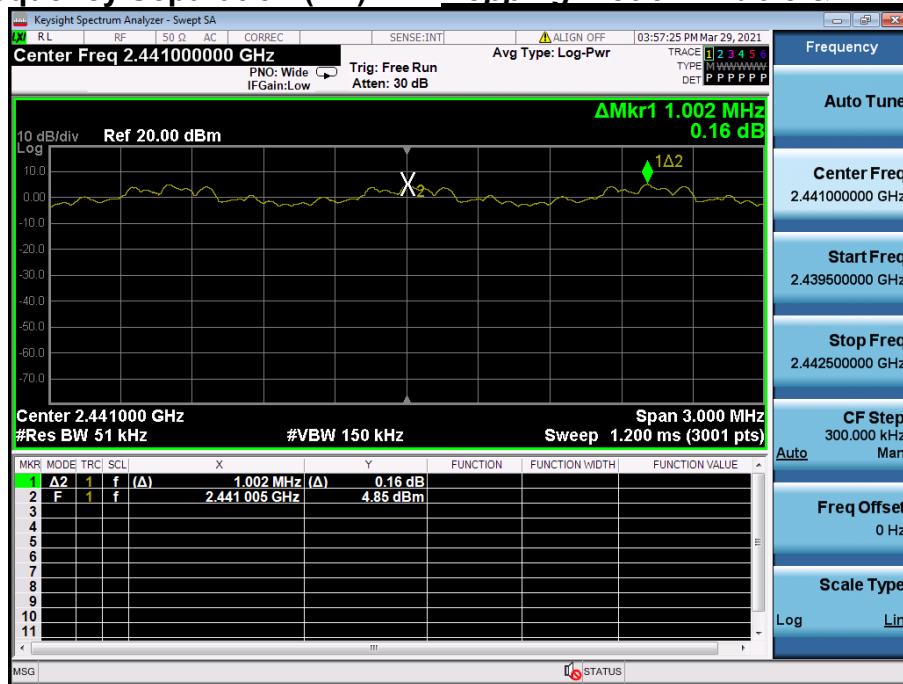


Carrier Frequency Separation (FH) *Hopping mode : Enable & 8DPSK*

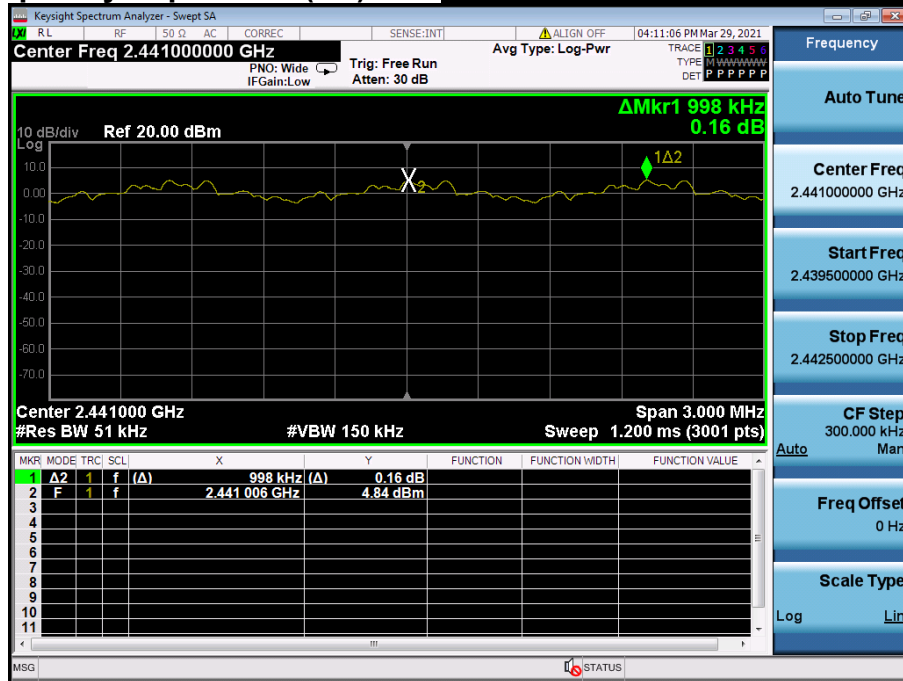


Carrier Frequency Separation (AFH) *Hopping mode : Enable & GFSK*

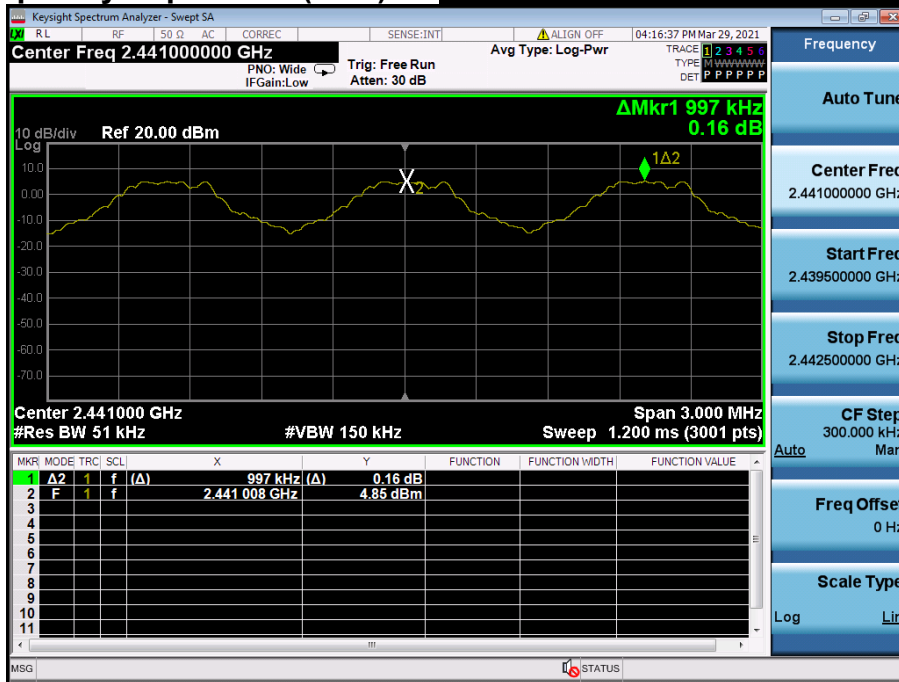

Carrier Frequency Separation (AFH) *Hopping mode : Enable & π/4DQPSK*

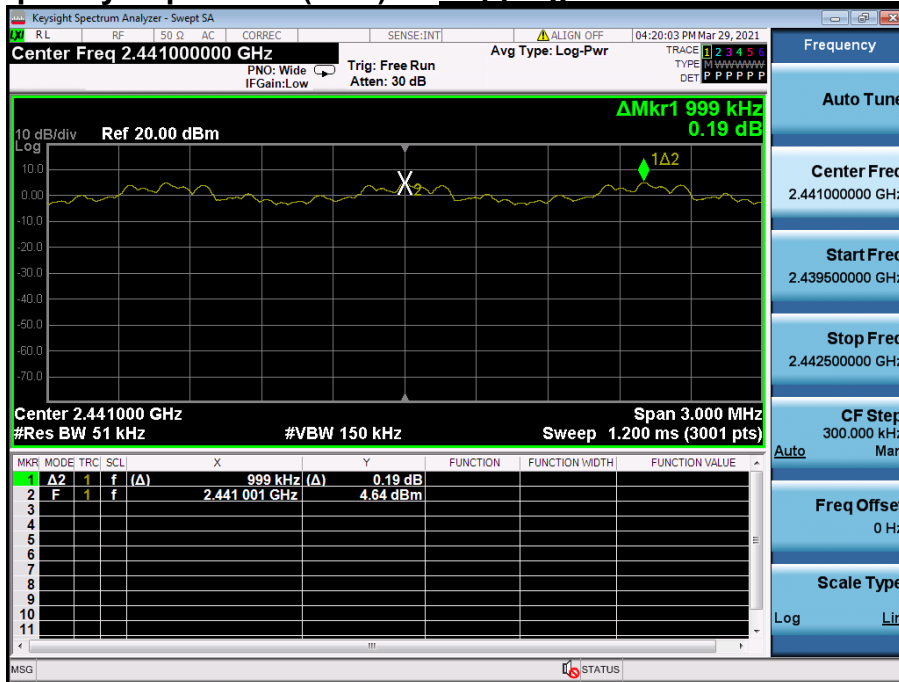

Carrier Frequency Separation (AFH) *Hopping mode : Enable & 8DPSK*

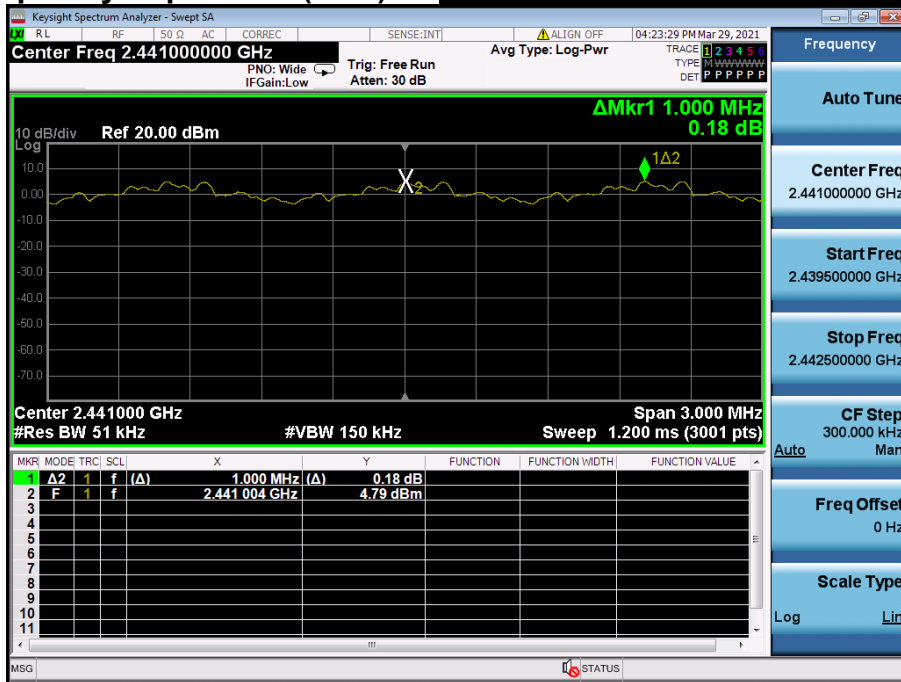

5. Number of Hopping Frequencies

5.1 Test Setup

Refer to the APPENDIX I.

5.2 Limit

Limit : ≥ 15 hops

5.3 Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 2 400 MHz ~ 2 483.5 MHz were examined.

The spectrum analyzer is set to :

Span for FH mode = 50 MHz Start Frequency = 2 391.5 MHz, Stop Frequency = 2 441.5 MHz

Start Frequency = 2 441.5 MHz, Stop Frequency = 2 491.5 MHz

Span for AFH mode = 30 MHz Start Frequency = 2 426.0 MHz, Stop Frequency = 2 456.0 MHz

RBW = To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW Sweep = auto

Detector function = peak Trace = max hold

5.4 Test Results

FH mode


| Hopping mode | Modulation | Test Result (Total Hops) |
|--------------|---------------|--------------------------|
| Enable | GFSK | 79 |
| | $\pi/4$ DQPSK | 79 |
| | 8DPSK | 79 |

AFH mode


| Hopping mode | Modulation | Test Result (Total Hops) |
|--------------|---------------|--------------------------|
| Enable | GFSK | 20 |
| | $\pi/4$ DQPSK | 20 |
| | 8DPSK | 20 |

Note 1 : See next pages for actual measured spectrum plots.


Number of Hopping Frequencies 1(FH) Hopping mode : Enable & GFSK

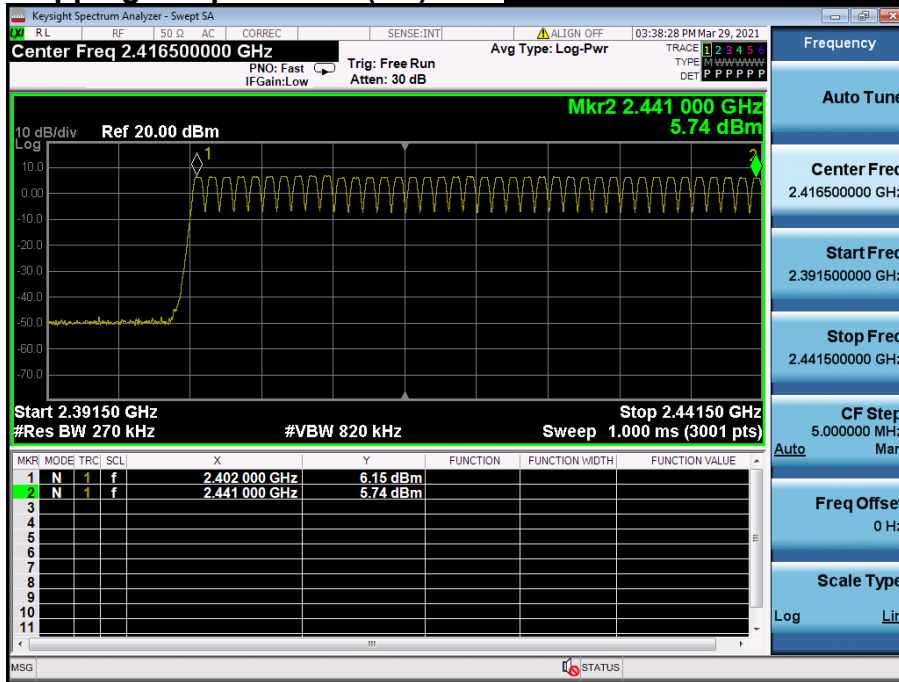


Number of Hopping Frequencies 2(FH) Hopping mode : Enable & GFSK

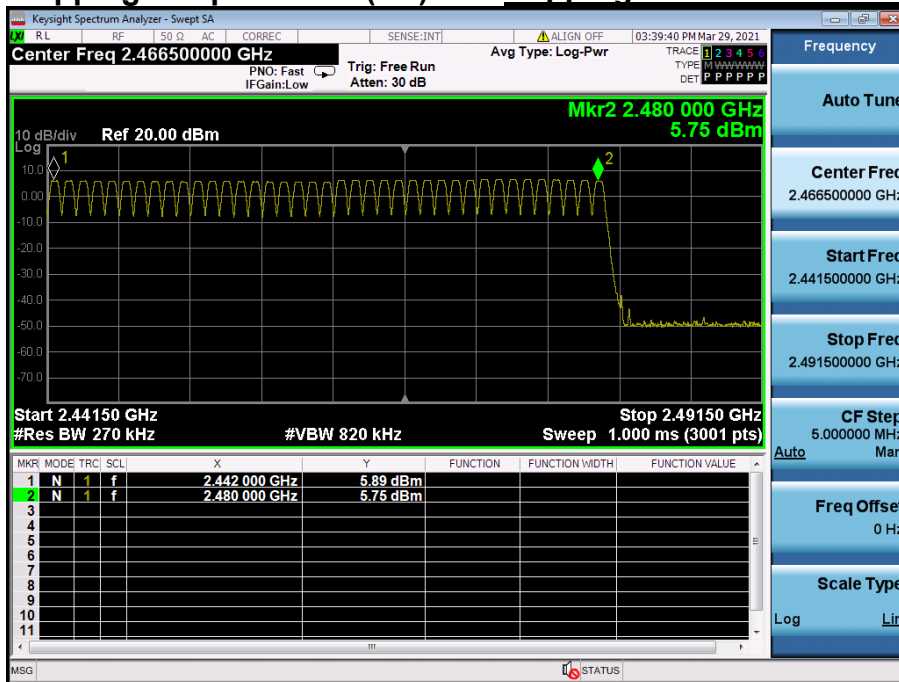


Number of Hopping Frequencies 1(FH) *Hopping mode : Enable & $\pi/4$ DQPSK*

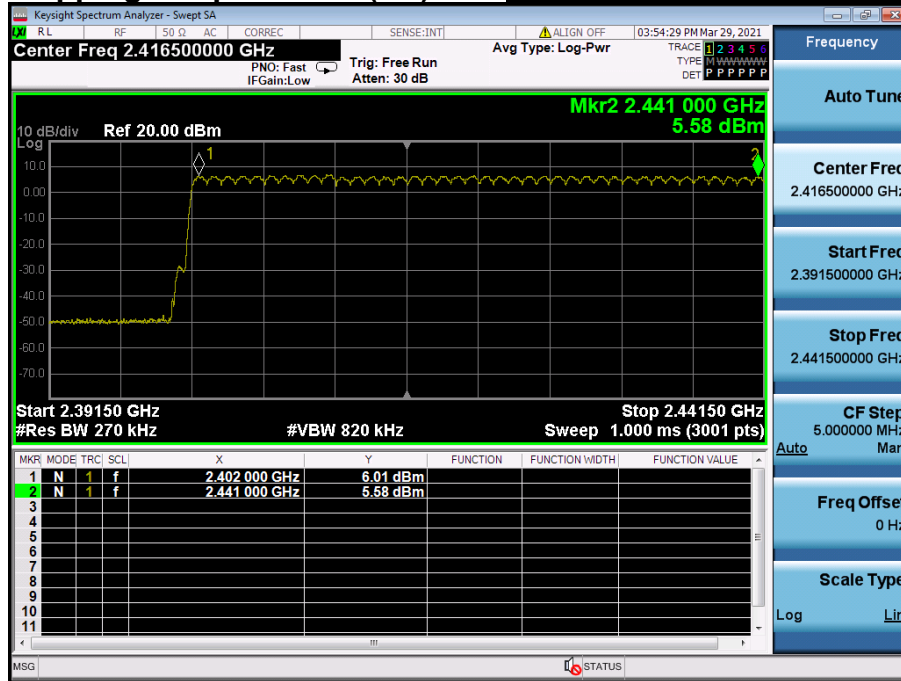


Number of Hopping Frequencies 2(FH) *Hopping mode : Enable & $\pi/4$ DQPSK*

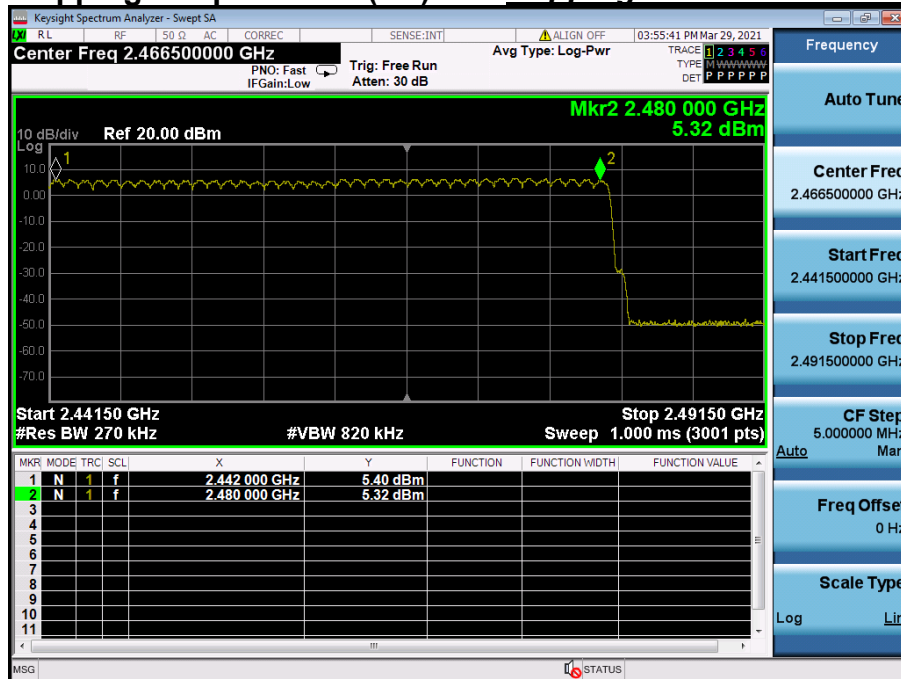


Number of Hopping Frequencies 1(FH) Hopping mode : Enable & 8DPSK

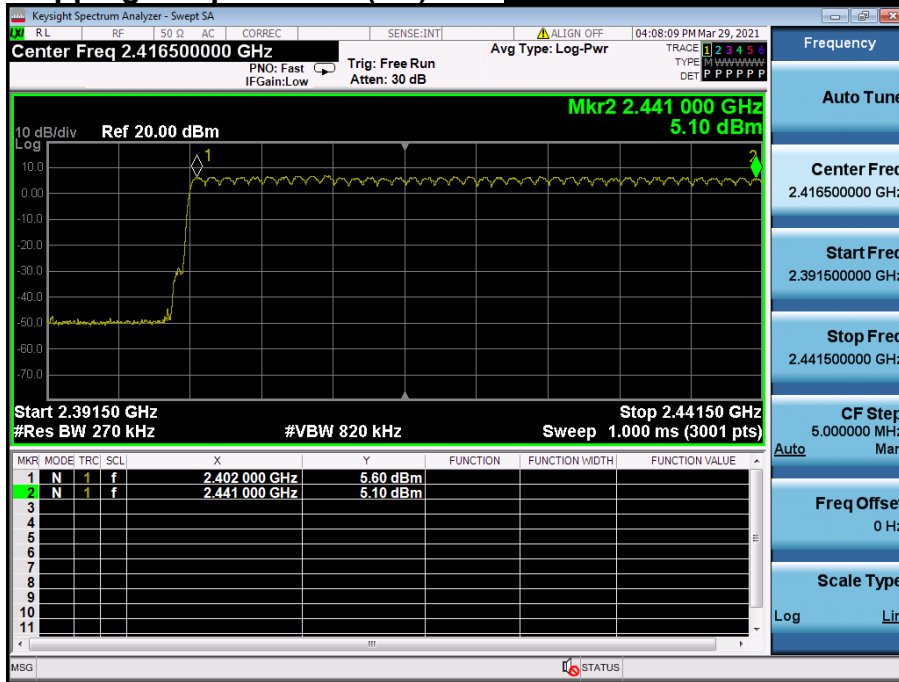


Number of Hopping Frequencies 2(FH) Hopping mode : Enable & 8DPSK

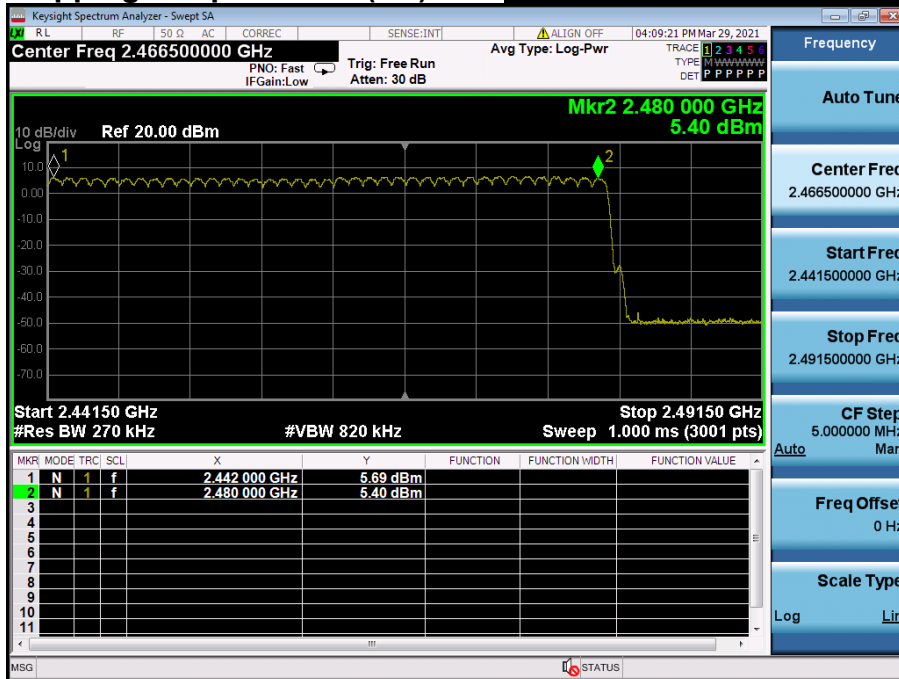


Number of Hopping Frequencies 1(AFH) *Hopping mode : Enable & GFSK*

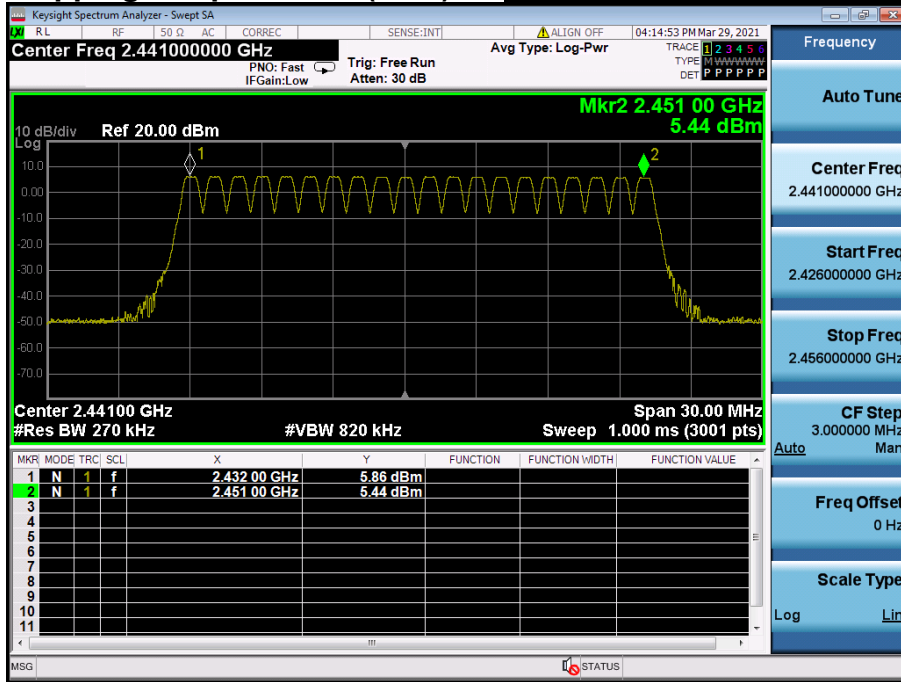

Number of Hopping Frequencies 1(AFH) *Hopping mode : Enable & π/4DQPSK*

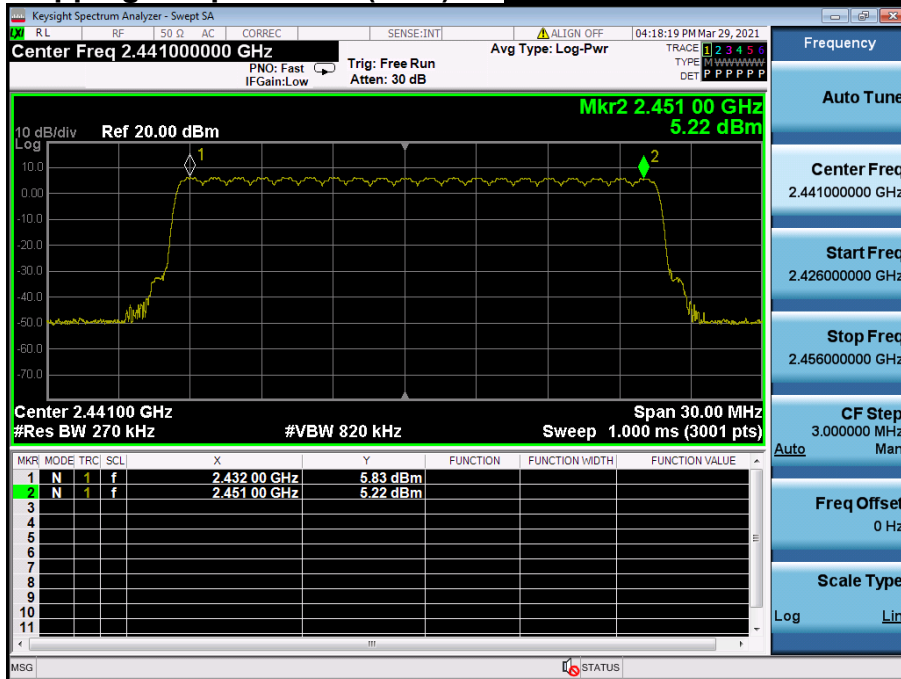

Number of Hopping Frequencies 1(AFH) **Hopping mode : Enable & 8DPSK**

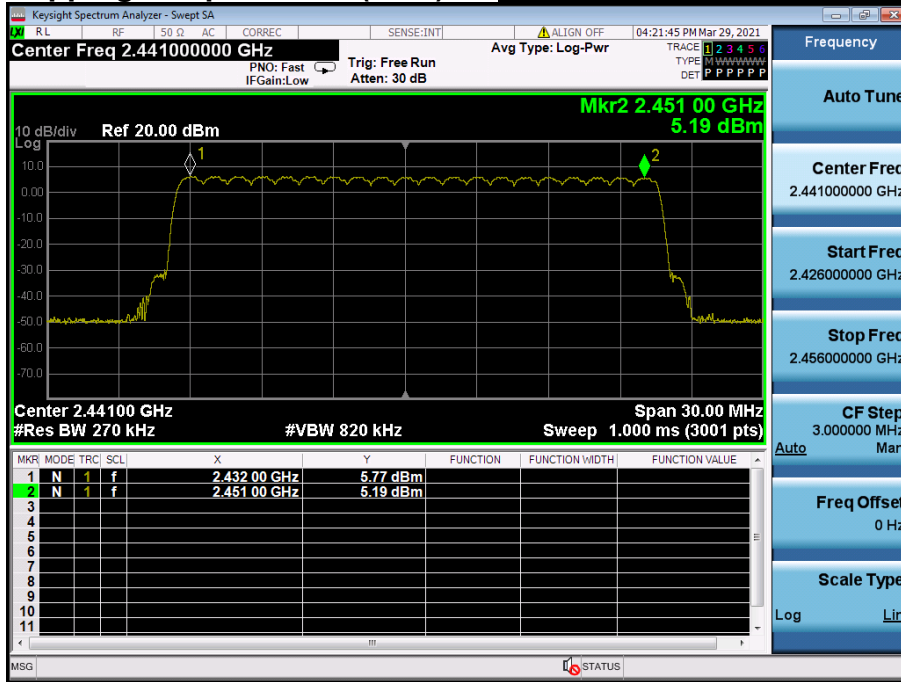

6. Time of Occupancy (Dwell Time)

6.1 Test Setup

Refer to the APPENDIX I.

6.2 Limit

The maximum permissible time of occupancy is 400 ms within a period of 400 ms multiplied by the number of hopping channels employed.

6.3 Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2 441 MHz

Span = zero

RBW = 1 MHz (RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel)

VBW \geq RBW

Detector function = peak

Trace = max hold

6.4 Test Results

FH mode

| Hopping mode | Packet Type | Number of hopping Channels | Burst On Time (ms) | Period (ms) | Test Result (sec) |
|--------------|-------------|----------------------------|--------------------|-------------|-------------------|
| Enable | DH 5 | 79 | 2.880 | 3.750 | 0.307 |
| | 2 DH 5 | 79 | 2.880 | 3.750 | 0.307 |
| | 3 DH 5 | 79 | 2.880 | 3.750 | 0.307 |

AFH mode

| Hopping mode | Packet Type | Number of hopping Channels | Burst On Time (ms) | Period (ms) | Test Result (sec) |
|--------------|-------------|----------------------------|--------------------|-------------|-------------------|
| Enable | DH 5 | 20 | 2.880 | 3.750 | 0.154 |
| | 2 DH 5 | 20 | 2.880 | 3.750 | 0.154 |
| | 3 DH 5 | 20 | 2.880 | 3.750 | 0.154 |


Note 1 : Dwell Time = $0.4 \times \text{Hopping channel} \times \text{Burst ON time} \times$
 $((\text{Hopping rate} \div \text{Time slots}) \div \text{Hopping channel})$

- Time slots for DH5 = 6 slots (TX = 5 slot / RX = 1 slot)
- Hopping Rate = 1 600 for FH mode & 800 for AFH mode

Note 2 : See next pages for actual measured spectrum plots.


Time of Occupancy (FH)

Hopping mode : Enable & DH5

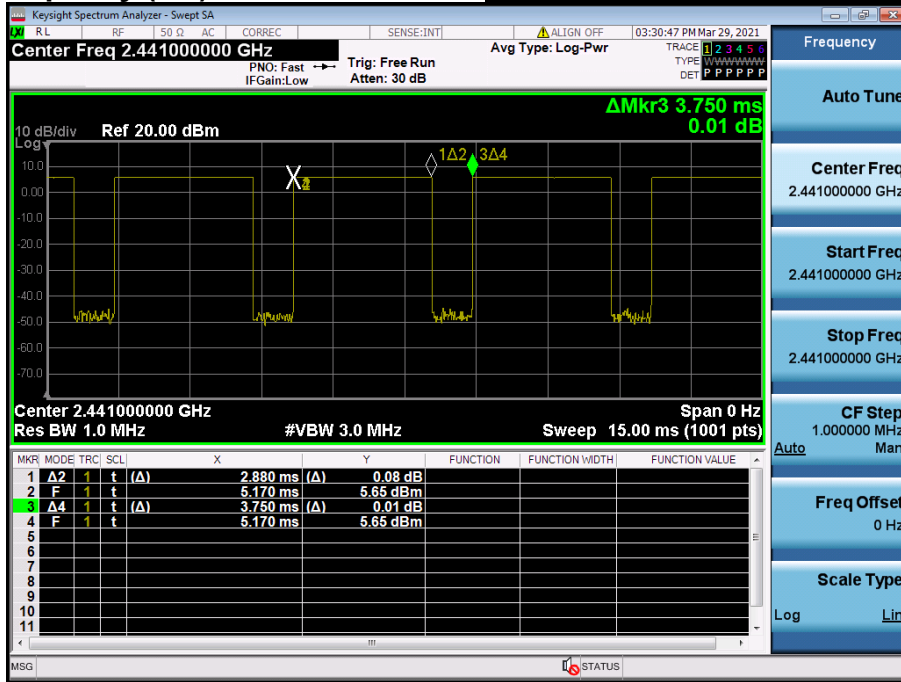


Time of Occupancy (FH)

Hopping mode : Enable & 2-DH5

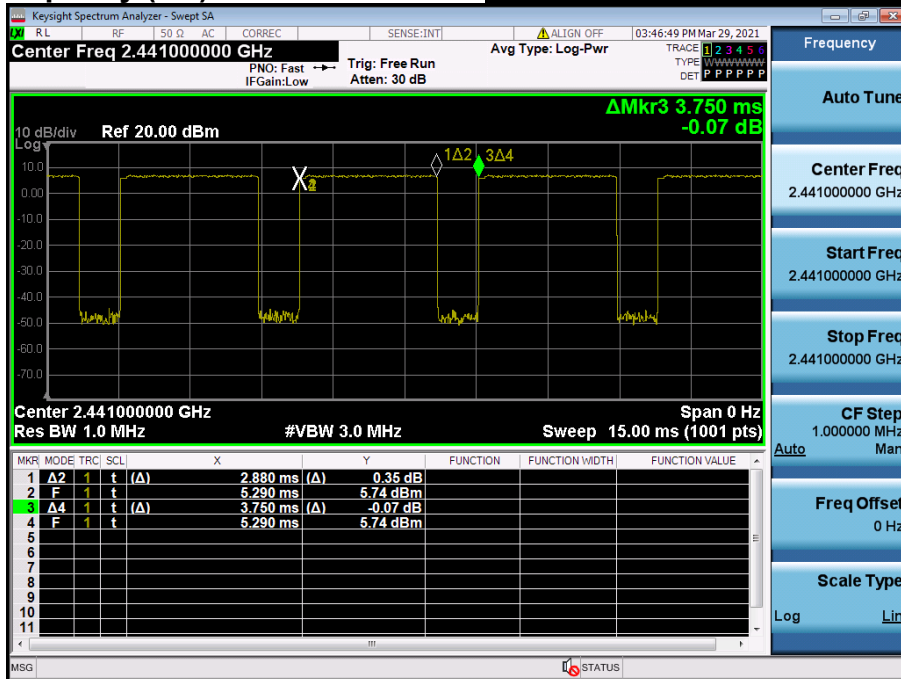


Time of Occupancy (FH)

Hopping mode : Enable & 3-DH5

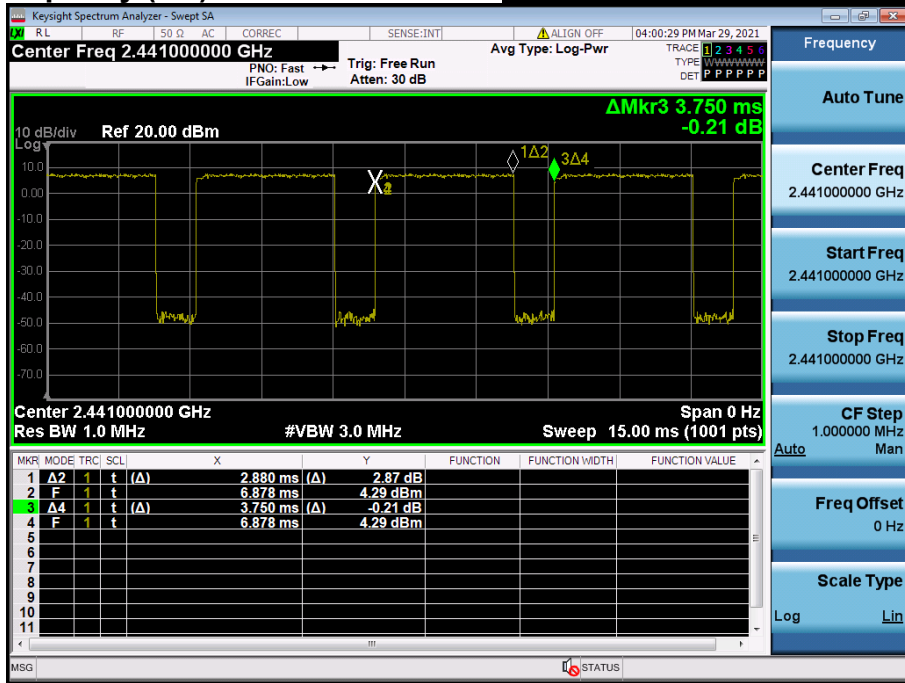


Time of Occupancy (AFH)

Hopping mode : Enable & DH5

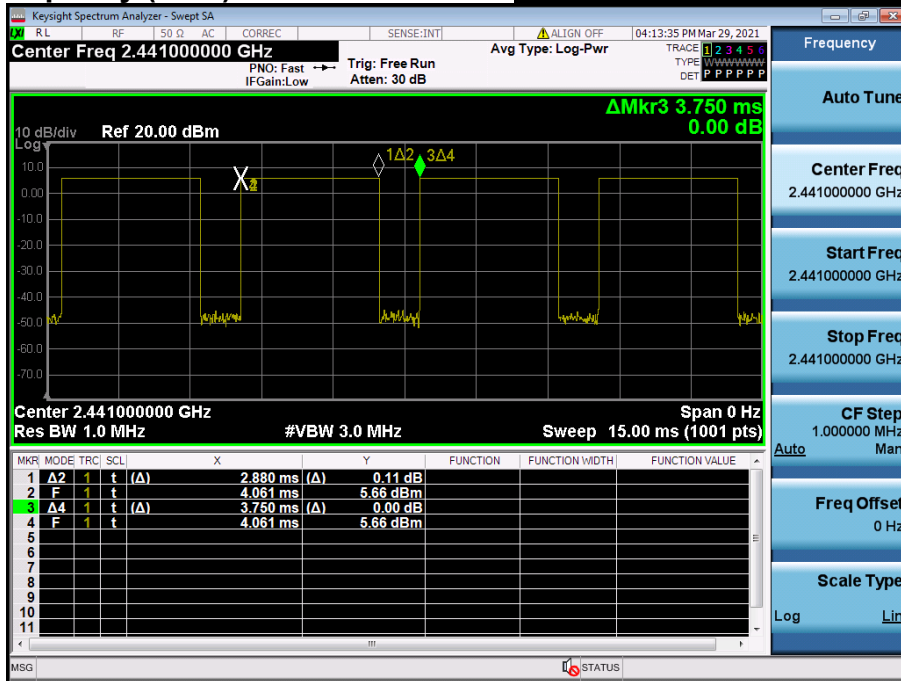


Time of Occupancy (AFH)

Hopping mode : Enable & 2-DH5

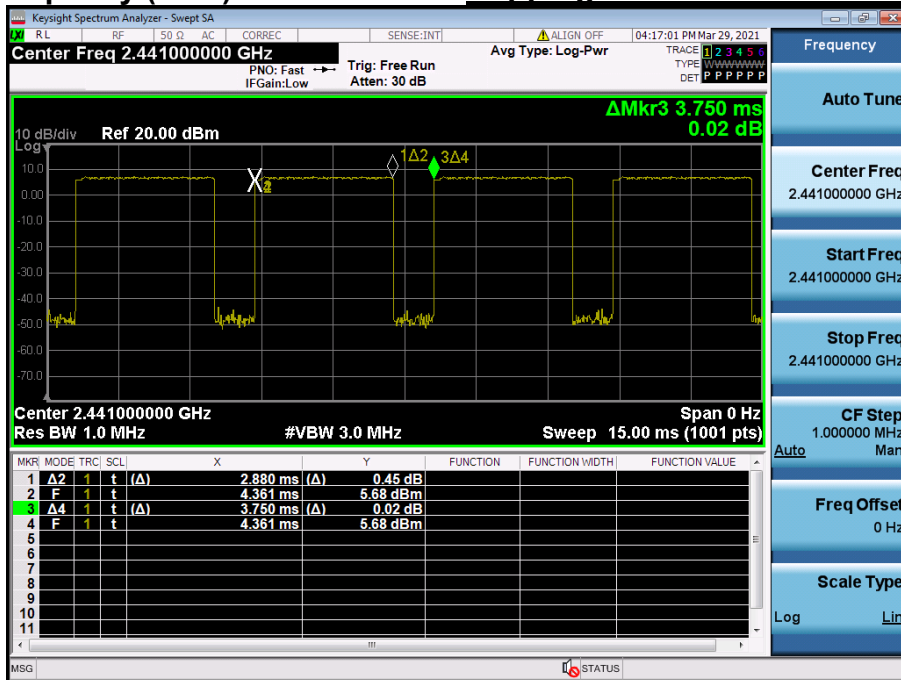

Time of Occupancy (AFH)

Hopping mode : Enable & 3-DH5

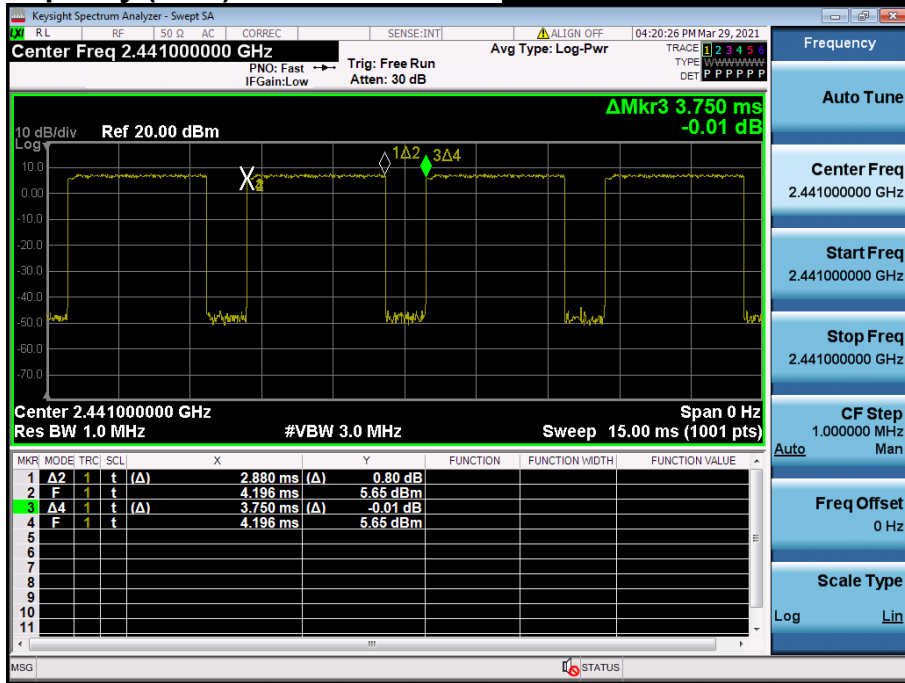

7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

7.1 Test Setup

Refer to the APPENDIX I.

7.2 Limit

Part 15.247(d), Part 15.205, Part 15.209 & RSS-247 [5.5], RSS-Gen [8.9], RSS-Gen [8.10]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

- Part 15.209 & RSS-247[8.9]

| Frequency (MHz) | FCC Limit (uV/m) | IC Limit (uA/m) | Measurement Distance (m) |
|-----------------|------------------|-------------------|--------------------------|
| 0.009 – 0.490 | 2 400 / F (kHz) | 6.37/F (F in kHz) | 300 |
| 0.490 – 1.705 | 2 4000 / F (kHz) | 63.7/F (F in kHz) | 30 |
| 1.705 – 30.0 | 30 | 0.08 | 30 |

| Frequency (MHz) | FCC Limit (uV/m) | IC Limit (uV/m) | Measurement Distance (m) |
|-----------------|------------------|-----------------|--------------------------|
| 30 ~ 88 | 100 ** | 100 | 3 |
| 88 ~ 216 | 150 ** | 150 | 3 |
| 216 ~ 960 | 200 ** | 200 | 3 |
| Above 960 | 500 | 500 | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

- Part 15.205(a): Restricted band of operation

| MHz | MHz | MHz | MHz | GHz | GHz |
|---------------------|-----------------------|-------------------------|-------------------|--------------|---------------|
| 0.009 ~ 0.110 | 8.414 25 ~ 8.414 75 | 108 ~ 121.94 | 1 300 ~ 1 427 | 4.5 ~ 5.15 | 14.47 ~ 14.5 |
| 0.495 ~ 0.505 | 12.29 ~ 12.293 | 123 ~ 138 | 1 435 ~ 1 626.5 | 5.35 ~ 5.46 | 15.35 ~ 16.2 |
| 2.173 5 ~ 2.190 5 | 12.519 75 ~ 12.520 25 | 149.9 ~ 150.05 | 1 645.5 ~ 1 646.5 | 7.25 ~ 7.75 | 17.7 ~ 21.4 |
| 4.125 ~ 4.128 | 12.576 75 ~ 12.577 25 | 156.524 75 ~ 156.525 25 | 1 660 ~ 1 710 | 8.025 ~ 8.5 | 22.01 ~ 23.12 |
| 4.177 25 ~ 4.177 75 | 13.36 ~ 13.41 | 156.7 ~ 156.9 | 1 718.8 ~ 1 722.2 | 9.0 ~ 9.2 | 23.6 ~ 24.0 |
| 4.207 25 ~ 4.207 75 | 16.42 ~ 16.423 | 162.012 5 ~ 167.17 | 2 200 ~ 2 300 | 9.3 ~ 9.5 | 31.2 ~ 31.8 |
| 6.215 ~ 6.218 | 16.694 75 ~ 16.695 25 | 167.72 ~ 173.2 | 2 310 ~ 2 390 | 10.6 ~ 12.7 | 36.43 ~ 36.5 |
| 6.267 75 ~ 6.268 25 | 16.804 25 ~ 16.804 75 | 240 ~ 285 | 2 483.5 ~ 2 500 | 13.25 ~ 13.4 | Above 38.6 |
| 6.311 75 ~ 6.312 25 | 25.5 ~ 25.67 | 322 ~ 335.4 | 2 655 ~ 2 900 | | |
| 8.291 ~ 8.294 | 37.5 ~ 38.25 | 399.90 ~ 410 | 3 260 ~ 3 267 | | |
| 8.362 ~ 8.366 | 73 ~ 74.6 | 608 ~ 614 | 3 332 ~ 3 339 | | |
| 8.376 25 ~ 8.386 75 | 74.8 ~ 75.2 | 960 ~ 1240 | 3 345.8 ~ 3 358 | | |
| | | | 3 600 ~ 4 400 | | |

- RSS-GEN[8.10]: Restricted frequency bands

| MHz | MHz | MHz | MHz | MHz | GHz |
|---------------------|-----------------------|--------------------|-------------------|-----------------|---------------|
| 0.090 ~ 0.110 | 8.362 ~ 8.366 | 73 ~ 74.6 | 608 ~ 614 | 3 345.8 ~ 3 358 | 9.0 ~ 9.2 |
| 0.495 ~ 0.505 | 8.376 25 ~ 8.386 75 | 74.8 ~ 75.2 | 960 ~ 1 427 | 3 500 ~ 4 400 | 9.3 ~ 9.5 |
| 2.173 5 ~ 2.190 5 | 8.414 25 ~ 8.414 75 | 108 ~ 138 | 1 435 ~ 1 626.5 | 4 500 ~ 5 150 | 10.6 ~ 12.7 |
| 3.020 ~ 3.026 | 12.29 ~ 12.293 | 149.9 ~ 150.05 | 1 645.5 ~ 1 646.5 | 5 350 ~ 5 460 | 13.25 ~ 13.4 |
| 4.125 ~ 4.128 | 12.519 75 ~ 12.520 25 | 156.524 75 ~ | 1 660 ~ 1 710 | 7 250 ~ 7 750 | 14.47 ~ 14.5 |
| 4.177 25 ~ 4.177 75 | 12.576 75 ~ 12.577 25 | 156.525 25 | 1 718.8 ~ 1 722.2 | 8 025 ~ 8 500 | 15.35 ~ 16.2 |
| 4.207 25 ~ 4.207 75 | 13.36 ~ 13.41 | 156.7 ~ 156.9 | 2 200 ~ 2 300 | | 17.7 ~ 21.4 |
| 5.677 ~ 5.683 | 16.42 ~ 16.423 | 162.01 25 ~ 167.17 | 2 310 ~ 2 390 | | 22.01 ~ 23.12 |
| 6.215 ~ 6.218 | 16.694 75 ~ 16.695 25 | 167.72 ~ 173.2 | 2 483.5 ~ 2 500 | | 23.6 ~ 24.0 |
| 6.267 75 ~ 6.268 25 | 16.804 25 ~ 16.804 75 | 240 ~ 285 | 2 655 ~ 2 900 | | 31.2 ~ 31.8 |
| 6.311 75 ~ 6.312 25 | 25.5 ~ 25.67 | 322 ~ 335.4 | 3 260 ~ 3 267 | | 36.43 ~ 36.5 |
| 8.291 ~ 8.294 | 37.5 ~ 38.25 | 399.90 ~ 410 | 3 332 ~ 3 339 | | Above 38.6 |

7.3. Test Procedures

7.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 m or 3 m away from the interference-receiving antenna.
3. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Measurement Instrument Setting

- Frequencies less than or equal to 1 000 MHz
The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- Frequencies above 1 000 MHz
The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
The result of Average measurement is calculated using PK result and duty correction factor.

7.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

Frequency range : 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 26.5 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40 001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

7.4. Test Results

7.4.1. Radiated Emissions

▪ Test Notes.

- The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found below listed frequencies.
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54 dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)
- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20 \text{ minimum hopping channels}$, where T = pulse width = **2.88 ms**
- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 1.74 \approx 2$
- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$
- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = -24.79 \text{ dB}$
- Sample Calculation.
Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

9 kHz ~ 25 GHz Data (Modulation : GFSK)

▪ Lowest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 2 388.26 | H | X | PK | 50.72 | 4.78 | N/A | N/A | 55.50 | 74.00 | 18.50 |
| 2 388.26 | H | X | AV | 50.72 | 4.78 | -24.79 | N/A | 30.71 | 54.00 | 23.29 |
| 4 804.37 | H | X | PK | 49.92 | 1.86 | N/A | N/A | 51.78 | 74.00 | 22.22 |
| 4 804.37 | H | X | AV | 49.92 | 1.86 | -24.79 | N/A | 26.99 | 54.00 | 27.01 |

▪ Middle Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 4 882.29 | H | X | PK | 50.66 | 2.14 | N/A | N/A | 52.80 | 74.00 | 21.20 |
| 4 882.29 | H | X | AV | 50.66 | 2.14 | -24.79 | N/A | 28.01 | 54.00 | 25.99 |

▪ Highest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 2 483.60 | H | X | PK | 49.82 | 5.74 | N/A | N/A | 55.56 | 74.00 | 18.44 |
| 2 483.60 | H | X | AV | 49.82 | 5.74 | -24.79 | N/A | 30.77 | 54.00 | 23.23 |
| 4 960.37 | H | X | PK | 50.09 | 2.13 | N/A | N/A | 52.22 | 74.00 | 21.78 |
| 4 960.37 | H | X | AV | 50.09 | 2.13 | -24.79 | N/A | 27.43 | 54.00 | 26.57 |

9 kHz ~ 25 GHz Data (Modulation : $\pi/4$ DQPSK)

▪ Lowest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 2 388.19 | H | X | PK | 50.87 | 4.78 | N/A | N/A | 55.65 | 74.00 | 18.35 |
| 2 388.19 | H | X | AV | 50.87 | 4.78 | -24.79 | N/A | 30.86 | 54.00 | 23.14 |
| 4 803.90 | H | X | PK | 50.31 | 1.86 | N/A | N/A | 52.17 | 74.00 | 21.83 |
| 4 803.90 | H | X | AV | 50.31 | 1.86 | -24.79 | N/A | 27.38 | 54.00 | 26.62 |

▪ Middle Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 4 882.21 | H | X | PK | 50.92 | 2.14 | N/A | N/A | 53.06 | 74.00 | 20.94 |
| 4 882.21 | H | X | AV | 50.92 | 2.14 | -24.79 | N/A | 28.27 | 54.00 | 25.73 |

▪ Highest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 2 483.61 | H | X | PK | 50.36 | 5.74 | N/A | N/A | 56.10 | 74.00 | 17.90 |
| 2 483.61 | H | X | AV | 50.36 | 5.74 | -24.79 | N/A | 31.31 | 54.00 | 22.69 |
| 4 959.78 | H | X | PK | 50.94 | 2.12 | N/A | N/A | 53.06 | 74.00 | 20.94 |
| 4 959.78 | H | X | AV | 50.94 | 2.12 | -24.79 | N/A | 28.27 | 54.00 | 25.73 |

9 kHz ~ 25 GHz Data (Modulation : 8DPSK)

▪ Lowest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 2 388.35 | H | X | PK | 50.73 | 4.78 | N/A | N/A | 55.51 | 74.00 | 18.49 |
| 2 388.35 | H | X | AV | 50.73 | 4.78 | -24.79 | N/A | 30.72 | 54.00 | 23.28 |
| 4 803.72 | H | X | PK | 50.99 | 1.86 | N/A | N/A | 52.85 | 74.00 | 21.15 |
| 4 803.72 | H | X | AV | 50.99 | 1.86 | -24.79 | N/A | 28.06 | 54.00 | 25.94 |

▪ Middle Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 4 882.12 | H | X | PK | 50.34 | 2.14 | N/A | N/A | 52.48 | 74.00 | 21.52 |
| 4 882.12 | H | X | AV | 50.34 | 2.14 | -24.79 | N/A | 27.69 | 54.00 | 26.31 |

▪ Highest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 2 483.78 | H | X | PK | 49.69 | 5.74 | N/A | N/A | 55.43 | 74.00 | 18.57 |
| 2 483.78 | H | X | AV | 49.69 | 5.74 | -24.79 | N/A | 30.64 | 54.00 | 23.36 |
| 4 959.70 | H | X | PK | 50.43 | 2.12 | N/A | N/A | 52.55 | 74.00 | 21.45 |
| 4 959.70 | H | X | AV | 50.43 | 2.12 | -24.79 | N/A | 27.76 | 54.00 | 26.24 |

9 kHz ~ 25 GHz Data (Modulation : $\pi/4$ DQPSK) With Wireless Charging


• Highest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | D.C.F (dB) | Distance Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|------------|----------------------|-----------------|----------------|-------------|
| 2 484.61 | H | X | PK | 49.69 | 5.74 | N/A | N/A | 55.43 | 74.00 | 18.57 |
| 2 484.61 | H | X | AV | 49.69 | 5.74 | -24.79 | N/A | 30.64 | 54.00 | 23.36 |
| 4 960.25 | H | X | PK | 49.96 | 2.12 | N/A | N/A | 52.08 | 74.00 | 21.92 |
| 4 960.25 | H | X | AV | 49.96 | 2.12 | -24.79 | N/A | 27.29 | 54.00 | 26.71 |

7.4.2. Conducted Spurious Emissions


Low Band-edge

Lowest Channel & Modulation : GFSK


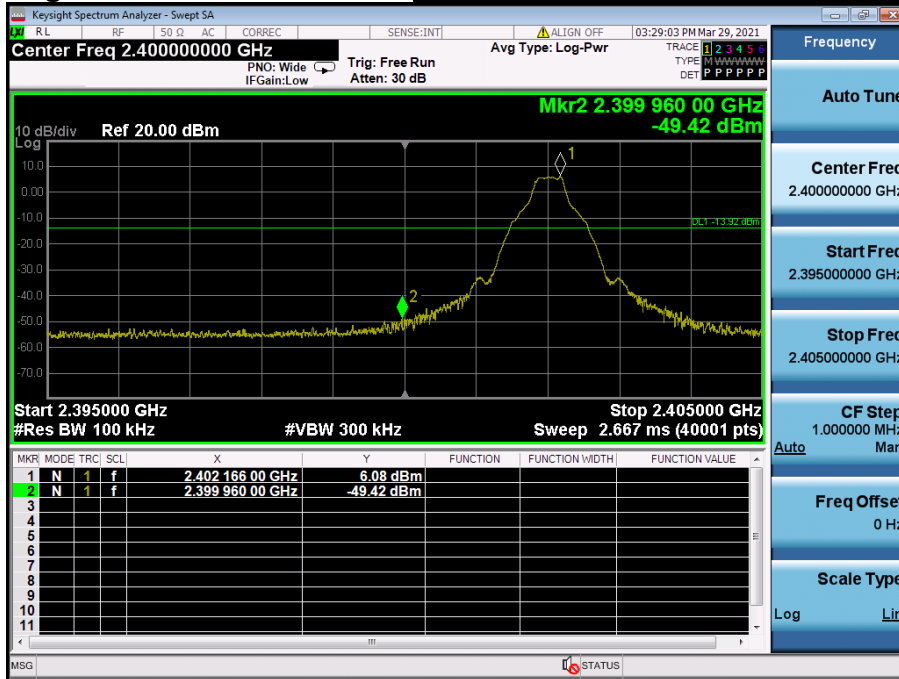


Low Band-edge


Hopping mode & Modulation : GFSK

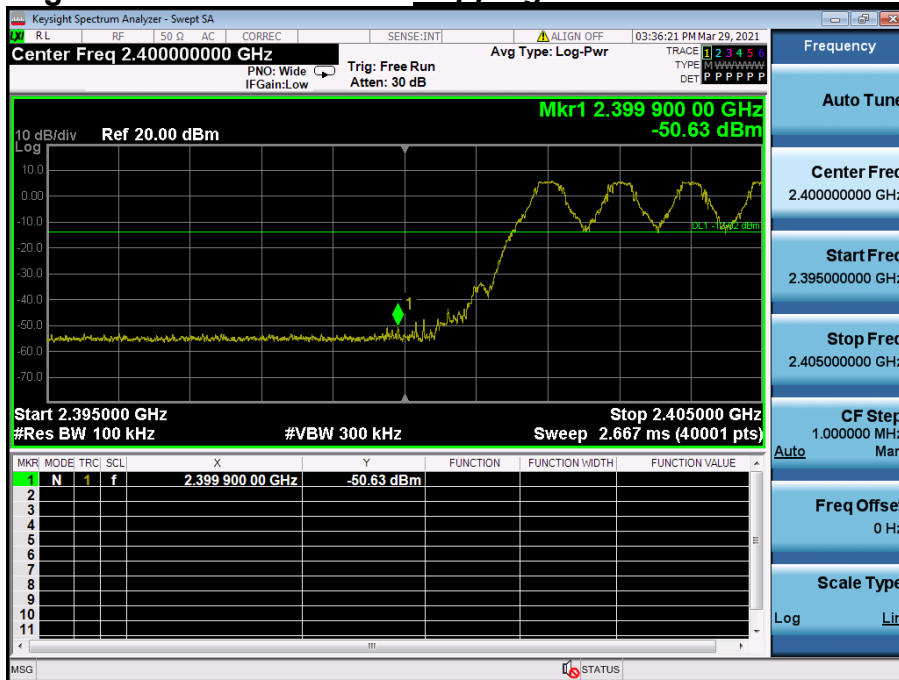

Conducted Spurious Emissions **Lowest Channel & Modulation : GFSK**

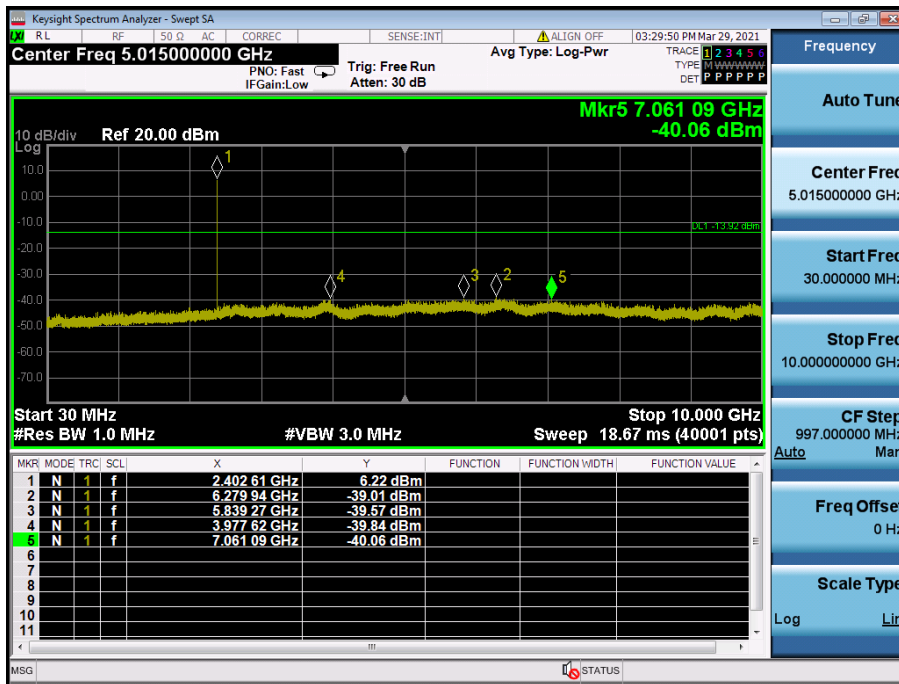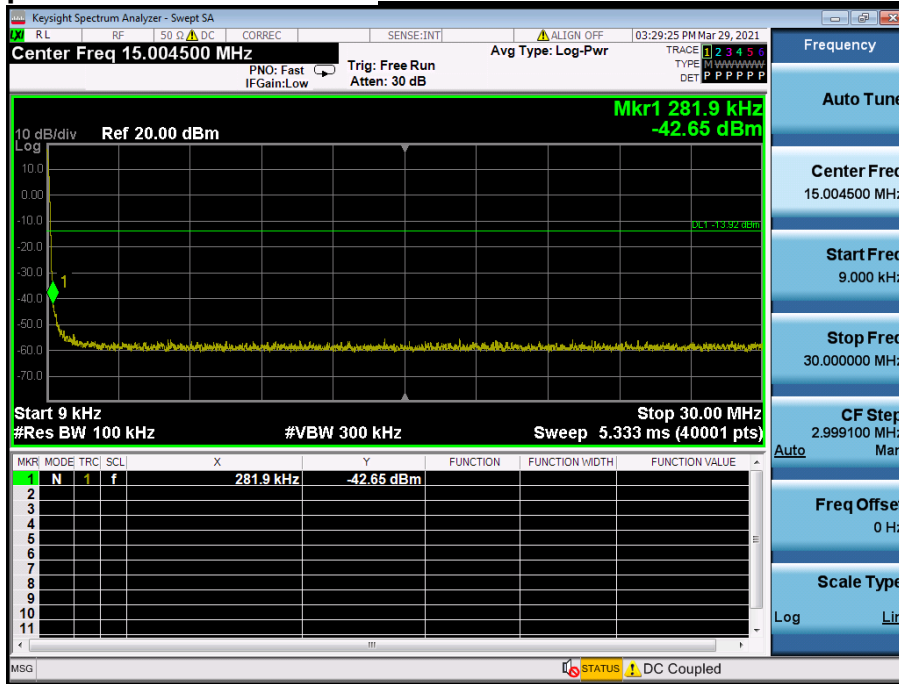


Conducted Spurious Emissions **Lowest Channel & Modulation : GFSK**

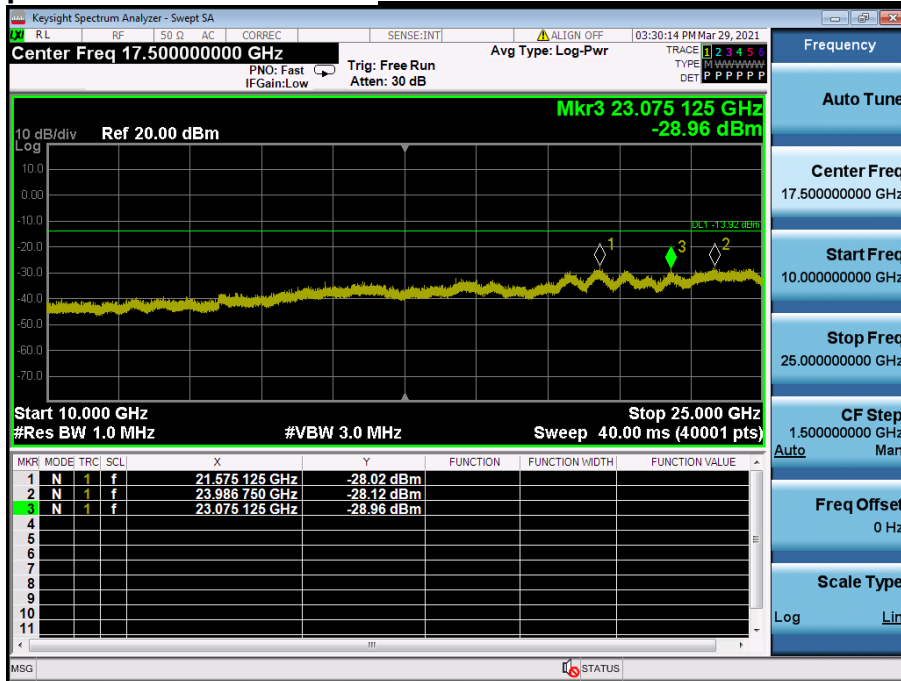


Reference for limit

Middle Channel & Modulation : GFSK


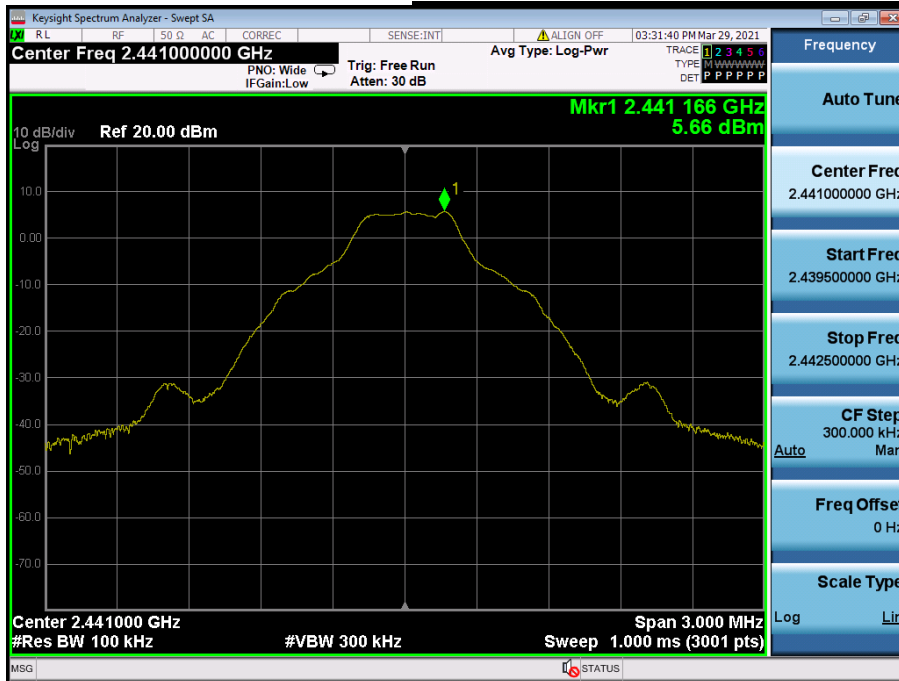


Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

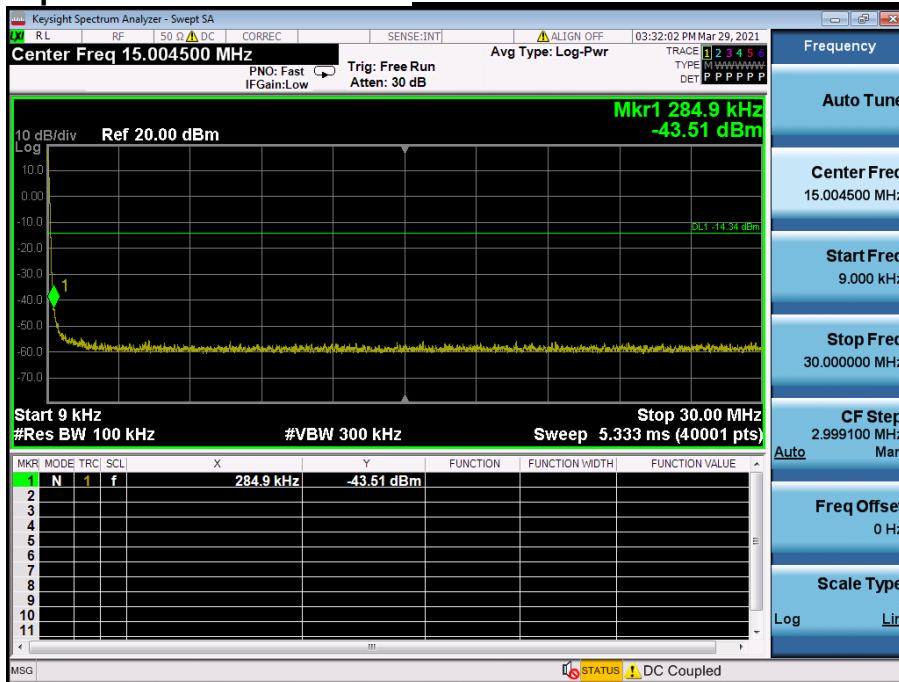


Conducted Spurious Emissions *Middle Channel & Modulation : GFSK*

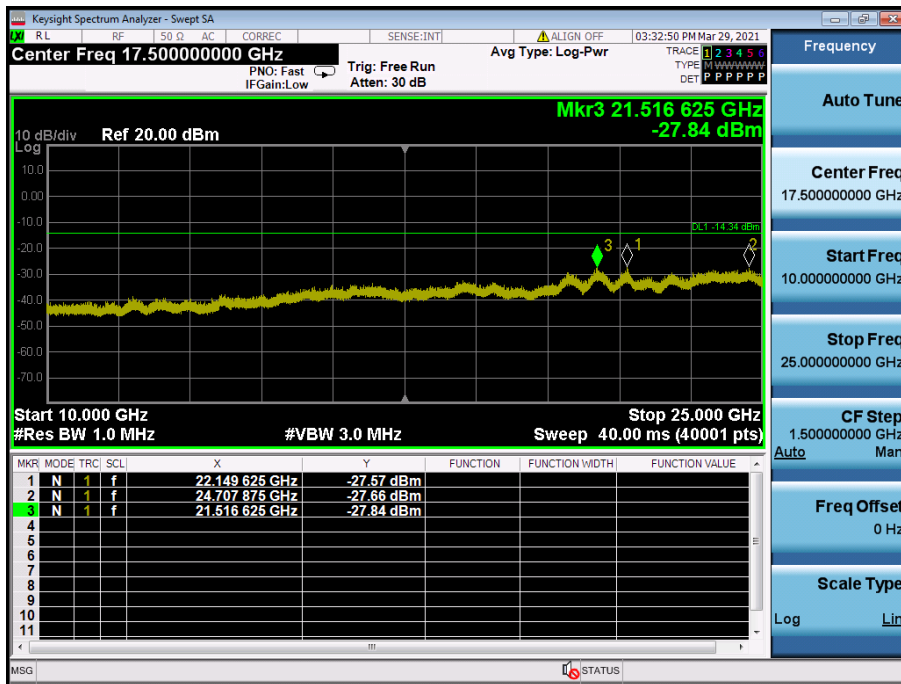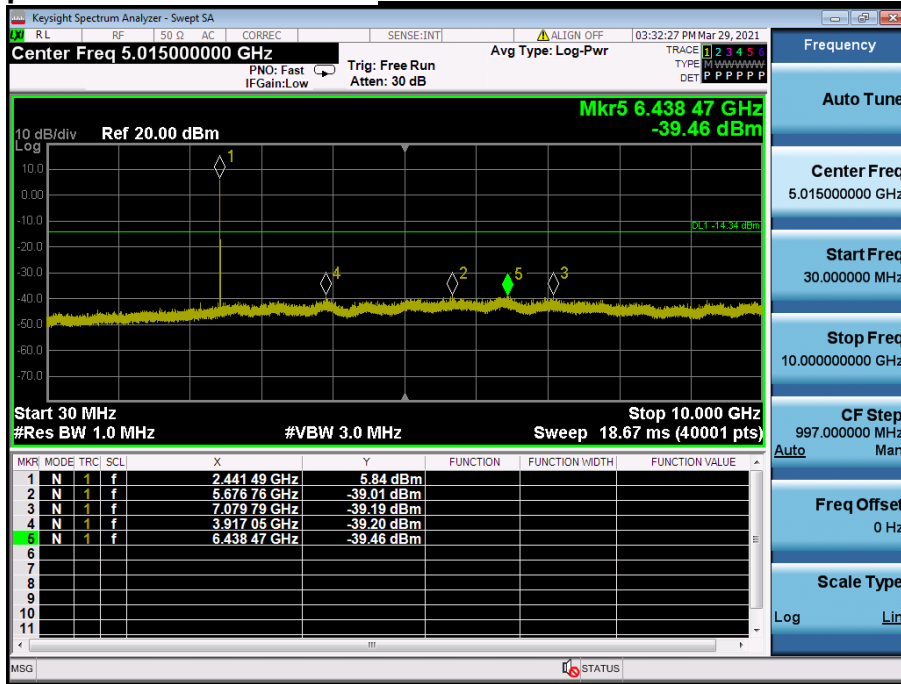


High Band-edge

Highest Channel & Modulation : GFSK


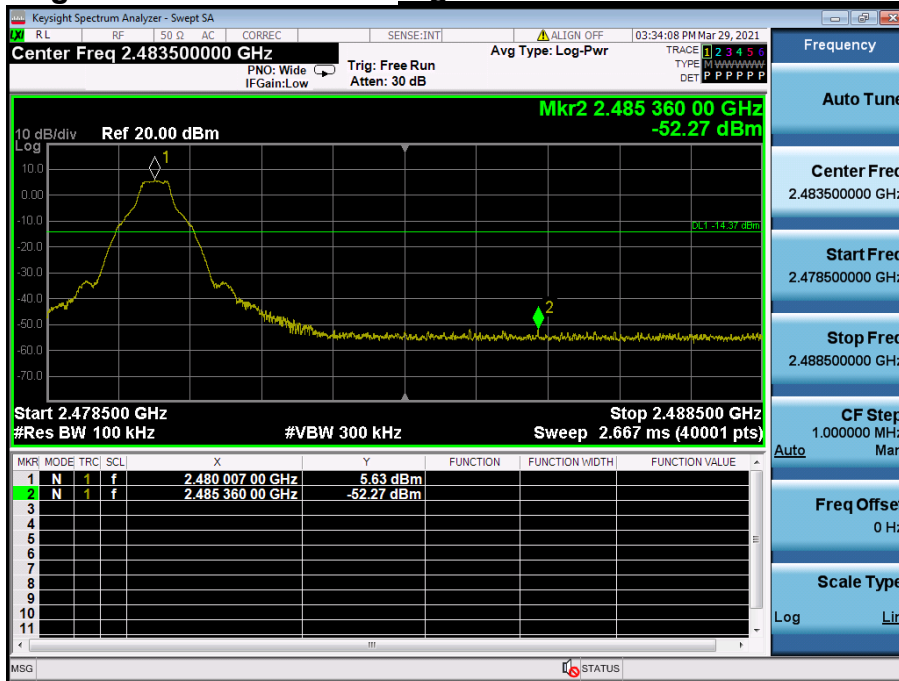


High Band-edge


Hopping mode & Modulation : GFSK

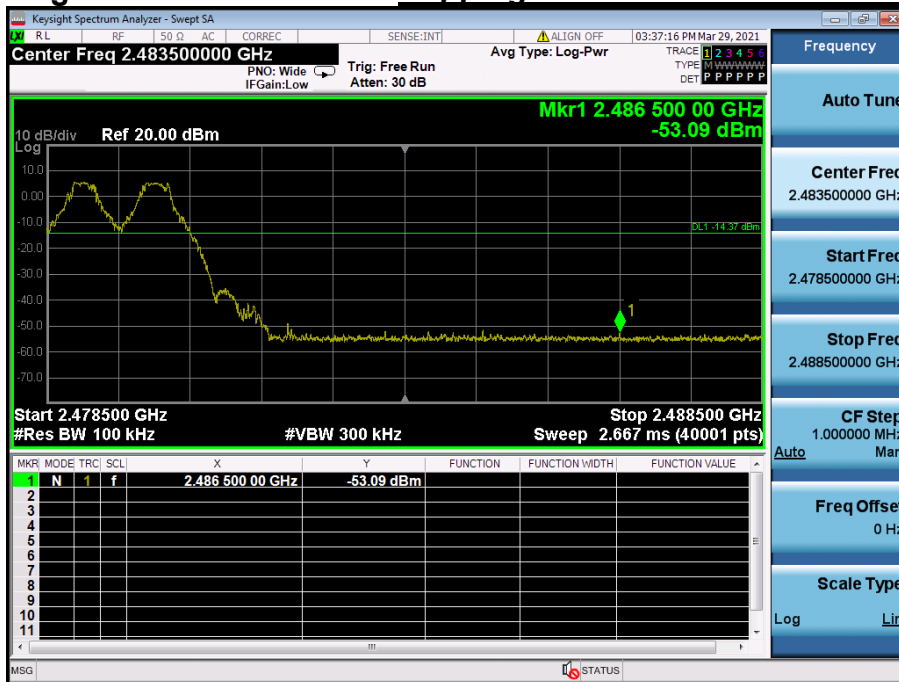

Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**

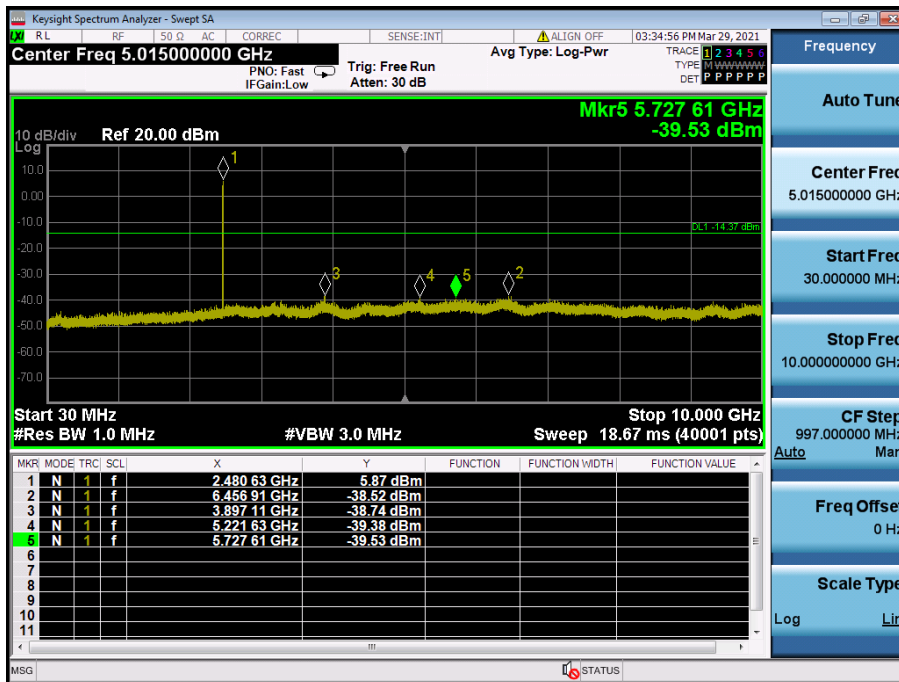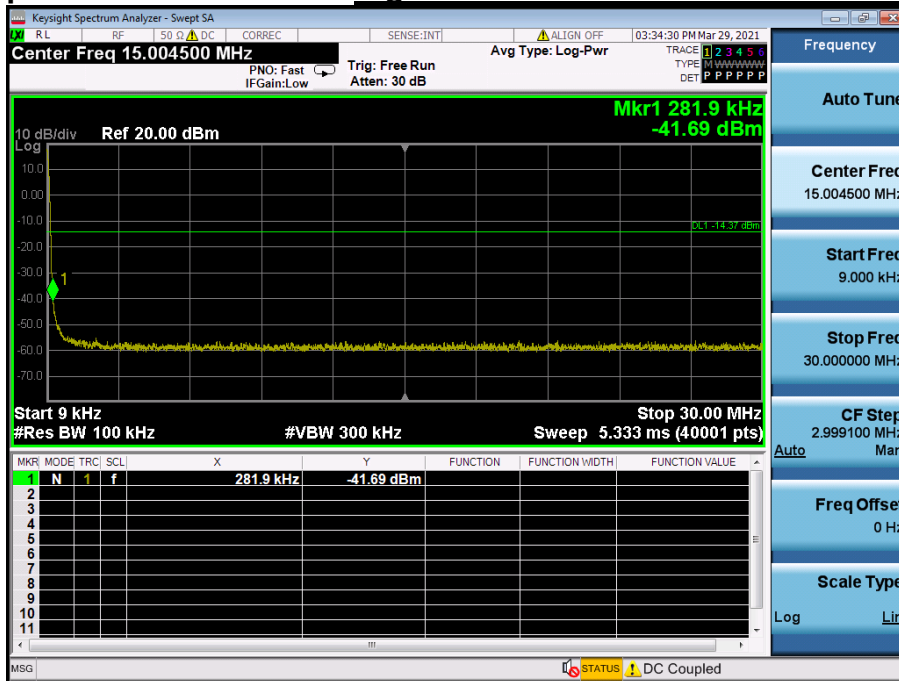


Conducted Spurious Emissions **Highest Channel & Modulation : GFSK**

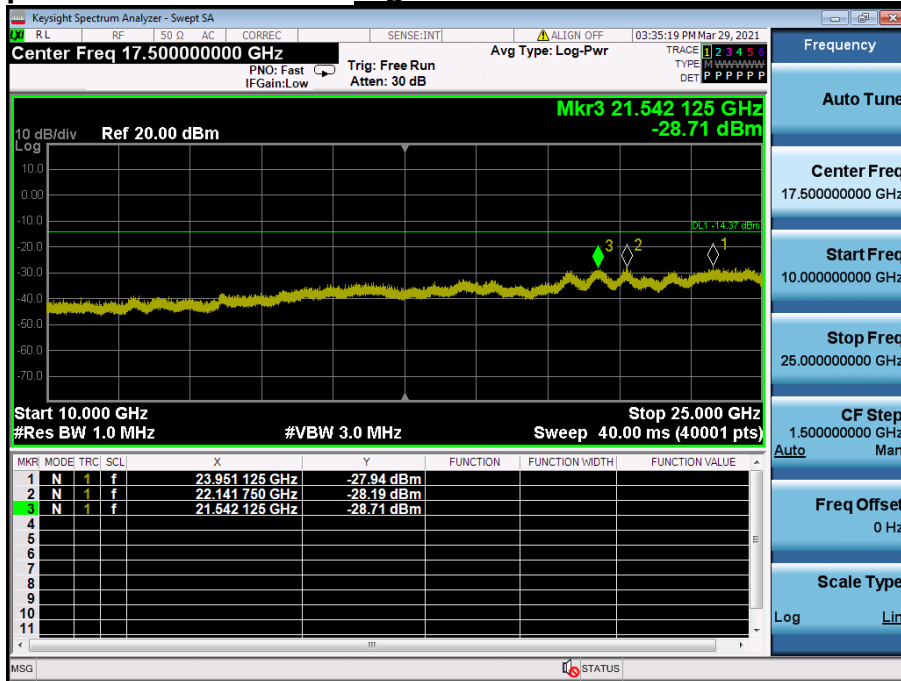


Low Band-edge

Lowest Channel & Modulation : $\pi/4$ DQPSK


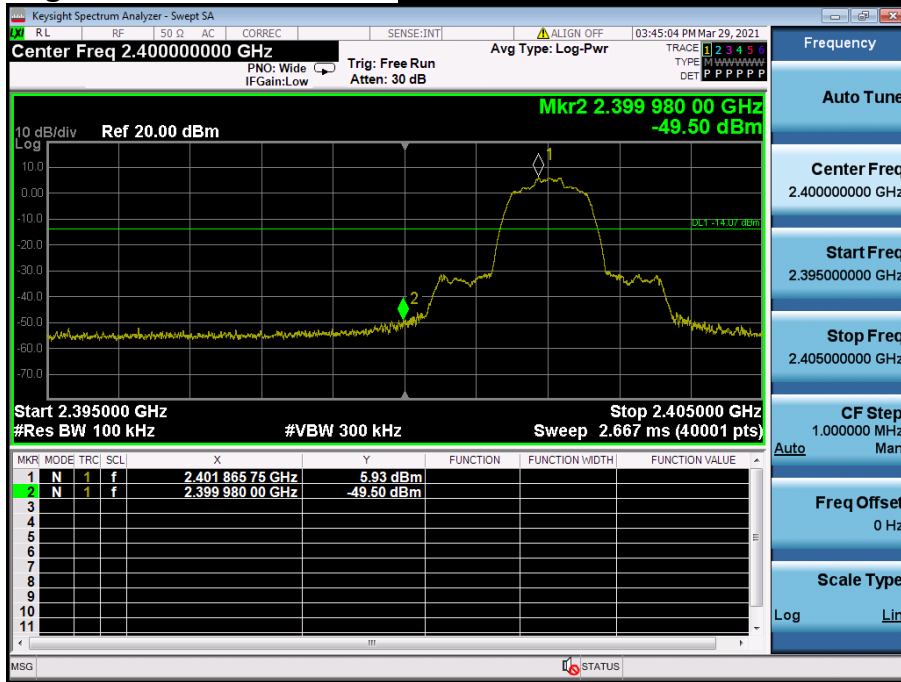


Low Band-edge


Hopping mode & Modulation : $\pi/4$ DQPSK

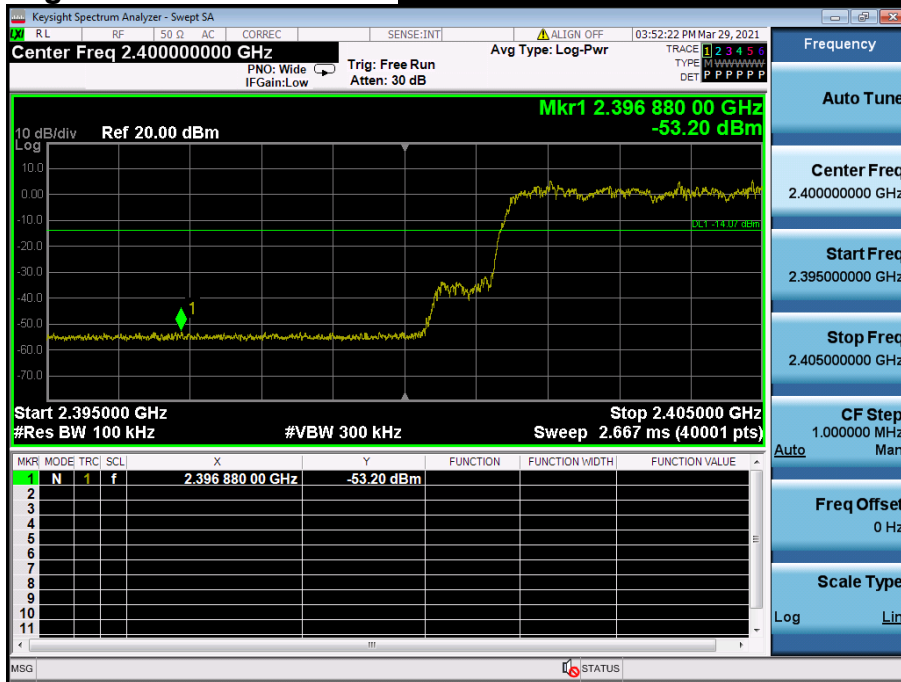

Conducted Spurious Emissions **Lowest Channel & Modulation : $\pi/4$ DQPSK**

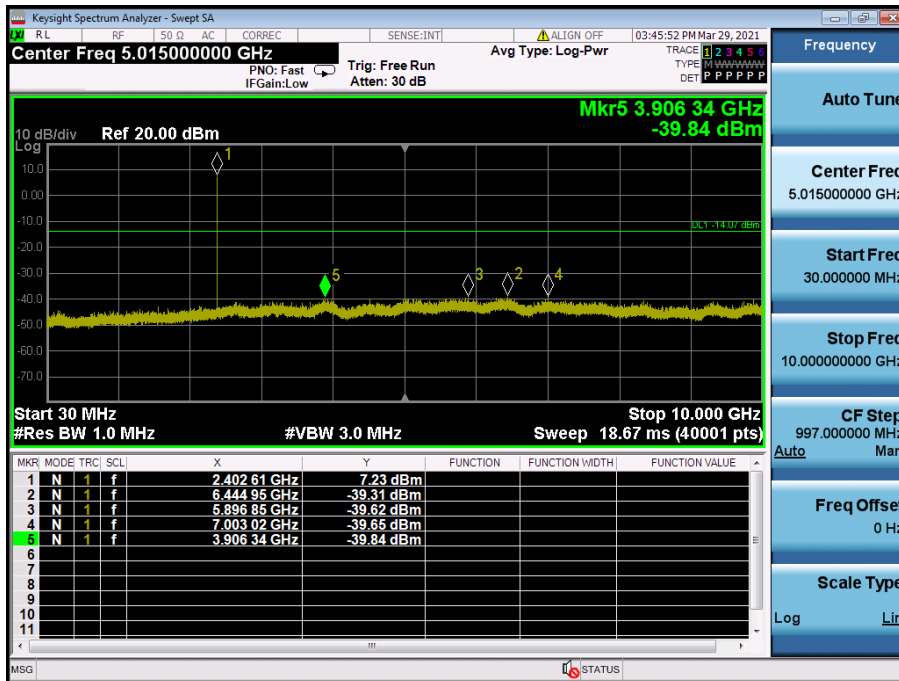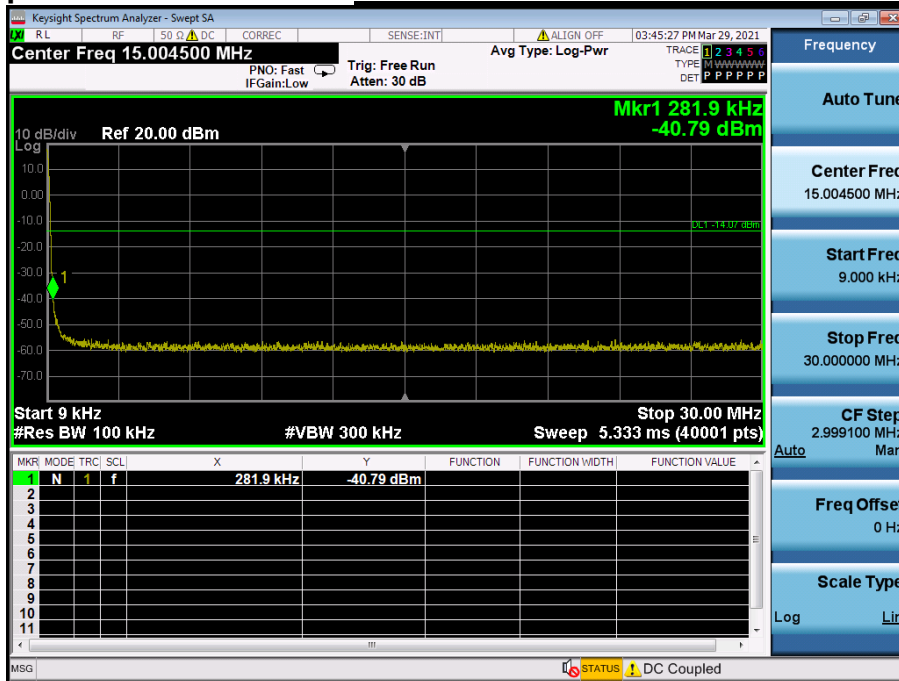


Conducted Spurious Emissions **Lowest Channel & Modulation : $\pi/4$ DQPSK**

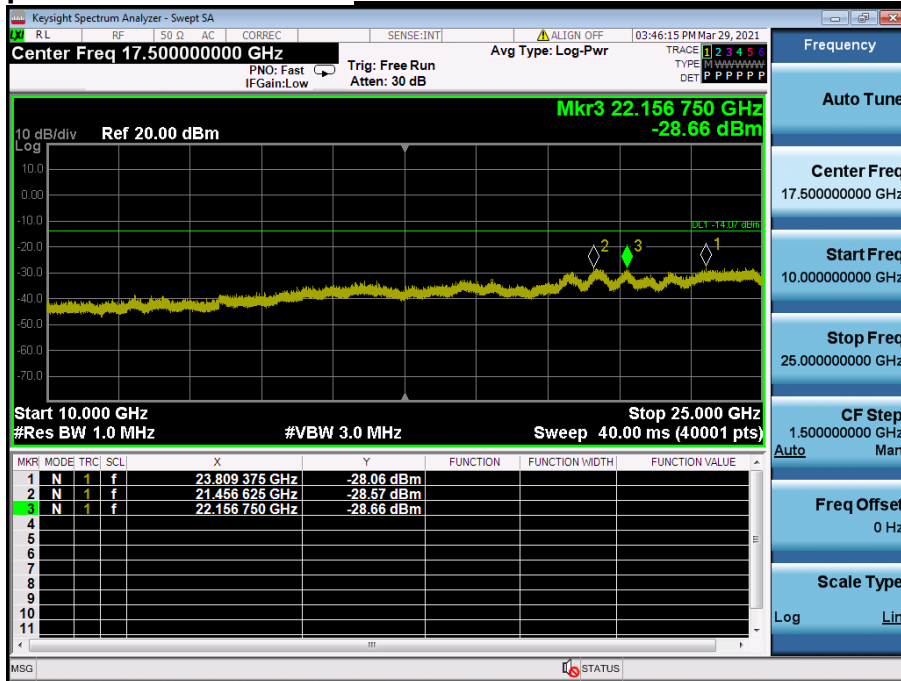


Reference for limit

Middle Channel & Modulation : $\pi/4$ DQPSK


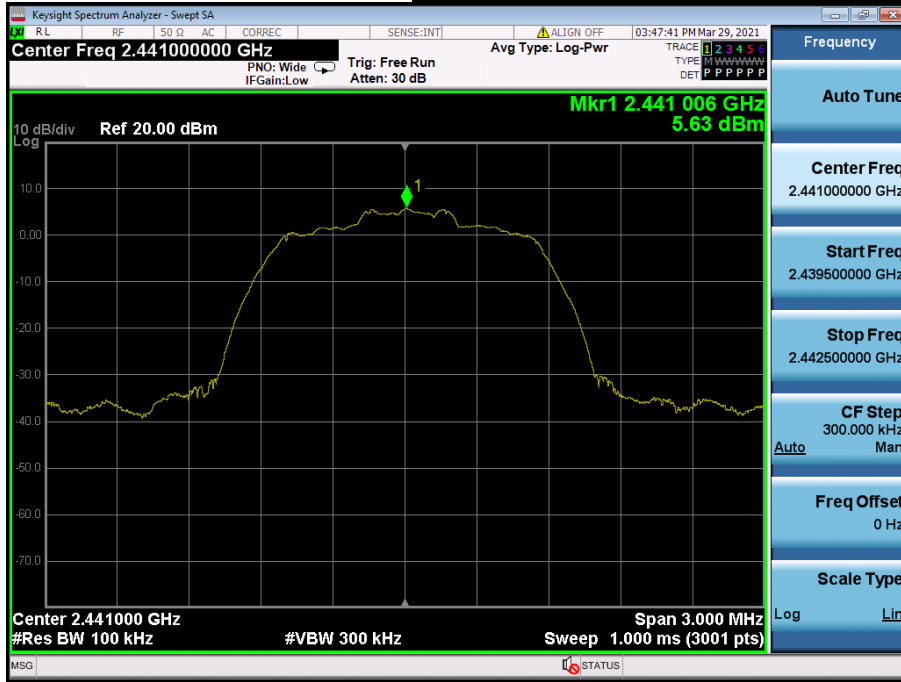


Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ DQPSK

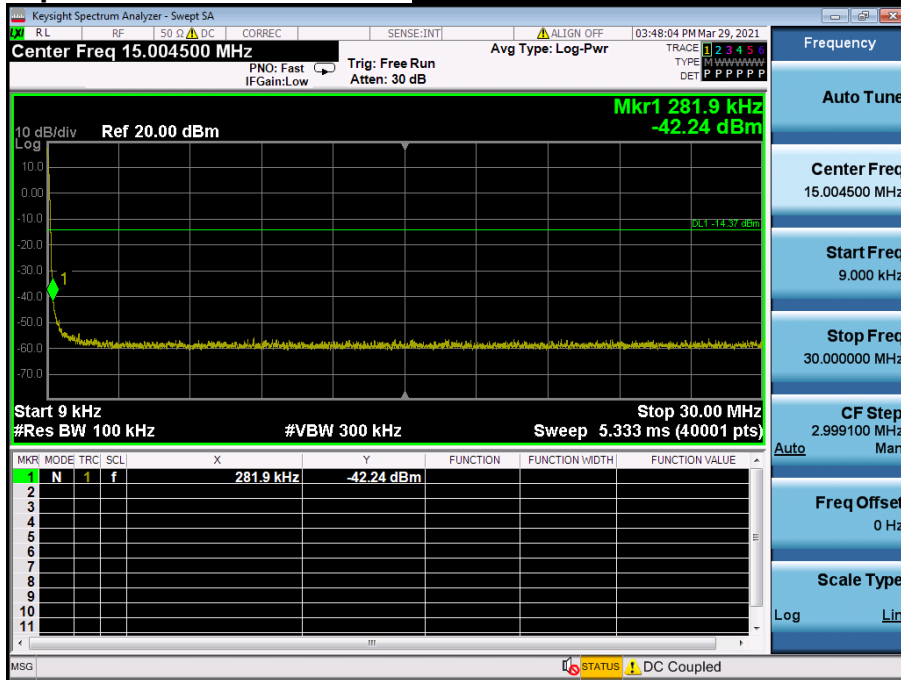


Conducted Spurious Emissions *Middle Channel & Modulation : $\pi/4$ DQPSK*

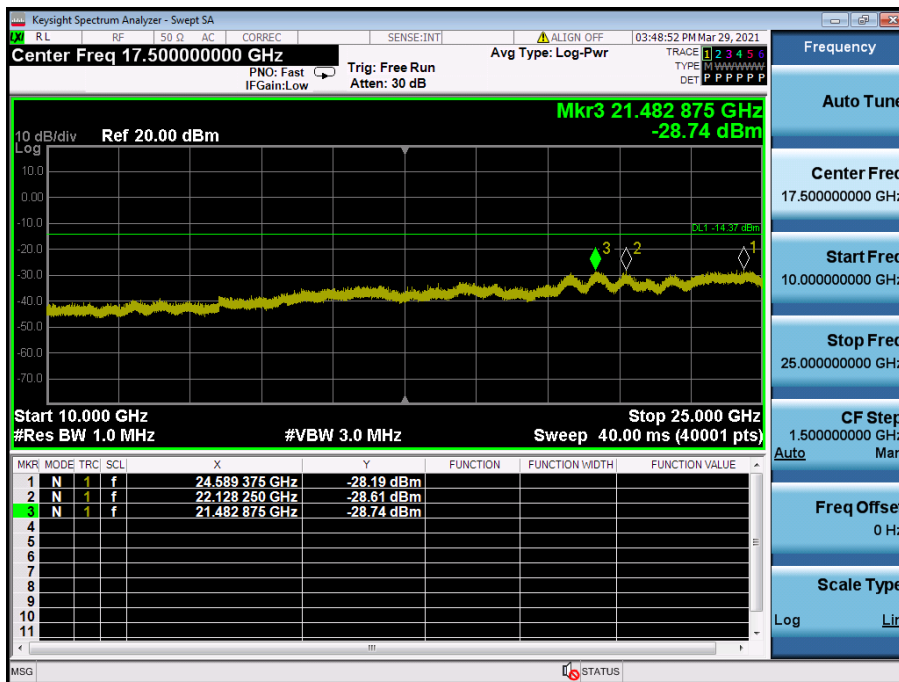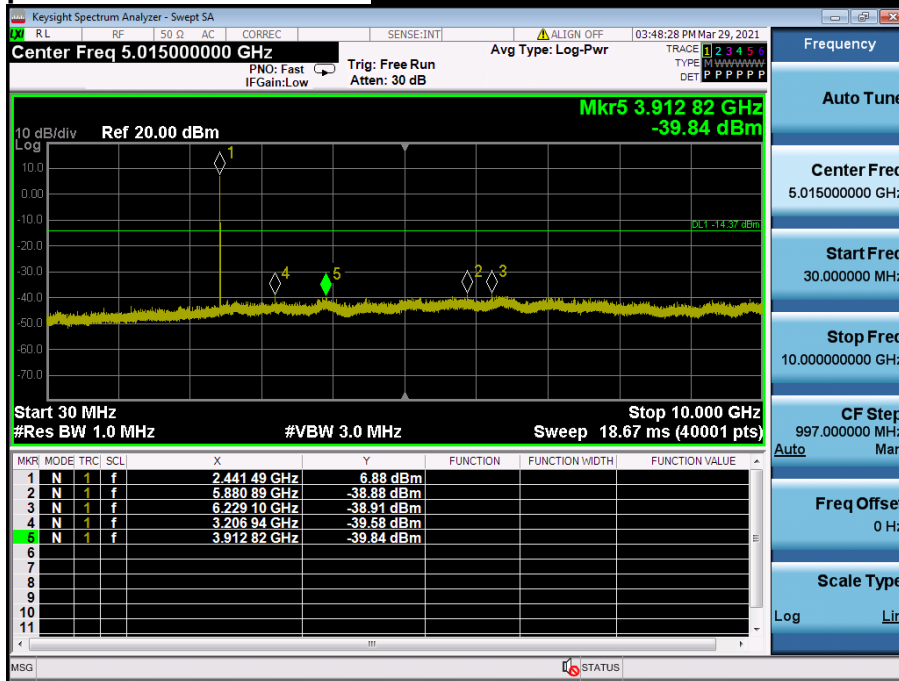


High Band-edge

Highest Channel & Modulation : $\pi/4$ DQPSK

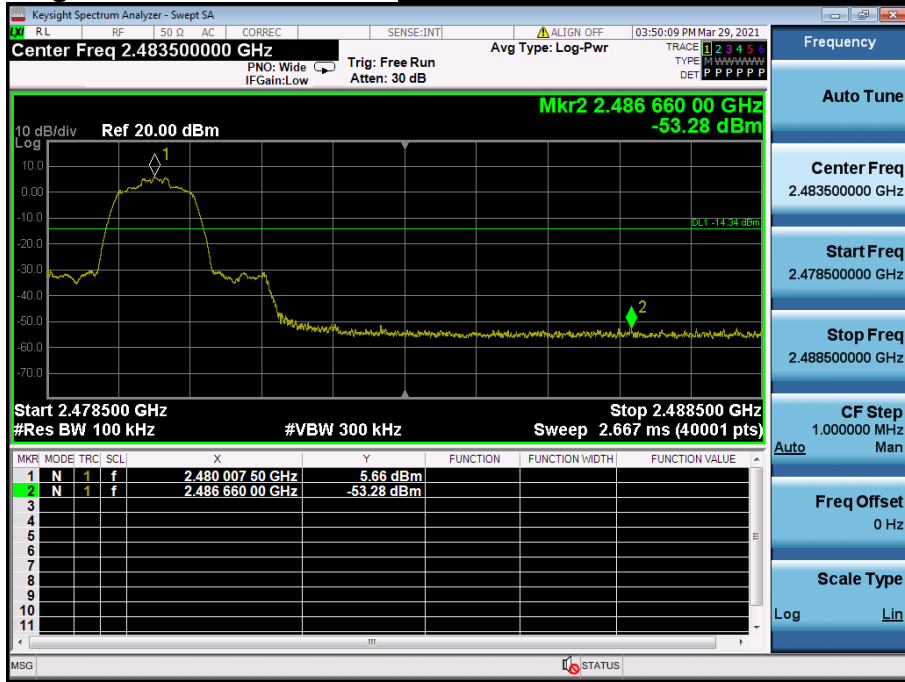


High Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK

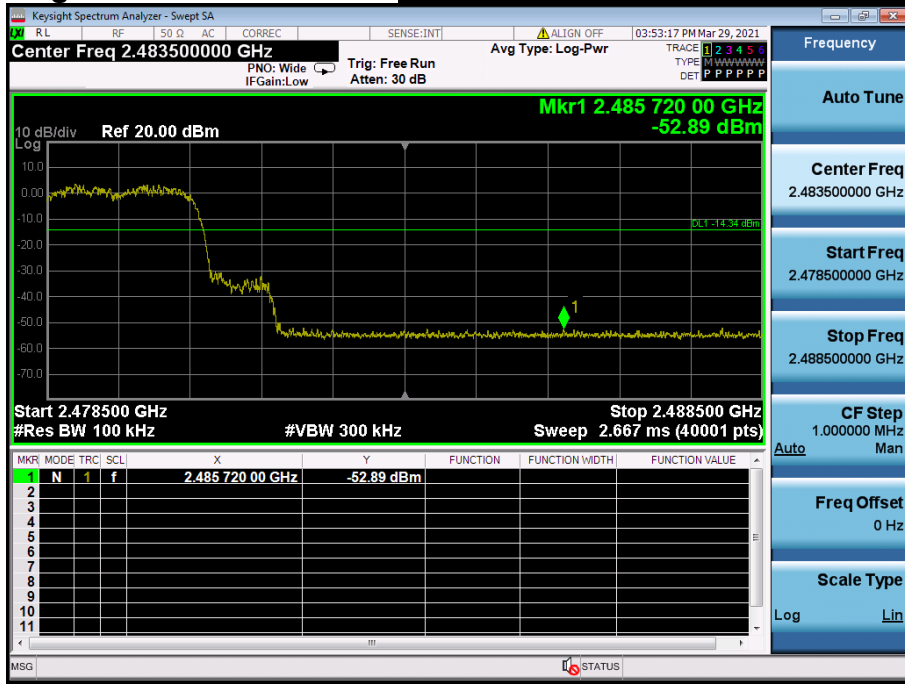



Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

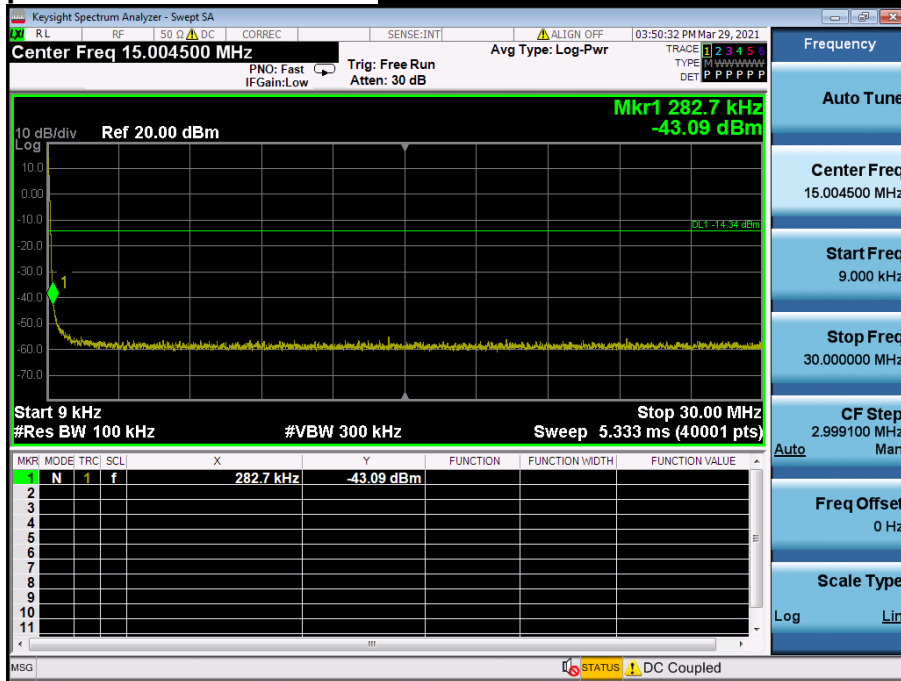


Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

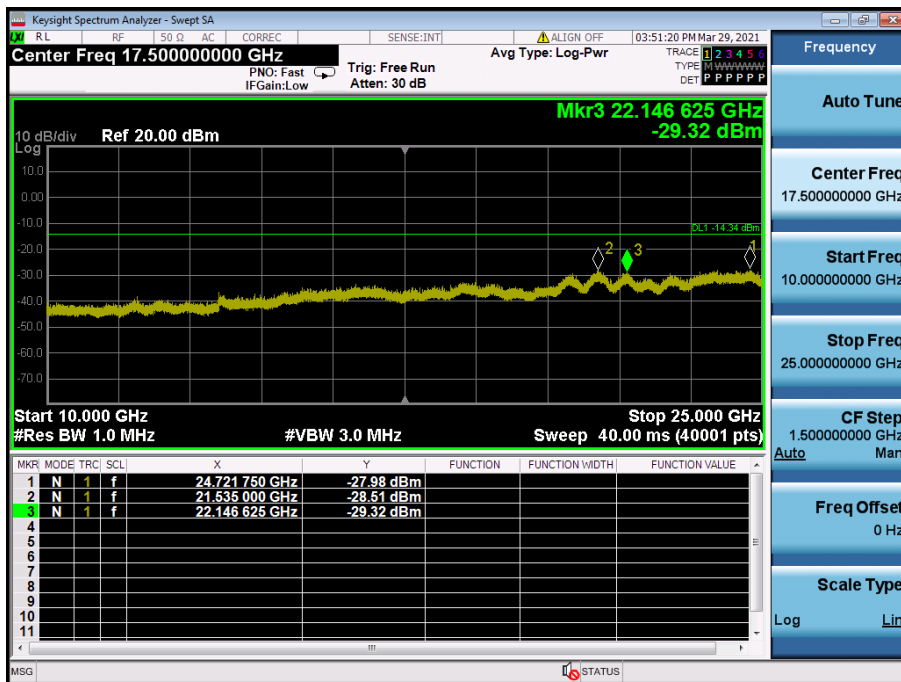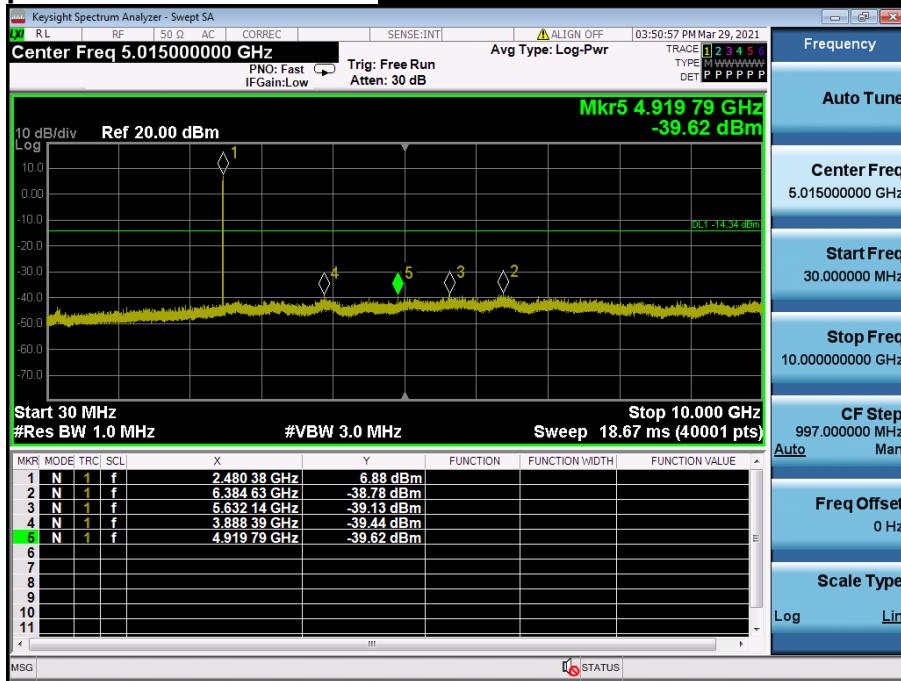


Low Band-edge

Lowest Channel & Modulation : 8DPSK

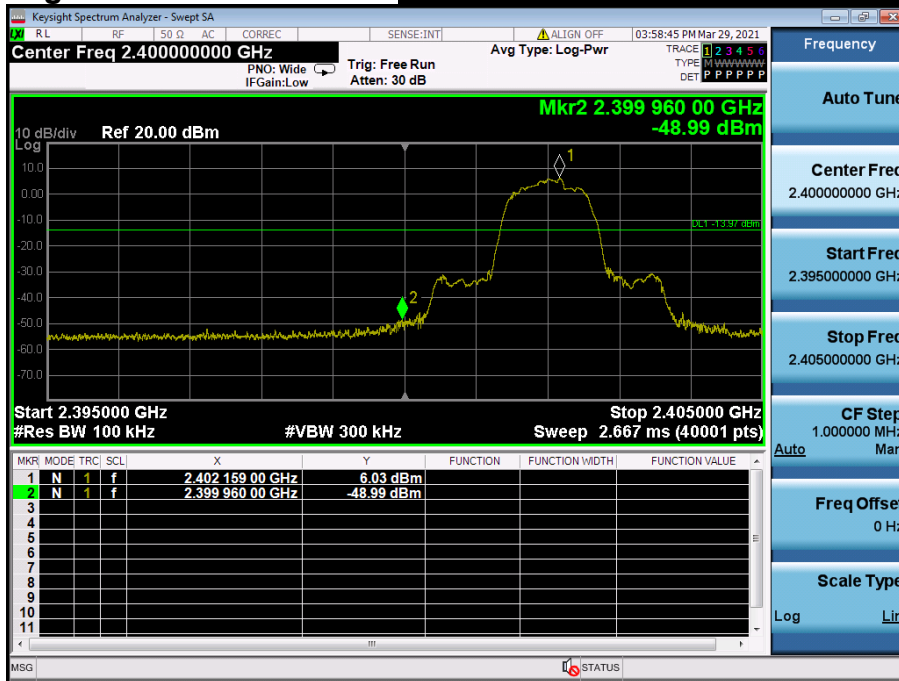

Low Band-edge

Hopping mode & Modulation : 8DPSK

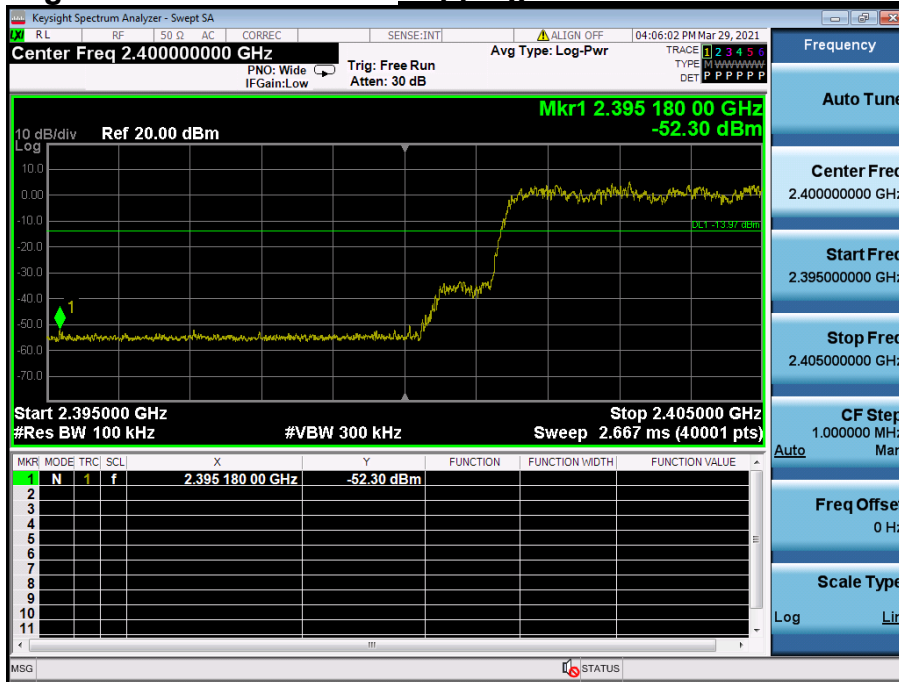

Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

